



TEST REPORT

Product Name: smart top-mounted portal
FCC ID: 2A742BRD-17
Trademark:  博纬智能
Model Number: BRD-17, BRD-16
Prepared For: Shenzhen BroadRadio RFID Technology Co., LTD
Address: B108, building 2, HONGPAI Industrial Zone, Qiaotou Community, Fuhai Town, Bao'an District, Shenzhen, P.R.C, China.
Manufacturer: Shenzhen BroadRadio RFID Technology Co., LTD
Address: B108, building 2, HONGPAI Industrial Zone, Qiaotou Community, Fuhai Town, Bao'an District, Shenzhen, P.R.C, China.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Jun. 27, 2022
Sample tested Date: Jun. 27, 2022 to Aug. 06, 2022
Issue Date: Aug. 06, 2022
Report No.: CTB220715017RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is RFID radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin He Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	2
6.1 Block Diagram Of Test Setup	2
6.2 Limit	2
6.3 Test procedure	2
6.4 Test Result	3
7. RADIATED SPURIOUS EMISSION	5
7.1 Block Diagram Of Test Setup	5
7.2 Limit	5
7.3 Test procedure	6
7.4 Test Result	7
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	12
8.1 Block Diagram Of Test Setup	12
8.2 Limit	12
8.3 Test procedure	12
8.4 Test Result	13
9. CONDUCTED PEAK OUTPUT POWER	21
9.1 Block Diagram Of Test Setup	21
9.2 Limit	21
9.3 Test procedure	21
9.4 Test Result	22
10. 20DB OCCUPIED BANDWIDTH	26
10.1 Block Diagram Of Test Setup	26
10.2 Limit	26
10.3 Test procedure	26
10.4 Test Result	26
11. CARRIER FREQUENCIES SEPARATION	30
11.1 Block Diagram Of Test Setup	30

11.2	Limit	30
11.3	Test procedure	30
11.4	Test Result	30
12.	HOPPING CHANNEL NUMBER	34
12.1	Block Diagram Of Test Setup	34
12.2	Limit	34
12.3	Test procedure	34
12.4	Test Result	34
13.	DWELL TIME	36
13.1	Block Diagram Of Test Setup	36
13.2	Limit	36
13.3	Test procedure	36
13.4	Test Result	37
14.	ANTENNA REQUIREMENT	41
15.	EUT PHOTOGRAPHS	42
16.	EUT TEST SETUP PHOTOGRAPHS	43

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB220715017RFX	Aug. 06, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209/15.247(d)	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(2)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	BRD-17, BRD-16
Model Description:	All model's the function, software and electric circuit are the same, only with the product Installation Method and model named different. Test sample model: BRD-17
Hardware Version:	V1.0
Software Version:	V1.0
operation Frequency:	902-928MHz
Max. RF output power:	24.133dBm
Type of Modulation:	ASK
Antenna installation:	Internal antenna
Antenna Gain:	1dBi
Ratings:	AC INPUT:100-240V 1.5A 50-60Hz DC OUTPYT:12.0V=3.33A 40.0W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	Switching Power Adapter	FSP	FSP040-DHAN3	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	902.50	14	909.00	27	915.50	40	922.00
2	903.00	15	909.50	28	916.00	41	922.50
3	903.50	16	910.00	29	916.50	42	923.00
4	904.00	17	910.50	30	917.00	43	923.50
5	904.50	18	911.00	31	917.50	44	924.00
6	905.00	19	911.50	32	918.00	45	924.50
7	905.50	20	912.00	33	918.50	46	925.00
8	906.00	21	912.50	34	919.00	47	925.50
9	906.50	22	913.00	35	919.50	46	926.00
10	907.00	23	913.50	36	920.00	47	926.50
11	907.50	24	914.00	37	920.50	46	927.00
12	908.00	25	914.50	38	921.00	47	927.50
13	908.50	26	915.00	39	921.50		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (ASK)	902.50MHz	915.00MHz	927.50MHz
Receiving (ASK)	902.50MHz	915.00MHz	927.50MHz

EUT has three Internal Antenna with Max Antenna Gain 1dBi on every antenna, CDD device with three spatial streams, according to KDB662911 D01 v02r01, Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(3/1)=4.77dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: Dutycycle>98%.

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11

17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

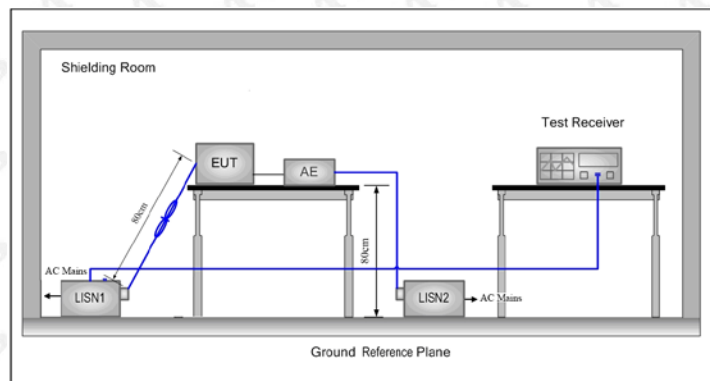

6.2 Limit


Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

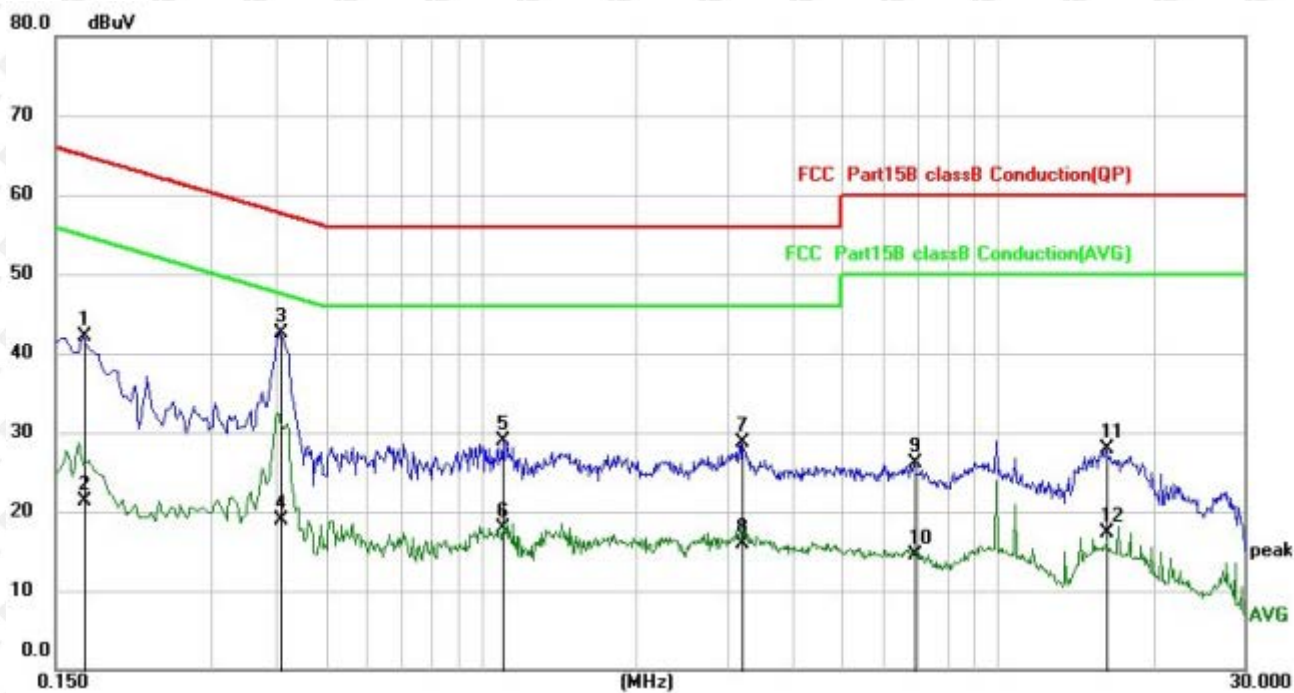

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1700	31.36	10.71	42.07	64.96	-22.89	QP
2		0.1700	10.54	10.71	21.25	54.96	-33.71	AVG
3	*	0.4100	31.92	10.57	42.49	57.65	-15.16	QP
4		0.4100	8.26	10.57	18.83	47.65	-28.82	AVG
5		1.1019	18.26	10.62	28.88	56.00	-27.12	QP
6		1.1019	7.35	10.62	17.97	46.00	-28.03	AVG
7		3.1900	18.07	10.64	28.71	56.00	-27.29	QP
8		3.1900	5.31	10.64	15.95	46.00	-30.05	AVG
9		6.9060	15.37	10.71	26.08	60.00	-33.92	QP
10		6.9060	3.88	10.71	14.59	50.00	-35.41	AVG
11		16.1500	17.00	10.92	27.92	60.00	-32.08	QP
12		16.1500	6.31	10.92	17.23	50.00	-32.77	AVG

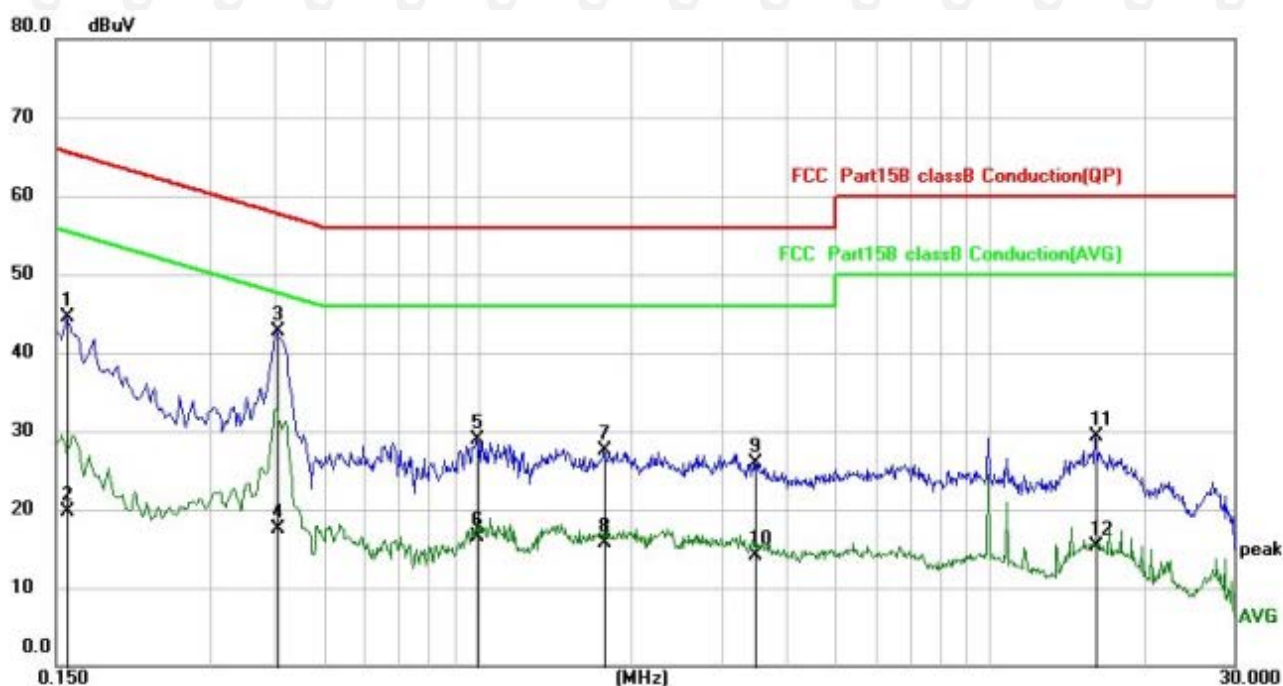

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1580	33.85	10.72	44.57	65.57	-21.00	QP
2		0.1580	8.91	10.72	19.63	55.57	-35.94	AVG
3	*	0.4060	32.10	10.57	42.67	57.73	-15.06	QP
4		0.4060	6.85	10.57	17.42	47.73	-30.31	AVG
5		0.9980	18.29	10.62	28.91	56.00	-27.09	QP
6		0.9980	5.80	10.62	16.42	46.00	-29.58	AVG
7		1.7660	16.92	10.63	27.55	56.00	-28.45	QP
8		1.7660	5.02	10.63	15.65	46.00	-30.35	AVG
9		3.4860	15.18	10.64	25.82	56.00	-30.18	QP
10		3.4860	3.48	10.64	14.12	46.00	-31.88	AVG
11		16.1299	18.37	10.92	29.29	60.00	-30.71	QP
12		16.1299	4.45	10.92	15.37	50.00	-34.63	AVG

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of GFSK Low Channel was reported.

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

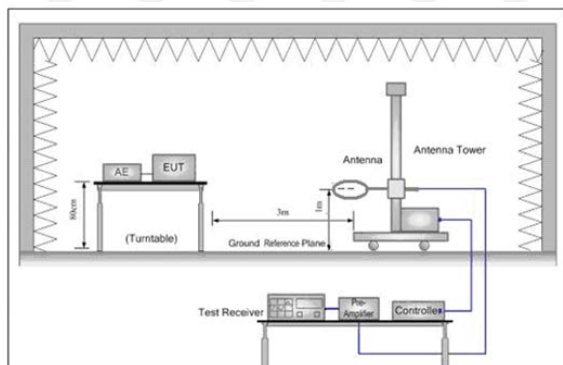


Figure 1. Below 30MHz

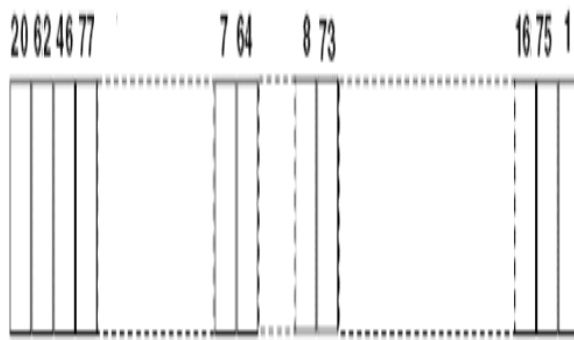


Figure 2. 30MHz to 1GHz

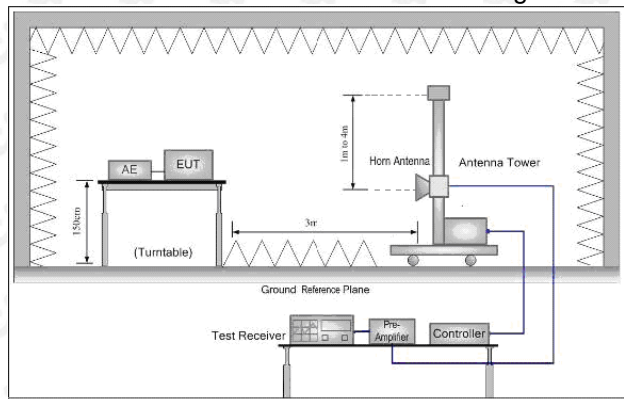


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: a.15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

b. The lower limit shall apply at the transition frequencies.

c. Emission level(dBuV/m)=20log Emission level(uV/m)

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Low channel below 1GHz Test Results:


Antenna polarity: H

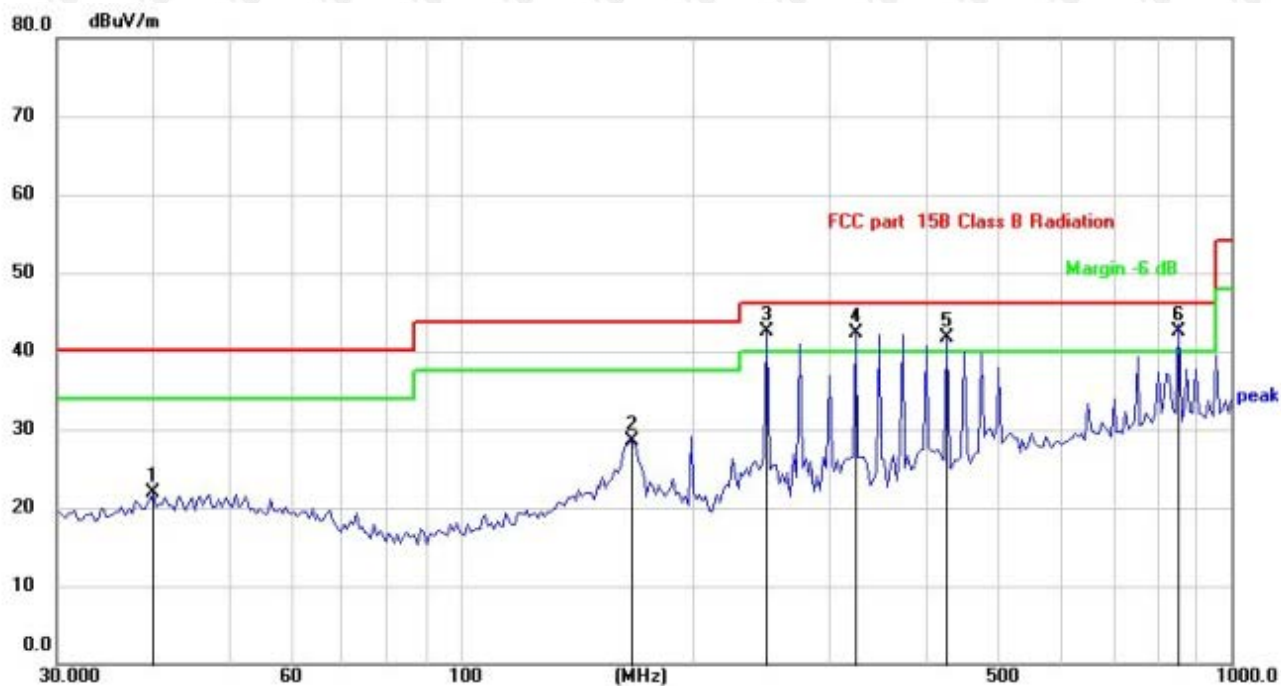

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.0643	27.21	-5.27	21.94	40.00	-18.06	QP
2		167.2366	34.53	-5.99	28.54	43.50	-14.96	QP
3	!	250.3010	48.20	-5.70	42.50	46.00	-3.50	QP
4	!	325.5957	46.58	-4.31	42.27	46.00	-3.73	QP
5	!	427.2694	42.64	-1.03	41.61	46.00	-4.39	QP
6	*	854.0247	36.41	6.13	42.54	46.00	-3.46	QP

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit – Level.

Antenna polarity: V

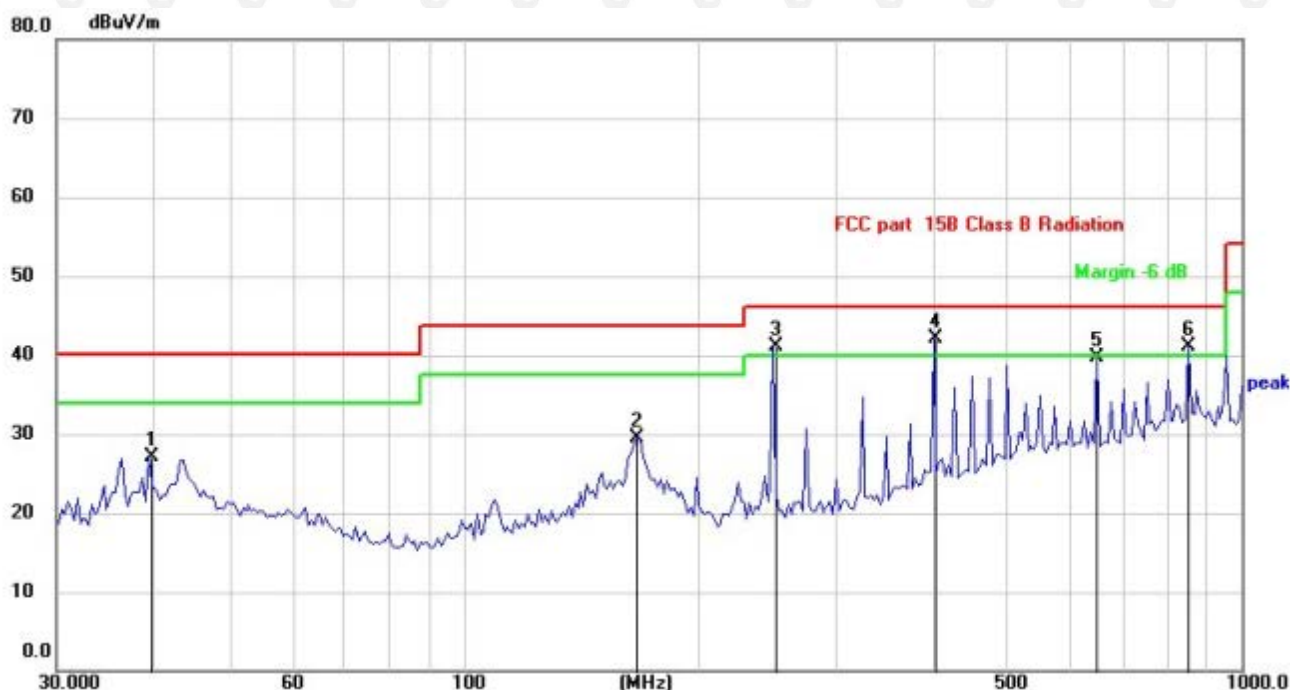

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		39.3681	32.47	-5.42	27.05	40.00	-12.95	QP
2		167.2366	35.59	-5.99	29.60	43.50	-13.90	QP
3	!	250.3012	46.87	-5.70	41.17	46.00	-4.83	QP
4	*	401.8385	43.73	-1.64	42.09	46.00	-3.91	QP
5		650.7997	36.46	3.28	39.74	46.00	-6.26	QP
6	!	854.0247	34.92	6.13	41.05	46.00	-4.95	QP

Remark: Transd = Cableloss + Antenna factor - Pre-amplifier; Margin = Limit - Level

Above 1 GHz Test Results:

ANT1+ANT2+ANT3 MIMO:

CH Low

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1805.5	108.37	-5.84	52.69	74	-21.31	peak
1805.5	95.59	-5.84	43.65	54	-10.35	AVG
2708.25	56.32	-3.64	52.68	74	-21.32	peak
2708.25	47.14	-3.64	43.50	54	-10.50	AVG
3611	58.19	-0.95	57.24	74	-16.76	peak
3611	48.13	-0.95	47.18	54	-6.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1805.5	108.49	-5.84	52.69	74	-21.31	peak
1805.5	95.46	-5.84	43.65	54	-10.35	AVG
2708.25	56.25	-3.64	52.61	74	-21.39	peak
2708.25	47.09	-3.64	43.45	54	-10.55	AVG
3611	58.11	-0.95	57.16	74	-16.84	peak
3611	48.19	-0.95	47.24	54	-6.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

ANT1+ANT2+ANT3 MIMO:

CH Middle

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1829.5	108.43	-5.71	52.67	74	-21.33	peak
1829.5	95.07	-5.71	45.61	54	-8.39	AVG
2744.25	55.98	-3.51	52.47	74	-21.53	peak
2744.25	46.72	-3.51	43.21	54	-10.79	AVG
3659	58.00	-0.82	57.18	74	-16.82	peak
3659	47.86	-0.82	47.04	54	-6.96	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1829.5	108.42	-5.71	52.67	74	-21.33	peak
1829.5	95.11	-5.71	45.61	54	-8.39	AVG
2744.25	55.96	-3.51	52.45	74	-21.55	peak
2744.25	46.86	-3.51	43.35	54	-10.65	AVG
3659	58.02	-0.82	57.20	74	-16.80	peak
3659	47.99	-0.82	47.17	54	-6.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

ANT1+ANT2+ANT3 MIMO:

CH High

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1851.5	56.48	-5.65	52.36	74	-21.64	peak
1851.5	47.31	-5.65	46.89	54	-7.11	AVG
2777.25	56.09	-3.43	52.66	74	-21.34	peak
2777.25	47.43	-3.43	44.00	54	-10.00	AVG
3703	57.39	-0.75	56.64	74	-17.36	peak
3703	47.67	-0.75	46.92	54	-7.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
1851.5	56.40	-5.65	52.36	74	-21.64	peak
1851.5	47.21	-5.65	46.89	54	-7.11	AVG
2777.25	56.27	-3.43	52.84	74	-21.16	peak
2777.25	47.39	-3.43	43.96	54	-10.04	AVG
3703	57.28	-0.75	56.53	74	-17.47	peak
3703	47.70	-0.75	46.95	54	-7.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2). All modes of operation were investigated and the worst-case emissions are reported.
- (3). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

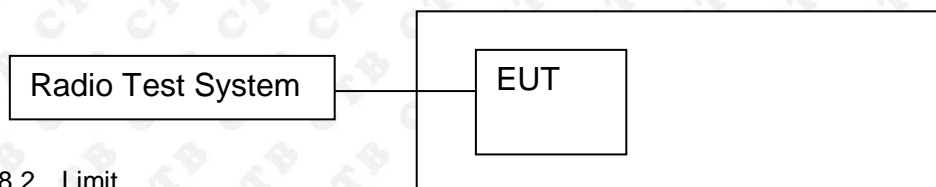

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).



8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result



ANT1


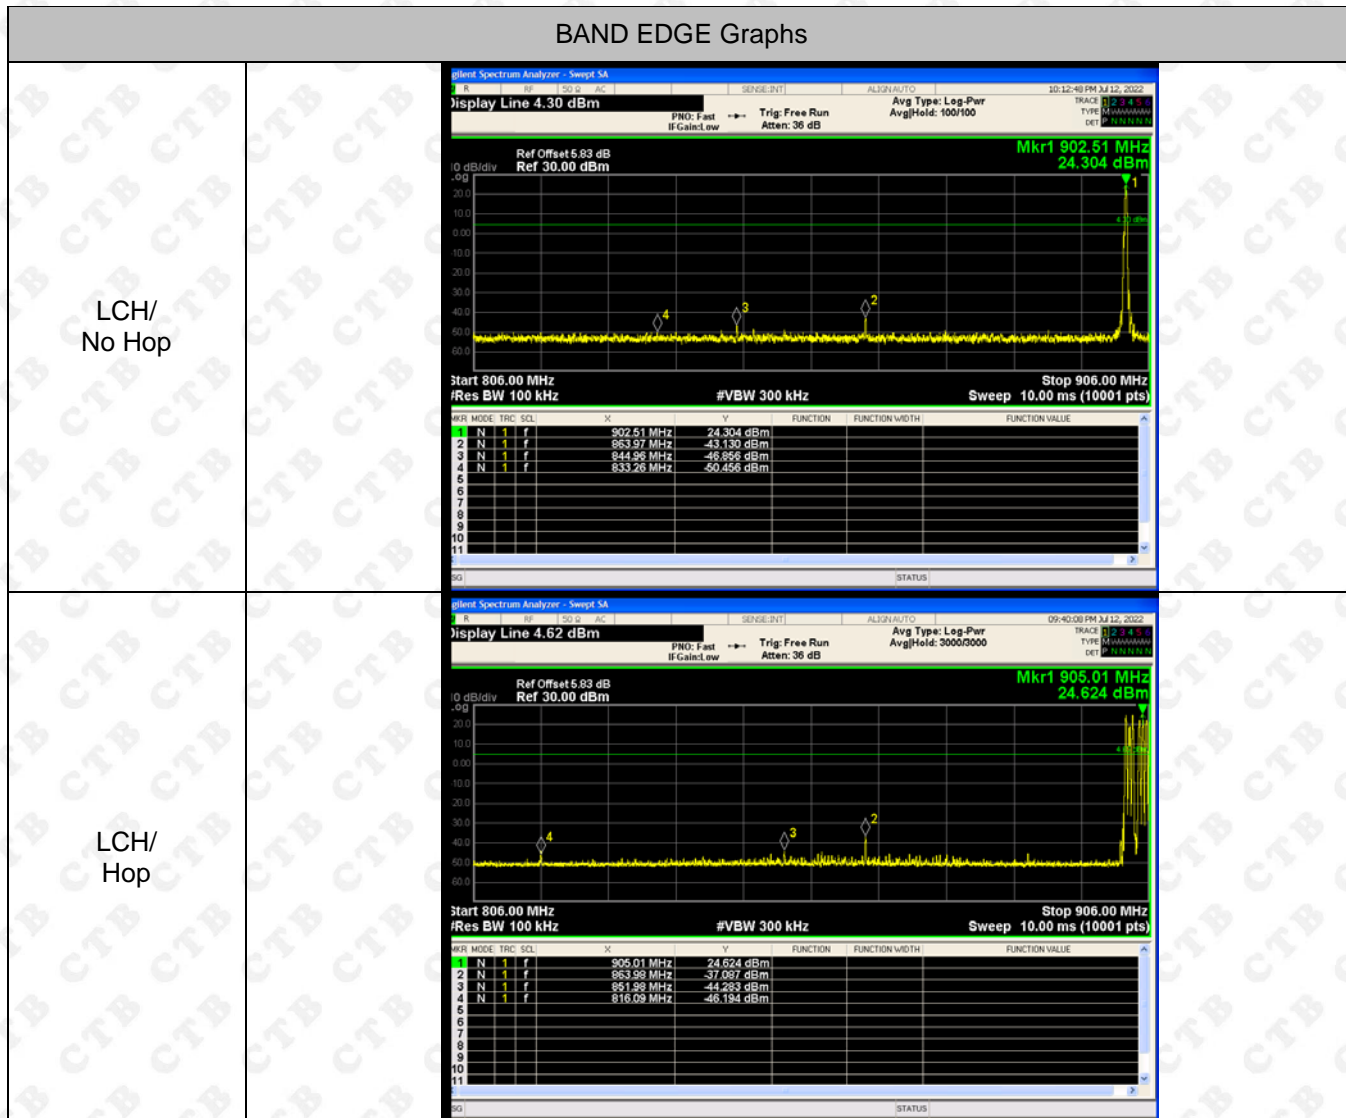


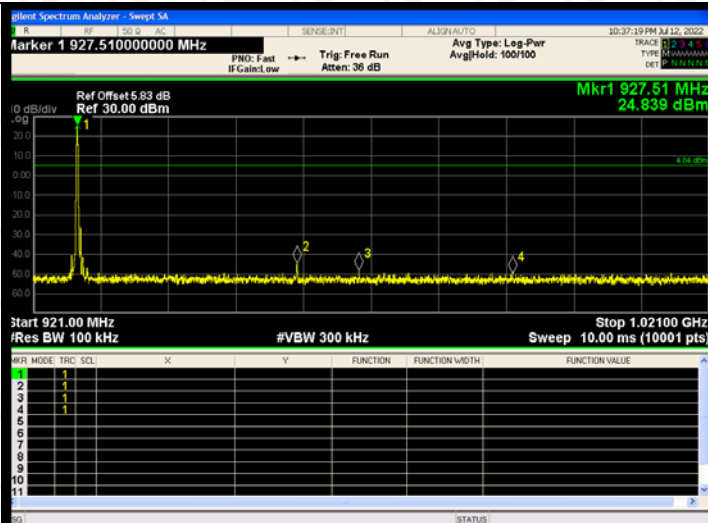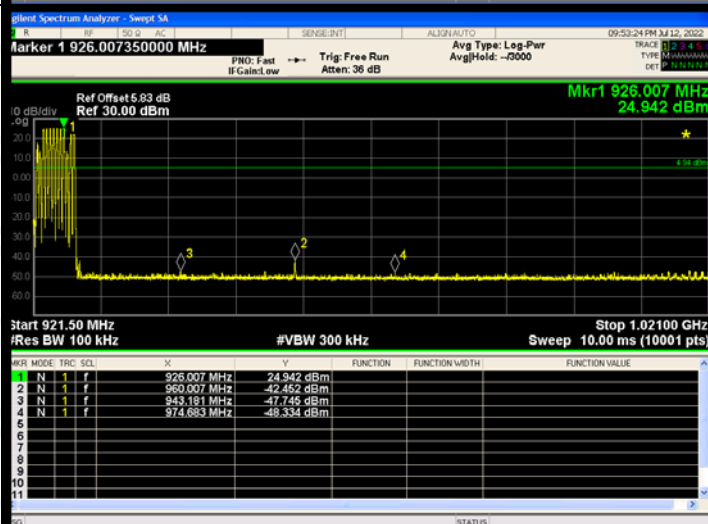HCH/
No Hop

HCH/
Hop


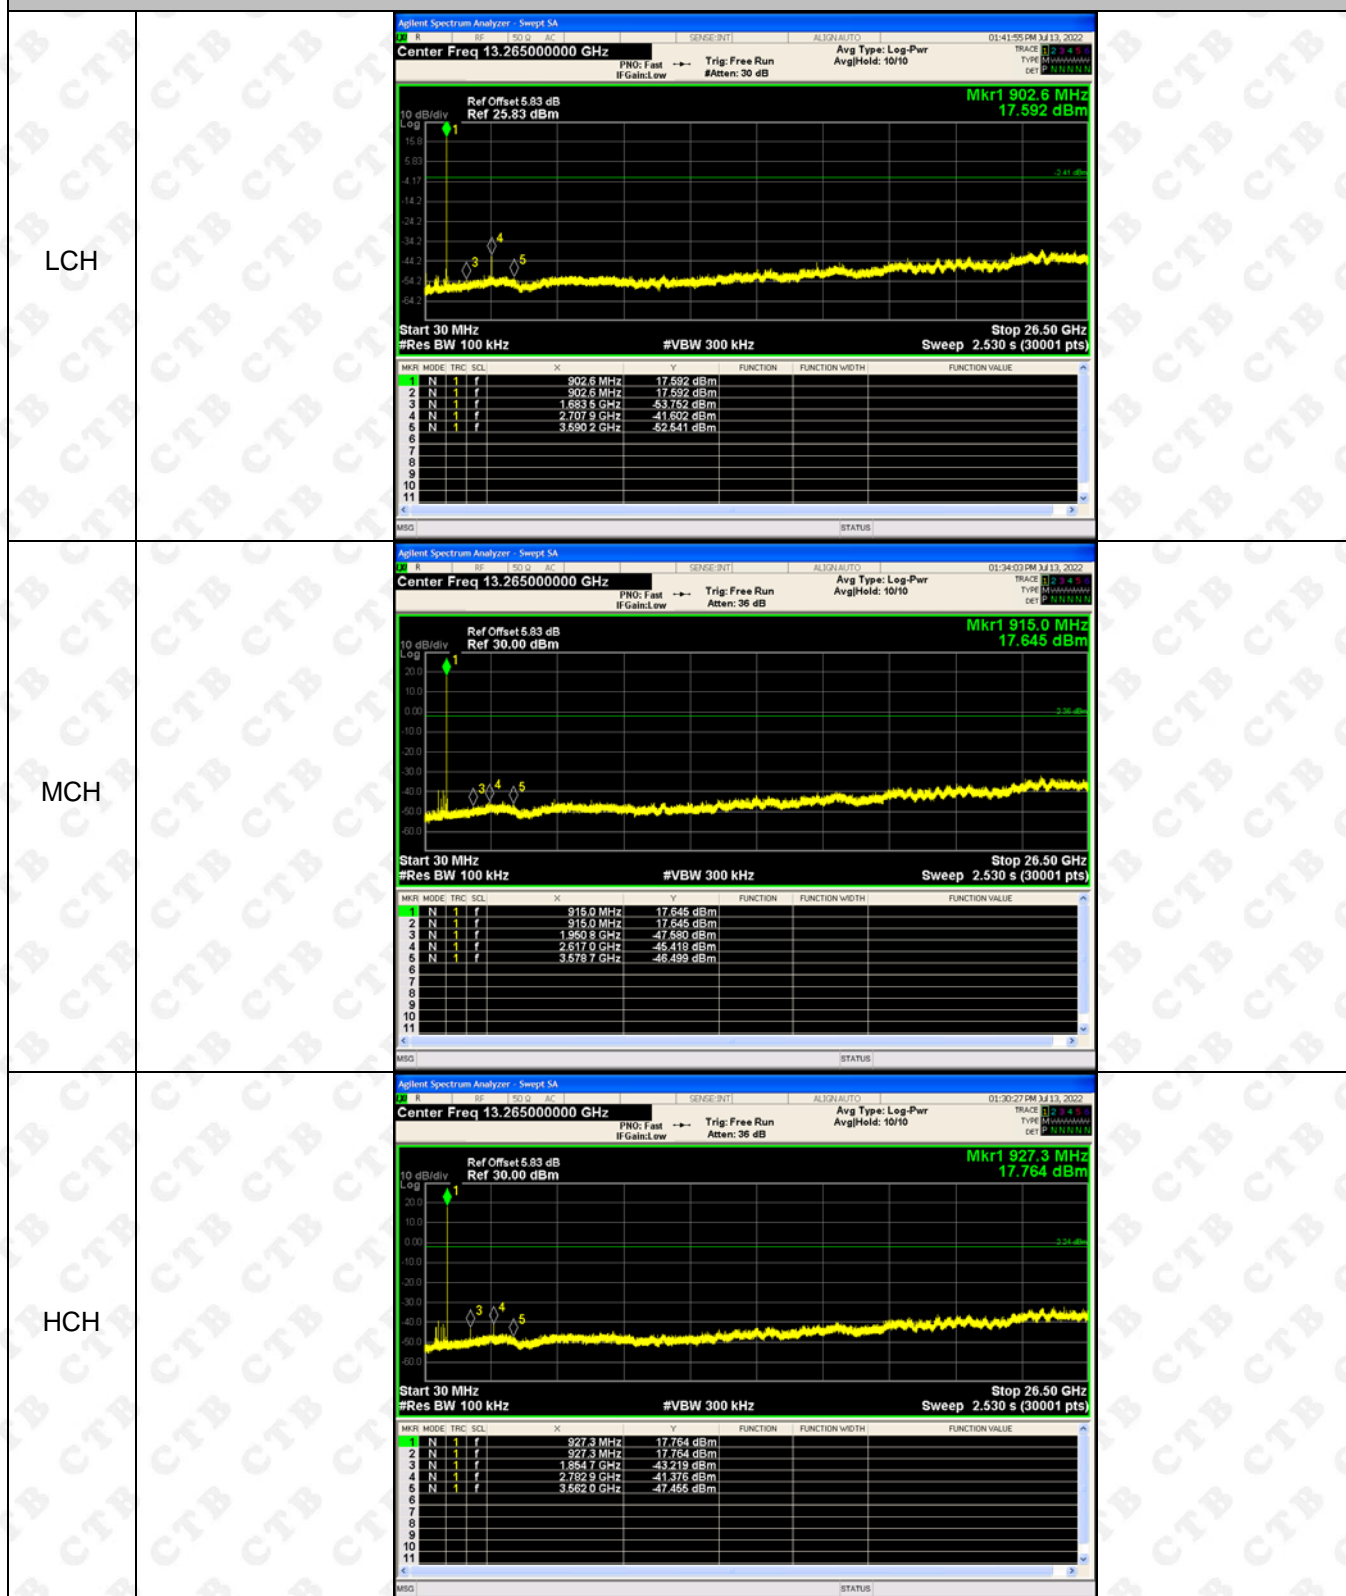
ANT2

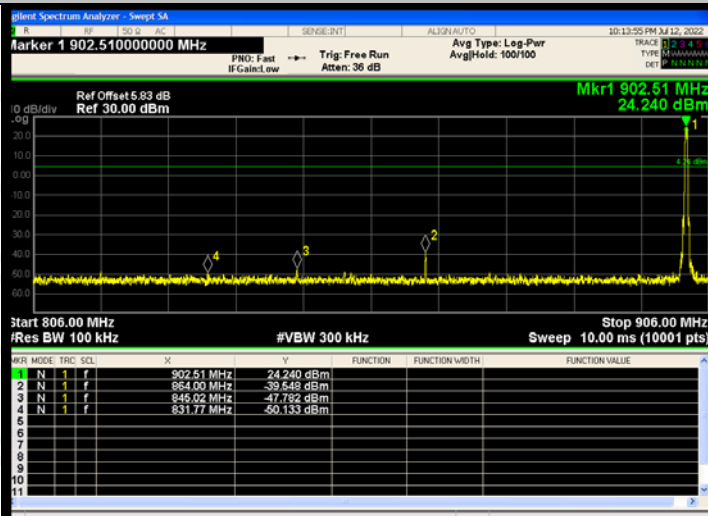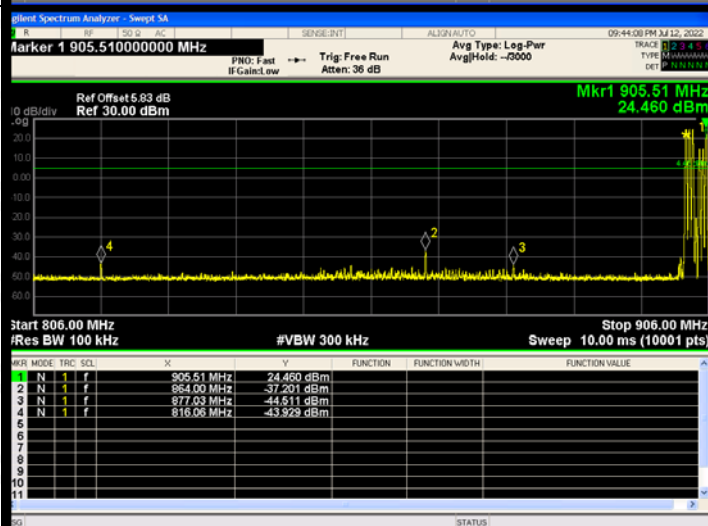BAND EDGE Graphs

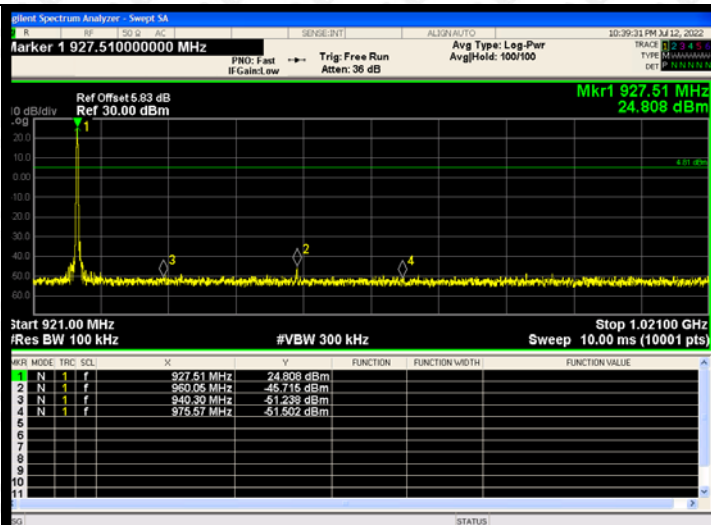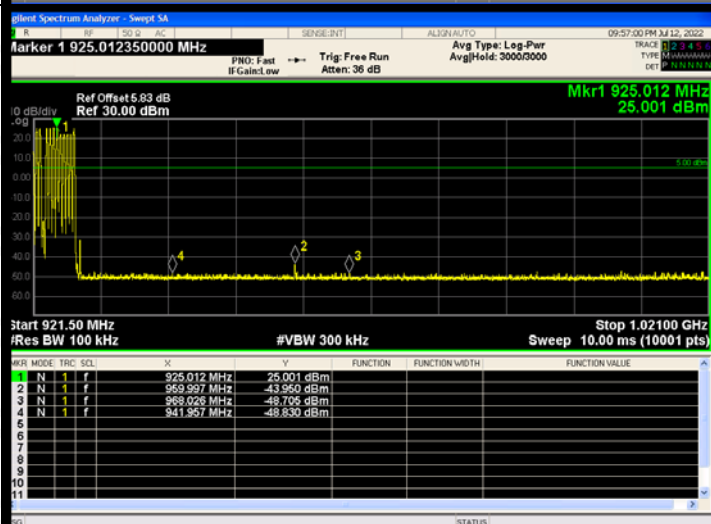LCH/
No Hop

LCH/
Hop


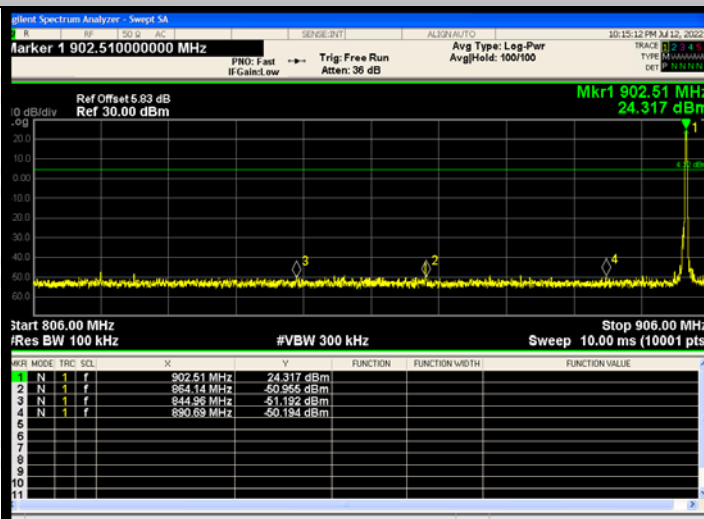
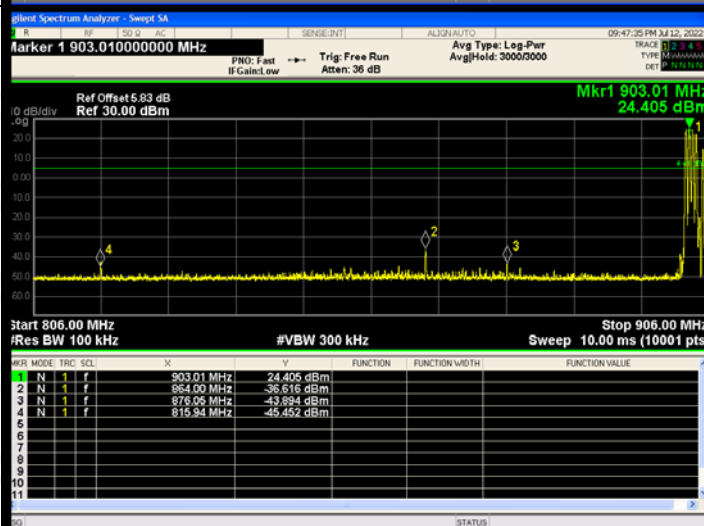
HCH/
No Hop

HCH/
Hop


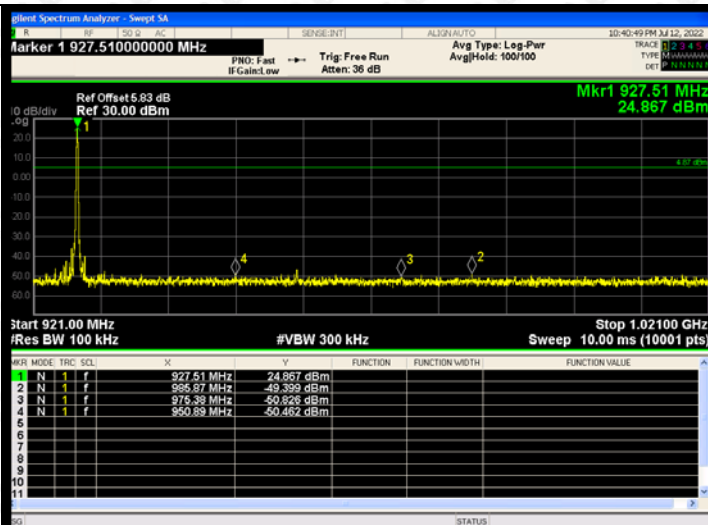
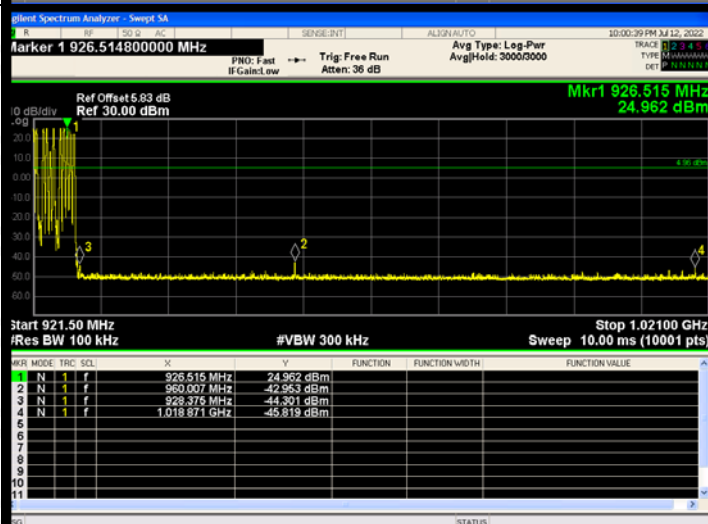
RF Conducted Spurious Emissions Graphs




ANT3

BAND EDGE Graphs

LCH/
No Hop

LCH/
Hop


HCH/
No Hop

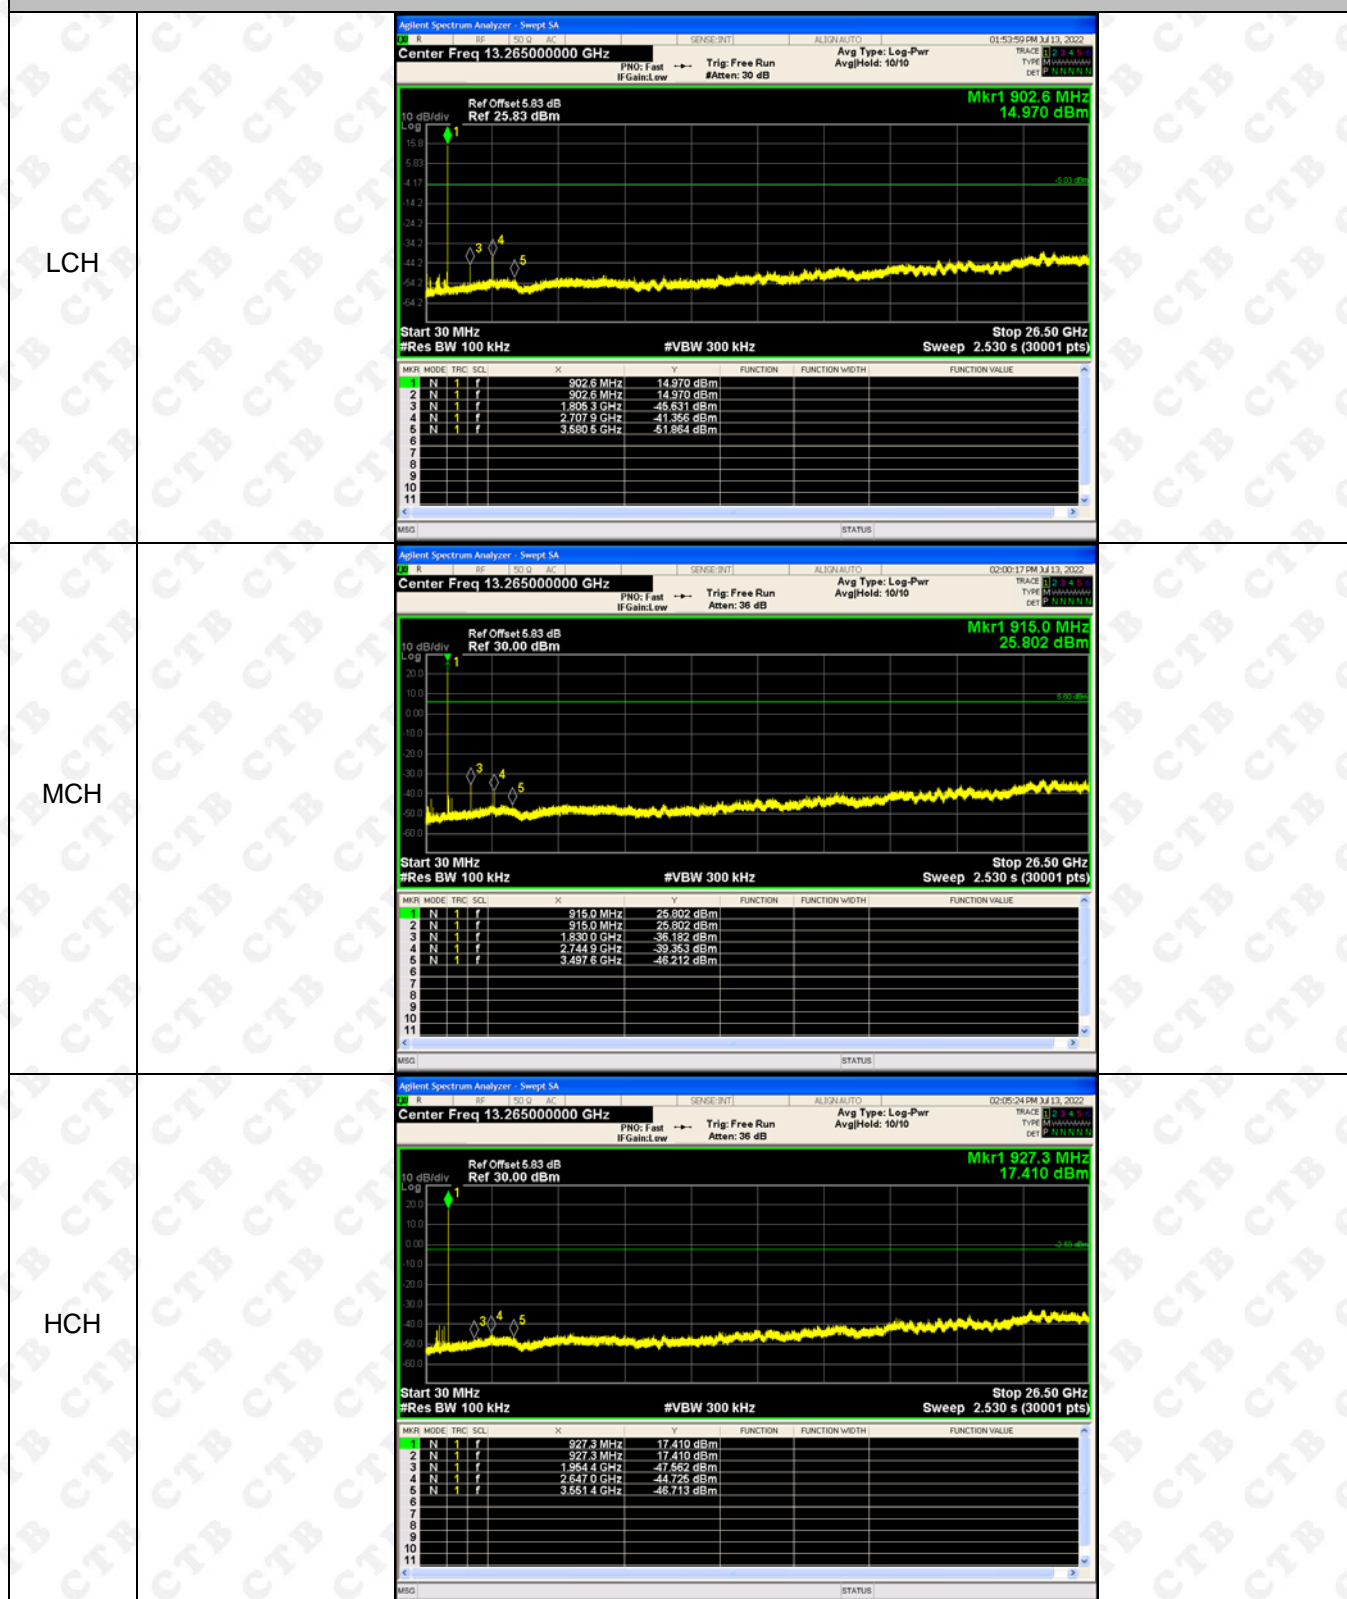HCH/
Hop


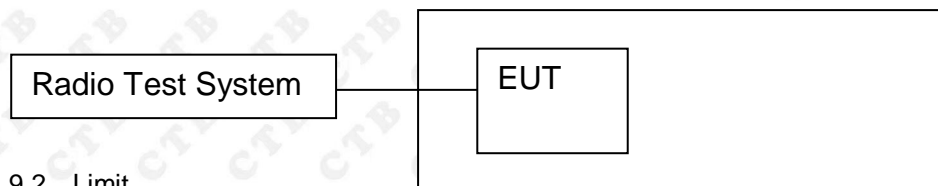
RF Conducted Spurious Emissions Graphs



1.The margin of worst case ANT(1) test data has over 3dB, so the MIMO mode shall be passed.

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Peak output Power: <1W=30dBm

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Maximum Output Power [dBm] ant 3	Total Power Conducted Output Power(PK)	Limit[dBm]	Verdict
LCH	23.276	24.133	24.106	28.627	30	PASS
MCH	23.084	24.012	24.000	28.491	30	PASS
HCH	23.787	23.455	23.834	28.466	30	PASS


ANT1

Test Graph:

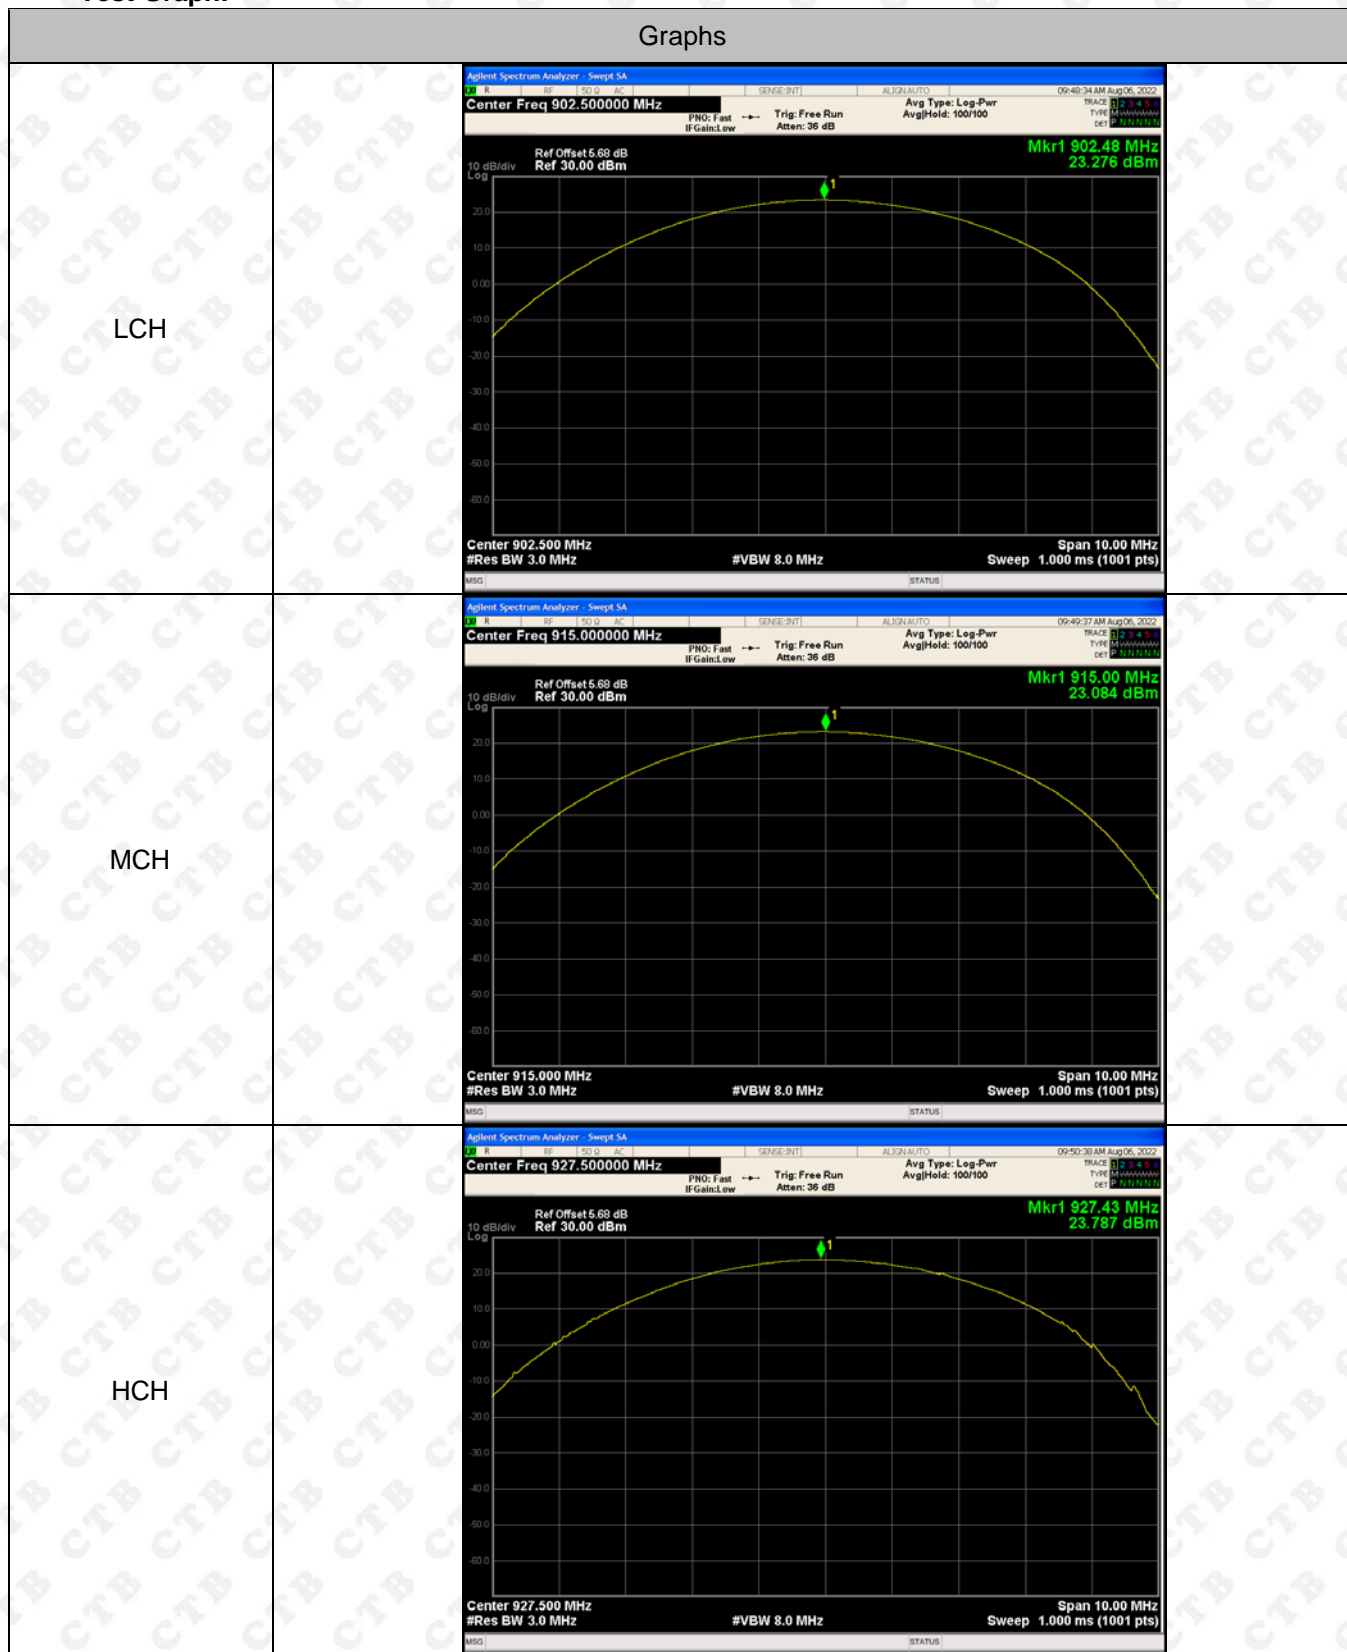

ANT2

Test Graph:

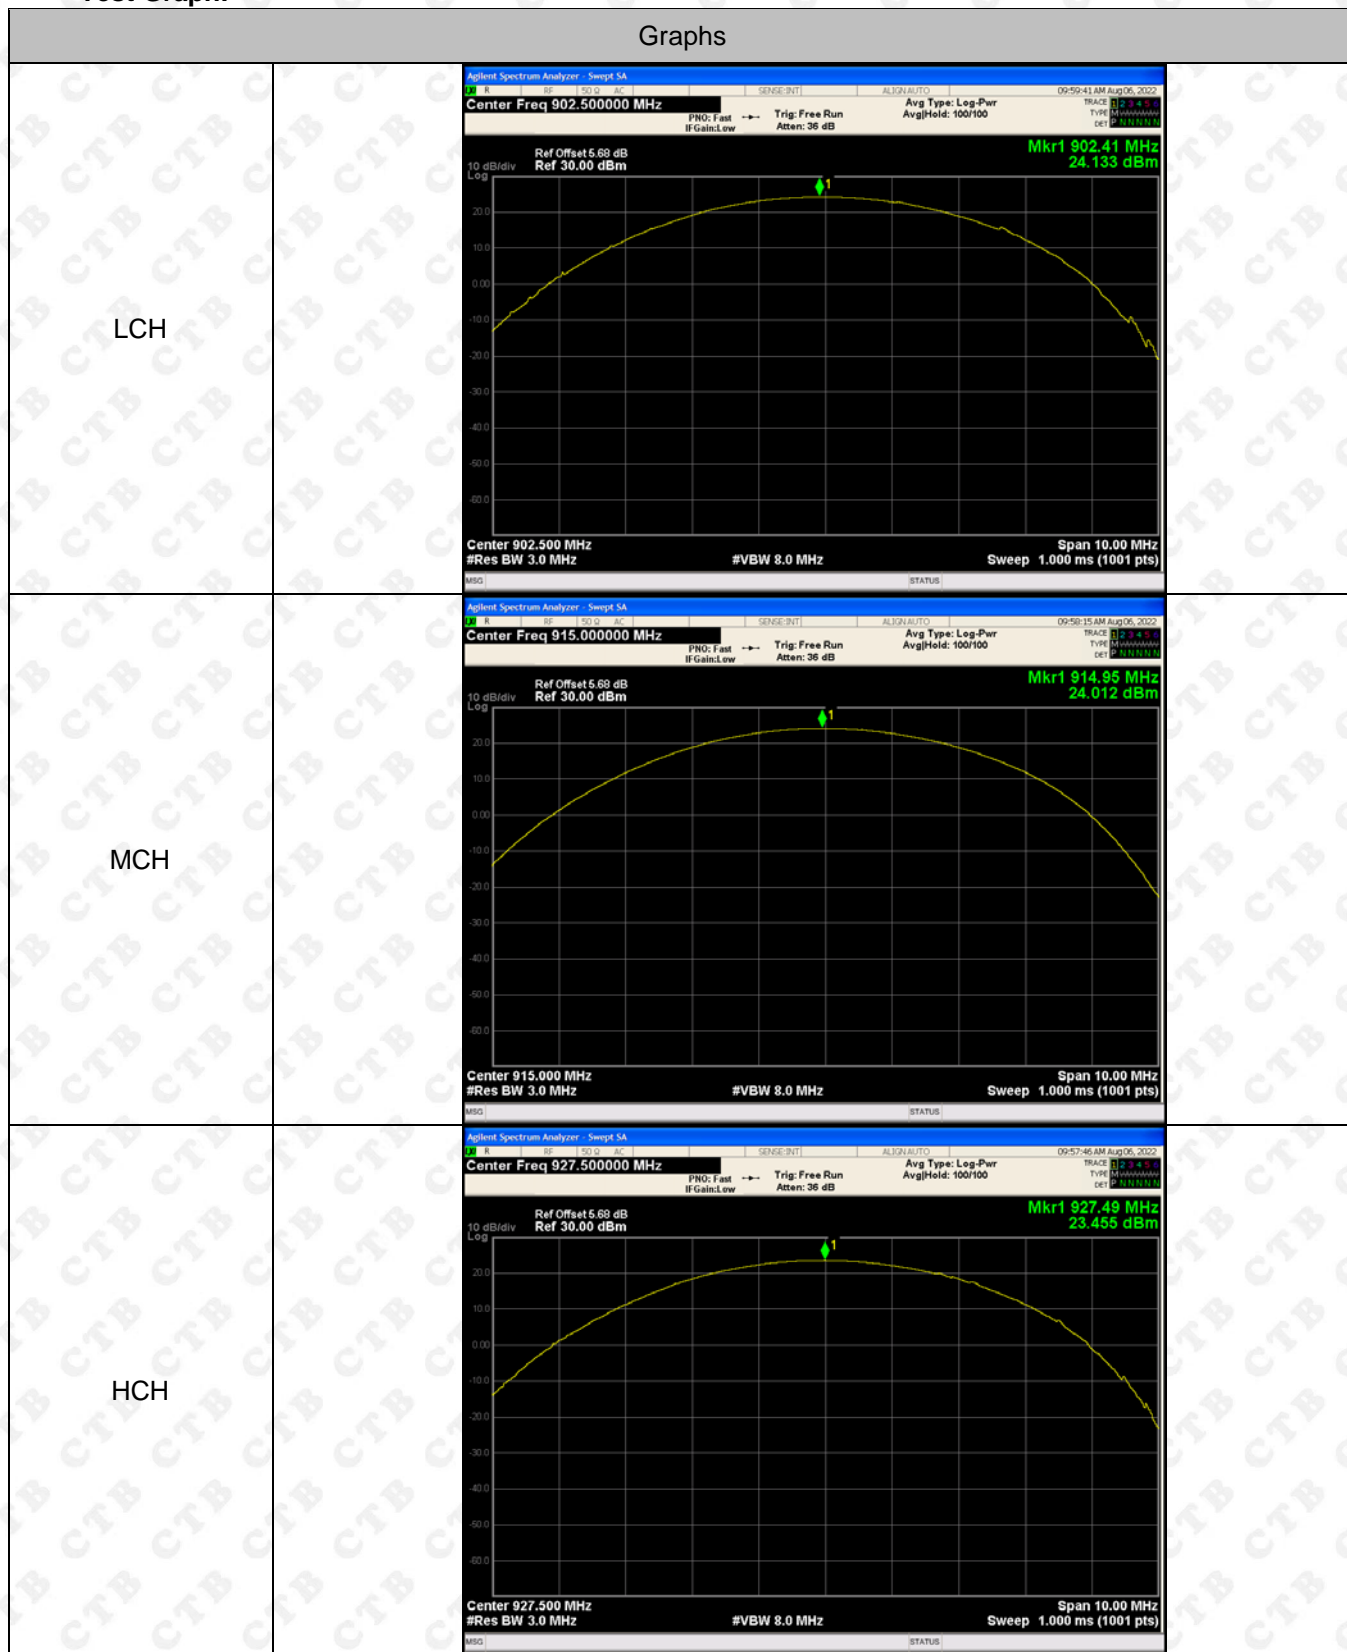


ANT3


Test Graph:

Graphs


LCH

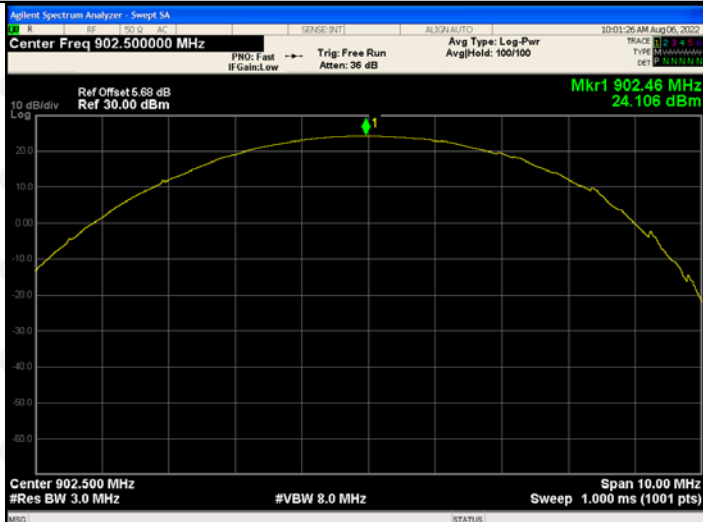

MCH

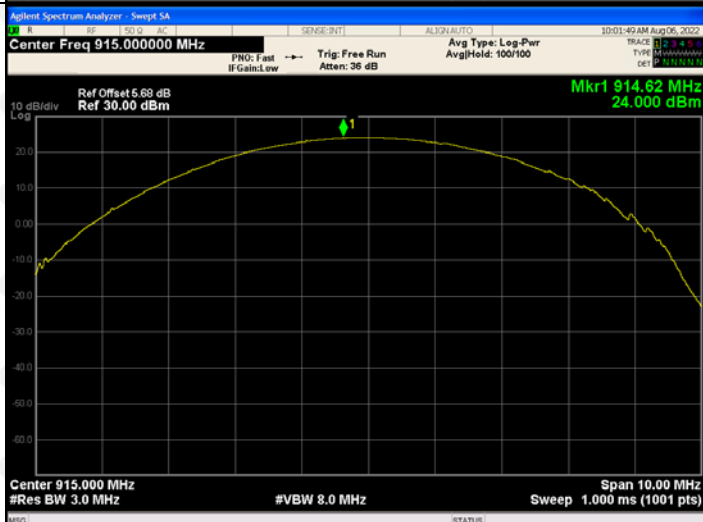


HCH

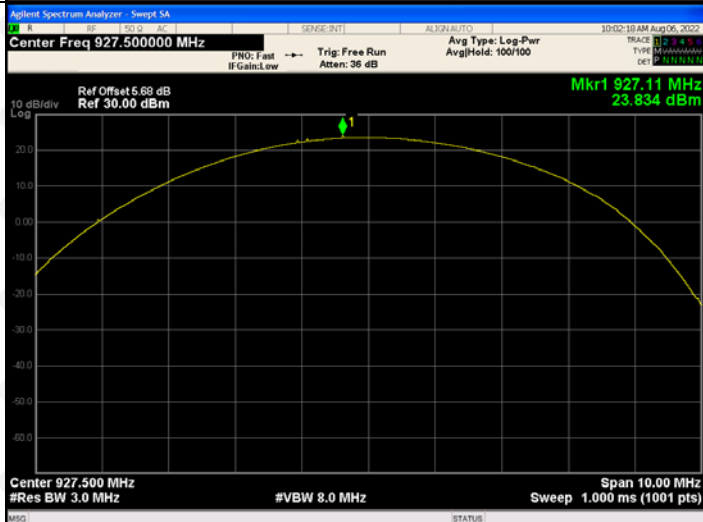

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

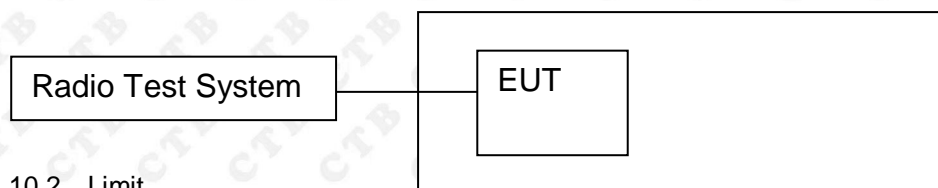

10.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1

Frequency	20dB Bandwidth (MHz)	Result
Low channel	0.267	PASS
Mid channel	0.251	PASS
High channel	0.311	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

ANT2

Frequency	20dB Bandwidth (MHz)	Result
Low channel	0.265	PASS
Mid channel	0.287	PASS
High channel	0.289	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

ANT3




Frequency	20dB Bandwidth (MHz)	Result
Low channel	0.280	PASS
Mid channel	0.286	PASS
High channel	0.256	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.




Test Graph:
ANT1

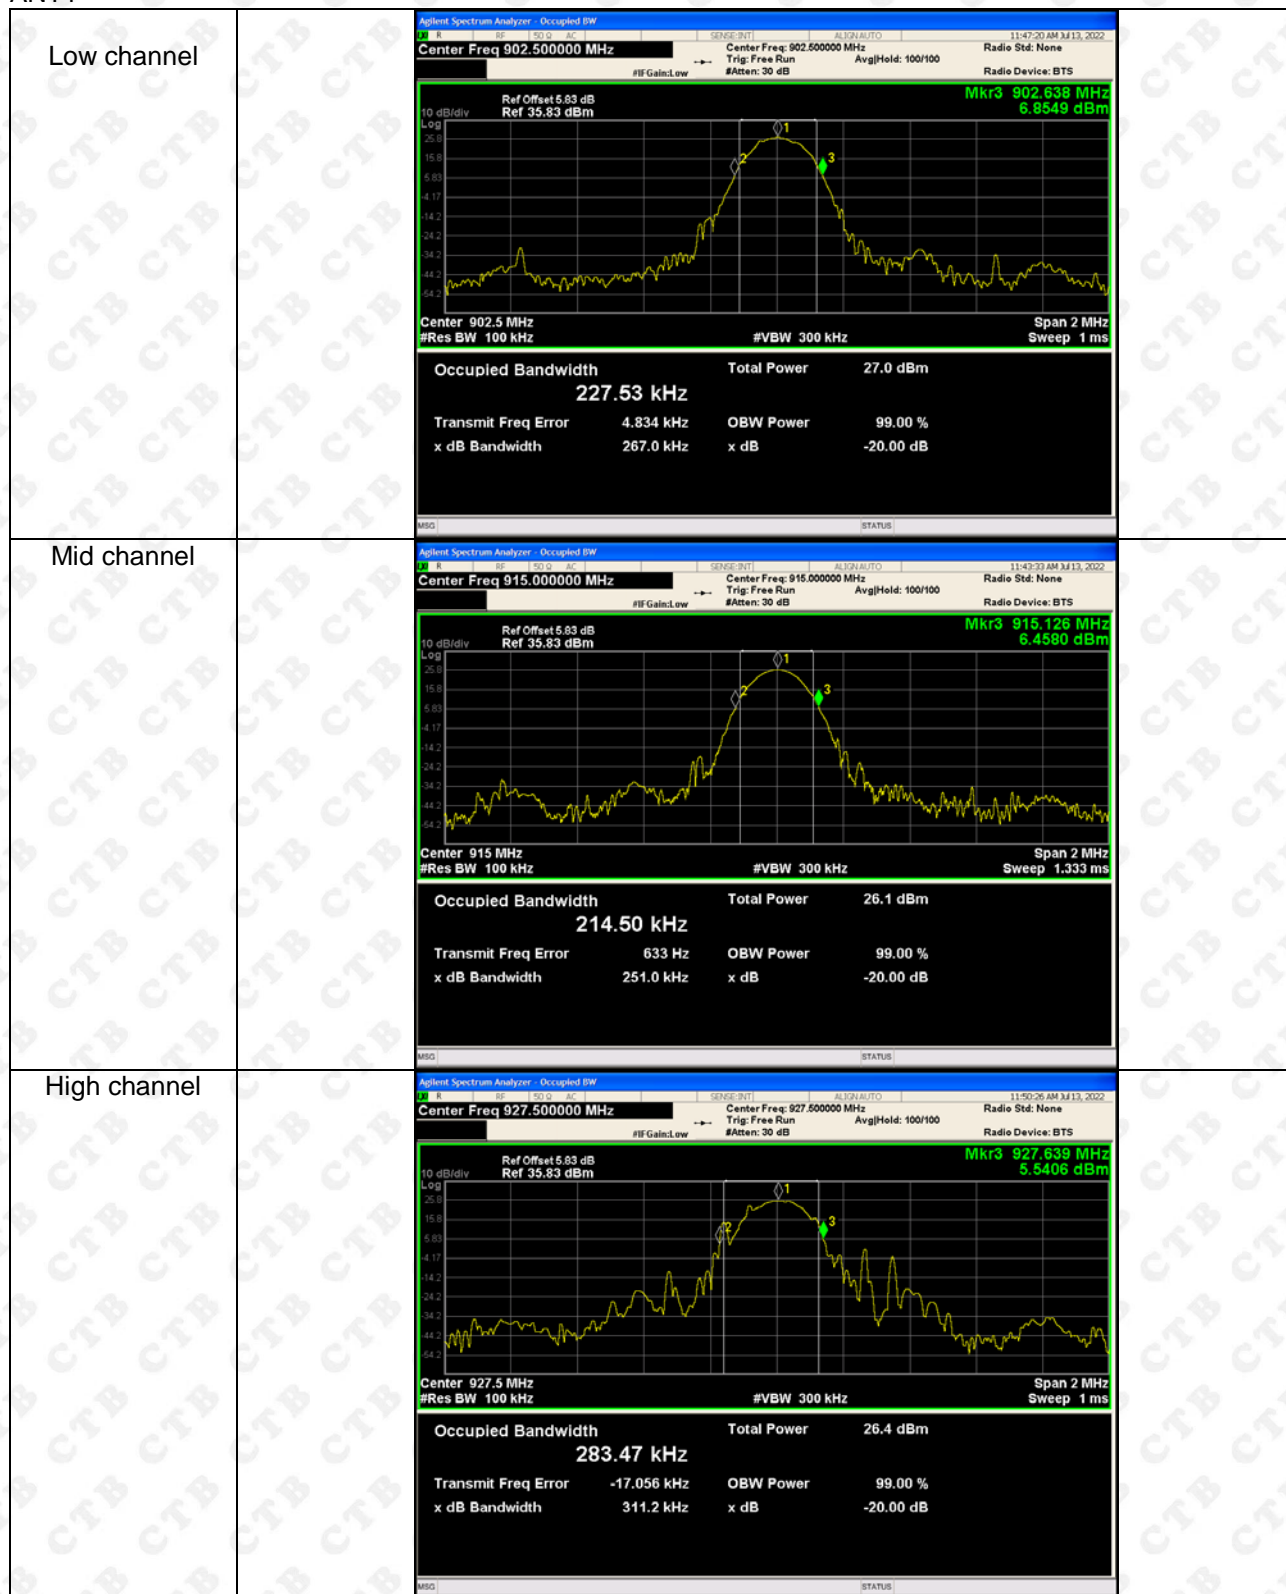

ANT2

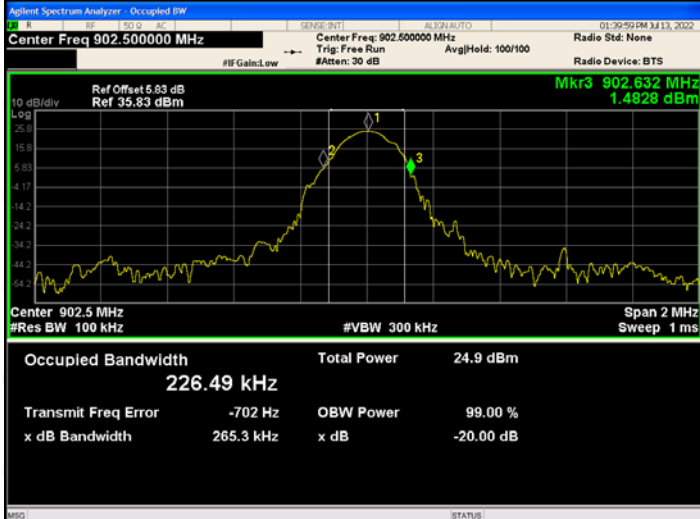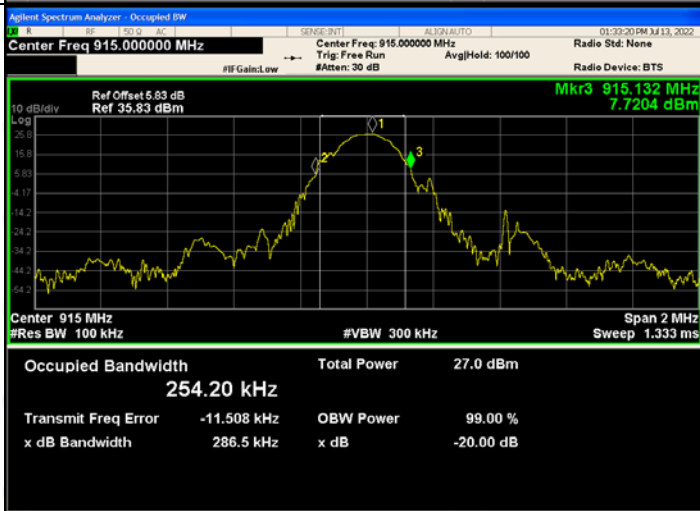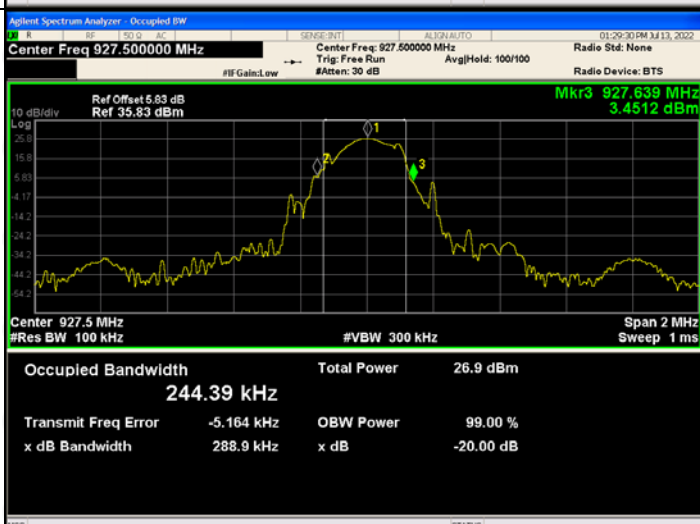
<p>Low channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 902.500000 MHz</p> <p>Center Freq: 902.500000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 902.632 MHz</p> <p>1.4828 dBm</p> <p>Center 902.5 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth</p> <p>226.49 kHz</p> <p>Total Power</p> <p>24.9 dBm</p> <p>Transmit Freq Error</p> <p>-702 Hz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>265.3 kHz</p> <p>x dB</p> <p>-20.00 dB</p>
<p>Mid channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 915.000000 MHz</p> <p>Center Freq: 915.000000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 915.132 MHz</p> <p>7.7204 dBm</p> <p>Center 915 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1.333 ms</p> <p>Occupied Bandwidth</p> <p>254.20 kHz</p> <p>Total Power</p> <p>27.0 dBm</p> <p>Transmit Freq Error</p> <p>-11.508 kHz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>286.5 kHz</p> <p>x dB</p> <p>-20.00 dB</p>
<p>High channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 927.500000 MHz</p> <p>Center Freq: 927.500000 MHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 927.639 MHz</p> <p>3.4512 dBm</p> <p>Center 927.5 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth</p> <p>244.39 kHz</p> <p>Total Power</p> <p>26.9 dBm</p> <p>Transmit Freq Error</p> <p>-5.164 kHz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>288.9 kHz</p> <p>x dB</p> <p>-20.00 dB</p>

ANT3
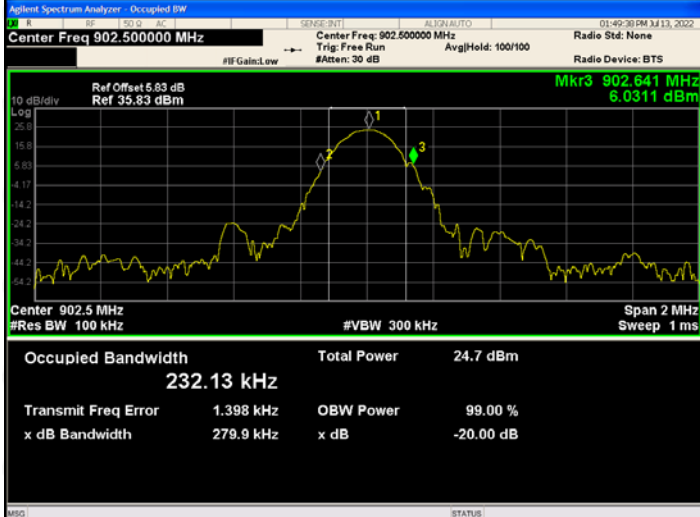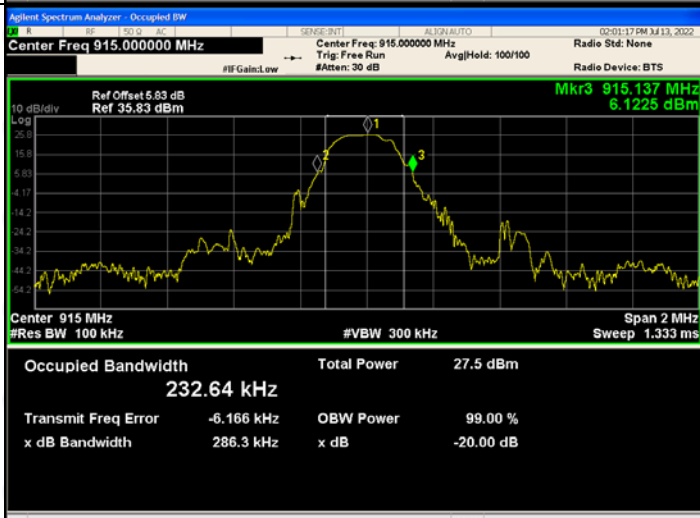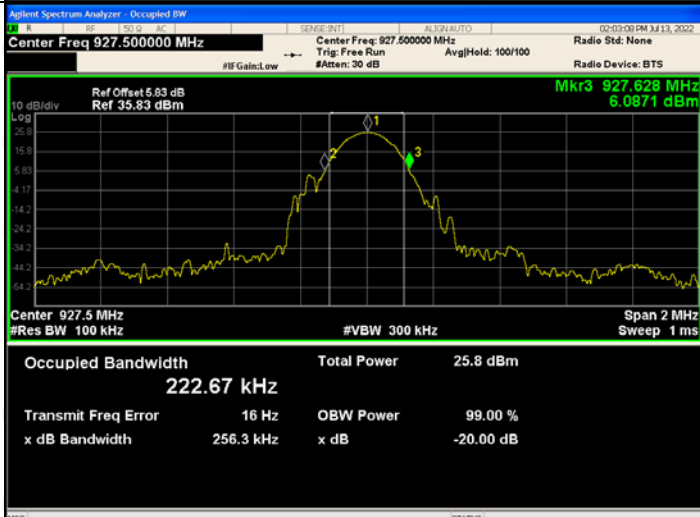
<p>Low channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 902.500000 MHz</p> <p>Trig: Free Run</p> <p>#Att: 30 dB</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 902.641 MHz</p> <p>6.0311 dBm</p> <p>Center 902.5 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth</p> <p>232.13 kHz</p> <p>Total Power</p> <p>24.7 dBm</p> <p>Transmit Freq Error</p> <p>1.398 kHz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>279.9 kHz</p> <p>x dB</p> <p>-20.00 dB</p>
<p>Mid channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 915.000000 MHz</p> <p>Trig: Free Run</p> <p>#Att: 30 dB</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 915.137 MHz</p> <p>6.1225 dBm</p> <p>Center 915 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1.333 ms</p> <p>Occupied Bandwidth</p> <p>232.64 kHz</p> <p>Total Power</p> <p>27.5 dBm</p> <p>Transmit Freq Error</p> <p>-6.166 kHz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>286.3 kHz</p> <p>x dB</p> <p>-20.00 dB</p>
<p>High channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 927.500000 MHz</p> <p>Trig: Free Run</p> <p>#Att: 30 dB</p> <p>Ref Offset 5.83 dB</p> <p>Ref 35.83 dBm</p> <p>Mkr3 927.628 MHz</p> <p>6.0871 dBm</p> <p>Center 927.5 MHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 2 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth</p> <p>222.67 kHz</p> <p>Total Power</p> <p>25.8 dBm</p> <p>Transmit Freq Error</p> <p>16 Hz</p> <p>OBW Power</p> <p>99.00 %</p> <p>x dB Bandwidth</p> <p>256.3 kHz</p> <p>x dB</p> <p>-20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

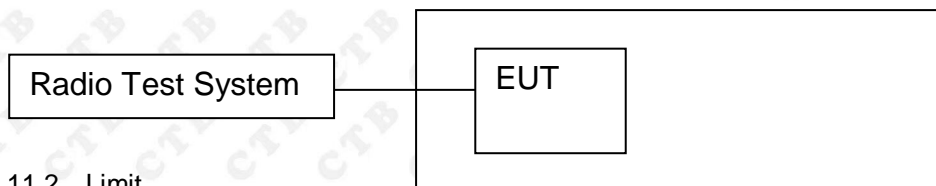

11.2 Limit

At least 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 10kHz. VBW = 30kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit [MHz]	Verdict
ANT1	LCH	0.498	0.267	PASS
	MCH	0.502	0.251	PASS
	HCH	0.501	0.311	PASS
ANT2	LCH	0.501	0.265	PASS
	MCH	0.500	0.287	PASS
	HCH	0.501	0.289	PASS
ANT3	LCH	0.499	0.280	PASS
	MCH	0.500	0.286	PASS
	HCH	0.498	0.256	PASS

Test Graph


ANT1

Graphs

LCH



MCH

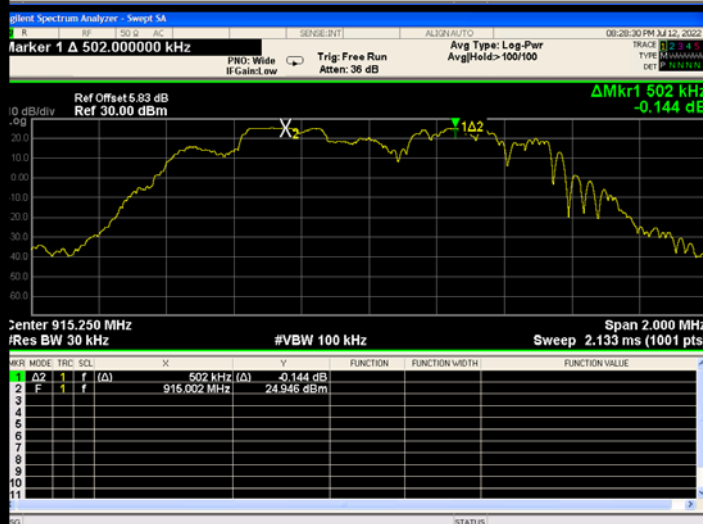

HCH




ANT2

Graphs


LCH



MCH

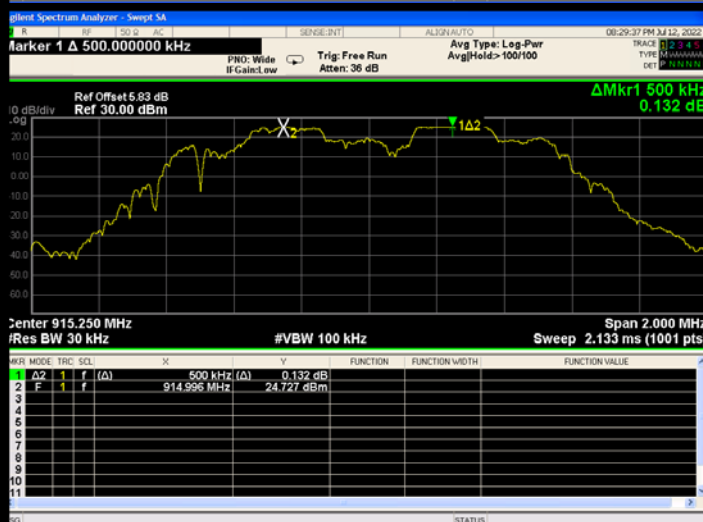

HCH

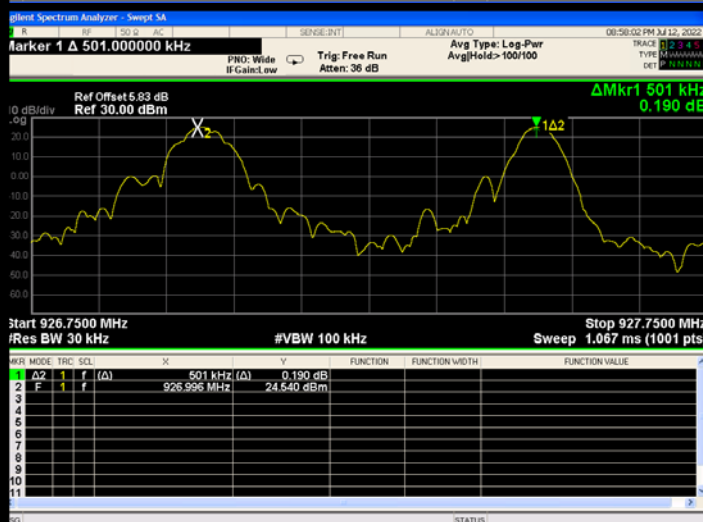

ANT3

Graphs

LCH



MCH




HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

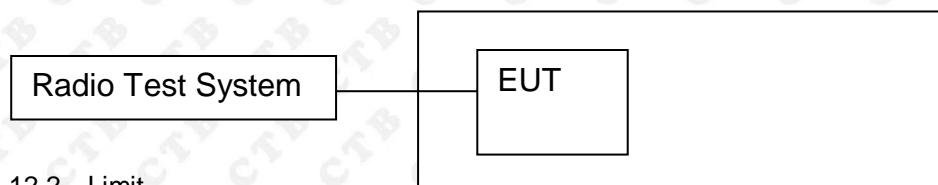

12.2 Limit

Frequency hopping systems in the 920-928 MHz band shall use at least 50 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
ASK	Hop	47	PASS


ANT1

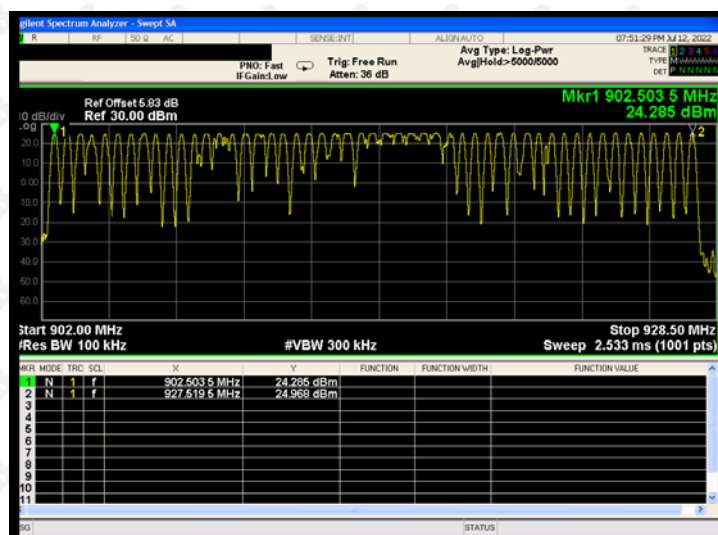

ANT2

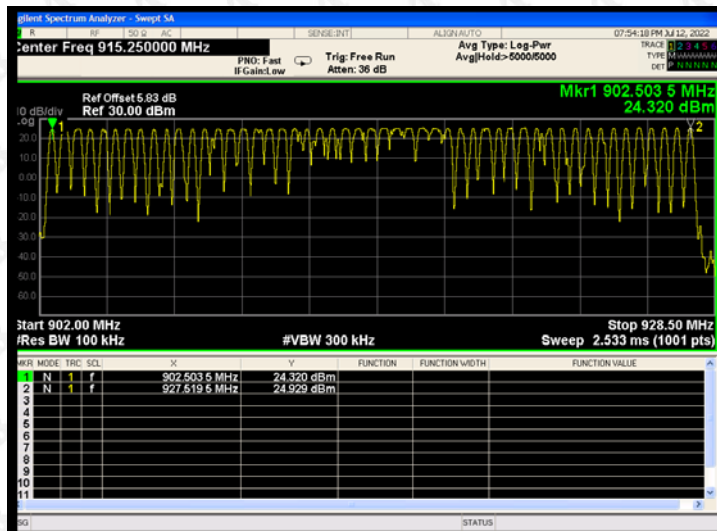


ANT3

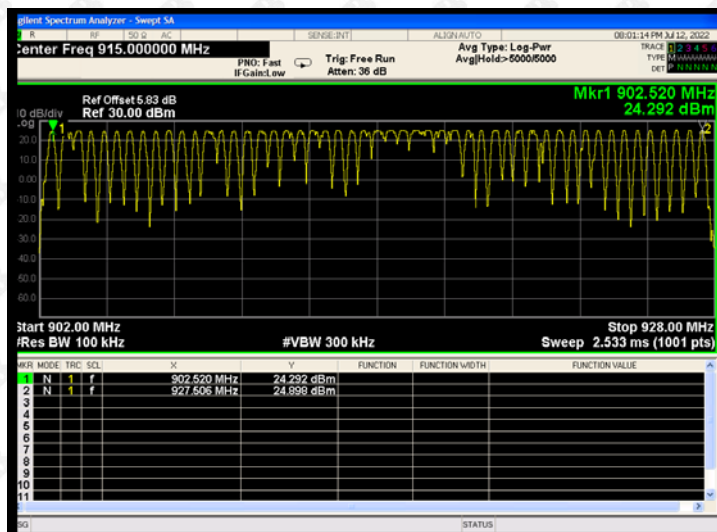

13. DWELL TIME

13.1 Block Diagram Of Test Setup

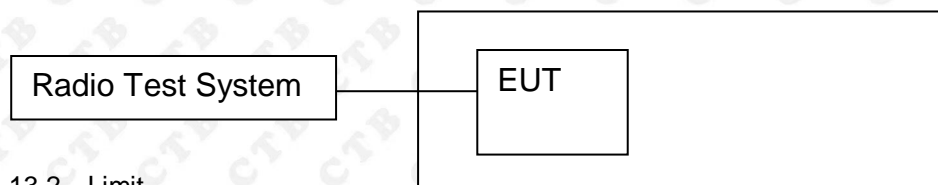

13.2 Limit

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

ANT1

Channel	No. of transmission in 10s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	1	3.637	3.637	400	PASS
MCH	1	3.643	3.643	400	PASS
HCH	1	3.642	3.642	400	PASS

Remark: Total dwell time in 20s, $c=(a)*(b)*2$

ANT2

Channel	No. of transmission in 10s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	1	3.640	3.640	400	PASS
MCH	1	3.628	3.628	400	PASS
HCH	1	3.629	3.629	400	PASS

Remark: Total dwell time in 20s, $c=(a)*(b)*2$

ANT3

Channel	No. of transmission in 10s(a)	Pulse Time (ms)(b)	Total Dwell Time in 20s (ms) (c)	Limit (ms)	Verdict
LCH	1	3.642	3.642	400	PASS
MCH	1	3.623	3.623	400	PASS
HCH	1	3.641	3.641	400	PASS

Remark: Total dwell time in 20s, $c=(a)*(b)*2$

Test Graph


ANT1

Graphs



ANT2

Graphs

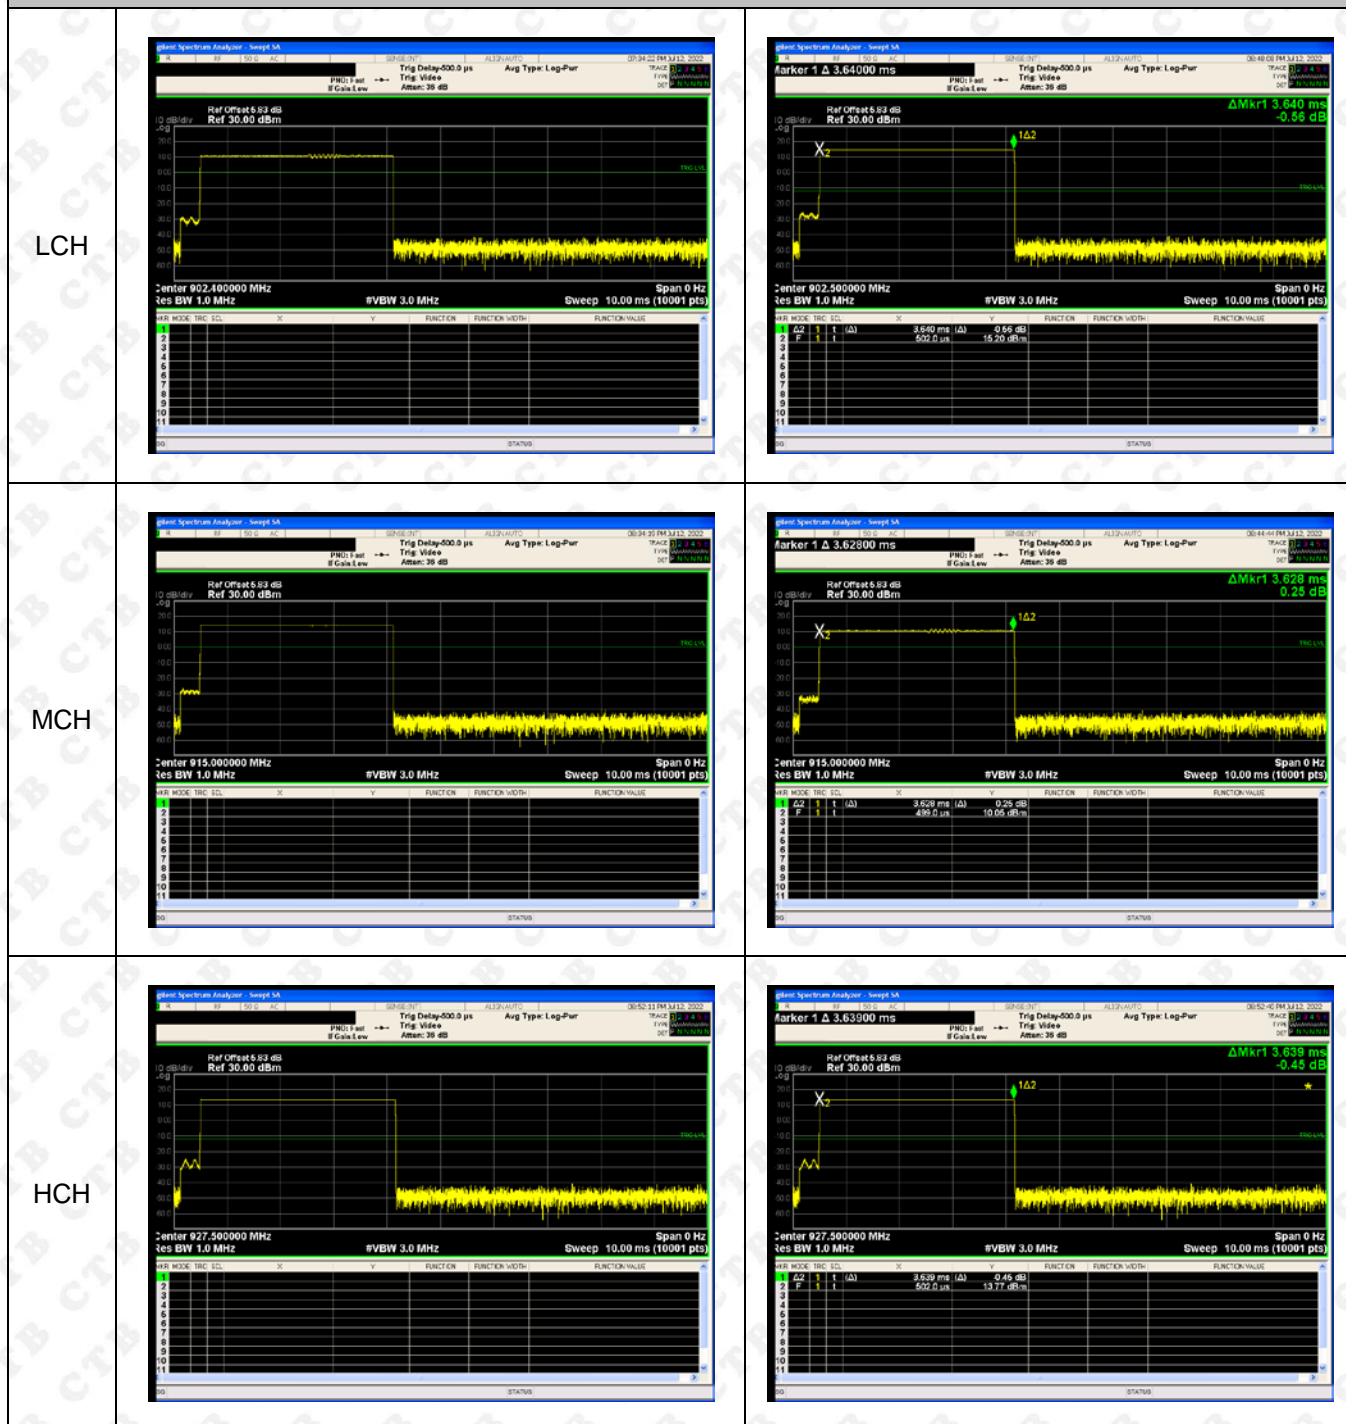

Graphs

[illegible]

Vector Spectrum Analyzer: Single Ch

Marker 1 Δ 3.64200 ms

Ref Offset: 6.84 dB
Ref: 30.00 dBm

Trig Delay: 500.0 μ s
Trig: Video
Aver Type: Log-Pwr

Span: 0 Hz
BW: 1.0 MHz
VBW: 3.0 MHz
Sweep: 10.00 ms (10001 pts)

Peak 1: 3.642 MHz, -0.59 dB

Ch	Mode	Trig	Eq	F	Funct	Function Value	Function Units
1	62	1	t	(A)	3.642 ms	(A)	-0.59 dB
2	F	1	t		500.0 μ s		-14.86 dBm

Global Spectrum Analyzer - Sweep 5A

06/25/2013 11:23:00

Trig Delay: 500.0 μ s Avg Type: Log-Pwr

PRB: 3.0 MHz Trig Voltage: 1.0 V

3.0 MHz Span: 0 Hz

Ref Offset: 5.83 dB Ref: 30.00 dBm

Center: 15.000000 MHz Span: 0 Hz

Res BW: 3.0 MHz VBW: 3.0 MHz

15.000000 MHz

10.00 ms (10001 pts)

MODE	TRIG	SL	SC	FUNCTION	FUNCTION VALUE	FUNCTION VALUE
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						

STATUS

0.15000000 GHz
 3.0 MHz
 10.00 ms (10001 pts)

Marker 1 Δ 3.62300 ms
 Trg Delay: 500.0 ps
 Trg Video
 Attenu: 30 dB

Ref: 0 dBm
 Ref: 30.00 dBm

1.62

Δ 3.62300 ms
 -0.02 dB

Center 0.15000000 GHz
 Res BW 3.0 MHz
 #VBW 3.0 MHz
 Sweep 10.00 ms (10001 pts)

	1	2	3	4	5	6	7	8	9	10	11
62	1	1	(A)	3.623 ms (A)	-0.02 dB						
F	1	1		513.0 μs	10.48 dBm						

The screenshot displays a Vector Signal Analyzer (VSA) interface. At the top, the title bar reads "Signal Spectrum Analyzer - Scope SA". The main display area shows a spectrum plot with a yellow trace. The plot has a vertical axis labeled "dBm" ranging from -60 to 20 and a horizontal axis labeled "MHz" ranging from 0 to 10. The trace shows a signal at approximately 927.5 MHz with a bandwidth of 3.0 MHz. The signal level is around -30 dBm. The plot is titled "Ref Offset at 5.83 dB" and "Ref 30.00 dBm".

Below the plot, there is a table with the following columns: "MODE", "TIME", "SL", "F", "FUNCTION", "FUNCTION VALUE", and "FUNCTION VALUE". The table has 11 rows, numbered 1 to 11. The first row is highlighted in green.

MODE	TIME	SL	F	FUNCTION	FUNCTION VALUE	FUNCTION VALUE
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						
11						

At the bottom of the screen, there is a status bar with the text "STATUS" and a small icon on the right.

Signal Spectrum Analyzer - Tuning V.A.

Marker 1 Δ 3.64100 ms

Trig Delay-500.0 ps Avg Type: Log-Pwr

PRF: 1 MHz Trig Video

IF Conv Low Attenu: 39 dB

RW Off at 6.83 dB Ref 30.00 dBm

ΔMkr1 3.641 ms -0.61 dB

X2

102

Center #927.500000 MHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.00 ms (10001 pts) Span 0 Hz

	F1	F2	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	62	1	(d)	3.641 ms (d)	-0.61 (db)
2	F	1	t	500.0 μs	13.45 (dbm)

14. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Internal Antenna and no consideration of replacement. The best case gain of the antenna is 1dBi.

15. EUT PHOTOGRAPHS**EUT Photo 1****EUT Photo 2**


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

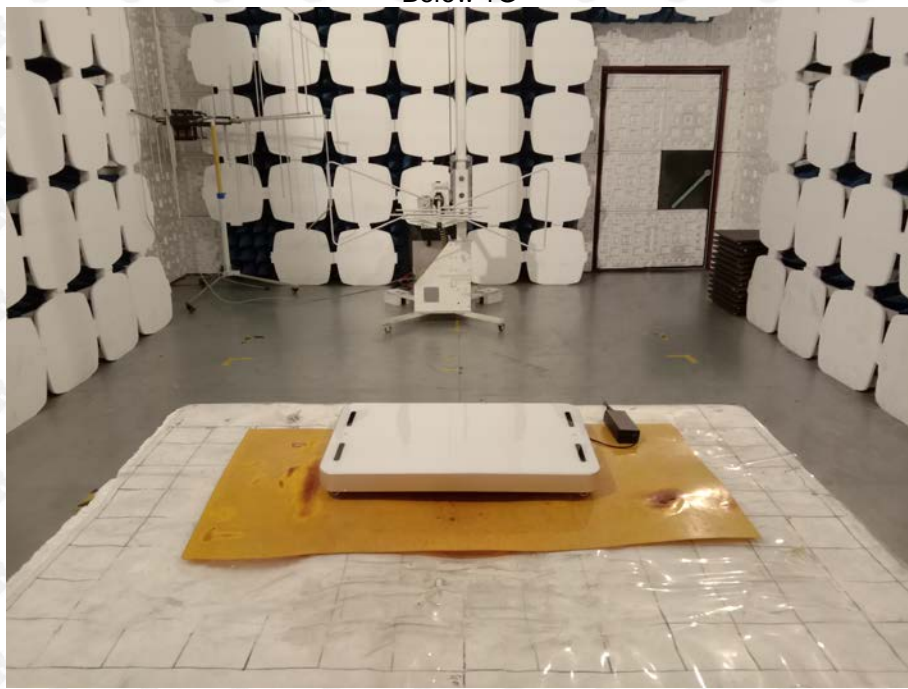

Above 1G

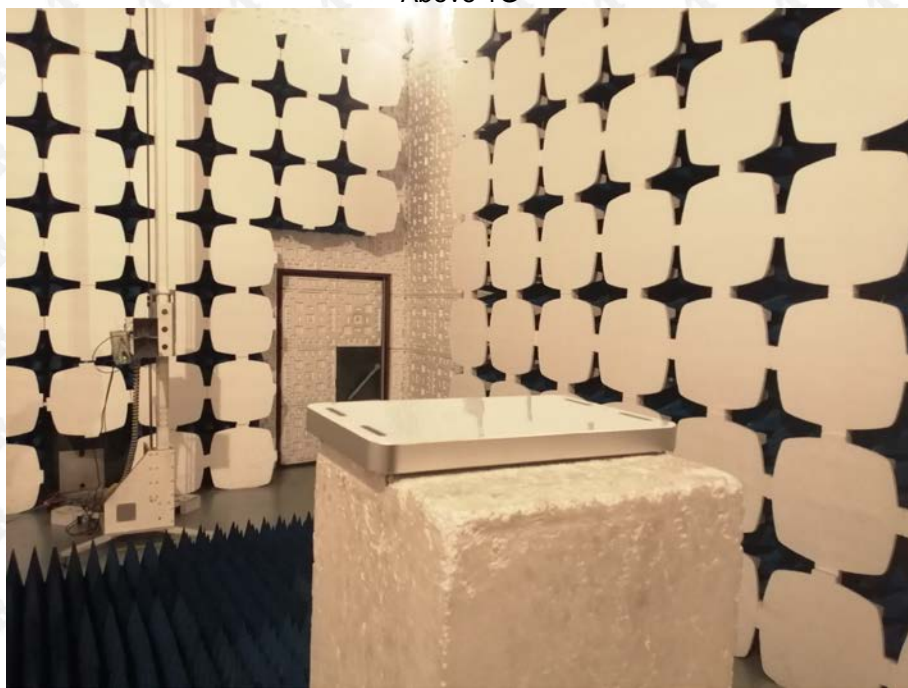

Conducted Emission



***** END OF REPORT *****