

# TEST REPORT

Report No. .... : **KS2210S4325E**

FCC ID..... : **2A77Z-ADVANCE1000**

Applicant..... : **Skytimes Green Energy CO., LTD.**

Address..... : No.71 Yangqi Road, Gaishan Town, Cangshan District, Fuzhou, Fujian, PRC

Manufacturer..... : Skytimes Green Energy CO., LTD.

Address..... : No.71 Yangqi Road, Gaishan Town, Cangshan District, Fuzhou, Fujian, PRC

Product Name..... : **Portable Power Station**

Trade Mark..... : N/A

Model/Type reference..... : ADVANCE 1000,PIONEER 1000Pro,1000

Standard..... : **FCC Rules and Regulations Part 18**

Date of receipt of test sample..... : October 07, 2022

Date of testing..... : October 07, 2022 ~ October 12, 2022

Date of issue..... : October 12, 2022

Test Result..... : **Pass**

Prepared by:

( Printed Name + Signature )

Pai Zheng



Approved by:

( Printed Name + Signature )

Sky Dong



Testing Laboratory Name..... : **KSIGN(Guangdong) Testing Co., Ltd.**

Address..... : West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by KSIGN. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to KSIGN within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## Contents

|  |           |
|--|-----------|
| <b>1 TEST SUMMARY .....</b>                        | <b>3</b>  |
| 1.1 Test Standards .....                           | 3         |
| 1.2 Report Version .....                           | 3         |
| 1.3 Address of the test laboratory .....           | 4         |
| 1.4 Test Facility .....                            | 4         |
| 1.5 Environmental conditions .....                 | 4         |
| 1.6 Summary of measurement results .....           | 5         |
| 1.7 Statement of the measurement uncertainty ..... | 5         |
| <b>2 GENERAL INFORMATION .....</b>                 | <b>6</b>  |
| 2.1 Product Description .....                      | 6         |
| 2.2 Description of the test mode .....             | 7         |
| 2.3 Special Accessories .....                      | 7         |
| 2.4 Modifications .....                            | 7         |
| 2.5 Equipments Used during the Test .....          | 8         |
| <b>3 TEST CONDITIONS AND RESULTS .....</b>         | <b>9</b>  |
| 3.1 AC Power Conducted Emission .....              | 9         |
| 3.2 Radiated Emission .....                        | 12        |
| 3.3 Antenna Requirement .....                      | 20        |
| <b>4. TEST SETUP PHOTOS OF THE EUT .....</b>       | <b>21</b> |
| <b>5. PHOTOS OF THE EUT .....</b>                  | <b>23</b> |

# 1 TEST SUMMARY

## 1.1 Test Standards

The tests were performed according to following standards:

[FCC Rules and Regulations Part 18 Subpart C \(Section 18.307\)](#): Conducted limits.

[FCC Rules and Regulations Part 18 Subpart C \(Section 18.305\)](#): Field strength limits.

[FCC MP-5](#):FCC Methods of Measurements of Radio Noise Emissions from Industrial, Scientific, and Medical equipment

## 1.2 Report Version

| Revised No. | Date of issue    | Description |
|-------------|------------------|-------------|
| 01          | October 12, 2022 | Original    |
|             |                  |             |
|             |                  |             |
|             |                  |             |

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdkesign.cn](mailto:info@gdkesign.cn) Web: [www.gdkesign.com](http://www.gdkesign.com)

### 1.3 Address of the test laboratory

**KSIGN(Guangdong) Testing Co., Ltd.**

West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

### 1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**CNAS-Lab Code: L13261**

KSIGN(Guangdong) Testing Co., Ltd. has been assessed and proved to be in Compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

**A2LA-Lab Cert. No.: 5457.01**

KSIGN(Guangdong) Testing Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**ISED#: 25693 CAB identifier.: CN0096**

KSIGN(Guangdong) Testing Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

**FCC-Registration No.: 294912 Designation Number: CN1328**

KSIGN(Guangdong) Testing Co., Ltd. EMC Laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### 1.5 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 24 ° C       |
| Humidity:             | 45 %         |
| Atmospheric pressure: | 950-1050mbar |

AC Power Conducted Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
| Humidity:             | 46 %         |
| Atmospheric pressure: | 950-1050mbar |

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 1.6 Summary of measurement results

| FCC RULES    | Description of test      | Result |
|--------------|--------------------------|--------|
| § 18.307 (b) | Conducted emissions test | Pass   |
| § 18.305 (b) | Radiated emission test   | Pass   |

Note:

1. Pass: The EUT complies with the essential requirements in the standard

Fail: The EUT does not comply with the essential requirements in the standard

All indications of Pass/Fail in this report are opinions expressed by KSIGN(Guangdong) Testing Co., Ltd. based on interpretations and/or observations of test results Measurement Uncertainties were not taken into account and are published for informational purposes only.

2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

## 1.7 Statement of the measurement uncertainty

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.06 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 2.14 dB                 | (1)   |
| Radiated Emission     | 9~30MHz    | 2.20dB                  | (1)   |

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 2 GENERAL INFORMATION

### 2.1 Product Description

|  |  |
|--|--|
| <b>Product Name:</b>   | Portable Power Station   |
| <b>Trade Mark:</b>   | N/A  |
| <b>Model/Type reference:</b>   | ADVANCE 1000,PIONEER 1000Pro,1000  |
| <b>Model Different:</b>  | The difference between the product models lies in the model name, appearance, color is not the same. Other power supply modes, internal structures, circuits, and key components are the same, which does not affect security and electromagnetic compatibility. |
| <b>Hardware version:</b>   | V1.0   |
| <b>Software version:</b>   | V1.0   |
| <b>Test samples ID:</b>  | KS2210S4325E-1# (Engineer sample),<br>KS2210S4325E-2# (Normal sample)  |
| <b>Power supply(Input):</b>  | Input:AC 110-240V 50/60Hz,2.5A<br>Output:DC 24V,6.25A  |
| <b>Wireless Charging(Output):</b>  | 10W(Max)   |
| <b>Operation frequency:</b>  | 110KHz - 205KHz  |
| <b>Modulation type:</b>  | ASK  |
| <b>Antenna type:</b>   | Loop coil antenna  |
| <p>Note:</p> <p>1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.</p> |  |

## 2.2 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

| Test Modes:   |                          |            |
|---|--------------------------|------------|
| Mode 1  | Wireless Charging (10W)  | Recorded   |
| Mode 2  | Wireless Charging (7.5W) | Recorded   |
| Mode 3  | Wireless Charging (5W)   | Recorded   |
| Mode 4  | Standby                  | Pre-tested |
| Note: All test modes were pre-tested, but we only recorded the worst case in this report. |                          |            |

## 2.3 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description            | Manufacturer | Model        | Technical Parameters                                   | Certificate | Provided by  |
|------------------------|--------------|--------------|--|-------------|--------------|
| Adapter                | /            | YHY-24006250 | Input: 100-240V~, 50/60Hz, 2.5A<br>Output:DC 24V 6.25A | FCC         | manufacturer |
| Wireless charging load | /            | EESON        | 5W/7.5W/10W  | FCC         | laboratory   |

## 2.4 Modifications

No modifications were implemented to meet testing criteria.

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 2.5 Equipments Used during the Test

| Transmitter spurious emissions & Receiver spurious emissions |  |                     |              |            |            |
|--|--|---------------------|--------------|------------|------------|
| Item   | Test Equipment                             | Manufacturer        | Model No.    | Serial No. | Cal. Until |
| 1  | EMI Test Receiver                          | R&S                 | ESR          | 102525     | 03/04/2023 |
| 2  | High Pass Filter                           | Chengdu E-Microwave | OHF-3-18-S   | 0E01901038 | 03/04/2023 |
| 3  | High Pass Filter                           | Chengdu E-Microwave | OHF-6.5-18-S | 0E01901039 | 03/04/2023 |
| 4  | Spectrum Analyzer                          | HP                  | 8593E        | 3831U02087 | 03/04/2023 |
| 5  | Ultra-Broadband logarithmic period Antenna | Schwarzbeck         | VULB 9163    | 01230      | 12/04/2023 |
| 6  | Loop Antenna                               | Beijin ZHINAN       | ZN30900C     | 18050      | 03/04/2023 |
| 7  | Spectrum Analyzer                          | R&S                 | FSV40-N      | 101798     | 03/04/2023 |
| 8  | Horn Antenna                               | Schwarzbeck         | BBHA 9120 D  | 2023       | 03/29/2023 |
| 9  | Pre-Amplifier                              | Schwarzbeck         | BBV 9745     | 9745#129   | 03/04/2023 |
| 10   | Pre-Amplifier                              | EMCI                | EMC051835SE  | 980662     | 03/04/2023 |

| Item | Test Equipment    | Manufacturer | Model No. | Serial No.   | Cal. Until |
|------|-------------------|--------------|-----------|--------------|------------|
| 1    | LISN              | R&S          | ENV432    | 1326.6105.02 | 03/04/2023 |
| 2    | EMI Test Receiver | R&S          | ESR       | 102524       | 03/04/2023 |
| 3    | Manual RF Switch  | JS TOYO      | /         | MSW-01/002   | 03/04/2023 |

Note: 1)The Cal.Interval was one year.

2)The cable loss has calculated in test result which connection between each test instruments.

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)



## 3 TEST CONDITIONS AND RESULTS

### 3.1 AC Power Conducted Emission

#### TEST CONFIGURATION

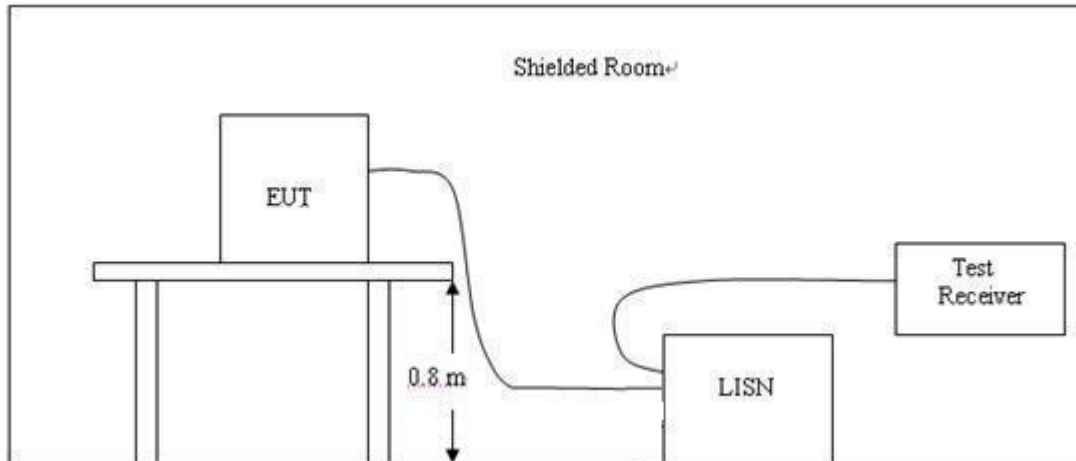

#### TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHZ to 30MHZ for emissions in each of the test modes.

#### AC Power Conducted Emission Limit

For intentional device, according to § 18.307(a) AC Power Conducted Emission Limits is as following:

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

TRF No. FCC Part 18\_R2


Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

**TEST RESULTS**

1. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

|               |              |              |   |
|---------------|--------------|--------------|---|
| Power supply: | AC 120V/60Hz | Polarization | L |
|---------------|--------------|--------------|---|

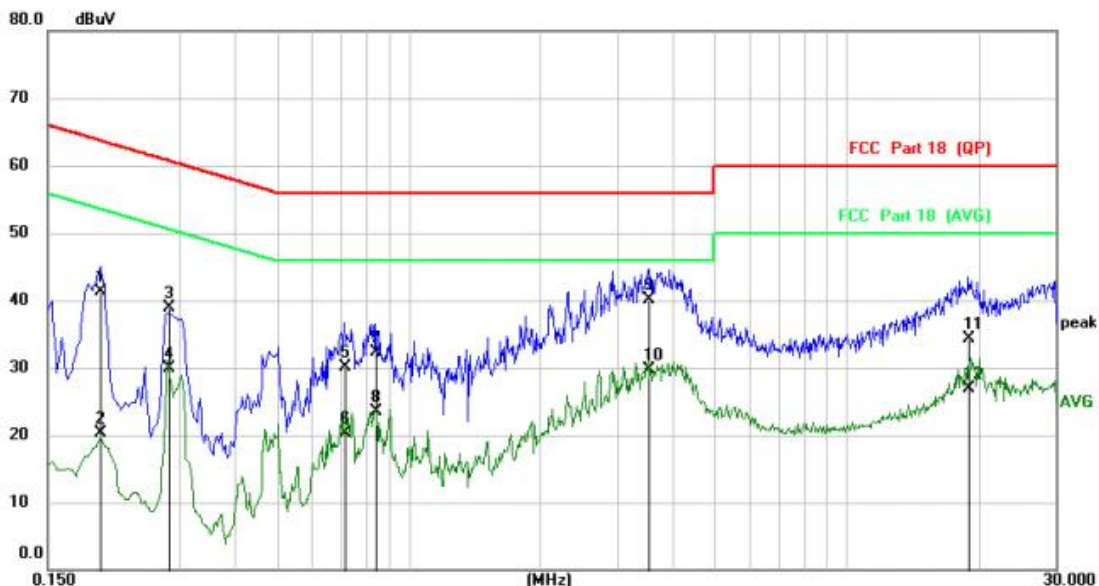

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|---------|----------|---------|
| 1       | 0.1980    | 30.53              | 10.76             | 41.29            | 63.69      | -22.40  | QP       |         |
| 2       | 0.1980    | 9.57               | 10.76             | 20.33            | 53.69      | -33.36  | AVG      |         |
| 3       | 0.2819    | 28.27              | 10.60             | 38.87            | 60.76      | -21.89  | QP       |         |
| 4       | 0.2819    | 19.38              | 10.60             | 29.98            | 50.76      | -20.78  | AVG      |         |
| 5       | 0.7140    | 19.67              | 10.44             | 30.11            | 56.00      | -25.89  | QP       |         |
| 6       | 0.7140    | 9.80               | 10.44             | 20.24            | 46.00      | -25.76  | AVG      |         |
| 7       | 0.8420    | 21.93              | 10.46             | 32.39            | 56.00      | -23.61  | QP       |         |
| 8       | 0.8420    | 12.99              | 10.46             | 23.45            | 46.00      | -22.55  | AVG      |         |
| 9 *     | 3.5300    | 29.50              | 10.61             | 40.11            | 56.00      | -15.89  | QP       |         |
| 10      | 3.5300    | 19.11              | 10.61             | 29.72            | 46.00      | -16.28  | AVG      |         |
| 11      | 18.9220   | 23.73              | 10.63             | 34.36            | 60.00      | -25.64  | QP       |         |
| 12      | 18.9220   | 16.21              | 10.63             | 26.84            | 50.00      | -23.16  | AVG      |         |


- Note: Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)  
 2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)  
 3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)  
 4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

Power supply: AC 120V/60Hz Polarization N

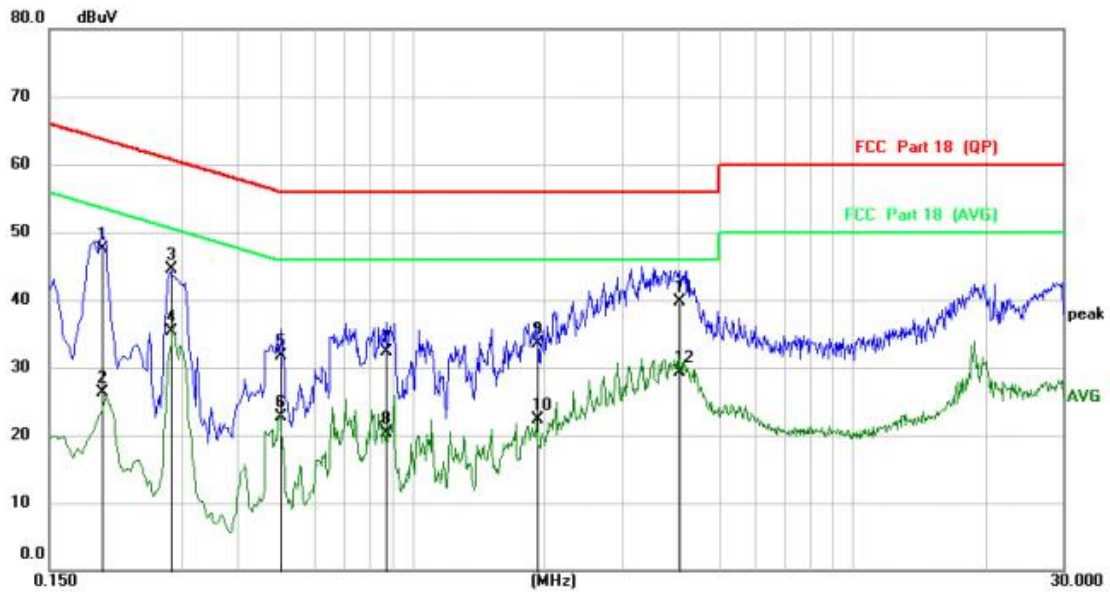

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Over dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|---------|----------|---------|
| 1       | 0.1980    | 36.84              | 10.75             | 47.59            | 63.69      | -16.10  | QP       |         |
| 2       | 0.1980    | 15.50              | 10.75             | 26.25            | 53.69      | -27.44  | AVG      |         |
| 3       | 0.2819    | 34.02              | 10.58             | 44.60            | 60.76      | -16.16  | QP       |         |
| 4 *     | 0.2819    | 24.68              | 10.58             | 35.26            | 50.76      | -15.50  | AVG      |         |
| 5       | 0.5020    | 21.24              | 10.52             | 31.76            | 56.00      | -24.24  | QP       |         |
| 6       | 0.5020    | 12.19              | 10.52             | 22.71            | 46.00      | -23.29  | AVG      |         |
| 7       | 0.8740    | 21.83              | 10.45             | 32.28            | 56.00      | -23.72  | QP       |         |
| 8       | 0.8740    | 9.84               | 10.45             | 20.29            | 46.00      | -25.71  | AVG      |         |
| 9       | 1.9220    | 23.06              | 10.54             | 33.60            | 56.00      | -22.40  | QP       |         |
| 10      | 1.9220    | 11.73              | 10.54             | 22.27            | 46.00      | -23.73  | AVG      |         |
| 11      | 4.0300    | 29.08              | 10.61             | 39.69            | 56.00      | -16.31  | QP       |         |
| 12      | 4.0300    | 18.77              | 10.61             | 29.38            | 46.00      | -16.62  | AVG      |         |

Note: Note:1).QP Value (dBμV)= QP Reading (dBμV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 3.2 Radiated Emission

### Limit

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 18.305 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

Per FCC MP-5 2.2.5 The antenna height shall be set at around 2 meters


Radiated emission limits

| Frequency (MHz) | Test Distance (Meters) | Radiated (dB $\mu$ V/m) | Radiated ( $\mu$ V/m) |
|-----------------|------------------------|-------------------------|-----------------------|
| 0.009-30        | 3                      | 103.50                  | 15 (at 300m)          |
| 30-1000         | 3                      | 63.5                    | 15 (at 300m)          |

Note: Emission level dB $\mu$ V/m for 0.009-30MHz =  $20\lg(15) + 40\lg(300/3)$  dB $\mu$ V/m = 103.5 dB $\mu$ V/m  
 Emission level dB $\mu$ V/m for 30MHz-1000MHz =  $20\lg(15) + 20\lg(300/3)$  dB $\mu$ V/m = 63.5 dB $\mu$ V/m

### TEST CONFIGURATION

#### 1. Radiated Emission Test Set-Up, Frequency Below 30MHz

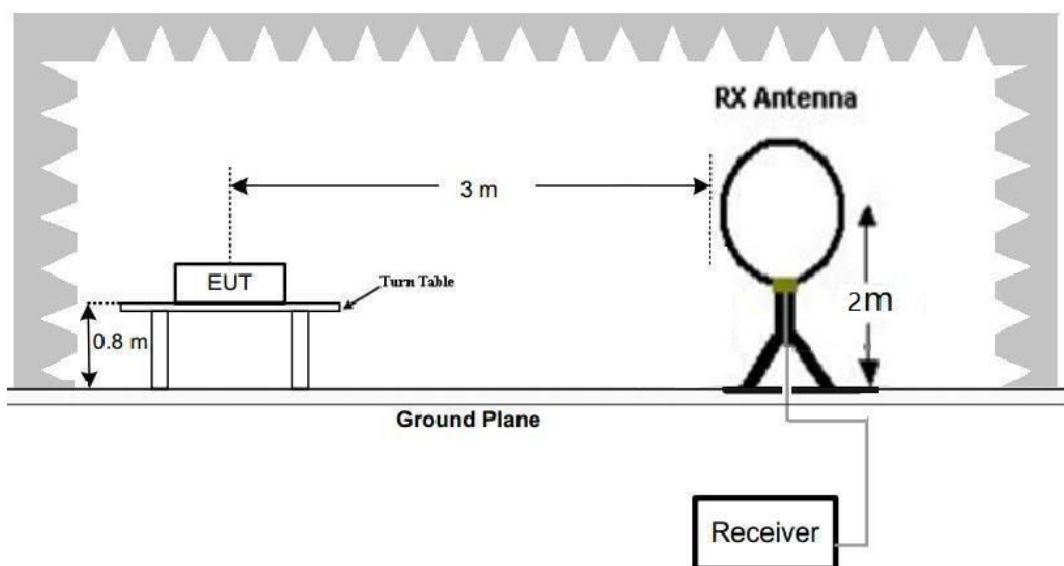


#### 2. Radiated Emission Test Set-Up, Frequency below 1000MHz

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

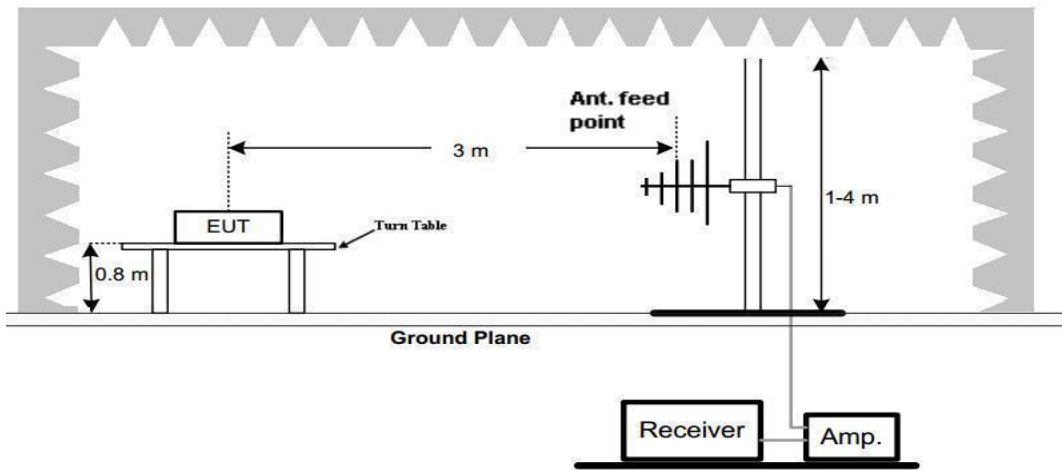

**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 1000MHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type   | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna | 3             |
| 30MHz-1GHz           | Bilog Antenna       | 3             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting         | Detector |
|----------------------|--|----------|
| 9KHz-30MHz           | RBW=10KHz/VBW=30KHz, Sweep time=Auto   | QP       |
| 30MHz-1GHz           | RBW=100KHz/VBW=300KHz, Sweep time=Auto | QP       |

**TEST RESULTS**

**For 9 KHz-30MHz**


TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdkesign.cn](mailto:info@gdkesign.cn) Web: [www.gdkesign.com](http://www.gdkesign.com)

9KHz-150KHz

Face

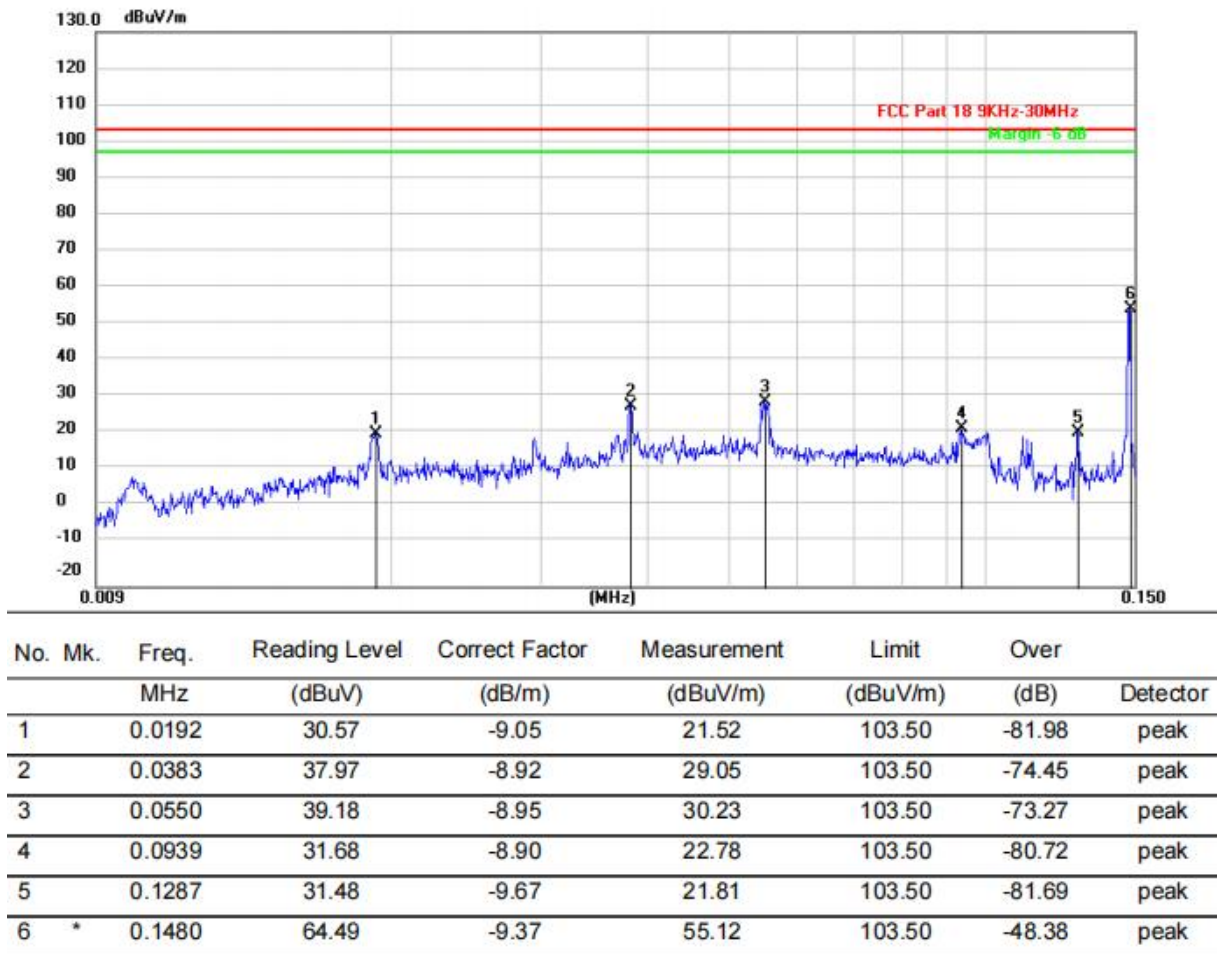

Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor


TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

150KHz-30MHz

Face

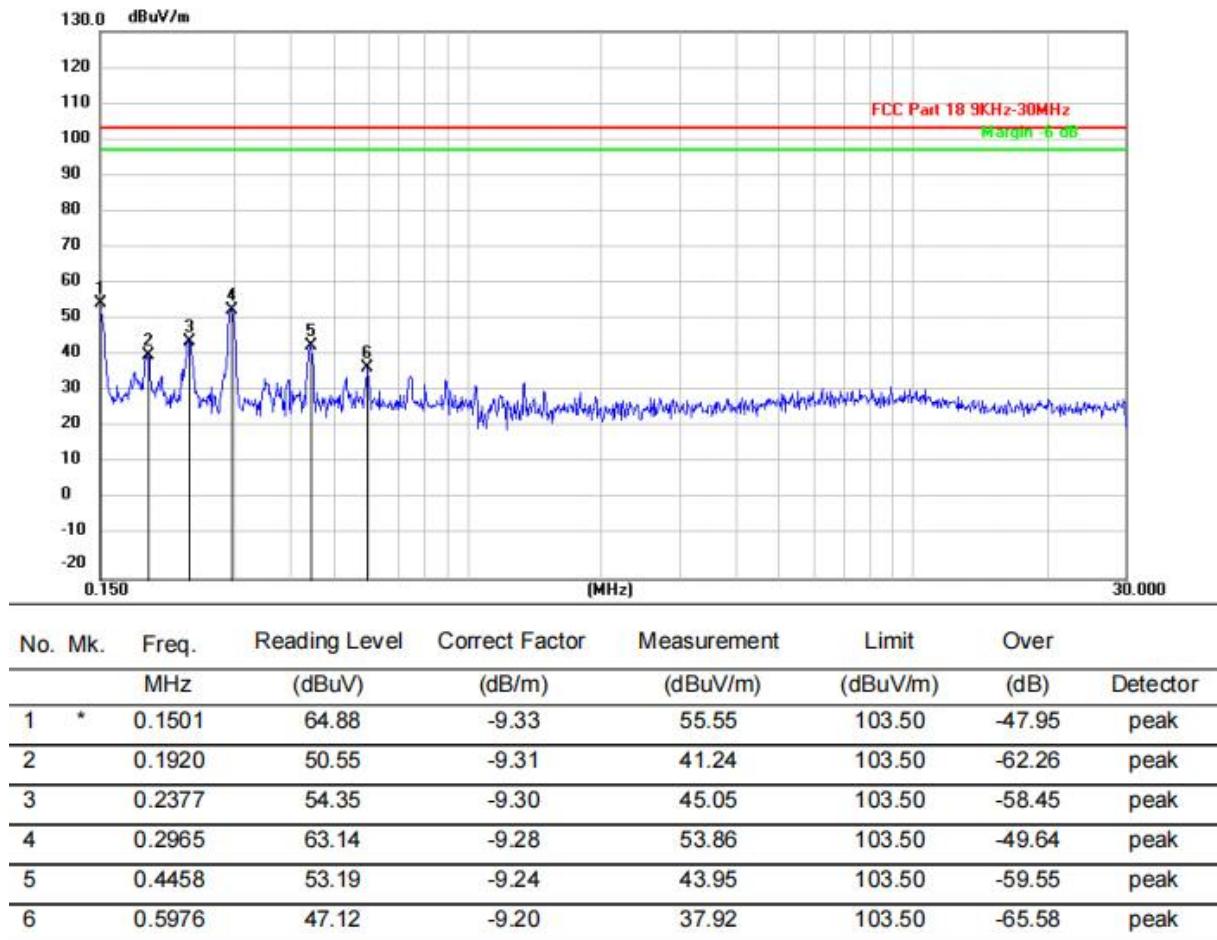

Remark:

Correct Factor=Antenna Factor + Cable Loss -Preamplifier Factor


TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

9KHz-150KHz

Side

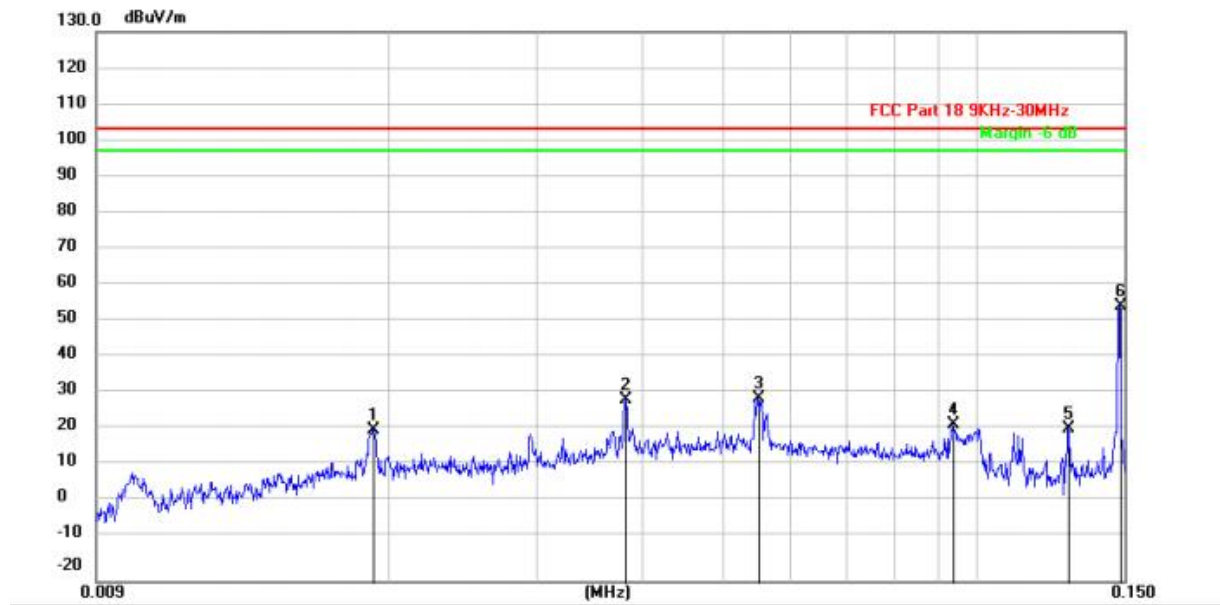

| No. | Mk. | Freq.<br>MHz | Reading Level<br>(dBuV) | Correct Factor<br>(dB/m) | Measurement<br>(dBuV/m) | Limit<br>(dBuV/m) | Over<br>(dB) | Detector |
|-----|-----|--------------|-------------------------|--------------------------|-------------------------|-------------------|--------------|----------|
| 1   |     | 0.0192       | 30.57                   | -9.05                    | 21.52                   | 103.50            | -81.68       | peak     |
| 2   |     | 0.0383       | 38.56                   | -8.92                    | 29.64                   | 103.50            | -73.86       | peak     |
| 3   |     | 0.0550       | 39.18                   | -8.95                    | 30.23                   | 103.50            | -73.43       | peak     |
| 4   |     | 0.0939       | 31.68                   | -8.90                    | 22.78                   | 103.50            | -80.56       | peak     |
| 5   |     | 0.1287       | 31.48                   | -9.67                    | 21.81                   | 103.50            | -81.75       | peak     |
| 6   | *   | 0.1480       | 64.49                   | -9.37                    | 55.12                   | 103.50            | -48.64       | peak     |

Remark:

Correct Factor=Antenna Factor + Cable Loss -Pre-amplifier Factor

TRF No. FCC Part 18\_R2


Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)



150KHz-30MHz

Side

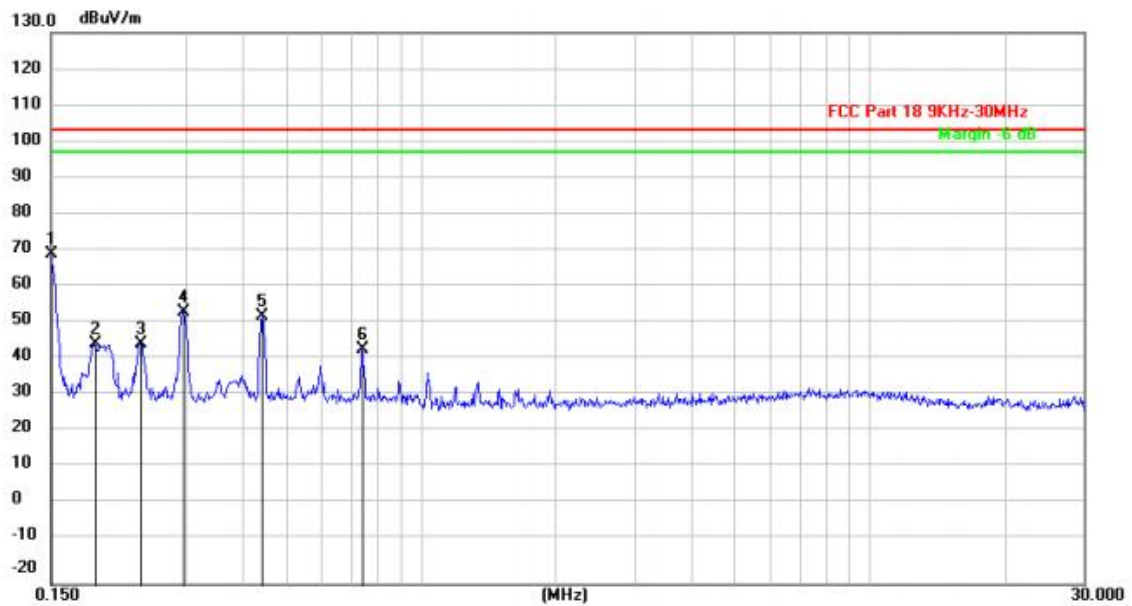

| No. | Mk. | Freq.<br>MHz | Reading Level<br>(dBuV) | Correct Factor<br>(dB/m) | Measurement<br>(dBuV/m) | Limit<br>(dBuV/m) | Over<br>(dB) | Detector |
|-----|-----|--------------|-------------------------|--------------------------|-------------------------|-------------------|--------------|----------|
| 1   | *   | 0.1500       | 79.11                   | -9.33                    | 69.78                   | 103.50            | -33.72       | peak     |
| 2   |     | 0.1882       | 54.64                   | -9.32                    | 45.32                   | 103.50            | -58.18       | peak     |
| 3   |     | 0.2371       | 54.64                   | -9.31                    | 45.33                   | 103.50            | -58.17       | peak     |
| 4   |     | 0.2965       | 63.44                   | -9.28                    | 54.16                   | 103.50            | -49.34       | peak     |
| 5   |     | 0.4444       | 62.19                   | -9.24                    | 52.95                   | 103.50            | -50.55       | peak     |
| 6   |     | 0.7399       | 53.04                   | -9.17                    | 43.87                   | 103.50            | -59.63       | peak     |

Remark:

Correct Factor=Antenna Factor + Cable Loss -Pre-amplifier Factor


TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdkesign.cn](mailto:info@gdkesign.cn) Web: [www.gdkesign.com](http://www.gdkesign.com)

For 30MHz-1GHz

Horizontal

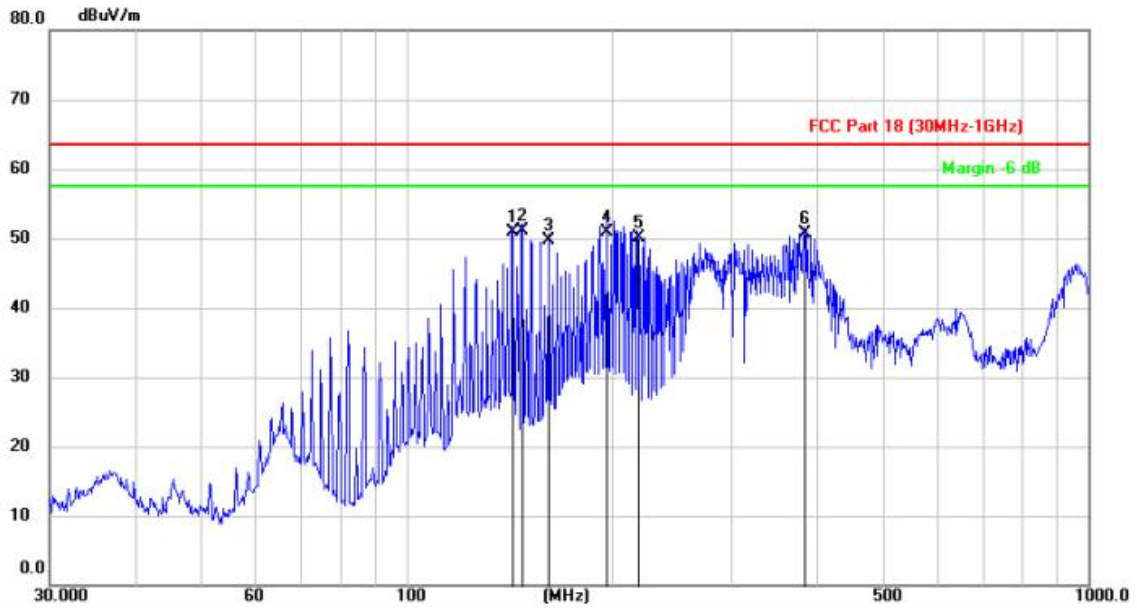

| No. Mk. | Freq. MHz | Reading Level (dBuV) | Correct Factor (dB/m) | Measurement (dBuV/m) | Limit (dBuV/m) | Over (dB) | Detector |
|---------|-----------|----------------------|-----------------------|----------------------|----------------|-----------|----------|
| 1       | 143.2256  | 72.20                | -21.31                | 50.89                | 63.50          | -12.61    | QP       |
| 2 *     | 147.9214  | 72.55                | -21.38                | 51.17                | 63.50          | -12.33    | QP       |
| 3       | 161.9846  | 70.76                | -21.09                | 49.67                | 63.50          | -13.83    | QP       |
| 4       | 197.2001  | 68.97                | -18.12                | 50.85                | 63.50          | -12.65    | QP       |
| 5       | 218.5383  | 67.37                | -17.18                | 50.19                | 63.50          | -13.31    | QP       |
| 6       | 382.8563  | 62.17                | -11.47                | 50.70                | 63.50          | -12.80    | QP       |

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)


3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

Vertical

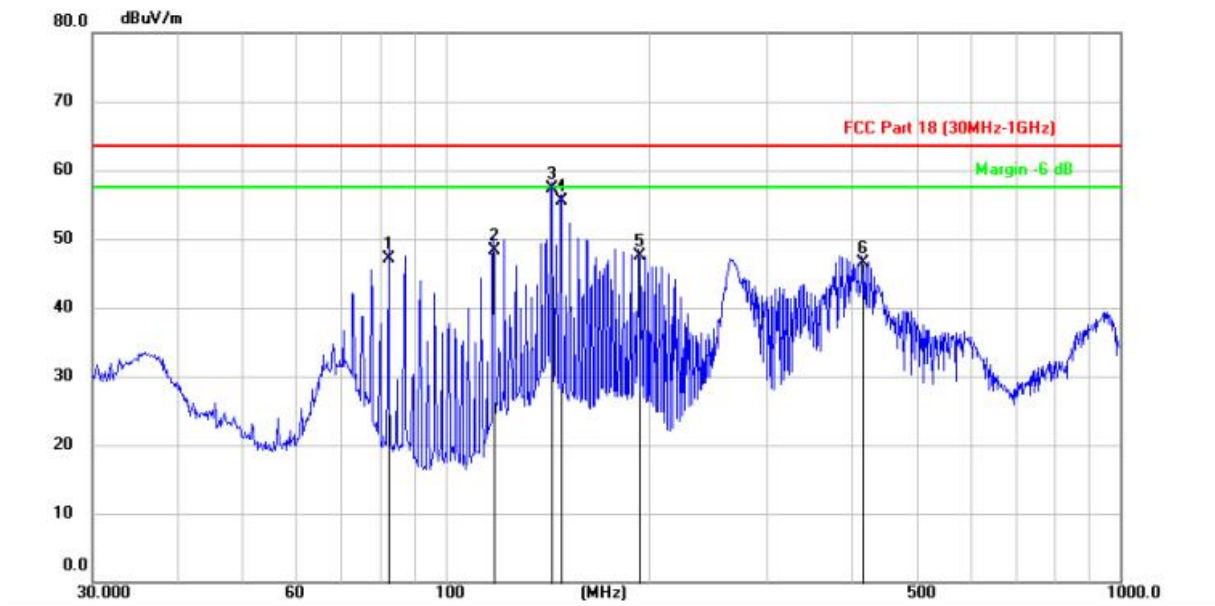

| No. | Mk. | Freq.<br>MHz | Reading Level<br>(dBuV) | Correct Factor<br>(dB/m) | Measurement<br>(dBuV/m) | Limit<br>(dBuV/m) | Over<br>(dB) | Detector |
|-----|-----|--------------|-------------------------|--------------------------|-------------------------|-------------------|--------------|----------|
| 1   |     | 82.5034      | 68.06                   | -21.01                   | 47.05                   | 63.50             | -16.45       | QP       |
| 2   |     | 117.8551     | 67.46                   | -19.17                   | 48.29                   | 63.50             | -15.21       | QP       |
| 3   | *   | 143.8295     | 78.57                   | -21.33                   | 57.24                   | 63.50             | -6.26        | QP       |
| 4   |     | 148.5452     | 76.98                   | -21.39                   | 55.59                   | 63.50             | -7.91        | QP       |
| 5   |     | 193.2977     | 65.73                   | -18.29                   | 47.44                   | 63.50             | -16.06       | QP       |
| 6   |     | 415.0133     | 57.28                   | -10.73                   | 46.55                   | 63.50             | -16.95       | QP       |

Note:1).Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

### 3.3 Antenna Requirement

**Refer to statement below for compliance.**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

**Antenna Information**

The antenna used in this product is a Coil Antenna, which permanently attached. It conforms to the standard requirements.

#### 4. Test Setup Photos of the EUT

Radiated Measurement (Below 30MHz)



Radiated Measurement (Above 30MHz)




TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## Conducted Emission

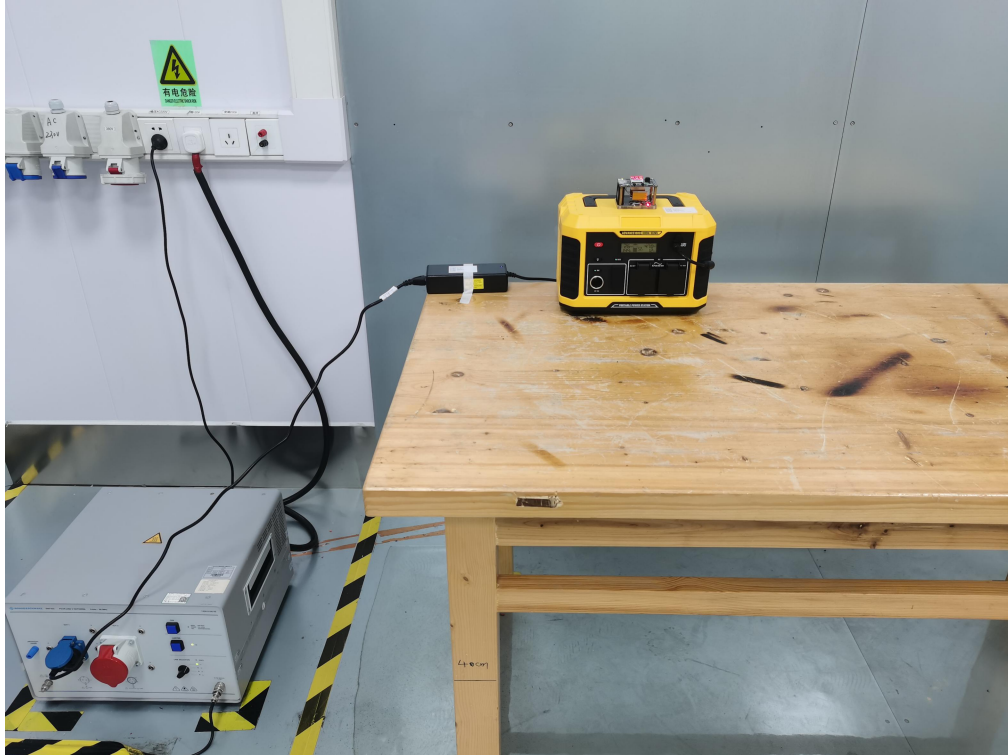

TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

## 5. PHOTOS OF THE EUT



TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)



TRF No. FCC Part 18\_R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)






TRF No. FCC Part 18 R2



Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

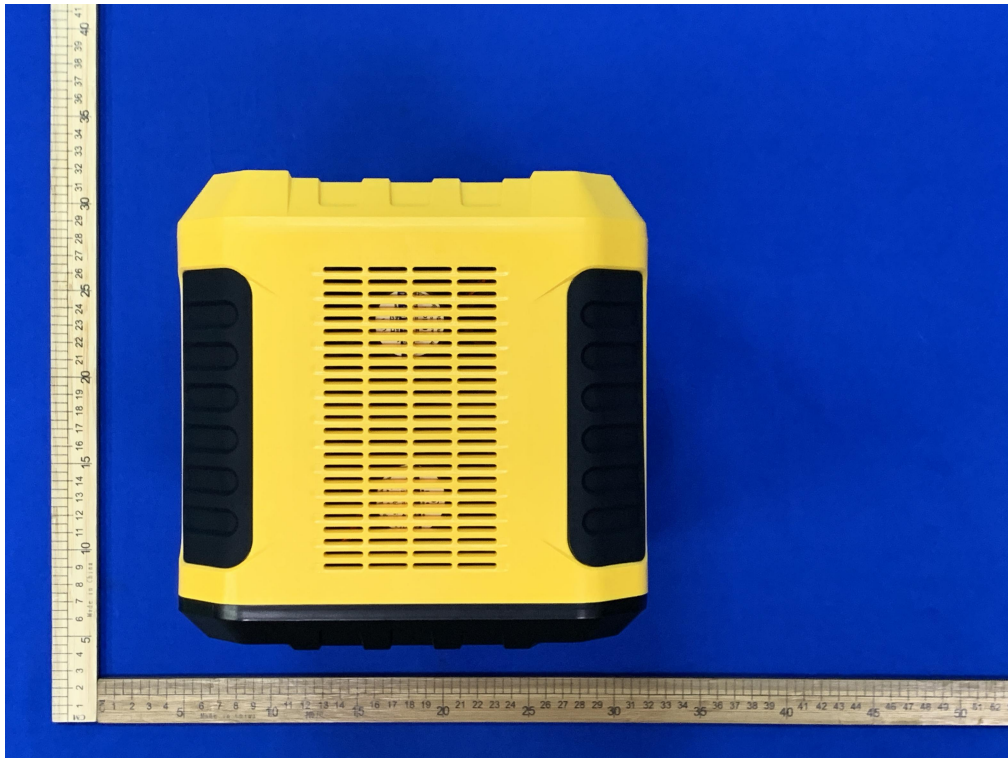

TRF No. FCC Part 18 R2



Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

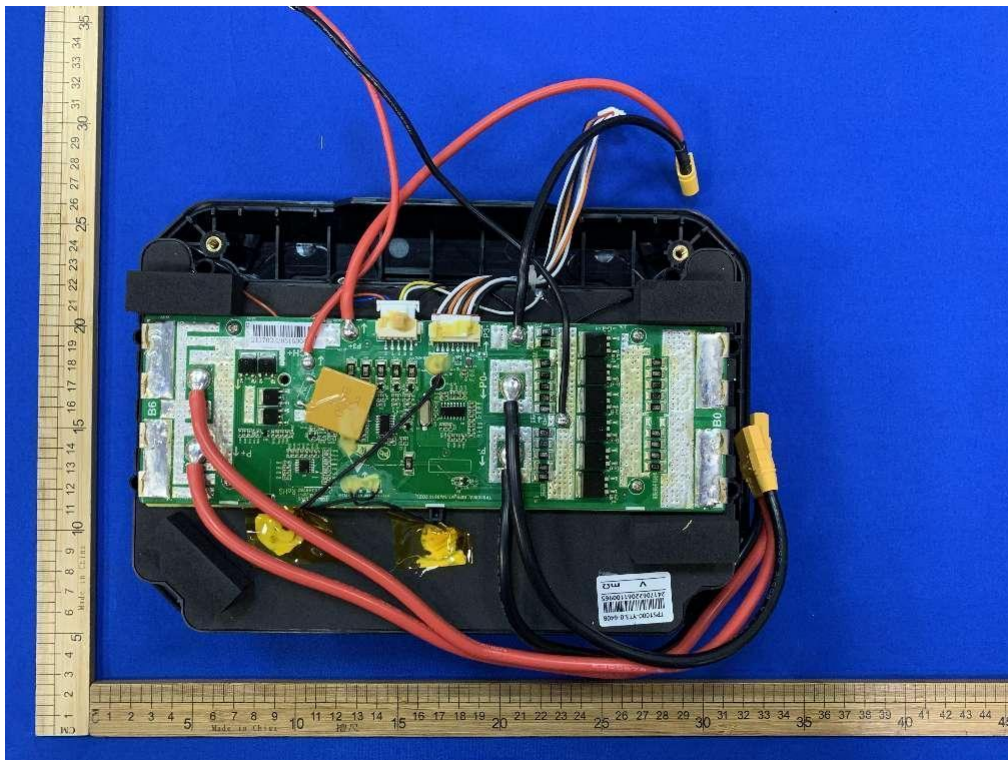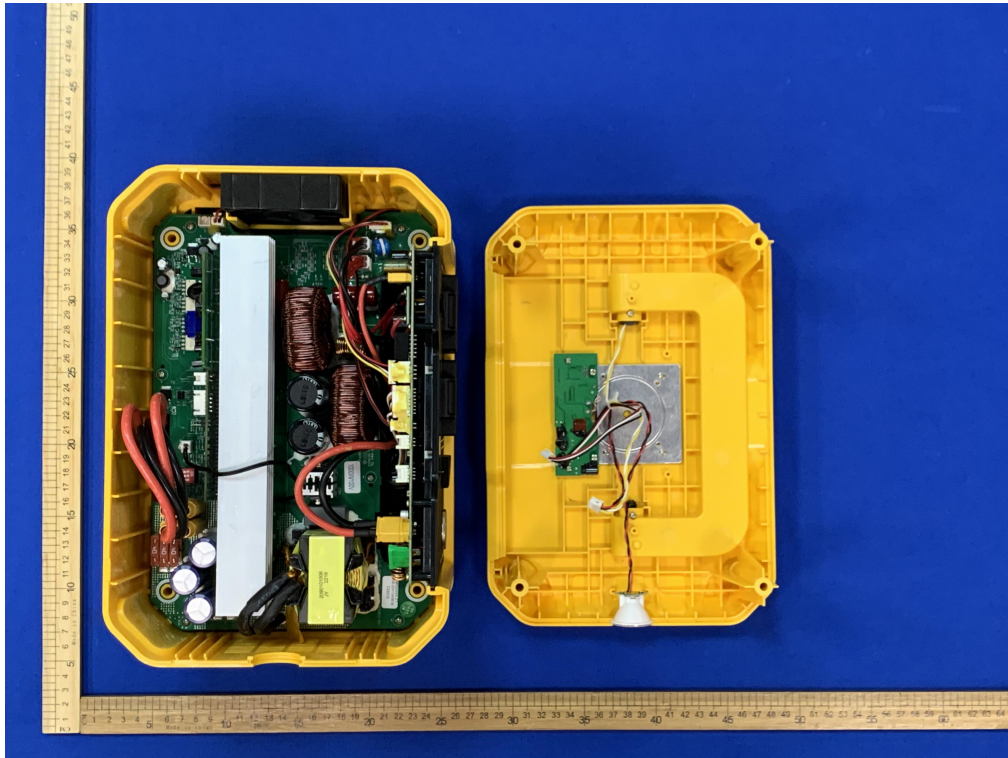

TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

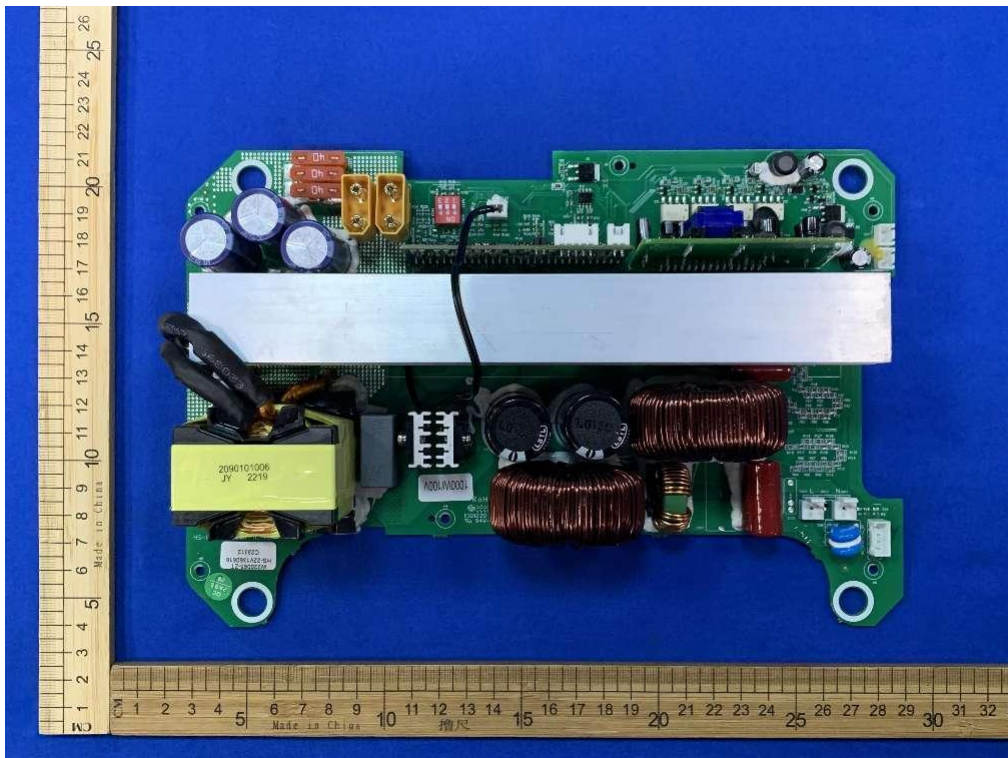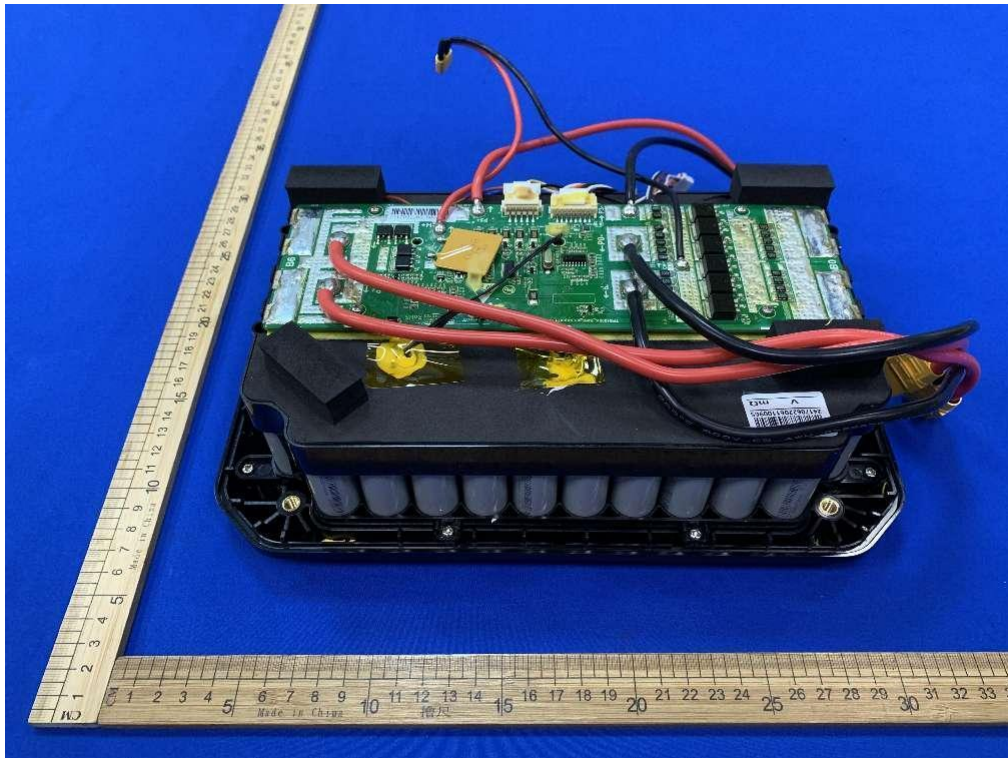

TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

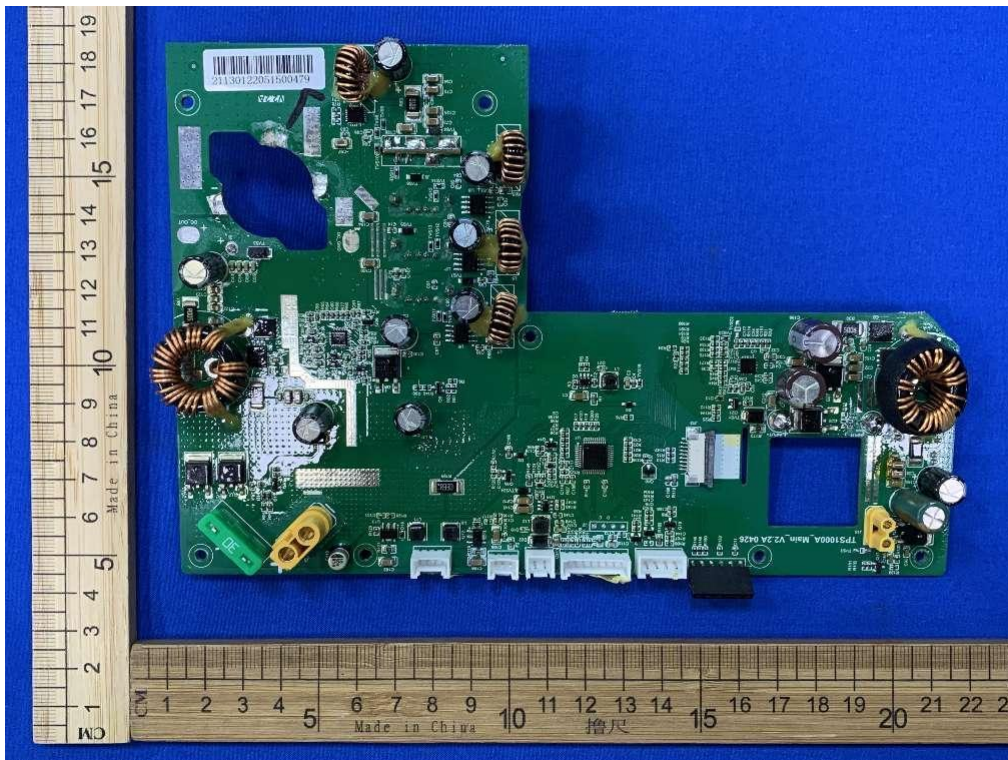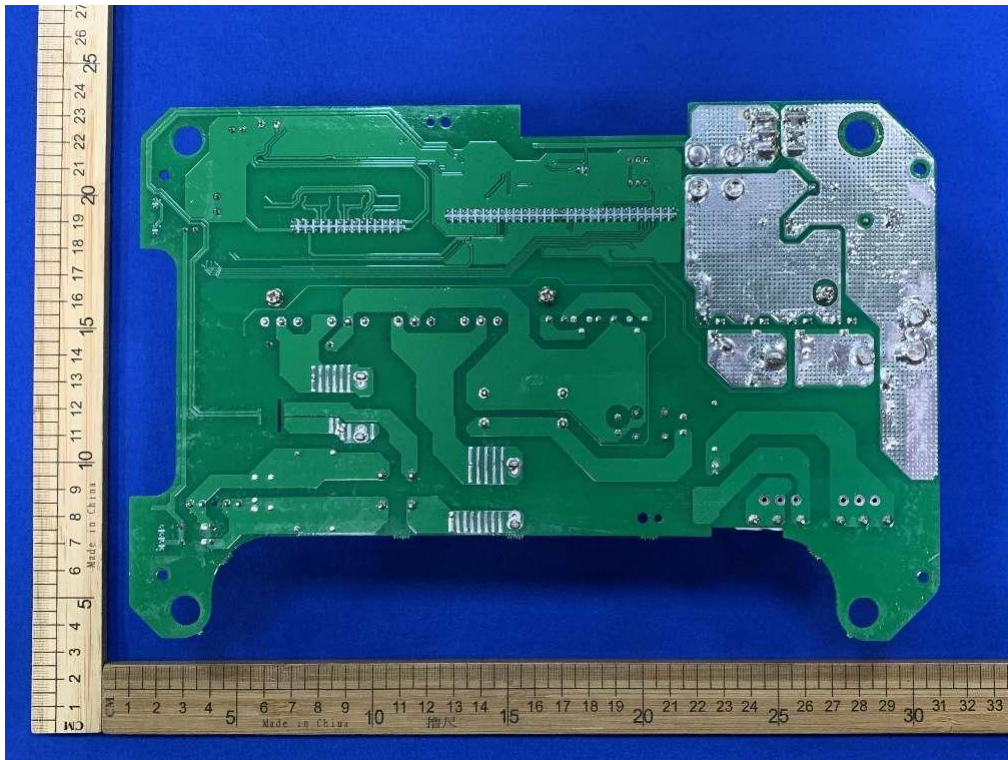

TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China



Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

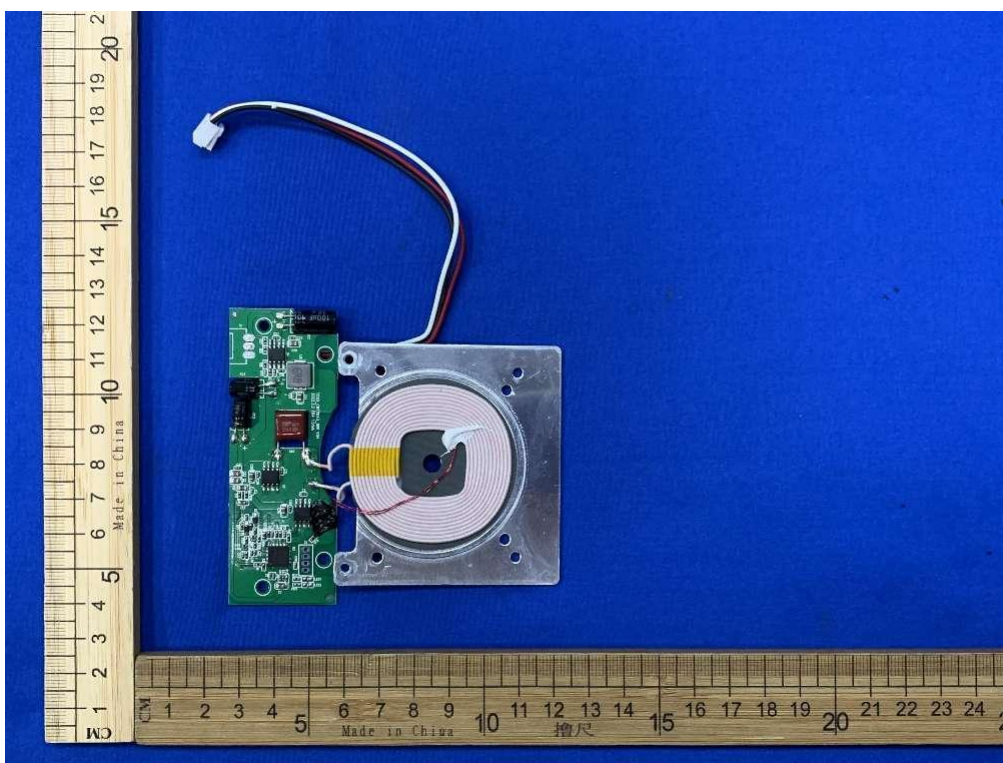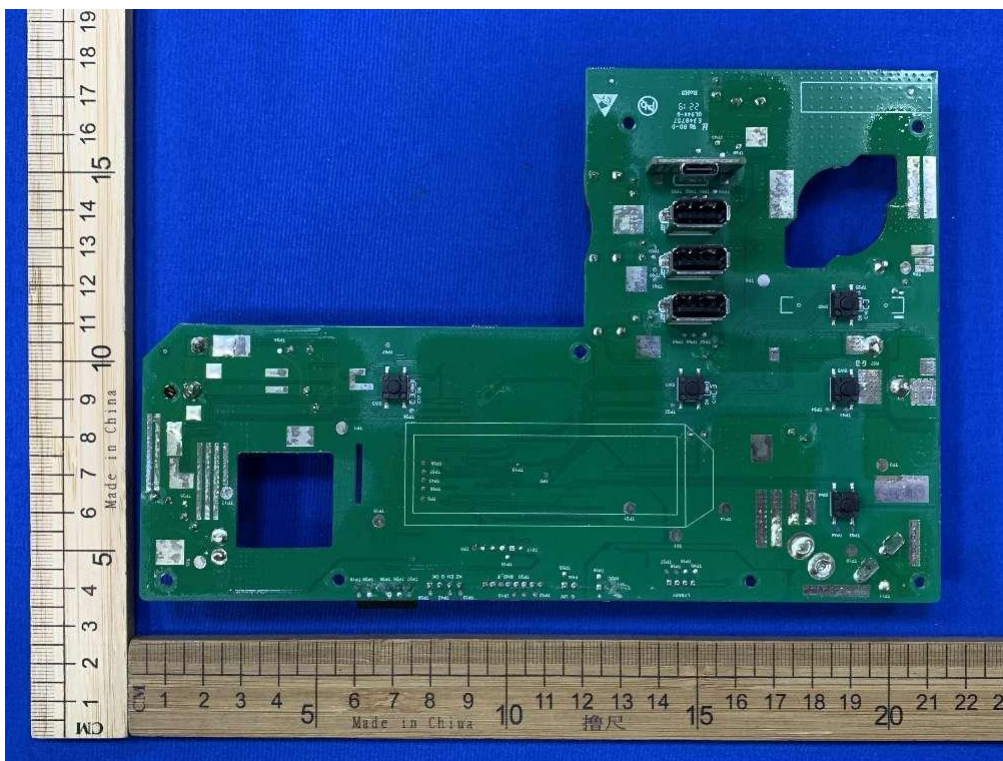

TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

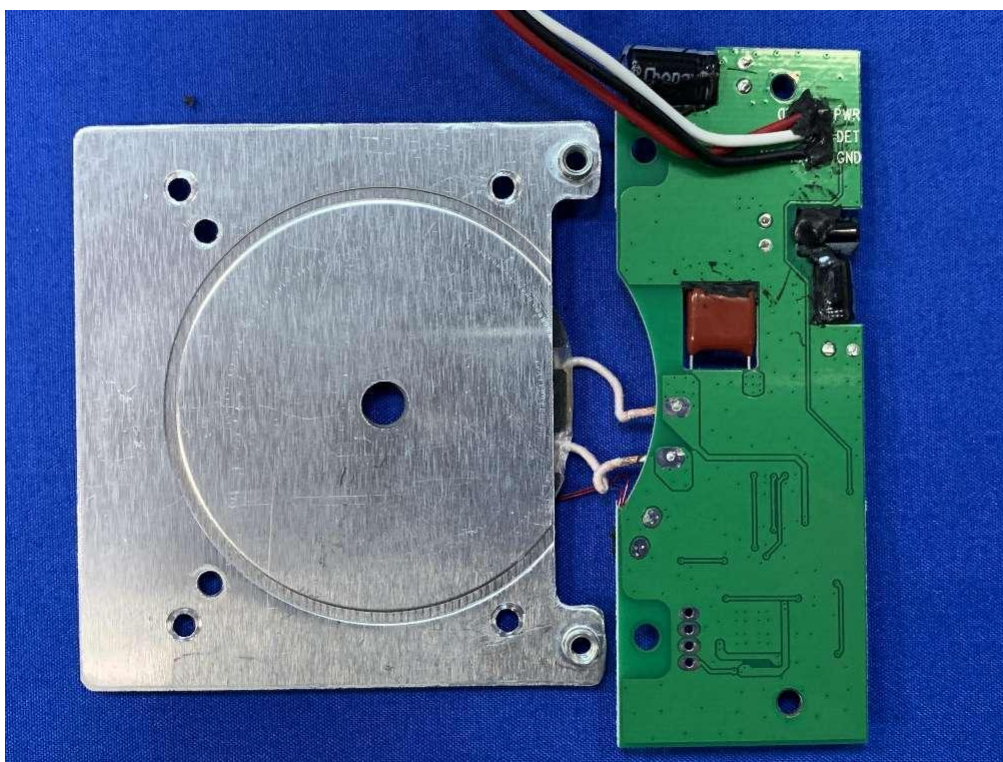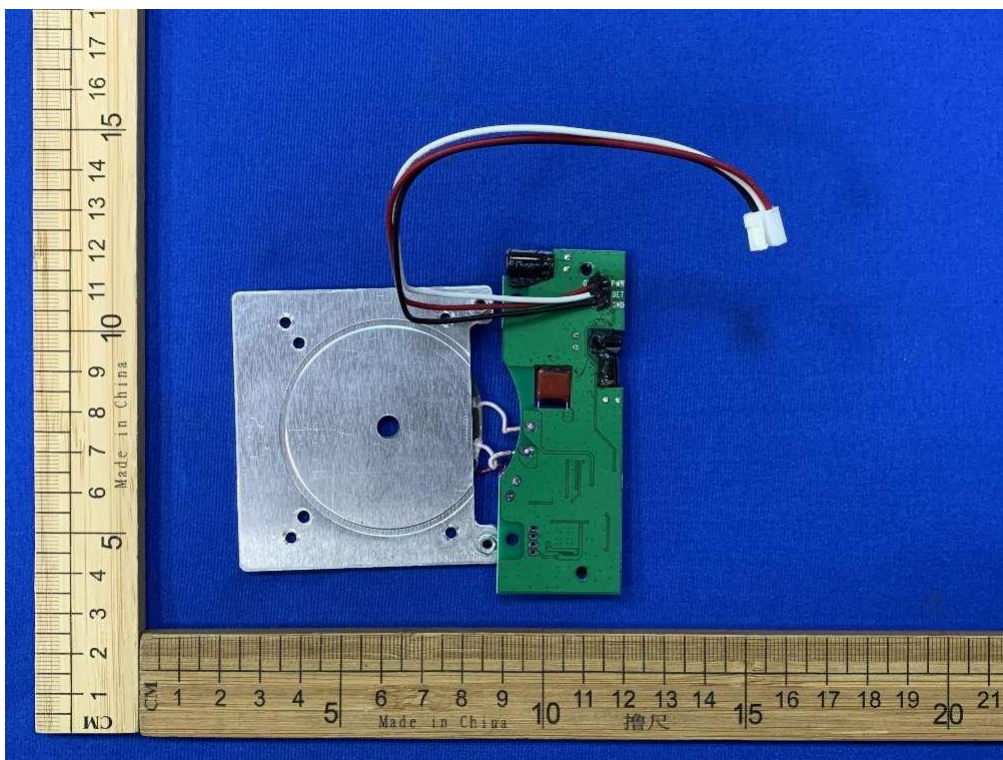

TRF No. FCC Part 18 R2

Add: West Side of 1/F., Building C, Zone A, Fuyuan New Factory, Jiujiu Industrial Park, Minzhu, Shatou, Shajing, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-2985 2678 Fax: +(86) 0755-2985 2397 E-mail: [info@gdksign.cn](mailto:info@gdksign.cn) Web: [www.gdksign.com](http://www.gdksign.com)

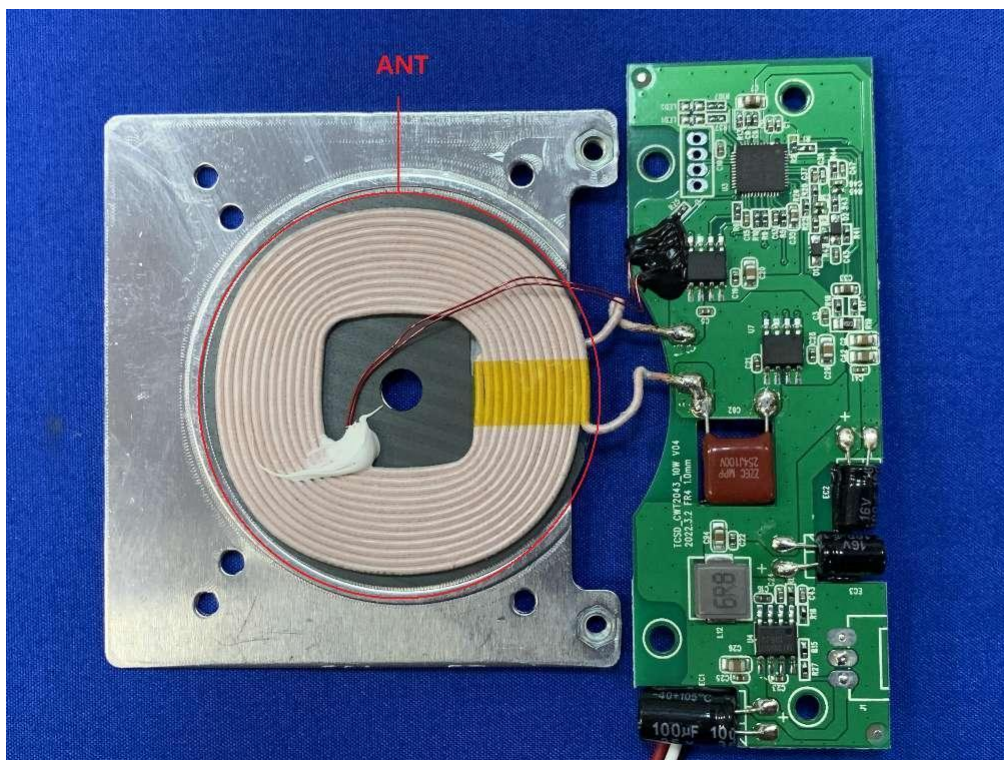

\*\*\*\*\* End of Report \*\*\*\*\*