
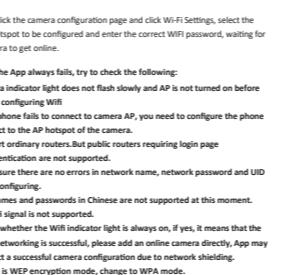
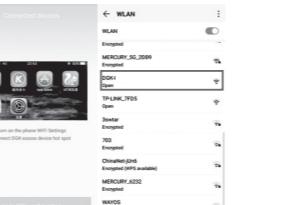


# Instruction Manual


## Table of Content

Product and accessories.....	1
Start to use.....	1
Hardware installation.....	2
Mobile phone App installation and use.....	3
Camera installation.....	6
Wi-Fi network settings.....	11
P2P mode .....	13
FAQ.....	14

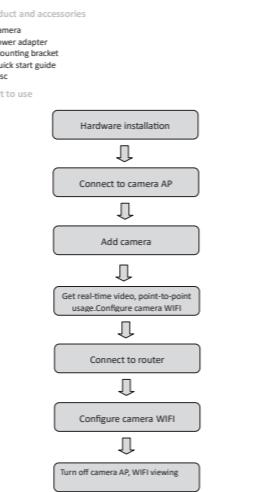

## Camera setting

1. Click the gear button at the back to open the advanced configuration page of the camera.

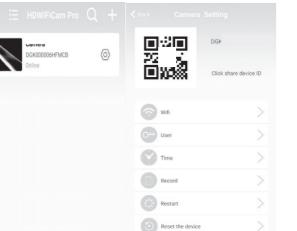

2. Modify WiFi connection. Select WiFi Settings and the camera will show the available Wi-Fi hotspots. Select your Wi-Fi network name (SSID), enter the Wi-Fi password and press the finish key to connect. Note: After saving, if the camera is connected to WiFi, the camera will disconnect the current connection to try a new WiFi network, which will cause the camera in the App to be temporarily offline for about 1 minute.



4. SD card video recording setting: Set the mode and the screen size of SD card video recording.



4. Click the WiFi configuration, and then verify that the displayed WiFi network name is the same as the UID number of the device. Then return to APP, the device will be added automatically.


## Connect the camera to the Wi-Fi wireless network

For a new camera or the camera you install to a new location, please reset the camera to default settings (press and hold the camera reset button for more than 5 seconds after the camera starts), and turn on AP mode after the camera restarts. The WiFi indicator light flashes slowly (once every 3 seconds). Then turn on the phone settings, connect the phone to the camera's AP hotspot (the WiFi network is named after the camera UID), and wait for the phone to switch to the camera's WiFi network before starting App.

1. Connect the phone to the camera's AP hotspot (the WiFi network is named after the camera UID), and wait for the phone to switch to the camera's WiFi network before starting App.


2. Select to add camera "+" in App

3. Select to connect the camera to the WiFi network

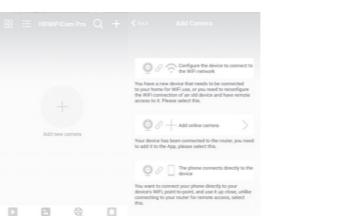

4. Click the WiFi configuration, and then verify that the displayed WiFi network name is the same as the UID number of the device. Then return to APP, the device will be added automatically.

2. Click "+" to add a new camera. Click and add the connected camera, enter the page for adding the camera, fill in the UID or password to add the camera. Note: when using the camera for the first time, please refer to "set up the camera to connect to the WiFi network" section on the instruction to set up the camera to connect to your router before adding the camera.

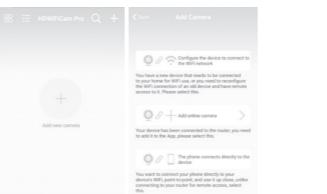

3. There are two ways to quickly enter the camera UID: A. Scan the QR code on the camera; B. Search the camera through the local network.



4. Fill in the camera name and the P2P password. The default P2P password is 6666. Confirm and click Ok. Camera is added successfully. It is recommended to

P2P mode viewing  
You can view videos directly and operate on the camera without a WiFi router.

Steps:

1. Reset the camera and wait for the camera to restart and turn on AP mode.
2. After the camera is started, you can find the same WiFi network as the camera UID on the WiFi setting page of the phone, without encryption.
3. Connect your phone to the WiFi network and wait for the icon of successful WiFi signal connection.
4. Same as online mode, add an online camera directly and you can connect directly.



5. After the connection is successful, open and view the videos.





FAQ

1. Why is the image blurred?  
A: Remove the protective film of the lens. If it is still not clear, rotate the camera lens and focus it so that you can get a clear image after focusing.

2. Why does the camera always require a user name and password, or an incorrect user?  
A: The default password for the camera is 6666. If you forget your user name or password, you can resume the camera to the default settings to get the default user name and password.

3. How can I resume my camera to default settings?  
A: Please press the reset button on the camera for about 5 seconds until the camera restarts.

modify the P2P access password after setting up the camera.

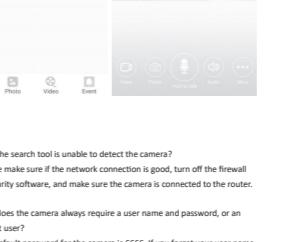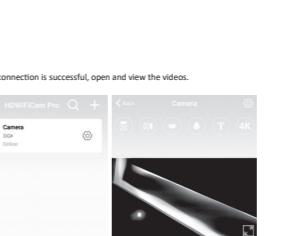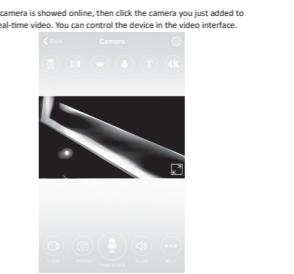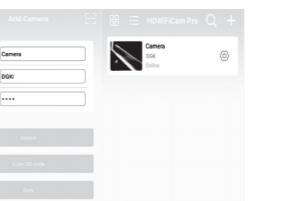

6. Icons and buttons for video pages

Camera platform control	By PAN/TILT with your fingers on the video page, you can control the rotation of the camera platform, which depends on the sliding distance of your finger need to purchase camera for support.
Microphone	Users can hear the camera sound and have two-way voice intercom (need to purchase camera for support).
Video	Take snapshots and record video files
Photo	Flip images vertically and horizontally
Adjust brightness and contrast, tune intercom sound	Adjust brightness and contrast, tune intercom sound
Playback	Watch videos in the SD card

## 1. Other features of the page

Camera	Watch the current real-time video
Photo	View screenshots taken by the camera
Video	View video files for your mobile device
Event	View camera alarm event record

## 4. Why is the image blurred?

A: Remove the protective film of the lens. If it is still not clear, rotate the camera lens and focus it so that you can get a clear image after focusing.

5. After the connection is successful, open and view the videos.

FAQ

1. Why is the image blurred?  
A: Remove the protective film of the lens. If it is still not clear, rotate the camera lens and focus it so that you can get a clear image after focusing.

2. Why does the camera always require a user name and password, or an incorrect user?  
A: The default password for the camera is 6666. If you forget your user name or password, you can resume the camera to the default settings to get the default user name and password.

3. How can I resume my camera to default settings?  
A: Please press the reset button on the camera for about 5 seconds until the camera restarts.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.