



# SAR TEST REPORT

For

DOKE COMMUNICATION (HK) LIMITED

Smart phone

Test Model: FLAT 1C

Additional Model No.: FLAT 1

Prepared for : DOKE COMMUNICATION (HK) LIMITED  
Address : RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK CHINA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel : (86)755-82591330  
Fax : (86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 7, 2023  
Number of tested samples : 1  
Sample number : A11063015-1  
Serial number : Prototype  
Date of Test : November 7, 2023~ November 24, 2023  
Date of Report : November 30, 2023





<b>SAR TEST REPORT</b>	
Report Reference No.....	LCSA11063015E
Date Of Issue .....	November 30, 2023
<b>Testing Laboratory Name.....</b>	<b>Shenzhen LCS Compliance Testing Laboratory Ltd.</b>
Address .....	101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Testing Location/ Procedure .....	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
<b>Applicant's Name .....</b>	<b>DOKE COMMUNICATION (HK) LIMITED</b>
Address .....	RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK CHINA
<b>Test Specification:</b>	
Standard.....	FCC 47CFR §2.1093, ANSI/IEEE C95.1-2019, IEEE 1528-2013
Test Report Form No.....	LCSEMC-1.0
TRF Originator.....	Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF .....	Dated 2014-09
<b>Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>Test Item Description.....</b>	<b>Smart phone</b>
Trade Mark .....	OSCAL
Model/Type Reference .....	FLAT 1C
Operation Frequency.....	GSM850/1900,WCDMA Band II/V, WIFI2.4G, BT and LTE 2,4,5,7,12,13,17
Ratings.....	Input: DC 5V, 2000mA DC 3.87V by Rechargeable Li-ion Battery, 4700mAh
<b>Result .....</b>	<b>Positive</b>

Compiled by:

Jay zhan

Supervised by:

Cary Luo

Approved by:

Gavin Liang

Jay Zhan/ File administrators

Cary Luo / Technique principal

Gavin Liang/ Manager





# SAR -- TEST REPORT

<b>Test Report No. :</b>	<b>LCSA11063015E</b>	<u>November 30, 2023</u> Date of issue
--------------------------	----------------------	---

EUT.....	: Smart phone
Type/Model .....	: FLAT 1C
<b>Applicant.....</b>	<b>: DOKE COMMUNICATION (HK) LIMITED</b>
Address.....	: RM 1902 EASEY COMM BLDG 253-261 HENNESSY ROAD WANCHAI HK CHINA
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Shenzhen DOKE Electronic Co., Ltd</b>
Address.....	: 801, Building3, 7th Industrial Zone, Yulv Community, Yutang Road, Guangming District, Shenzhen, China.
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	: /
Address.....	: /
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





### Revision History

Revision	Issue Date	Revision Content	Revised By
000	November 30, 2023	Initial Issue	---





# TABLE OF CONTENTS

- 1. TEST STANDARDS AND TEST DESCRIPTION.....6**
  - 1.1. STATEMENT OF COMPLIANCE .....6
  - 1.2. TEST LOCATION .....7
  - 1.3. TEST FACILITY .....7
  - 1.4. TEST LABORATORY ENVIRONMENT .....7
  - 1.5. PRODUCT DESCRIPTION .....8
  - 1.6. DUT ANTENNA LOCATIONS(FRONT VIEW) .....10
  - 1.7. TEST SPECIFICATION.....11
  - 1.8. RF EXPOSURE LIMITS .....12
  - 1.9. EQUIPMENT LIST .....13
- 2. SAR MEASUREMENTS SYSTEM CONFIGURATION .....14**
  - 2.1. SAR MEASUREMENT SYSTEM .....14
  - 2.2. ISOTROPIC E-FIELD PROBE EX3DV4 .....16
  - 2.3. DATA ACQUISITION ELECTRONICS (DAE) .....17
  - 2.4. SAM TWIN PHANTOM .....17
  - 2.5. ELI PHANTOM .....18
  - 2.6. DEVICE HOLDER FOR TRANSMITTERS .....19
  - 2.7. MEASUREMENT PROCEDURE .....20
- 3. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY.....24**
  - 3.1. SAR MEASUREMENT VARIABILITY.....24
  - 3.2. SAR MEASUREMENT UNCERTAINTY .....24
- 4. DESCRIPTION OF TEST POSITION.....25**
  - 4.1. HEAD EXPOSURE CONDITION .....25
  - 4.2. BODY EXPOSURE CONDITION .....28
  - 4.3. EXTREMITY EXPOSURE CONDITIONS .....29
- 5. SAR SYSTEM VERIFICATION PROCEDURE .....30**
  - 5.1. TISSUE SIMULATE LIQUID.....30
  - 5.2. SAR SYSTEM CHECK.....32
- 6. SAR MEASUREMENT PROCEDURE .....34**
  - 6.1. CONDUCTED POWER MEASUREMENT .....34
  - 6.2. GSM TEST CONFIGURATION.....34
  - 6.3. UMTS TEST CONFIGURATION .....34
  - 6.4. LTE TEST CONFIGURATION .....36
  - 6.5. POWER REDUCTION .....36
  - 6.6. POWER DRIFT .....36
- 7. TEST CONDITIONS AND RESULTS .....37**
  - 7.1. CONDUCTED POWER RESULTS .....37
  - 7.2. STAND-ALONE SAR TEST EVALUATION .....78
  - 7.3. SAR MEASUREMENT RESULTS .....79
  - 7.4. MULTIPLE TRANSMITTER EVALUATION.....91
- APPENDIX A: DETAILED SYSTEM CHECK RESULTS .....94**
- APPENDIX B: DETAILED TEST RESULTS .....94**
- APPENDIX C: CALIBRATION CERTIFICATE.....94**
- APPENDIX D: PHOTOGRAPHS .....94**





# 1. TEST STANDARDS AND TEST DESCRIPTION

## 1.1. Statement of Compliance

The maximum of results of SAR found during testing for FLAT 1C Care follows:

<Highest Reported standalone SAR Summary>

Classment Class	Frequency Band	Head (Report SAR1-g (W/kg))	Body/ Hotspot (Report SAR1-g (W/kg))
			(Separation Distance 10mm)
PCE	GSM 850	0.172	0.280
	GSM1900	0.100	0.304
	WCDMA Band II	0.067	0.259
	WCDMA Band V	0.315	0.247
	LTE Band 2	0.094	0.277
	LTE Band 4	0.078	0.156
	LTE Band 5	0.136	0.171
	LTE Band 7	0.138	0.601
	LTE Band 12	0.040	0.131
	LTE Band 13	0.038	0.128
LTE Band 17	0.033	0.136	
DTS	WIFI2.4G	0.251	0.162

Note

- 1) This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
- 2) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode;
- 3) Body worn only Front side,Rear side

<Highest Reported simultaneous SAR Summary>

Exposure Position	Classment Class	Head (Report SAR1-g (W/kg))	Highest Reported Simultaneous Transmission SAR1-g (W/kg)
Body (Hotspot)	PCE	0.601	<b>0.763</b>
	DTS	0.162	





### 1.2. Test Location

Company: Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Address: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Telephone: (86)755-82591330  
 Fax: (86)755-82591330  
 Web: www.LCS-cert.com  
 E-mail: webmaster@LCS-cert.com

### 1.3. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Site Description  
 SAR Lab. : NVLAP Accreditation Code is 600167-0.  
 FCC Designation Number is CN5024.  
 CAB identifier is CN0071.  
 CNAS Registration Number is L4595.  
 Test Firm Registration Number: 254912.

### 1.4. Test Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Atmospheric pressure:	950-1050mbar
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	





## 1.5. Product Description

The **DOKE COMMUNICATION (HK) LIMITED** 's Model: FLAT 1 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

General Description	
Product Name:	Smart phone
Test Model:	FLAT 1C
Additional Model No.	FLAT 1
Power supply:	Input: DC 5V, 2000mA DC 3.87V by Rechargeable Li-ion Battery, 4700mAh
Hardware Version:	L617_V1
Software Version:	FLAT1C_EEA_S6319D_V1.0

Technical Characteristics	
<b>Bluetooth</b>	
Frequency Range:	2402MHz~2480MHz
Bluetooth Channel Number:	79 channels for Bluetooth V4.1(DSS) 40 channels for Bluetooth V4.1(DTS)
Bluetooth Channel Spacing:	1MHz for Bluetooth V4.1(DSS) 2MHz for Bluetooth V4.1(DTS)
Bluetooth Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.1(DSS) GFSK for Bluetooth V4.1(DTS)
Bluetooth Version:	V5.0
Antenna Description:	Internal antenna, 1.02dBi(Max.)
<b>WIFI(2.4G Band)</b>	
Frequency Range:	2412MHz~2462MHz
Channel Spacing:	5MHz
Channel Number:	11 Channels for 20MHz bandwidth(2412~2462MHz) 7 Channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description:	Internal antenna, 1.02dBi(Max.)
<b>2G</b>	
Support Band:	<input type="checkbox"/> GSM 900 (EU-Band) <input type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input checked="" type="checkbox"/> PCS 1900 (U.S.-Band)
Release Version:	R99
GPRS Class:	Class 12
EGPRS Class:	Class 12
Type Of Modulation:	GMSK for GSM/GPRS; 8PSK for EGPRS
Antenna Description:	Internal antenna -1.29dBi (max.) For GSM 850 1.83dBi (max.) For PCS 1900
<b>3G</b>	
Support Band:	<input checked="" type="checkbox"/> WCDMA Band II (U.S.-Band) <input checked="" type="checkbox"/> WCDMA Band V (U.S.-Band)
Release Version:	R8
Type Of Modulation:	QPSK, 16QAM
Antenna Description:	Internal antenna 1.83dBi (max.) For WCDMA Band II








	-1.29dBi (max.) For WCDMA Band V
LTE	
Support Band:	<input checked="" type="checkbox"/> E-UTRA Band 2(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 4(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 5(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 7(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 12(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 13(U.S.-Band) <input checked="" type="checkbox"/> E-UTRA Band 17(U.S.-Band)
LTE Release Version:	R9
Type Of Modulation:	QPSK/16QAM
Antenna Description:	Internal antenna 1.83dBi (max.) For E-UTRA Band 2 1.58dBi (max.) For E-UTRA Band 4 -1.29dBi (max.) For E-UTRA Band 5 0.94dBi (max.) For E-UTRA Band 7 -1.58dBi (max.) For E-UTRA Band 12 -1.29dBi (max.) For E-UTRA Band 13 -1.58dBi (max.) For E-UTRA Band 17
Power Class:	Class 3
Extreme temp. Tolerance:	-30°C to +50°C
Extreme vol. Limits:	3.5VDC to 4.4VDC (nominal: 3.85VDC)
Exposure category:	Uncontrolled Environment General Population



### 1.6. DUT Antenna Locations(Front View)

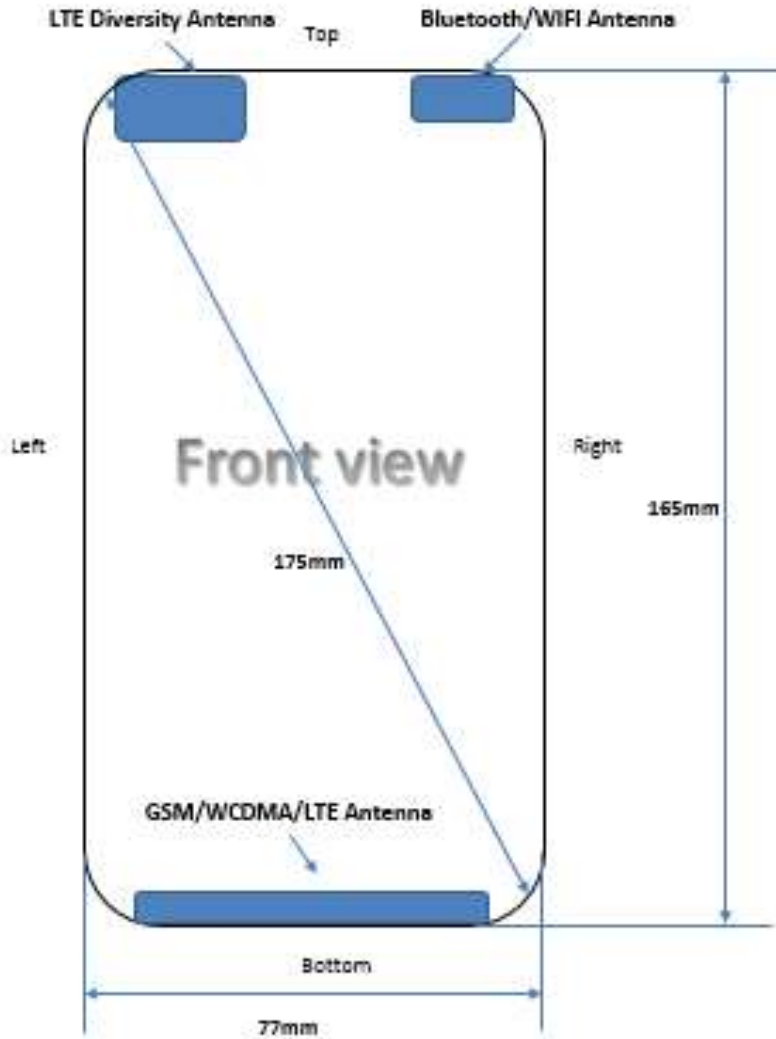

**Note:**

- 1) Main Antenna: GSM850/1900, WCDMA Band II/ IV// V, LTE Band 2/4/5/7/12/13/17, the Div ant only for Rx.
- 2) The test device is a smart phone. The overall diagonal dimension of this device is 170 mm. Per KDB 648474 D04, because the diagonal distance of this device is  $\geq 160$ mm, so it is a phablet.

According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing							
Mode	Exposure Condition	Front	Back	Left	Right	Top	Bottom
GSM/WCDMA/LTE Antenna	Body 1g SAR	Yes	Yes	Yes	Yes	No	Yes
Bluetooth/WIFI Antenna	Body 1g SAR	Yes	Yes	No	Yes	Yes	No

Table 1: EUT Sides for SAR Testing

**Note:**

When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.





## 1.7. Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D06	Hotspot Mode SAR v02r01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 648474 D04	Handset SAR v01r03
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03



## 1.8. RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain*Trunk)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	<b>4.00 mW/g</b>	20.00 mW/g

**Notes:**

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)





## 1.9. Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52; SEMCAD X				
Hardware Reference						
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration	
<input checked="" type="checkbox"/>	PC	Lenovo	NA	NA	NA	NA
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM V5.0	1850	NCR	NCR
<input checked="" type="checkbox"/>	ELI Phantom	SPEAG	ELI V6.0	2010	NCR	NCR
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE3	419	2023/6/20	2024/6/19
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	3805	2023/6/21	2024/6/20
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D750V3	1191	2023/6/15	2026/6/14
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D835V2	4d124	2023/6/20	2026/6/19
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1750V2	1035	2023/6/12	2026/6/11
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1900V2	5d055	2023/6/20	2026/6/19
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2450V2	965	2023/6/12	2026/6/11
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2600V2	1071	2023/6/20	2026/6/19
<input checked="" type="checkbox"/>	Agilent Network Analyzer	Agilent	8753E	SU38432944	2023/6/9	2024/6/8
<input checked="" type="checkbox"/>	Dielectric Probe Kit	SPEAG	DAK3.5	1425	NCR	NCR
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	42115	2023/10/29	2024/10/28
<input checked="" type="checkbox"/>	Directional Coupler	MCLI/USA	4426-20	03746	2023/6/9	2024/6/8
<input checked="" type="checkbox"/>	Power meter	Agilent	E4419B	MY45104493	2023/10/29	2024/10/28
<input checked="" type="checkbox"/>	Power meter	Agilent	E4419B	MY45100308	2023/10/29	2024/10/28
<input checked="" type="checkbox"/>	Power sensor	Agilent	E9301H	MY41495616	2023/10/29	2024/10/28
<input checked="" type="checkbox"/>	Power sensor	Agilent	E9301H	MY41495234	2023/10/29	2024/10/28
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	MY49072627	2023/6/9	2024/6/8
<input checked="" type="checkbox"/>	Broadband Pre-amplifier	/	BP-01M18G	P190501	2023/6/15	2024/6/14
<input checked="" type="checkbox"/>	DC POWER SUPPLY	I-SHENG	SP-504	NA	NCR	NCR
<input checked="" type="checkbox"/>	Speed reading thermometer	HTC-1	NA	LCS-E-138	2023/6/13	2024/6/12

Note: All the equipments are within the valid period when the tests are performed.



## 2. SAR MEASUREMENTS SYSTEM CONFIGURATION

### 2.1. SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

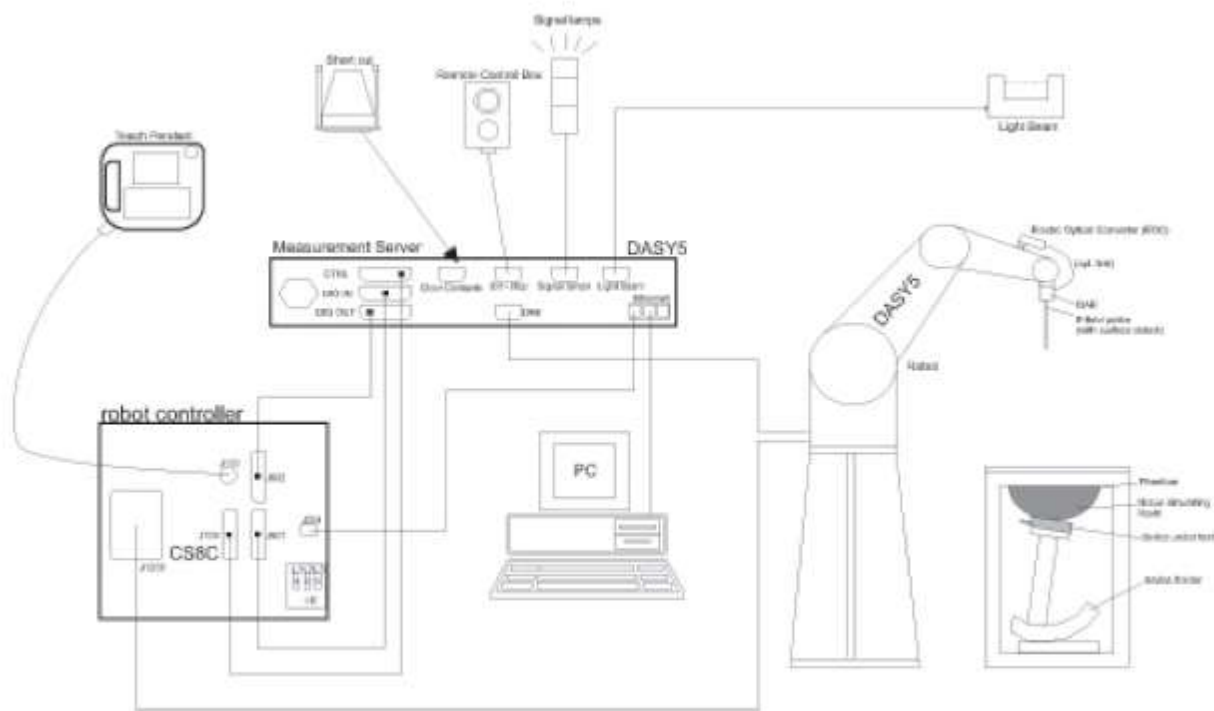

F-1. SAR Measurement System Configuration






- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.



## 2.2. Isotropic E-field Probe EX3DV4


	<p>Symmetrical design with triangular core                  Built-in shielding against static charges                  PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
<p><b>Calibration</b></p>	<p>ISO/IEC 17025 <a href="#">calibration service</a> available.</p>
<p><b>Frequency</b></p>	<p>10 MHz to &gt; 6 GHz                  Linearity: <math>\pm 0.2</math> dB (30 MHz to 6 GHz)</p>
<p><b>Directivity</b></p>	<p><math>\pm 0.3</math> dB in TSL (rotation around probe axis)  <math>\pm 0.5</math> dB in TSL (rotation normal to probe axis)</p>
<p><b>Dynamic Range</b></p>	<p>10 <math>\mu</math>W/g to &gt; 100 mW/g                  Linearity: <math>\pm 0.2</math> dB (noise: typically &lt; 1 <math>\mu</math>W/g)</p>
<p><b>Dimensions</b></p>	<p>Overall length: 337 mm (Tip: 20 mm)                  Tip diameter: 2.5 mm (Body: 12 mm)                  Typical distance from probe tip to dipole centers: 1 mm</p>
<p><b>Application</b></p>	<p>High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.</p>
<p><b>Compatibility</b></p>	<p>DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI</p>






### 2.3. Data Acquisition Electronics (DAE)

<b>Model</b>	DAE
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
<b>Input Offset Voltage</b>	< 5μV (with auto zero)
<b>Input Bias Current</b>	< 50 f A
<b>Dimensions</b>	60 x 60 x 68 mm

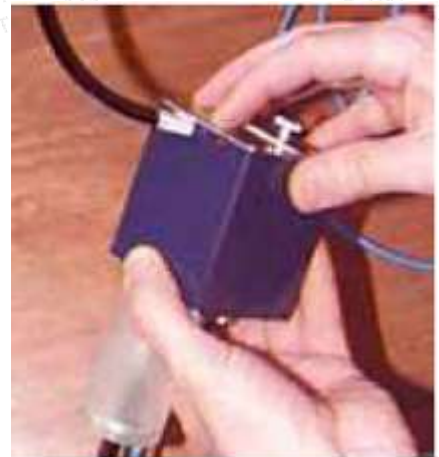

### 2.4. SAM Twin Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
<b>Dimensions (incl. Wooden Support)</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet
<b>Filling Volume</b>	approx. 25 liters
<b>Wooden Support</b>	SPEAG standard phantom table

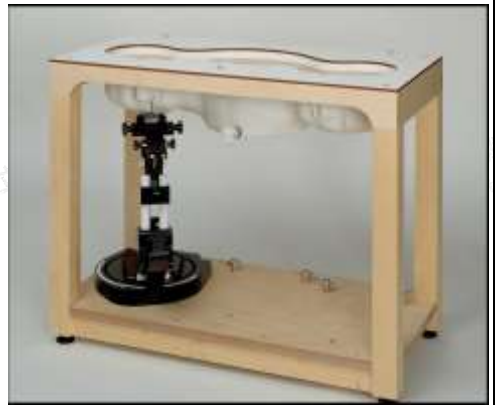


The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



## 2.5. ELI Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



## 2.6. Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



## 2.7. Measurement procedure

### 2.7.1. Scanning procedure

#### **Step 1: Power reference measurement**

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

#### **Step 2: Area scan**

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

#### **Step 3: Zoom scan**

Around this point, a volume of 32mm\*32mm\*30mm ( $f \leq 2\text{GHz}$ ), 30mm\*30mm\*30mm ( $f$  for 2-3GHz) and 24mm\*24mm\*22mm ( $f$  for 5-6GHz) was assessed by measuring 5x5x7 points ( $f \leq 2\text{GHz}$ ), 7x7x7 points ( $f$  for 2-3GHz) and 7x7x12 points ( $f$  for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm  3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

**Step 4: Power reference measurement (drift)**

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %

**2.7.2. Data Storage**

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.



### 2.7.3. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	$\epsilon$
- Density	$\rho$	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASYS components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 $U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$





H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

Norm $_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )

[mV/(V/m)<sup>2</sup>] for E-field Probes

ConvF = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\epsilon$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m



### 3. SAR measurement variability and uncertainty

#### 3.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
  - 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
  - 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
  - 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

#### 3.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.






## 4. Description of Test Position


### 4.1. Head Exposure Condition

#### 4.1.1. SAM Phantom Shape

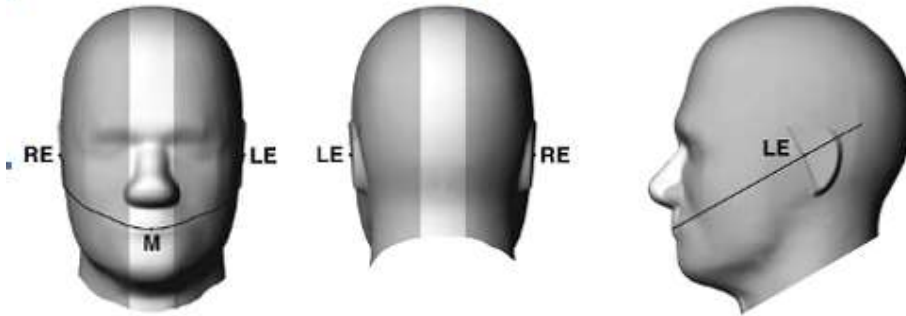


F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

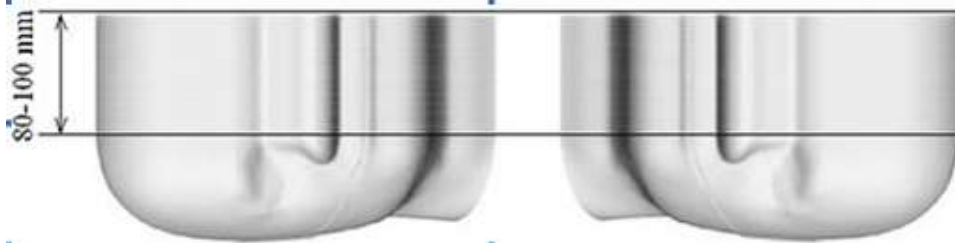

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

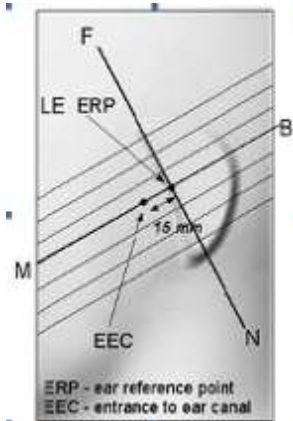


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

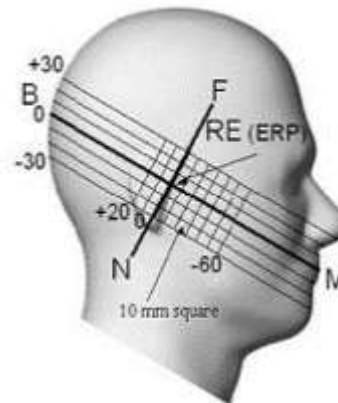


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations



### 4.1.2. EUT constructions

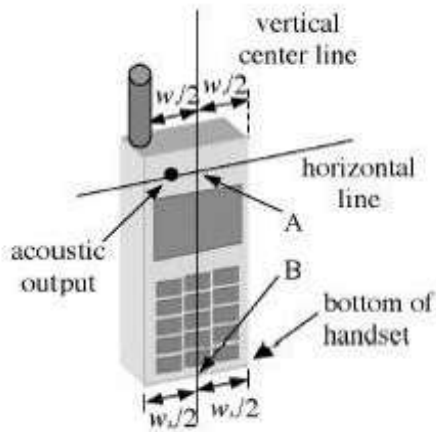

F-1. Handset vertical and horizontal reference lines—"fixed case"

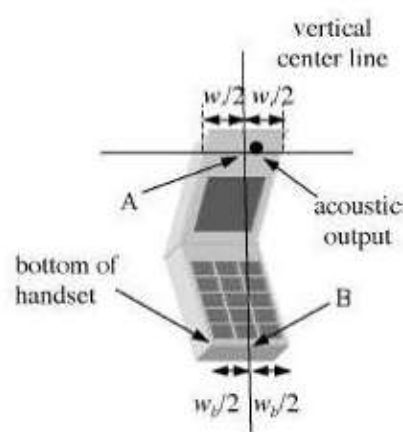

F-2. Handset vertical and horizontal reference lines—"clam-shell case"

### 4.1.3. Definition of the "cheek" position


a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.

b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.




#### 4.1.4. Definition of the “tilted” position

- Position the device in the “cheek” position described above;
- While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

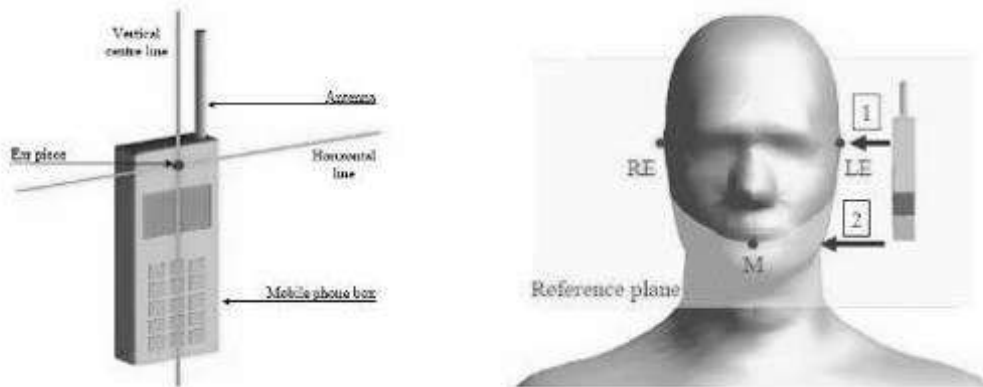

F-1. Definition of the reference lines and points, on the phone and on the phantom and initial position

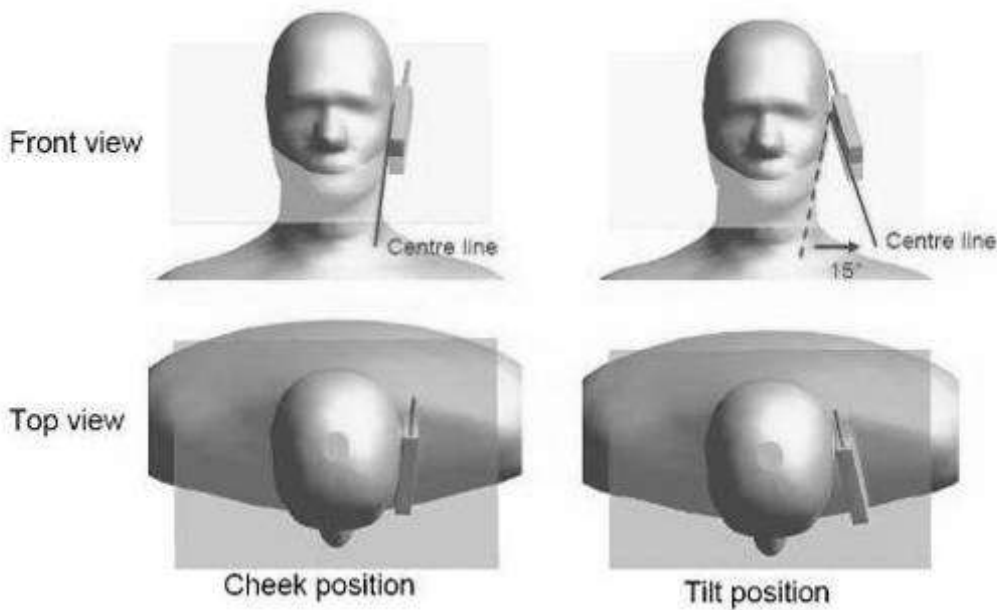

F-2. “Cheek” and “tilt” positions of the mobile phone on the left side



## 4.2. Body Exposure Condition


### 4.2.1. Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

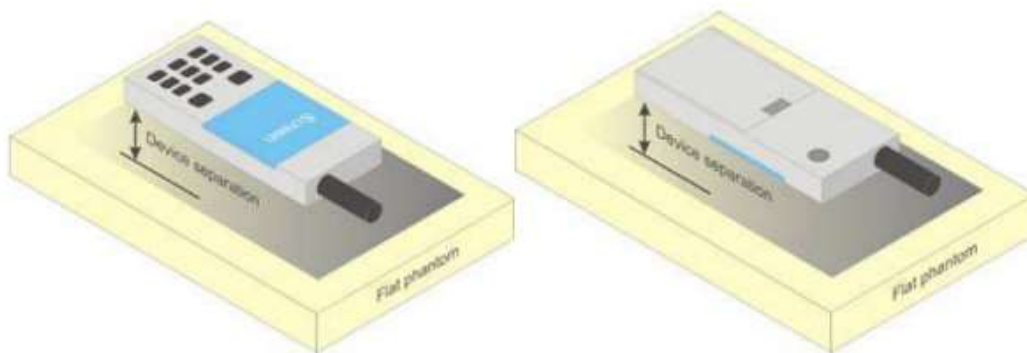

F-1. Test positions for body-worn devices



#### 4.2.2. Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than 9 cm x 5 cm, a test separation distance of 5 mm is required.

#### 4.3. Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension  $> 15.0 \text{ cm}$  or an overall diagonal dimension  $> 16.0 \text{ cm}$  that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25 \text{ mm}$  from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2 \text{ W/kg}$ ; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, the Main antenna frequency bands are not required to test with 0mm for the Product Specific 10 g SAR.





## 5. SAR System Verification Procedure

### 5.1. Tissue Simulate Liquid

#### 5.1.1. Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride			Sucrose: 98+% Pure Sucrose		
Water: De-ionized, 16 MΩ <sup>+</sup> resistivity			HEC: Hydroxyethyl Cellulose		
Tween: Polyoxyethylene (20) sorbitan monolaurate					
HSL5GHz is composed of the following ingredients:					
Water: 50-65%					
Mineral oil: 10-30%					
Emulsifiers: 8-25%					
Sodium salt: 0-1.5%					

Table 2: Recipe of Tissue Simulate Liquid





### 5.1.2. Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the DAKS. The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was  $22\pm 2^{\circ}\text{C}$ .


Tissue Type	Measured Frequency (MHz)	Target Tissue ( $\pm 5\%$ )		Measured Tissue		Liquid Temp. ( $^{\circ}\text{C}$ )	Measured Date
		$\epsilon_r$	$\sigma(\text{S/m})$	$\epsilon_r$	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44.00)	0.89 (0.85~0.93)	42.809	0.855	22.0	November 10, 2023
835 Head	835	41.5 (39.43~43.58)	0.9 (0.86~0.95)	42.233	0.904	21.8	November 08, 2023
1700 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.835	1.383	22.1	November 15, 2023
1900 Head	1900	40 (38.00~42.00)	1.4 (1.33~1.47)	41.171	1.437	22.5	November 17, 2023
2450 Head	2450	39.2 (37.24~41.16)	1.8 (1.71~1.89)	39.147	1.823	21.8	November 22, 2023
2600 Head	2600	39 (37.05~40.95)	1.96 (1.86~2.06)	38.658	1.982	22.2	November 24, 2023

Table 3: Measurement result of Tissue electric parameters



## 5.2. SAR System Check

The microwave circuit arrangement for system Check is sketched in F-1. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range  $22\pm 2^{\circ}\text{C}$ , the relative humidity was in the range 60% and the liquid depth above the ear reference points was above  $15\pm 0.5$  cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

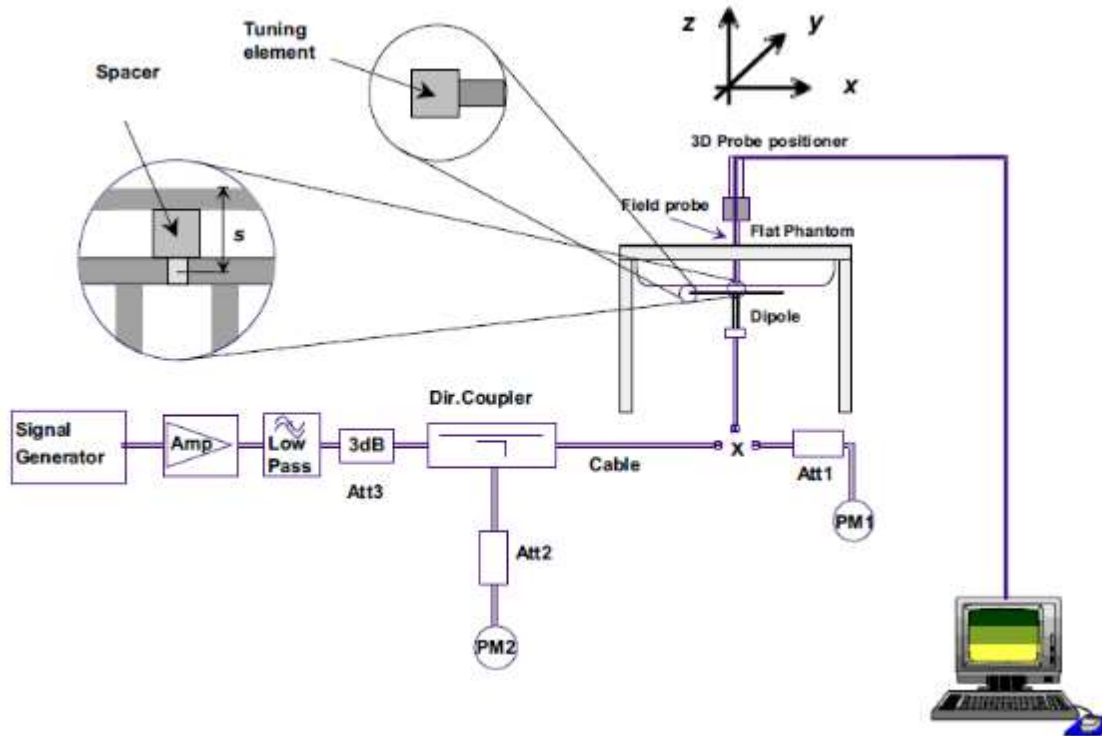

F-1. the microwave circuit arrangement used for SAR system check

### 5.2.1. Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- There is no physical damage on the dipole;
- System check with specific dipole is within 10% of calibrated value;
- Return-loss is within 20% of calibrated measurement;
- Impedance is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.







### 5.2.2. Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V2	Head	2.11	1.37	8.44	5.48	8.57 (7.71~9.43)	5.61 (5.05~6.17)	22.0	November 10, 2023
D835V2	Head	2.34	1.56	9.36	6.24	9.58 (8.62~10.54)	6.27 (5.64~6.90)	21.8	November 08, 2023
D1750V2	Head	9.02	4.74	36.08	18.96	35.9 (32.31~39.49)	18.9 (17.01~20.79)	22.1	November 15, 2023
D1900V2	Head	10.50	5.38	42.00	21.52	40.3 (36.27~44.33)	21.0 (18.9~23.1)	22.5	November 17, 2023
D2450V2	Head	12.60	5.82	50.40	23.28	53.5 (48.15~58.85)	25.0 (22.50~27.50)	21.8	November 22, 2023
D2600V2	Head	14.10	6.25	56.40	25.00	56.80 (51.12~62.48)	25.5 (22.95~28.05)	22.2	November 24, 2023

Table 4: Please see the Appendix A





## 6. SAR measurement procedure

The measurement procedures are as follows:

### 6.1. Conducted power measurement

- For WWAN power measurement, use base station simulator connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously Transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

### 6.2. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU200 the power level is set to “5” for GSM 850, set to “0” for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4. the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 4.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. GSM voice and GPRS data use GMSK, which is a constant amplitude modulation with minimal peak to average power difference within the time-slot burst. For EDGE, GMSK is used for MCS 1 – MCS 4 and 8-PSK is used for MCS 5 – MCS 9; where 8-PSK has an inherently higher peak-to-average power ratio. The GMSK and 8-PSK EDGE configurations are considered separately for SAR compliance. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

### 6.3. UMTS Test Configuration

#### 3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

#### Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

#### Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.





Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

1) Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

2) Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/ HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors ( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta_{ACK}$ ,  $\Delta_{NACK}$ ,  $\Delta_{CQI}$ ) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set

Table 2: Subtests for UMTS Release 5 HSDPA

Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$   
Note2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .  
Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the "Release 6 HSPA Data Devices" section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the  $\beta$  values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Table 3: Sub-Test 5 Setup for Release 6 HSUPA



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



Sub-set	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM <sup>(2)</sup> (dB)	MPR (dB)	AG <sup>(4)</sup> Index	E-TFCI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ :47/15 $\beta_{ed2}$ :47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

## 6.4. LTE Test Configuration

### QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.8 When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

### QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.9

### QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

## 6.5. Power Reduction

The product without any power reduction.

## 6.6. Power Drift

To control the output power stability during the SAR test, SAR system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. This ensures that the power drift during one measurement is within  $\pm 0.2$ dB.





## 7. TEST CONDITIONS AND RESULTS

### 7.1. Conducted Power Results

According KDB 447498 D01 General RF Exposure Guidance v06 Section 4.1 2) states that “Unless it is specified differently in the published RF exposure KDB procedures, these requirements also apply to test reduction and test exclusion considerations. Time-averaged maximum conducted output power applies to SAR and, as required by § 2.1091(c), time-averaged ERP applies to MPE. When an antenna port is not available on the device to support conducted power measurement, such as FRS and certain Part 15 transmitters with built-in integral antennas, the maximum output power allowed for production units should be used to determine RF exposure test exclusion and compliance.”

#### <GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. According to October 2013TCB Workshop, for GSM / GPRS , the number of time slots to test for SAR should correspond to the highest frame-average maximum output power configuration, considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slot) for GSM850/GSM1900 band due to their highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.

#### 7.1.1. Conducted power measurement results for GSM850

GSM 850										
Burst Output Power(dBm)		Channel			Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.37	32.44	32.52	33.00	-9.19	23.18	23.25	23.33	23.81
GPRS (GMSK)	1 TX Slot	32.54	32.59	32.65	33.00	-9.19	23.35	23.40	23.46	23.81
	2 TX Slots	30.49	30.47	30.54	31.00	-6.18	24.31	24.29	24.36	24.82
	3 TX Slots	28.44	28.43	28.58	29.00	-4.42	24.02	24.01	24.16	24.58
	4 TX Slots	26.16	26.18	26.38	27.00	-3.17	22.99	23.01	23.21	23.83
EGPRS(8PSK)	1 TX Slot	24.81	24.80	25.04	25.50	-9.19	15.62	15.61	15.85	16.31
	2 TX Slots	23.64	23.64	23.91	24.50	-6.18	17.46	17.46	17.73	18.32
	3 TX Slots	21.52	21.67	21.84	22.50	-4.42	17.10	17.25	17.42	18.08
	4 TX Slots	19.22	19.40	19.54	20.00	-3.17	16.05	16.23	16.37	16.83

#### 7.1.2. Conducted power measurement results for PCS1900

GSM 1900										
Burst Output Power(dBm)		Channel			Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
		512	661	810			512	661	810	
GSM(GMSK)	GSM	28.68	29.00	29.11	29.50	-9.19	19.49	19.81	19.92	20.31
GPRS (GMSK)	1 TX Slot	28.64	28.96	29.04	29.50	-9.19	19.45	19.77	19.85	20.31
	2 TX Slots	26.41	26.67	26.62	27.00	-6.18	20.23	20.49	20.44	20.82
	3 TX Slots	24.81	25.06	24.97	25.50	-4.42	20.39	20.64	20.55	21.08
	4 TX Slots	22.76	23.00	22.89	23.50	-3.17	19.59	19.83	19.72	20.33
EGPRS(8PSK)	1 TX Slot	26.74	26.28	26.08	27.00	-9.19	17.55	17.09	16.89	17.81
	2 TX Slots	25.10	24.75	24.52	25.50	-6.18	18.92	18.57	18.34	19.32
	3 TX Slots	23.24	22.93	22.69	23.50	-4.42	18.82	18.51	18.27	19.08
	4 TX Slots	21.04	20.81	20.56	21.50	-3.17	17.87	17.64	17.39	18.33

Note:

- 1)CMW500 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075





Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17
--	-------	-------	-------	-------

2)The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

3)Frame-averaged power =  $10 \times \log(\text{Burst-averaged power mW} \times \text{Slot used} / 8)$

When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used

When multiple slots can be used, SAR should be tested to account for the maximum source-based time-averaged output power.



<UMTS Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station CMW500 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station R&S CMW500 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.



**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}$ : 47/15 $\beta_{ed2}$ : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**General Note**

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR and HSDPA/HSUPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA/HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.





**7.1.3. Conducted Power Measurement Results(WCDMA Band II)**

Item	Band	WCDMA Band II result (dBm)			
		Channel/Frequency(MHz)			
		sub-test	9262/1852.4	9400/1880	9538/1907.6
RMC	12.2kbps RMC	21.66	21.85	21.92	22.50
HSDPA	Sub –Test 1	21.48	21.71	21.75	22.50
	Sub –Test 2	21.70	21.66	21.69	22.50
	Sub –Test 3	21.83	21.60	21.75	22.50
	Sub –Test 4	21.65	21.71	21.70	22.50
HSUPA	Sub –Test 1	21.54	21.34	21.58	22.50
	Sub –Test 2	21.67	21.50	21.51	22.50
	Sub –Test 3	21.41	21.55	21.35	22.50
	Sub –Test 4	21.33	21.46	21.54	22.50
	Sub –Test 5	21.34	21.29	21.41	22.50

Note:

- 1) when the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.

**7.1.4. Conducted Power Measurement Results(WCDMA Band V)**

Item	Band	WCDMA Band V result (dBm)			
		Channel/Frequency(MHz)			
		sub-test	4132/826.4	4182/836.4	4233/846.6
RMC	12.2kbps RMC	22.97	22.50	22.13	23.50
HSDPA	Sub –Test 1	22.95	22.75	23.00	23.50
	Sub –Test 2	22.87	22.94	22.96	23.50
	Sub –Test 3	23.00	23.09	22.97	23.50
	Sub –Test 4	23.04	23.04	22.91	23.50
HSUPA	Sub –Test 1	22.62	22.54	22.77	23.50
	Sub –Test 2	22.74	22.80	22.68	23.50
	Sub –Test 3	22.77	22.93	22.75	23.50
	Sub –Test 4	22.85	22.74	22.91	23.50
	Sub –Test 5	22.58	22.77	22.66	23.50

Note:

- 1) when the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.



**7.1.5. Conducted Power Measurement Results(LTE Band 2)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	22.89	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	22.98	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	22.98	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	22.98	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	23.10	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	23.08	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	20.95	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	23.11	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	23.02	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	23.11	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	23.16	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	23.15	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	23.22	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	21.22	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	23.40	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	23.35	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	23.22	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	23.28	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	23.31	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	23.28	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	21.33	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	22.78	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	22.86	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	22.84	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	21.70	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	21.77	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	21.72	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	21.29	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	22.23	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	22.01	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	21.98	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	21.99	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	21.99	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	22.22	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	21.21	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	1.4MHz	16QAM	19193	1RB#0	22.19	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	22.71	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	22.20	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	22.01	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	22.01	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	22.07	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	21.33	PASS
Band2	3MHz	QPSK	18615	1RB#0	22.69	PASS
Band2	3MHz	QPSK	18615	1RB#8	22.81	PASS
Band2	3MHz	QPSK	18615	1RB#14	22.80	PASS
Band2	3MHz	QPSK	18615	8RB#0	20.94	PASS
Band2	3MHz	QPSK	18615	8RB#4	20.82	PASS
Band2	3MHz	QPSK	18615	8RB#7	20.80	PASS
Band2	3MHz	QPSK	18615	15RB#0	20.85	PASS
Band2	3MHz	QPSK	18900	1RB#0	22.96	PASS
Band2	3MHz	QPSK	18900	1RB#8	22.94	PASS
Band2	3MHz	QPSK	18900	1RB#14	22.90	PASS
Band2	3MHz	QPSK	18900	8RB#0	21.03	PASS
Band2	3MHz	QPSK	18900	8RB#4	21.04	PASS
Band2	3MHz	QPSK	18900	8RB#7	20.87	PASS
Band2	3MHz	QPSK	18900	15RB#0	21.00	PASS
Band2	3MHz	QPSK	19185	1RB#0	23.23	PASS
Band2	3MHz	QPSK	19185	1RB#8	23.28	PASS
Band2	3MHz	QPSK	19185	1RB#14	23.12	PASS
Band2	3MHz	QPSK	19185	8RB#0	21.13	PASS
Band2	3MHz	QPSK	19185	8RB#4	21.17	PASS
Band2	3MHz	QPSK	19185	8RB#7	21.12	PASS
Band2	3MHz	QPSK	19185	15RB#0	21.13	PASS
Band2	3MHz	16QAM	18615	1RB#0	21.69	PASS
Band2	3MHz	16QAM	18615	1RB#8	21.71	PASS
Band2	3MHz	16QAM	18615	1RB#14	21.91	PASS
Band2	3MHz	16QAM	18615	8RB#0	21.05	PASS
Band2	3MHz	16QAM	18615	8RB#4	21.05	PASS
Band2	3MHz	16QAM	18615	8RB#7	21.06	PASS
Band2	3MHz	16QAM	18615	15RB#0	20.95	PASS
Band2	3MHz	16QAM	18900	1RB#0	22.03	PASS
Band2	3MHz	16QAM	18900	1RB#8	22.02	PASS
Band2	3MHz	16QAM	18900	1RB#14	21.98	PASS





Band2	3MHz	16QAM	18900	8RB#0	21.09	PASS
Band2	3MHz	16QAM	18900	8RB#4	21.03	PASS
Band2	3MHz	16QAM	18900	8RB#7	21.14	PASS
Band2	3MHz	16QAM	18900	15RB#0	21.03	PASS
Band2	3MHz	16QAM	19185	1RB#0	22.02	PASS
Band2	3MHz	16QAM	19185	1RB#8	22.08	PASS
Band2	3MHz	16QAM	19185	1RB#14	22.56	PASS
Band2	3MHz	16QAM	19185	8RB#0	21.36	PASS
Band2	3MHz	16QAM	19185	8RB#4	21.37	PASS
Band2	3MHz	16QAM	19185	8RB#7	21.36	PASS
Band2	3MHz	16QAM	19185	15RB#0	21.11	PASS
Band2	5MHz	QPSK	18625	1RB#0	22.75	PASS
Band2	5MHz	QPSK	18625	1RB#12	22.73	PASS
Band2	5MHz	QPSK	18625	1RB#24	22.78	PASS
Band2	5MHz	QPSK	18625	12RB#0	20.90	PASS
Band2	5MHz	QPSK	18625	12RB#6	20.91	PASS
Band2	5MHz	QPSK	18625	12RB#13	20.85	PASS
Band2	5MHz	QPSK	18625	25RB#0	20.84	PASS
Band2	5MHz	QPSK	18900	1RB#0	22.89	PASS
Band2	5MHz	QPSK	18900	1RB#12	22.81	PASS
Band2	5MHz	QPSK	18900	1RB#24	22.80	PASS
Band2	5MHz	QPSK	18900	12RB#0	21.02	PASS
Band2	5MHz	QPSK	18900	12RB#6	20.83	PASS
Band2	5MHz	QPSK	18900	12RB#13	20.90	PASS
Band2	5MHz	QPSK	18900	25RB#0	20.92	PASS
Band2	5MHz	QPSK	19175	1RB#0	23.29	PASS
Band2	5MHz	QPSK	19175	1RB#12	23.19	PASS
Band2	5MHz	QPSK	19175	1RB#24	23.26	PASS
Band2	5MHz	QPSK	19175	12RB#0	21.10	PASS
Band2	5MHz	QPSK	19175	12RB#6	21.12	PASS
Band2	5MHz	QPSK	19175	12RB#13	21.10	PASS
Band2	5MHz	QPSK	19175	25RB#0	21.09	PASS
Band2	5MHz	16QAM	18625	1RB#0	21.17	PASS
Band2	5MHz	16QAM	18625	1RB#12	21.21	PASS
Band2	5MHz	16QAM	18625	1RB#24	21.21	PASS
Band2	5MHz	16QAM	18625	12RB#0	20.89	PASS
Band2	5MHz	16QAM	18625	12RB#6	20.88	PASS
Band2	5MHz	16QAM	18625	12RB#13	20.89	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	5MHz	16QAM	18625	25RB#0	20.97	PASS
Band2	5MHz	16QAM	18900	1RB#0	22.23	PASS
Band2	5MHz	16QAM	18900	1RB#12	22.08	PASS
Band2	5MHz	16QAM	18900	1RB#24	22.19	PASS
Band2	5MHz	16QAM	18900	12RB#0	21.10	PASS
Band2	5MHz	16QAM	18900	12RB#6	21.05	PASS
Band2	5MHz	16QAM	18900	12RB#13	20.93	PASS
Band2	5MHz	16QAM	18900	25RB#0	20.89	PASS
Band2	5MHz	16QAM	19175	1RB#0	22.09	PASS
Band2	5MHz	16QAM	19175	1RB#12	21.90	PASS
Band2	5MHz	16QAM	19175	1RB#24	21.91	PASS
Band2	5MHz	16QAM	19175	12RB#0	21.03	PASS
Band2	5MHz	16QAM	19175	12RB#6	21.11	PASS
Band2	5MHz	16QAM	19175	12RB#13	21.14	PASS
Band2	5MHz	16QAM	19175	25RB#0	21.10	PASS
Band2	10MHz	QPSK	18650	1RB#0	22.69	PASS
Band2	10MHz	QPSK	18650	1RB#24	22.86	PASS
Band2	10MHz	QPSK	18650	1RB#49	22.94	PASS
Band2	10MHz	QPSK	18650	25RB#0	20.79	PASS
Band2	10MHz	QPSK	18650	25RB#12	20.80	PASS
Band2	10MHz	QPSK	18650	25RB#25	20.98	PASS
Band2	10MHz	QPSK	18650	50RB#0	20.88	PASS
Band2	10MHz	QPSK	18900	1RB#0	22.91	PASS
Band2	10MHz	QPSK	18900	1RB#24	22.75	PASS
Band2	10MHz	QPSK	18900	1RB#49	22.89	PASS
Band2	10MHz	QPSK	18900	25RB#0	21.01	PASS
Band2	10MHz	QPSK	18900	25RB#12	21.02	PASS
Band2	10MHz	QPSK	18900	25RB#25	20.97	PASS
Band2	10MHz	QPSK	18900	50RB#0	20.95	PASS
Band2	10MHz	QPSK	19150	1RB#0	23.08	PASS
Band2	10MHz	QPSK	19150	1RB#24	23.12	PASS
Band2	10MHz	QPSK	19150	1RB#49	23.08	PASS
Band2	10MHz	QPSK	19150	25RB#0	21.08	PASS
Band2	10MHz	QPSK	19150	25RB#12	21.10	PASS
Band2	10MHz	QPSK	19150	25RB#25	21.01	PASS
Band2	10MHz	QPSK	19150	50RB#0	21.07	PASS
Band2	10MHz	16QAM	18650	1RB#0	21.91	PASS
Band2	10MHz	16QAM	18650	1RB#24	21.90	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	10MHz	16QAM	18650	1RB#49	22.03	PASS
Band2	10MHz	16QAM	18650	25RB#0	20.85	PASS
Band2	10MHz	16QAM	18650	25RB#12	20.86	PASS
Band2	10MHz	16QAM	18650	25RB#25	20.96	PASS
Band2	10MHz	16QAM	18650	50RB#0	20.87	PASS
Band2	10MHz	16QAM	18900	1RB#0	21.88	PASS
Band2	10MHz	16QAM	18900	1RB#24	21.76	PASS
Band2	10MHz	16QAM	18900	1RB#49	21.51	PASS
Band2	10MHz	16QAM	18900	25RB#0	21.16	PASS
Band2	10MHz	16QAM	18900	25RB#12	21.14	PASS
Band2	10MHz	16QAM	18900	25RB#25	21.14	PASS
Band2	10MHz	16QAM	18900	50RB#0	21.10	PASS
Band2	10MHz	16QAM	19150	1RB#0	22.59	PASS
Band2	10MHz	16QAM	19150	1RB#24	22.66	PASS
Band2	10MHz	16QAM	19150	1RB#49	22.60	PASS
Band2	10MHz	16QAM	19150	25RB#0	21.26	PASS
Band2	10MHz	16QAM	19150	25RB#12	21.23	PASS
Band2	10MHz	16QAM	19150	25RB#25	21.20	PASS
Band2	10MHz	16QAM	19150	50RB#0	21.20	PASS
Band2	15MHz	QPSK	18675	1RB#0	22.69	PASS
Band2	15MHz	QPSK	18675	1RB#38	22.95	PASS
Band2	15MHz	QPSK	18675	1RB#74	22.97	PASS
Band2	15MHz	QPSK	18675	38RB#0	20.95	PASS
Band2	15MHz	QPSK	18675	38RB#18	20.98	PASS
Band2	15MHz	QPSK	18675	38RB#37	20.99	PASS
Band2	15MHz	QPSK	18675	75RB#0	20.98	PASS
Band2	15MHz	QPSK	18900	1RB#0	22.78	PASS
Band2	15MHz	QPSK	18900	1RB#38	22.81	PASS
Band2	15MHz	QPSK	18900	1RB#74	22.83	PASS
Band2	15MHz	QPSK	18900	38RB#0	20.90	PASS
Band2	15MHz	QPSK	18900	38RB#18	20.96	PASS
Band2	15MHz	QPSK	18900	38RB#37	20.96	PASS
Band2	15MHz	QPSK	18900	75RB#0	20.96	PASS
Band2	15MHz	QPSK	19125	1RB#0	23.02	PASS
Band2	15MHz	QPSK	19125	1RB#38	23.08	PASS
Band2	15MHz	QPSK	19125	1RB#74	23.18	PASS
Band2	15MHz	QPSK	19125	38RB#0	21.07	PASS
Band2	15MHz	QPSK	19125	38RB#18	21.09	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	15MHz	QPSK	19125	38RB#37	21.09	PASS
Band2	15MHz	QPSK	19125	75RB#0	21.09	PASS
Band2	15MHz	16QAM	18675	1RB#0	21.70	PASS
Band2	15MHz	16QAM	18675	1RB#38	21.95	PASS
Band2	15MHz	16QAM	18675	1RB#74	21.85	PASS
Band2	15MHz	16QAM	18675	38RB#0	20.97	PASS
Band2	15MHz	16QAM	18675	38RB#18	20.98	PASS
Band2	15MHz	16QAM	18675	38RB#37	20.98	PASS
Band2	15MHz	16QAM	18675	75RB#0	20.93	PASS
Band2	15MHz	16QAM	18900	1RB#0	22.19	PASS
Band2	15MHz	16QAM	18900	1RB#38	22.18	PASS
Band2	15MHz	16QAM	18900	1RB#74	22.13	PASS
Band2	15MHz	16QAM	18900	38RB#0	20.96	PASS
Band2	15MHz	16QAM	18900	38RB#18	20.96	PASS
Band2	15MHz	16QAM	18900	38RB#37	20.96	PASS
Band2	15MHz	16QAM	18900	75RB#0	20.95	PASS
Band2	15MHz	16QAM	19125	1RB#0	22.57	PASS
Band2	15MHz	16QAM	19125	1RB#38	22.02	PASS
Band2	15MHz	16QAM	19125	1RB#74	22.09	PASS
Band2	15MHz	16QAM	19125	38RB#0	21.09	PASS
Band2	15MHz	16QAM	19125	38RB#18	21.09	PASS
Band2	15MHz	16QAM	19125	38RB#37	21.10	PASS
Band2	15MHz	16QAM	19125	75RB#0	21.19	PASS
Band2	20MHz	QPSK	18700	1RB#0	22.96	PASS
Band2	20MHz	QPSK	18700	1RB#49	23.13	PASS
Band2	20MHz	QPSK	18700	1RB#99	23.15	PASS
Band2	20MHz	QPSK	18700	50RB#0	20.84	PASS
Band2	20MHz	QPSK	18700	50RB#25	20.83	PASS
Band2	20MHz	QPSK	18700	50RB#50	21.06	PASS
Band2	20MHz	QPSK	18700	100RB#0	21.00	PASS
Band2	20MHz	QPSK	18900	1RB#0	23.12	PASS
Band2	20MHz	QPSK	18900	1RB#49	23.08	PASS
Band2	20MHz	QPSK	18900	1RB#99	23.14	PASS
Band2	20MHz	QPSK	18900	50RB#0	21.05	PASS
Band2	20MHz	QPSK	18900	50RB#25	21.05	PASS
Band2	20MHz	QPSK	18900	50RB#50	20.88	PASS
Band2	20MHz	QPSK	18900	100RB#0	20.94	PASS
Band2	20MHz	QPSK	19100	1RB#0	22.92	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band2	20MHz	QPSK	19100	1RB#49	23.05	PASS
Band2	20MHz	QPSK	19100	1RB#99	22.97	PASS
Band2	20MHz	QPSK	19100	50RB#0	20.98	PASS
Band2	20MHz	QPSK	19100	50RB#25	20.93	PASS
Band2	20MHz	QPSK	19100	50RB#50	21.08	PASS
Band2	20MHz	QPSK	19100	100RB#0	21.02	PASS
Band2	20MHz	16QAM	18700	1RB#0	21.93	PASS
Band2	20MHz	16QAM	18700	1RB#49	22.04	PASS
Band2	20MHz	16QAM	18700	1RB#99	22.05	PASS
Band2	20MHz	16QAM	18700	50RB#0	21.04	PASS
Band2	20MHz	16QAM	18700	50RB#25	21.04	PASS
Band2	20MHz	16QAM	18700	50RB#50	21.14	PASS
Band2	20MHz	16QAM	18700	100RB#0	20.97	PASS
Band2	20MHz	16QAM	18900	1RB#0	22.41	PASS
Band2	20MHz	16QAM	18900	1RB#49	22.47	PASS
Band2	20MHz	16QAM	18900	1RB#99	22.45	PASS
Band2	20MHz	16QAM	18900	50RB#0	21.06	PASS
Band2	20MHz	16QAM	18900	50RB#25	21.08	PASS
Band2	20MHz	16QAM	18900	50RB#50	21.08	PASS
Band2	20MHz	16QAM	18900	100RB#0	21.10	PASS
Band2	20MHz	16QAM	19100	1RB#0	21.81	PASS
Band2	20MHz	16QAM	19100	1RB#49	21.90	PASS
Band2	20MHz	16QAM	19100	1RB#99	22.20	PASS
Band2	20MHz	16QAM	19100	50RB#0	21.06	PASS
Band2	20MHz	16QAM	19100	50RB#25	21.15	PASS
Band2	20MHz	16QAM	19100	50RB#50	21.28	PASS
Band2	20MHz	16QAM	19100	100RB#0	21.13	PASS





**7.1.6. Conducted Power Measurement Results(LTE Band 4)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band4	1.4MHz	QPSK	19957	1RB#0	22.67	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	22.59	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	22.59	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	22.71	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	22.74	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	22.73	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	20.66	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	22.14	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	22.16	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	22.15	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	22.17	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	22.18	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	22.15	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	20.19	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	22.36	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	22.40	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	22.41	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	22.32	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	22.33	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	22.30	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	20.24	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	22.53	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	22.56	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	22.50	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	21.43	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	21.39	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	21.28	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	20.75	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	20.78	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	20.79	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	20.73	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	21.20	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	20.91	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	20.92	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	20.17	PASS





Band4	1.4MHz	16QAM	20393	1RB#0	22.41	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	21.72	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	21.95	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	20.76	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	20.75	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	20.72	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	20.33	PASS
Band4	3MHz	QPSK	19965	1RB#0	22.54	PASS
Band4	3MHz	QPSK	19965	1RB#8	22.55	PASS
Band4	3MHz	QPSK	19965	1RB#14	22.39	PASS
Band4	3MHz	QPSK	19965	8RB#0	20.49	PASS
Band4	3MHz	QPSK	19965	8RB#4	20.51	PASS
Band4	3MHz	QPSK	19965	8RB#7	20.54	PASS
Band4	3MHz	QPSK	19965	15RB#0	20.52	PASS
Band4	3MHz	QPSK	20175	1RB#0	22.04	PASS
Band4	3MHz	QPSK	20175	1RB#8	22.00	PASS
Band4	3MHz	QPSK	20175	1RB#14	21.92	PASS
Band4	3MHz	QPSK	20175	8RB#0	19.99	PASS
Band4	3MHz	QPSK	20175	8RB#4	20.01	PASS
Band4	3MHz	QPSK	20175	8RB#7	20.07	PASS
Band4	3MHz	QPSK	20175	15RB#0	20.07	PASS
Band4	3MHz	QPSK	20385	1RB#0	22.17	PASS
Band4	3MHz	QPSK	20385	1RB#8	22.26	PASS
Band4	3MHz	QPSK	20385	1RB#14	22.18	PASS
Band4	3MHz	QPSK	20385	8RB#0	20.05	PASS
Band4	3MHz	QPSK	20385	8RB#4	20.07	PASS
Band4	3MHz	QPSK	20385	8RB#7	20.04	PASS
Band4	3MHz	QPSK	20385	15RB#0	20.25	PASS
Band4	3MHz	16QAM	19965	1RB#0	21.61	PASS
Band4	3MHz	16QAM	19965	1RB#8	21.32	PASS
Band4	3MHz	16QAM	19965	1RB#14	21.26	PASS
Band4	3MHz	16QAM	19965	8RB#0	20.71	PASS
Band4	3MHz	16QAM	19965	8RB#4	20.71	PASS
Band4	3MHz	16QAM	19965	8RB#7	20.73	PASS
Band4	3MHz	16QAM	19965	15RB#0	20.68	PASS
Band4	3MHz	16QAM	20175	1RB#0	20.68	PASS
Band4	3MHz	16QAM	20175	1RB#8	21.00	PASS
Band4	3MHz	16QAM	20175	1RB#14	20.94	PASS





Band4	3MHz	16QAM	20175	8RB#0	20.21	PASS
Band4	3MHz	16QAM	20175	8RB#4	20.22	PASS
Band4	3MHz	16QAM	20175	8RB#7	20.22	PASS
Band4	3MHz	16QAM	20175	15RB#0	20.03	PASS
Band4	3MHz	16QAM	20385	1RB#0	20.77	PASS
Band4	3MHz	16QAM	20385	1RB#8	20.81	PASS
Band4	3MHz	16QAM	20385	1RB#14	20.82	PASS
Band4	3MHz	16QAM	20385	8RB#0	20.34	PASS
Band4	3MHz	16QAM	20385	8RB#4	20.34	PASS
Band4	3MHz	16QAM	20385	8RB#7	20.32	PASS
Band4	3MHz	16QAM	20385	15RB#0	20.24	PASS
Band4	5MHz	QPSK	19975	1RB#0	22.67	PASS
Band4	5MHz	QPSK	19975	1RB#12	22.56	PASS
Band4	5MHz	QPSK	19975	1RB#24	22.54	PASS
Band4	5MHz	QPSK	19975	12RB#0	20.71	PASS
Band4	5MHz	QPSK	19975	12RB#6	20.72	PASS
Band4	5MHz	QPSK	19975	12RB#13	20.53	PASS
Band4	5MHz	QPSK	19975	25RB#0	20.57	PASS
Band4	5MHz	QPSK	20175	1RB#0	22.31	PASS
Band4	5MHz	QPSK	20175	1RB#12	22.37	PASS
Band4	5MHz	QPSK	20175	1RB#24	22.37	PASS
Band4	5MHz	QPSK	20175	12RB#0	20.25	PASS
Band4	5MHz	QPSK	20175	12RB#6	20.28	PASS
Band4	5MHz	QPSK	20175	12RB#13	20.31	PASS
Band4	5MHz	QPSK	20175	25RB#0	20.26	PASS
Band4	5MHz	QPSK	20375	1RB#0	22.21	PASS
Band4	5MHz	QPSK	20375	1RB#12	22.46	PASS
Band4	5MHz	QPSK	20375	1RB#24	22.33	PASS
Band4	5MHz	QPSK	20375	12RB#0	20.43	PASS
Band4	5MHz	QPSK	20375	12RB#6	20.44	PASS
Band4	5MHz	QPSK	20375	12RB#13	20.36	PASS
Band4	5MHz	QPSK	20375	25RB#0	20.40	PASS
Band4	5MHz	16QAM	19975	1RB#0	21.86	PASS
Band4	5MHz	16QAM	19975	1RB#12	21.55	PASS
Band4	5MHz	16QAM	19975	1RB#24	21.56	PASS
Band4	5MHz	16QAM	19975	12RB#0	20.73	PASS
Band4	5MHz	16QAM	19975	12RB#6	20.63	PASS
Band4	5MHz	16QAM	19975	12RB#13	20.68	PASS





Band4	5MHz	16QAM	19975	25RB#0	20.58	PASS
Band4	5MHz	16QAM	20175	1RB#0	21.07	PASS
Band4	5MHz	16QAM	20175	1RB#12	21.04	PASS
Band4	5MHz	16QAM	20175	1RB#24	21.22	PASS
Band4	5MHz	16QAM	20175	12RB#0	20.18	PASS
Band4	5MHz	16QAM	20175	12RB#6	20.12	PASS
Band4	5MHz	16QAM	20175	12RB#13	20.18	PASS
Band4	5MHz	16QAM	20175	25RB#0	20.24	PASS
Band4	5MHz	16QAM	20375	1RB#0	20.78	PASS
Band4	5MHz	16QAM	20375	1RB#12	20.84	PASS
Band4	5MHz	16QAM	20375	1RB#24	20.74	PASS
Band4	5MHz	16QAM	20375	12RB#0	20.42	PASS
Band4	5MHz	16QAM	20375	12RB#6	20.38	PASS
Band4	5MHz	16QAM	20375	12RB#13	20.51	PASS
Band4	5MHz	16QAM	20375	25RB#0	20.60	PASS
Band4	10MHz	QPSK	20000	1RB#0	22.67	PASS
Band4	10MHz	QPSK	20000	1RB#24	22.50	PASS
Band4	10MHz	QPSK	20000	1RB#49	22.31	PASS
Band4	10MHz	QPSK	20000	25RB#0	20.60	PASS
Band4	10MHz	QPSK	20000	25RB#12	20.48	PASS
Band4	10MHz	QPSK	20000	25RB#25	20.54	PASS
Band4	10MHz	QPSK	20000	50RB#0	20.61	PASS
Band4	10MHz	QPSK	20175	1RB#0	22.11	PASS
Band4	10MHz	QPSK	20175	1RB#24	22.13	PASS
Band4	10MHz	QPSK	20175	1RB#49	22.23	PASS
Band4	10MHz	QPSK	20175	25RB#0	20.22	PASS
Band4	10MHz	QPSK	20175	25RB#12	20.24	PASS
Band4	10MHz	QPSK	20175	25RB#25	20.29	PASS
Band4	10MHz	QPSK	20175	50RB#0	20.31	PASS
Band4	10MHz	QPSK	20350	1RB#0	22.35	PASS
Band4	10MHz	QPSK	20350	1RB#24	22.39	PASS
Band4	10MHz	QPSK	20350	1RB#49	22.32	PASS
Band4	10MHz	QPSK	20350	25RB#0	20.40	PASS
Band4	10MHz	QPSK	20350	25RB#12	20.42	PASS
Band4	10MHz	QPSK	20350	25RB#25	20.44	PASS
Band4	10MHz	QPSK	20350	50RB#0	20.42	PASS
Band4	10MHz	16QAM	20000	1RB#0	21.53	PASS
Band4	10MHz	16QAM	20000	1RB#24	21.54	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	10MHz	16QAM	20000	1RB#49	21.18	PASS
Band4	10MHz	16QAM	20000	25RB#0	20.62	PASS
Band4	10MHz	16QAM	20000	25RB#12	20.64	PASS
Band4	10MHz	16QAM	20000	25RB#25	20.54	PASS
Band4	10MHz	16QAM	20000	50RB#0	20.64	PASS
Band4	10MHz	16QAM	20175	1RB#0	21.13	PASS
Band4	10MHz	16QAM	20175	1RB#24	21.15	PASS
Band4	10MHz	16QAM	20175	1RB#49	21.17	PASS
Band4	10MHz	16QAM	20175	25RB#0	20.40	PASS
Band4	10MHz	16QAM	20175	25RB#12	20.42	PASS
Band4	10MHz	16QAM	20175	25RB#25	20.44	PASS
Band4	10MHz	16QAM	20175	50RB#0	20.34	PASS
Band4	10MHz	16QAM	20350	1RB#0	21.18	PASS
Band4	10MHz	16QAM	20350	1RB#24	21.14	PASS
Band4	10MHz	16QAM	20350	1RB#49	21.12	PASS
Band4	10MHz	16QAM	20350	25RB#0	20.44	PASS
Band4	10MHz	16QAM	20350	25RB#12	20.45	PASS
Band4	10MHz	16QAM	20350	25RB#25	20.44	PASS
Band4	10MHz	16QAM	20350	50RB#0	20.44	PASS
Band4	15MHz	QPSK	20025	1RB#0	22.63	PASS
Band4	15MHz	QPSK	20025	1RB#38	22.38	PASS
Band4	15MHz	QPSK	20025	1RB#74	22.21	PASS
Band4	15MHz	QPSK	20025	38RB#0	20.46	PASS
Band4	15MHz	QPSK	20025	38RB#18	20.45	PASS
Band4	15MHz	QPSK	20025	38RB#37	20.45	PASS
Band4	15MHz	QPSK	20025	75RB#0	20.45	PASS
Band4	15MHz	QPSK	20175	1RB#0	22.06	PASS
Band4	15MHz	QPSK	20175	1RB#38	22.08	PASS
Band4	15MHz	QPSK	20175	1RB#74	22.13	PASS
Band4	15MHz	QPSK	20175	38RB#0	20.29	PASS
Band4	15MHz	QPSK	20175	38RB#18	20.32	PASS
Band4	15MHz	QPSK	20175	38RB#37	20.33	PASS
Band4	15MHz	QPSK	20175	75RB#0	20.33	PASS
Band4	15MHz	QPSK	20325	1RB#0	22.34	PASS
Band4	15MHz	QPSK	20325	1RB#38	22.42	PASS
Band4	15MHz	QPSK	20325	1RB#74	22.38	PASS
Band4	15MHz	QPSK	20325	38RB#0	20.48	PASS
Band4	15MHz	QPSK	20325	38RB#18	20.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	15MHz	QPSK	20325	38RB#37	20.50	PASS
Band4	15MHz	QPSK	20325	75RB#0	20.50	PASS
Band4	15MHz	16QAM	20025	1RB#0	21.50	PASS
Band4	15MHz	16QAM	20025	1RB#38	21.29	PASS
Band4	15MHz	16QAM	20025	1RB#74	21.10	PASS
Band4	15MHz	16QAM	20025	38RB#0	20.45	PASS
Band4	15MHz	16QAM	20025	38RB#18	20.45	PASS
Band4	15MHz	16QAM	20025	38RB#37	20.45	PASS
Band4	15MHz	16QAM	20025	75RB#0	20.64	PASS
Band4	15MHz	16QAM	20175	1RB#0	21.26	PASS
Band4	15MHz	16QAM	20175	1RB#38	21.25	PASS
Band4	15MHz	16QAM	20175	1RB#74	21.30	PASS
Band4	15MHz	16QAM	20175	38RB#0	20.31	PASS
Band4	15MHz	16QAM	20175	38RB#18	20.32	PASS
Band4	15MHz	16QAM	20175	38RB#37	20.33	PASS
Band4	15MHz	16QAM	20175	75RB#0	20.41	PASS
Band4	15MHz	16QAM	20325	1RB#0	21.29	PASS
Band4	15MHz	16QAM	20325	1RB#38	21.31	PASS
Band4	15MHz	16QAM	20325	1RB#74	21.34	PASS
Band4	15MHz	16QAM	20325	38RB#0	20.50	PASS
Band4	15MHz	16QAM	20325	38RB#18	20.50	PASS
Band4	15MHz	16QAM	20325	38RB#37	20.50	PASS
Band4	15MHz	16QAM	20325	75RB#0	20.48	PASS
Band4	20MHz	QPSK	20050	1RB#0	22.85	PASS
Band4	20MHz	QPSK	20050	1RB#49	22.40	PASS
Band4	20MHz	QPSK	20050	1RB#99	22.36	PASS
Band4	20MHz	QPSK	20050	50RB#0	20.43	PASS
Band4	20MHz	QPSK	20050	50RB#25	20.54	PASS
Band4	20MHz	QPSK	20050	50RB#50	20.22	PASS
Band4	20MHz	QPSK	20050	100RB#0	20.33	PASS
Band4	20MHz	QPSK	20175	1RB#0	22.42	PASS
Band4	20MHz	QPSK	20175	1RB#49	22.31	PASS
Band4	20MHz	QPSK	20175	1RB#99	22.59	PASS
Band4	20MHz	QPSK	20175	50RB#0	20.29	PASS
Band4	20MHz	QPSK	20175	50RB#25	20.20	PASS
Band4	20MHz	QPSK	20175	50RB#50	20.29	PASS
Band4	20MHz	QPSK	20175	100RB#0	20.33	PASS
Band4	20MHz	QPSK	20300	1RB#0	22.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band4	20MHz	QPSK	20300	1RB#49	22.69	PASS
Band4	20MHz	QPSK	20300	1RB#99	22.77	PASS
Band4	20MHz	QPSK	20300	50RB#0	20.32	PASS
Band4	20MHz	QPSK	20300	50RB#25	20.26	PASS
Band4	20MHz	QPSK	20300	50RB#50	20.49	PASS
Band4	20MHz	QPSK	20300	100RB#0	20.37	PASS
Band4	20MHz	16QAM	20050	1RB#0	21.79	PASS
Band4	20MHz	16QAM	20050	1RB#49	21.11	PASS
Band4	20MHz	16QAM	20050	1RB#99	20.96	PASS
Band4	20MHz	16QAM	20050	50RB#0	20.67	PASS
Band4	20MHz	16QAM	20050	50RB#25	20.67	PASS
Band4	20MHz	16QAM	20050	50RB#50	20.45	PASS
Band4	20MHz	16QAM	20050	100RB#0	20.46	PASS
Band4	20MHz	16QAM	20175	1RB#0	21.61	PASS
Band4	20MHz	16QAM	20175	1RB#49	21.64	PASS
Band4	20MHz	16QAM	20175	1RB#99	21.71	PASS
Band4	20MHz	16QAM	20175	50RB#0	20.25	PASS
Band4	20MHz	16QAM	20175	50RB#25	20.37	PASS
Band4	20MHz	16QAM	20175	50RB#50	20.40	PASS
Band4	20MHz	16QAM	20175	100RB#0	20.34	PASS
Band4	20MHz	16QAM	20300	1RB#0	20.48	PASS
Band4	20MHz	16QAM	20300	1RB#49	20.50	PASS
Band4	20MHz	16QAM	20300	1RB#99	20.54	PASS
Band4	20MHz	16QAM	20300	50RB#0	20.50	PASS
Band4	20MHz	16QAM	20300	50RB#25	20.52	PASS
Band4	20MHz	16QAM	20300	50RB#50	20.50	PASS
Band4	20MHz	16QAM	20300	100RB#0	20.40	PASS



**7.1.7. Conducted Power Measurement Results(LTE Band 5)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band5	1.4MHz	QPSK	20407	1RB#0	22.60	PASS
Band5	1.4MHz	QPSK	20407	1RB#2	22.64	PASS
Band5	1.4MHz	QPSK	20407	1RB#5	22.56	PASS
Band5	1.4MHz	QPSK	20407	3RB#0	22.65	PASS
Band5	1.4MHz	QPSK	20407	3RB#1	22.66	PASS
Band5	1.4MHz	QPSK	20407	3RB#3	22.66	PASS
Band5	1.4MHz	QPSK	20407	6RB#0	21.59	PASS
Band5	1.4MHz	QPSK	20525	1RB#0	22.41	PASS
Band5	1.4MHz	QPSK	20525	1RB#2	22.56	PASS
Band5	1.4MHz	QPSK	20525	1RB#5	22.48	PASS
Band5	1.4MHz	QPSK	20525	3RB#0	22.66	PASS
Band5	1.4MHz	QPSK	20525	3RB#1	22.65	PASS
Band5	1.4MHz	QPSK	20525	3RB#3	22.65	PASS
Band5	1.4MHz	QPSK	20525	6RB#0	21.60	PASS
Band5	1.4MHz	QPSK	20643	1RB#0	22.55	PASS
Band5	1.4MHz	QPSK	20643	1RB#2	22.74	PASS
Band5	1.4MHz	QPSK	20643	1RB#5	22.65	PASS
Band5	1.4MHz	QPSK	20643	3RB#0	22.59	PASS
Band5	1.4MHz	QPSK	20643	3RB#1	22.61	PASS
Band5	1.4MHz	QPSK	20643	3RB#3	22.71	PASS
Band5	1.4MHz	QPSK	20643	6RB#0	21.59	PASS
Band5	1.4MHz	16QAM	20407	1RB#0	22.21	PASS
Band5	1.4MHz	16QAM	20407	1RB#2	21.98	PASS
Band5	1.4MHz	16QAM	20407	1RB#5	21.93	PASS
Band5	1.4MHz	16QAM	20407	3RB#0	21.20	PASS
Band5	1.4MHz	16QAM	20407	3RB#1	21.19	PASS
Band5	1.4MHz	16QAM	20407	3RB#3	21.42	PASS
Band5	1.4MHz	16QAM	20407	6RB#0	21.25	PASS
Band5	1.4MHz	16QAM	20525	1RB#0	21.52	PASS
Band5	1.4MHz	16QAM	20525	1RB#2	21.57	PASS
Band5	1.4MHz	16QAM	20525	1RB#5	21.39	PASS
Band5	1.4MHz	16QAM	20525	3RB#0	21.36	PASS
Band5	1.4MHz	16QAM	20525	3RB#1	21.38	PASS
Band5	1.4MHz	16QAM	20525	3RB#3	21.37	PASS
Band5	1.4MHz	16QAM	20525	6RB#0	20.73	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Band5	1.4MHz	16QAM	20643	1RB#0	22.01	PASS
Band5	1.4MHz	16QAM	20643	1RB#2	21.92	PASS
Band5	1.4MHz	16QAM	20643	1RB#5	21.90	PASS
Band5	1.4MHz	16QAM	20643	3RB#0	21.13	PASS
Band5	1.4MHz	16QAM	20643	3RB#1	21.31	PASS
Band5	1.4MHz	16QAM	20643	3RB#3	21.38	PASS
Band5	1.4MHz	16QAM	20643	6RB#0	20.79	PASS
Band5	3MHz	QPSK	20415	1RB#0	22.61	PASS
Band5	3MHz	QPSK	20415	1RB#8	22.63	PASS
Band5	3MHz	QPSK	20415	1RB#14	22.62	PASS
Band5	3MHz	QPSK	20415	8RB#0	21.76	PASS
Band5	3MHz	QPSK	20415	8RB#4	21.68	PASS
Band5	3MHz	QPSK	20415	8RB#7	21.75	PASS
Band5	3MHz	QPSK	20415	15RB#0	21.73	PASS
Band5	3MHz	QPSK	20525	1RB#0	22.70	PASS
Band5	3MHz	QPSK	20525	1RB#8	22.65	PASS
Band5	3MHz	QPSK	20525	1RB#14	22.73	PASS
Band5	3MHz	QPSK	20525	8RB#0	21.56	PASS
Band5	3MHz	QPSK	20525	8RB#4	21.57	PASS
Band5	3MHz	QPSK	20525	8RB#7	21.68	PASS
Band5	3MHz	QPSK	20525	15RB#0	21.58	PASS
Band5	3MHz	QPSK	20635	1RB#0	22.76	PASS
Band5	3MHz	QPSK	20635	1RB#8	22.75	PASS
Band5	3MHz	QPSK	20635	1RB#14	22.76	PASS
Band5	3MHz	QPSK	20635	8RB#0	21.79	PASS
Band5	3MHz	QPSK	20635	8RB#4	21.66	PASS
Band5	3MHz	QPSK	20635	8RB#7	21.85	PASS
Band5	3MHz	QPSK	20635	15RB#0	21.72	PASS
Band5	3MHz	16QAM	20415	1RB#0	21.22	PASS
Band5	3MHz	16QAM	20415	1RB#8	21.26	PASS
Band5	3MHz	16QAM	20415	1RB#14	21.13	PASS
Band5	3MHz	16QAM	20415	8RB#0	21.25	PASS
Band5	3MHz	16QAM	20415	8RB#4	21.29	PASS
Band5	3MHz	16QAM	20415	8RB#7	20.94	PASS
Band5	3MHz	16QAM	20415	15RB#0	21.16	PASS
Band5	3MHz	16QAM	20525	1RB#0	21.46	PASS
Band5	3MHz	16QAM	20525	1RB#8	21.40	PASS





Band5	3MHz	16QAM	20525	1RB#14	21.25	PASS
Band5	3MHz	16QAM	20525	8RB#0	20.79	PASS
Band5	3MHz	16QAM	20525	8RB#4	20.79	PASS
Band5	3MHz	16QAM	20525	8RB#7	20.84	PASS
Band5	3MHz	16QAM	20525	15RB#0	20.50	PASS
Band5	3MHz	16QAM	20635	1RB#0	21.63	PASS
Band5	3MHz	16QAM	20635	1RB#8	21.52	PASS
Band5	3MHz	16QAM	20635	1RB#14	21.60	PASS
Band5	3MHz	16QAM	20635	8RB#0	20.76	PASS
Band5	3MHz	16QAM	20635	8RB#4	20.89	PASS
Band5	3MHz	16QAM	20635	8RB#7	20.83	PASS
Band5	3MHz	16QAM	20635	15RB#0	20.68	PASS
Band5	5MHz	QPSK	20425	1RB#0	22.54	PASS
Band5	5MHz	QPSK	20425	1RB#12	22.61	PASS
Band5	5MHz	QPSK	20425	1RB#24	22.58	PASS
Band5	5MHz	QPSK	20425	12RB#0	21.57	PASS
Band5	5MHz	QPSK	20425	12RB#6	21.57	PASS
Band5	5MHz	QPSK	20425	12RB#13	21.65	PASS
Band5	5MHz	QPSK	20425	25RB#0	21.62	PASS
Band5	5MHz	QPSK	20525	1RB#0	22.55	PASS
Band5	5MHz	QPSK	20525	1RB#12	22.51	PASS
Band5	5MHz	QPSK	20525	1RB#24	22.58	PASS
Band5	5MHz	QPSK	20525	12RB#0	21.61	PASS
Band5	5MHz	QPSK	20525	12RB#6	21.64	PASS
Band5	5MHz	QPSK	20525	12RB#13	21.61	PASS
Band5	5MHz	QPSK	20525	25RB#0	21.64	PASS
Band5	5MHz	QPSK	20625	1RB#0	22.64	PASS
Band5	5MHz	QPSK	20625	1RB#12	22.46	PASS
Band5	5MHz	QPSK	20625	1RB#24	22.64	PASS
Band5	5MHz	QPSK	20625	12RB#0	21.66	PASS
Band5	5MHz	QPSK	20625	12RB#6	21.67	PASS
Band5	5MHz	QPSK	20625	12RB#13	21.51	PASS
Band5	5MHz	QPSK	20625	25RB#0	21.62	PASS
Band5	5MHz	16QAM	20425	1RB#0	20.83	PASS
Band5	5MHz	16QAM	20425	1RB#12	20.96	PASS
Band5	5MHz	16QAM	20425	1RB#24	20.92	PASS
Band5	5MHz	16QAM	20425	12RB#0	21.03	PASS





Band5	5MHz	16QAM	20425	12RB#6	21.02	PASS
Band5	5MHz	16QAM	20425	12RB#13	20.66	PASS
Band5	5MHz	16QAM	20425	25RB#0	20.71	PASS
Band5	5MHz	16QAM	20525	1RB#0	21.49	PASS
Band5	5MHz	16QAM	20525	1RB#12	21.48	PASS
Band5	5MHz	16QAM	20525	1RB#24	21.50	PASS
Band5	5MHz	16QAM	20525	12RB#0	20.63	PASS
Band5	5MHz	16QAM	20525	12RB#6	20.60	PASS
Band5	5MHz	16QAM	20525	12RB#13	20.60	PASS
Band5	5MHz	16QAM	20525	25RB#0	20.48	PASS
Band5	5MHz	16QAM	20625	1RB#0	20.94	PASS
Band5	5MHz	16QAM	20625	1RB#12	20.94	PASS
Band5	5MHz	16QAM	20625	1RB#24	20.90	PASS
Band5	5MHz	16QAM	20625	12RB#0	20.60	PASS
Band5	5MHz	16QAM	20625	12RB#6	20.60	PASS
Band5	5MHz	16QAM	20625	12RB#13	20.46	PASS
Band5	5MHz	16QAM	20625	25RB#0	20.61	PASS
Band5	10MHz	QPSK	20450	1RB#0	22.52	PASS
Band5	10MHz	QPSK	20450	1RB#24	22.47	PASS
Band5	10MHz	QPSK	20450	1RB#49	22.59	PASS
Band5	10MHz	QPSK	20450	25RB#0	21.67	PASS
Band5	10MHz	QPSK	20450	25RB#12	21.56	PASS
Band5	10MHz	QPSK	20450	25RB#25	21.75	PASS
Band5	10MHz	QPSK	20450	50RB#0	21.54	PASS
Band5	10MHz	QPSK	20525	1RB#0	22.55	PASS
Band5	10MHz	QPSK	20525	1RB#24	22.57	PASS
Band5	10MHz	QPSK	20525	1RB#49	22.53	PASS
Band5	10MHz	QPSK	20525	25RB#0	21.61	PASS
Band5	10MHz	QPSK	20525	25RB#12	21.50	PASS
Band5	10MHz	QPSK	20525	25RB#25	21.63	PASS
Band5	10MHz	QPSK	20525	50RB#0	21.57	PASS
Band5	10MHz	QPSK	20600	1RB#0	22.63	PASS
Band5	10MHz	QPSK	20600	1RB#24	22.47	PASS
Band5	10MHz	QPSK	20600	1RB#49	22.69	PASS
Band5	10MHz	QPSK	20600	25RB#0	21.65	PASS
Band5	10MHz	QPSK	20600	25RB#12	21.69	PASS
Band5	10MHz	QPSK	20600	25RB#25	21.55	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




Band5	10MHz	QPSK	20600	50RB#0	21.57	PASS
Band5	10MHz	16QAM	20450	1RB#0	21.29	PASS
Band5	10MHz	16QAM	20450	1RB#24	21.38	PASS
Band5	10MHz	16QAM	20450	1RB#49	21.54	PASS
Band5	10MHz	16QAM	20450	25RB#0	20.57	PASS
Band5	10MHz	16QAM	20450	25RB#12	20.58	PASS
Band5	10MHz	16QAM	20450	25RB#25	20.60	PASS
Band5	10MHz	16QAM	20450	50RB#0	21.09	PASS
Band5	10MHz	16QAM	20525	1RB#0	21.23	PASS
Band5	10MHz	16QAM	20525	1RB#24	21.11	PASS
Band5	10MHz	16QAM	20525	1RB#49	21.43	PASS
Band5	10MHz	16QAM	20525	25RB#0	20.70	PASS
Band5	10MHz	16QAM	20525	25RB#12	20.68	PASS
Band5	10MHz	16QAM	20525	25RB#25	20.58	PASS
Band5	10MHz	16QAM	20525	50RB#0	20.46	PASS
Band5	10MHz	16QAM	20600	1RB#0	21.43	PASS
Band5	10MHz	16QAM	20600	1RB#24	21.58	PASS
Band5	10MHz	16QAM	20600	1RB#49	21.65	PASS
Band5	10MHz	16QAM	20600	25RB#0	20.78	PASS
Band5	10MHz	16QAM	20600	25RB#12	20.68	PASS
Band5	10MHz	16QAM	20600	25RB#25	20.62	PASS
Band5	10MHz	16QAM	20600	50RB#0	20.65	PASS





7.1.8. Conducted Power Measurement Results(LTE Band 7)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band7	5MHz	QPSK	20775	1RB#0	22.00	PASS
Band7	5MHz	QPSK	20775	1RB#12	21.95	PASS
Band7	5MHz	QPSK	20775	1RB#24	21.95	PASS
Band7	5MHz	QPSK	20775	12RB#0	20.55	PASS
Band7	5MHz	QPSK	20775	12RB#6	20.56	PASS
Band7	5MHz	QPSK	20775	12RB#13	20.52	PASS
Band7	5MHz	QPSK	20775	25RB#0	20.55	PASS
Band7	5MHz	QPSK	21100	1RB#0	21.48	PASS
Band7	5MHz	QPSK	21100	1RB#12	21.47	PASS
Band7	5MHz	QPSK	21100	1RB#24	21.59	PASS
Band7	5MHz	QPSK	21100	12RB#0	20.14	PASS
Band7	5MHz	QPSK	21100	12RB#6	20.13	PASS
Band7	5MHz	QPSK	21100	12RB#13	20.15	PASS
Band7	5MHz	QPSK	21100	25RB#0	20.17	PASS
Band7	5MHz	QPSK	21425	1RB#0	21.39	PASS
Band7	5MHz	QPSK	21425	1RB#12	21.36	PASS
Band7	5MHz	QPSK	21425	1RB#24	21.48	PASS
Band7	5MHz	QPSK	21425	12RB#0	19.86	PASS
Band7	5MHz	QPSK	21425	12RB#6	19.86	PASS
Band7	5MHz	QPSK	21425	12RB#13	19.79	PASS
Band7	5MHz	QPSK	21425	25RB#0	19.84	PASS
Band7	5MHz	16QAM	20775	1RB#0	20.45	PASS
Band7	5MHz	16QAM	20775	1RB#12	20.45	PASS
Band7	5MHz	16QAM	20775	1RB#24	20.42	PASS
Band7	5MHz	16QAM	20775	12RB#0	20.16	PASS
Band7	5MHz	16QAM	20775	12RB#6	20.14	PASS
Band7	5MHz	16QAM	20775	12RB#13	20.21	PASS
Band7	5MHz	16QAM	20775	25RB#0	20.26	PASS
Band7	5MHz	16QAM	21100	1RB#0	20.88	PASS
Band7	5MHz	16QAM	21100	1RB#12	20.94	PASS
Band7	5MHz	16QAM	21100	1RB#24	20.50	PASS
Band7	5MHz	16QAM	21100	12RB#0	19.75	PASS
Band7	5MHz	16QAM	21100	12RB#6	19.76	PASS
Band7	5MHz	16QAM	21100	12RB#13	19.66	PASS
Band7	5MHz	16QAM	21100	25RB#0	19.84	PASS
Band7	5MHz	16QAM	21425	1RB#0	20.01	PASS





Band7	5MHz	16QAM	21425	1RB#12	20.03	PASS
Band7	5MHz	16QAM	21425	1RB#24	19.85	PASS
Band7	5MHz	16QAM	21425	12RB#0	19.41	PASS
Band7	5MHz	16QAM	21425	12RB#6	19.39	PASS
Band7	5MHz	16QAM	21425	12RB#13	19.60	PASS
Band7	5MHz	16QAM	21425	25RB#0	19.46	PASS
Band7	10MHz	QPSK	20800	1RB#0	22.18	PASS
Band7	10MHz	QPSK	20800	1RB#24	22.09	PASS
Band7	10MHz	QPSK	20800	1RB#49	22.13	PASS
Band7	10MHz	QPSK	20800	25RB#0	20.69	PASS
Band7	10MHz	QPSK	20800	25RB#12	20.71	PASS
Band7	10MHz	QPSK	20800	25RB#25	20.71	PASS
Band7	10MHz	QPSK	20800	50RB#0	20.70	PASS
Band7	10MHz	QPSK	21100	1RB#0	21.61	PASS
Band7	10MHz	QPSK	21100	1RB#24	21.58	PASS
Band7	10MHz	QPSK	21100	1RB#49	21.65	PASS
Band7	10MHz	QPSK	21100	25RB#0	20.35	PASS
Band7	10MHz	QPSK	21100	25RB#12	20.33	PASS
Band7	10MHz	QPSK	21100	25RB#25	20.22	PASS
Band7	10MHz	QPSK	21100	50RB#0	20.16	PASS
Band7	10MHz	QPSK	21400	1RB#0	21.55	PASS
Band7	10MHz	QPSK	21400	1RB#24	21.46	PASS
Band7	10MHz	QPSK	21400	1RB#49	21.44	PASS
Band7	10MHz	QPSK	21400	25RB#0	20.05	PASS
Band7	10MHz	QPSK	21400	25RB#12	20.03	PASS
Band7	10MHz	QPSK	21400	25RB#25	20.00	PASS
Band7	10MHz	QPSK	21400	50RB#0	19.93	PASS
Band7	10MHz	16QAM	20800	1RB#0	20.94	PASS
Band7	10MHz	16QAM	20800	1RB#24	20.86	PASS
Band7	10MHz	16QAM	20800	1RB#49	21.16	PASS
Band7	10MHz	16QAM	20800	25RB#0	20.26	PASS
Band7	10MHz	16QAM	20800	25RB#12	20.27	PASS
Band7	10MHz	16QAM	20800	25RB#25	20.26	PASS
Band7	10MHz	16QAM	20800	50RB#0	20.26	PASS
Band7	10MHz	16QAM	21100	1RB#0	20.67	PASS
Band7	10MHz	16QAM	21100	1RB#24	20.72	PASS
Band7	10MHz	16QAM	21100	1RB#49	20.63	PASS
Band7	10MHz	16QAM	21100	25RB#0	20.03	PASS





Band7	10MHz	16QAM	21100	25RB#12	19.94	PASS
Band7	10MHz	16QAM	21100	25RB#25	19.88	PASS
Band7	10MHz	16QAM	21100	50RB#0	19.80	PASS
Band7	10MHz	16QAM	21400	1RB#0	21.10	PASS
Band7	10MHz	16QAM	21400	1RB#24	20.98	PASS
Band7	10MHz	16QAM	21400	1RB#49	21.07	PASS
Band7	10MHz	16QAM	21400	25RB#0	19.62	PASS
Band7	10MHz	16QAM	21400	25RB#12	19.61	PASS
Band7	10MHz	16QAM	21400	25RB#25	19.64	PASS
Band7	10MHz	16QAM	21400	50RB#0	19.56	PASS
Band7	15MHz	QPSK	20825	1RB#0	21.86	PASS
Band7	15MHz	QPSK	20825	1RB#38	21.89	PASS
Band7	15MHz	QPSK	20825	1RB#74	21.84	PASS
Band7	15MHz	QPSK	20825	38RB#0	20.59	PASS
Band7	15MHz	QPSK	20825	38RB#18	20.42	PASS
Band7	15MHz	QPSK	20825	38RB#37	20.43	PASS
Band7	15MHz	QPSK	20825	75RB#0	20.43	PASS
Band7	15MHz	QPSK	21100	1RB#0	21.43	PASS
Band7	15MHz	QPSK	21100	1RB#38	21.38	PASS
Band7	15MHz	QPSK	21100	1RB#74	21.29	PASS
Band7	15MHz	QPSK	21100	38RB#0	19.94	PASS
Band7	15MHz	QPSK	21100	38RB#18	20.01	PASS
Band7	15MHz	QPSK	21100	38RB#37	20.02	PASS
Band7	15MHz	QPSK	21100	75RB#0	20.01	PASS
Band7	15MHz	QPSK	21375	1RB#0	21.50	PASS
Band7	15MHz	QPSK	21375	1RB#38	21.22	PASS
Band7	15MHz	QPSK	21375	1RB#74	21.21	PASS
Band7	15MHz	QPSK	21375	38RB#0	19.84	PASS
Band7	15MHz	QPSK	21375	38RB#18	19.85	PASS
Band7	15MHz	QPSK	21375	38RB#37	19.85	PASS
Band7	15MHz	QPSK	21375	75RB#0	19.85	PASS
Band7	15MHz	16QAM	20825	1RB#0	20.86	PASS
Band7	15MHz	16QAM	20825	1RB#38	20.90	PASS
Band7	15MHz	16QAM	20825	1RB#74	20.91	PASS
Band7	15MHz	16QAM	20825	38RB#0	20.42	PASS
Band7	15MHz	16QAM	20825	38RB#18	20.43	PASS
Band7	15MHz	16QAM	20825	38RB#37	20.43	PASS
Band7	15MHz	16QAM	20825	75RB#0	20.05	PASS





Band7	15MHz	16QAM	21100	1RB#0	20.87	PASS
Band7	15MHz	16QAM	21100	1RB#38	20.69	PASS
Band7	15MHz	16QAM	21100	1RB#74	20.69	PASS
Band7	15MHz	16QAM	21100	38RB#0	20.02	PASS
Band7	15MHz	16QAM	21100	38RB#18	20.01	PASS
Band7	15MHz	16QAM	21100	38RB#37	20.01	PASS
Band7	15MHz	16QAM	21100	75RB#0	19.72	PASS
Band7	15MHz	16QAM	21375	1RB#0	20.93	PASS
Band7	15MHz	16QAM	21375	1RB#38	20.94	PASS
Band7	15MHz	16QAM	21375	1RB#74	20.90	PASS
Band7	15MHz	16QAM	21375	38RB#0	19.85	PASS
Band7	15MHz	16QAM	21375	38RB#18	19.85	PASS
Band7	15MHz	16QAM	21375	38RB#37	19.85	PASS
Band7	15MHz	16QAM	21375	75RB#0	19.51	PASS
Band7	20MHz	QPSK	20850	1RB#0	22.16	PASS
Band7	20MHz	QPSK	20850	1RB#49	22.15	PASS
Band7	20MHz	QPSK	20850	1RB#99	21.98	PASS
Band7	20MHz	QPSK	20850	50RB#0	20.65	PASS
Band7	20MHz	QPSK	20850	50RB#25	20.57	PASS
Band7	20MHz	QPSK	20850	50RB#50	20.61	PASS
Band7	20MHz	QPSK	20850	100RB#0	20.65	PASS
Band7	20MHz	QPSK	21100	1RB#0	21.95	PASS
Band7	20MHz	QPSK	21100	1RB#49	21.67	PASS
Band7	20MHz	QPSK	21100	1RB#99	21.63	PASS
Band7	20MHz	QPSK	21100	50RB#0	20.10	PASS
Band7	20MHz	QPSK	21100	50RB#25	20.17	PASS
Band7	20MHz	QPSK	21100	50RB#50	20.09	PASS
Band7	20MHz	QPSK	21100	100RB#0	20.10	PASS
Band7	20MHz	QPSK	21350	1RB#0	21.52	PASS
Band7	20MHz	QPSK	21350	1RB#49	21.34	PASS
Band7	20MHz	QPSK	21350	1RB#99	21.27	PASS
Band7	20MHz	QPSK	21350	50RB#0	20.04	PASS
Band7	20MHz	QPSK	21350	50RB#25	20.14	PASS
Band7	20MHz	QPSK	21350	50RB#50	19.93	PASS
Band7	20MHz	QPSK	21350	100RB#0	19.97	PASS
Band7	20MHz	16QAM	20850	1RB#0	20.91	PASS
Band7	20MHz	16QAM	20850	1RB#49	20.92	PASS
Band7	20MHz	16QAM	20850	1RB#99	20.79	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Band7	20MHz	16QAM	20850	50RB#0	20.26	PASS
Band7	20MHz	16QAM	20850	50RB#25	20.27	PASS
Band7	20MHz	16QAM	20850	50RB#50	20.24	PASS
Band7	20MHz	16QAM	20850	100RB#0	20.16	PASS
Band7	20MHz	16QAM	21100	1RB#0	21.00	PASS
Band7	20MHz	16QAM	21100	1RB#49	21.22	PASS
Band7	20MHz	16QAM	21100	1RB#99	21.14	PASS
Band7	20MHz	16QAM	21100	50RB#0	19.89	PASS
Band7	20MHz	16QAM	21100	50RB#25	19.89	PASS
Band7	20MHz	16QAM	21100	50RB#50	19.86	PASS
Band7	20MHz	16QAM	21100	100RB#0	19.79	PASS
Band7	20MHz	16QAM	21350	1RB#0	20.81	PASS
Band7	20MHz	16QAM	21350	1RB#49	20.70	PASS
Band7	20MHz	16QAM	21350	1RB#99	20.56	PASS
Band7	20MHz	16QAM	21350	50RB#0	19.64	PASS
Band7	20MHz	16QAM	21350	50RB#25	19.71	PASS
Band7	20MHz	16QAM	21350	50RB#50	19.53	PASS
Band7	20MHz	16QAM	21350	100RB#0	19.58	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.  
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
 Scan code to check authenticity

**7.1.9. Conducted Power Measurement Results(LTE Band 12)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band12	1.4MHz	QPSK	23017	1RB#0	23.17	PASS
Band12	1.4MHz	QPSK	23017	1RB#2	23.11	PASS
Band12	1.4MHz	QPSK	23017	1RB#5	23.16	PASS
Band12	1.4MHz	QPSK	23017	3RB#0	23.35	PASS
Band12	1.4MHz	QPSK	23017	3RB#1	23.25	PASS
Band12	1.4MHz	QPSK	23017	3RB#3	23.31	PASS
Band12	1.4MHz	QPSK	23017	6RB#0	21.27	PASS
Band12	1.4MHz	QPSK	23095	1RB#0	23.27	PASS
Band12	1.4MHz	QPSK	23095	1RB#2	23.27	PASS
Band12	1.4MHz	QPSK	23095	1RB#5	23.28	PASS
Band12	1.4MHz	QPSK	23095	3RB#0	23.37	PASS
Band12	1.4MHz	QPSK	23095	3RB#1	23.36	PASS
Band12	1.4MHz	QPSK	23095	3RB#3	23.32	PASS
Band12	1.4MHz	QPSK	23095	6RB#0	21.21	PASS
Band12	1.4MHz	QPSK	23173	1RB#0	23.35	PASS
Band12	1.4MHz	QPSK	23173	1RB#2	23.28	PASS
Band12	1.4MHz	QPSK	23173	1RB#5	23.28	PASS
Band12	1.4MHz	QPSK	23173	3RB#0	23.25	PASS
Band12	1.4MHz	QPSK	23173	3RB#1	23.19	PASS
Band12	1.4MHz	QPSK	23173	3RB#3	23.29	PASS
Band12	1.4MHz	QPSK	23173	6RB#0	21.32	PASS
Band12	1.4MHz	16QAM	23017	1RB#0	22.94	PASS
Band12	1.4MHz	16QAM	23017	1RB#2	22.94	PASS
Band12	1.4MHz	16QAM	23017	1RB#5	22.59	PASS
Band12	1.4MHz	16QAM	23017	3RB#0	21.94	PASS
Band12	1.4MHz	16QAM	23017	3RB#1	21.93	PASS
Band12	1.4MHz	16QAM	23017	3RB#3	22.02	PASS
Band12	1.4MHz	16QAM	23017	6RB#0	21.40	PASS
Band12	1.4MHz	16QAM	23095	1RB#0	21.77	PASS
Band12	1.4MHz	16QAM	23095	1RB#2	21.77	PASS
Band12	1.4MHz	16QAM	23095	1RB#5	21.79	PASS
Band12	1.4MHz	16QAM	23095	3RB#0	21.93	PASS
Band12	1.4MHz	16QAM	23095	3RB#1	22.07	PASS
Band12	1.4MHz	16QAM	23095	3RB#3	21.82	PASS
Band12	1.4MHz	16QAM	23095	6RB#0	21.05	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Band12	1.4MHz	16QAM	23173	1RB#0	22.15	PASS
Band12	1.4MHz	16QAM	23173	1RB#2	22.73	PASS
Band12	1.4MHz	16QAM	23173	1RB#5	22.73	PASS
Band12	1.4MHz	16QAM	23173	3RB#0	22.03	PASS
Band12	1.4MHz	16QAM	23173	3RB#1	21.94	PASS
Band12	1.4MHz	16QAM	23173	3RB#3	21.89	PASS
Band12	1.4MHz	16QAM	23173	6RB#0	21.23	PASS
Band12	3MHz	QPSK	23025	1RB#0	23.08	PASS
Band12	3MHz	QPSK	23025	1RB#8	23.10	PASS
Band12	3MHz	QPSK	23025	1RB#14	23.05	PASS
Band12	3MHz	QPSK	23025	8RB#0	21.10	PASS
Band12	3MHz	QPSK	23025	8RB#4	21.13	PASS
Band12	3MHz	QPSK	23025	8RB#7	21.14	PASS
Band12	3MHz	QPSK	23025	15RB#0	21.20	PASS
Band12	3MHz	QPSK	23095	1RB#0	23.09	PASS
Band12	3MHz	QPSK	23095	1RB#8	23.20	PASS
Band12	3MHz	QPSK	23095	1RB#14	23.10	PASS
Band12	3MHz	QPSK	23095	8RB#0	21.18	PASS
Band12	3MHz	QPSK	23095	8RB#4	21.06	PASS
Band12	3MHz	QPSK	23095	8RB#7	21.06	PASS
Band12	3MHz	QPSK	23095	15RB#0	21.12	PASS
Band12	3MHz	QPSK	23165	1RB#0	23.16	PASS
Band12	3MHz	QPSK	23165	1RB#8	23.16	PASS
Band12	3MHz	QPSK	23165	1RB#14	23.20	PASS
Band12	3MHz	QPSK	23165	8RB#0	21.22	PASS
Band12	3MHz	QPSK	23165	8RB#4	21.26	PASS
Band12	3MHz	QPSK	23165	8RB#7	21.18	PASS
Band12	3MHz	QPSK	23165	15RB#0	21.32	PASS
Band12	3MHz	16QAM	23025	1RB#0	22.01	PASS
Band12	3MHz	16QAM	23025	1RB#8	21.84	PASS
Band12	3MHz	16QAM	23025	1RB#14	21.73	PASS
Band12	3MHz	16QAM	23025	8RB#0	21.18	PASS
Band12	3MHz	16QAM	23025	8RB#4	21.17	PASS
Band12	3MHz	16QAM	23025	8RB#7	21.30	PASS
Band12	3MHz	16QAM	23025	15RB#0	21.06	PASS
Band12	3MHz	16QAM	23095	1RB#0	21.66	PASS
Band12	3MHz	16QAM	23095	1RB#8	21.75	PASS
Band12	3MHz	16QAM	23095	1RB#14	21.86	PASS





Band12	3MHz	16QAM	23095	8RB#0	21.03	PASS
Band12	3MHz	16QAM	23095	8RB#4	21.07	PASS
Band12	3MHz	16QAM	23095	8RB#7	21.09	PASS
Band12	3MHz	16QAM	23095	15RB#0	20.83	PASS
Band12	3MHz	16QAM	23165	1RB#0	22.76	PASS
Band12	3MHz	16QAM	23165	1RB#8	22.12	PASS
Band12	3MHz	16QAM	23165	1RB#14	22.21	PASS
Band12	3MHz	16QAM	23165	8RB#0	21.11	PASS
Band12	3MHz	16QAM	23165	8RB#4	21.15	PASS
Band12	3MHz	16QAM	23165	8RB#7	21.22	PASS
Band12	3MHz	16QAM	23165	15RB#0	21.27	PASS
Band12	5MHz	QPSK	23035	1RB#0	23.18	PASS
Band12	5MHz	QPSK	23035	1RB#12	23.10	PASS
Band12	5MHz	QPSK	23035	1RB#24	23.06	PASS
Band12	5MHz	QPSK	23035	12RB#0	21.15	PASS
Band12	5MHz	QPSK	23035	12RB#6	21.17	PASS
Band12	5MHz	QPSK	23035	12RB#13	21.13	PASS
Band12	5MHz	QPSK	23035	25RB#0	21.15	PASS
Band12	5MHz	QPSK	23095	1RB#0	22.98	PASS
Band12	5MHz	QPSK	23095	1RB#12	23.09	PASS
Band12	5MHz	QPSK	23095	1RB#24	23.03	PASS
Band12	5MHz	QPSK	23095	12RB#0	21.10	PASS
Band12	5MHz	QPSK	23095	12RB#6	21.13	PASS
Band12	5MHz	QPSK	23095	12RB#13	21.04	PASS
Band12	5MHz	QPSK	23095	25RB#0	21.14	PASS
Band12	5MHz	QPSK	23155	1RB#0	23.18	PASS
Band12	5MHz	QPSK	23155	1RB#12	23.22	PASS
Band12	5MHz	QPSK	23155	1RB#24	23.12	PASS
Band12	5MHz	QPSK	23155	12RB#0	21.20	PASS
Band12	5MHz	QPSK	23155	12RB#6	21.29	PASS
Band12	5MHz	QPSK	23155	12RB#13	21.21	PASS
Band12	5MHz	QPSK	23155	25RB#0	21.09	PASS
Band12	5MHz	16QAM	23035	1RB#0	21.34	PASS
Band12	5MHz	16QAM	23035	1RB#12	21.35	PASS
Band12	5MHz	16QAM	23035	1RB#24	21.35	PASS
Band12	5MHz	16QAM	23035	12RB#0	21.06	PASS
Band12	5MHz	16QAM	23035	12RB#6	21.03	PASS
Band12	5MHz	16QAM	23035	12RB#13	20.98	PASS





Band12	5MHz	16QAM	23035	25RB#0	21.20	PASS
Band12	5MHz	16QAM	23095	1RB#0	22.21	PASS
Band12	5MHz	16QAM	23095	1RB#12	22.28	PASS
Band12	5MHz	16QAM	23095	1RB#24	22.33	PASS
Band12	5MHz	16QAM	23095	12RB#0	21.10	PASS
Band12	5MHz	16QAM	23095	12RB#6	21.03	PASS
Band12	5MHz	16QAM	23095	12RB#13	20.97	PASS
Band12	5MHz	16QAM	23095	25RB#0	20.92	PASS
Band12	5MHz	16QAM	23155	1RB#0	21.72	PASS
Band12	5MHz	16QAM	23155	1RB#12	22.22	PASS
Band12	5MHz	16QAM	23155	1RB#24	21.73	PASS
Band12	5MHz	16QAM	23155	12RB#0	20.98	PASS
Band12	5MHz	16QAM	23155	12RB#6	20.99	PASS
Band12	5MHz	16QAM	23155	12RB#13	21.06	PASS
Band12	5MHz	16QAM	23155	25RB#0	21.14	PASS
Band12	10MHz	QPSK	23060	1RB#0	23.02	PASS
Band12	10MHz	QPSK	23060	1RB#24	23.03	PASS
Band12	10MHz	QPSK	23060	1RB#49	23.19	PASS
Band12	10MHz	QPSK	23060	25RB#0	21.16	PASS
Band12	10MHz	QPSK	23060	25RB#12	21.18	PASS
Band12	10MHz	QPSK	23060	25RB#25	21.17	PASS
Band12	10MHz	QPSK	23060	50RB#0	20.96	PASS
Band12	10MHz	QPSK	23095	1RB#0	22.79	PASS
Band12	10MHz	QPSK	23095	1RB#24	23.08	PASS
Band12	10MHz	QPSK	23095	1RB#49	23.00	PASS
Band12	10MHz	QPSK	23095	25RB#0	21.07	PASS
Band12	10MHz	QPSK	23095	25RB#12	21.07	PASS
Band12	10MHz	QPSK	23095	25RB#25	21.16	PASS
Band12	10MHz	QPSK	23095	50RB#0	20.98	PASS
Band12	10MHz	QPSK	23130	1RB#0	23.15	PASS
Band12	10MHz	QPSK	23130	1RB#24	23.13	PASS
Band12	10MHz	QPSK	23130	1RB#49	23.26	PASS
Band12	10MHz	QPSK	23130	25RB#0	21.22	PASS
Band12	10MHz	QPSK	23130	25RB#12	20.99	PASS
Band12	10MHz	QPSK	23130	25RB#25	21.02	PASS
Band12	10MHz	QPSK	23130	50RB#0	21.03	PASS
Band12	10MHz	16QAM	23060	1RB#0	22.02	PASS
Band12	10MHz	16QAM	23060	1RB#24	21.84	PASS





Band12	10MHz	16QAM	23060	1RB#49	21.73	PASS
Band12	10MHz	16QAM	23060	25RB#0	21.06	PASS
Band12	10MHz	16QAM	23060	25RB#12	21.07	PASS
Band12	10MHz	16QAM	23060	25RB#25	21.05	PASS
Band12	10MHz	16QAM	23060	50RB#0	20.86	PASS
Band12	10MHz	16QAM	23095	1RB#0	21.78	PASS
Band12	10MHz	16QAM	23095	1RB#24	21.84	PASS
Band12	10MHz	16QAM	23095	1RB#49	21.95	PASS
Band12	10MHz	16QAM	23095	25RB#0	21.09	PASS
Band12	10MHz	16QAM	23095	25RB#12	21.10	PASS
Band12	10MHz	16QAM	23095	25RB#25	21.14	PASS
Band12	10MHz	16QAM	23095	50RB#0	20.98	PASS
Band12	10MHz	16QAM	23130	1RB#0	22.49	PASS
Band12	10MHz	16QAM	23130	1RB#24	22.60	PASS
Band12	10MHz	16QAM	23130	1RB#49	21.92	PASS
Band12	10MHz	16QAM	23130	25RB#0	21.02	PASS
Band12	10MHz	16QAM	23130	25RB#12	21.03	PASS
Band12	10MHz	16QAM	23130	25RB#25	21.23	PASS
Band12	10MHz	16QAM	23130	50RB#0	21.04	PASS



**7.1.10. Conducted Power Measurement Results(LTE Band 13)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band13	5MHz	QPSK	23205	1RB#0	22.38	PASS
Band13	5MHz	QPSK	23205	1RB#12	22.31	PASS
Band13	5MHz	QPSK	23205	1RB#24	22.29	PASS
Band13	5MHz	QPSK	23205	12RB#0	21.45	PASS
Band13	5MHz	QPSK	23205	12RB#6	21.46	PASS
Band13	5MHz	QPSK	23205	12RB#13	21.73	PASS
Band13	5MHz	QPSK	23205	25RB#0	21.68	PASS
Band13	5MHz	QPSK	23230	1RB#0	22.24	PASS
Band13	5MHz	QPSK	23230	1RB#12	22.24	PASS
Band13	5MHz	QPSK	23230	1RB#24	22.33	PASS
Band13	5MHz	QPSK	23230	12RB#0	21.59	PASS
Band13	5MHz	QPSK	23230	12RB#6	21.59	PASS
Band13	5MHz	QPSK	23230	12RB#13	21.37	PASS
Band13	5MHz	QPSK	23230	25RB#0	21.64	PASS
Band13	5MHz	QPSK	23255	1RB#0	22.27	PASS
Band13	5MHz	QPSK	23255	1RB#12	22.42	PASS
Band13	5MHz	QPSK	23255	1RB#24	22.45	PASS
Band13	5MHz	QPSK	23255	12RB#0	21.37	PASS
Band13	5MHz	QPSK	23255	12RB#6	21.37	PASS
Band13	5MHz	QPSK	23255	12RB#13	21.70	PASS
Band13	5MHz	QPSK	23255	25RB#0	21.42	PASS
Band13	5MHz	16QAM	23205	1RB#0	20.78	PASS
Band13	5MHz	16QAM	23205	1RB#12	21.01	PASS
Band13	5MHz	16QAM	23205	1RB#24	21.03	PASS
Band13	5MHz	16QAM	23205	12RB#0	20.84	PASS
Band13	5MHz	16QAM	23205	12RB#6	20.91	PASS
Band13	5MHz	16QAM	23205	12RB#13	20.57	PASS
Band13	5MHz	16QAM	23205	25RB#0	20.69	PASS
Band13	5MHz	16QAM	23230	1RB#0	20.94	PASS
Band13	5MHz	16QAM	23230	1RB#12	20.83	PASS
Band13	5MHz	16QAM	23230	1RB#24	20.68	PASS
Band13	5MHz	16QAM	23230	12RB#0	20.66	PASS
Band13	5MHz	16QAM	23230	12RB#6	20.59	PASS
Band13	5MHz	16QAM	23230	12RB#13	20.71	PASS
Band13	5MHz	16QAM	23230	25RB#0	20.73	PASS





Band13	5MHz	16QAM	23255	1RB#0	21.73	PASS
Band13	5MHz	16QAM	23255	1RB#12	21.36	PASS
Band13	5MHz	16QAM	23255	1RB#24	21.73	PASS
Band13	5MHz	16QAM	23255	12RB#0	20.64	PASS
Band13	5MHz	16QAM	23255	12RB#6	20.75	PASS
Band13	5MHz	16QAM	23255	12RB#13	20.83	PASS
Band13	5MHz	16QAM	23255	25RB#0	20.74	PASS
Band13	10MHz	QPSK	23230	1RB#0	22.13	PASS
Band13	10MHz	QPSK	23230	1RB#24	22.23	PASS
Band13	10MHz	QPSK	23230	1RB#49	22.26	PASS
Band13	10MHz	QPSK	23230	25RB#0	21.43	PASS
Band13	10MHz	QPSK	23230	25RB#12	21.43	PASS
Band13	10MHz	QPSK	23230	25RB#25	21.19	PASS
Band13	10MHz	QPSK	23230	50RB#0	21.52	PASS
Band13	10MHz	16QAM	23230	1RB#0	21.08	PASS
Band13	10MHz	16QAM	23230	1RB#24	21.52	PASS
Band13	10MHz	16QAM	23230	1RB#49	21.39	PASS
Band13	10MHz	16QAM	23230	25RB#0	20.53	PASS
Band13	10MHz	16QAM	23230	25RB#12	20.44	PASS
Band13	10MHz	16QAM	23230	25RB#25	20.51	PASS
Band13	10MHz	16QAM	23230	50RB#0	20.44	PASS





**7.1.11. Conducted Power Measurement Results(LTE Band 17)**

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band17	5MHz	QPSK	23755	1RB#0	23.33	PASS
Band17	5MHz	QPSK	23755	1RB#12	23.30	PASS
Band17	5MHz	QPSK	23755	1RB#24	23.60	PASS
Band17	5MHz	QPSK	23755	12RB#0	21.45	PASS
Band17	5MHz	QPSK	23755	12RB#6	21.43	PASS
Band17	5MHz	QPSK	23755	12RB#13	21.45	PASS
Band17	5MHz	QPSK	23755	25RB#0	21.40	PASS
Band17	5MHz	QPSK	23790	1RB#0	23.36	PASS
Band17	5MHz	QPSK	23790	1RB#12	23.34	PASS
Band17	5MHz	QPSK	23790	1RB#24	23.31	PASS
Band17	5MHz	QPSK	23790	12RB#0	21.47	PASS
Band17	5MHz	QPSK	23790	12RB#6	21.34	PASS
Band17	5MHz	QPSK	23790	12RB#13	21.71	PASS
Band17	5MHz	QPSK	23790	25RB#0	21.39	PASS
Band17	5MHz	QPSK	23825	1RB#0	23.54	PASS
Band17	5MHz	QPSK	23825	1RB#12	23.48	PASS
Band17	5MHz	QPSK	23825	1RB#24	23.51	PASS
Band17	5MHz	QPSK	23825	12RB#0	21.59	PASS
Band17	5MHz	QPSK	23825	12RB#6	21.63	PASS
Band17	5MHz	QPSK	23825	12RB#13	21.63	PASS
Band17	5MHz	QPSK	23825	25RB#0	21.44	PASS
Band17	5MHz	16QAM	23755	1RB#0	21.58	PASS
Band17	5MHz	16QAM	23755	1RB#12	21.77	PASS
Band17	5MHz	16QAM	23755	1RB#24	21.73	PASS
Band17	5MHz	16QAM	23755	12RB#0	21.30	PASS
Band17	5MHz	16QAM	23755	12RB#6	21.30	PASS
Band17	5MHz	16QAM	23755	12RB#13	21.25	PASS
Band17	5MHz	16QAM	23755	25RB#0	21.44	PASS
Band17	5MHz	16QAM	23790	1RB#0	22.52	PASS
Band17	5MHz	16QAM	23790	1RB#12	22.65	PASS
Band17	5MHz	16QAM	23790	1RB#24	22.63	PASS
Band17	5MHz	16QAM	23790	12RB#0	21.21	PASS
Band17	5MHz	16QAM	23790	12RB#6	21.40	PASS
Band17	5MHz	16QAM	23790	12RB#13	21.63	PASS
Band17	5MHz	16QAM	23790	25RB#0	21.44	PASS





Band17	5MHz	16QAM	23825	1RB#0	22.19	PASS
Band17	5MHz	16QAM	23825	1RB#12	22.48	PASS
Band17	5MHz	16QAM	23825	1RB#24	22.03	PASS
Band17	5MHz	16QAM	23825	12RB#0	21.44	PASS
Band17	5MHz	16QAM	23825	12RB#6	21.45	PASS
Band17	5MHz	16QAM	23825	12RB#13	21.35	PASS
Band17	5MHz	16QAM	23825	25RB#0	21.49	PASS
Band17	10MHz	QPSK	23780	1RB#0	23.32	PASS
Band17	10MHz	QPSK	23780	1RB#24	23.41	PASS
Band17	10MHz	QPSK	23780	1RB#49	23.47	PASS
Band17	10MHz	QPSK	23780	25RB#0	21.20	PASS
Band17	10MHz	QPSK	23780	25RB#12	21.23	PASS
Band17	10MHz	QPSK	23780	25RB#25	21.57	PASS
Band17	10MHz	QPSK	23780	50RB#0	21.13	PASS
Band17	10MHz	QPSK	23790	1RB#0	23.34	PASS
Band17	10MHz	QPSK	23790	1RB#24	23.52	PASS
Band17	10MHz	QPSK	23790	1RB#49	23.44	PASS
Band17	10MHz	QPSK	23790	25RB#0	21.29	PASS
Band17	10MHz	QPSK	23790	25RB#12	21.27	PASS
Band17	10MHz	QPSK	23790	25RB#25	21.60	PASS
Band17	10MHz	QPSK	23790	50RB#0	21.38	PASS
Band17	10MHz	QPSK	23800	1RB#0	23.47	PASS
Band17	10MHz	QPSK	23800	1RB#24	23.48	PASS
Band17	10MHz	QPSK	23800	1RB#49	23.60	PASS
Band17	10MHz	QPSK	23800	25RB#0	21.13	PASS
Band17	10MHz	QPSK	23800	25RB#12	21.15	PASS
Band17	10MHz	QPSK	23800	25RB#25	21.57	PASS
Band17	10MHz	QPSK	23800	50RB#0	21.42	PASS
Band17	10MHz	16QAM	23780	1RB#0	22.13	PASS
Band17	10MHz	16QAM	23780	1RB#24	22.37	PASS
Band17	10MHz	16QAM	23780	1RB#49	22.07	PASS
Band17	10MHz	16QAM	23780	25RB#0	21.24	PASS
Band17	10MHz	16QAM	23780	25RB#12	21.25	PASS
Band17	10MHz	16QAM	23780	25RB#25	21.41	PASS
Band17	10MHz	16QAM	23780	50RB#0	21.32	PASS
Band17	10MHz	16QAM	23790	1RB#0	22.05	PASS
Band17	10MHz	16QAM	23790	1RB#24	22.07	PASS
Band17	10MHz	16QAM	23790	1RB#49	22.20	PASS





Band17	10MHz	16QAM	23790	25RB#0	21.32	PASS
Band17	10MHz	16QAM	23790	25RB#12	21.49	PASS
Band17	10MHz	16QAM	23790	25RB#25	21.82	PASS
Band17	10MHz	16QAM	23790	50RB#0	21.37	PASS
Band17	10MHz	16QAM	23800	1RB#0	22.85	PASS
Band17	10MHz	16QAM	23800	1RB#24	22.28	PASS
Band17	10MHz	16QAM	23800	1RB#49	22.28	PASS
Band17	10MHz	16QAM	23800	25RB#0	21.38	PASS
Band17	10MHz	16QAM	23800	25RB#12	21.43	PASS
Band17	10MHz	16QAM	23800	25RB#25	21.66	PASS
Band17	10MHz	16QAM	23800	50RB#0	21.44	PASS





### 7.1.12. Conducted Power Measurement Results(WIFI 2.4G)


TestMode	Antenna	Freq(MHz)	Conducted Power (dBm)	Tune up
11B	Ant1	2412	13.12	13.50
		2437	10.57	11.00
		2462	15.34	15.50
11G	Ant1	2412	13.37	13.50
		2437	11.63	12.00
		2462	16.00	16.50
11N20SISO	Ant1	2412	12.95	13.50
		2437	11.38	11.50
		2462	15.38	15.50
11N40SISO	Ant1	2422	10.99	11.50
		2437	11.23	11.50
		2452	11.31	11.50

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
  - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
  - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

#### WIFI 2.4G (802.11g):

Duty cycle=97.92%

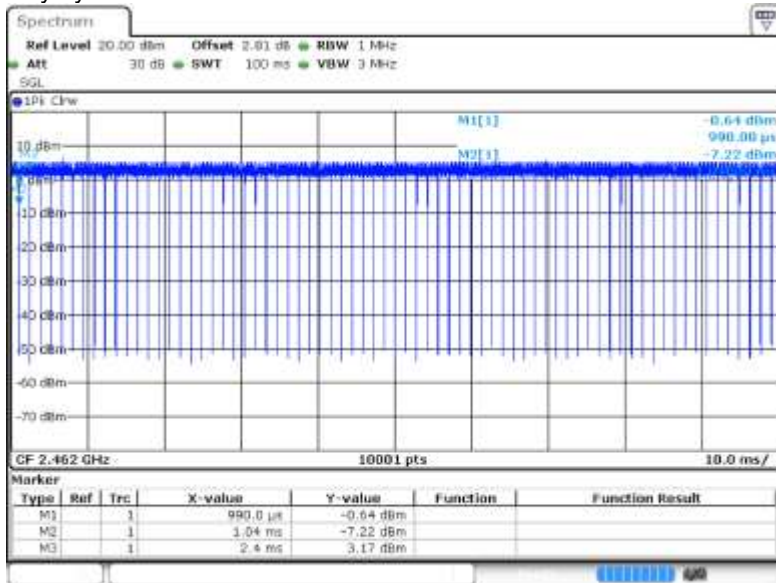



### 7.1.13. Conducted Power Measurement Results(Bluetooth)

Test Mode	Antenna	Frequency [MHz]	Conducted power [dBm]	Tune up
DH5	Ant1	2402	3.76	4.00
		2441	2.55	3.00
		2480	2.55	3.00
2DH5	Ant1	2402	2.37	3.00
		2441	1.92	2.50
		2480	2.42	3.00
3DH5	Ant1	2402	2.35	3.00
		2441	1.90	2.50
		2480	2.36	3.00

Test Mode	Antenna	Frequency [MHz]	Conducted power [dBm]	Tune up
BLE	Ant1	2402	-3.88	-3.50
		2440	-1.28	-1.00
		2480	-1.22	-1.00





### 7.2. Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Bluetooth	2.48	Head	4	2.51	5	0.791	3	Y
		Body-worn	4	2.51	10	0.396	3	Y
		hotspot	4	2.51	10	0.396	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.





### 7.3. SAR Measurement Results

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} * 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Scaling factor} = 10^{(P_{\text{target}} - P_{\text{measured}})/10}$$

$$\text{Reported SAR} = \text{Measured SAR} * \text{Scaling factor}$$

Where

$P_{\text{target}}$  is the power of manufacturing upper limit;

$P_{\text{measured}}$  is the measured power;

Measured SAR is measured SAR at measured power which including power drift)

Reported SAR which including Power Drift and Scaling factor

#### 7.3.1. SAR Results[GSM 850]

SAR Values [GSM850]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
251/848.8	GSM	Left Cheek	32.52	33.00	-0.02	1.117	<b>0.154</b>	<b>0.172</b>
251/848.8	GSM	Left Tilt	32.52	33.00	0.05	1.117	0.082	0.092
251/848.8	GSM	Right Cheek	32.52	33.00	0.15	1.117	0.135	0.151
251/848.8	GSM	Right Tilt	32.52	33.00	-0.01	1.117	0.066	0.074
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
251/848.8	GPRS 2TS	Front side	30.54	31.00	0.15	1.112	0.208	0.231
251/848.8	GPRS 2TS	Rear side	30.54	31.00	-0.10	1.112	<b>0.252</b>	<b>0.280</b>
251/848.8	GPRS 2TS	Left side	30.54	31.00	-0.03	1.112	0.096	0.107
251/848.8	GPRS 2TS	Right side	30.54	31.00	-0.17	1.112	0.105	0.117
251/848.8	GPRS 2TS	Bottom side	30.54	31.00	-0.04	1.112	0.163	0.181

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.2. SAR Results[PCS 1900]**

SAR Values [GSM1900]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
810/1909.8	GSM	Left Cheek	29.11	29.50	0.10	1.094	<b>0.091</b>	<b>0.100</b>
810/1909.8	GSM	Left Tilt	29.11	29.50	-0.14	1.094	0.042	0.046
810/1909.8	GSM	Right Cheek	29.11	29.50	0.06	1.094	0.080	0.088
810/1909.8	GSM	Right Tilt	29.11	29.50	0.16	1.094	0.035	0.038
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
661/1880	GPRS 3TS	Front side	25.06	25.50	-0.19	1.107	0.184	0.204
661/1880	GPRS 3TS	Rear side	25.06	25.50	-0.04	1.107	<b>0.275</b>	<b>0.304</b>
661/1880	GPRS 3TS	Left side	25.06	25.50	0.01	1.107	0.102	0.113
661/1880	GPRS 3TS	Right side	25.06	25.50	-0.16	1.107	0.131	0.145
661/1880	GPRS 3TS	Bottom side	25.06	25.50	0.14	1.107	0.206	0.228

**Note:**

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





### 7.3.3. SAR Results [WCDMA Band II]

SAR Values [WCDMA Band II]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
9538/1907.6	RMC	Left Cheek	21.92	22.50	0.10	1.143	<b>0.059</b>	<b>0.067</b>
9538/1907.6	RMC	Left Tilt	21.92	22.50	0.13	1.143	0.028	0.032
9538/1907.6	RMC	Right Cheek	21.92	22.50	-0.11	1.143	0.050	0.057
9538/1907.6	RMC	Right Tilt	21.92	22.50	0.10	1.143	0.022	0.025
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
9538/1907.6	RMC	Front side	21.92	22.50	-0.03	1.143	0.146	0.167
9538/1907.6	RMC	Rear side	21.92	22.50	0.08	1.143	<b>0.227</b>	<b>0.259</b>
9538/1907.6	RMC	Left side	21.92	22.50	-0.17	1.143	0.078	0.089
9538/1907.6	RMC	Right side	21.92	22.50	0.03	1.143	0.095	0.109
9538/1907.6	RMC	Bottom side	21.92	22.50	0.11	1.143	0.174	0.199

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8W/kg$  for 1-g or  $2.0W/kg$  for 10-g respectively, when the transmission band is  $\leq 100MHz$ .
  - $\leq 0.6 W/kg$  or  $1.5 W/kg$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4 W/kg$  or  $1.0 W/kg$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200 MHz$ .
- 3) RMC\* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.4. SAR Results [WCDMA Band V]**

SAR Values [WCDMA Band V]								
Ch/ Freq. (MHz)	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (%)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
							Measured	Reported
measured / reported SAR numbers – Head Test data								
4132/826.4	RMC	Left Cheek	22.97	23.50	0.11	1.130	<b>0.279</b>	<b>0.315</b>
4182/836.4	RMC	Left Cheek	22.50	23.50	-0.08	1.259	0.243	0.306
4233/846.6	RMC	Left Cheek	22.13	23.50	-0.05	1.371	0.212	0.291
4132/826.4	RMC	Left Tilt	22.97	23.50	-0.05	1.130	0.125	0.141
4132/826.4	RMC	Right Cheek	22.97	23.50	0.00	1.130	0.218	0.246
4132/826.4	RMC	Right Tilt	22.97	23.50	0.05	1.130	0.102	0.115
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)								
4132/826.4	RMC	Front side	22.97	23.50	-0.01	1.130	0.151	0.171
4132/826.4	RMC	Rear side	22.97	23.50	0.02	1.130	<b>0.219</b>	<b>0.247</b>
4182/836.4	RMC	Rear side	22.50	23.50	-0.20	1.259	0.185	0.233
4233/846.6	RMC	Rear side	22.13	23.50	-0.16	1.371	0.174	0.239
4132/826.4	RMC	Left side	22.97	23.50	-0.10	1.130	0.091	0.103
4132/826.4	RMC	Right side	22.97	23.50	-0.13	1.130	0.074	0.084
4132/826.4	RMC	Bottom side	22.97	23.50	-0.15	1.130	0.127	0.143

**Note:**

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- 3) RMC\* - RMC 12.2kbps mode;
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



### 7.3.5. SAR Results [LTE Band 2]

SAR Values [LTE Band 2]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
18700/1860	20M	QPSK 1RB_99	Left Cheek	23.15	23.50	0.06	1.084	<b>0.087</b>	<b>0.094</b>
18700/1860	20M	QPSK 1RB_99	Left Tilt	23.15	23.50	-0.11	1.084	0.040	0.043
18700/1860	20M	QPSK 1RB_99	Right Cheek	23.15	23.50	-0.08	1.084	0.074	0.080
18700/1860	20M	QPSK 1RB_99	Right Tilt	23.15	23.50	0.19	1.084	0.032	0.035
measured / reported SAR numbers – Head <50%RB>									
18700/1860	20M	QPSK 50RB_50	Left Cheek	21.06	21.50	0.16	1.107	0.058	0.064
18700/1860	20M	QPSK 50RB_50	Left Tilt	21.06	21.50	-0.20	1.107	0.029	0.032
18700/1860	20M	QPSK 50RB_50	Right Cheek	21.06	21.50	-0.13	1.107	0.044	0.049
18700/1860	20M	QPSK 50RB_50	Right Tilt	21.06	21.50	-0.02	1.107	0.025	0.028
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
18700/1860	20M	QPSK 1RB_99	Front side	23.15	23.50	-0.01	1.084	0.171	0.185
18700/1860	20M	QPSK 1RB_99	Rear side	23.15	23.50	0.14	1.084	<b>0.256</b>	<b>0.277</b>
18700/1860	20M	QPSK 1RB_99	Left side	23.15	23.50	0.09	1.084	0.095	0.103
18700/1860	20M	QPSK 1RB_99	Right side	23.15	23.50	0.09	1.084	0.121	0.131
18700/1860	20M	QPSK 1RB_99	Bottom side	23.15	23.50	0.11	1.084	0.194	0.210
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
18700/1860	20M	QPSK 50RB_50	Front side	21.06	21.50	0.05	1.107	0.124	0.137
18700/1860	20M	QPSK 50RB_50	Rear side	21.06	21.50	-0.05	1.107	0.183	0.203
18700/1860	20M	QPSK 50RB_50	Left side	21.06	21.50	-0.16	1.107	0.065	0.072
18700/1860	20M	QPSK 50RB_50	Right side	21.06	21.50	0.10	1.107	0.097	0.107
18700/1860	20M	QPSK 50RB_50	Bottom side	21.06	21.50	0.17	1.107	0.136	0.151

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- 3) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.6. SAR Results [LTE Band 4]**

SAR Values [LTE Band 4]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
20050/1720	20M	QPSK 1RB_0	Left Cheek	22.85	23.00	0.11	1.035	<b>0.075</b>	<b>0.078</b>
20050/1720	20M	QPSK 1RB_0	Left Tilt	22.85	23.00	0.05	1.035	0.032	0.033
20050/1720	20M	QPSK 1RB_0	Right Cheek	22.85	23.00	0.13	1.035	0.060	0.062
20050/1720	20M	QPSK 1RB_0	Right Tilt	22.85	23.00	-0.10	1.035	0.027	0.028
measured / reported SAR numbers – Head <50%RB>									
20050/1720	20M	QPSK 50RB_25	Left Cheek	20.54	21.00	0.00	1.112	0.048	0.053
20050/1720	20M	QPSK 50RB_25	Left Tilt	20.54	21.00	0.17	1.112	0.021	0.023
20050/1720	20M	QPSK 50RB_25	Right Cheek	20.54	21.00	-0.04	1.112	0.036	0.040
20050/1720	20M	QPSK 50RB_25	Right Tilt	20.54	21.00	0.02	1.112	0.018	0.020
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
20050/1720	20M	QPSK 1RB_0	Front side	22.85	23.00	-0.13	1.035	0.122	0.126
20050/1720	20M	QPSK 1RB_0	Rear side	22.85	23.00	0.07	1.035	<b>0.151</b>	<b>0.156</b>
20050/1720	20M	QPSK 1RB_0	Left side	22.85	23.00	-0.06	1.035	0.050	0.052
20050/1720	20M	QPSK 1RB_0	Right side	22.85	23.00	-0.01	1.035	0.085	0.088
20050/1720	20M	QPSK 1RB_0	Bottom side	22.85	23.00	-0.18	1.035	0.133	0.138
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
20050/1720	20M	QPSK 50RB_25	Front side	20.54	21.00	-0.15	1.112	0.089	0.099
20050/1720	20M	QPSK 50RB_25	Rear side	20.54	21.00	0.01	1.112	0.118	0.131
20050/1720	20M	QPSK 50RB_25	Left side	20.54	21.00	0.01	1.112	0.037	0.041
20050/1720	20M	QPSK 50RB_25	Right side	20.54	21.00	-0.17	1.112	0.054	0.060
20050/1720	20M	QPSK 50RB_25	Bottom side	20.54	21.00	0.08	1.112	0.100	0.111

**Note:**

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.7. SAR Results [LTE Band 5]**

SAR Values [LTE Band 5]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
20600/844	10M	QPSK 1RB_49	Left Cheek	22.69	23.00	-0.08	1.074	<b>0.127</b>	<b>0.136</b>
20600/844	10M	QPSK 1RB_49	Left Tilt	22.69	23.00	0.18	1.074	0.068	0.073
20600/844	10M	QPSK 1RB_49	Right Cheek	22.69	23.00	-0.04	1.074	0.109	0.117
20600/844	10M	QPSK 1RB_49	Right Tilt	22.69	23.00	-0.19	1.074	0.051	0.055
measured / reported SAR numbers – Head <50%RB>									
20600/844	10M	QPSK 25RB_12	Left Cheek	21.69	22.00	0.05	1.074	0.104	0.112
20600/844	10M	QPSK 25RB_12	Left Tilt	21.69	22.00	0.01	1.074	0.053	0.057
20600/844	10M	QPSK 25RB_12	Right Cheek	21.69	22.00	-0.15	1.074	0.092	0.099
20600/844	10M	QPSK 25RB_12	Right Tilt	21.69	22.00	-0.18	1.074	0.040	0.043
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
20600/844	10M	QPSK 1RB_49	Front side	22.69	23.00	-0.16	1.074	0.112	0.120
20600/844	10M	QPSK 1RB_49	Rear side	22.69	23.00	-0.03	1.074	<b>0.159</b>	<b>0.171</b>
20600/844	10M	QPSK 1RB_49	Left side	22.69	23.00	0.04	1.074	0.054	0.058
20600/844	10M	QPSK 1RB_49	Right side	22.69	23.00	0.14	1.074	0.071	0.076
20600/844	10M	QPSK 1RB_49	Bottom side	22.69	23.00	-0.09	1.074	0.105	0.113
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
20600/844	10M	QPSK 25RB_12	Front side	21.69	22.00	0.14	1.074	0.096	0.103
20600/844	10M	QPSK 25RB_12	Rear side	21.69	22.00	-0.09	1.074	0.127	0.136
20600/844	10M	QPSK 25RB_12	Left side	21.69	22.00	-0.04	1.074	0.046	0.049
20600/844	10M	QPSK 25RB_12	Right side	21.69	22.00	0.09	1.074	0.060	0.064
20600/844	10M	QPSK 25RB_12	Bottom side	21.69	22.00	-0.04	1.074	0.088	0.095

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





## 7.3.8. SAR Results [LTE Band 7]

SAR Values [LTE Band 7]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head <1RB>									
20850/2510	20M	QPSK 1RB_0	Left Cheek	22.16	22.50	0.14	1.081	<b>0.128</b>	<b>0.138</b>
20850/2510	20M	QPSK 1RB_0	Left Tilt	22.16	22.50	0.02	1.081	0.071	0.077
20850/2510	20M	QPSK 1RB_0	Right Cheek	22.16	22.50	0.03	1.081	0.106	0.115
20850/2510	20M	QPSK 1RB_0	Right Tilt	22.16	22.50	-0.18	1.081	0.059	0.064
measured / reported SAR numbers – Head <50%RB>									
20850/2510	20M	QPSK 50RB_0	Left Cheek	20.65	21.00	0.04	1.084	0.096	0.104
20850/2510	20M	QPSK 50RB_0	Left Tilt	20.65	21.00	0.10	1.084	0.058	0.063
20850/2510	20M	QPSK 50RB_0	Right Cheek	20.65	21.00	0.17	1.084	0.075	0.081
20850/2510	20M	QPSK 50RB_0	Right Tilt	20.65	21.00	0.20	1.084	0.041	0.044
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
20850/2510	20M	QPSK 1RB_0	Front side	22.16	22.50	-0.16	1.081	0.312	0.337
20850/2510	20M	QPSK 1RB_0	Rear side	22.16	22.50	-0.11	1.081	<b>0.556</b>	<b>0.601</b>
20850/2510	20M	QPSK 1RB_0	Left side	22.16	22.50	-0.19	1.081	0.143	0.155
20850/2510	20M	QPSK 1RB_0	Right side	22.16	22.50	-0.18	1.081	0.185	0.200
20850/2510	20M	QPSK 1RB_0	Bottom side	22.16	22.50	0.13	1.081	0.415	0.449
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
20850/2510	20M	QPSK 50RB_0	Front side	20.65	21.00	-0.18	1.084	0.236	0.256
20850/2510	20M	QPSK 50RB_0	Rear side	20.65	21.00	0.04	1.084	0.395	0.428
20850/2510	20M	QPSK 50RB_0	Left side	20.65	21.00	-0.06	1.084	0.102	0.111
20850/2510	20M	QPSK 50RB_0	Right side	20.65	21.00	-0.17	1.084	0.139	0.151
20850/2510	20M	QPSK 50RB_0	Bottom side	20.65	21.00	0.12	1.084	0.314	0.340

## Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



### 7.3.9. SAR Results [LTE Band 12]

SAR Values [LTE Band 12]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23130/711	10M	QPSK 1RB_49	Left Cheek	23.26	23.50	0.08	1.057	<b>0.038</b>	<b>0.040</b>
23130/711	10M	QPSK 1RB_49	Left Tilt	23.26	23.50	0.15	1.057	0.018	0.019
23130/711	10M	QPSK 1RB_49	Right Cheek	23.26	23.50	0.03	1.057	0.031	0.033
23130/711	10M	QPSK 1RB_49	Right Tilt	23.26	23.50	0.18	1.057	0.015	0.016
measured / reported SAR numbers – Head<50%RB>									
23130/711	10M	QPSK 25RB_0	Left Cheek	21.22	21.50	-0.02	1.067	0.030	0.032
23130/711	10M	QPSK 25RB_0	Left Tilt	21.22	21.50	-0.10	1.067	0.015	0.016
23130/711	10M	QPSK 25RB_0	Right Cheek	21.22	21.50	-0.18	1.067	0.024	0.026
23130/711	10M	QPSK 25RB_0	Right Tilt	21.22	21.50	0.04	1.067	0.013	0.014
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
23130/711	10M	QPSK 1RB_49	Front side	23.26	23.50	-0.01	1.057	0.085	0.090
23130/711	10M	QPSK 1RB_49	Rear side	23.26	23.50	0.01	1.057	<b>0.124</b>	<b>0.131</b>
23130/711	10M	QPSK 1RB_49	Left side	23.26	23.50	-0.03	1.057	0.042	0.044
23130/711	10M	QPSK 1RB_49	Right side	23.26	23.50	-0.05	1.057	0.056	0.059
23130/711	10M	QPSK 1RB_49	Bottom side	23.26	23.50	-0.19	1.057	0.091	0.096
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
23130/711	10M	QPSK 25RB_0	Front side	21.22	21.50	-0.05	1.067	0.071	0.076
23130/711	10M	QPSK 25RB_0	Rear side	21.22	21.50	0.10	1.067	0.100	0.107
23130/711	10M	QPSK 25RB_0	Left side	21.22	21.50	0.08	1.067	0.035	0.037
23130/711	10M	QPSK 25RB_0	Right side	21.22	21.50	0.03	1.067	0.044	0.047
23130/711	10M	QPSK 25RB_0	Bottom side	21.22	21.50	0.10	1.067	0.078	0.083

Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode



**7.3.10. SAR Results [LTE Band 13]**

SAR Values [LTE Band 13]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23230/782	10M	QPSK 1RB_49	Left Cheek	22.26	22.50	-0.13	1.057	<b>0.036</b>	<b>0.038</b>
23230/782	10M	QPSK 1RB_49	Left Tilt	22.26	22.50	-0.10	1.057	0.012	0.013
23230/782	10M	QPSK 1RB_49	Right Cheek	22.26	22.50	0.07	1.057	0.031	0.033
23230/782	10M	QPSK 1RB_49	Right Tilt	22.26	22.50	-0.06	1.057	0.010	0.011
measured / reported SAR numbers – Head<50%RB>									
23230/782	10M	QPSK 25RB_0	Left Cheek	21.43	22.00	-0.16	1.140	0.030	0.034
23230/782	10M	QPSK 25RB_0	Left Tilt	21.43	22.00	-0.12	1.140	0.009	0.010
23230/782	10M	QPSK 25RB_0	Right Cheek	21.43	22.00	-0.11	1.140	0.025	0.029
23230/782	10M	QPSK 25RB_0	Right Tilt	21.43	22.00	-0.02	1.140	0.010	0.011
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
23230/782	10M	QPSK 1RB_49	Front side	22.26	22.50	-0.11	1.057	0.087	0.092
23230/782	10M	QPSK 1RB_49	Rear side	22.26	22.50	0.02	1.057	<b>0.121</b>	<b>0.128</b>
23230/782	10M	QPSK 1RB_49	Left side	22.26	22.50	-0.13	1.057	0.034	0.036
23230/782	10M	QPSK 1RB_49	Right side	22.26	22.50	0.17	1.057	0.050	0.053
23230/782	10M	QPSK 1RB_49	Bottom side	22.26	22.50	0.04	1.057	0.073	0.077
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
23230/782	10M	QPSK 25RB_0	Front side	21.43	22.00	-0.14	1.140	0.072	0.082
23230/782	10M	QPSK 25RB_0	Rear side	21.43	22.00	0.10	1.140	0.105	0.120
23230/782	10M	QPSK 25RB_0	Left side	21.43	22.00	-0.05	1.140	0.030	0.034
23230/782	10M	QPSK 25RB_0	Right side	21.43	22.00	0.09	1.140	0.039	0.044
23230/782	10M	QPSK 25RB_0	Bottom side	21.43	22.00	-0.09	1.140	0.055	0.063

## Note:

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





**7.3.11. SAR Results [LTE Band 17]**

SAR Values [LTE Band 17]									
Ch/ Freq. (MHz)	BW.	Channel Type	Test Position	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head<1RB>									
23800/711	10M	QPSK 1RB_49	Left Cheek	23.60	24.00	0.10	1.096	<b>0.030</b>	<b>0.033</b>
23800/711	10M	QPSK 1RB_49	Left Tilt	23.60	24.00	0.01	1.096	0.013	0.014
23800/711	10M	QPSK 1RB_49	Right Cheek	23.60	24.00	-0.11	1.096	0.026	0.029
23800/711	10M	QPSK 1RB_49	Right Tilt	23.60	24.00	0.18	1.096	0.010	0.011
measured / reported SAR numbers – Head<50%RB>									
23800/711	10M	QPSK 25RB_25	Left Cheek	21.57	22.00	-0.02	1.104	0.022	0.024
23800/711	10M	QPSK 25RB_25	Left Tilt	21.57	22.00	-0.13	1.104	0.008	0.009
23800/711	10M	QPSK 25RB_25	Right Cheek	21.57	22.00	-0.01	1.104	0.017	0.019
23800/711	10M	QPSK 25RB_25	Right Tilt	21.57	22.00	0.15	1.104	0.006	0.007
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<1RB>									
23800/711	10M	QPSK 1RB_49	Front side	23.60	24.00	0.18	1.096	0.080	0.088
23800/711	10M	QPSK 1RB_49	Rear side	23.60	24.00	0.14	1.096	<b>0.124</b>	<b>0.136</b>
23800/711	10M	QPSK 1RB_49	Left side	23.60	24.00	0.13	1.096	0.035	0.038
23800/711	10M	QPSK 1RB_49	Right side	23.60	24.00	-0.06	1.096	0.056	0.061
23800/711	10M	QPSK 1RB_49	Bottom side	23.60	24.00	-0.15	1.096	0.074	0.081
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)<50%RB>									
23800/711	10M	QPSK 25RB_25	Front side	21.57	22.00	-0.10	1.104	0.050	0.055
23800/711	10M	QPSK 25RB_25	Rear side	21.57	22.00	0.08	1.104	0.092	0.102
23800/711	10M	QPSK 25RB_25	Left side	21.57	22.00	-0.14	1.104	0.025	0.028
23800/711	10M	QPSK 25RB_25	Right side	21.57	22.00	0.09	1.104	0.034	0.038
23800/711	10M	QPSK 25RB_25	Bottom side	21.57	22.00	-0.08	1.104	0.047	0.052

**Note:**

- The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





### 7.3.12. SAR Results [WIFI 2.4G]

SAR Values [WIFI 2.4G]									
Ch/ Freq. (MHz)	Channel Type	Test Position	Duty Cycle	Conducted Power (dBm)	Maximum Allowed Power (dBm)	Power Drift (dB)	Scaling Factor	SAR <sub>1-g</sub> results(W/kg)	
								Measured	Reported
measured / reported SAR numbers – Head									
11/2462	802.11g	Left Cheek	1.021	16.00	16.50	0.09	1.122	0.175	0.201
11/2462	802.11g	Left Tilt	1.021	16.00	16.50	-0.11	1.122	0.158	0.181
11/2462	802.11g	Right Cheek	1.021	16.00	16.50	-0.10	1.122	<b>0.219</b>	<b>0.251</b>
11/2462	802.11g	Right Tilt	1.021	16.00	16.50	-0.11	1.122	0.204	0.234
measured / reported SAR numbers - Body (Hotspot Test data distance 10mm)									
11/2462	802.11g	Front side	1.021	16.00	16.50	-0.13	1.122	0.085	0.097
11/2462	802.11g	Rear side	1.021	16.00	16.50	0.11	1.122	<b>0.141</b>	<b>0.162</b>
11/2462	802.11g	Right side	1.021	16.00	16.50	0.10	1.122	0.044	0.050
11/2462	802.11g	Top side	1.021	16.00	16.50	0.07	1.122	0.092	0.105

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB 648474 D04, Product Specific 10-g SAR test is not required for this frequency band since hotspot mode 1-g reported SAR < 1.2 W/kg.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 4) Body worn mode and hotspot mode use the same test distance for 10mm. The above data only reflects hotspot mode





### 7.4. Multiple Transmitter Evaluation

#### 7.4.1. Simultaneous SAR SAR test evaluation

##### Simultaneous Transmission Possibilities

NO.	Simultaneous Tx Combination	Head	Body	Hotspot
1	GSM Voice + BT	Yes	Yes	Yes
2	GSM DATA + BT	Yes	Yes	Yes
3	GSM Voice + WiFi 2.4G	Yes	Yes	Yes
4	GSM DATA + WiFi 2.4G	Yes	Yes	Yes
5	UMTS + BT	Yes	Yes	Yes
6	UMTS + WiFi 2.4G	Yes	Yes	Yes
7	LTE + WiFi 2.4G	Yes	Yes	Yes
8	LTE + BT	Yes	Yes	Yes

Note:

- 1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.





### 7.4.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

#### Estimated SAR Result

Freq. Band	Frequency (GHz)	Test Position	max. power (dBm)	max. power (mw)	Test Separation (mm)	Estimated
						1g SAR (W/kg)
Bluetooth	2.48	Head	4	2.51	5	0.105
		Body-worn	4	2.51	10	0.053
		hotspot	4	2.51	10	0.053





### 7.4.3. Simultaneous Transmission SAR Summation Scenario

Test position		Main Antenna SAR <sub>max</sub> (W/kg)										WiFi Antenna SAR <sub>max</sub> (W/kg)		Summed 1g SAR <sub>max</sub> (W/kg)	
		GSM 850	GSM 1900	WCDMA Band II	WCDMA Band V	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 17	WLAN 2.4G		BT
Head	Left cheek	0.172	0.100	0.067	0.315	0.094	0.078	0.136	0.138	0.040	0.038	0.033	0.201	0.105	0.516
	Left tilted	0.092	0.046	0.032	0.141	0.043	0.033	0.073	0.077	0.019	0.013	0.014	0.181	0.105	0.322
	Right cheek	0.151	0.088	0.057	0.246	0.080	0.062	0.117	0.115	0.033	0.033	0.029	0.251	0.105	0.497
	Right tilted	0.074	0.038	0.025	0.115	0.035	0.028	0.055	0.064	0.016	0.011	0.011	0.234	0.105	0.349
Body	Front side	0.231	0.204	0.167	0.171	0.185	0.126	0.120	0.337	0.090	0.092	0.088	0.097	0.053	0.434
	Back side	0.280	0.304	0.259	0.247	0.277	0.156	0.171	0.601	0.131	0.128	0.136	0.162	0.053	<b>0.763</b>
	Left side	0.107	0.113	0.089	0.103	0.103	0.052	0.058	0.155	0.044	0.036	0.038	/	/	0.155
	Right side	0.117	0.145	0.109	0.084	0.131	0.088	0.076	0.200	0.059	0.053	0.061	0.050	0.053	0.253
	Top side	/	/	/	/	/	/	/	/	/	/	/	0.105	0.053	0.105
	Bottom side	0.181	0.228	0.199	0.143	0.210	0.138	0.113	0.449	0.096	0.077	0.081	/	/	0.449





## APPENDIX A: DETAILED SYSTEM CHECK RESULTS

## APPENDIX B: DETAILED TEST RESULTS

## APPENDIX C: CALIBRATION CERTIFICATE

## APPENDIX D: PHOTOGRAPHS

.....**The End of Test Report**.....

