



Appendix C

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: Mini PC

Trade Mark: Blackview

Test Model: MP200

Environmental Conditions

Temperature:	25.8° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Simba Huang
Supervised by:	Seal Chen



Contents

	Page
COVER PAGE	
1 Duty Cycle.....	3
1.1 Test Result.....	3
1.2 Test Graphs.....	4
2 Maximum Conducted Output Power.....	19
2.1 Test Result.....	19
3 -6dB Bandwidth.....	21
3.1 Test Result.....	21
3.2 Test Graphs.....	22
4 Maximum Power Spectral Density Level.....	40
4.1 Test Result.....	40
4.2 Test Graphs.....	42
5 Band Edge.....	60
5.1 Test Result.....	60
5.2 Test Graphs.....	61
6 Conducted RF Spurious Emission.....	85
6.1 Test Result.....	85
6.2 Test Graphs.....	87
7 Restrict Band.....	123
7.1 Test Result.....	123
7.2 Test Graphs.....	129




1 Duty Cycle


1.1 Test Result


Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	1/T (kHz)
b	2412	Ant1	99.59	0.12
b	2437	Ant1	99.6	0.12
b	2462	Ant1	99.63	0.12
g	2412	Ant1	99.59	0.12
g	2437	Ant1	99.6	0.12
g	2462	Ant1	99.63	0.12
n20	2412	Ant1	92.89	2.27
n20	2437	Ant1	92.91	2.22
n20	2462	Ant1	92.95	2.22
n40	2422	Ant1	92.6	2.27
n40	2437	Ant1	92.43	2.27
n40	2452	Ant1	92.49	2.27
ax20	2412	Ant1	86.98	4.35
ax20	2437	Ant1	86.99	4.35
ax20	2462	Ant1	87.05	4.35
ax40	2422	Ant1	87.25	4.17
ax40	2437	Ant1	86.6	4.17
ax40	2452	Ant1	85.74	4.17
b	2412	Ant2	99.6	0.12
b	2437	Ant2	99.6	0.12
b	2462	Ant2	99.6	0.12
g	2412	Ant2	99.6	0.12
g	2437	Ant2	99.6	0.12
g	2462	Ant2	99.6	0.12
n20	2412	Ant2	93.01	2.22
n20	2437	Ant2	92.95	2.22
n20	2462	Ant2	92.96	2.22
n40	2422	Ant2	92.88	2.27
n40	2437	Ant2	92.83	2.22
n40	2452	Ant2	92.89	2.27
ax20	2412	Ant2	87	4.55
ax20	2437	Ant2	87.04	4.55
ax20	2462	Ant2	87.07	4.35
ax40	2422	Ant2	87.24	4.17
ax40	2437	Ant2	86.32	4.17
ax40	2452	Ant2	87.57	4.17





Test Graphs

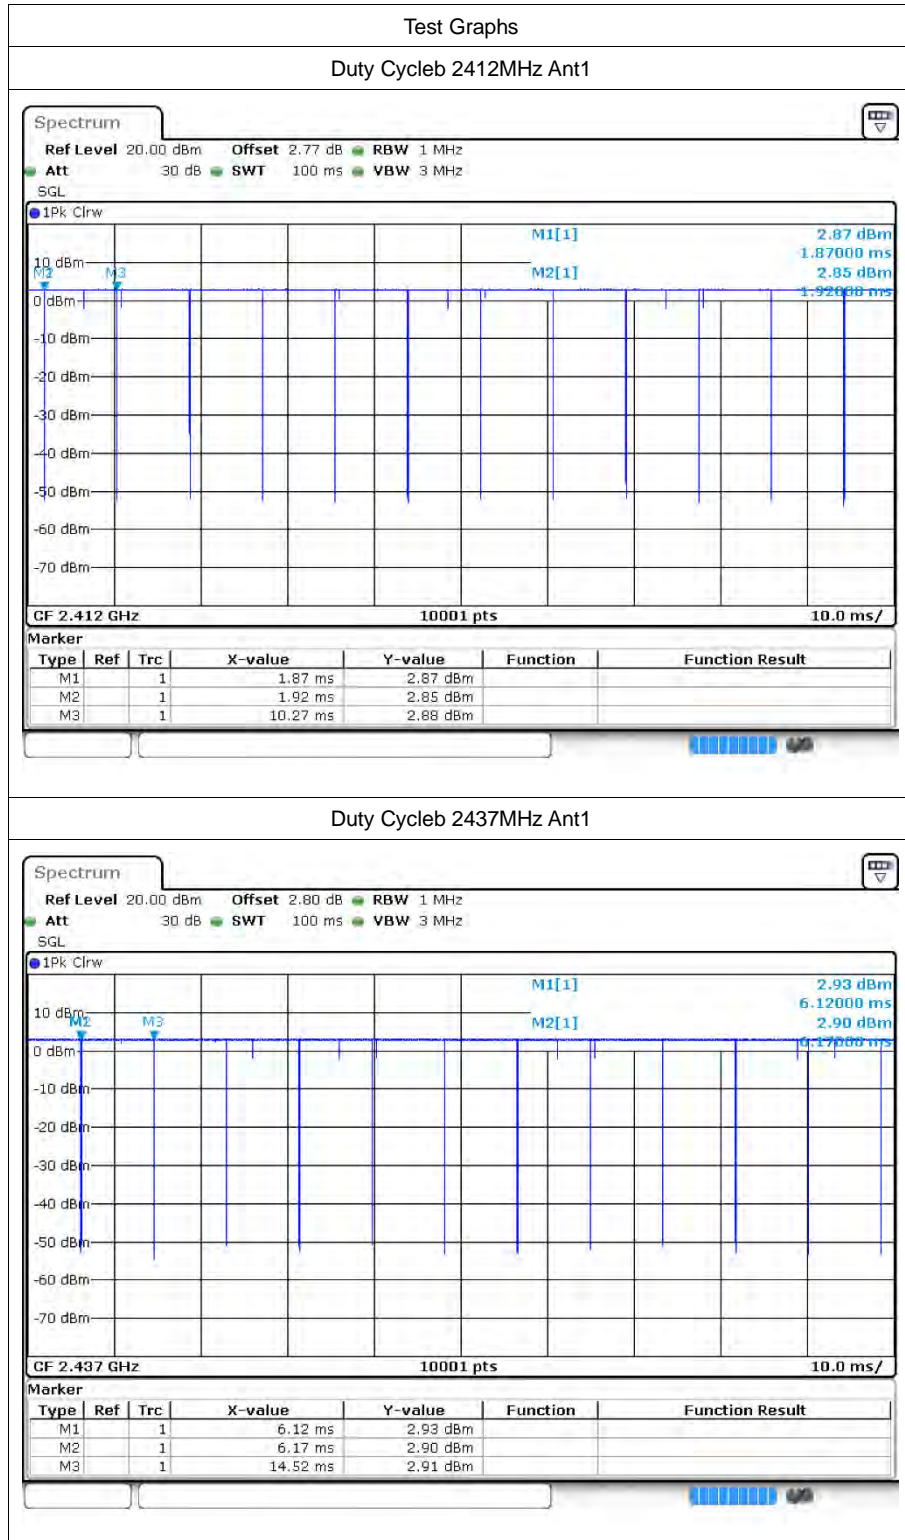


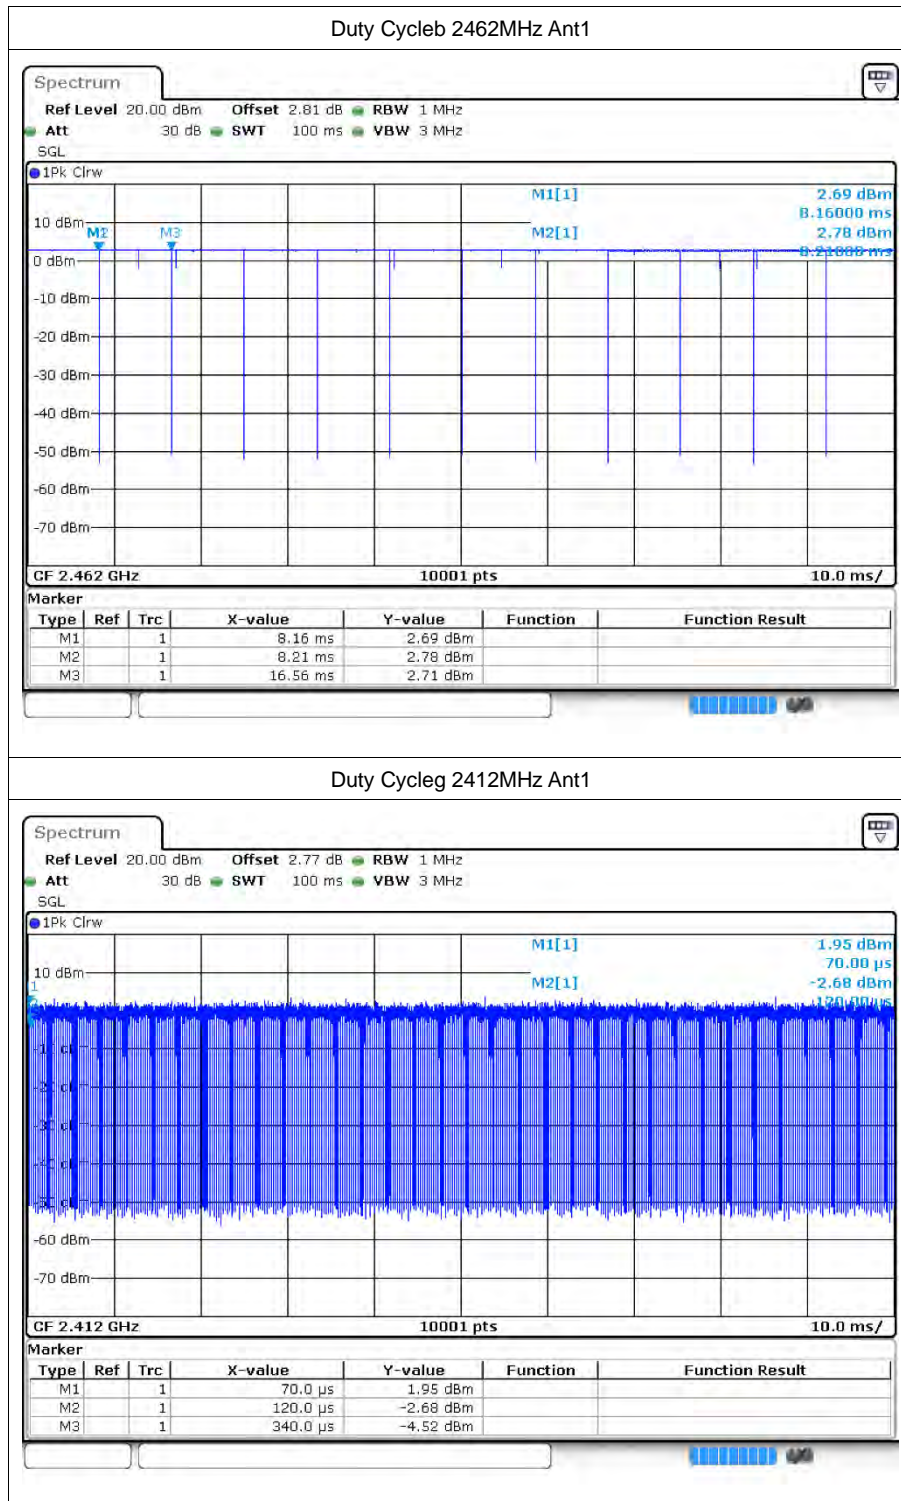

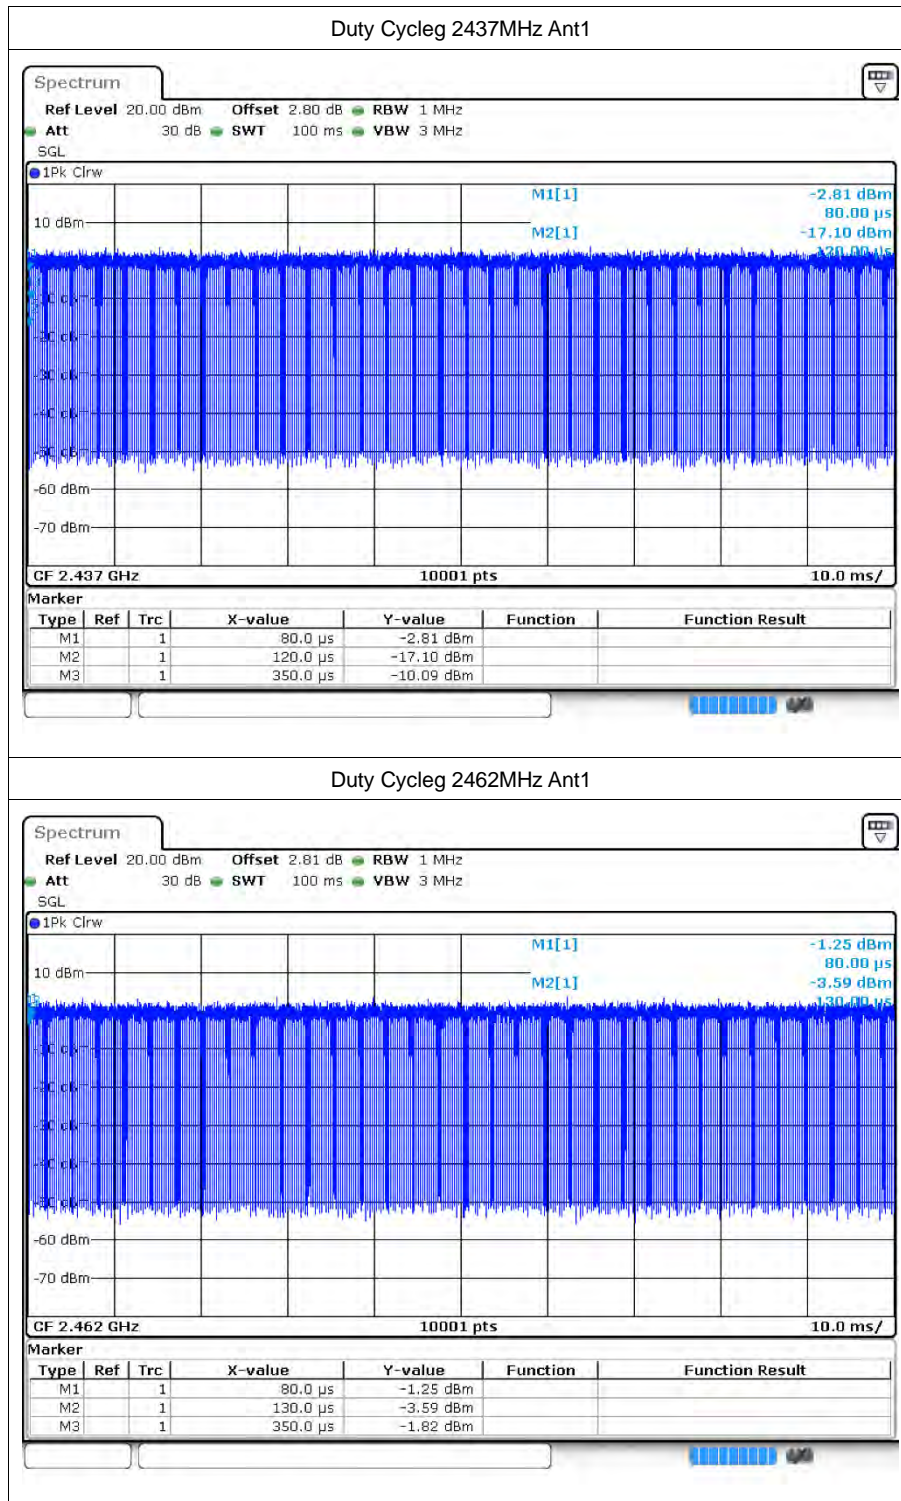

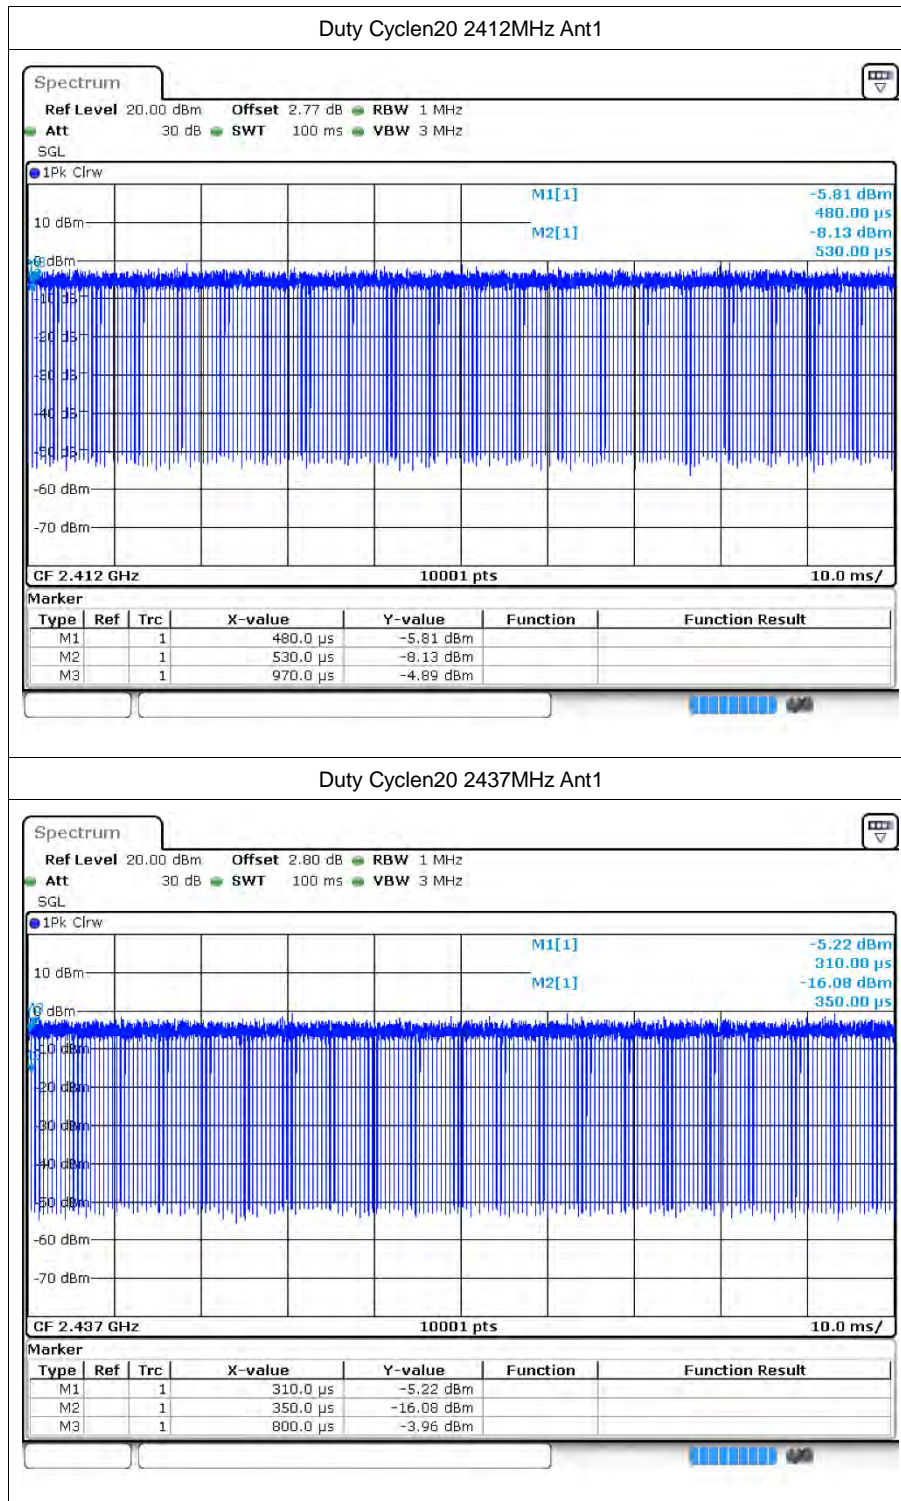

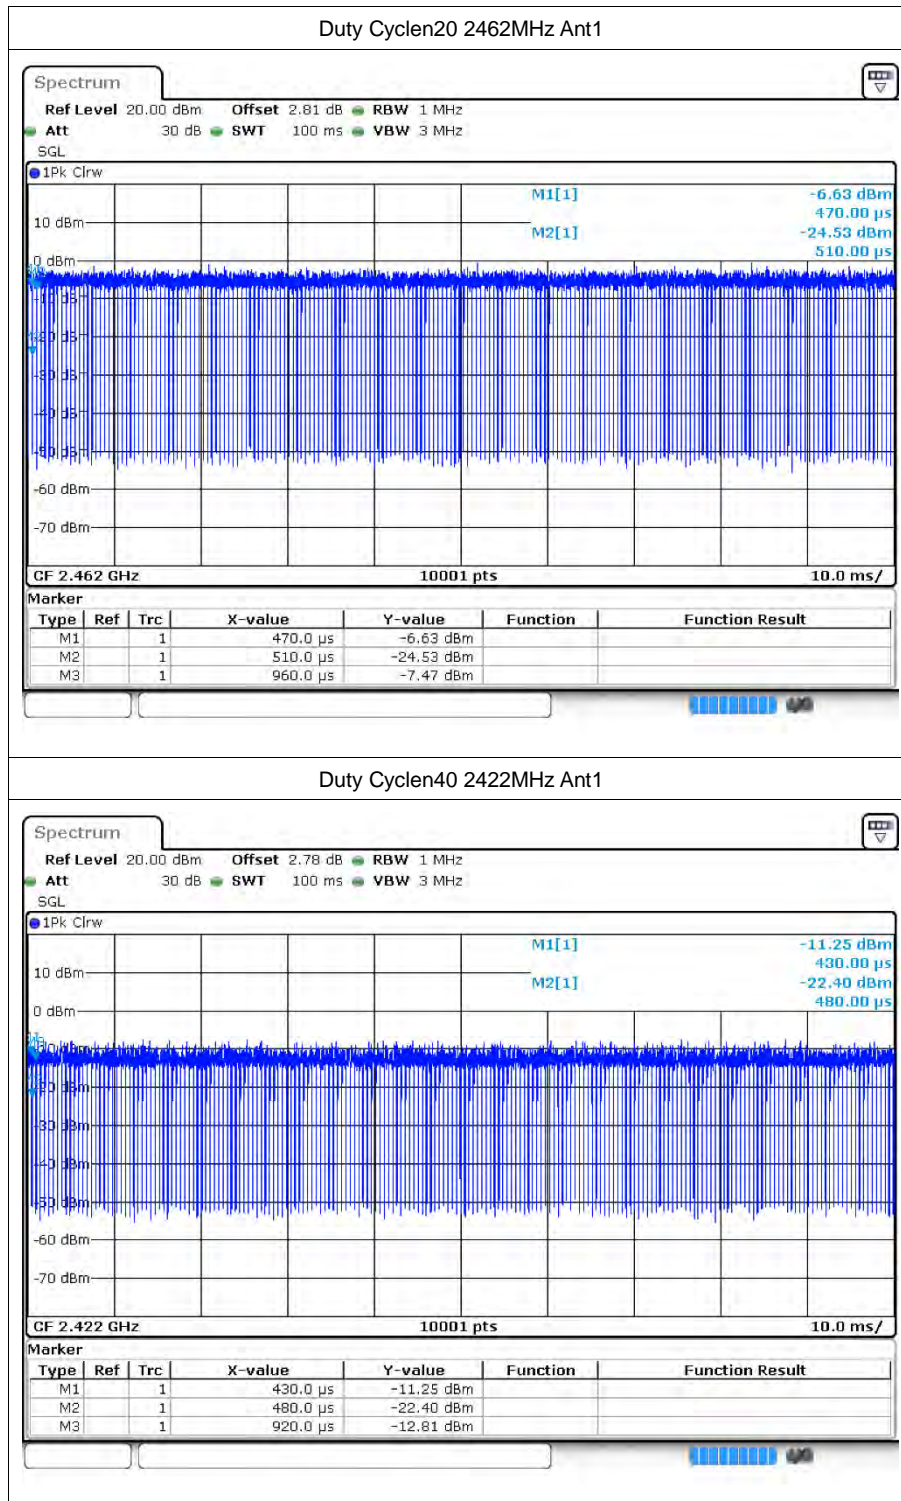


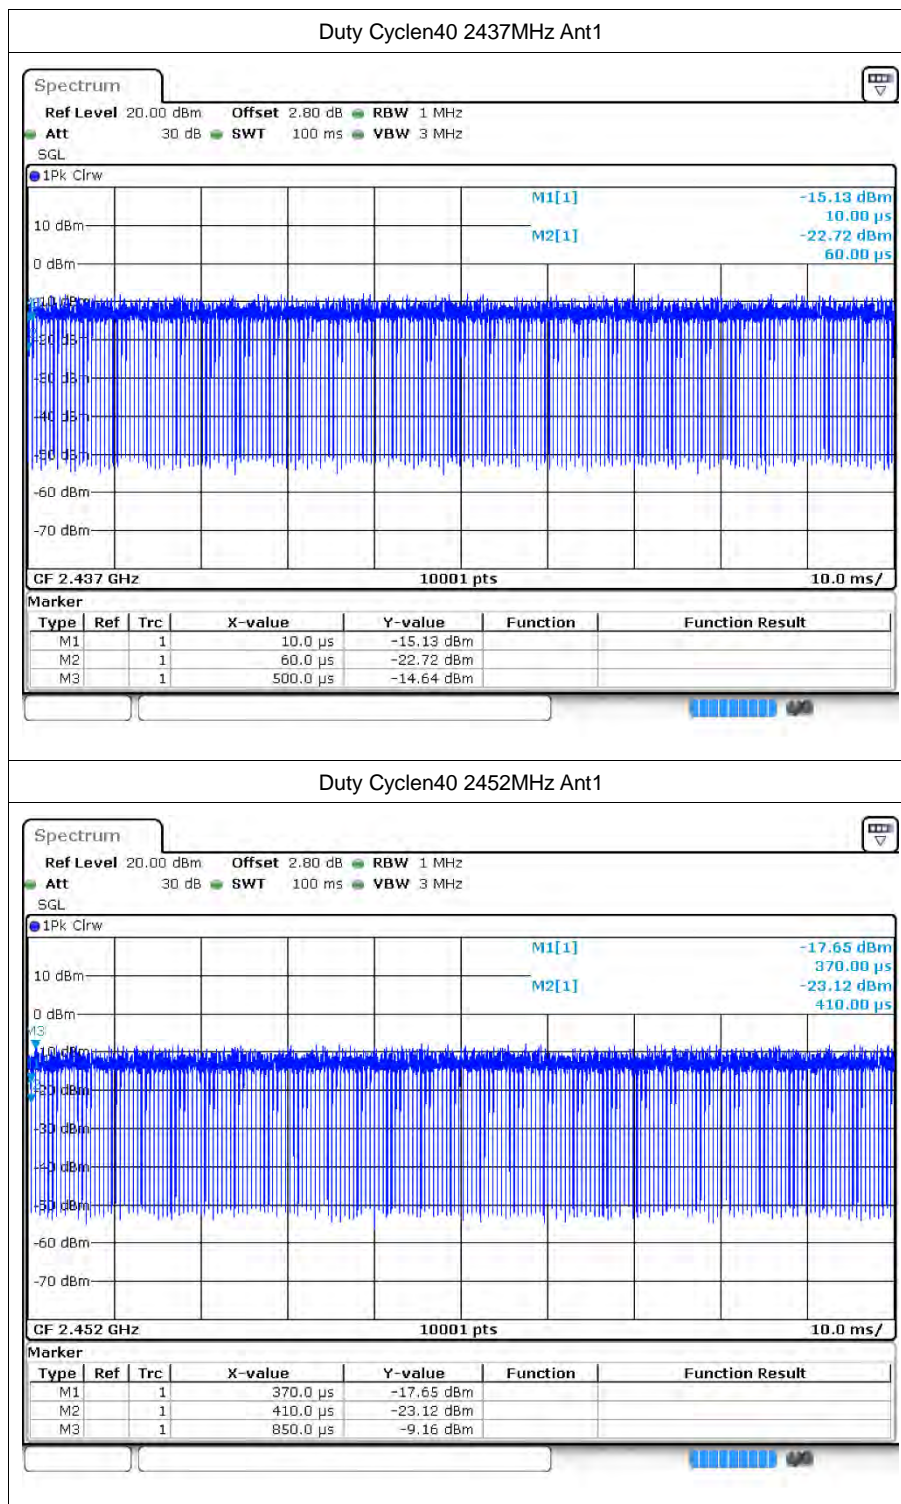





Test Graphs


Duty Cycle 2412MHz Ant2

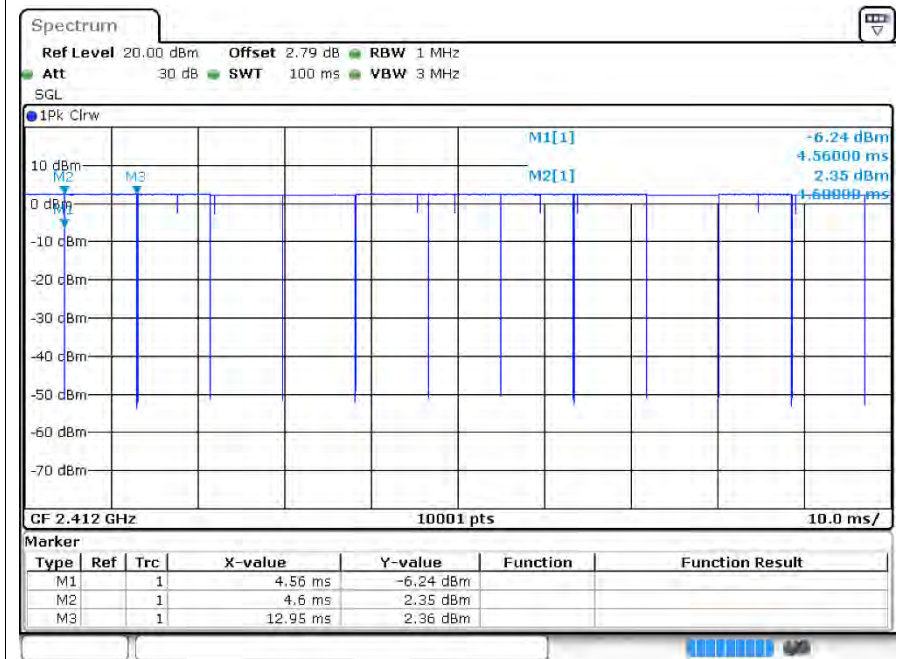



Duty Cycle 2437MHz Ant2

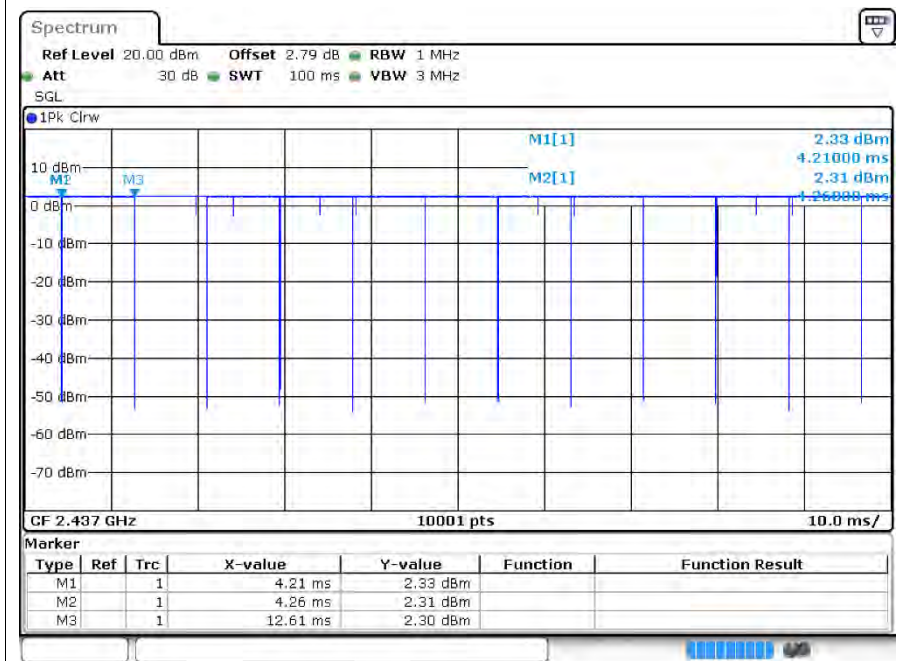


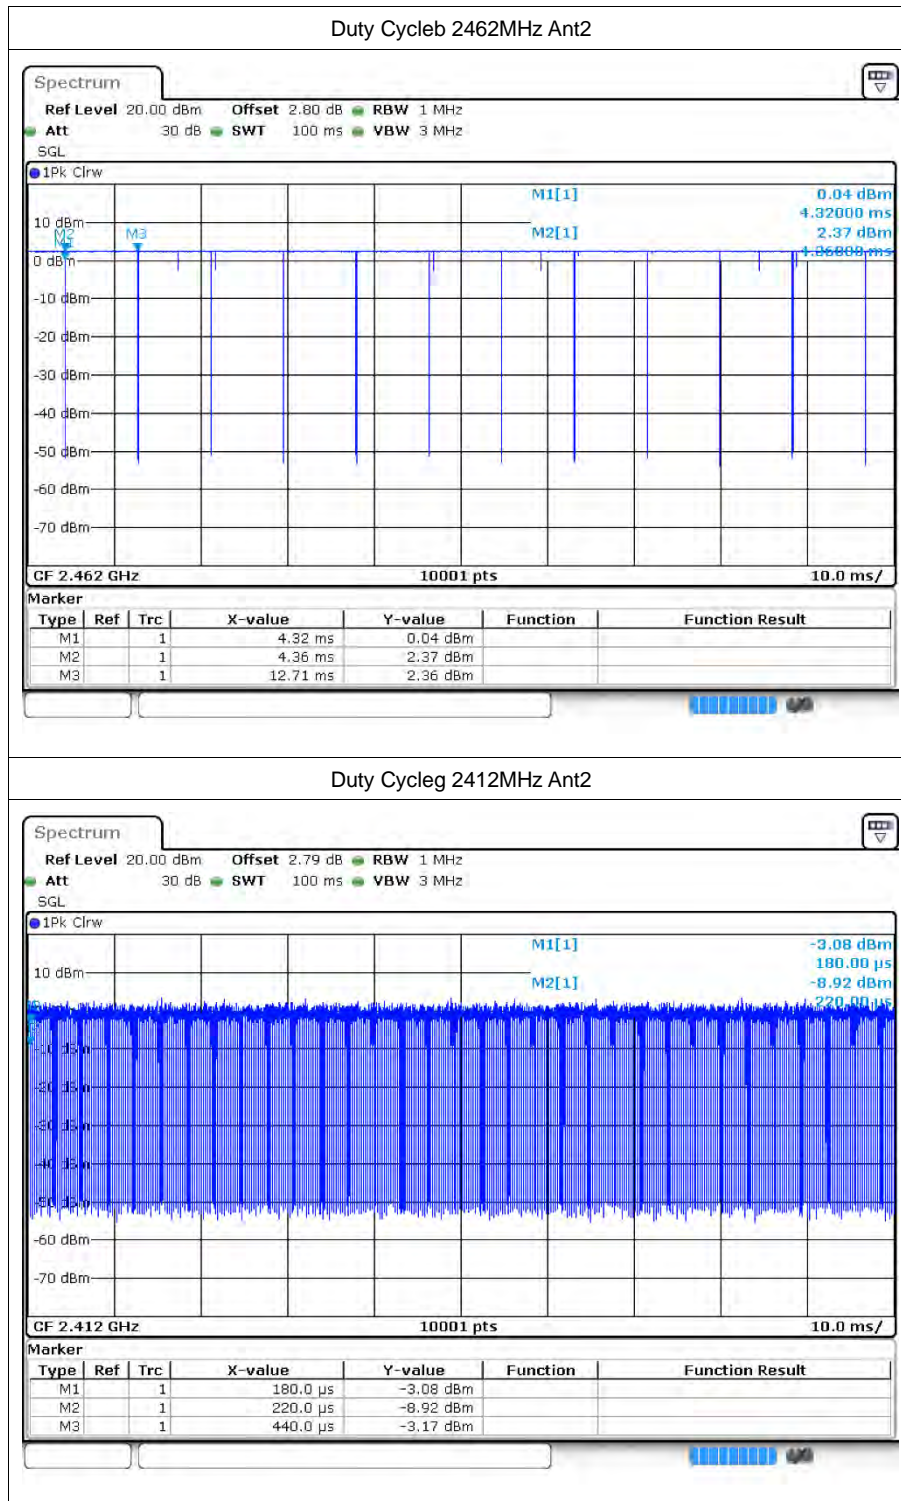


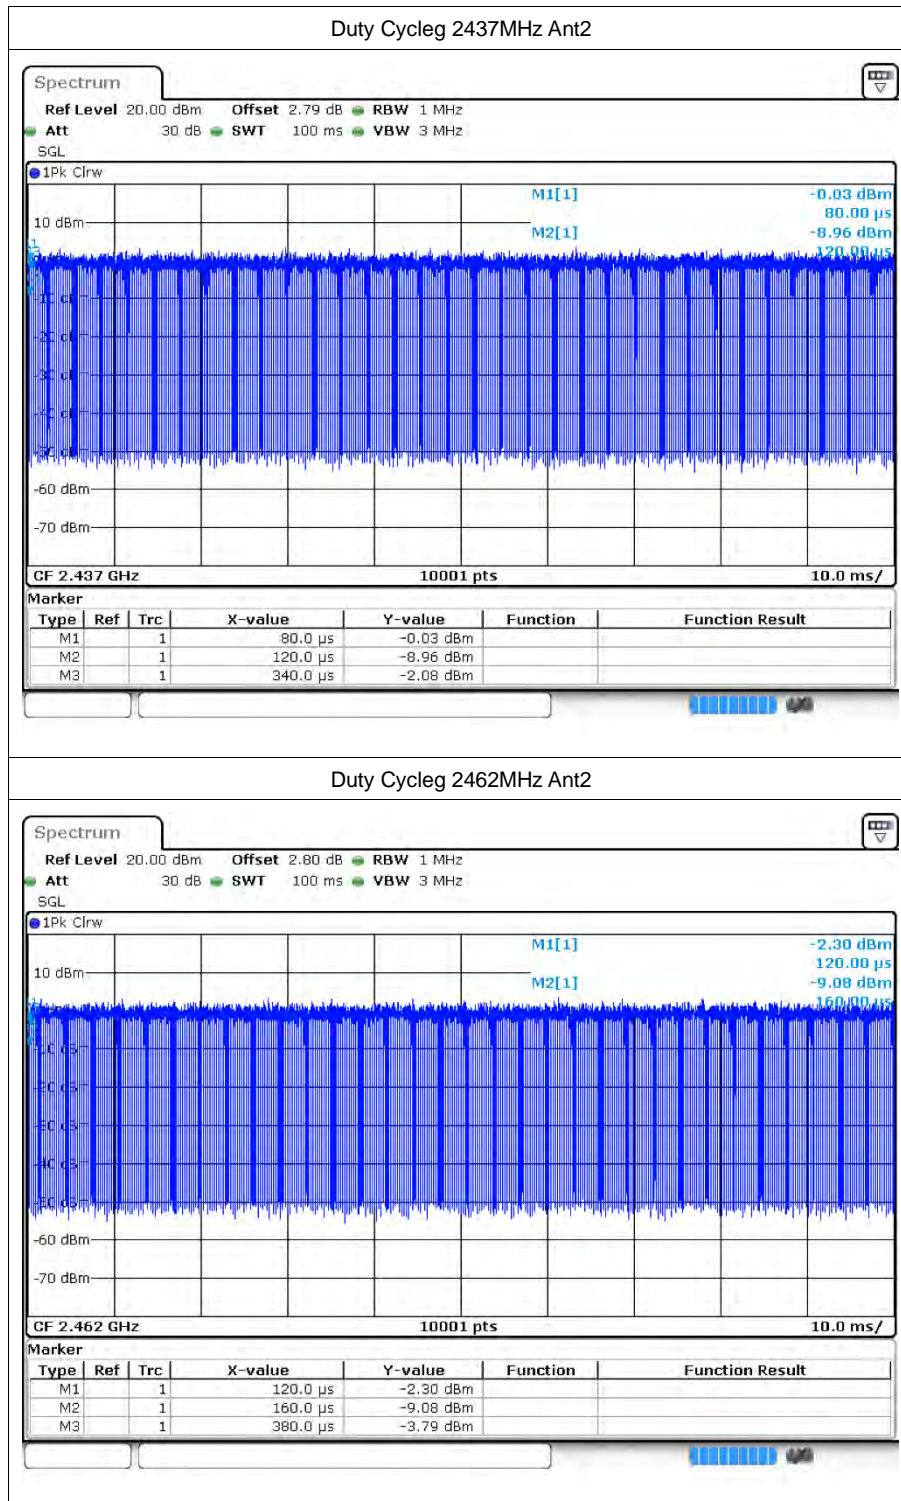


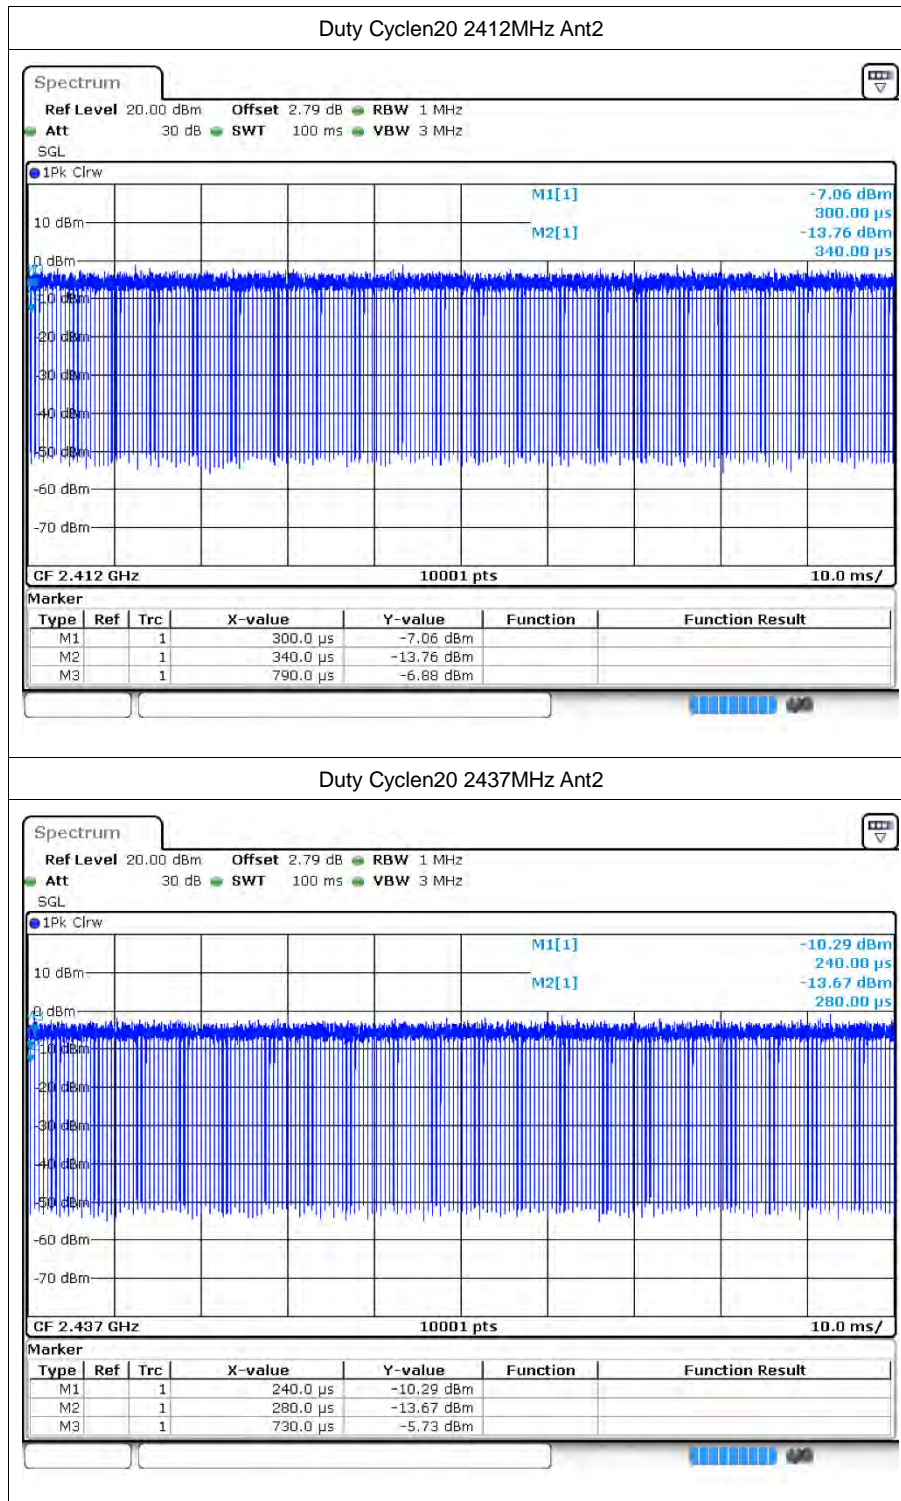


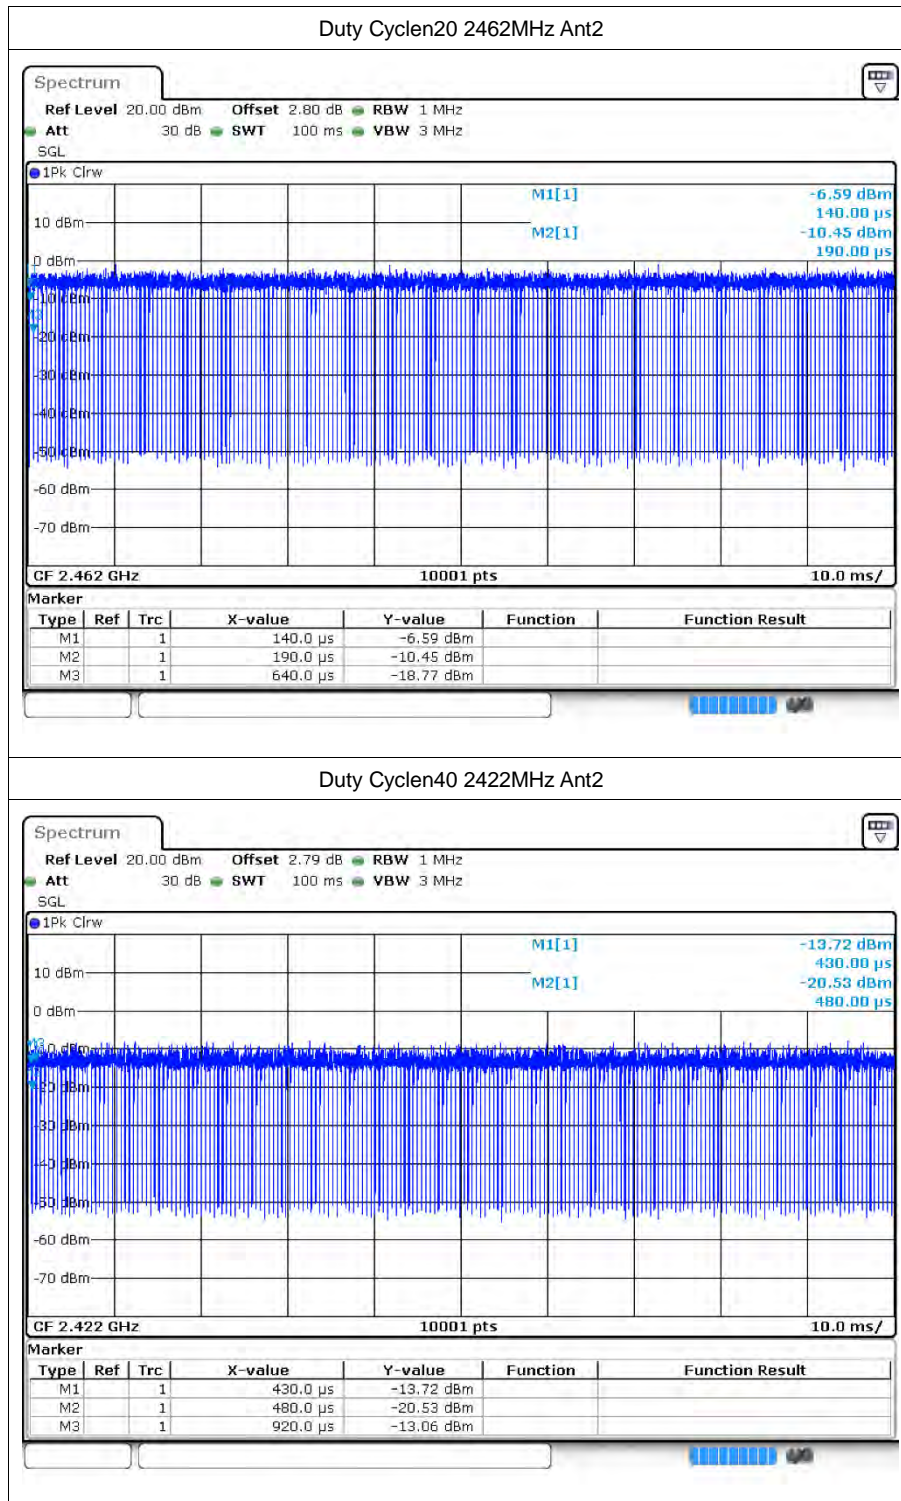

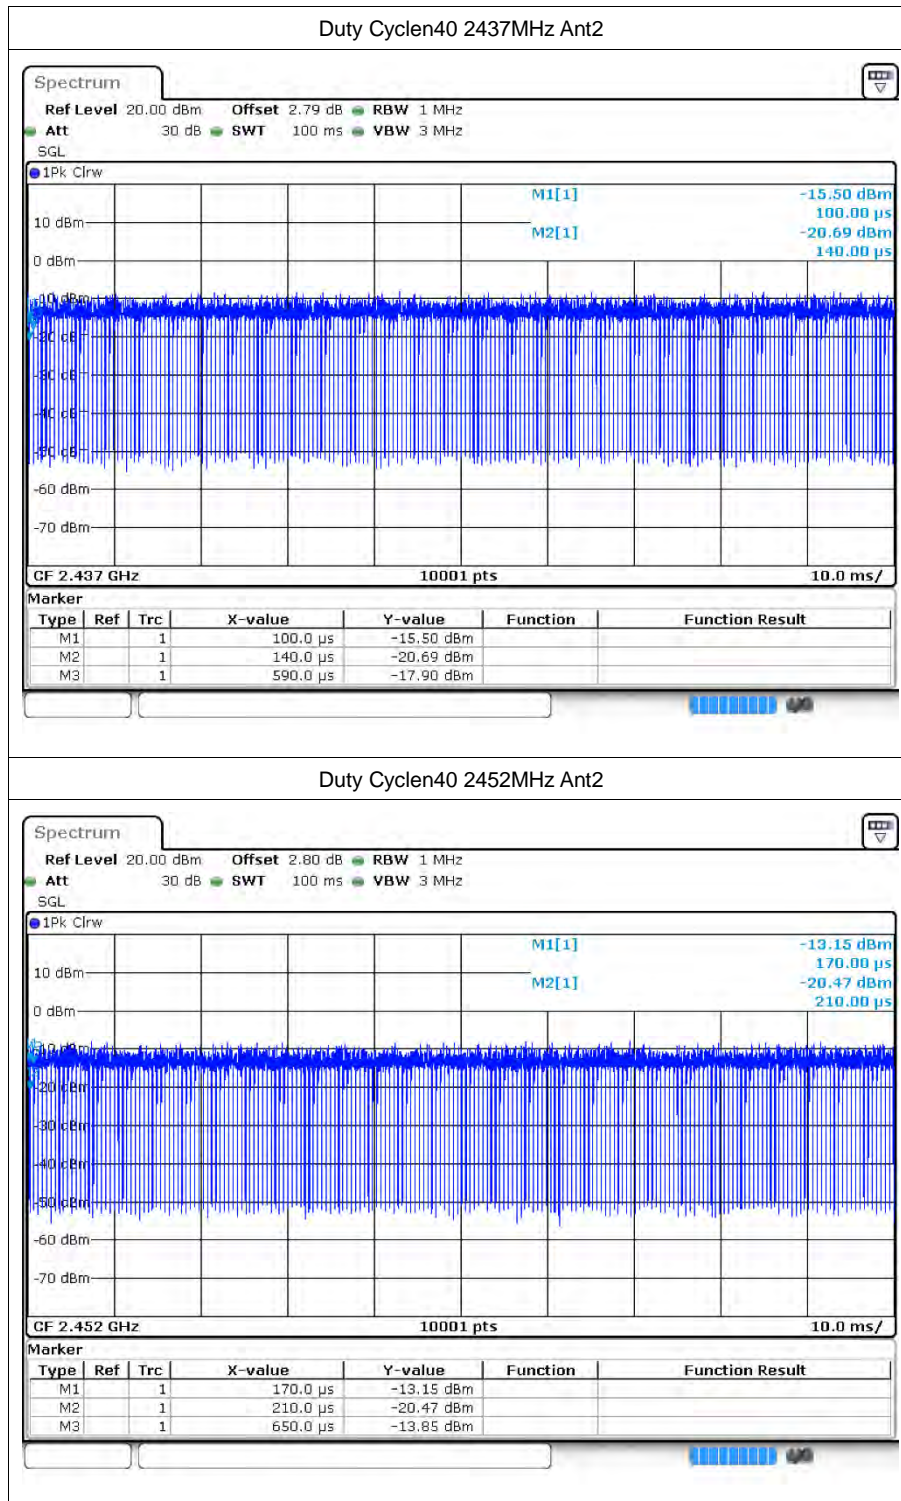

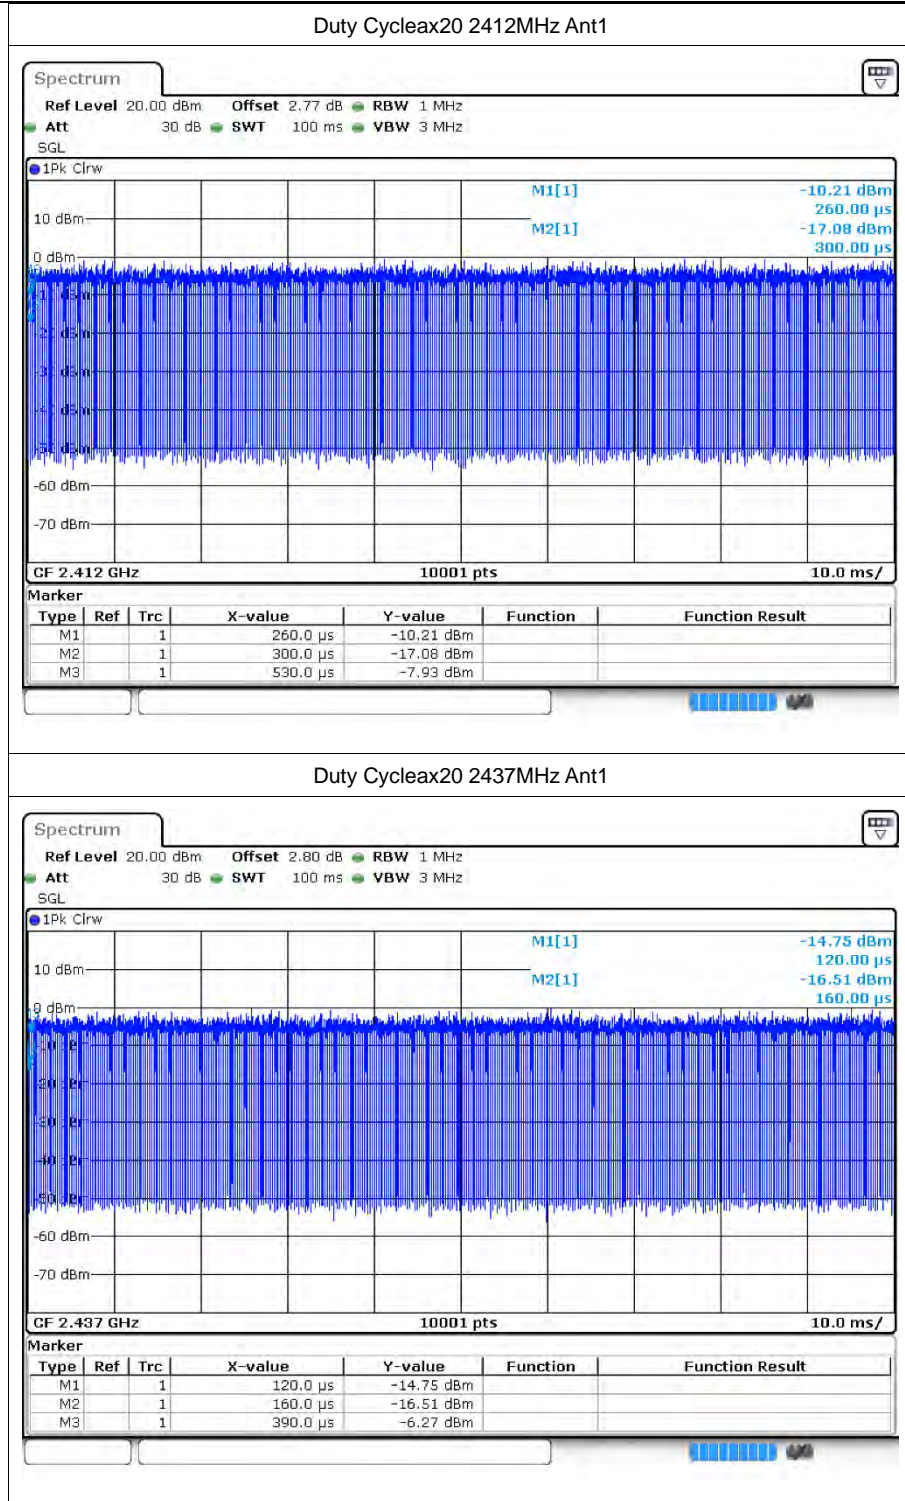

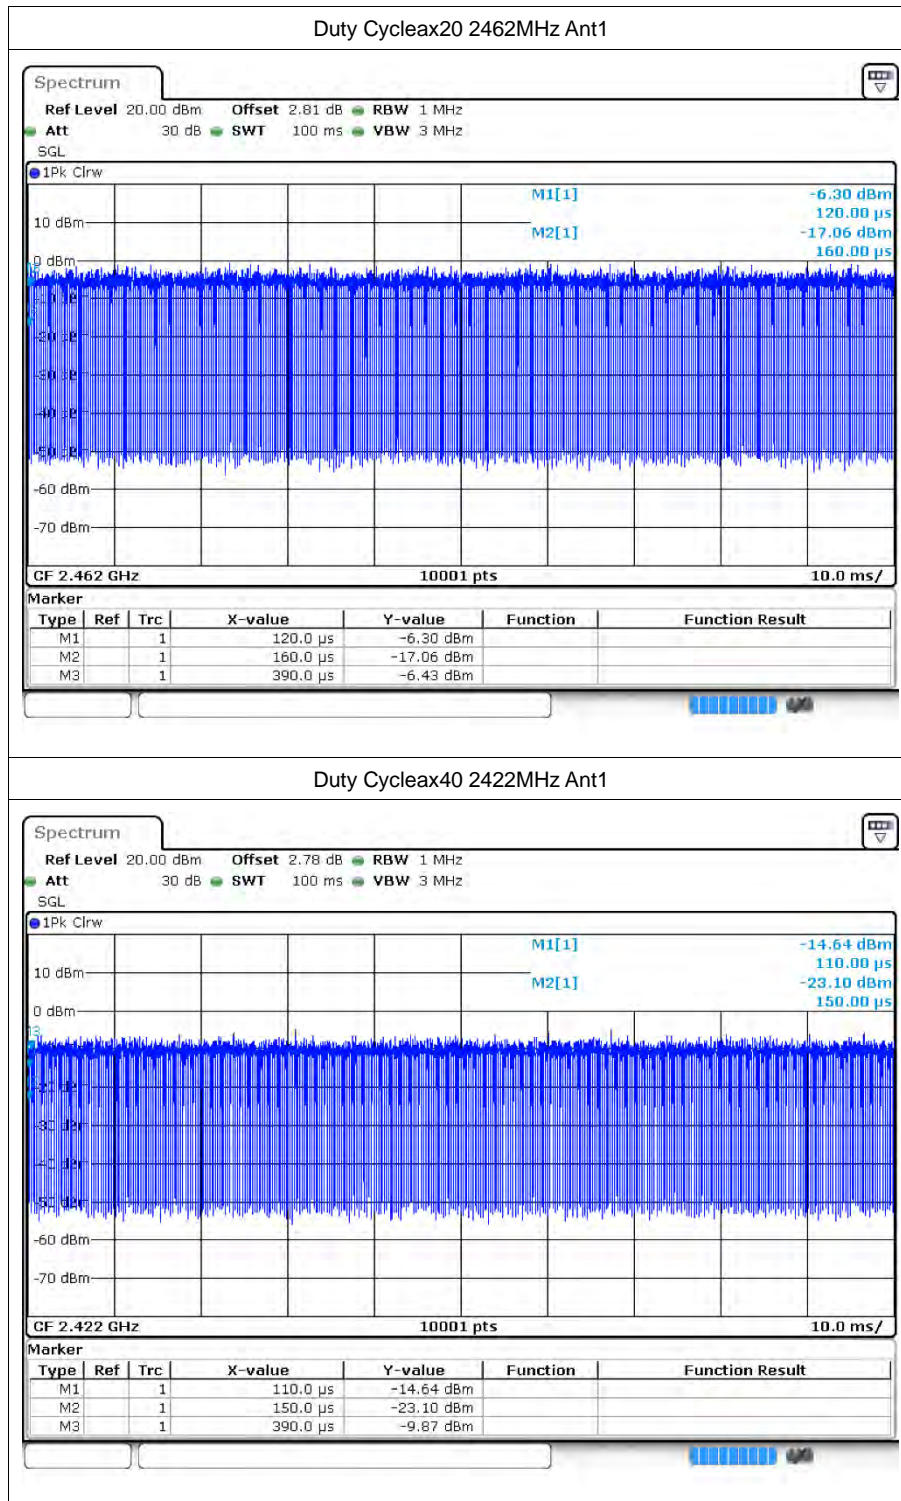

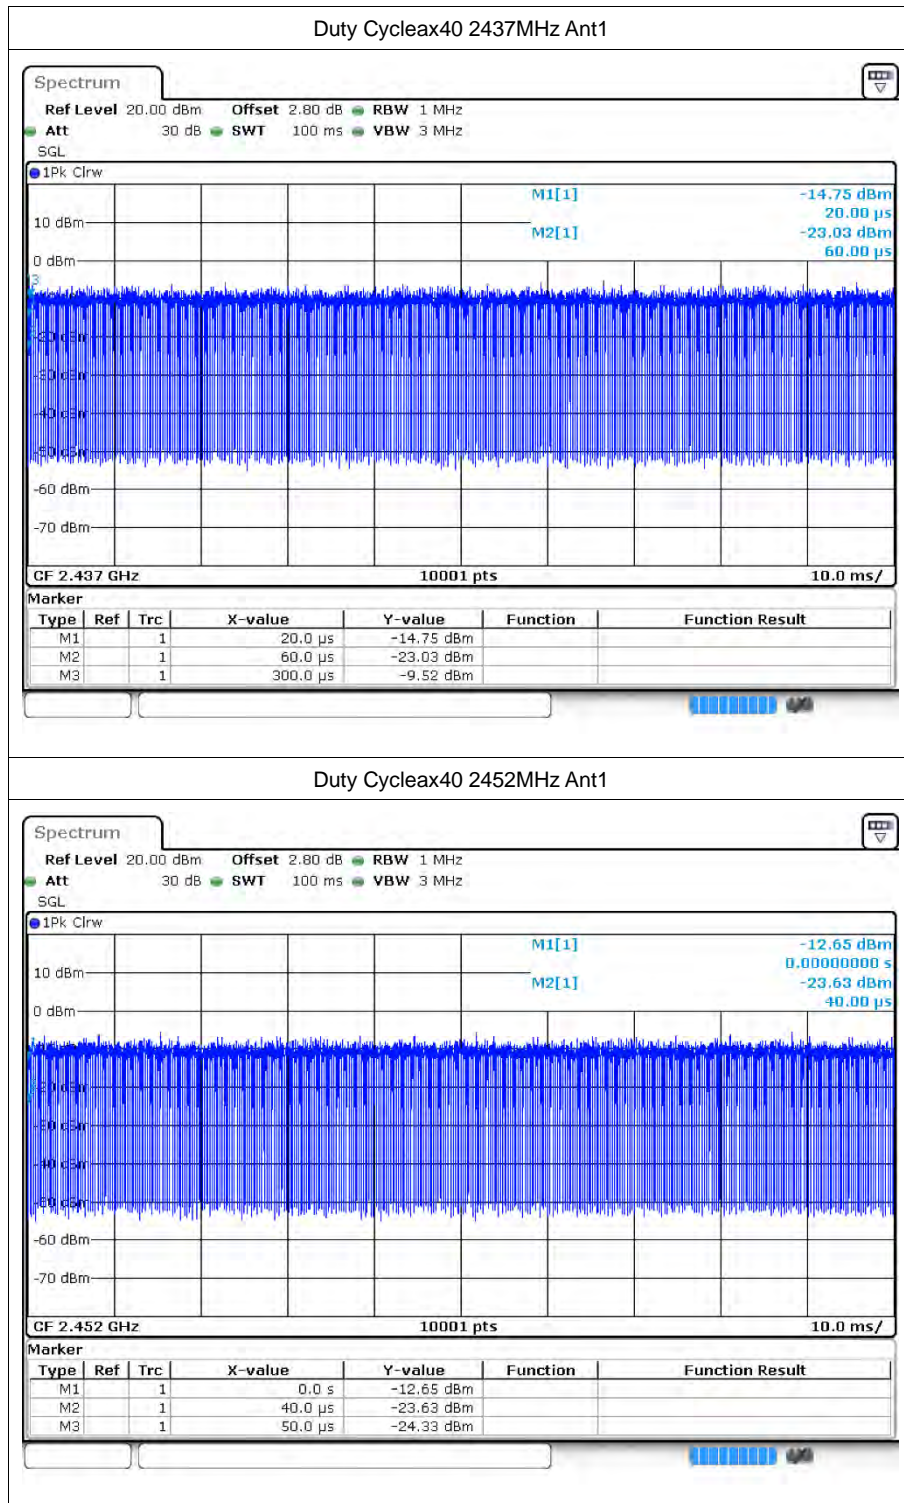

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	13.36	30	Pass
b	2437	Ant1	13.43	30	Pass
b	2462	Ant1	13.1	30	Pass
b	2412	Ant2	12.92	30	Pass
b	2437	Ant2	12.92	30	Pass
b	2462	Ant2	11.87	30	Pass
g	2412	Ant1	12.9	30	Pass
g	2437	Ant1	12.97	30	Pass
g	2462	Ant1	12.63	30	Pass
g	2412	Ant2	12.64	30	Pass
g	2437	Ant2	12.56	30	Pass
g	2462	Ant2	12.47	30	Pass
n20	2412	Ant1	9.46	30	Pass
n20	2437	Ant1	9.51	30	Pass
n20	2462	Ant1	9.24	30	Pass
n20	2412	Ant2	9.1	30	Pass
n20	2437	Ant2	9.24	30	Pass
n20	2462	Ant2	9.01	30	Pass
n20	2412	Sum	12.29	30	Pass
n20	2437	Sum	12.39	30	Pass
n20	2462	Sum	12.14	30	Pass
n40	2422	Ant1	8.77	30	Pass
n40	2437	Ant1	8.71	30	Pass
n40	2452	Ant1	8.56	30	Pass
n40	2422	Ant2	8.47	30	Pass
n40	2437	Ant2	8.23	30	Pass
n40	2452	Ant2	8.16	30	Pass
n40	2422	Sum	11.63	30	Pass
n40	2437	Sum	11.49	30	Pass
n40	2452	Sum	11.37	30	Pass
ax20	2412	Ant1	9.51	30	Pass
ax20	2437	Ant1	9.46	30	Pass
ax20	2462	Ant1	9.33	30	Pass
ax20	2412	Ant2	9.4	30	Pass



ax20	2437	Ant2	9.45	30	Pass
ax20	2462	Ant2	9.06	30	Pass
ax20	2412	Sum	12.44	30	Pass
ax20	2437	Sum	12.32	30	Pass
ax20	2462	Sum	12.27	30	Pass
ax40	2422	Ant1	8.62	30	Pass
ax40	2437	Ant1	8.71	30	Pass
ax40	2452	Ant1	8.55	30	Pass
ax40	2422	Ant2	8.58	30	Pass
ax40	2437	Ant2	8.19	30	Pass
ax40	2452	Ant2	8.39	30	Pass
ax40	2422	Sum	11.61	30	Pass
ax40	2437	Sum	11.47	30	Pass
ax40	2452	Sum	11.48	30	Pass




3 -6dB Bandwidth


3.1 Test Result


Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	10.098	0.5	Pass
b	2437	Ant1	10.095	0.5	Pass
b	2462	Ant1	10.077	0.5	Pass
g	2412	Ant1	15.084	0.5	Pass
g	2437	Ant1	13.854	0.5	Pass
g	2462	Ant1	15.048	0.5	Pass
n20	2412	Ant1	15.084	0.5	Pass
n20	2437	Ant1	15.12	0.5	Pass
n20	2462	Ant1	15.066	0.5	Pass
n40	2422	Ant1	35.016	0.5	Pass
n40	2437	Ant1	35.082	0.5	Pass
n40	2452	Ant1	35.088	0.5	Pass
ax20	2412	Ant1	15.072	0.5	Pass
ax20	2437	Ant1	15.117	0.5	Pass
ax20	2462	Ant1	15.111	0.5	Pass
ax40	2422	Ant1	33.81	0.5	Pass
ax40	2437	Ant1	35.07	0.5	Pass
ax40	2452	Ant1	30.312	0.5	Pass
b	2412	Ant2	10.089	0.5	Pass
b	2437	Ant2	10.083	0.5	Pass
b	2462	Ant2	10.038	0.5	Pass
g	2412	Ant2	15.108	0.5	Pass
g	2437	Ant2	15.108	0.5	Pass
g	2462	Ant2	12.609	0.5	Pass
n20	2412	Ant2	15.033	0.5	Pass
n20	2437	Ant2	15.09	0.5	Pass
n20	2462	Ant2	15.099	0.5	Pass
n40	2422	Ant2	31.338	0.5	Pass
n40	2437	Ant2	31.344	0.5	Pass
n40	2452	Ant2	35.118	0.5	Pass
ax20	2412	Ant2	16.395	0.5	Pass
ax20	2437	Ant2	15.111	0.5	Pass
ax20	2462	Ant2	15.084	0.5	Pass
ax40	2422	Ant2	35.31	0.5	Pass
ax40	2437	Ant2	35.07	0.5	Pass
ax40	2452	Ant2	34.986	0.5	Pass


3.2 Test Graphs

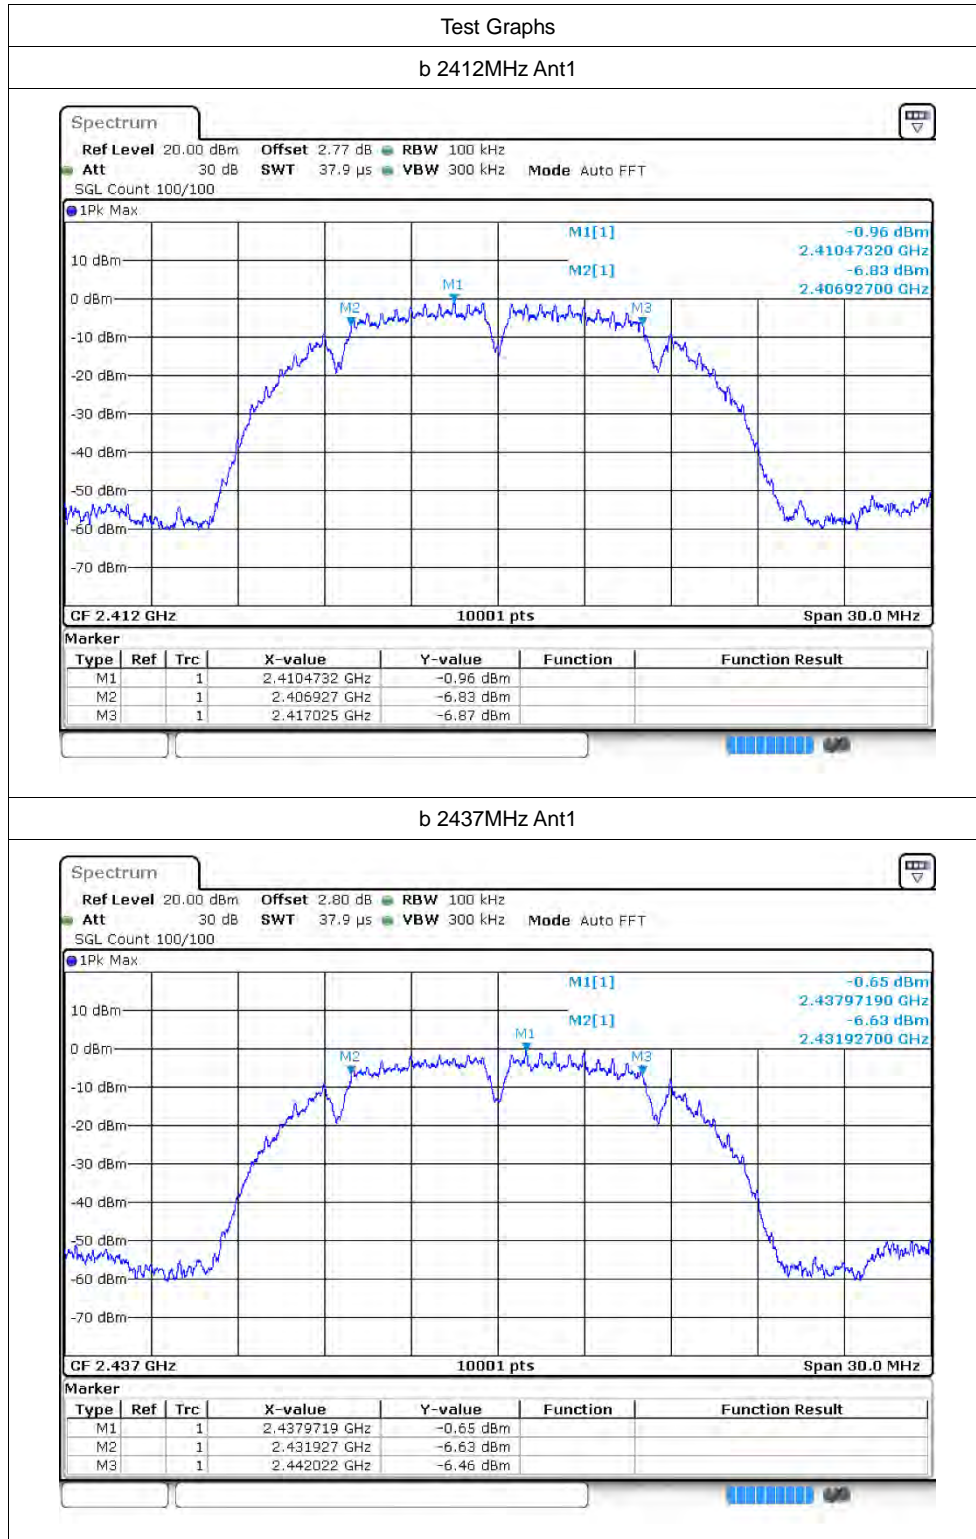


b 2437MHz Ant1

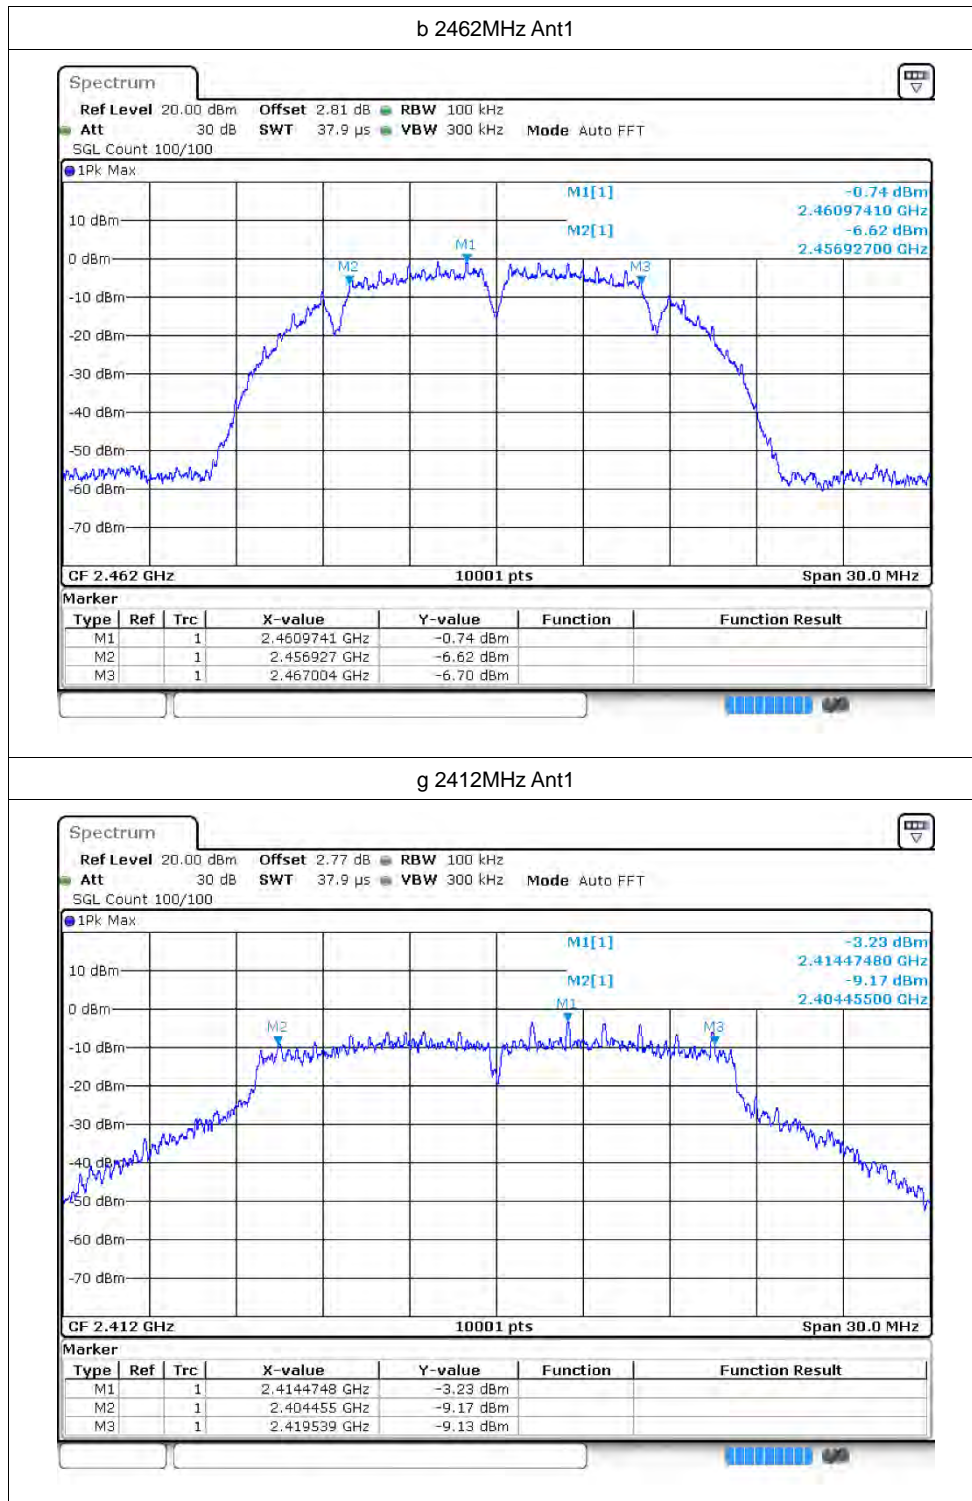


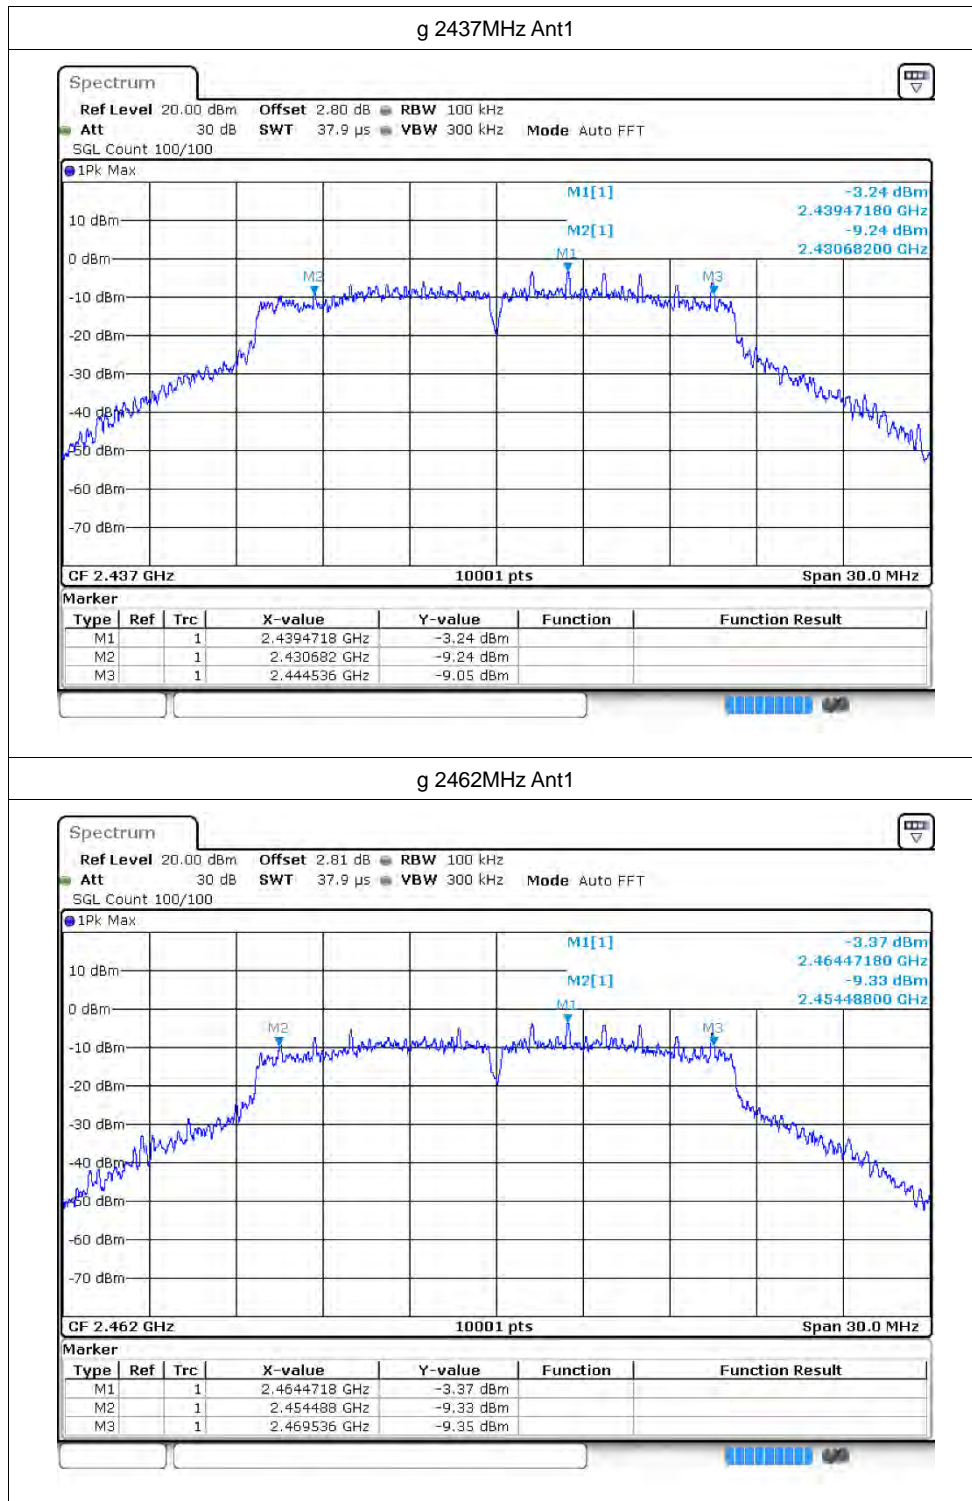

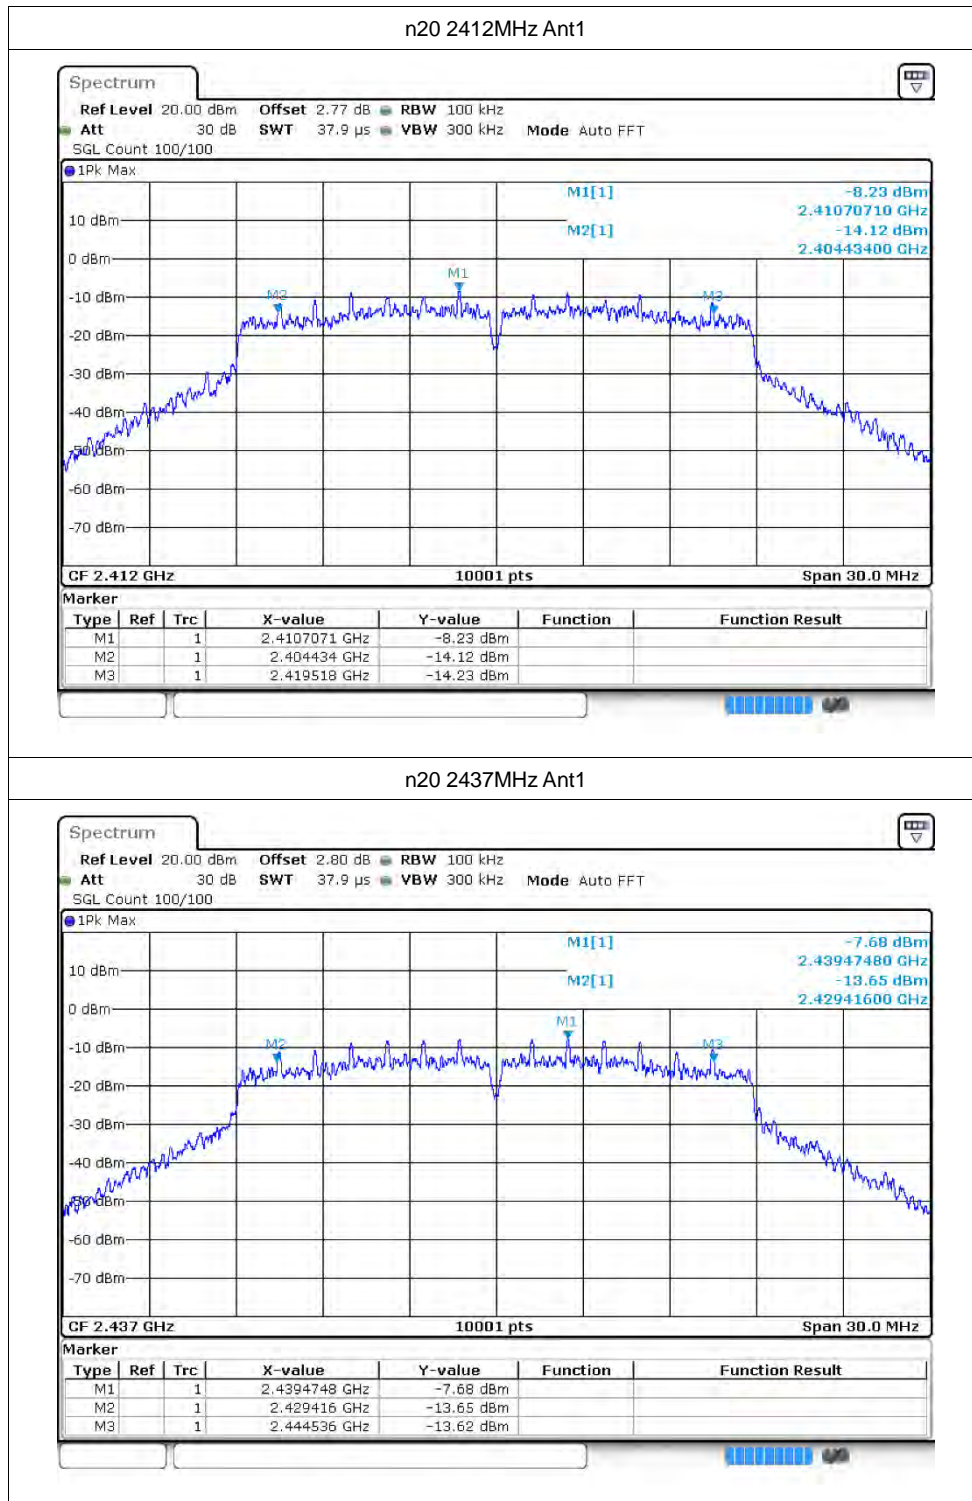


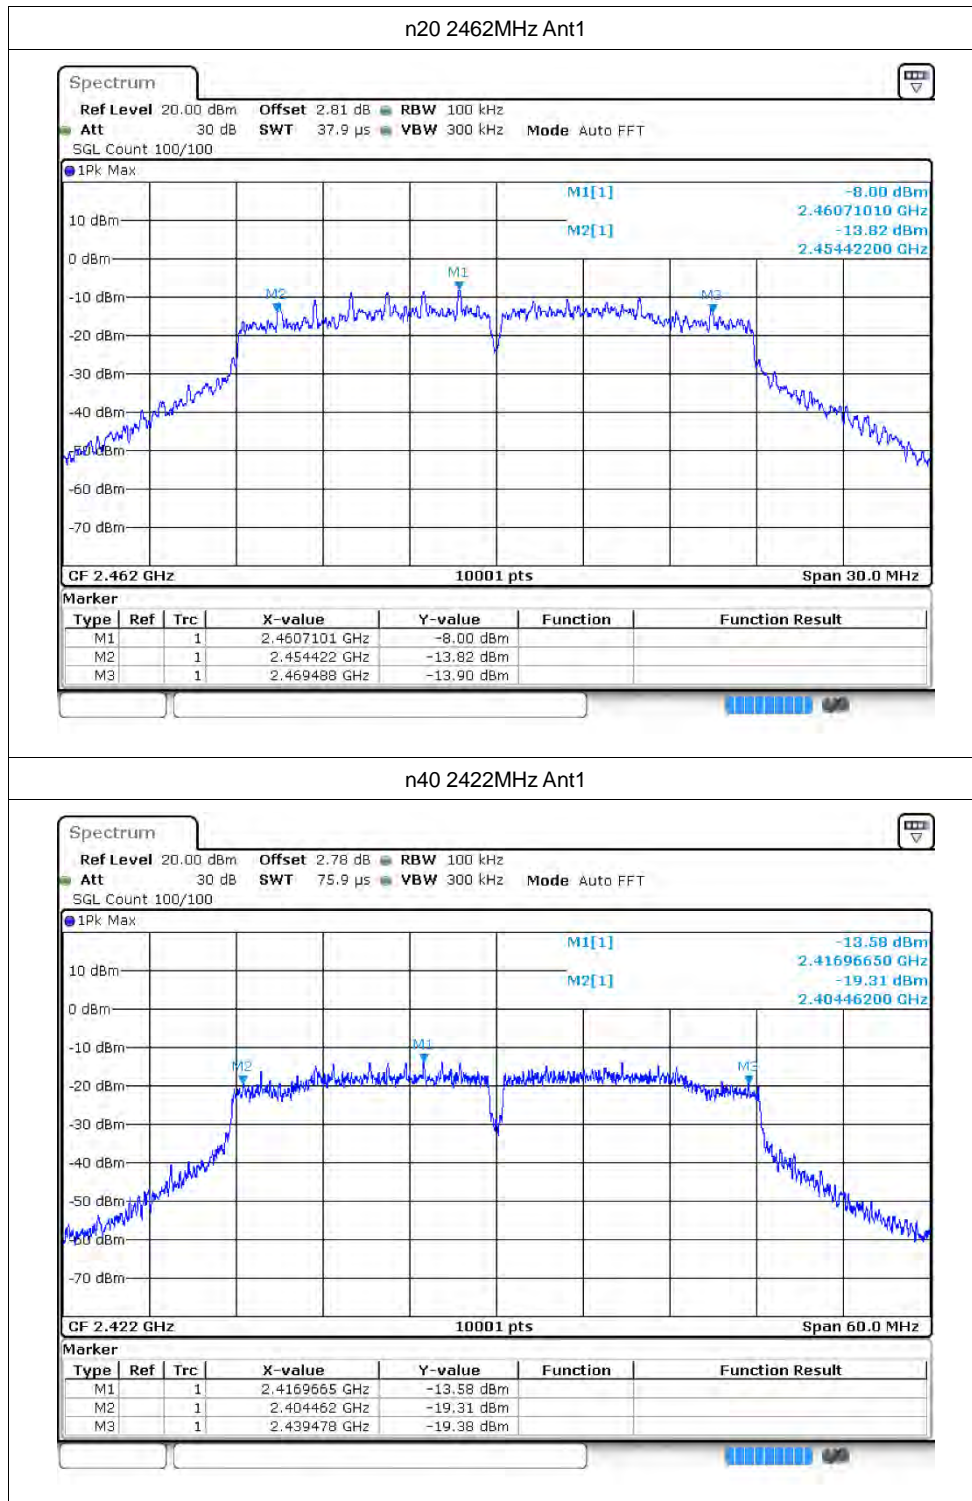


n40 2422MHz Ant1


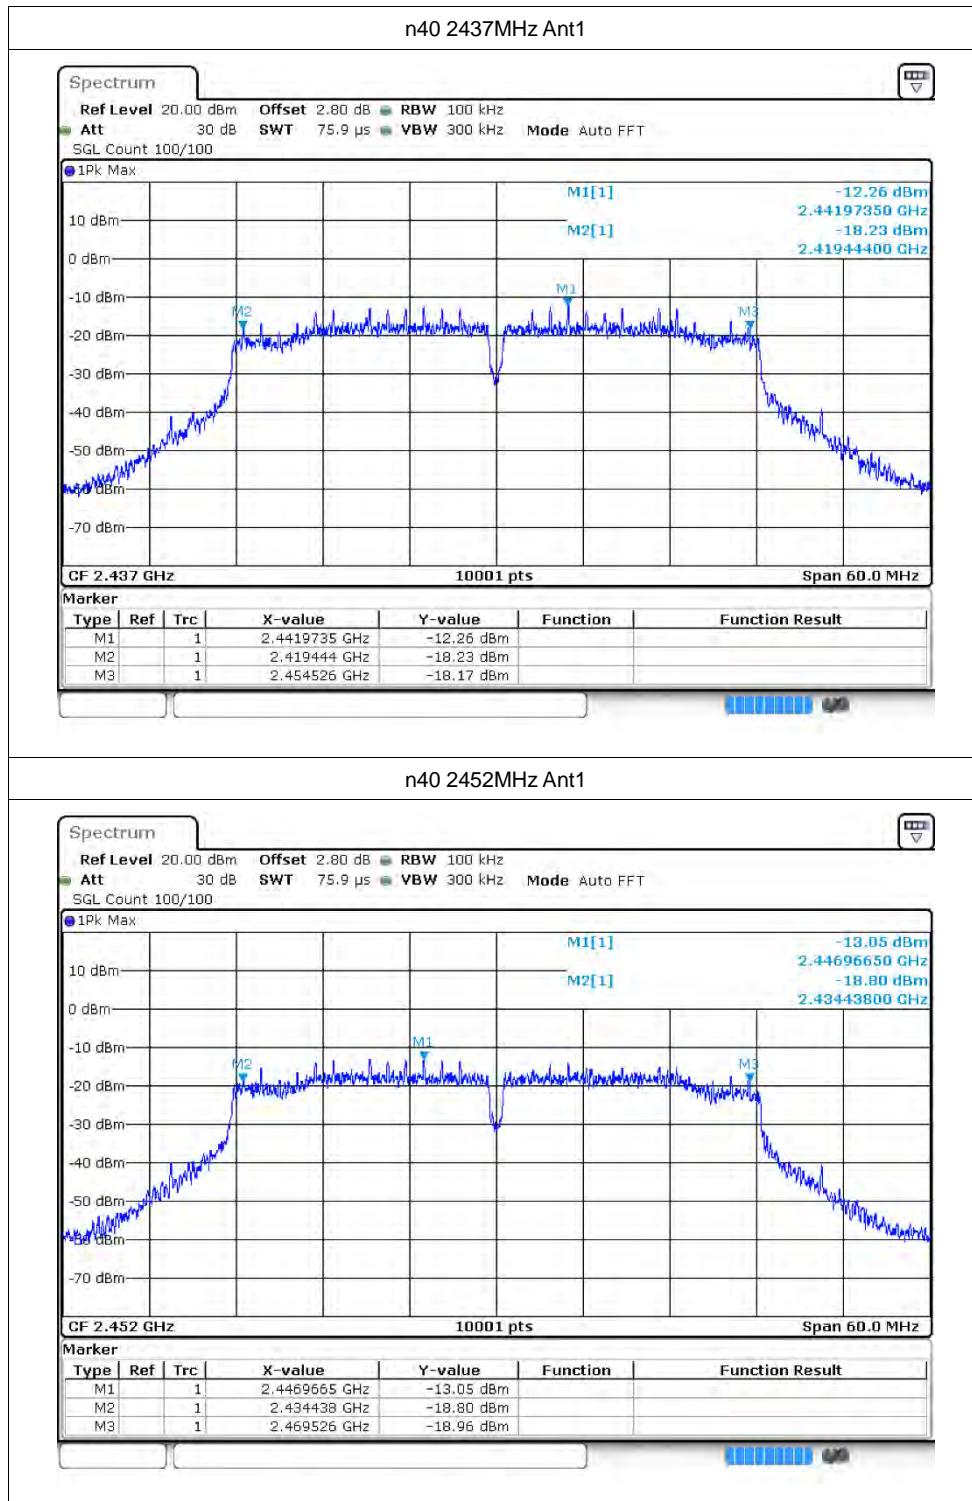




ax20 2412MHz Ant1

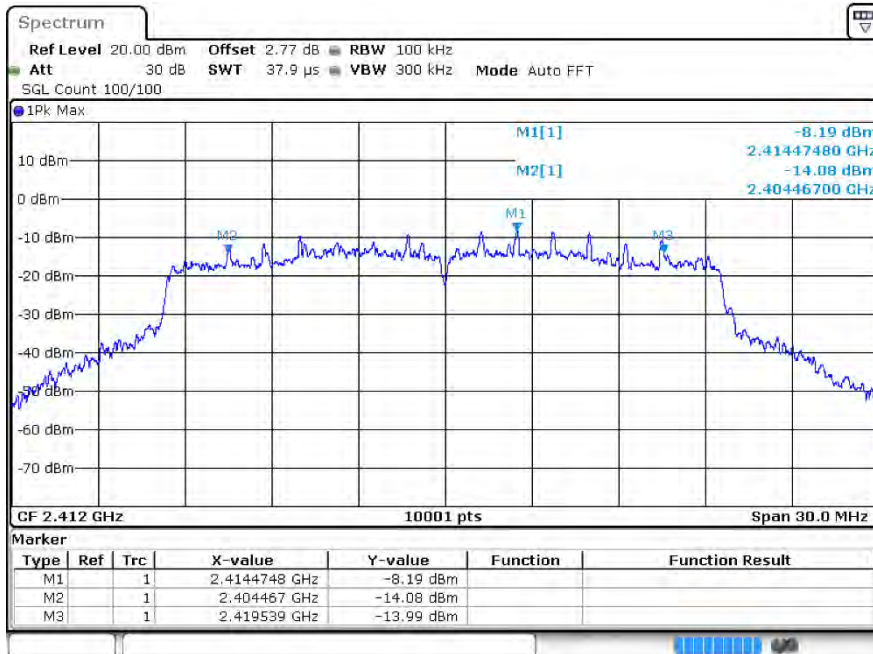

ax20 2437MHz Ant1

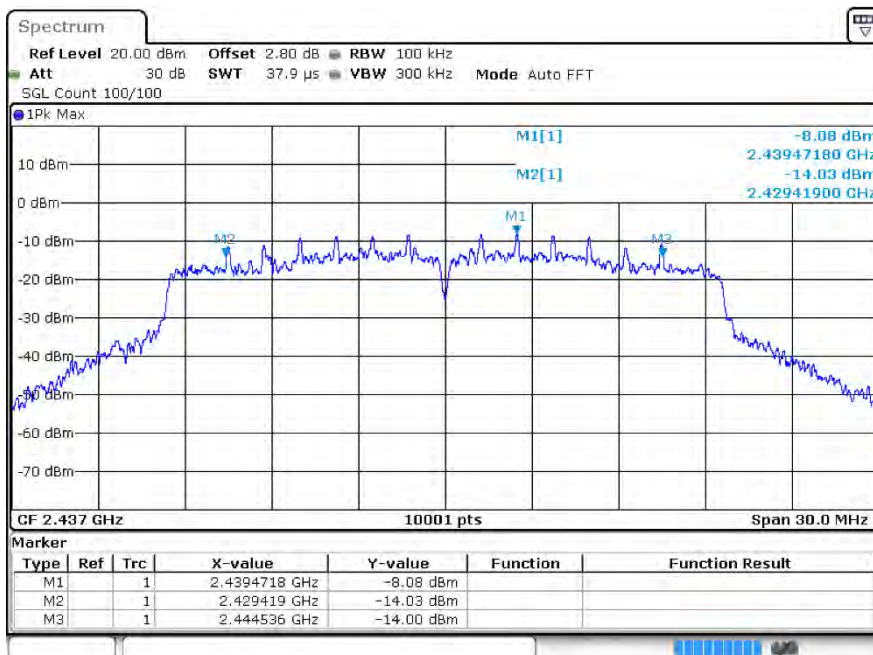


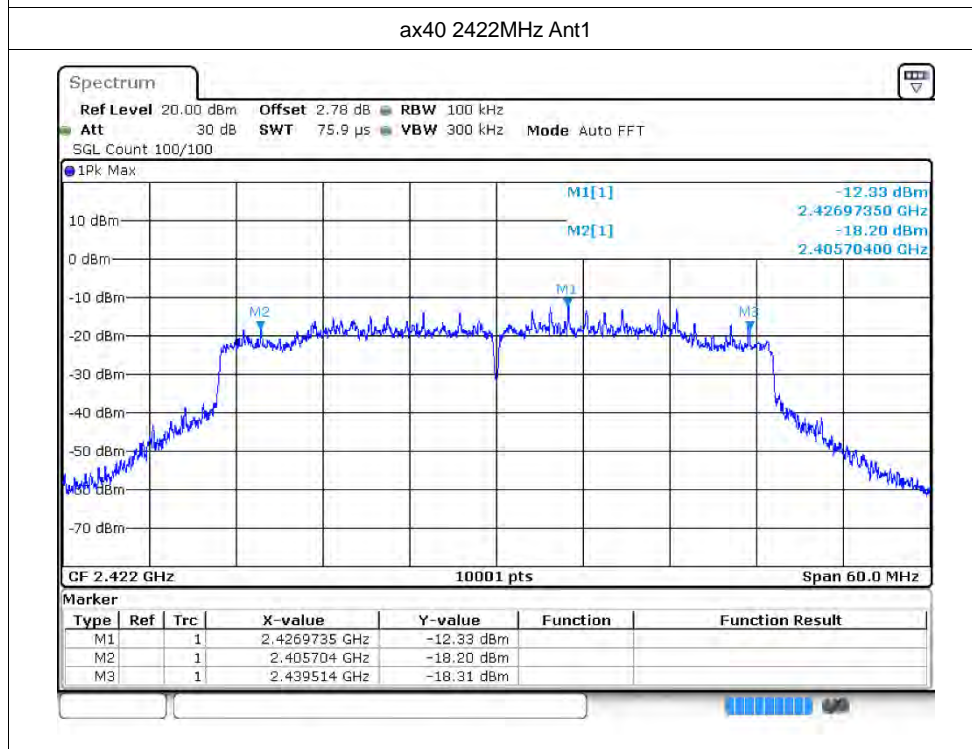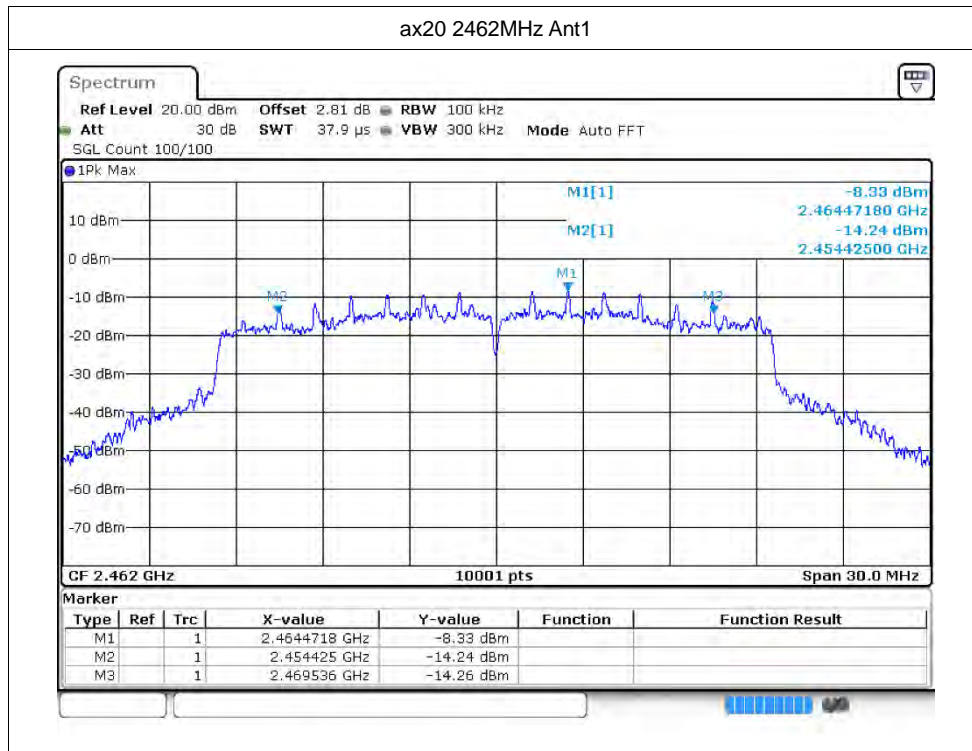

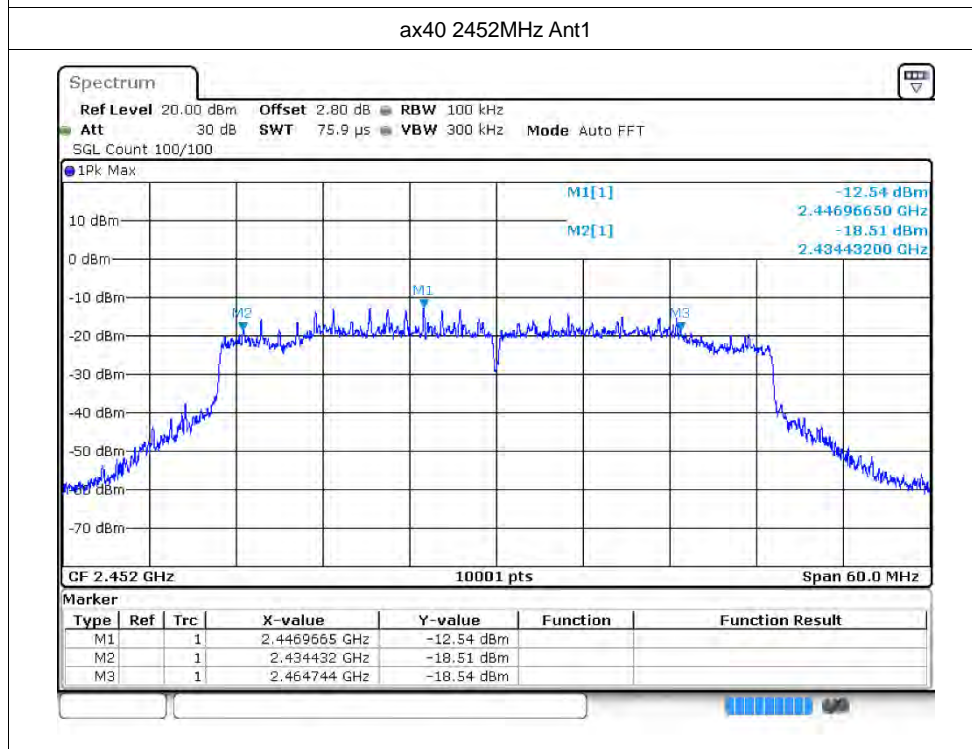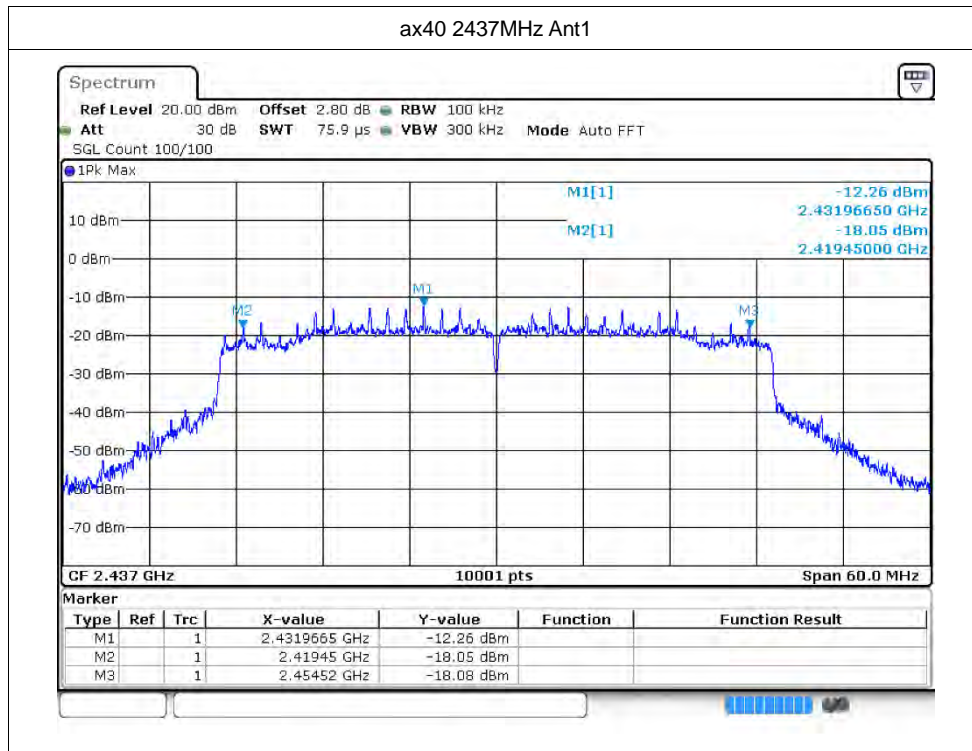






b 2412MHz Ant2

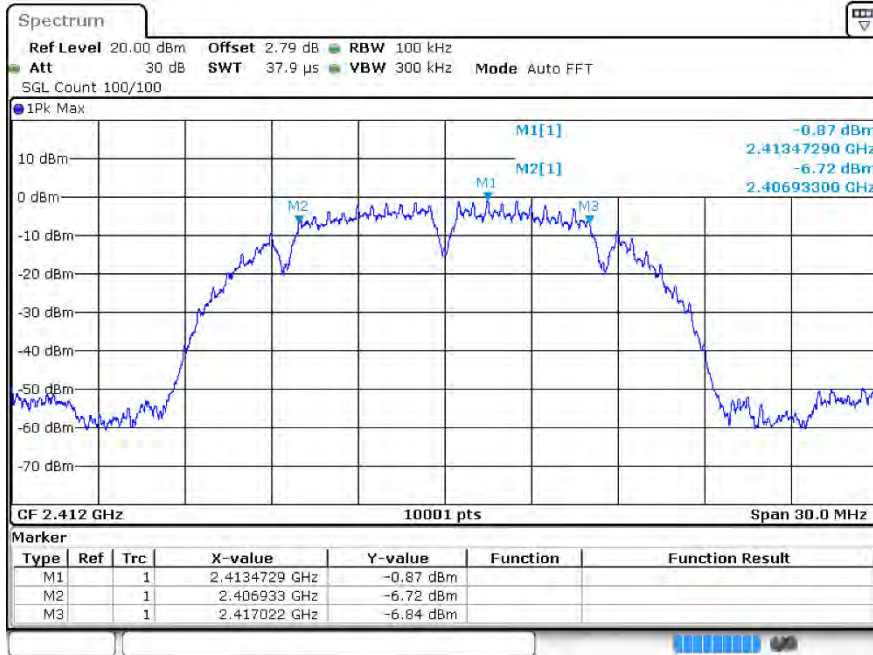




b 2437MHz Ant2

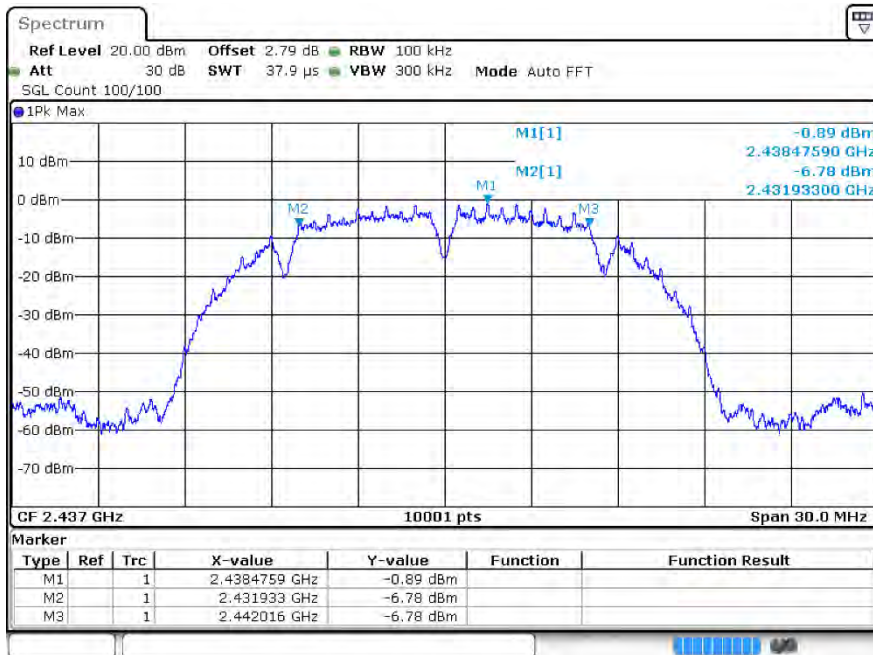


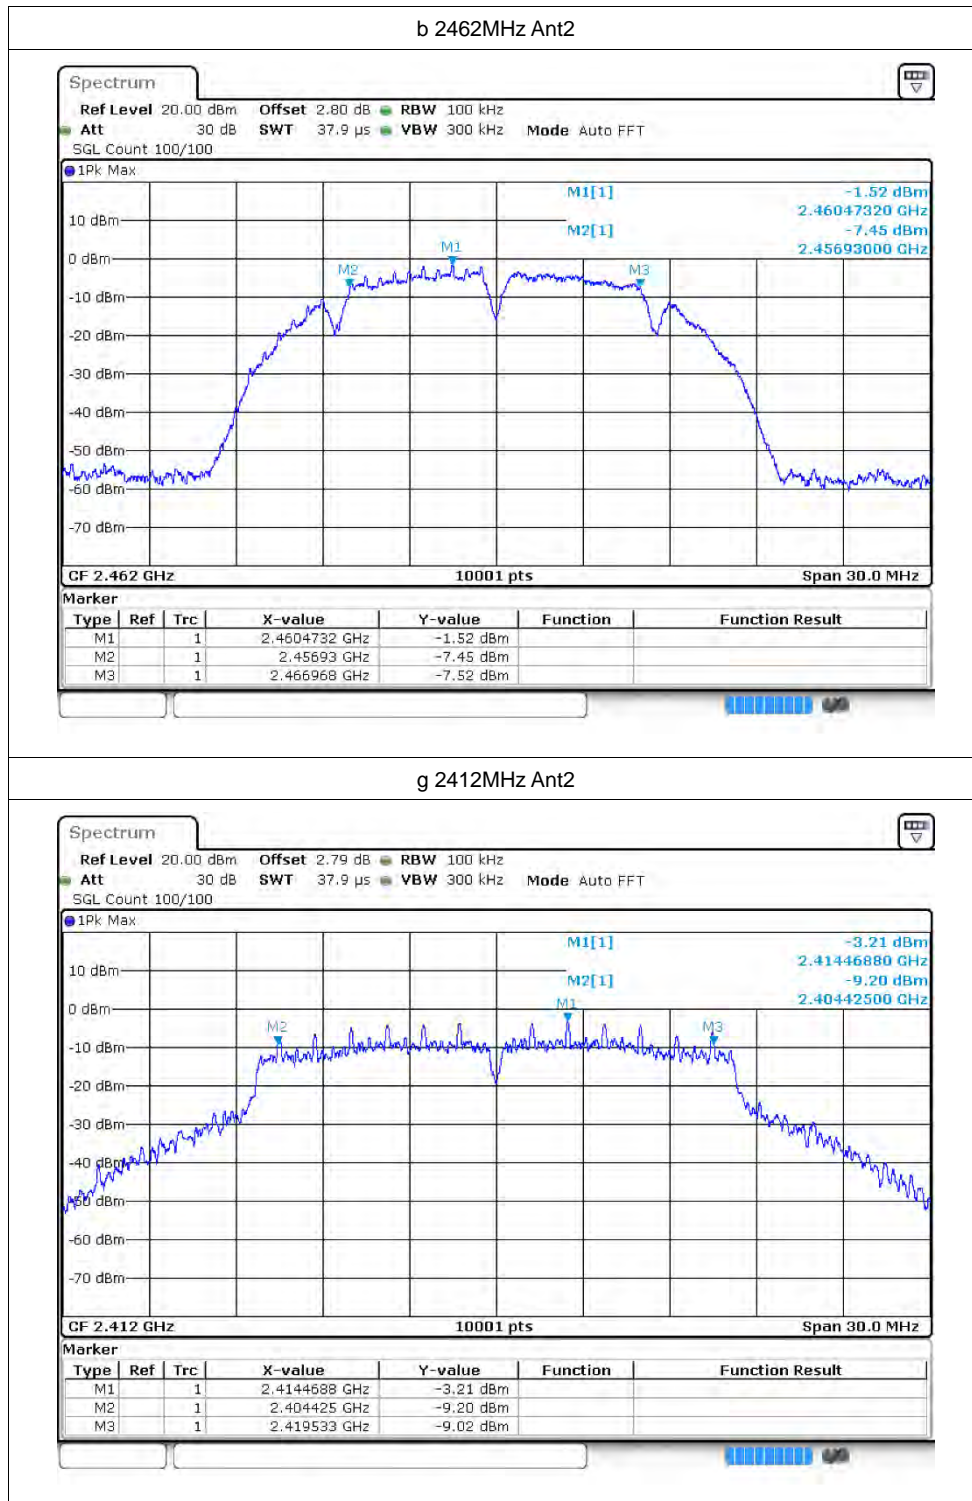

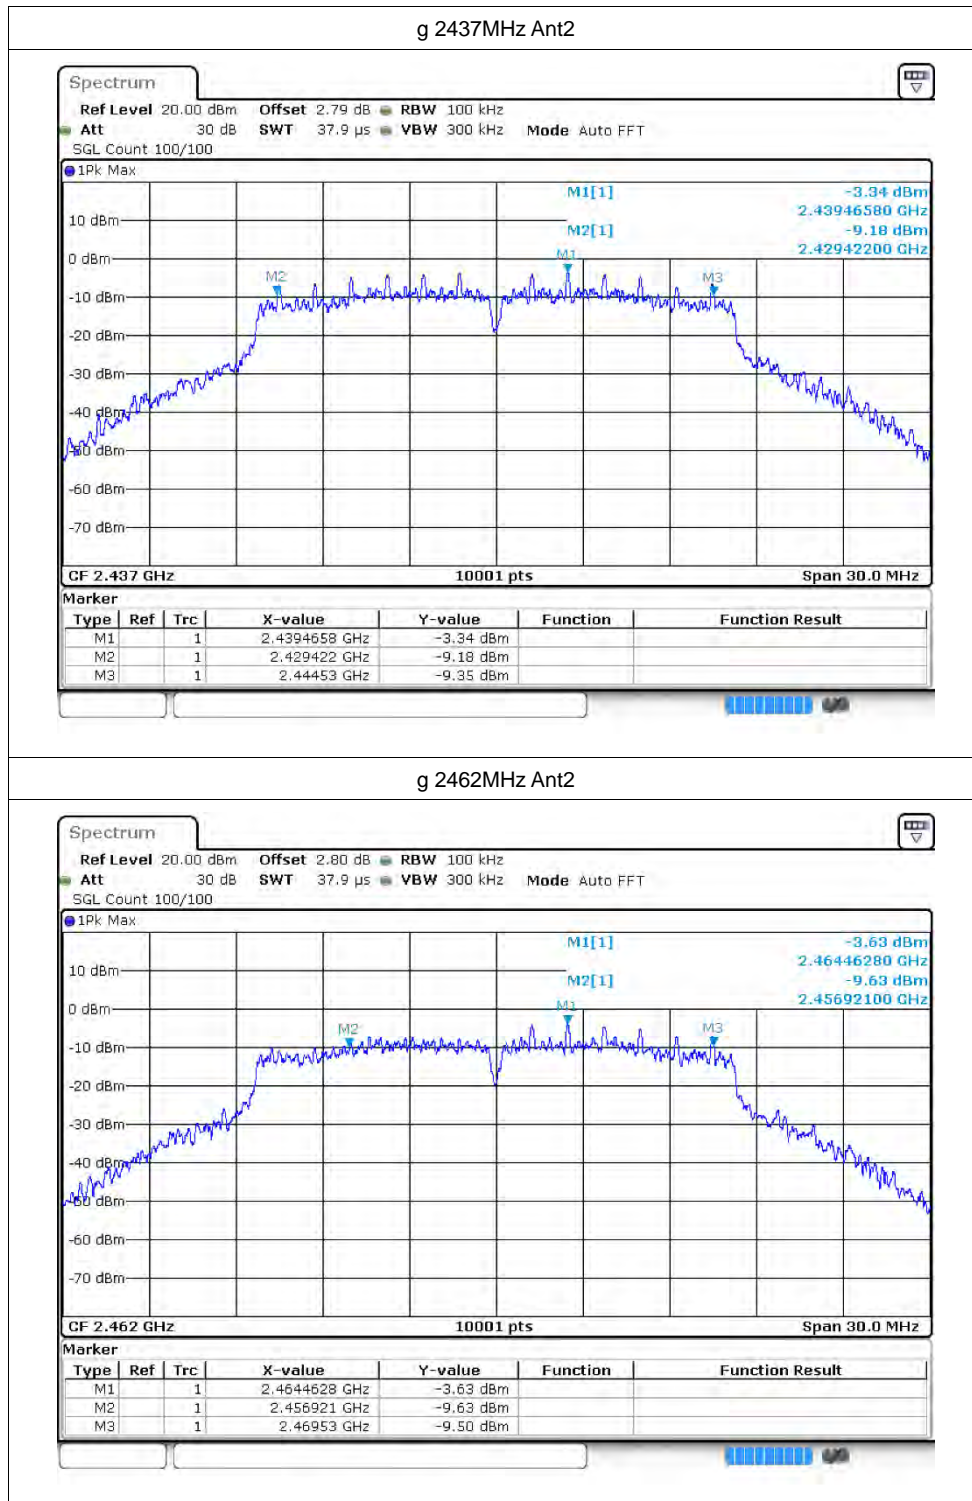


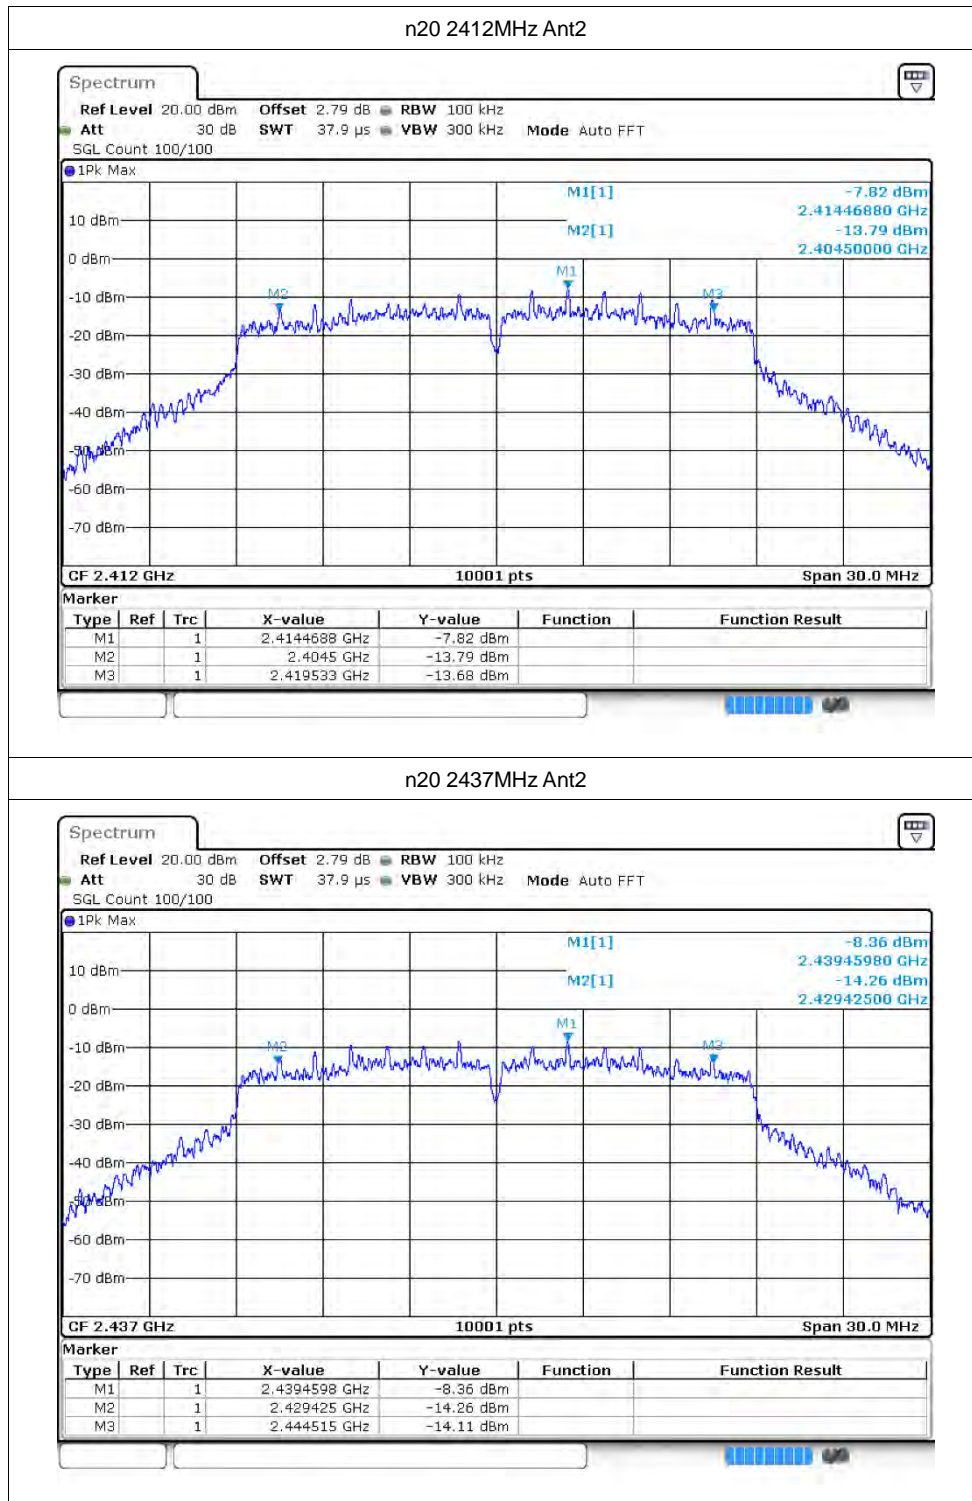

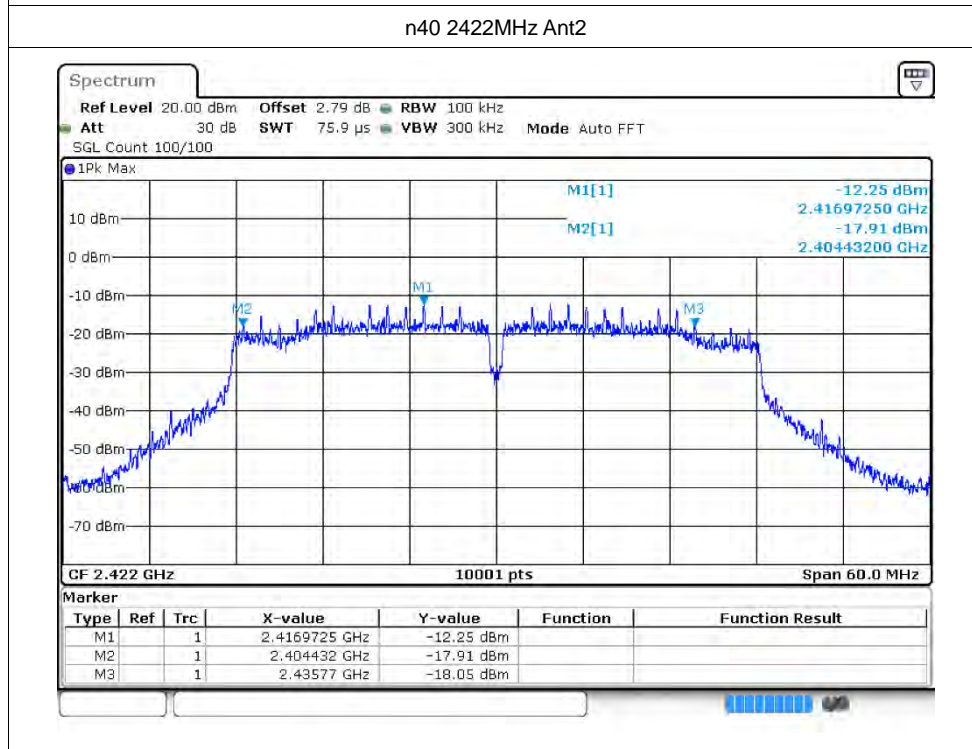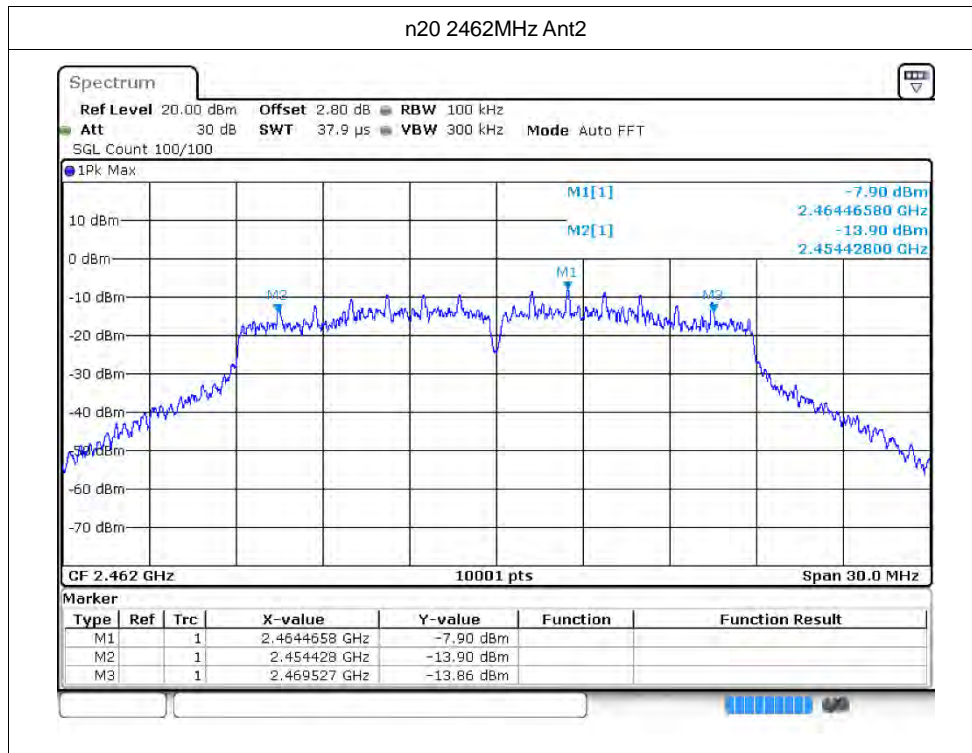


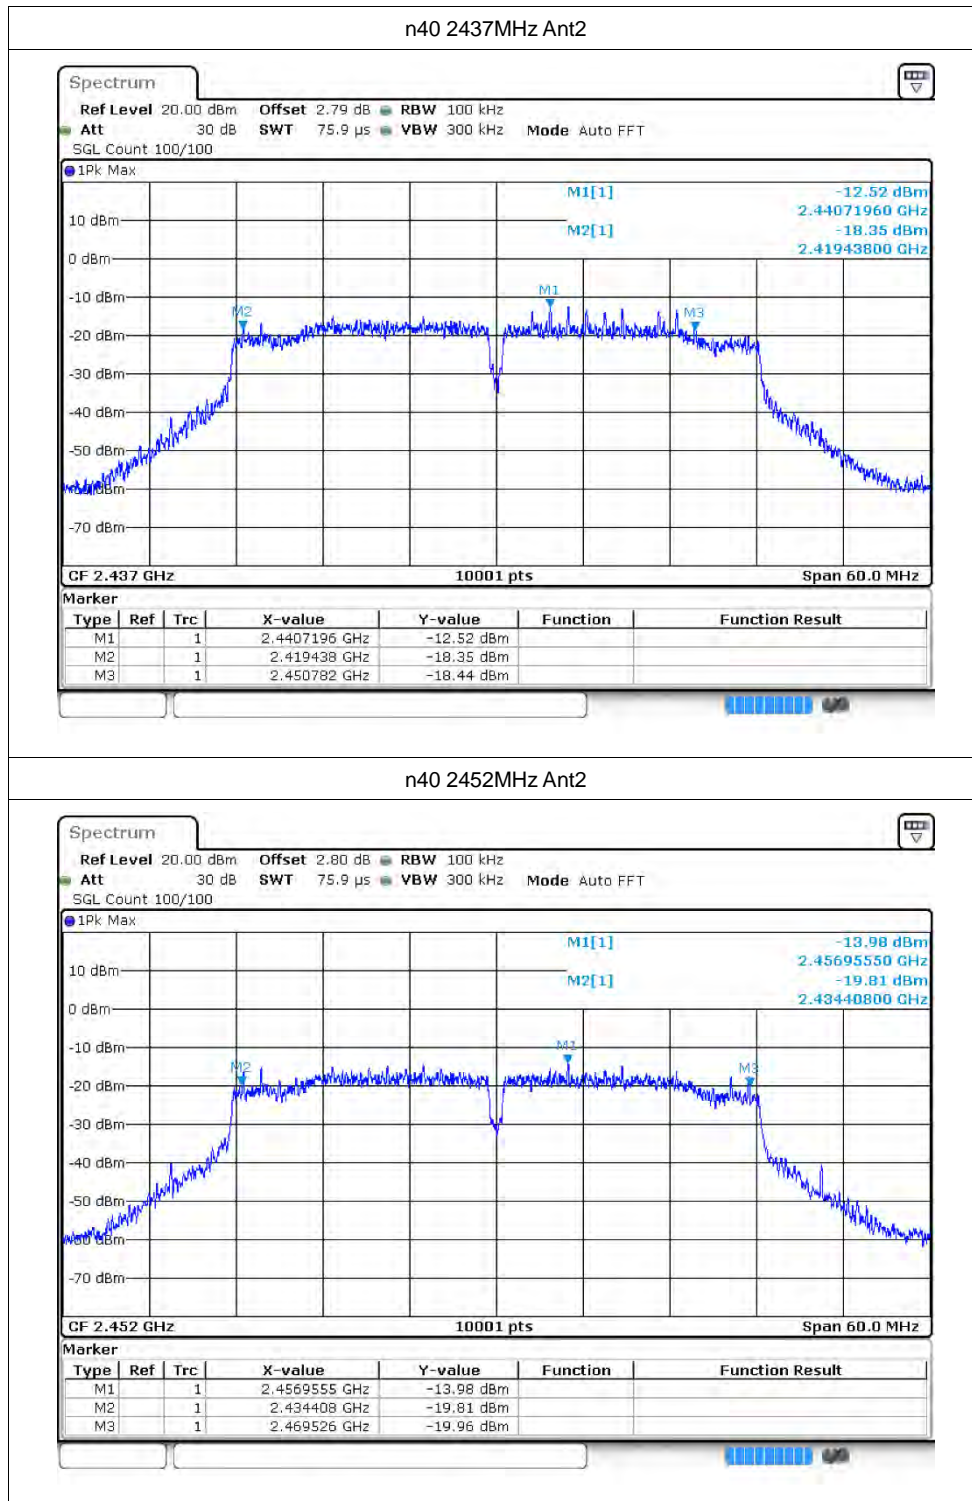



ax20 2412MHz Ant2

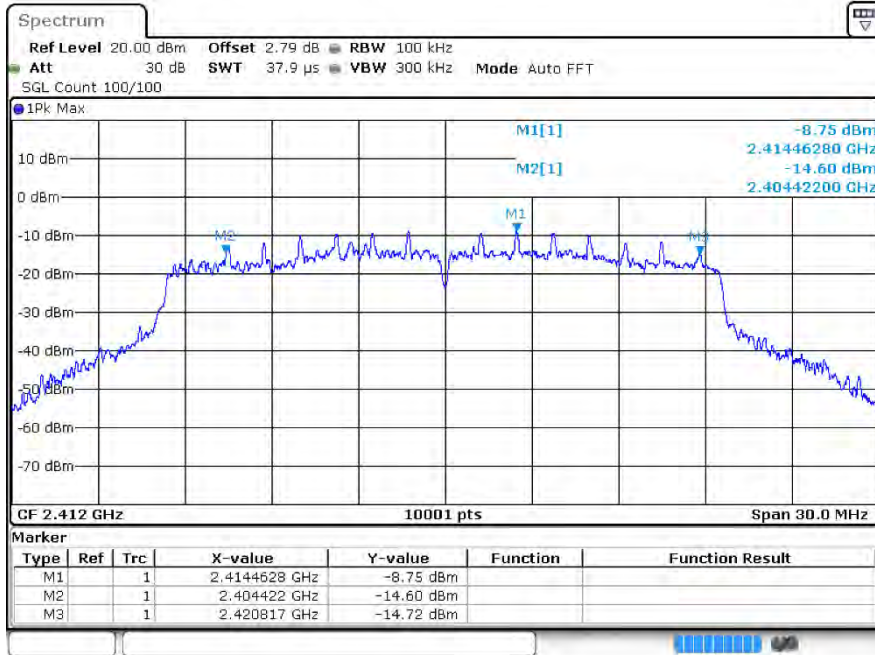

ax20 2437MHz Ant2

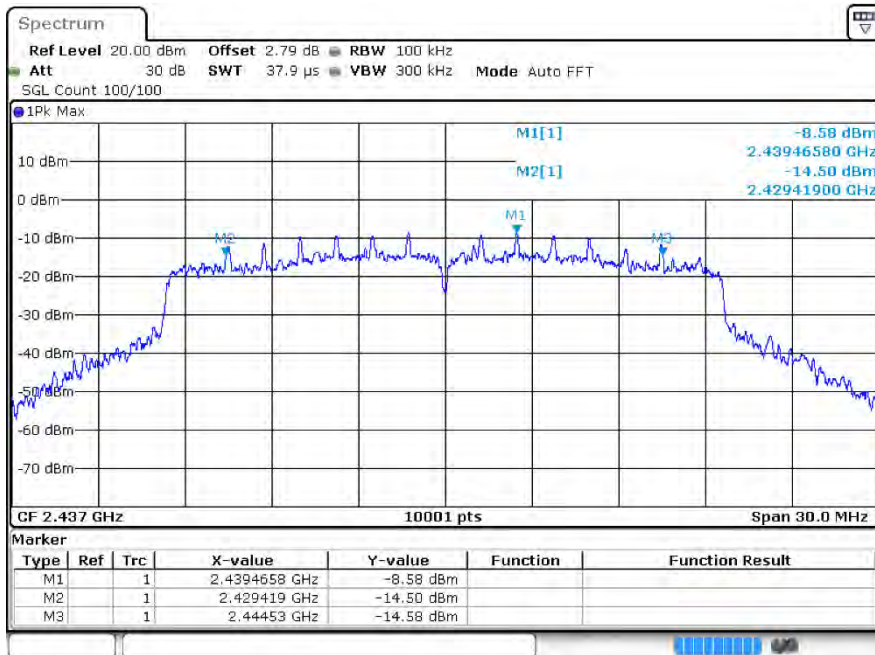

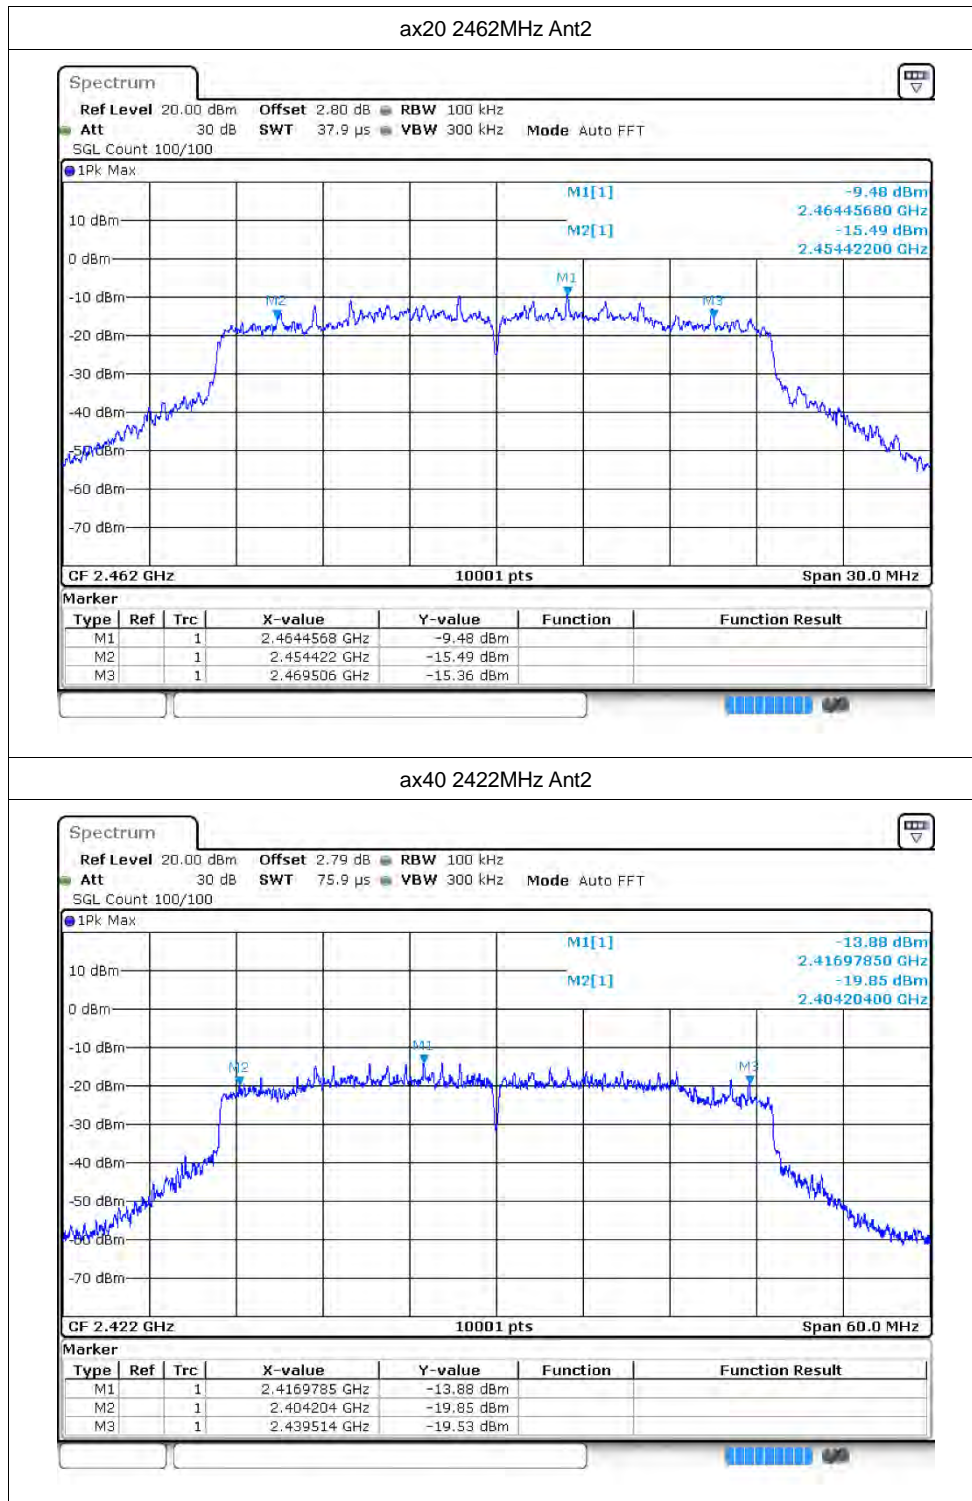

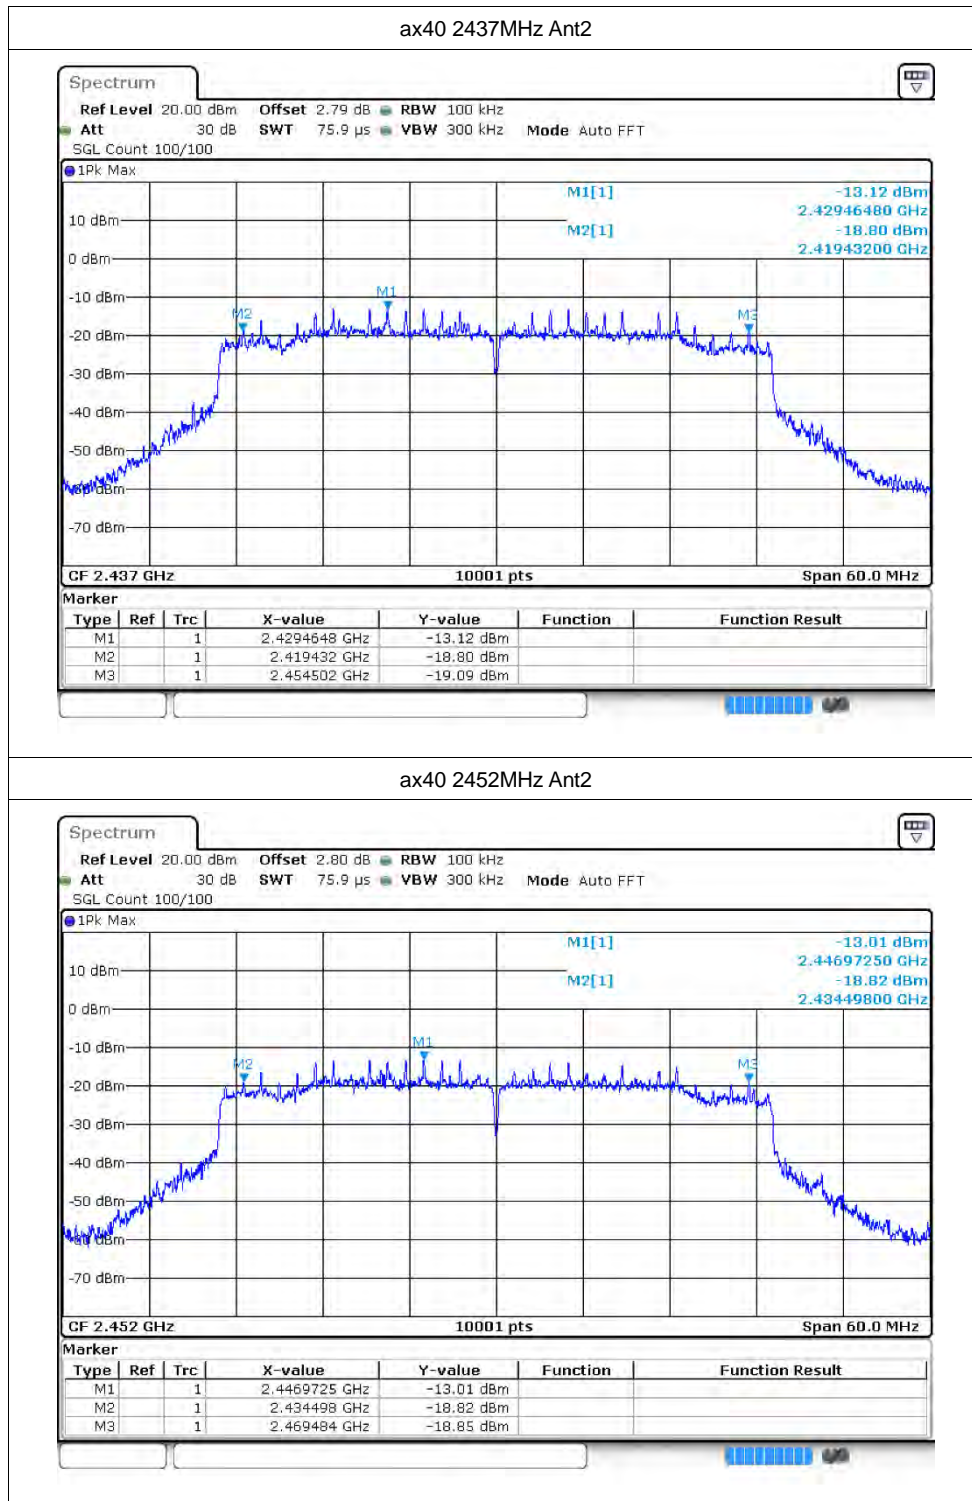

4 Maximum Power Spectral Density Level

4.1 Test Result


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-13.94	≤8	Pass
b	2437	Ant1	-13.88	≤8	Pass
b	2462	Ant1	-14.26	≤8	Pass
g	2412	Ant1	-17.92	≤8	Pass
g	2437	Ant1	-18.25	≤8	Pass
g	2462	Ant1	-18.2	≤8	Pass
n20	2412	Ant1	-21.54	≤8	Pass
n20	2437	Ant1	-22.38	≤8	Pass
n20	2462	Ant1	-21.85	≤8	Pass
n40	2422	Ant1	-25.52	≤8	Pass
n40	2437	Ant1	-26.27	≤8	Pass
n40	2452	Ant1	-25.94	≤8	Pass
ax20	2412	Ant1	-8.68	≤8	Pass
ax20	2437	Ant1	-8.37	≤8	Pass
ax20	2462	Ant1	-8.14	≤8	Pass
ax40	2422	Ant1	-13.52	≤8	Pass
ax40	2437	Ant1	-12.18	≤8	Pass
ax40	2452	Ant1	-12.77	≤8	Pass
b	2412	Ant2	-14.42	≤8	Pass
b	2437	Ant2	-14.35	≤8	Pass
b	2462	Ant2	-14.4	≤8	Pass
g	2412	Ant2	-18.38	≤8	Pass
g	2437	Ant2	-17.95	≤8	Pass
g	2462	Ant2	-18.11	≤8	Pass
n20	2412	Ant2	-22.21	≤8	Pass
n20	2437	Ant2	-22.23	≤8	Pass
n20	2462	Ant2	-22.27	≤8	Pass
n40	2422	Ant2	-25.13	≤8	Pass
n40	2437	Ant2	-26.69	≤8	Pass
n40	2452	Ant2	-26.51	≤8	Pass
ax20	2412	Ant2	-8.5	≤8	Pass
ax20	2437	Ant2	-8.42	≤8	Pass
ax20	2462	Ant2	-8.49	≤8	Pass





ax40	2422	Ant2	-12.65	≤8	Pass
ax40	2437	Ant2	-13.34	≤8	Pass
ax40	2452	Ant2	-13.18	≤8	Pass





4.2 Test Graphs

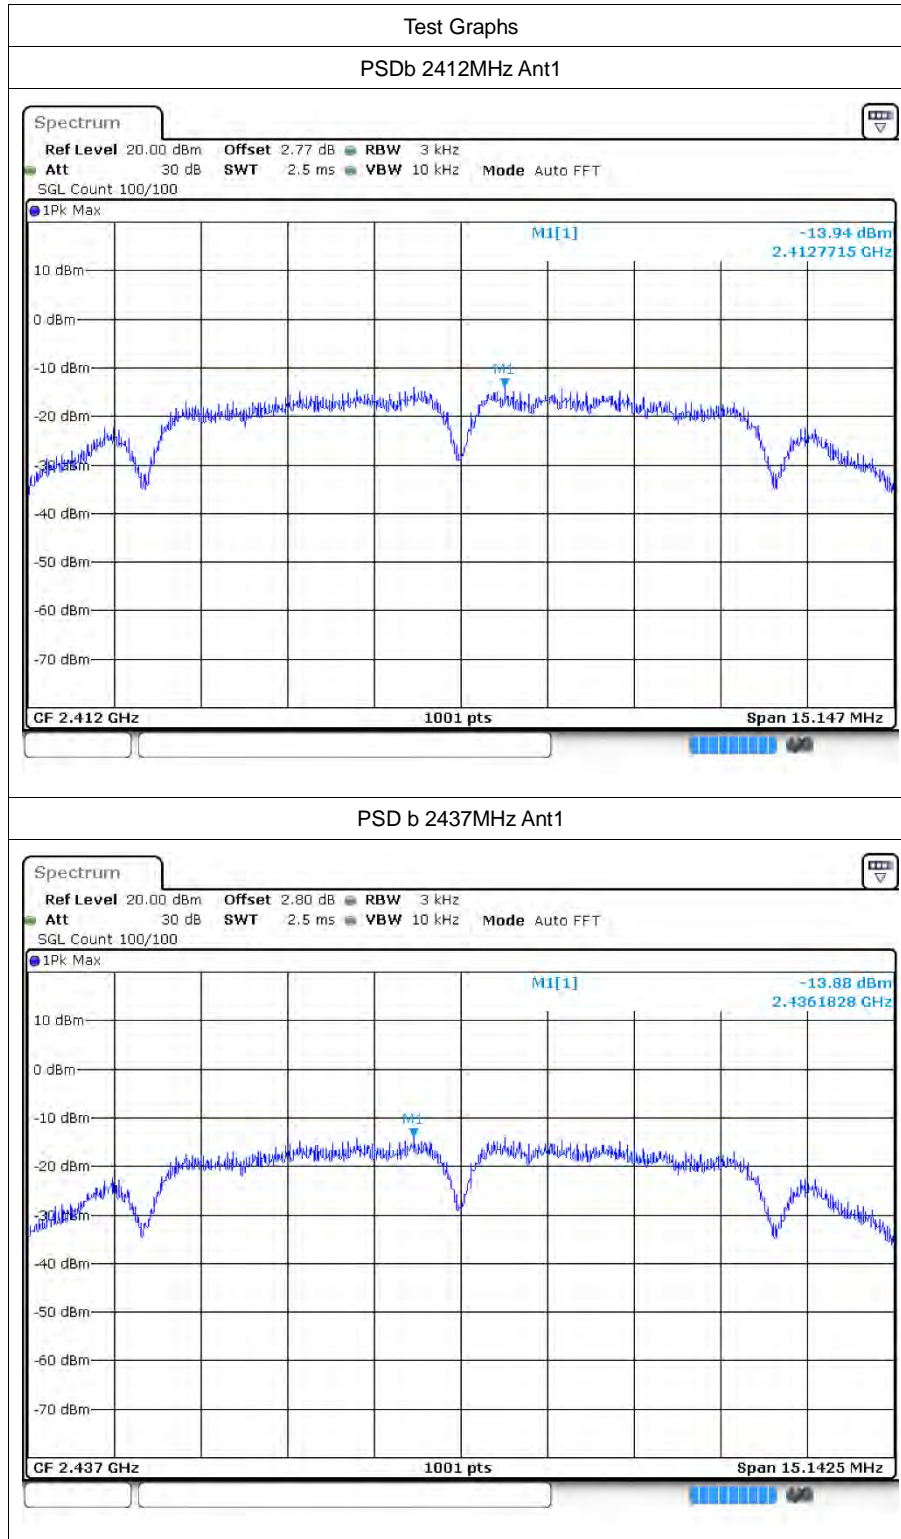



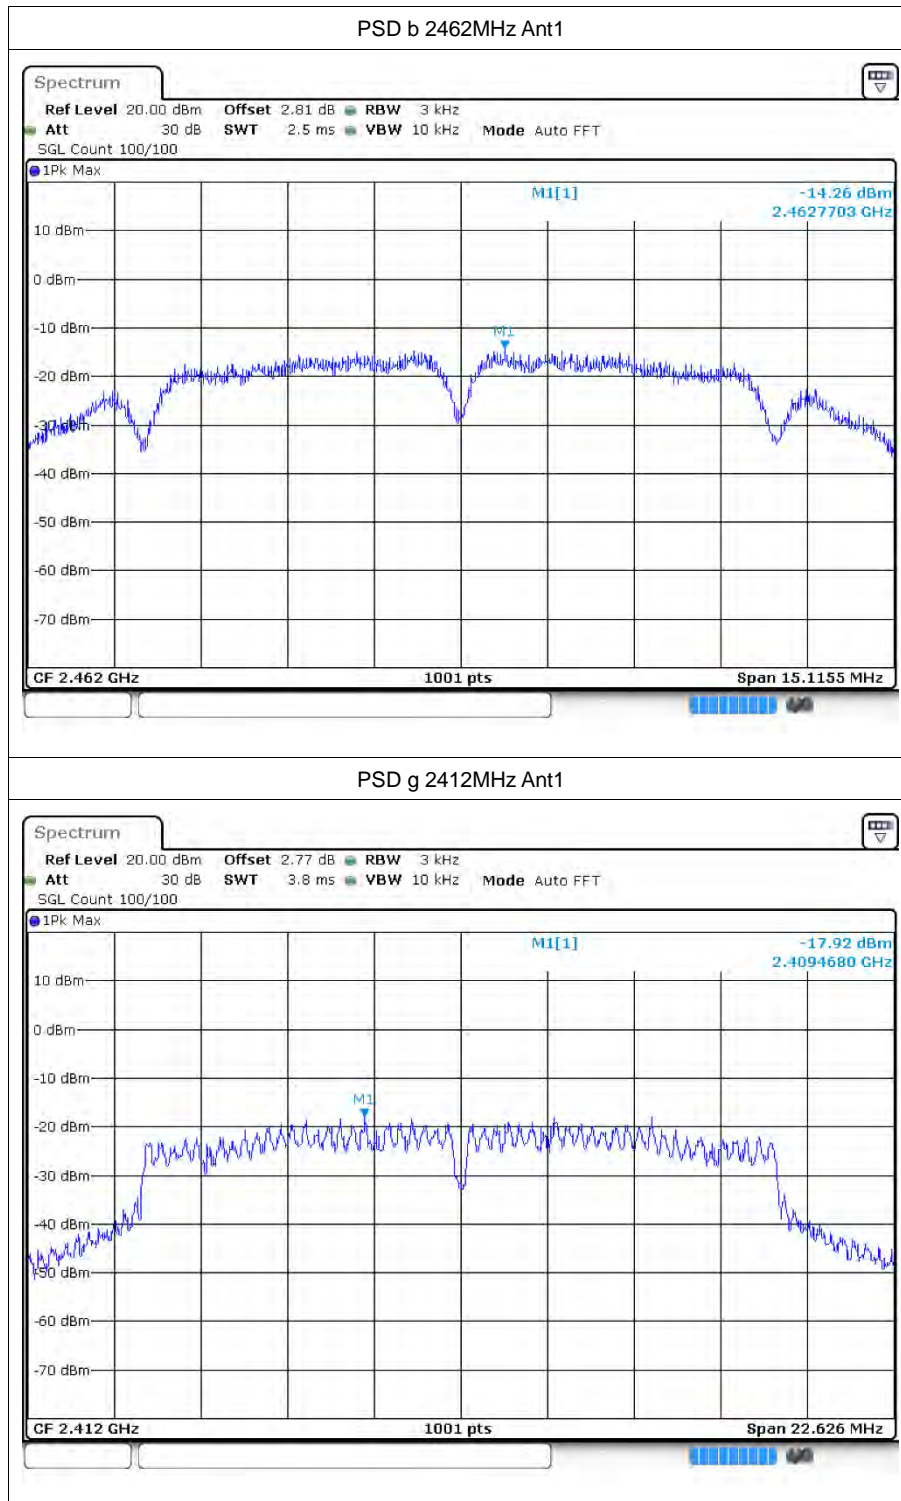


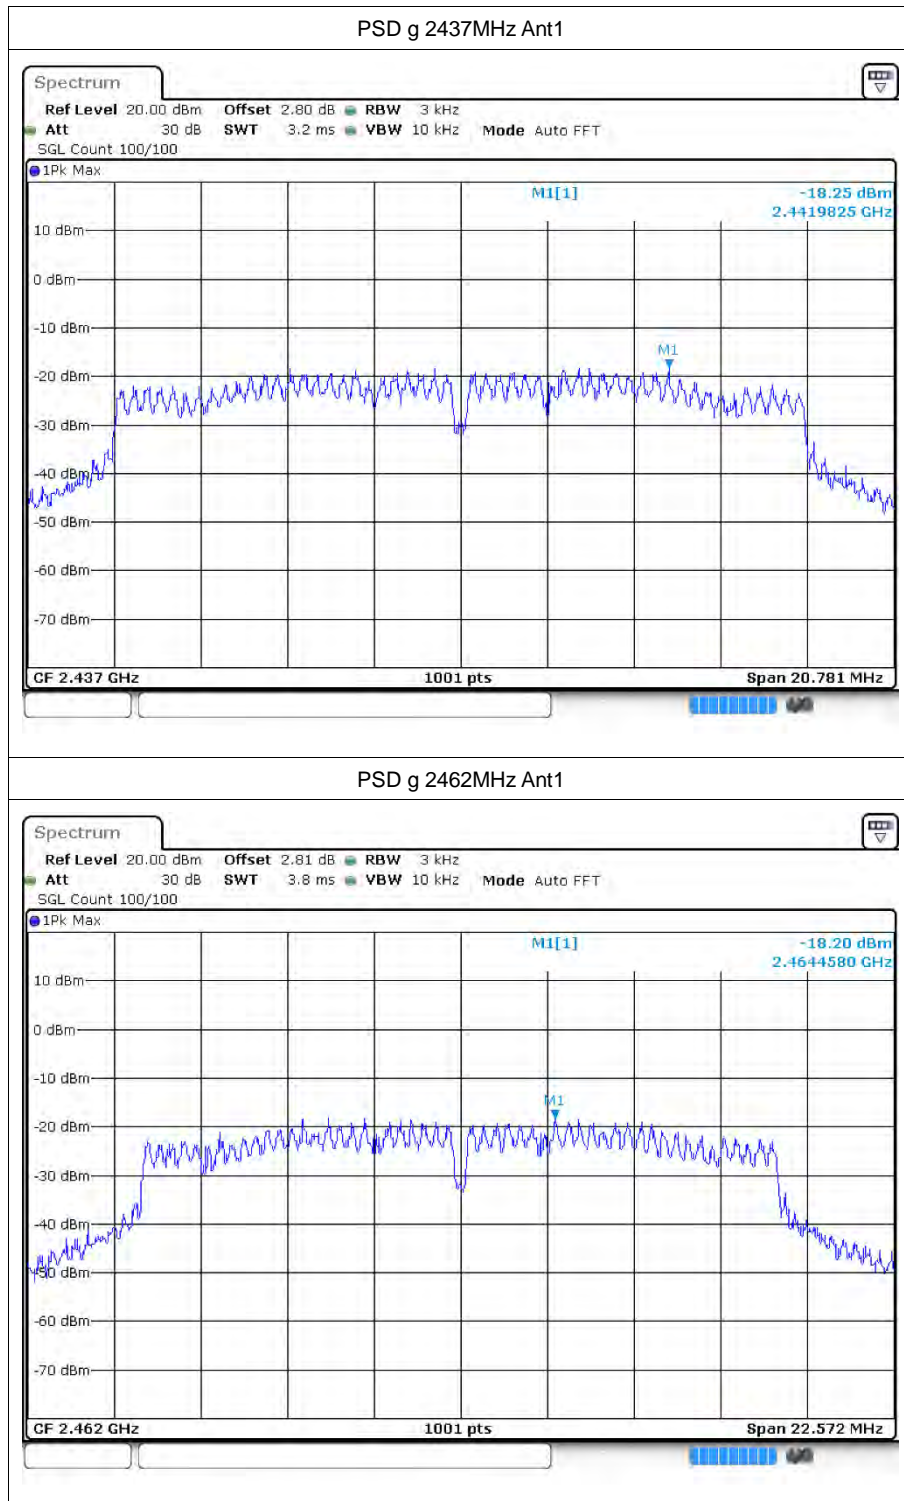


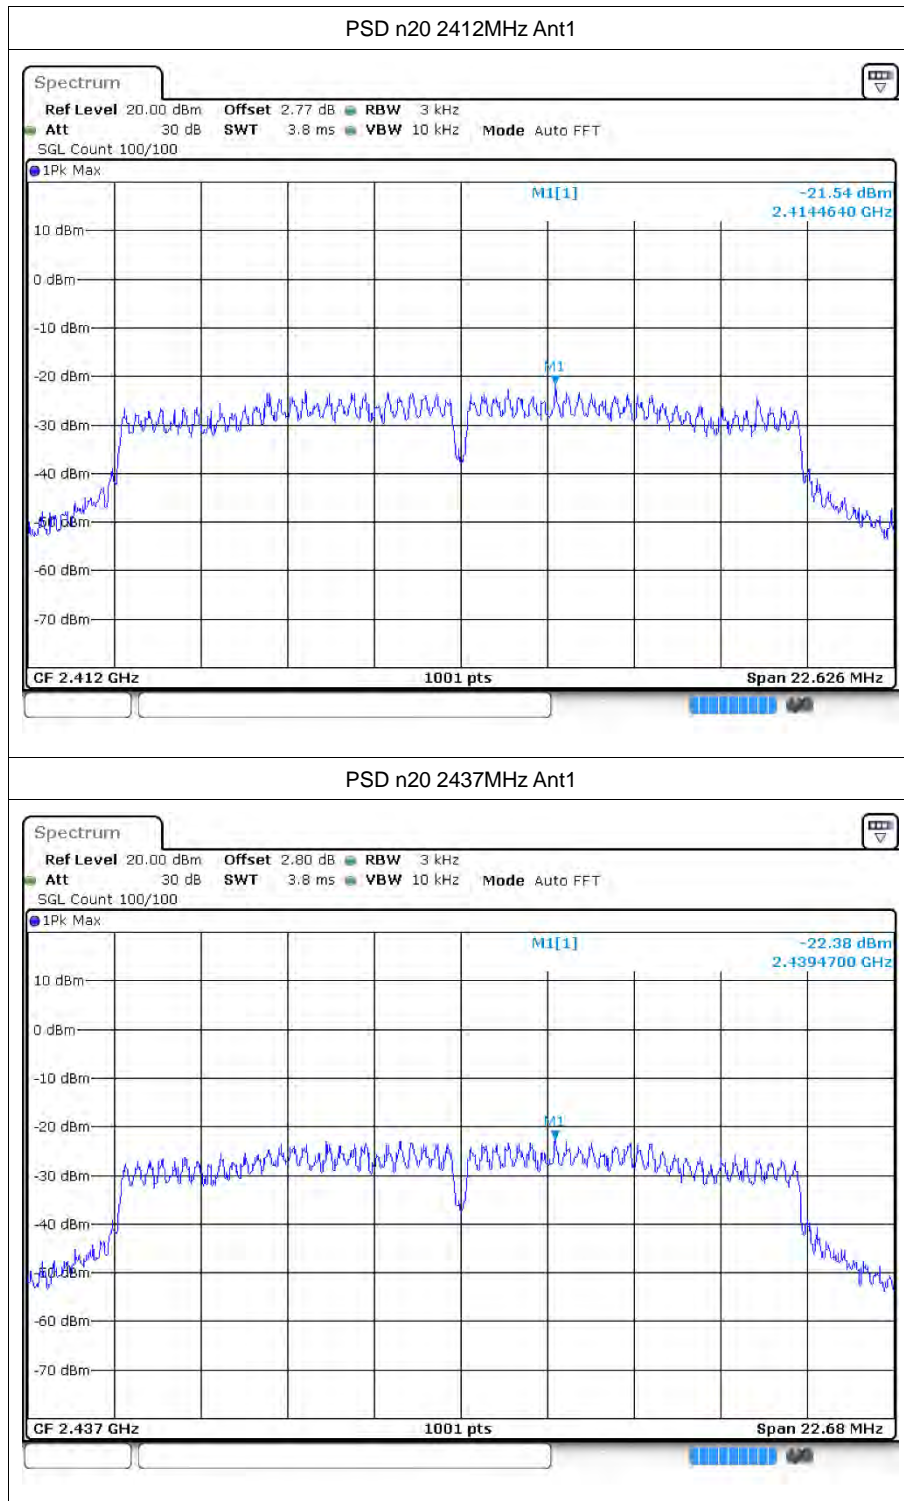


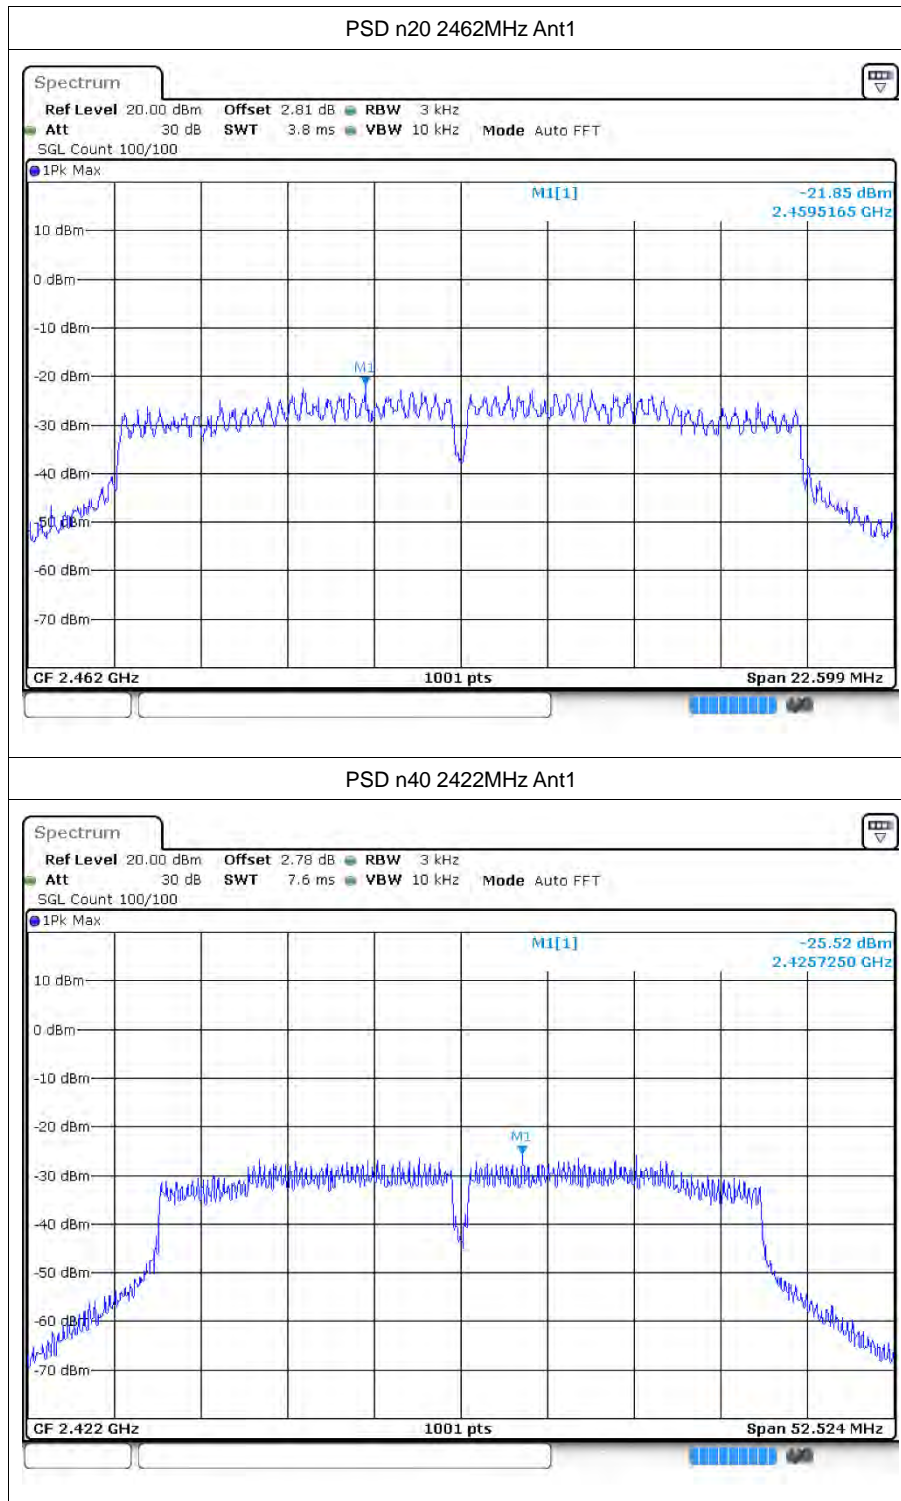


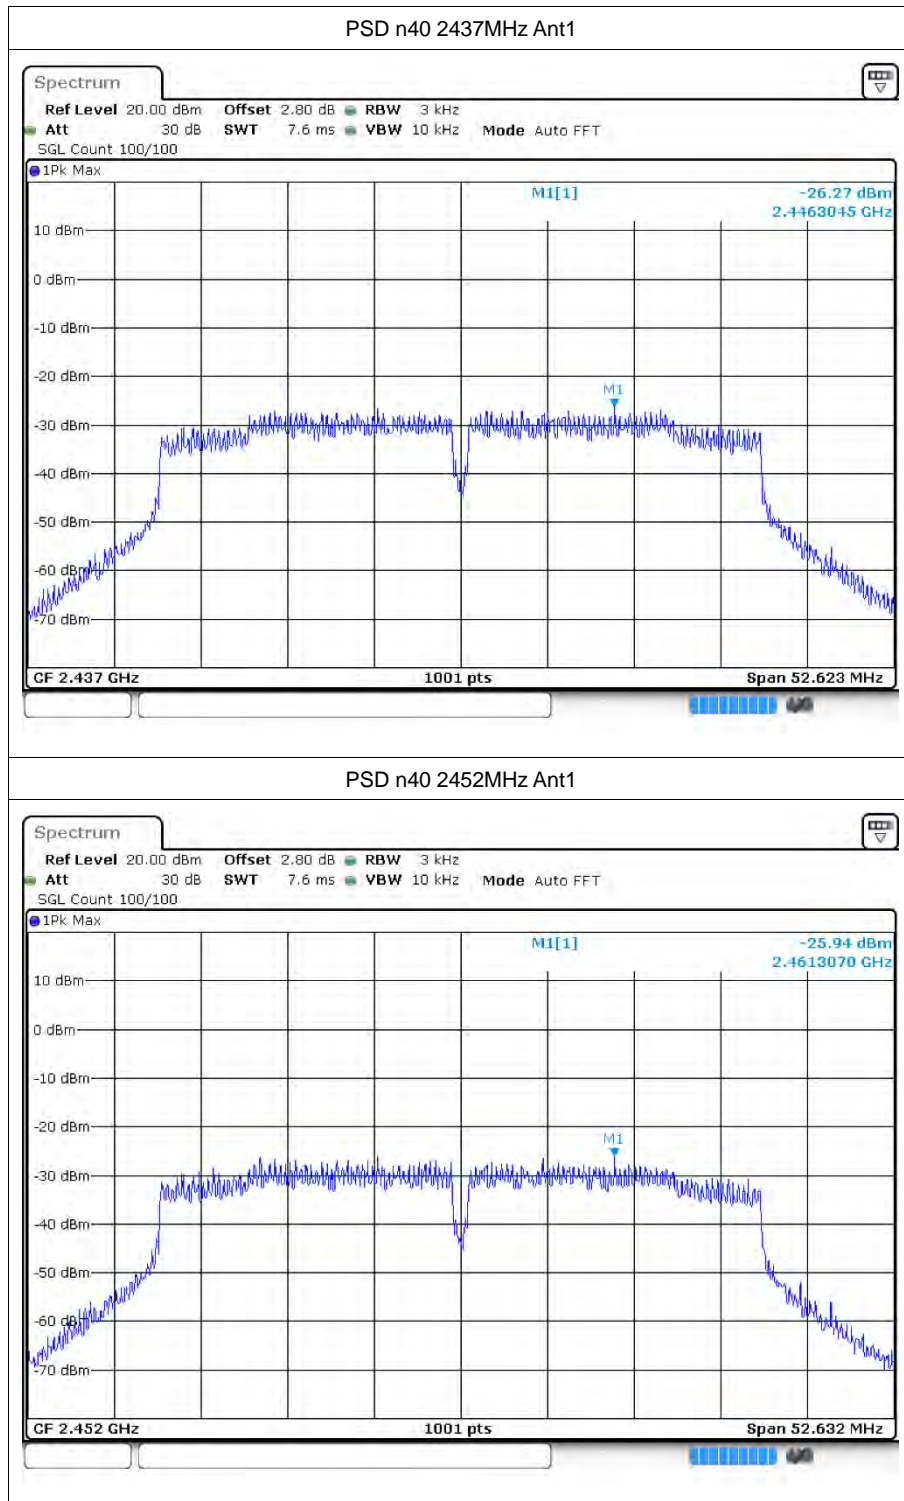


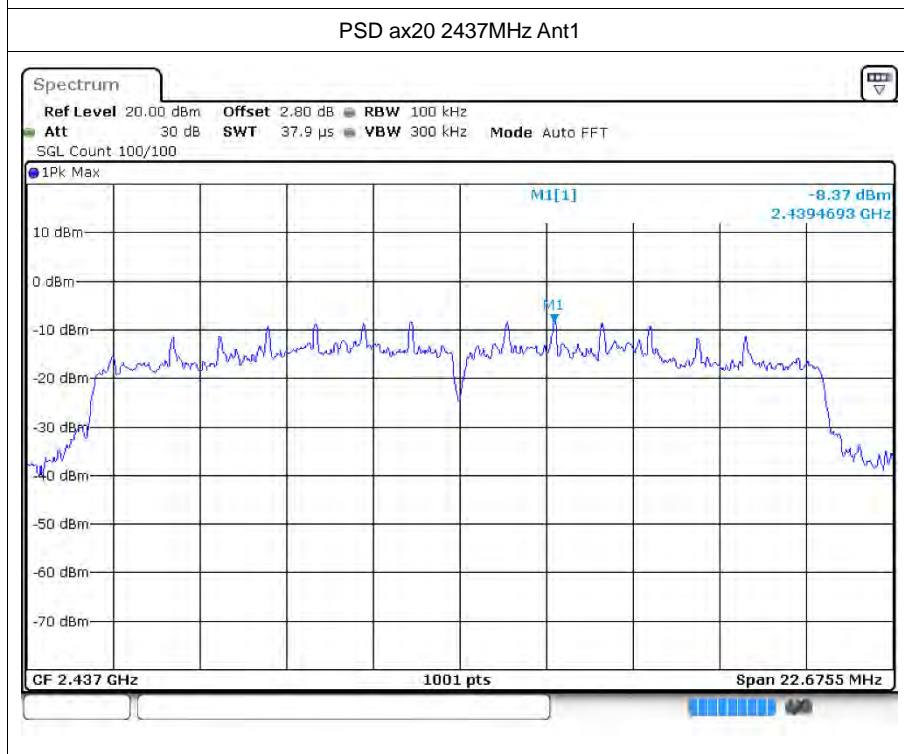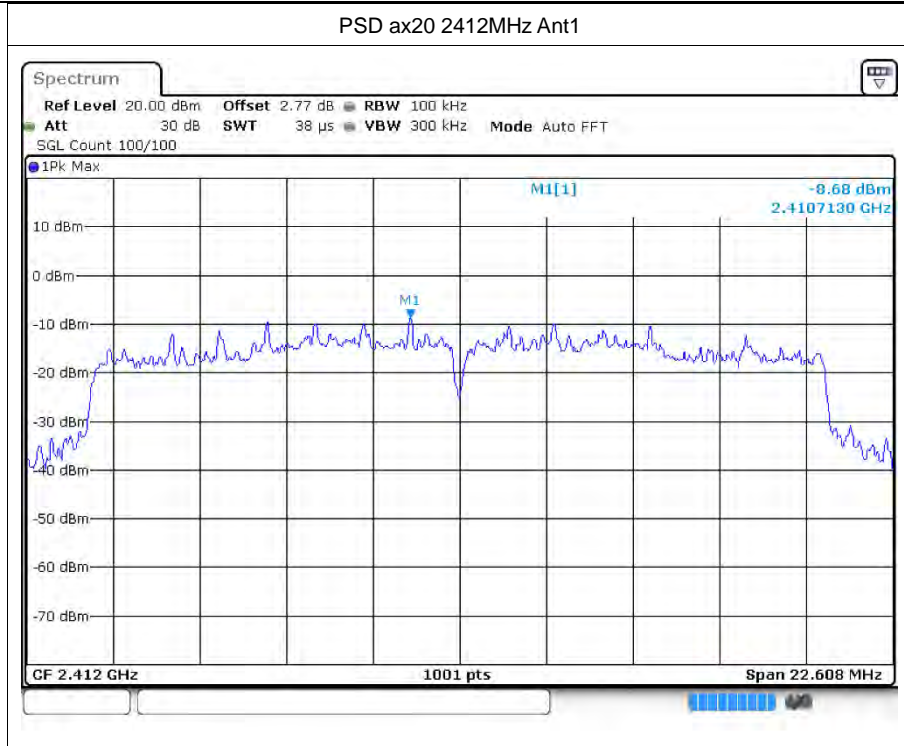


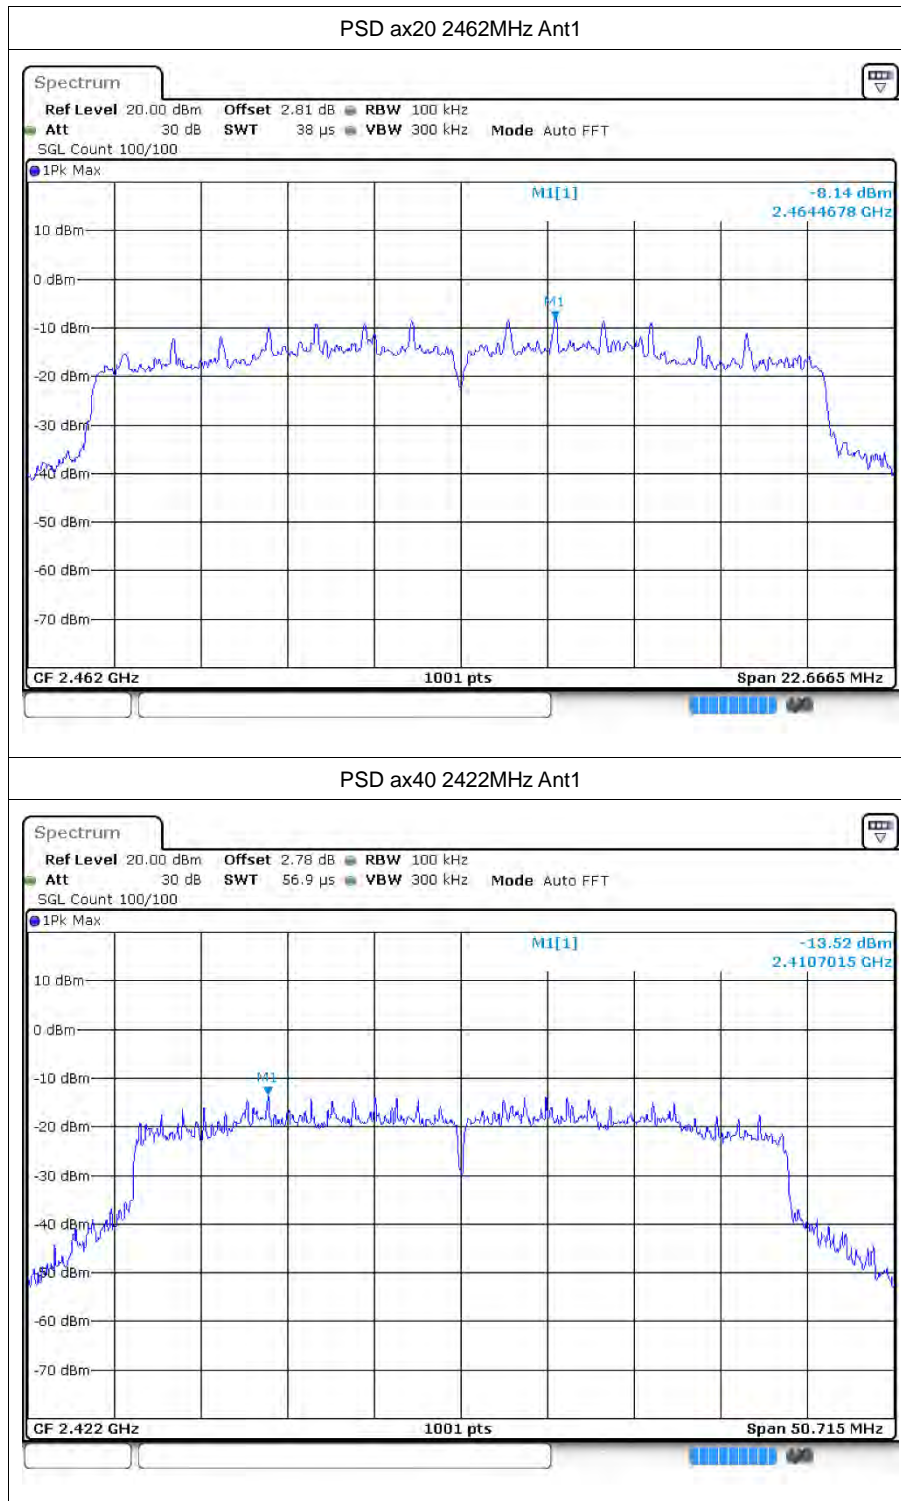


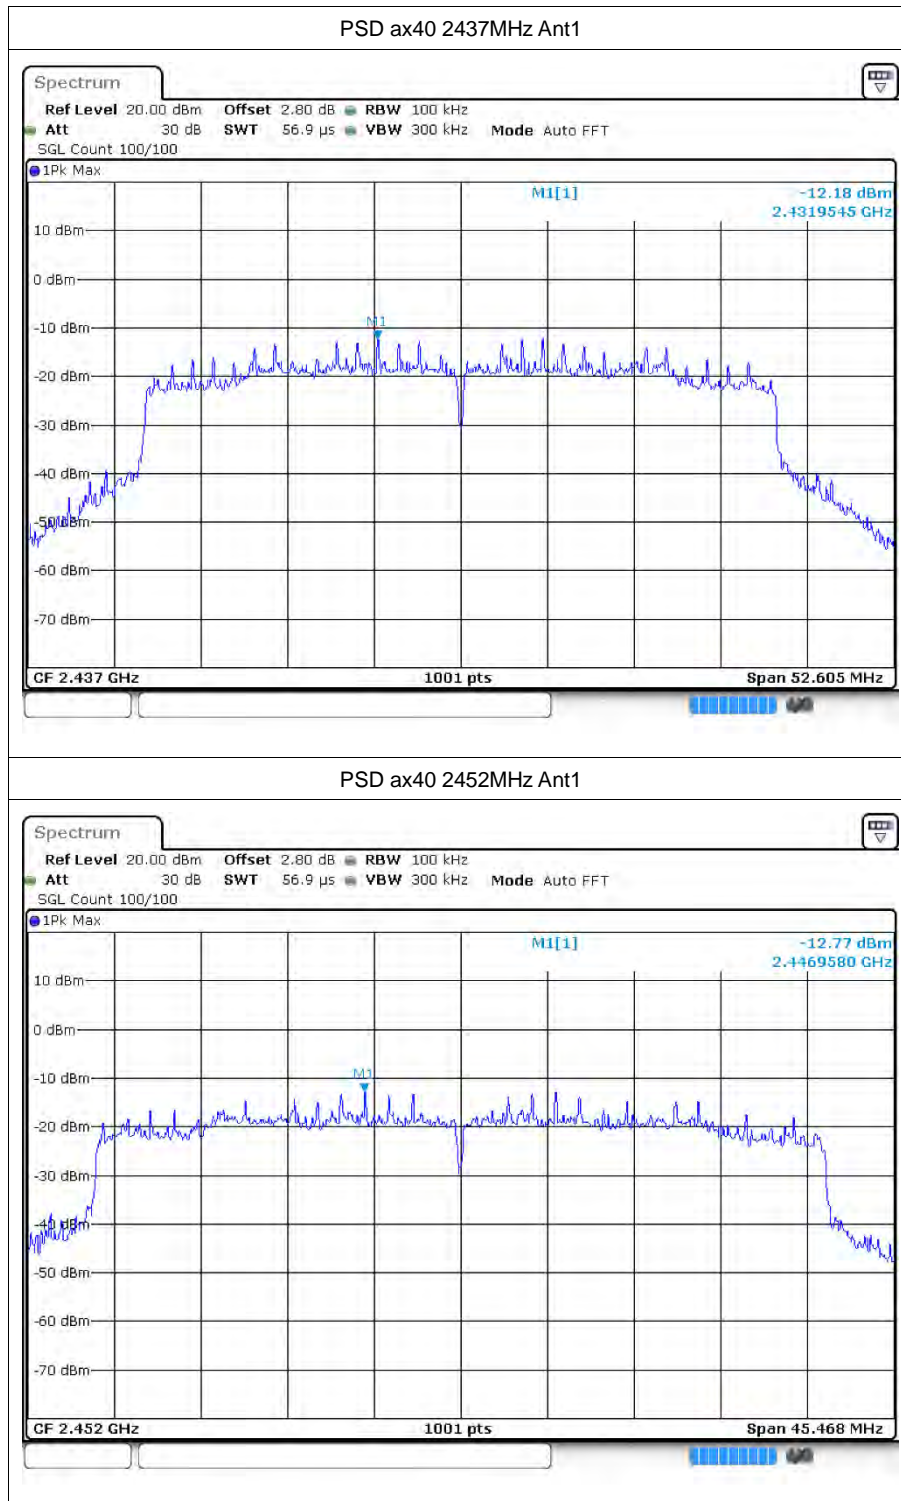


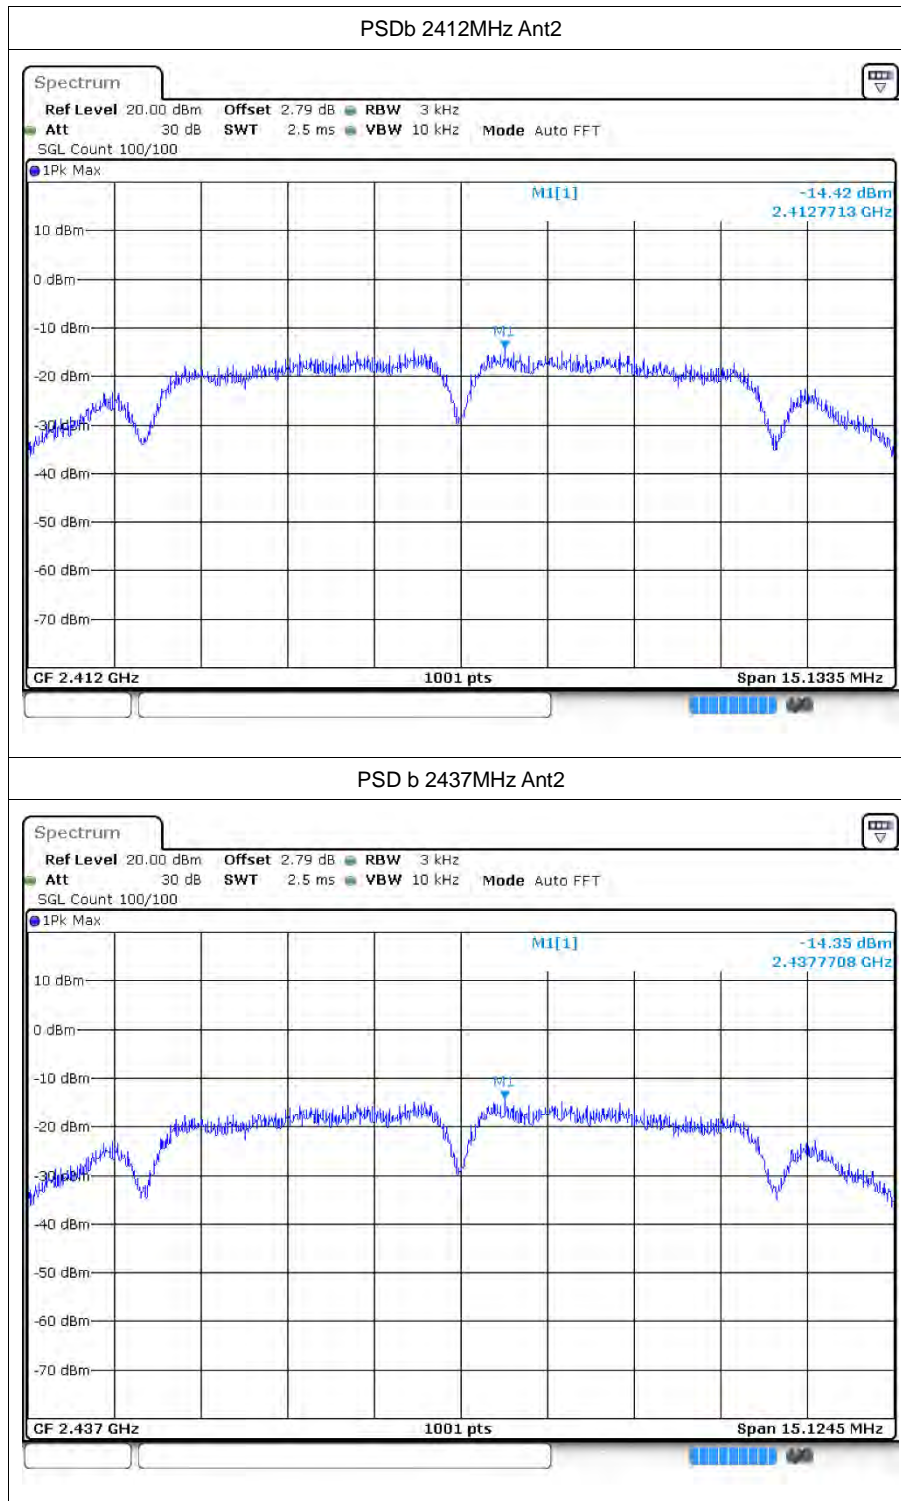



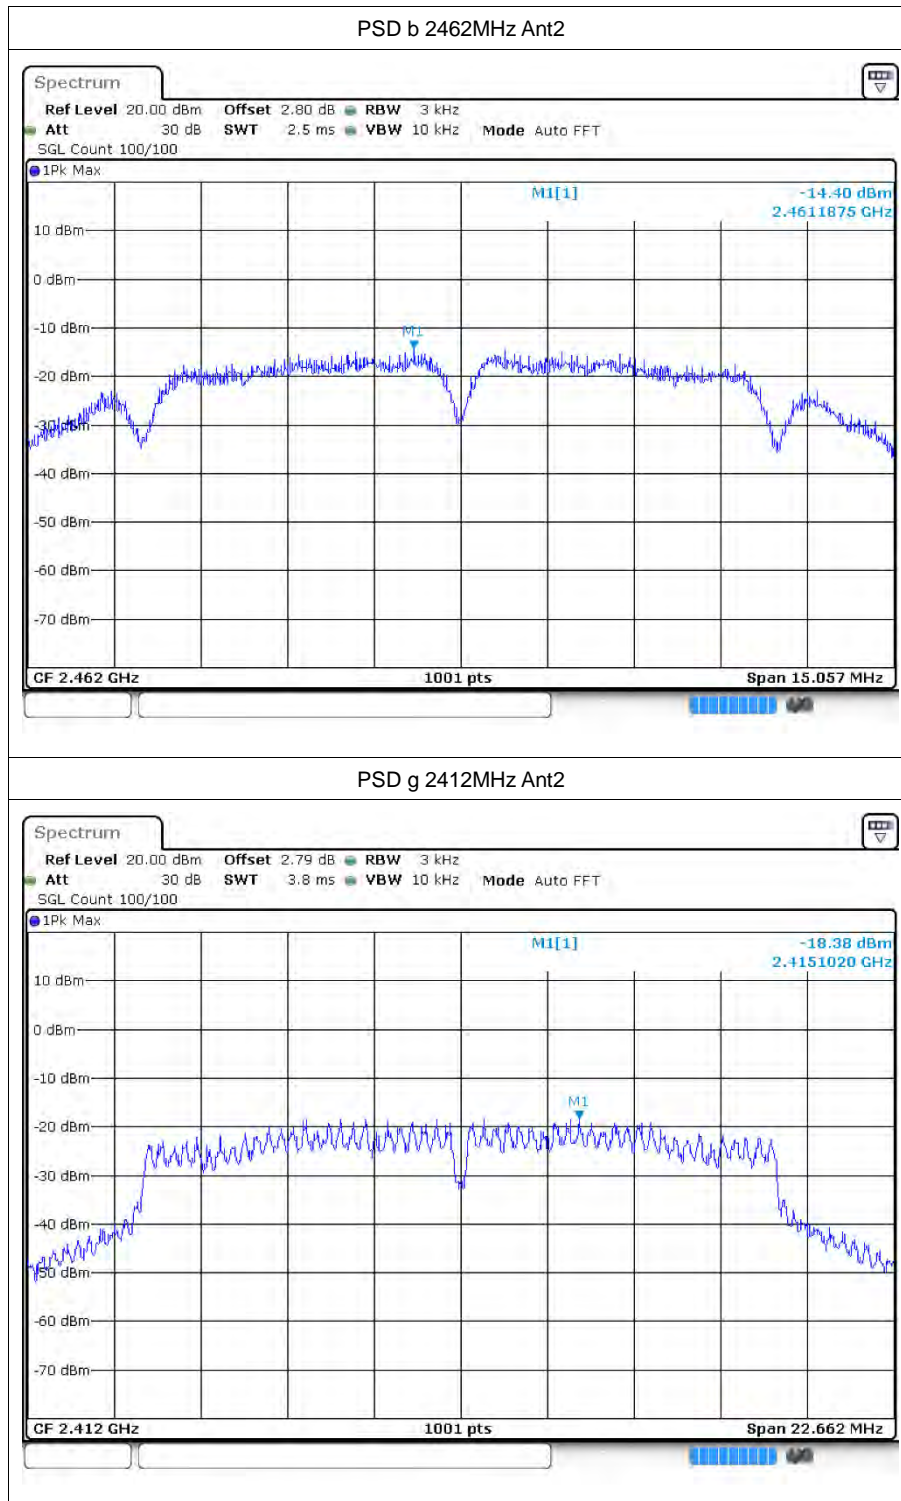


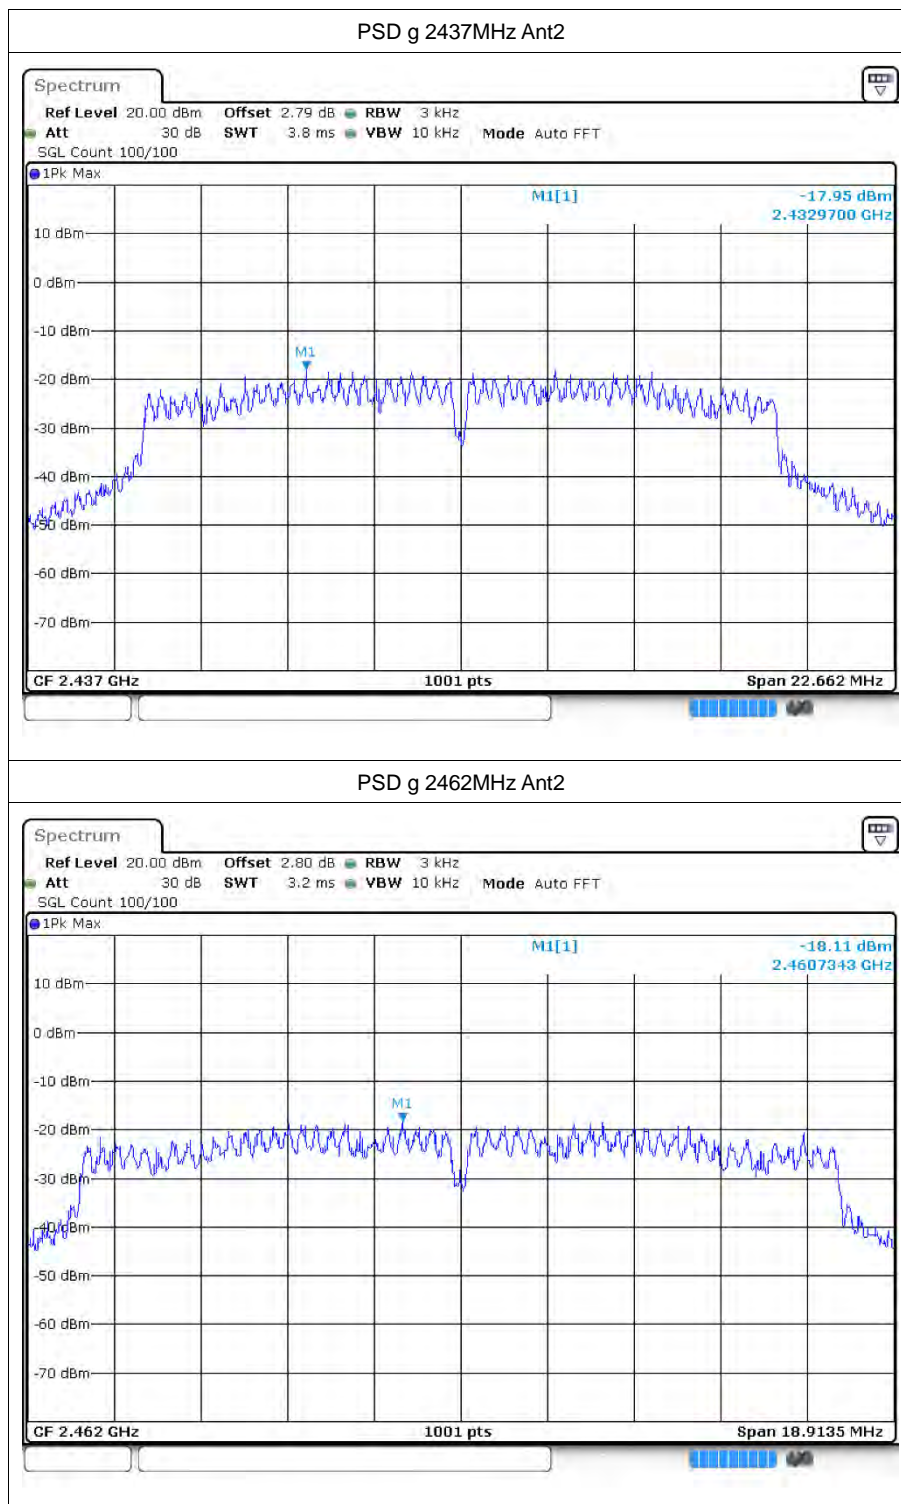


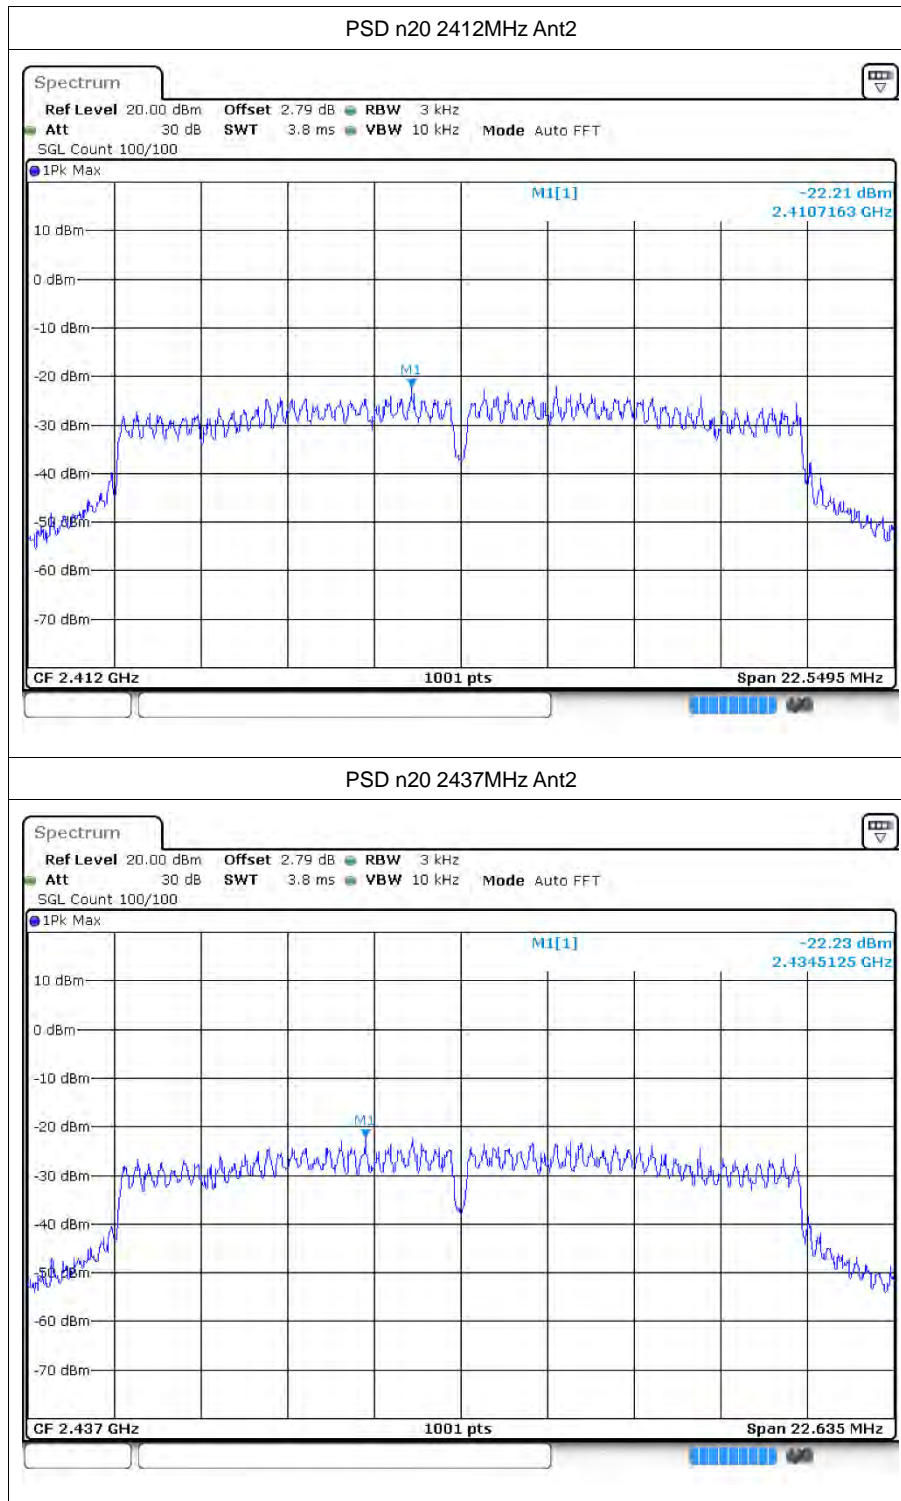


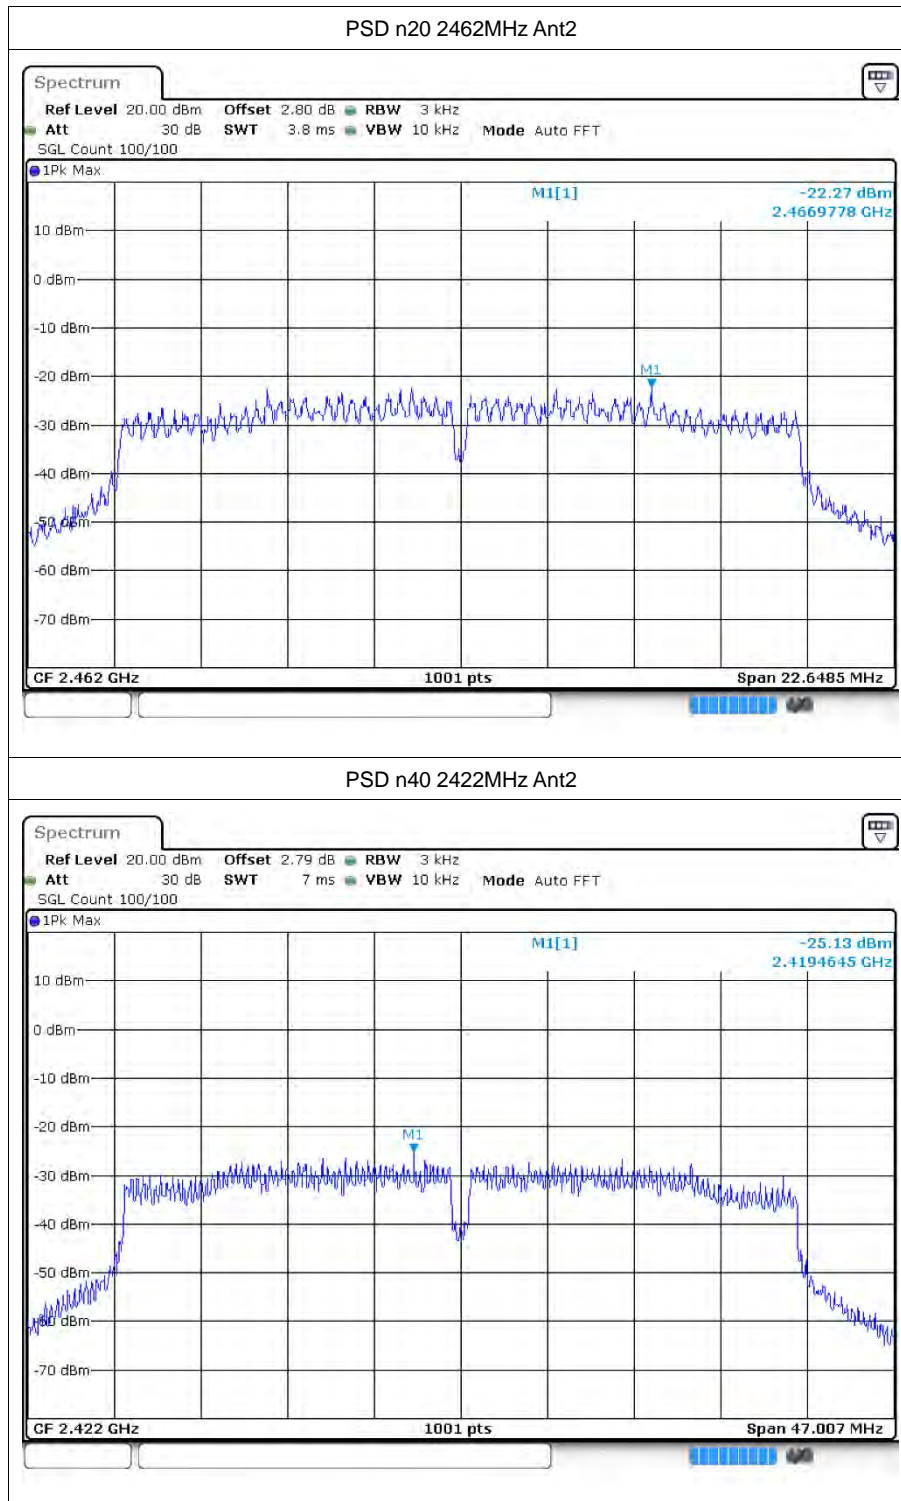

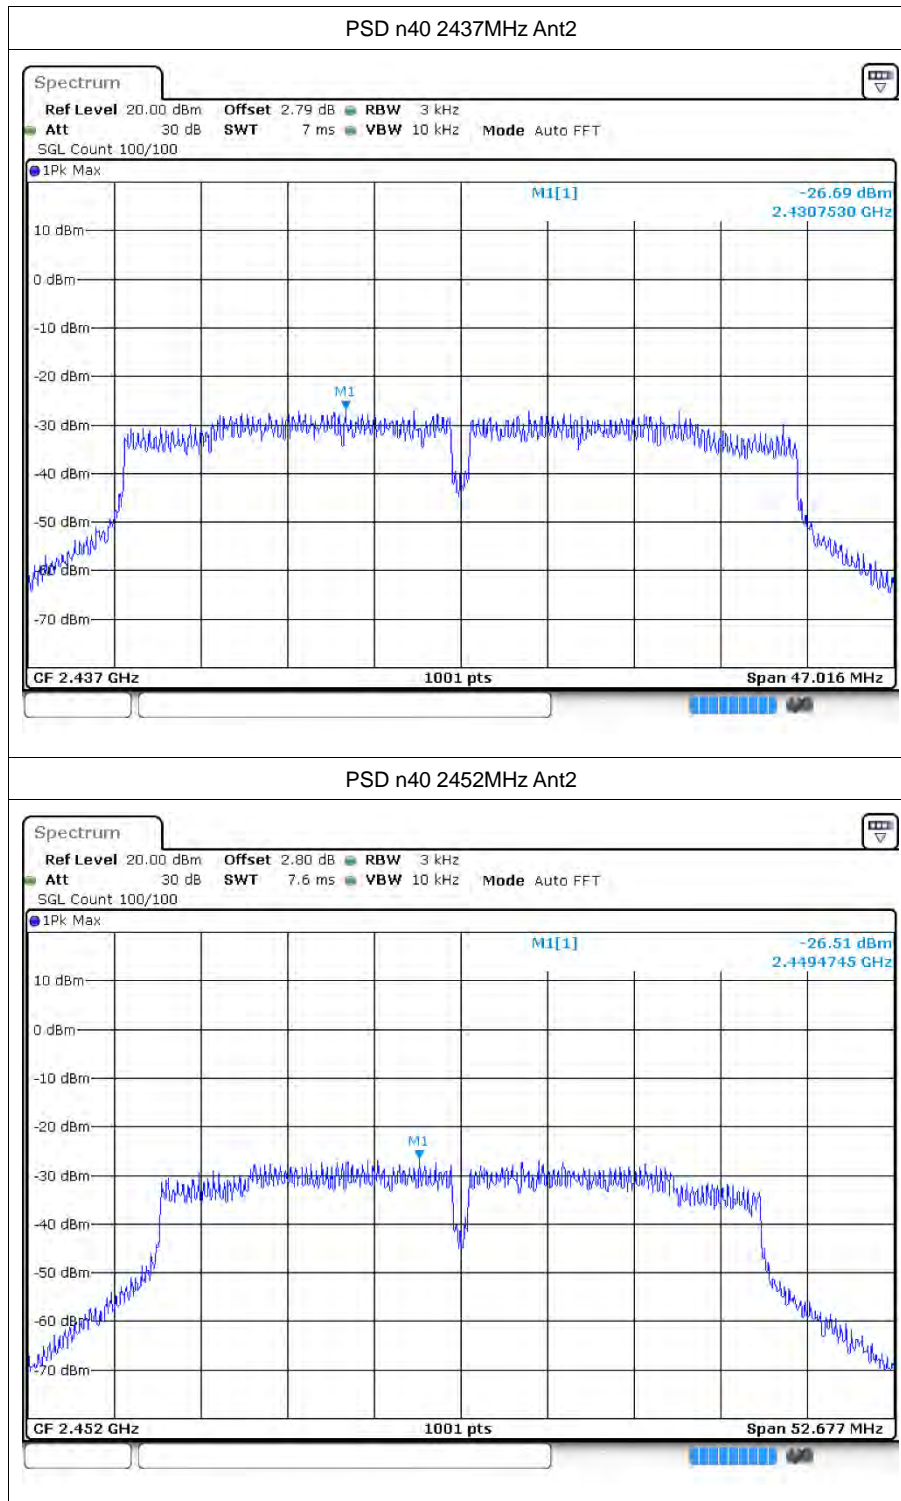

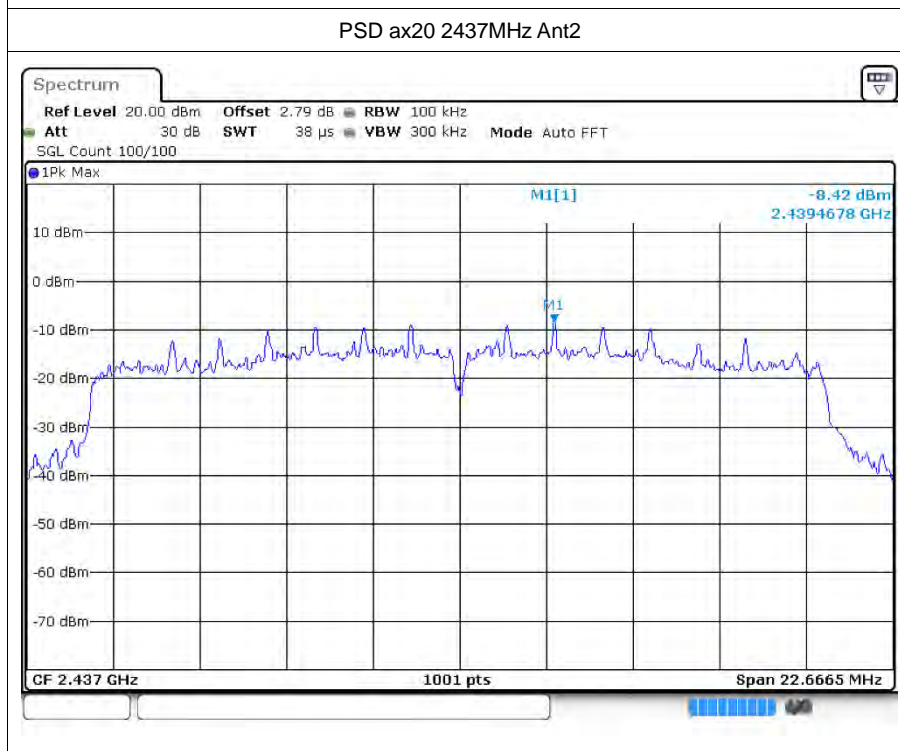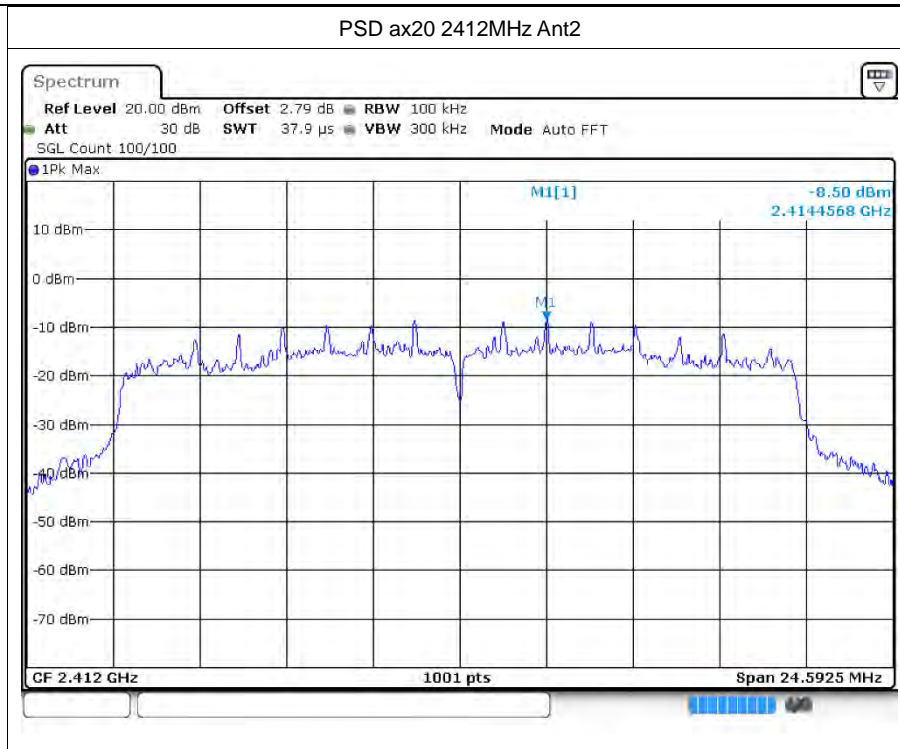

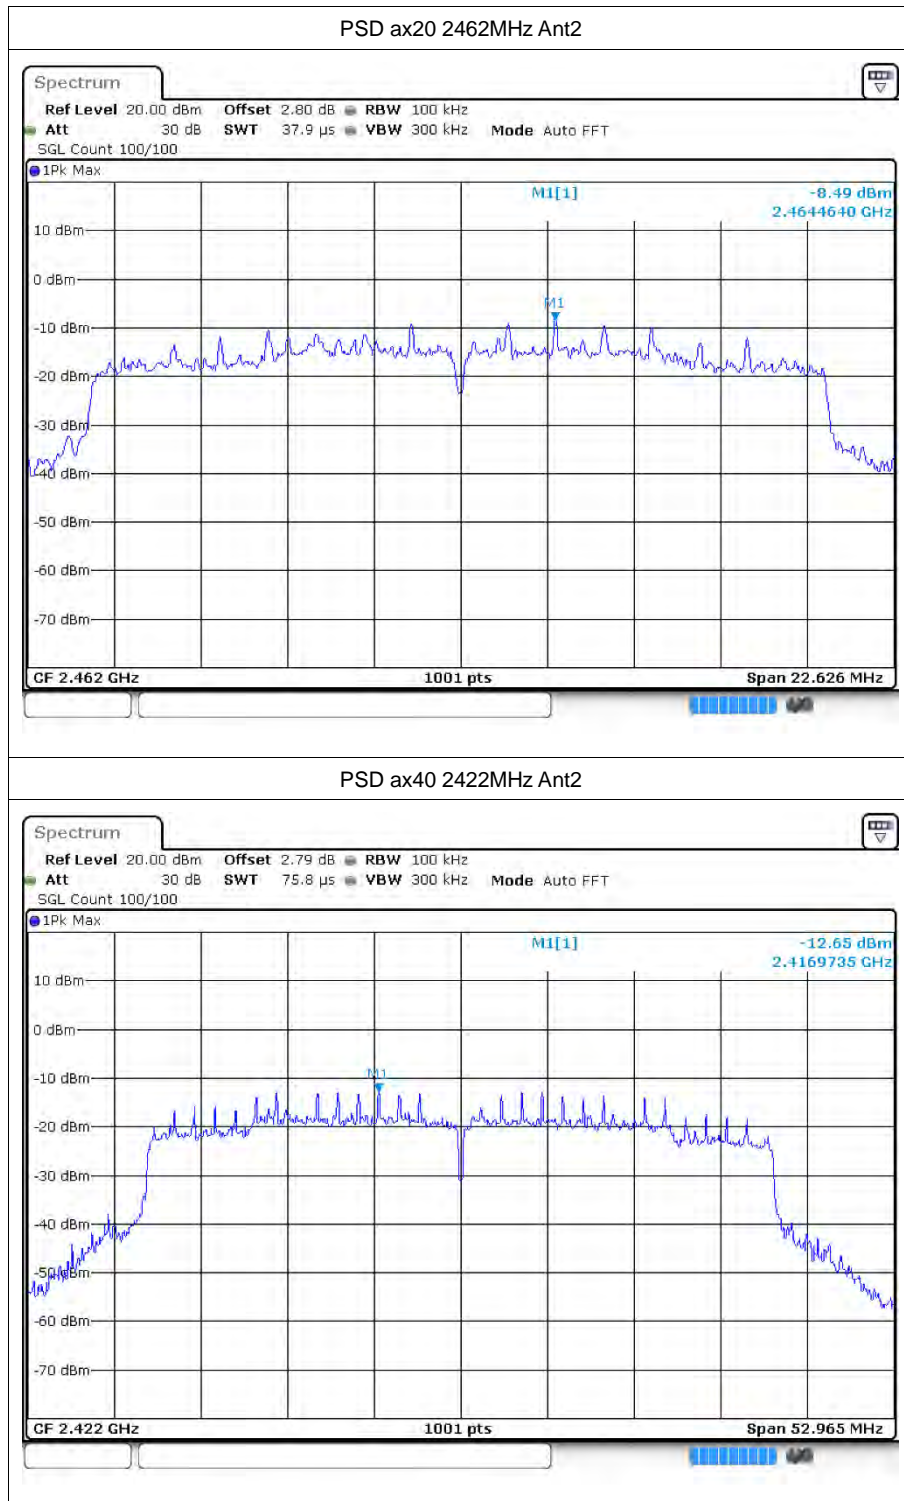

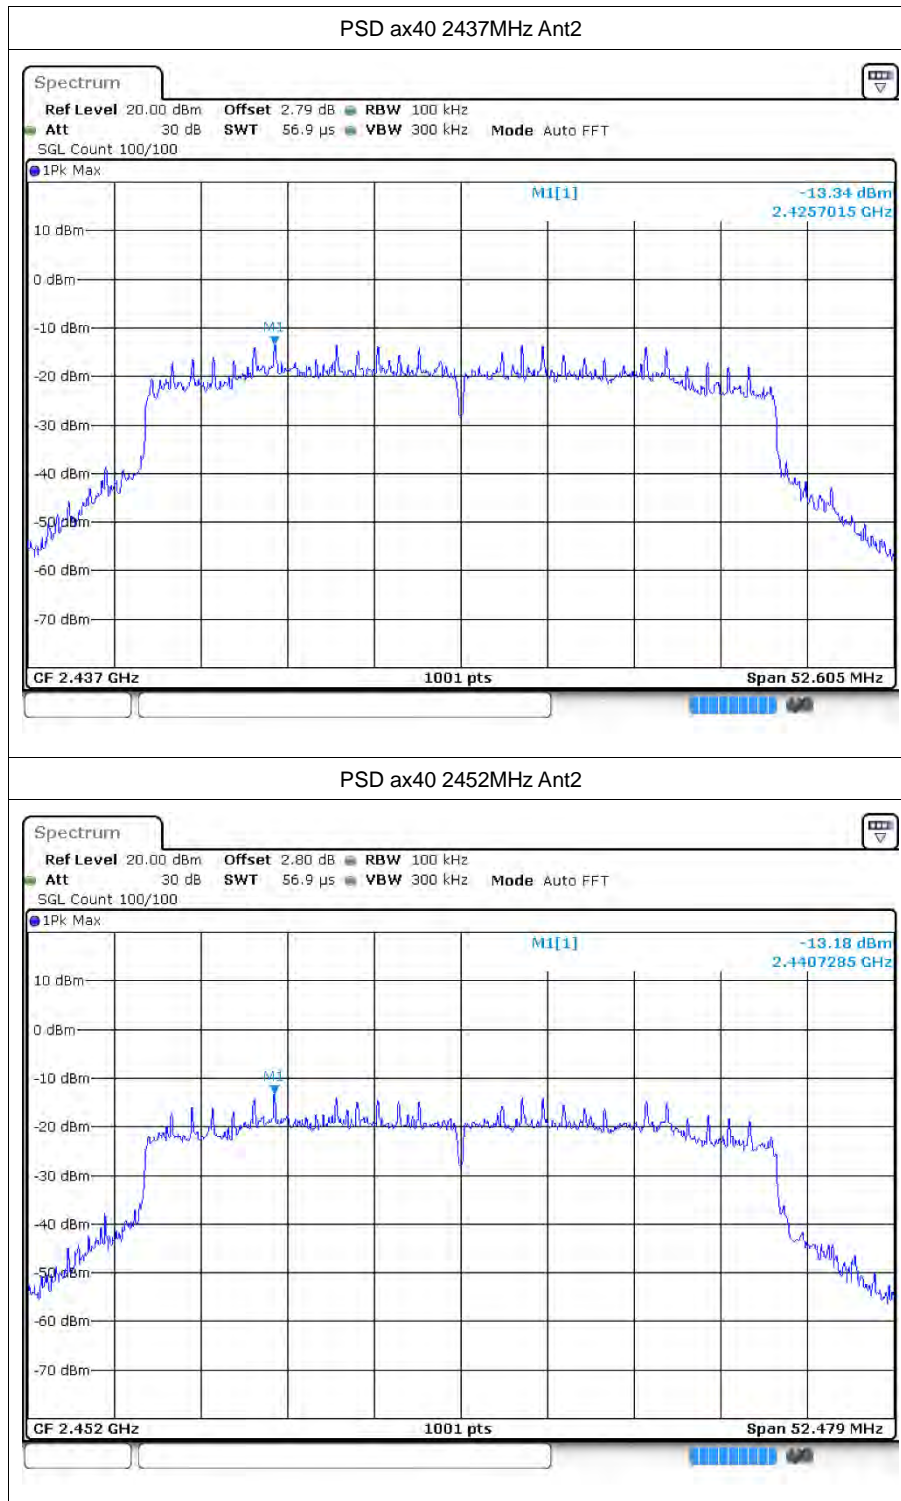




5 Band Edge


5.1 Test Result


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-51.79	-20	Pass
b	2462	Ant1	-54.55	-20	Pass
g	2412	Ant1	-51.54	-20	Pass
g	2462	Ant1	-52.49	-20	Pass
n20	2412	Ant1	-45.04	-20	Pass
n20	2462	Ant1	-48.27	-20	Pass
n40	2422	Ant1	-43.73	-20	Pass
n40	2452	Ant1	-42.46	-20	Pass
ax20	2412	Ant1	-45.92	-20	Pass
ax20	2462	Ant1	-47.55	-20	Pass
ax40	2422	Ant1	-44.05	-20	Pass
ax40	2452	Ant1	-43.87	-20	Pass
b	2412	Ant2	-53.44	-20	-53.44
b	2462	Ant2	-54.09	-20	Pass
g	2412	Ant2	-51.45	-20	Pass
g	2462	Ant2	-52.39	-20	Pass
n20	2412	Ant2	-46.58	-20	Pass
n20	2462	Ant2	-45.23	-20	Pass
n40	2422	Ant2	-45.03	-20	Pass
n40	2452	Ant2	-44.37	-20	Pass
ax20	2412	Ant2	-45.29	-20	Pass
ax20	2462	Ant2	-47.89	-20	Pass
ax40	2422	Ant2	-42.42	-20	Pass
ax40	2452	Ant2	-43.38	-20	Pass





5.2 Test Graphs

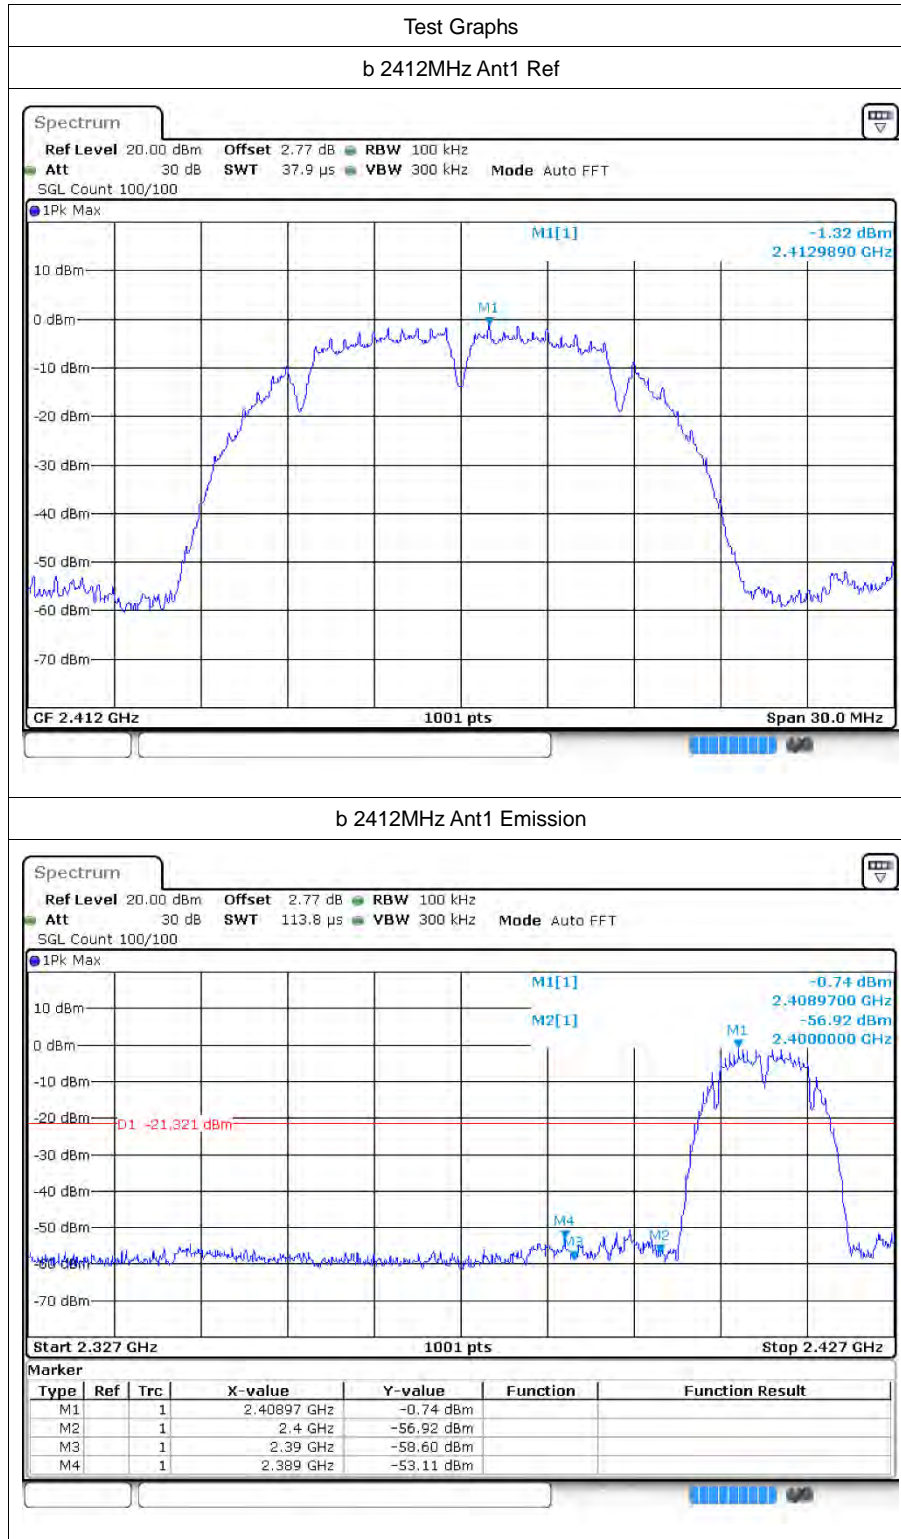


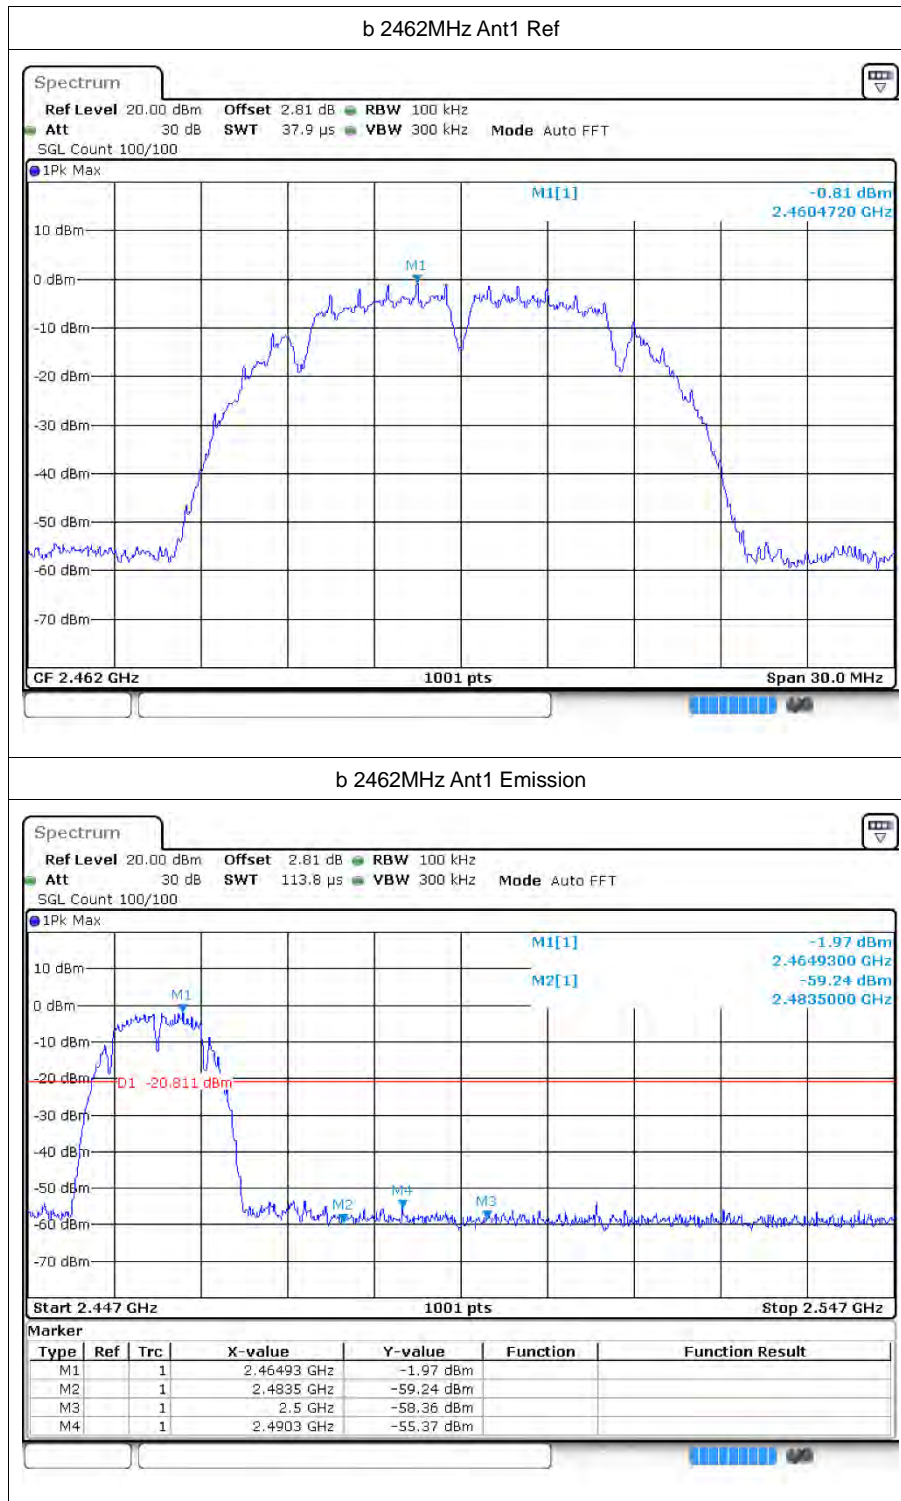


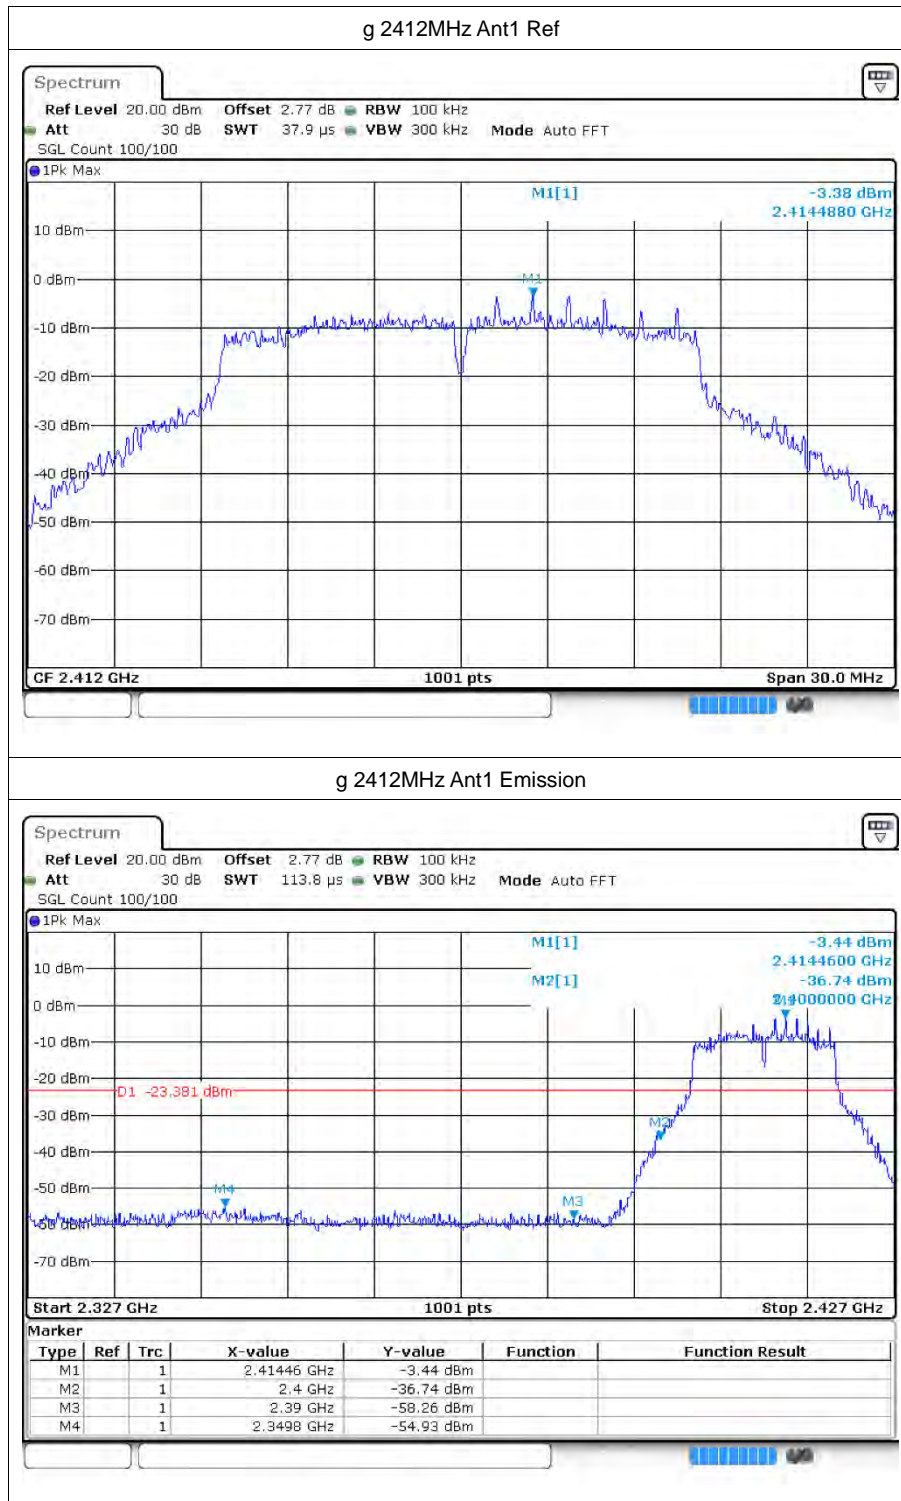



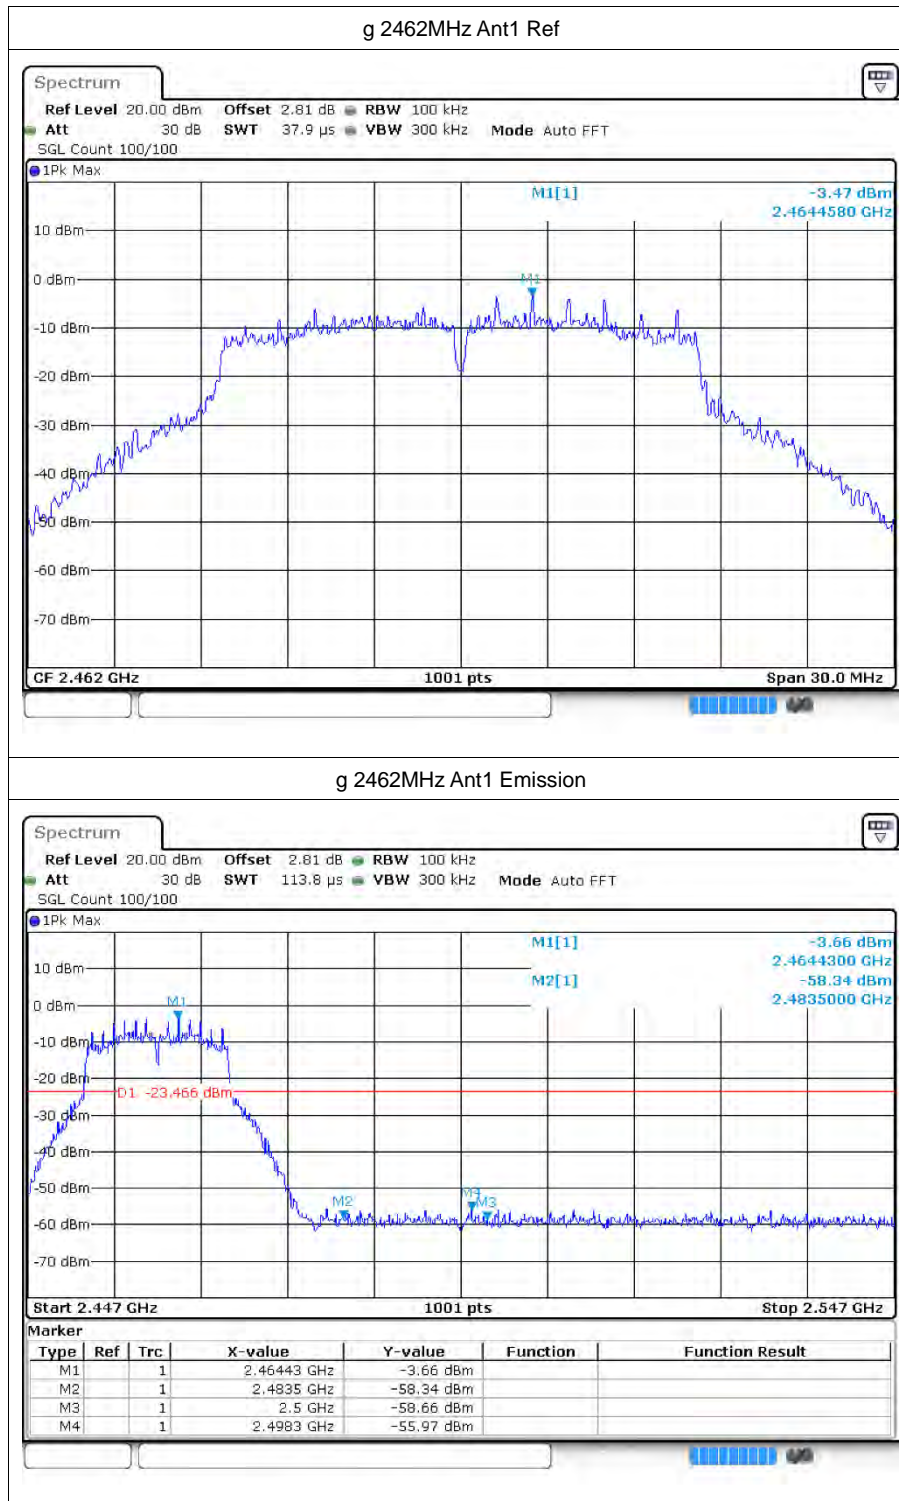


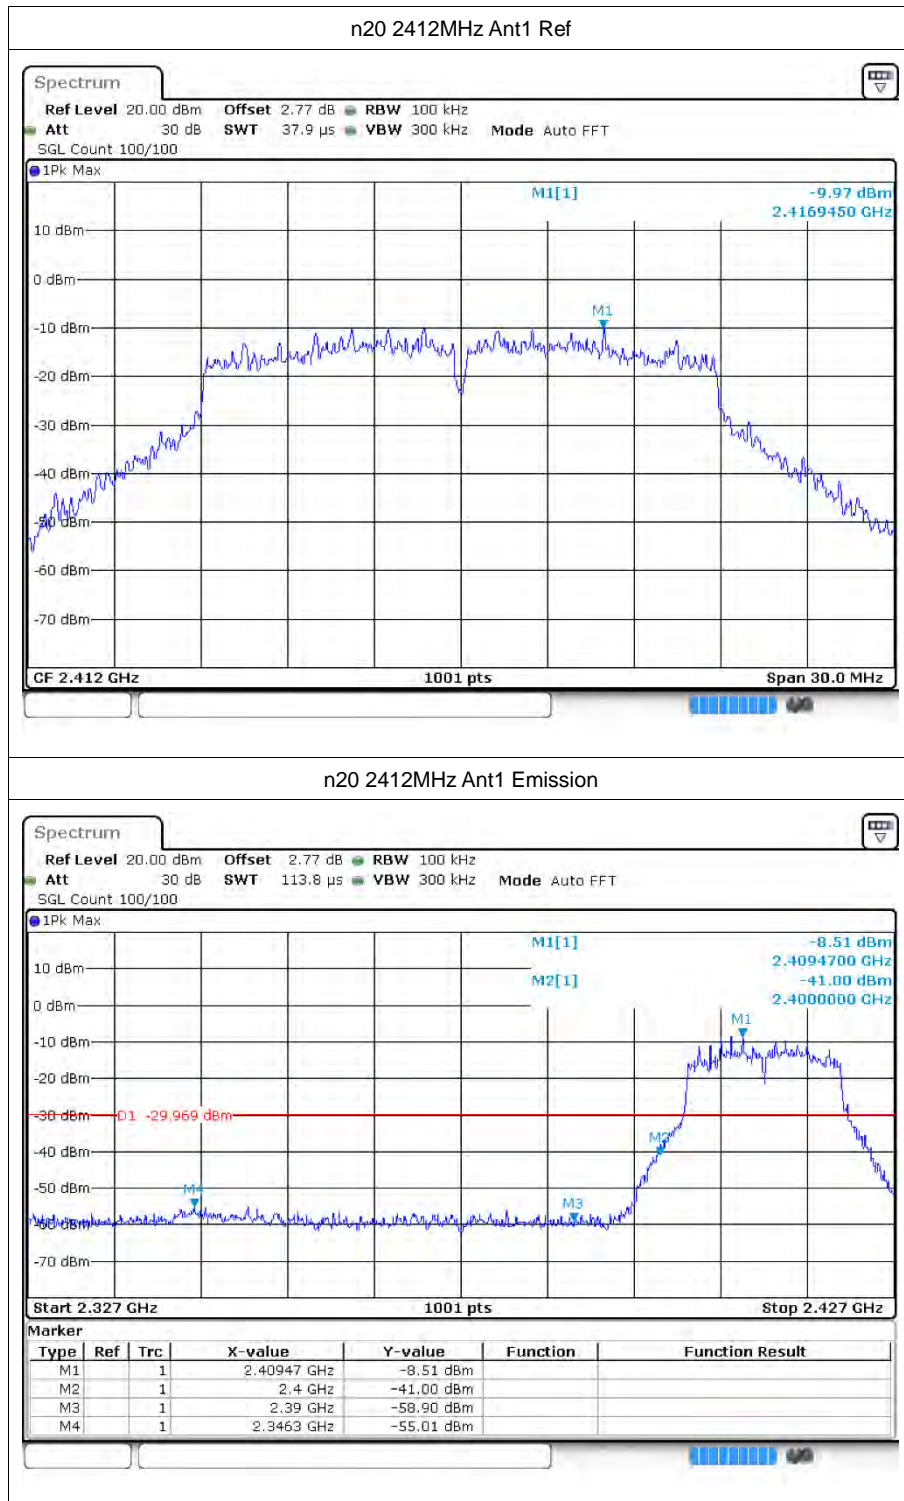


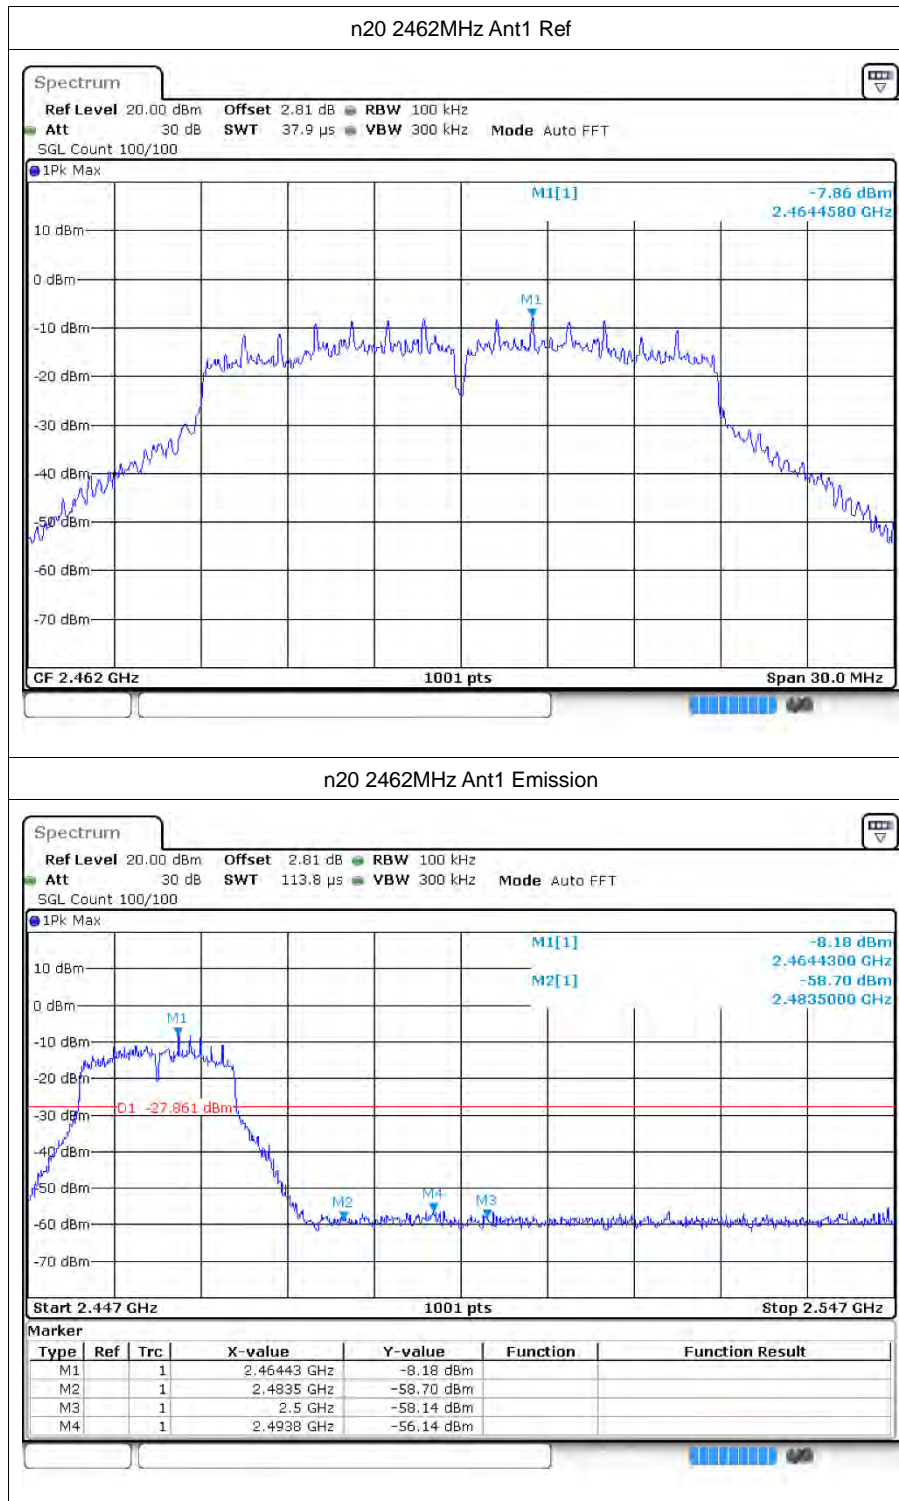


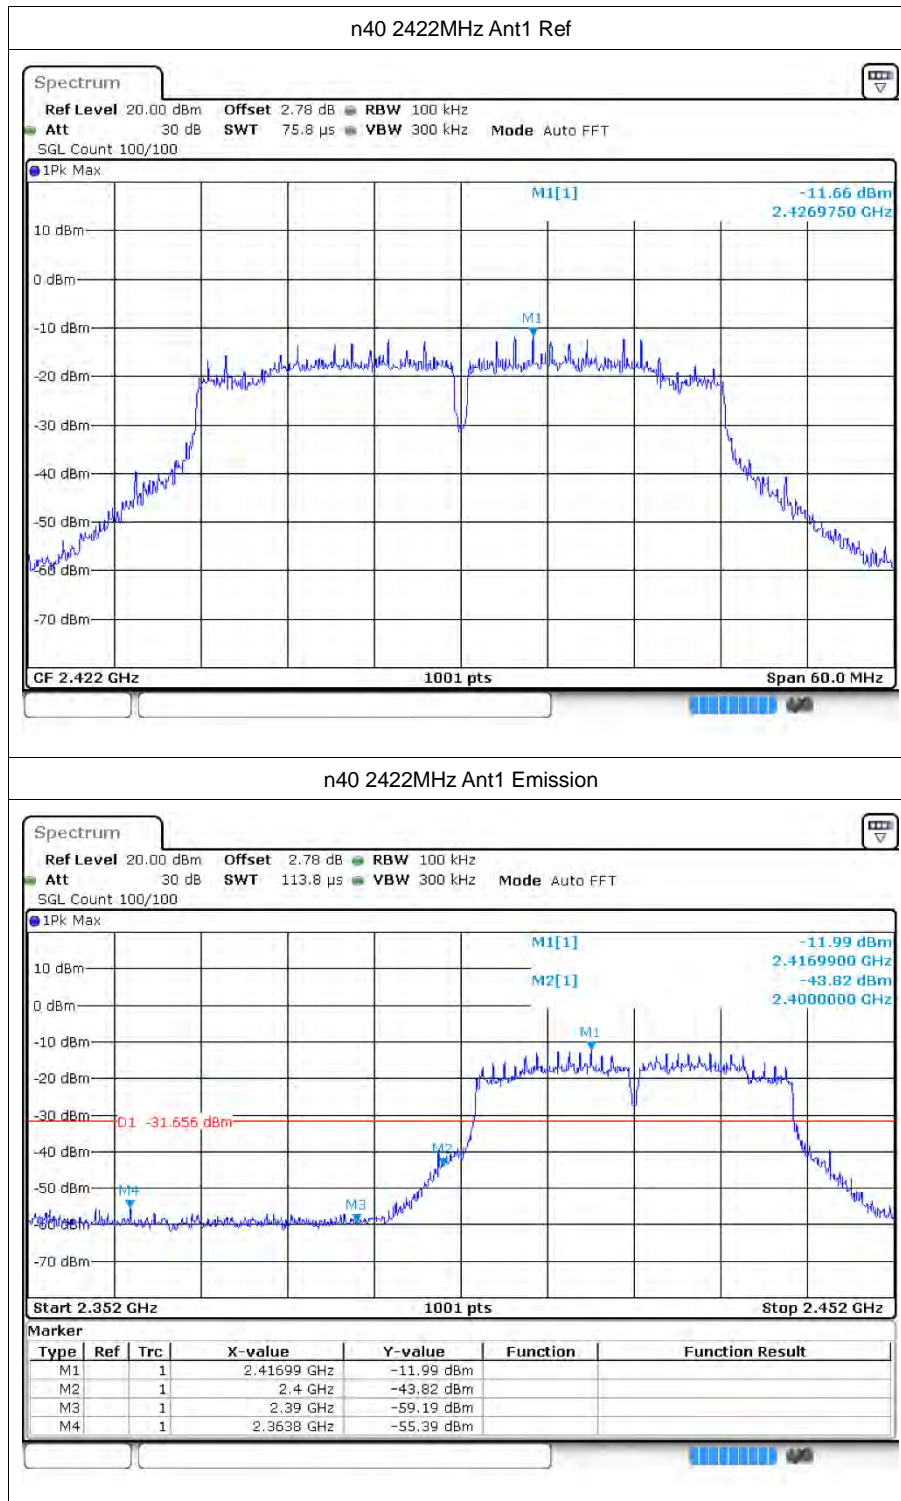


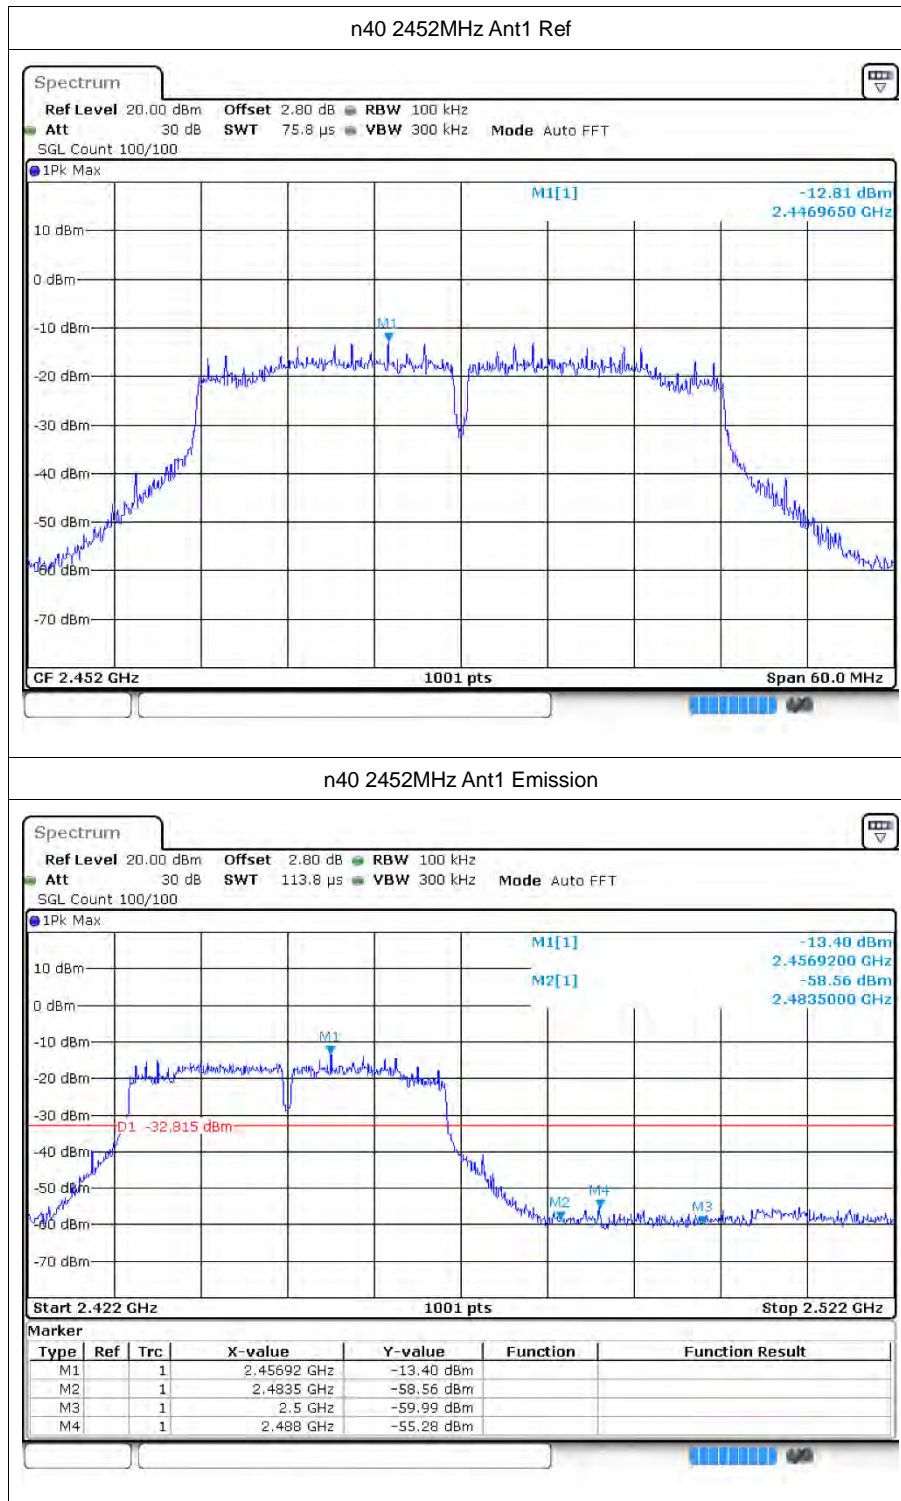


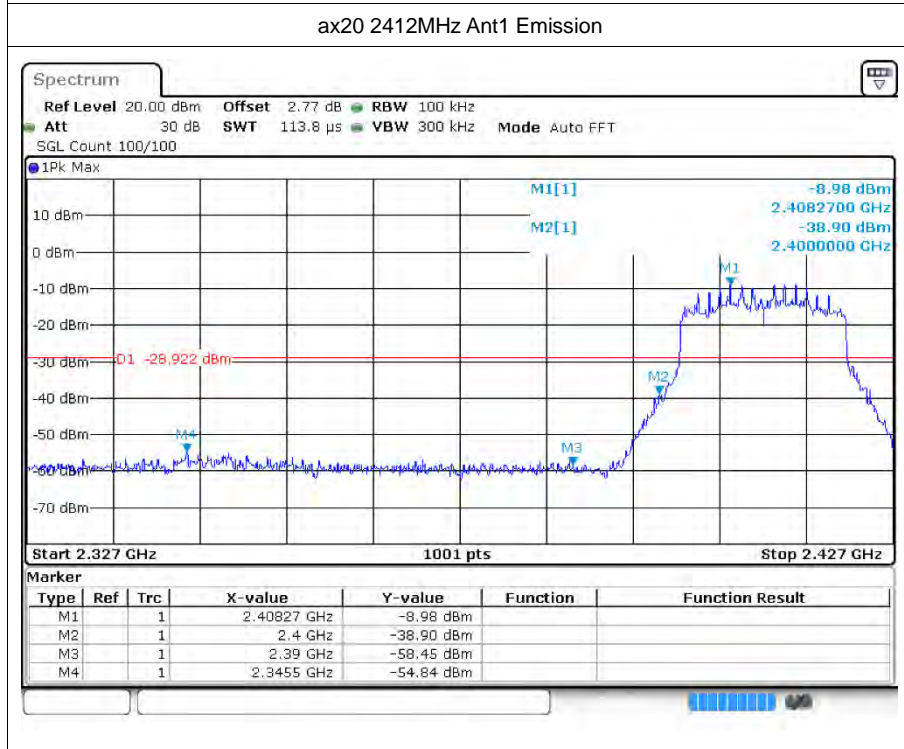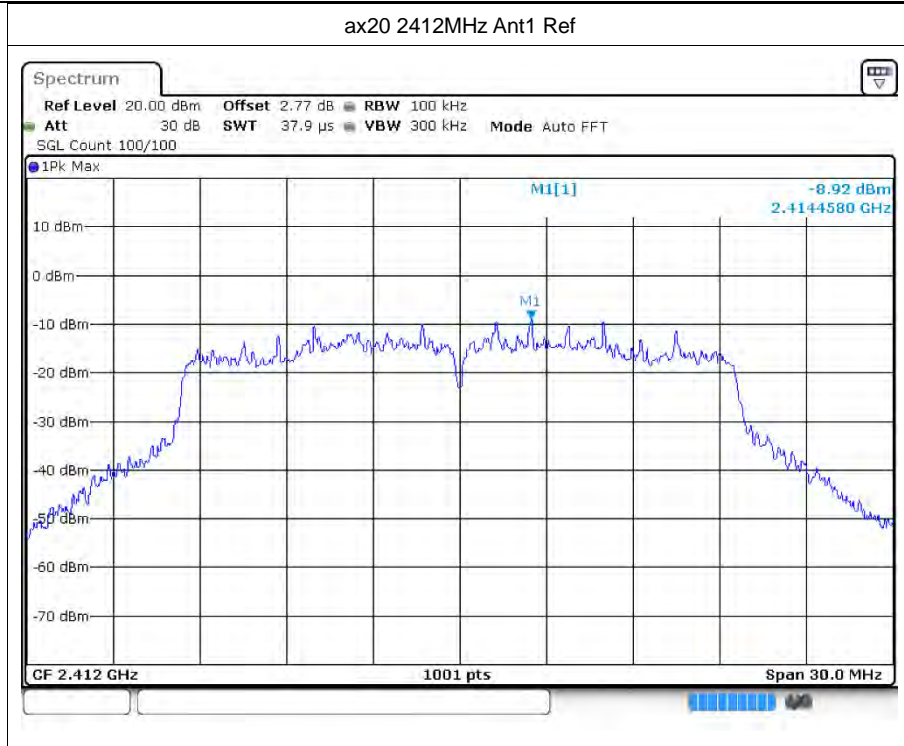


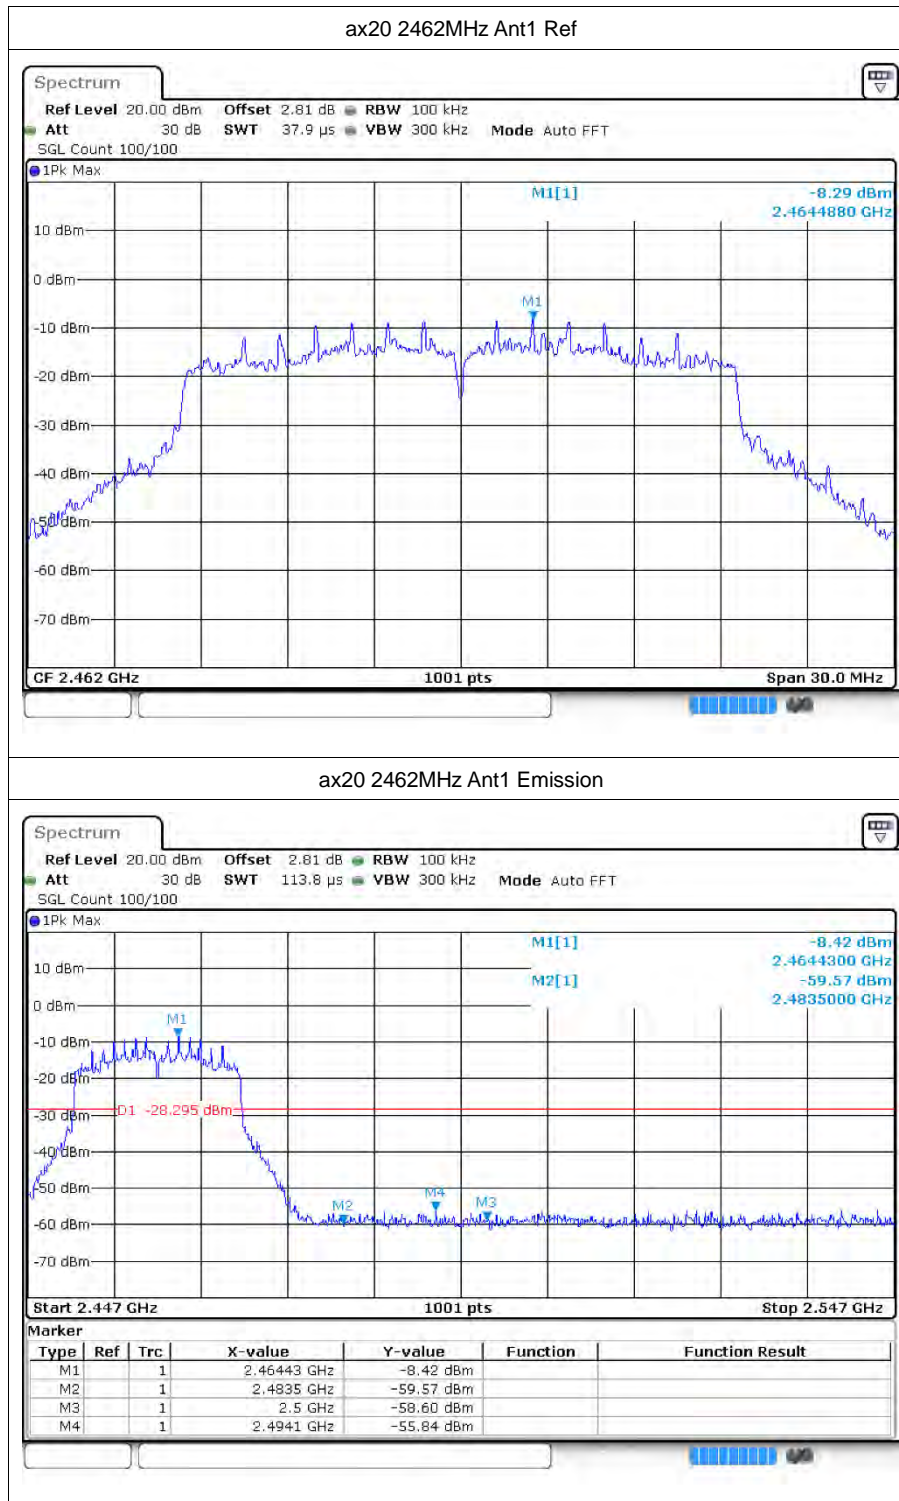


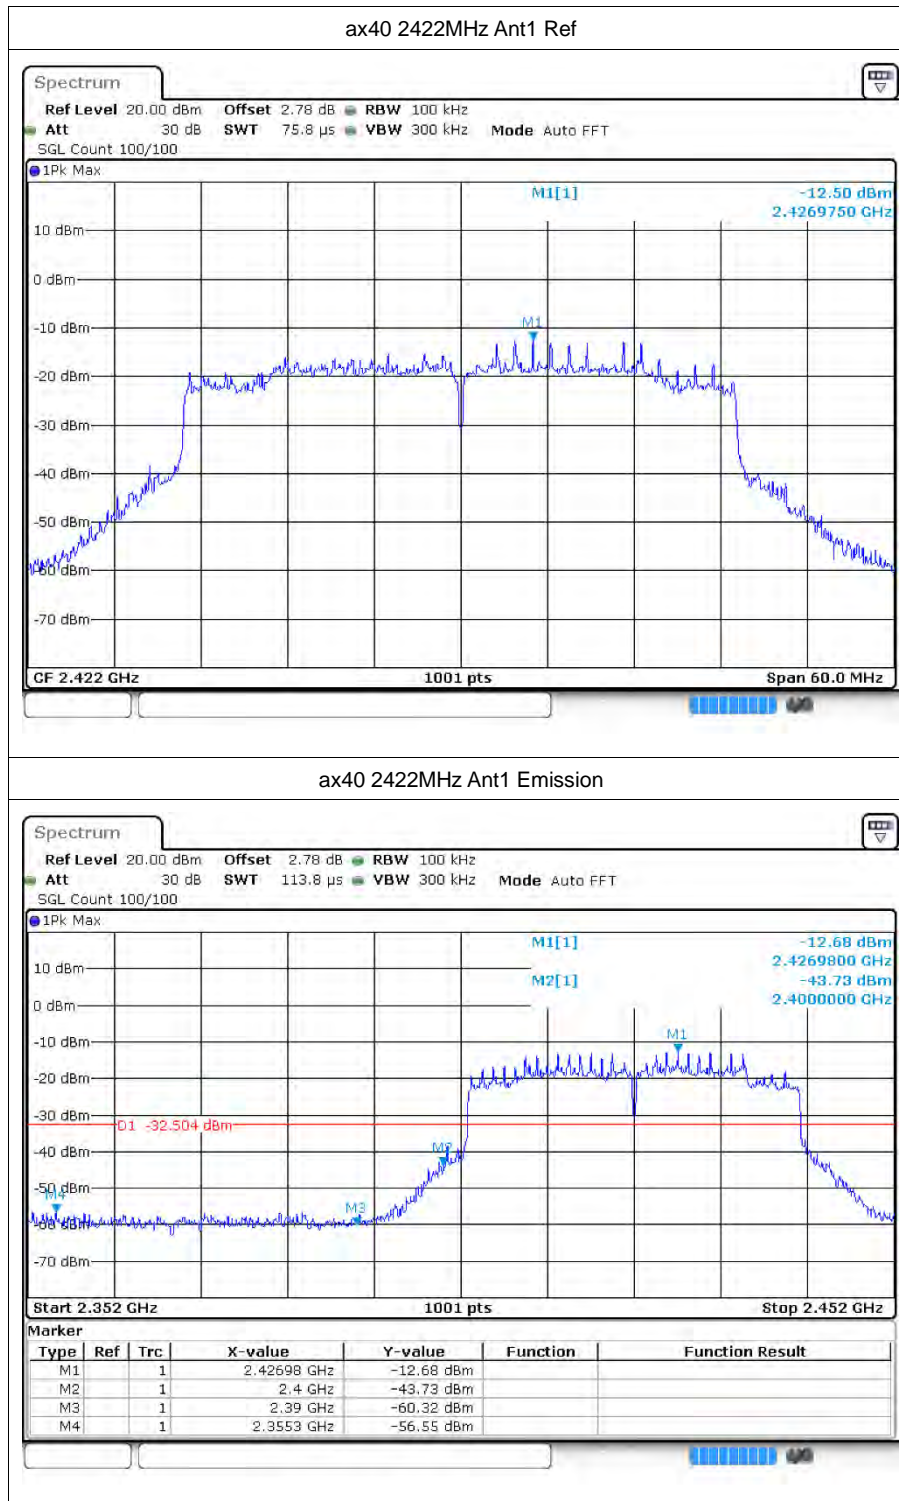


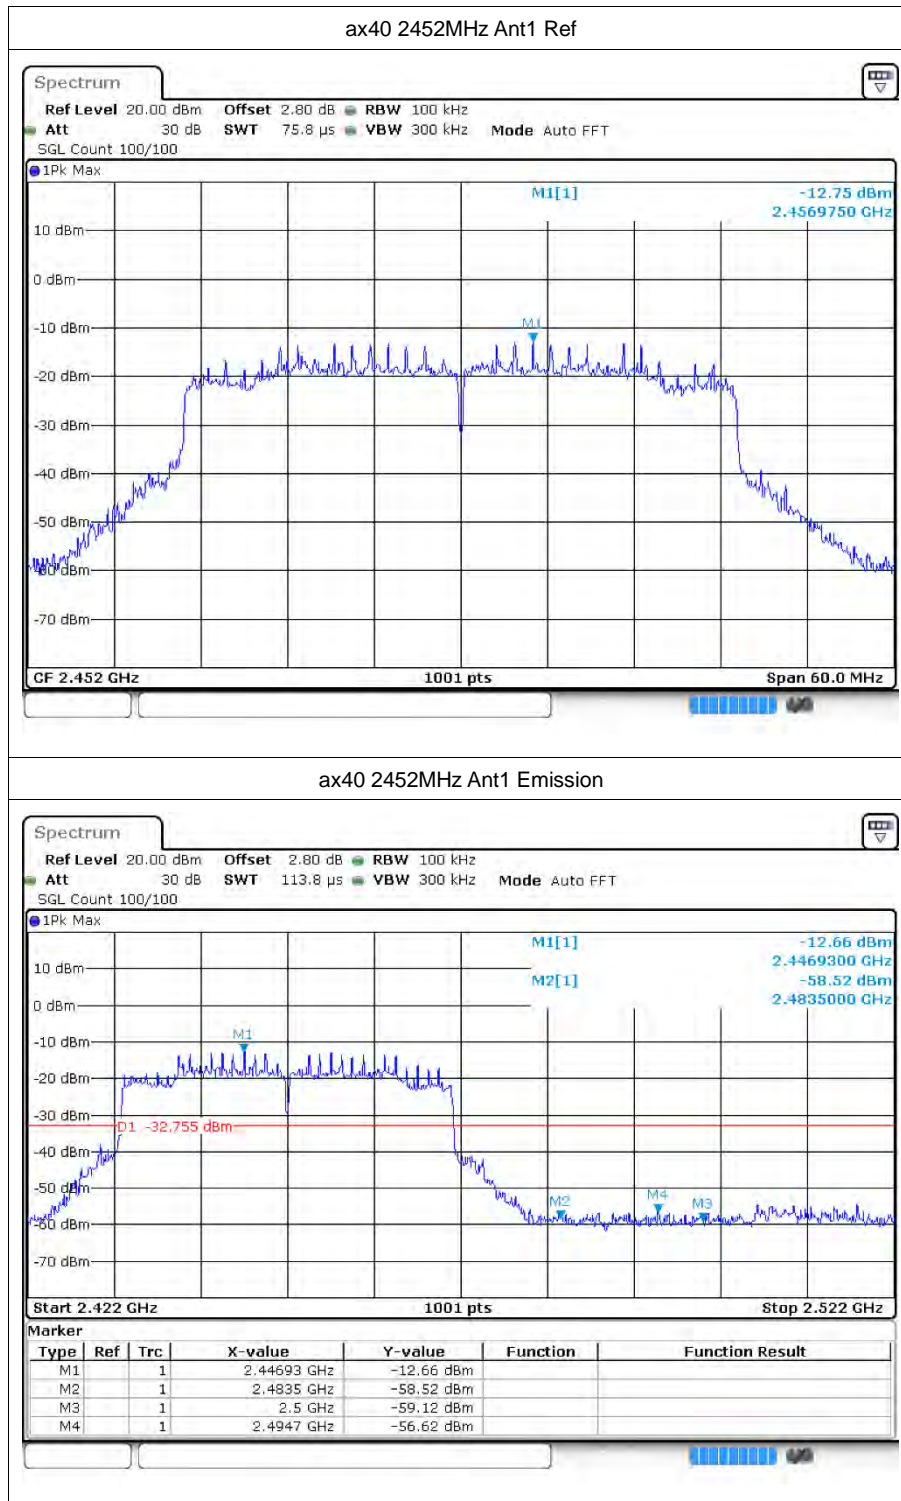


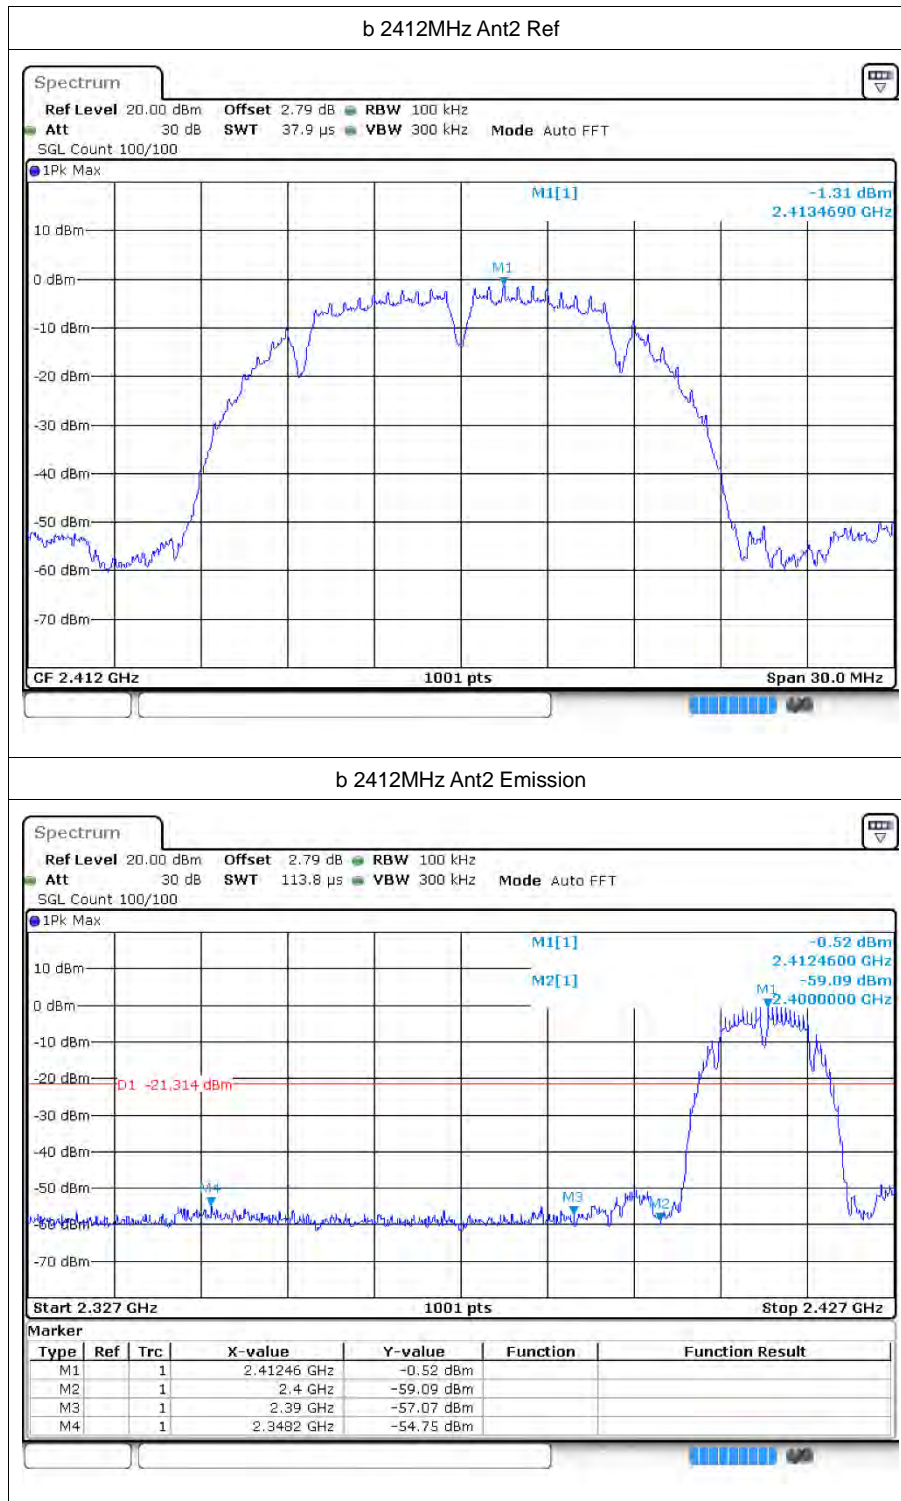


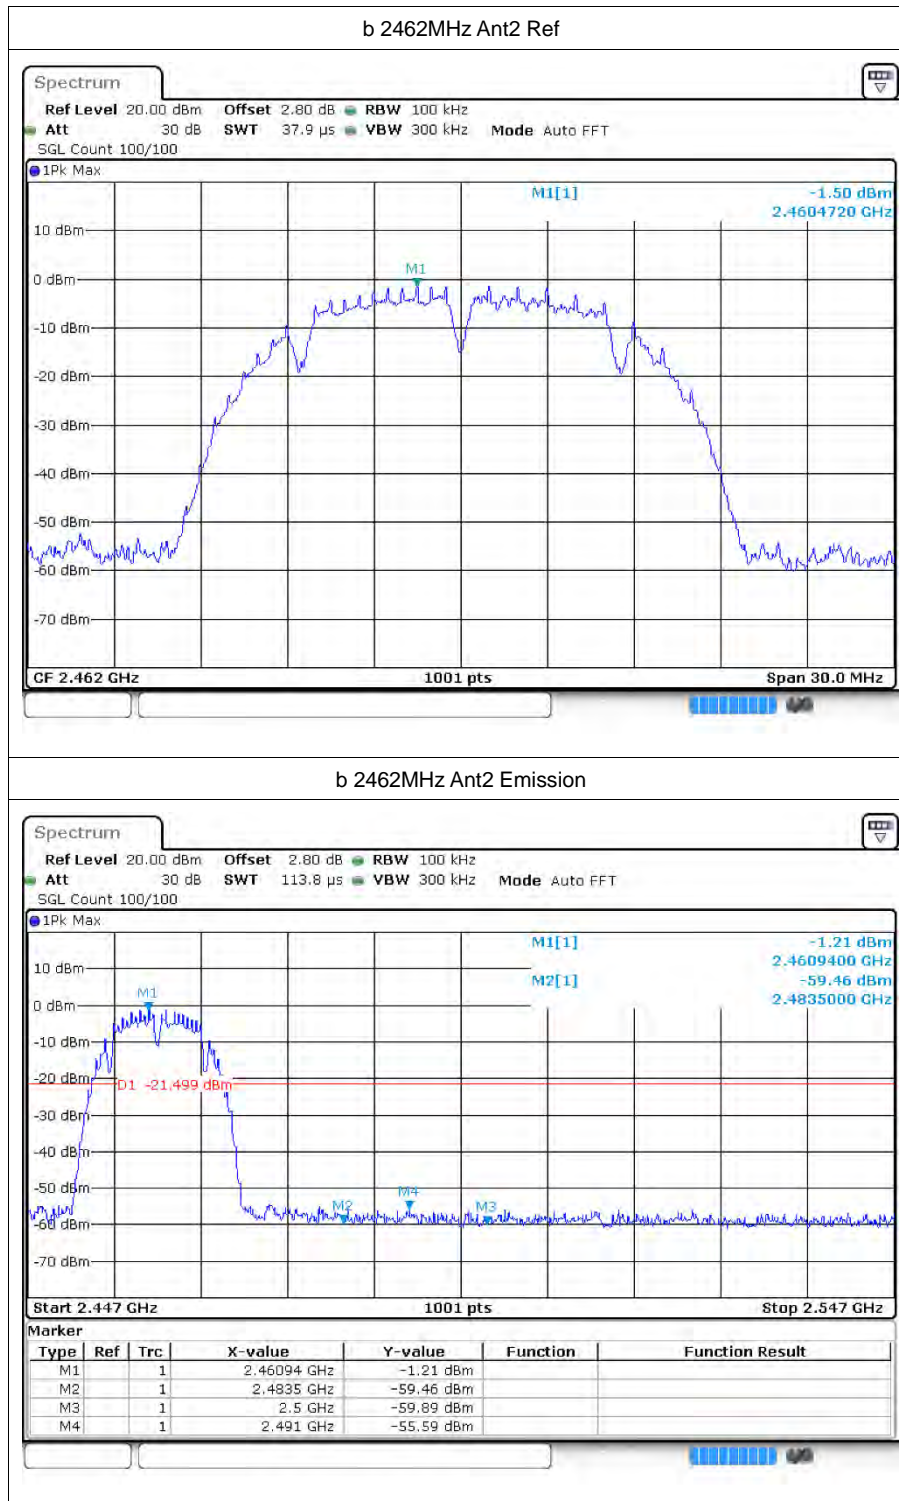


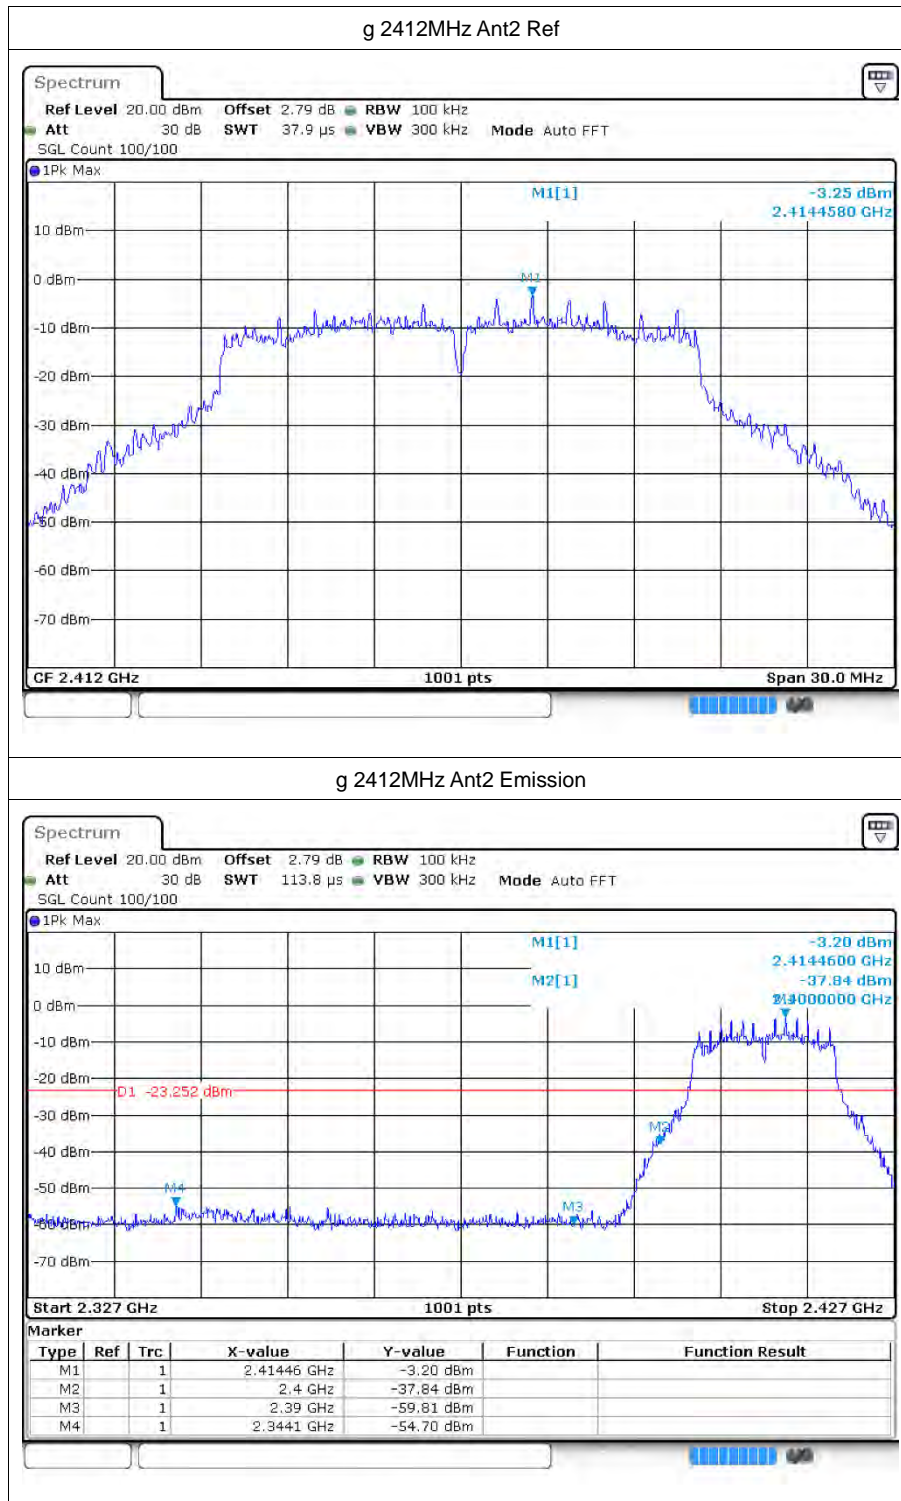



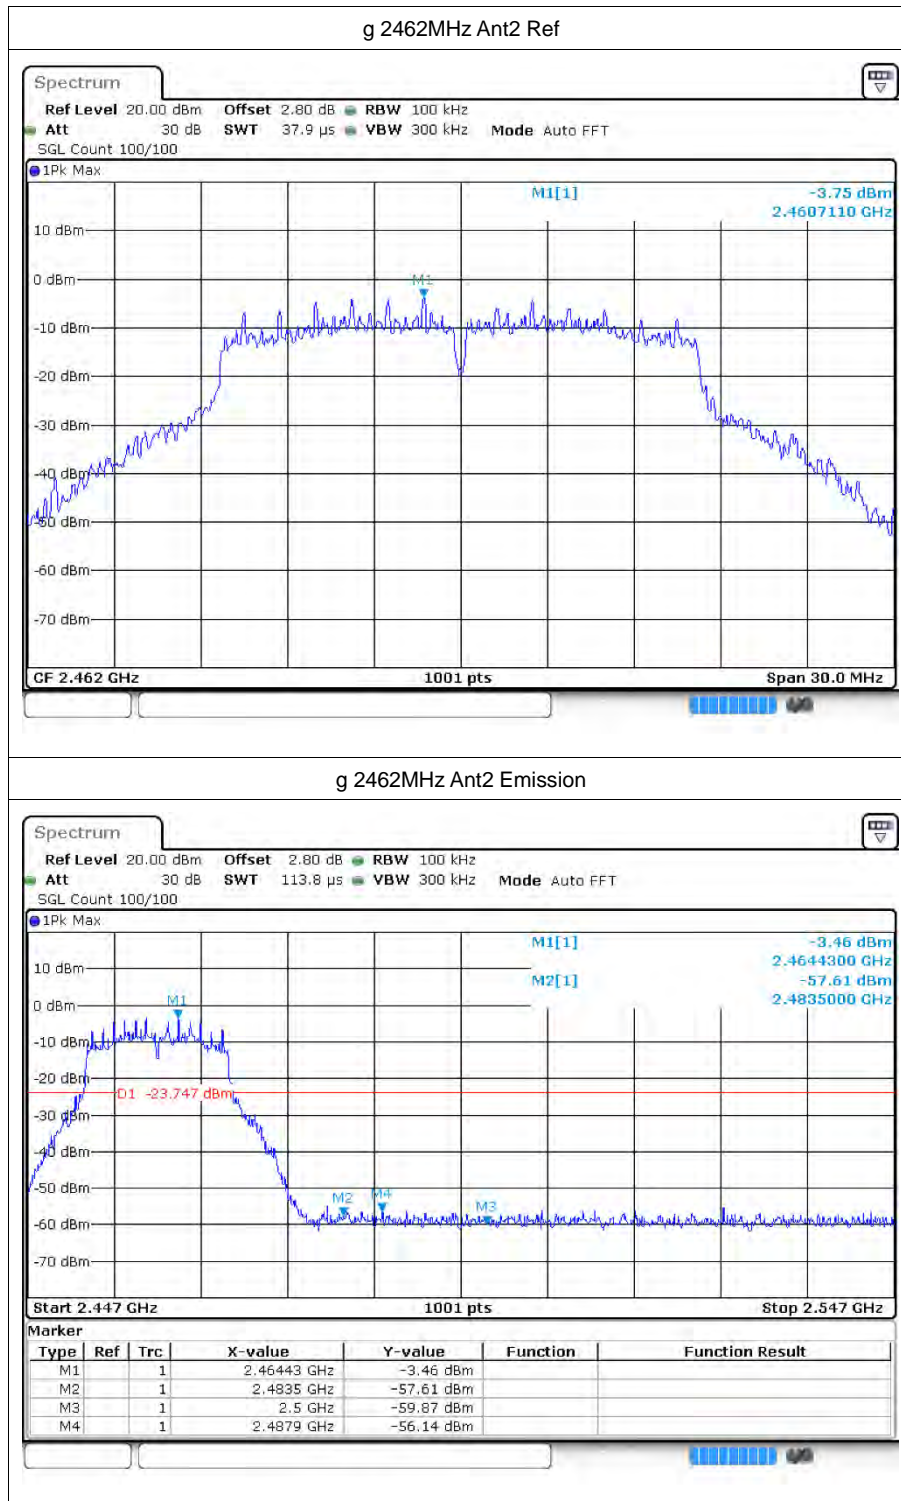


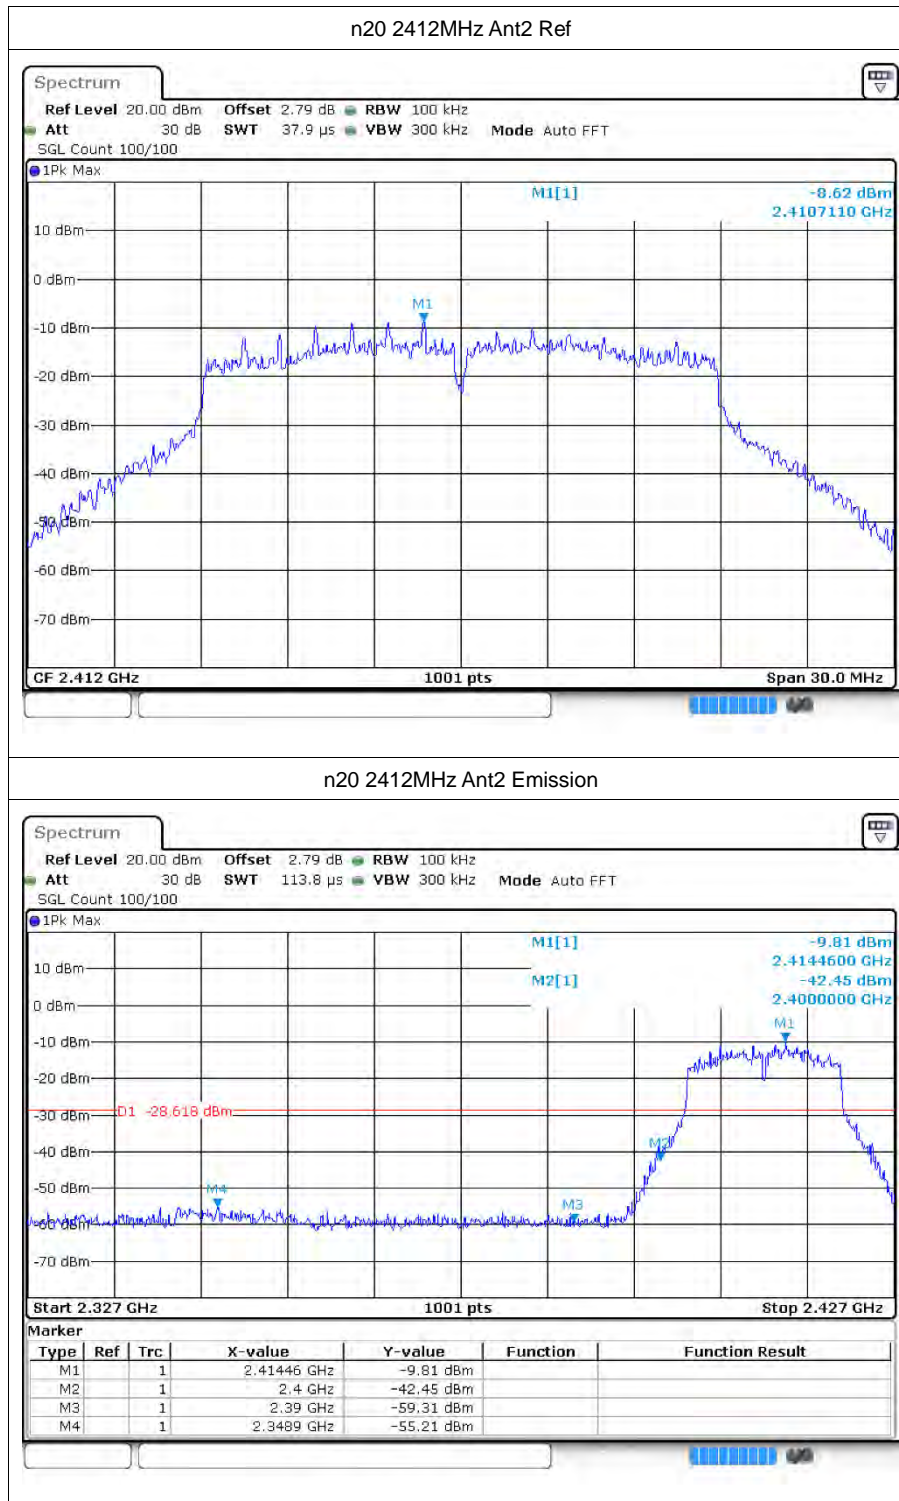


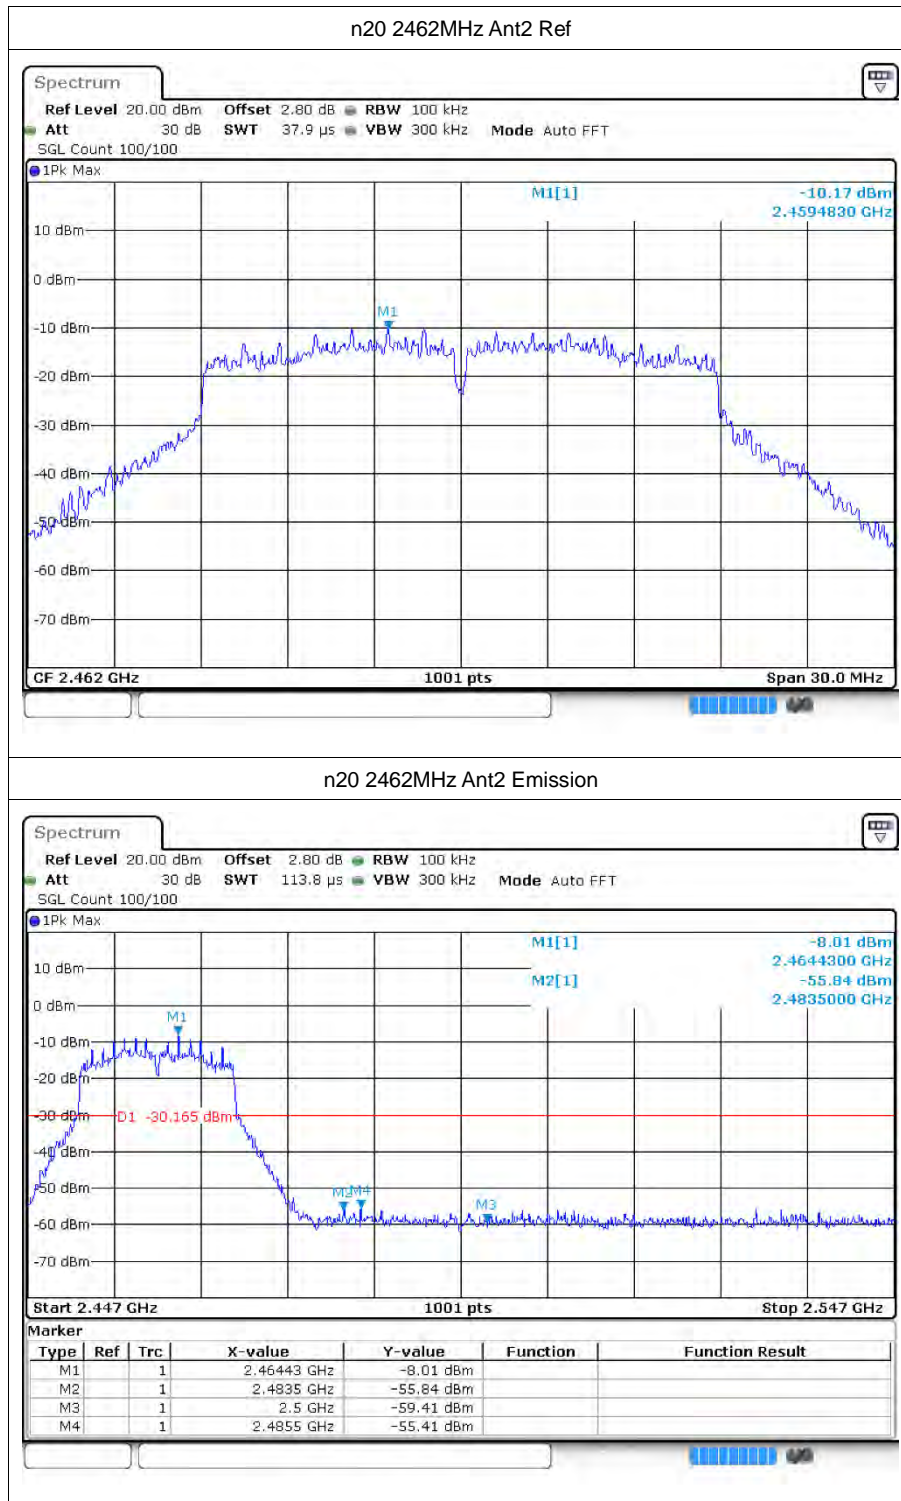


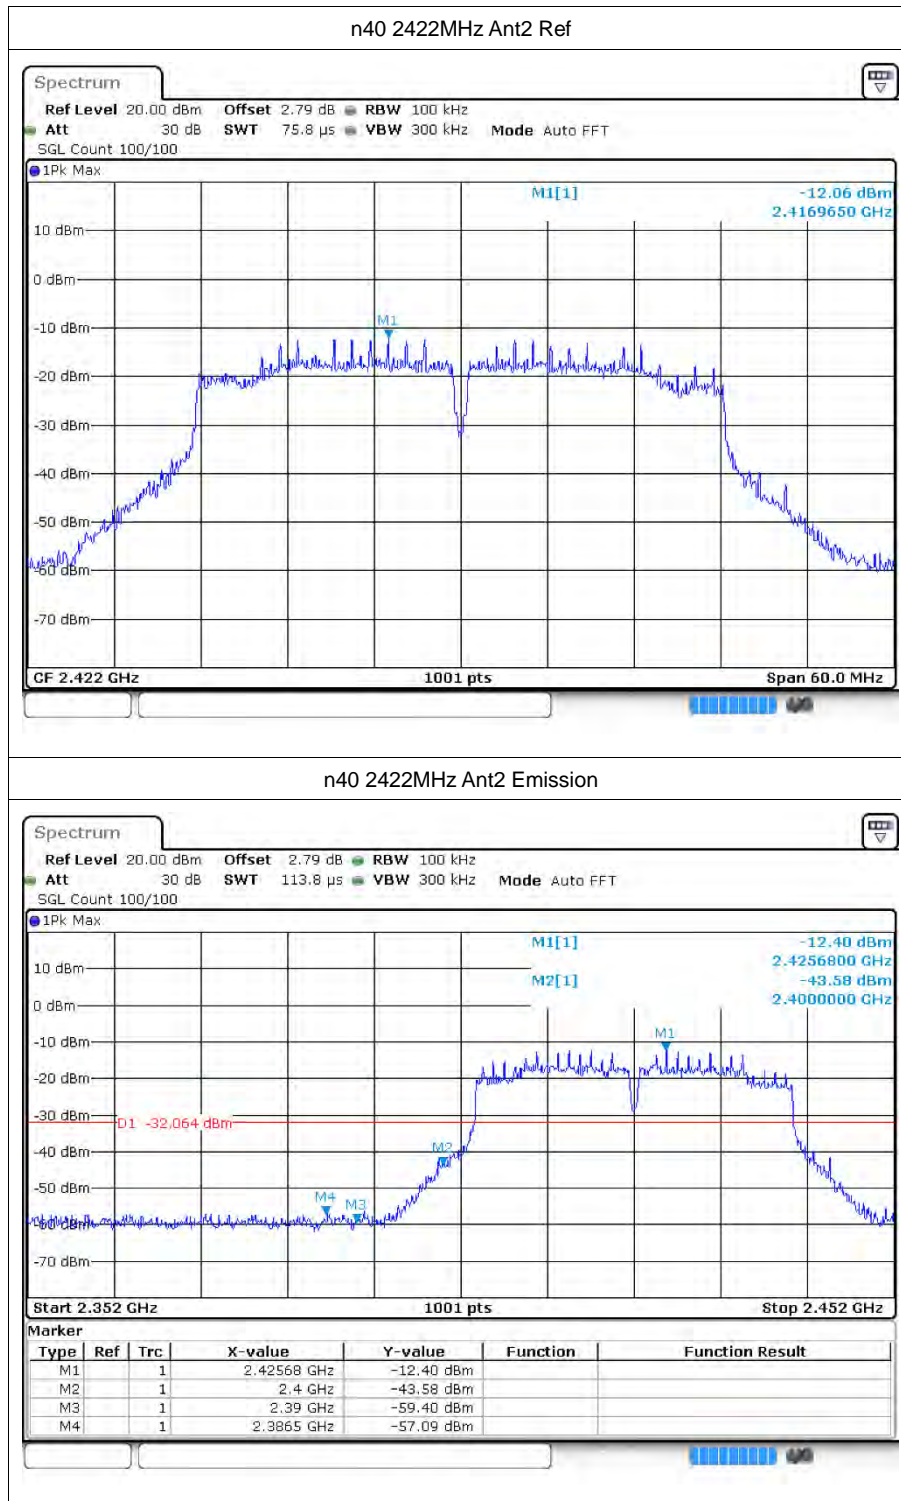


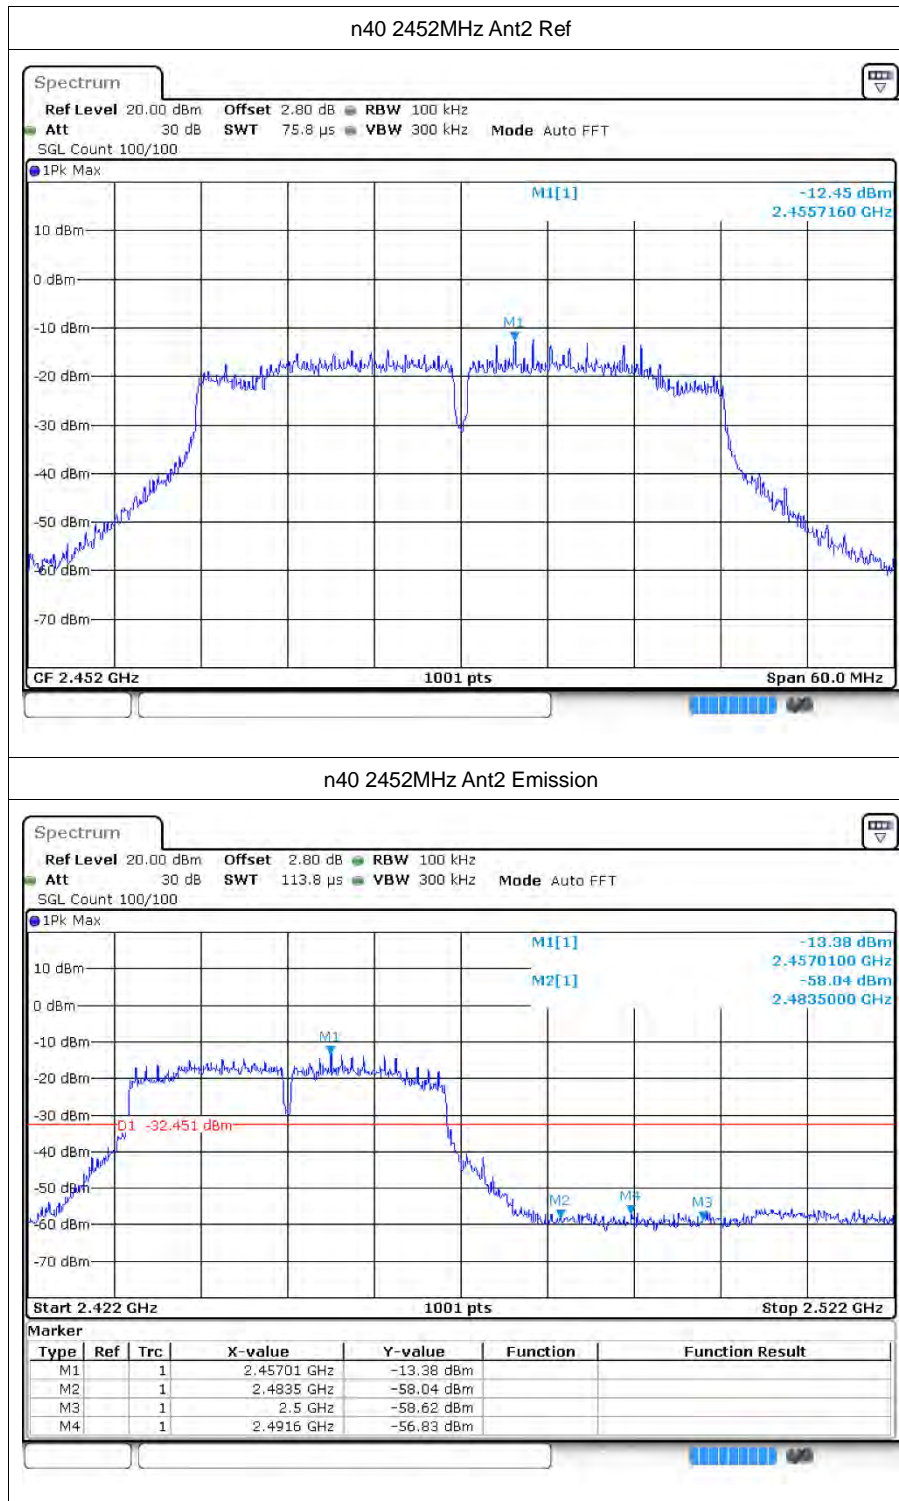

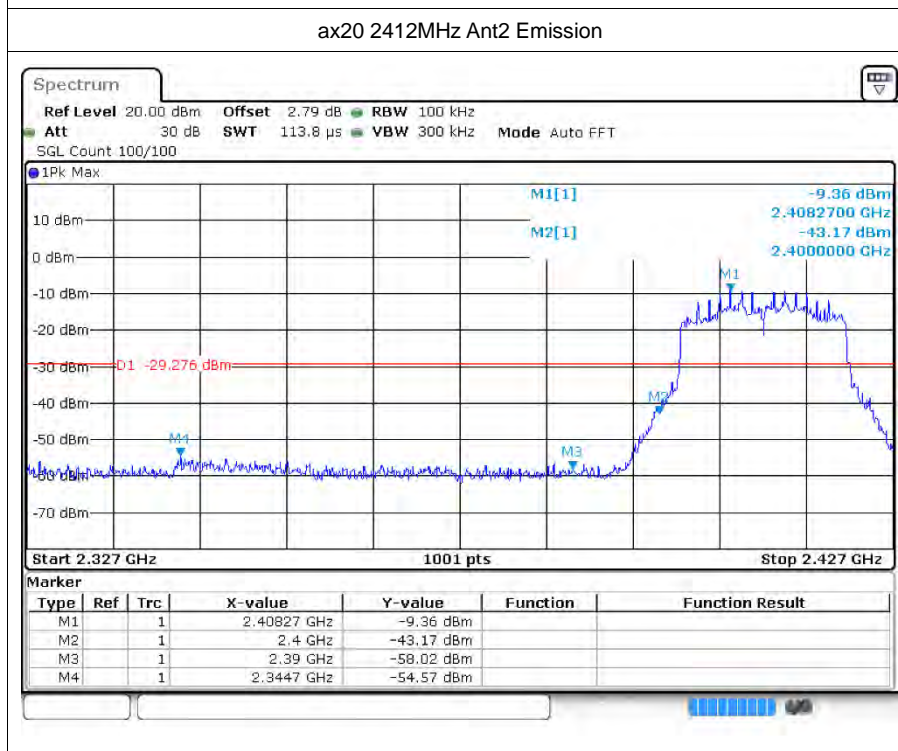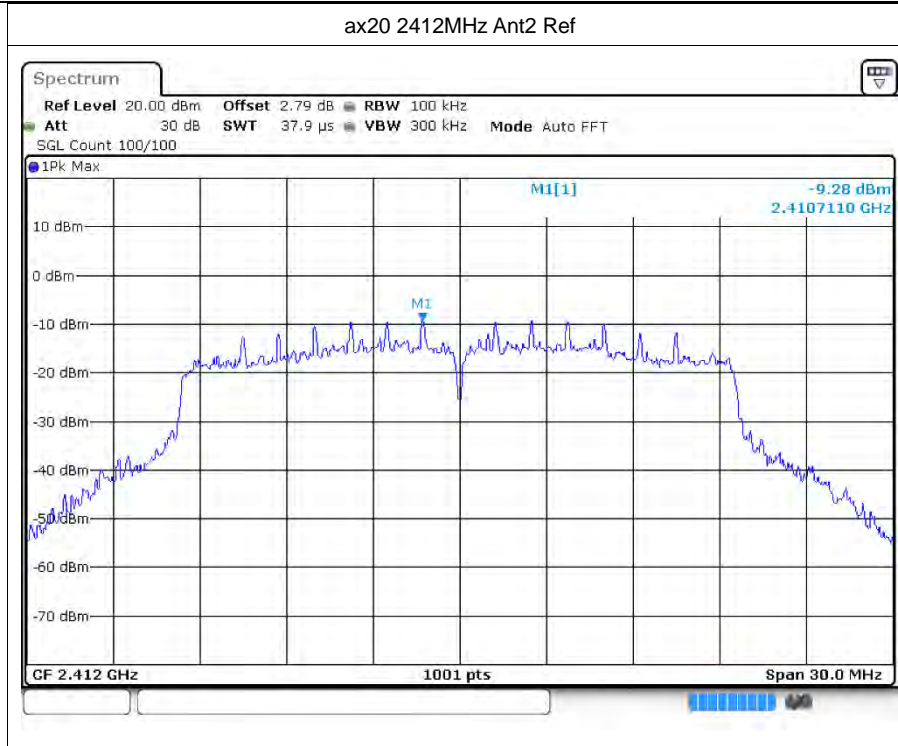

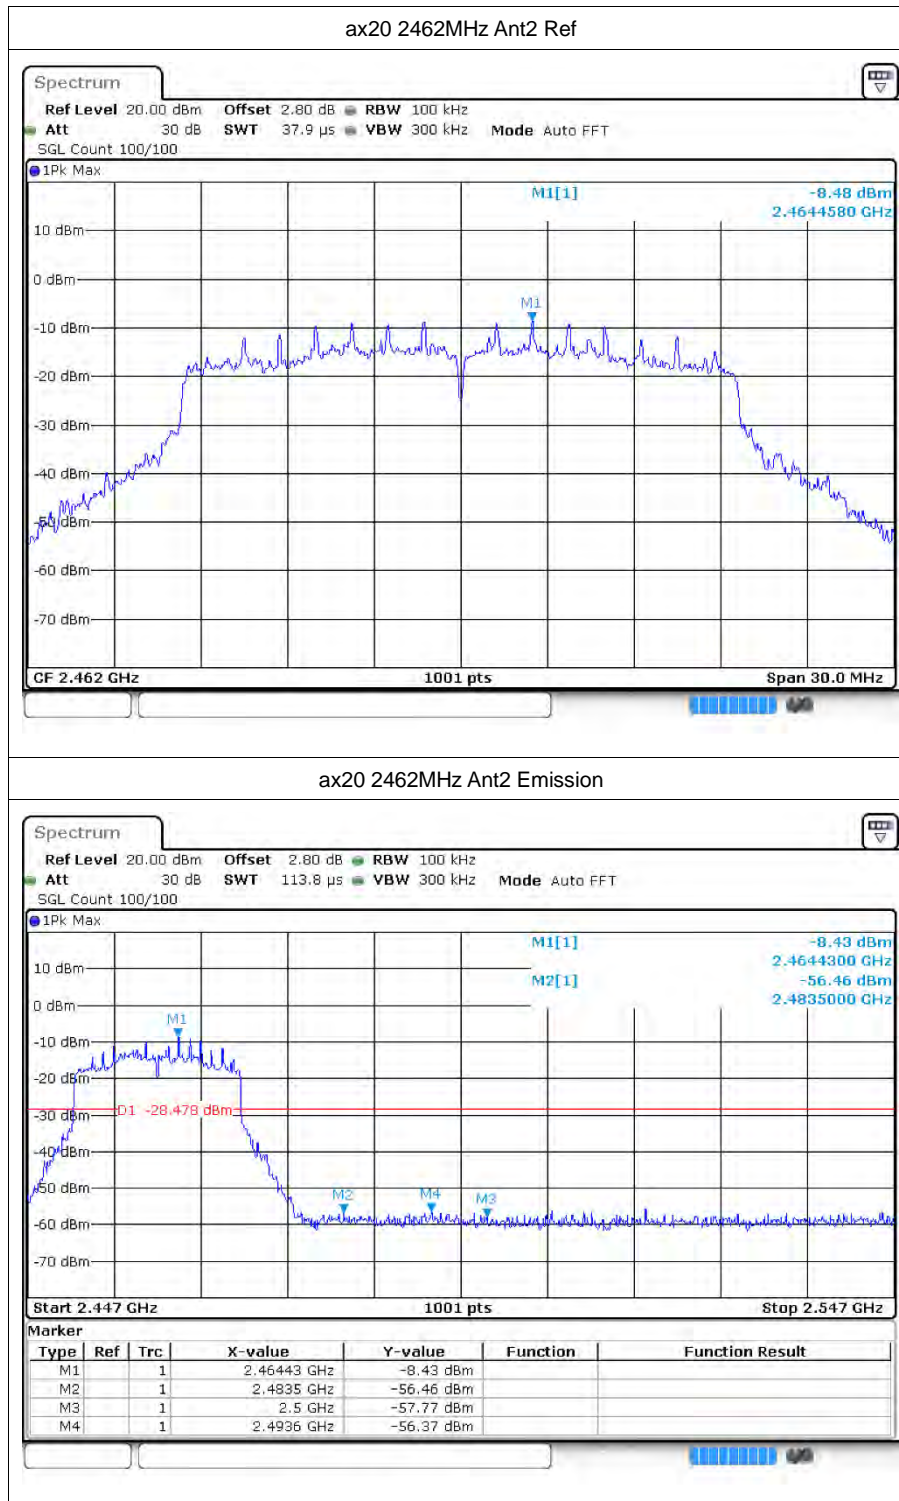

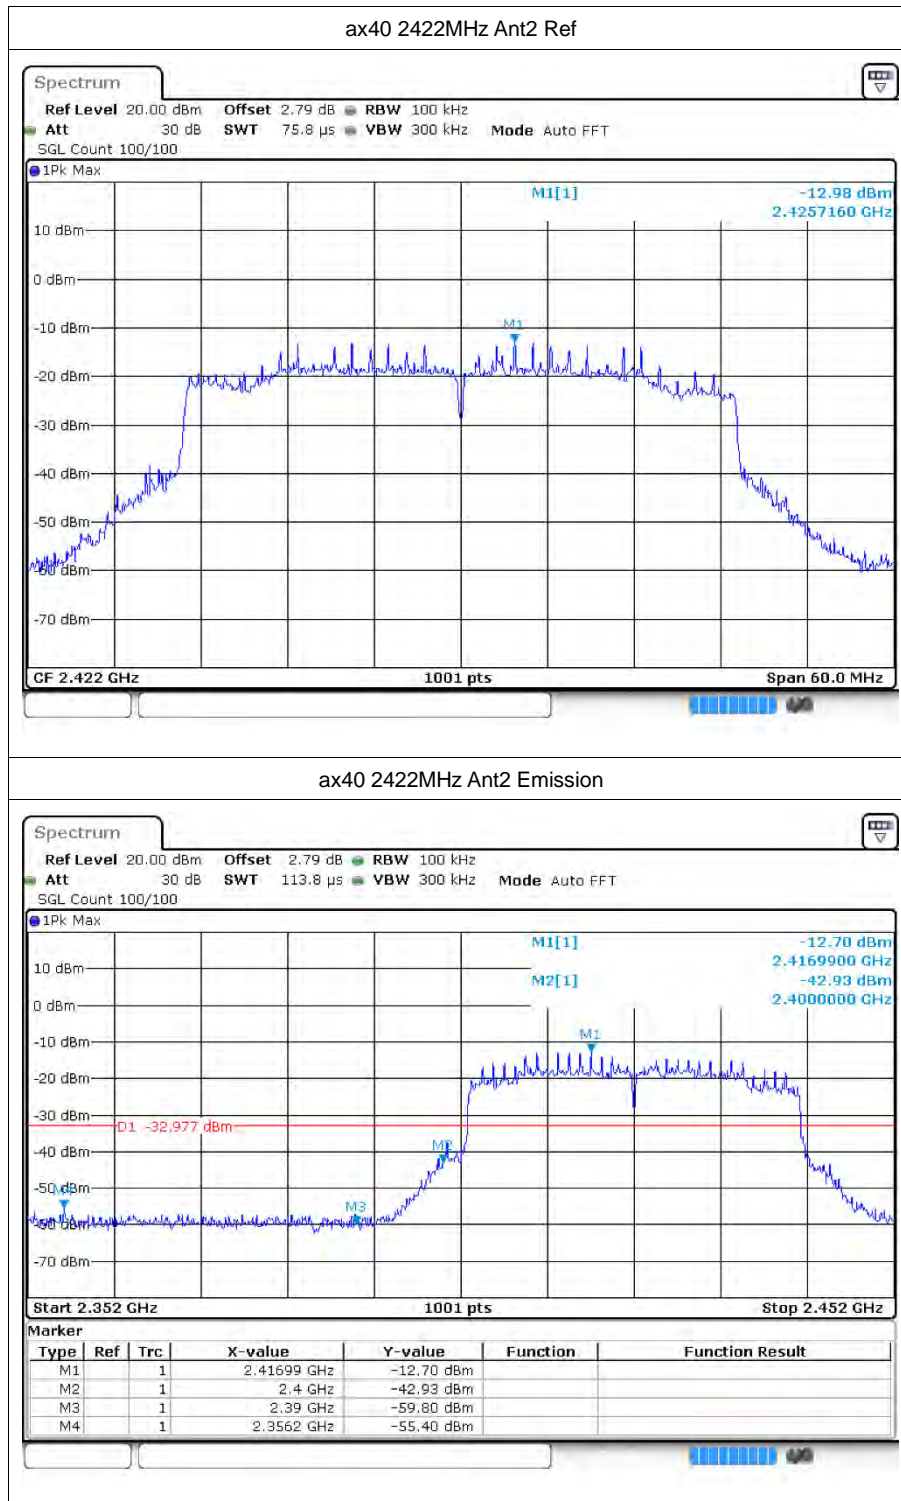

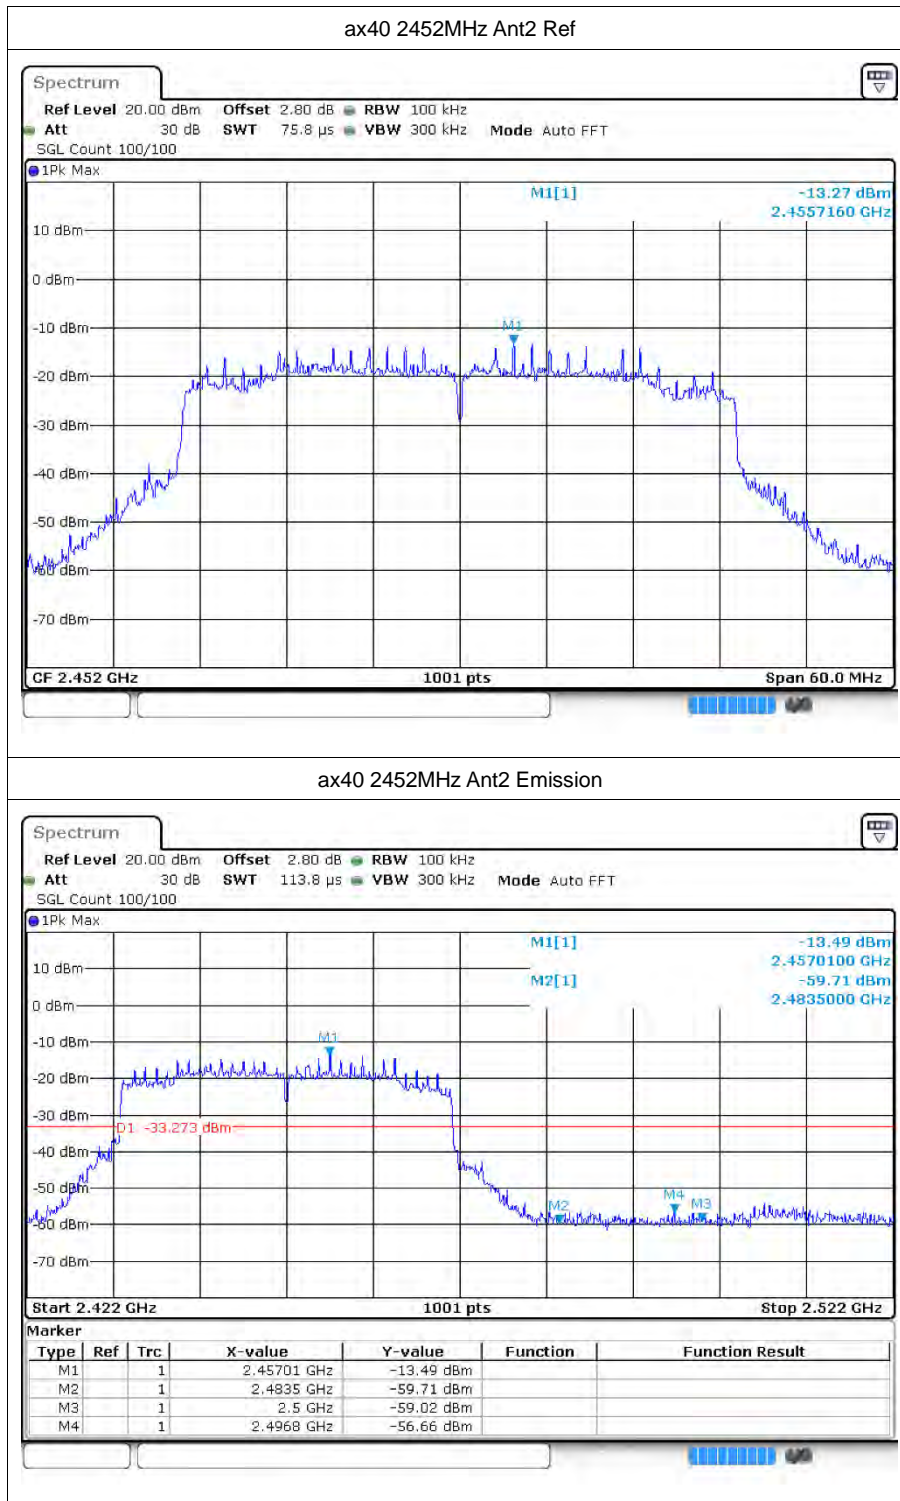



6 Conducted RF Spurious Emission

6.1 Test Result

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-42.34	-20	Pass
b	2437	Ant1	-41.73	-20	Pass
b	2462	Ant1	-41.91	-20	Pass
g	2412	Ant1	-39.9	-20	Pass
g	2437	Ant1	-38.93	-20	Pass
g	2462	Ant1	-39.68	-20	Pass
n20	2412	Ant1	-35.33	-20	Pass
n20	2437	Ant1	-35.75	-20	Pass
n20	2462	Ant1	-35.34	-20	Pass
n40	2422	Ant1	-31.82	-20	Pass
n40	2437	Ant1	-31.16	-20	Pass
n40	2452	Ant1	-29.32	-20	Pass
ax20	2412	Ant1	-34.46	-20	Pass
ax20	2437	Ant1	-35	-20	Pass
ax20	2462	Ant1	-34.9	-20	Pass
ax40	2422	Ant1	-30.69	-20	Pass
ax40	2437	Ant1	-29.92	-20	Pass
ax40	2452	Ant1	-30.77	-20	Pass
b	2412	Ant2	-39.74	-20	Pass
b	2437	Ant2	-40.73	-20	Pass
b	2462	Ant2	-42.01	-20	Pass
g	2412	Ant2	-39.28	-20	Pass
g	2437	Ant2	-38.78	-20	Pass
g	2462	Ant2	-39.16	-20	Pass
n20	2412	Ant2	-35.33	-20	Pass
n20	2437	Ant2	-33.65	-20	Pass
n20	2462	Ant2	-33.45	-20	Pass
n40	2422	Ant2	-30.03	-20	Pass
n40	2437	Ant2	-30.31	-20	Pass
n40	2452	Ant2	-28.77	-20	Pass
ax20	2412	Ant2	-34.48	-20	Pass
ax20	2437	Ant2	-35.39	-20	Pass
ax20	2462	Ant2	-33.84	-20	Pass
ax40	2422	Ant2	-30.02	-20	Pass



ax40	2437	Ant2	-29.8	-20	Pass
ax40	2452	Ant2	-30.56	-20	Pass



6.2 Test Graphs

