



REPORT No. : SZ21060226S01

## Annex D Plots of Maximum SAR Test Results

## GSM850\_GPRS(2 TX slots)\_Right Cheek\_Ch128

Communication System: UID 0, GSM850(class 10) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: HSL\_835 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 824.2 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch128/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.335 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.841 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.369 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.232 W/kg**

Maximum value of SAR (measured) = 0.336 W/kg

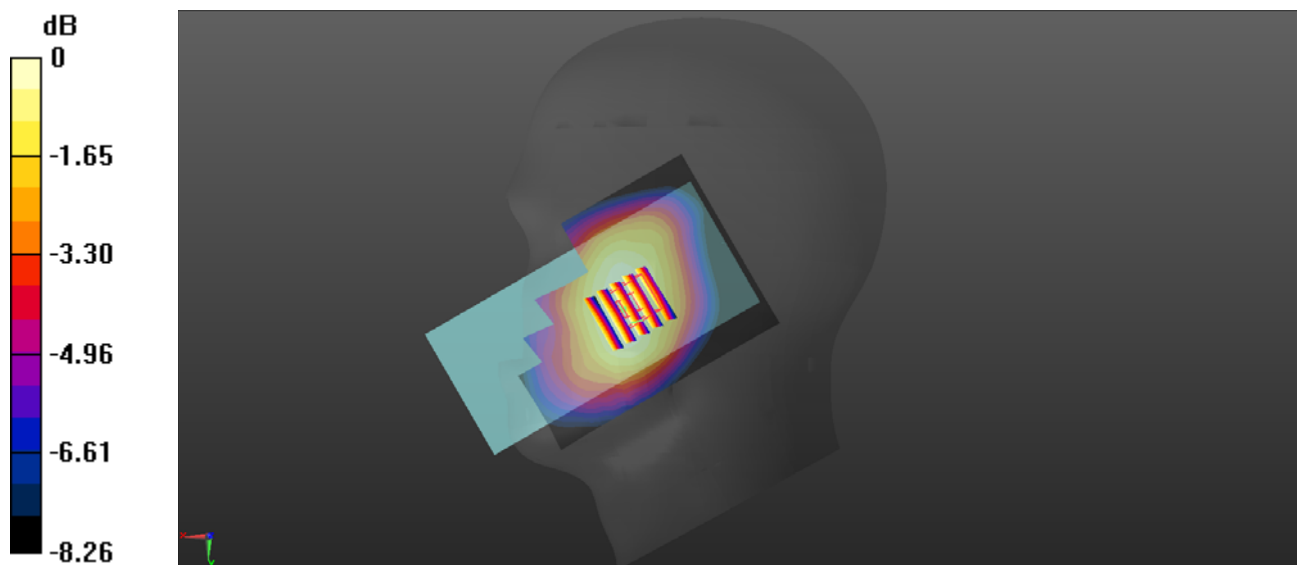

0 dB = 0.336 W/kg

## GSM1900\_GPRS(4 TX slots)\_Right Cheek\_Ch512

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.125$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1850.2 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch512/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.111 W/kg


**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.712 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.134 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

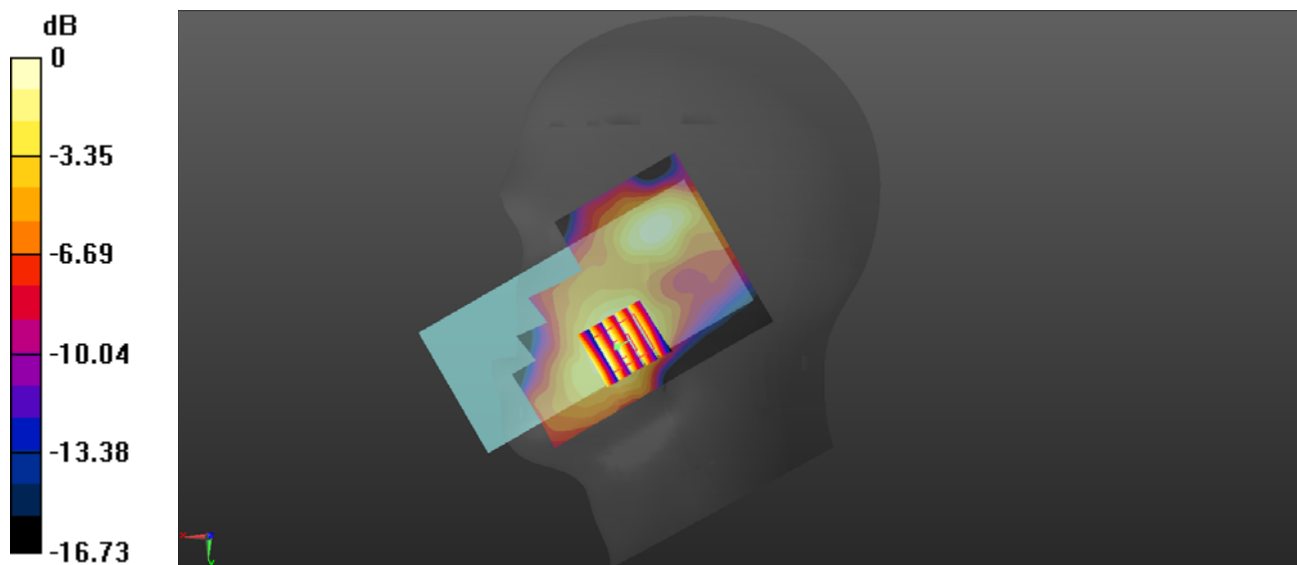

0 dB = 0.105 W/kg

## WCDMA Band II\_RMC 12.2Kbps\_Right Cheek\_Ch9400


Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  S/m;  $\epsilon_r = 40.222$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1880 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch9400/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.134 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.739 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.160 W/kg  
**SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.059 W/kg**  
Maximum value of SAR (measured) = 0.125 W/kg

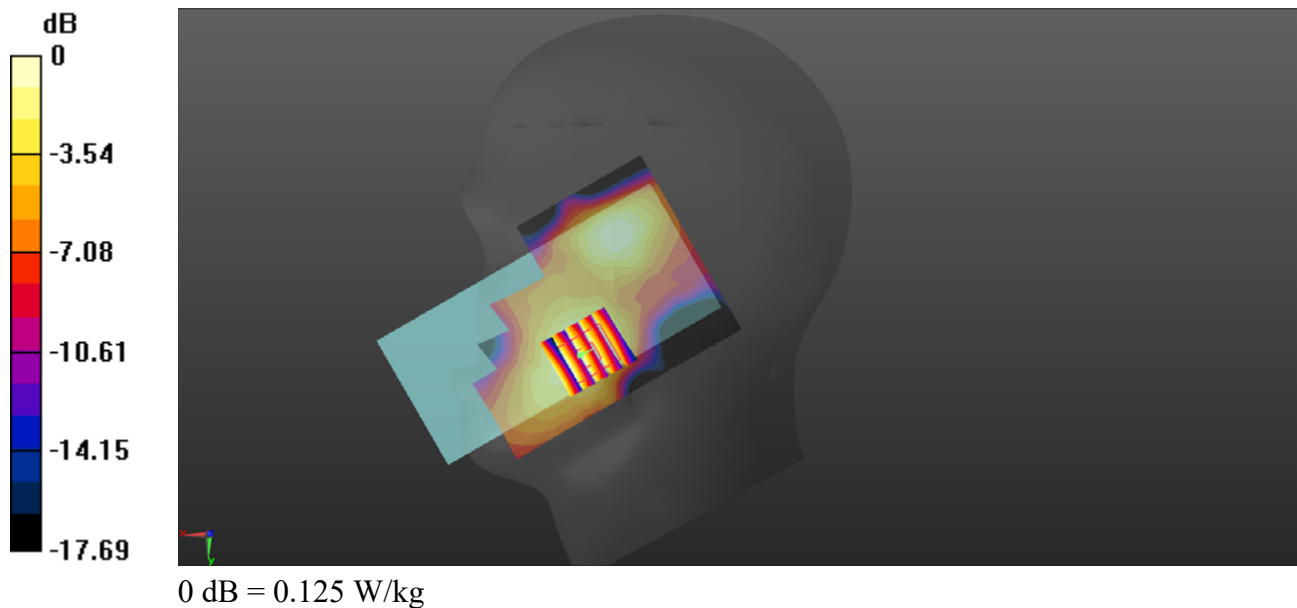

## WCDMA Band IV\_RMC 12.2Kbps\_Right Cheek\_Ch1513


Communication System: UID 0, UMTS-FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.32, 8.32, 8.32) @ 1752.6 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch1513/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.167 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.824 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 0.199 W/kg  
**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.081 W/kg**  
Maximum value of SAR (measured) = 0.161 W/kg

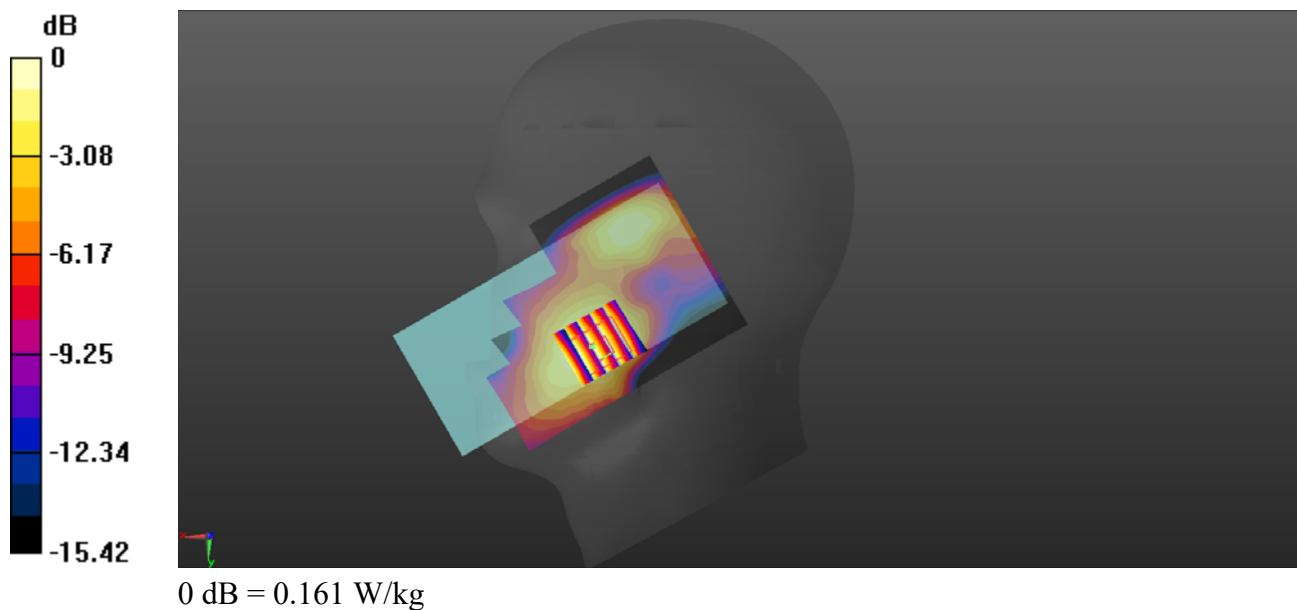

## WCDMA Band V\_RMC 12.2Kbps\_Right Cheek\_Ch4182


Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 836.4 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch4182/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.196 W/kg

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.835 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.218 W/kg  
**SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.129 W/kg**  
Maximum value of SAR (measured) = 0.196 W/kg

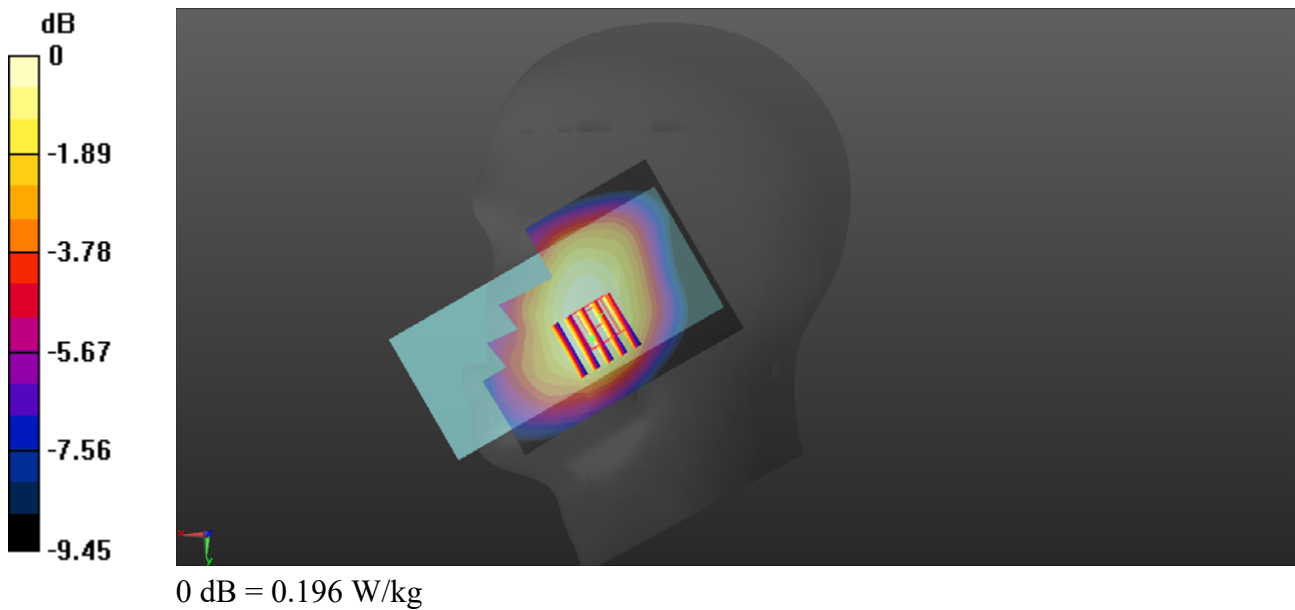

## LTE Band 5\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch20525

Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.92$  S/m;  $\epsilon_r = 41.341$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 836.5 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch20525/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.296 W/kg


**Ch20525/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.421 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.326 W/kg

**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.192 W/kg**

Maximum value of SAR (measured) = 0.292 W/kg

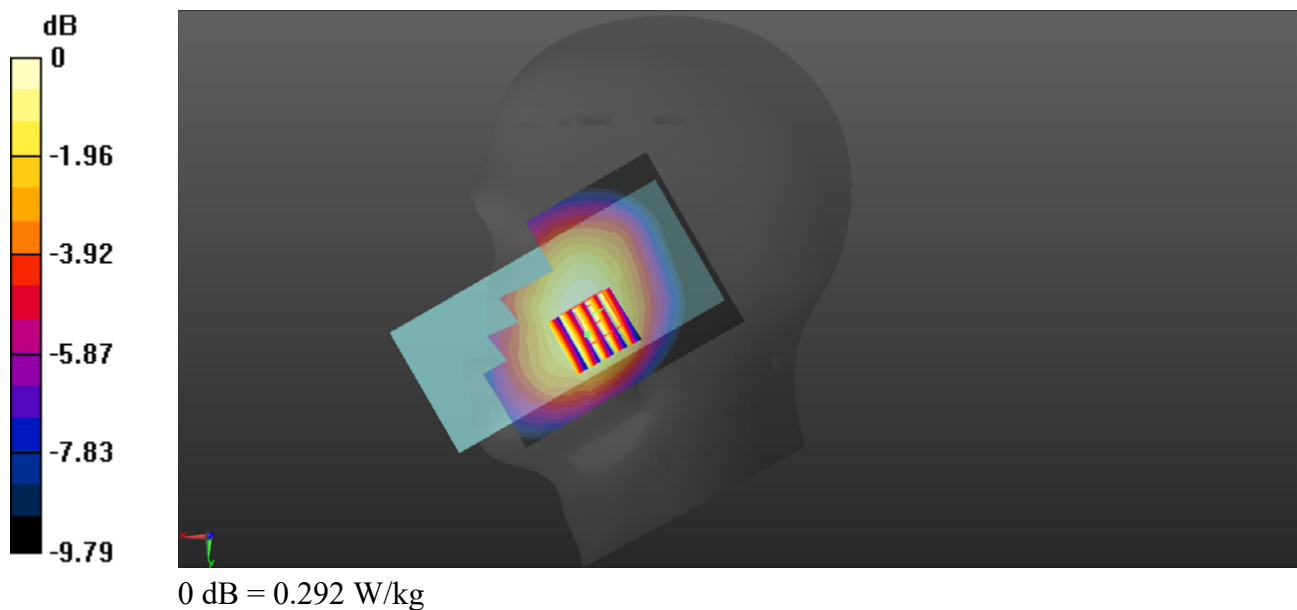

## LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch21100

Communication System: UID 0, LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL\_2600 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.886$  S/m;  $\epsilon_r = 39.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.4, 7.4, 7.4) @ 2535 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch21100/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.132 W/kg


**Ch21100/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.391 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

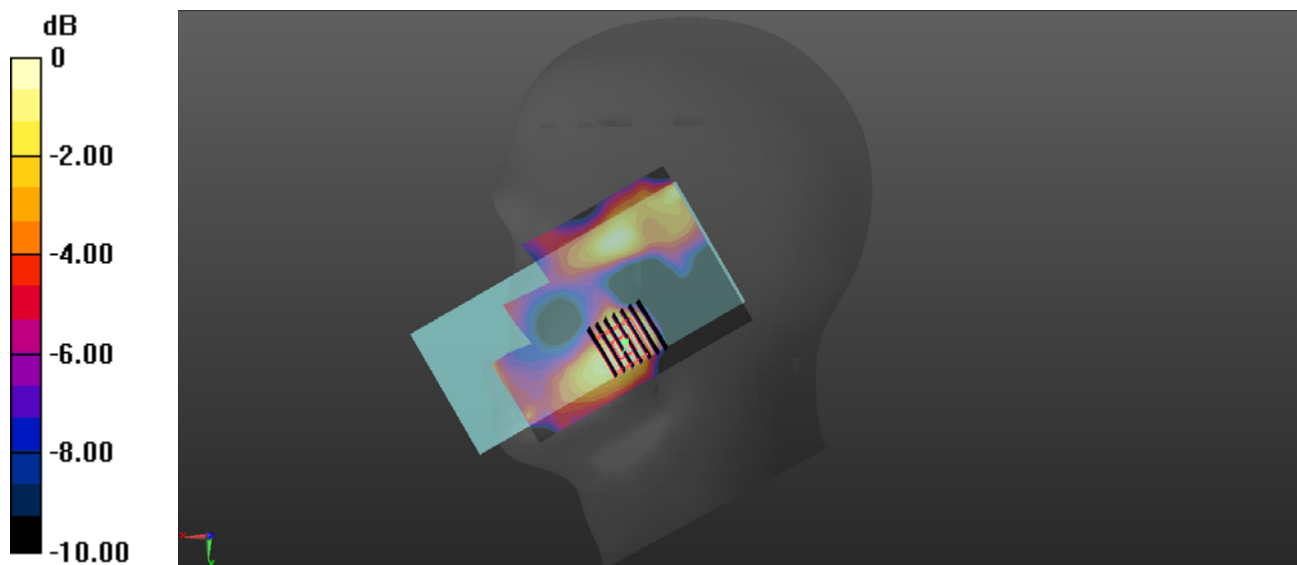

0 dB = 0.122 W/kg



## LTE Band 12\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch23130

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL\_750 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.915$  S/m;  $\epsilon_r = 42.155$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 711 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23130/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg


**Ch23130/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.159 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

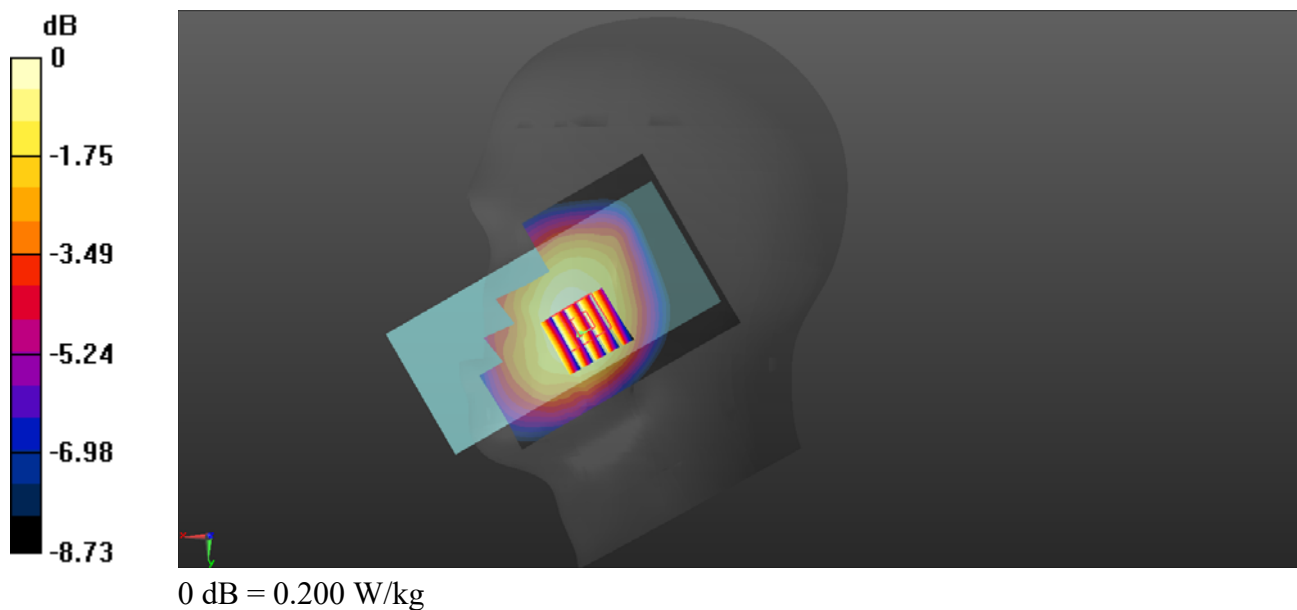

## LTE Band 13\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch23230


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 41.722$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 782 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23230/Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.215 \text{ W/kg}$

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $3.364 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $0.237 \text{ W/kg}$   
**SAR(1 g) =  $0.185 \text{ W/kg}$ ; SAR(10 g) =  $0.140 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.212 \text{ W/kg}$

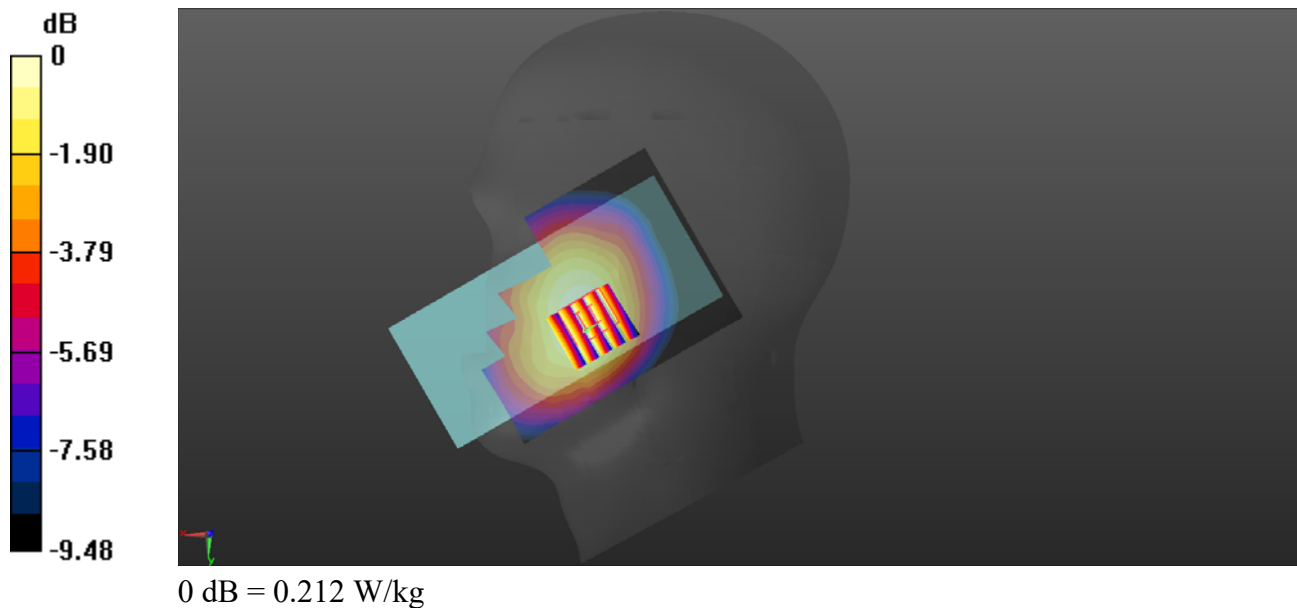

## LTE Band 14\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch23330


Communication System: UID 0, LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.713$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 793 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23330/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.199 W/kg

**Ch23330/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.466 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.219 W/kg  
**SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.129 W/kg**  
Maximum value of SAR (measured) = 0.196 W/kg

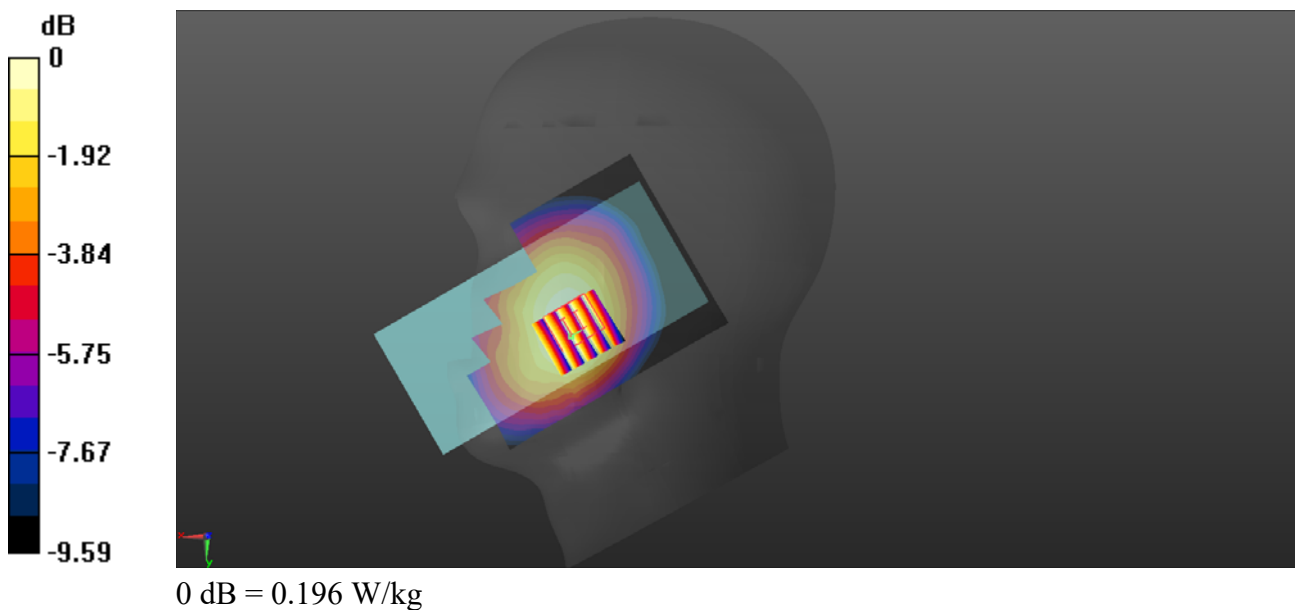

## LTE Band 25\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch26140

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1860 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch26140/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg


**Ch26140/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.767 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.253 W/kg

**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

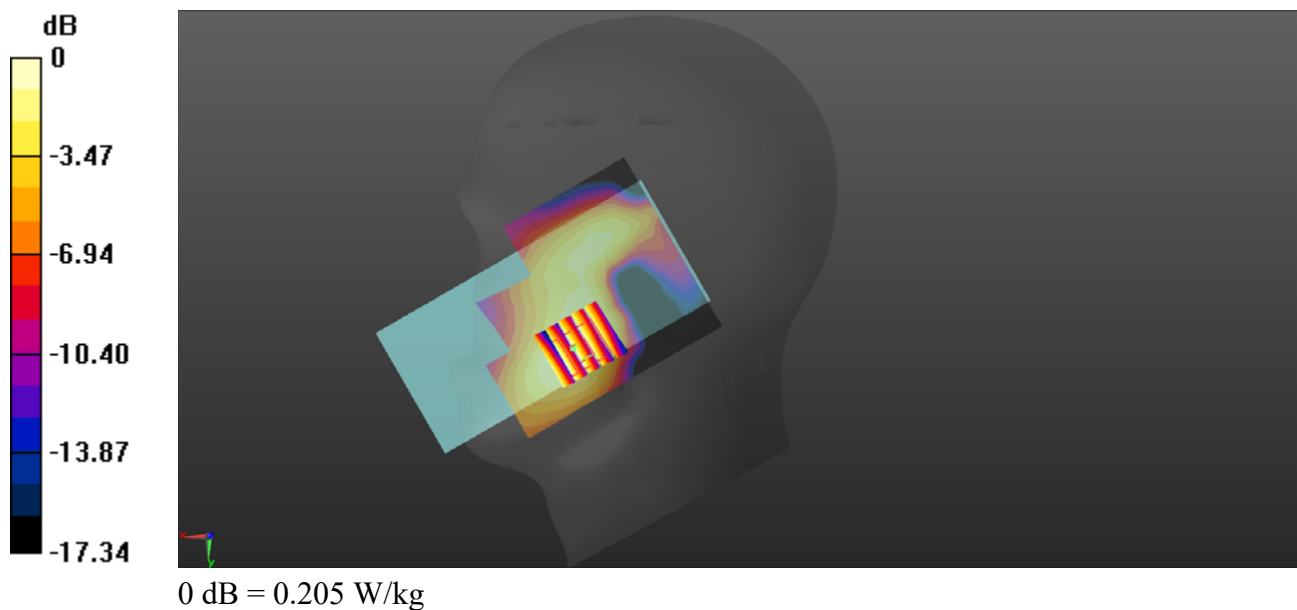

## LTE Band 26\_15MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch26965

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 841.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.422$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 841.5 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch26965/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.243 W/kg


**Ch26965/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.524 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.273 W/kg

**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.245 W/kg

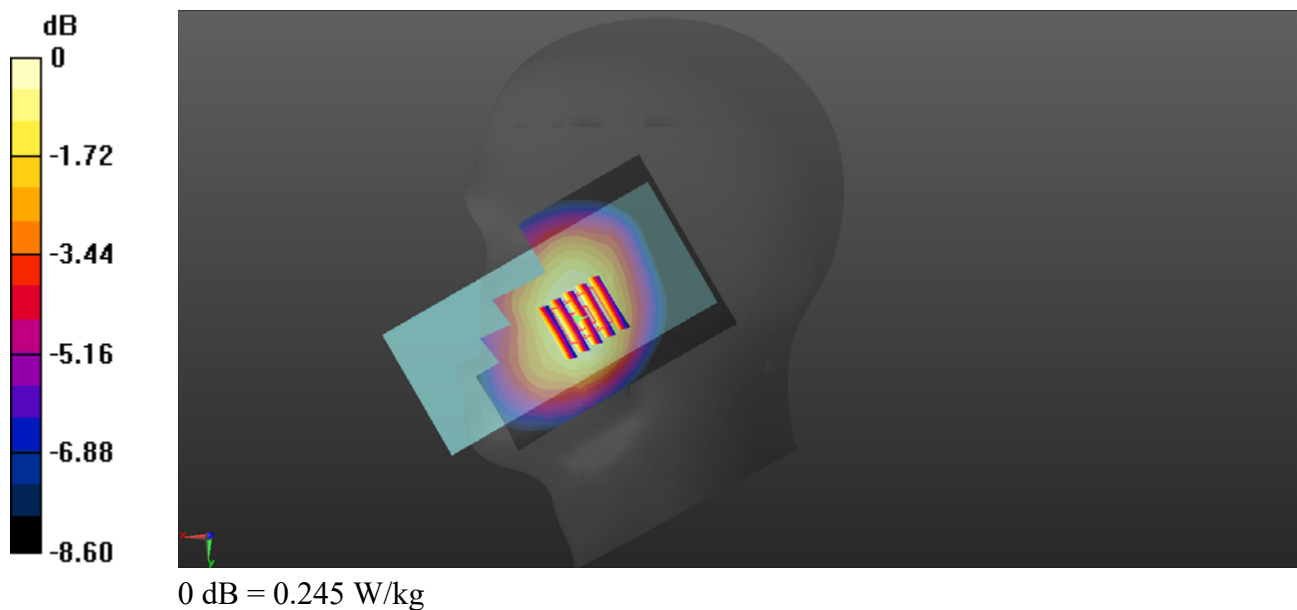

## LTE Band 30\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch27710

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.66$  S/m;  $\epsilon_r = 39.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2310 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch27710/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0624 W/kg


**Ch27710/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4350 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0740 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0581 W/kg

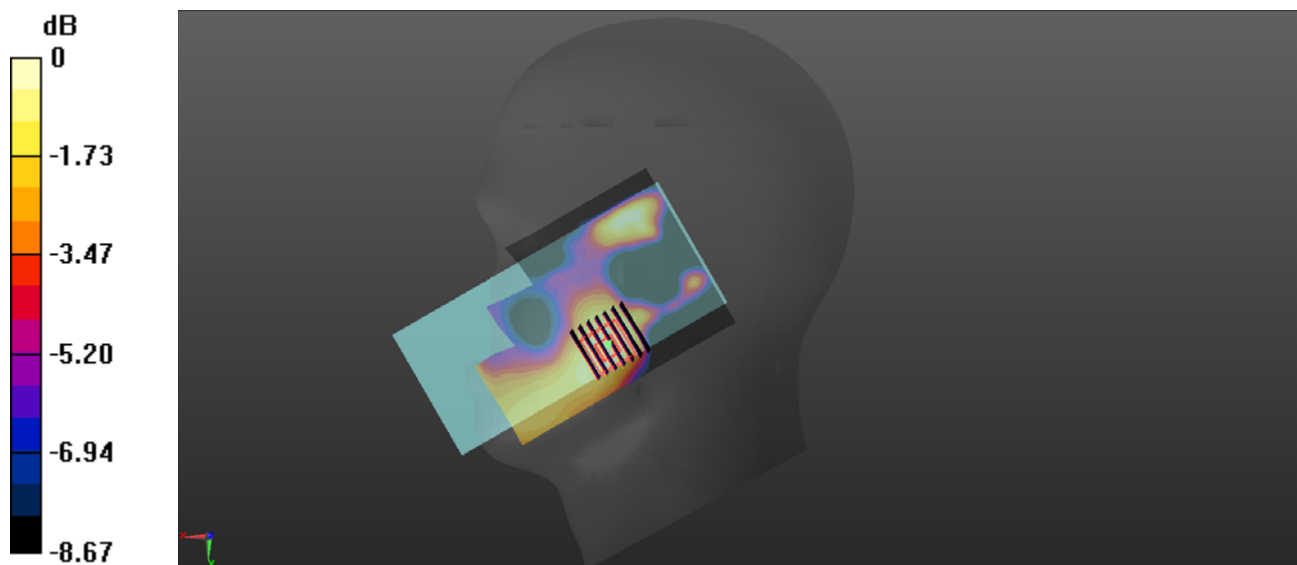

0 dB = 0.0581 W/kg

## LTE Band 40A\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch38750

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.66$  S/m;  $\epsilon_r = 39.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2310 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch38750/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.159 W/kg


**Ch38750/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.120 W/kg

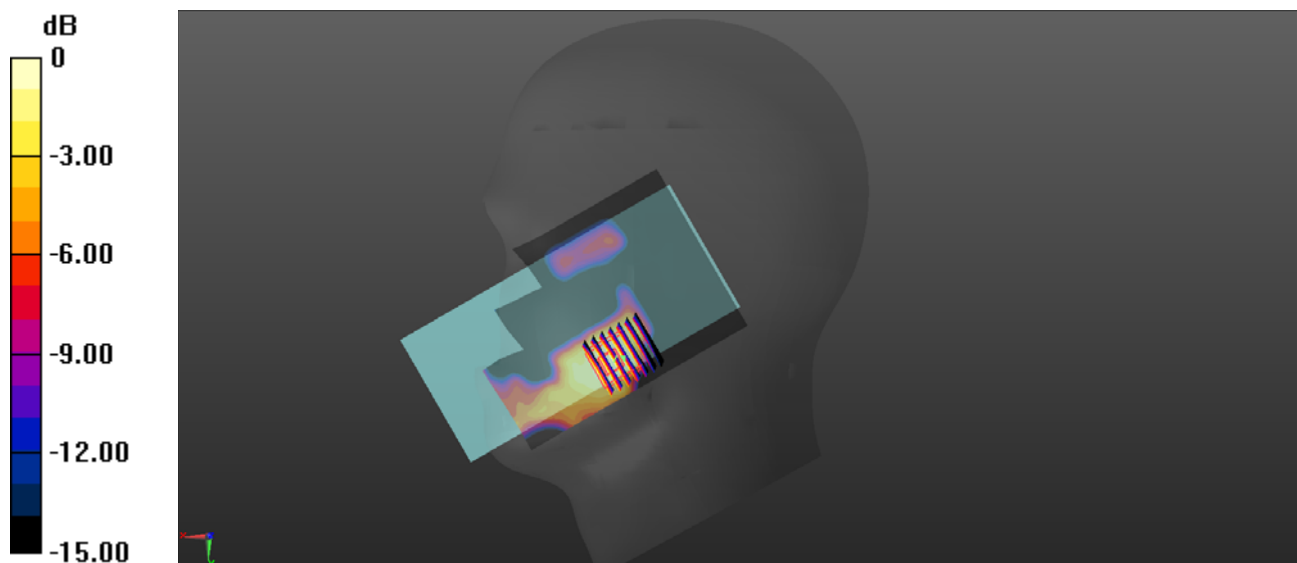

0 dB = 0.120 W/kg

## LTE Band 40B\_10MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch39200

Communication System: UID 0, LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2300 Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.711$  S/m;  $\epsilon_r = 39.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2355 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch39200/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.136 W/kg


**Ch39200/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.134 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.104 W/kg

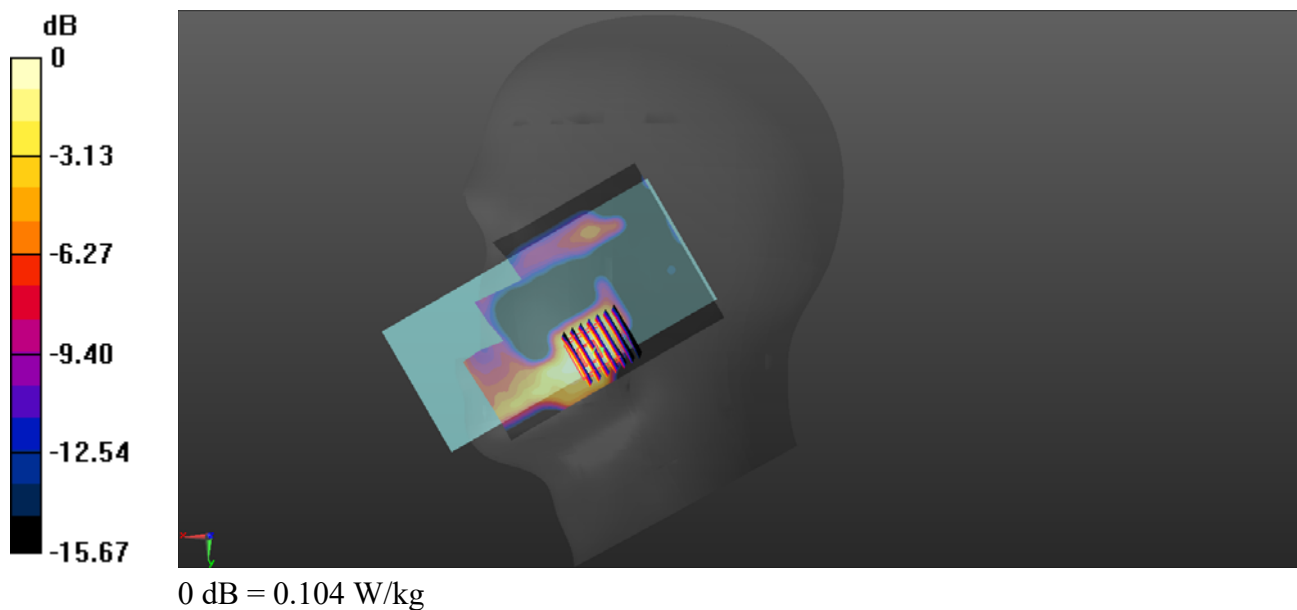



## LTE Band 41\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch41140

Communication System: UID 0, LTE (0); Frequency: 2645 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600 Medium parameters used:  $f = 2645$  MHz;  $\sigma = 1.996$  S/m;  $\epsilon_r = 39.099$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.4, 7.4, 7.4) @ 2645 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch41140/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.200 W/kg


**Ch41140/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

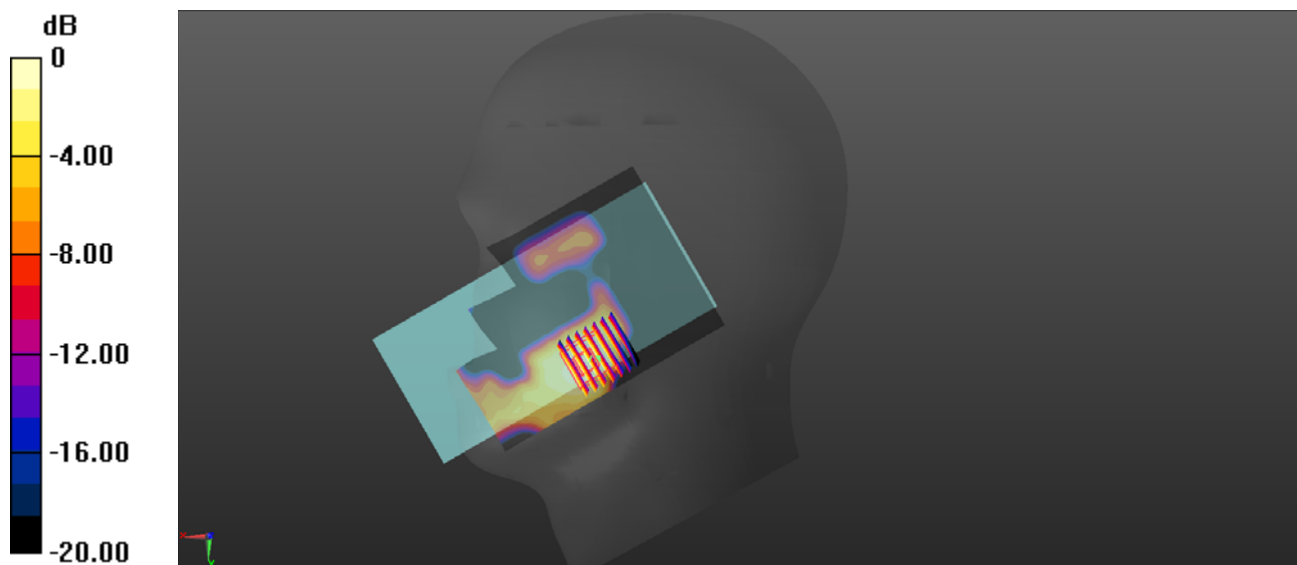

0 dB = 0.151 W/kg

## LTE Band 66\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch132572

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL\_1750 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.32, 8.32, 8.32) @ 1770 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch132572/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.256 W/kg


**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.935 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 0.248 W/kg

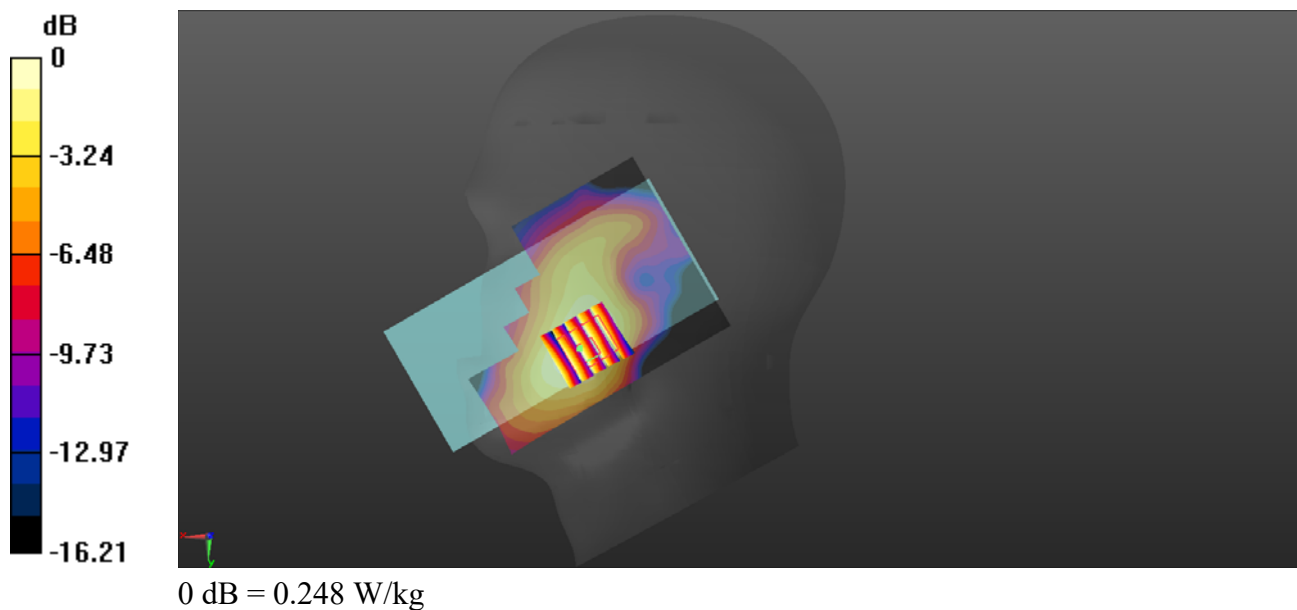

## LTE Band 71\_20MHz\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch133222

Communication System: UID 0, LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL\_750 Medium parameters used:  $f = 673$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.151$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 673 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch133222/Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg


**Ch133222/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.912 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.141 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

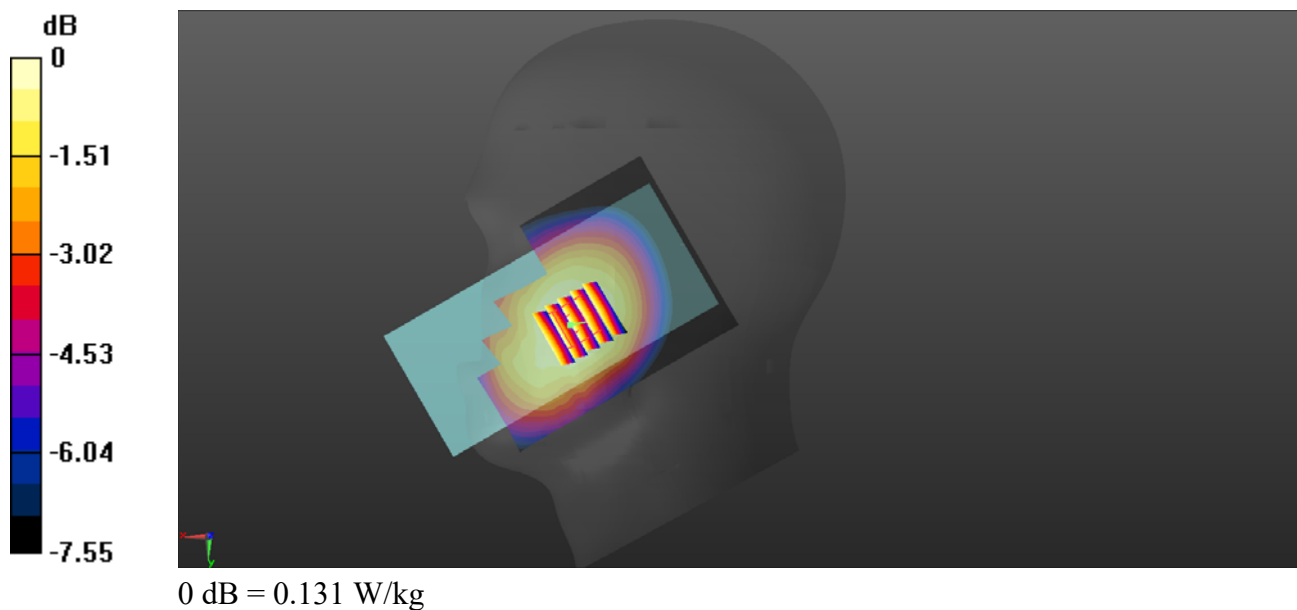

## WLAN 2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch6

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.78$  S/m;  $\epsilon_r = 39.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.58, 7.58, 7.58) @ 2437 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch6/Area Scan (81x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.99 W/kg

**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 10.96 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 2.89 W/kg  
**SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.432 W/kg**  
Maximum value of SAR (measured) = 2.09 W/kg

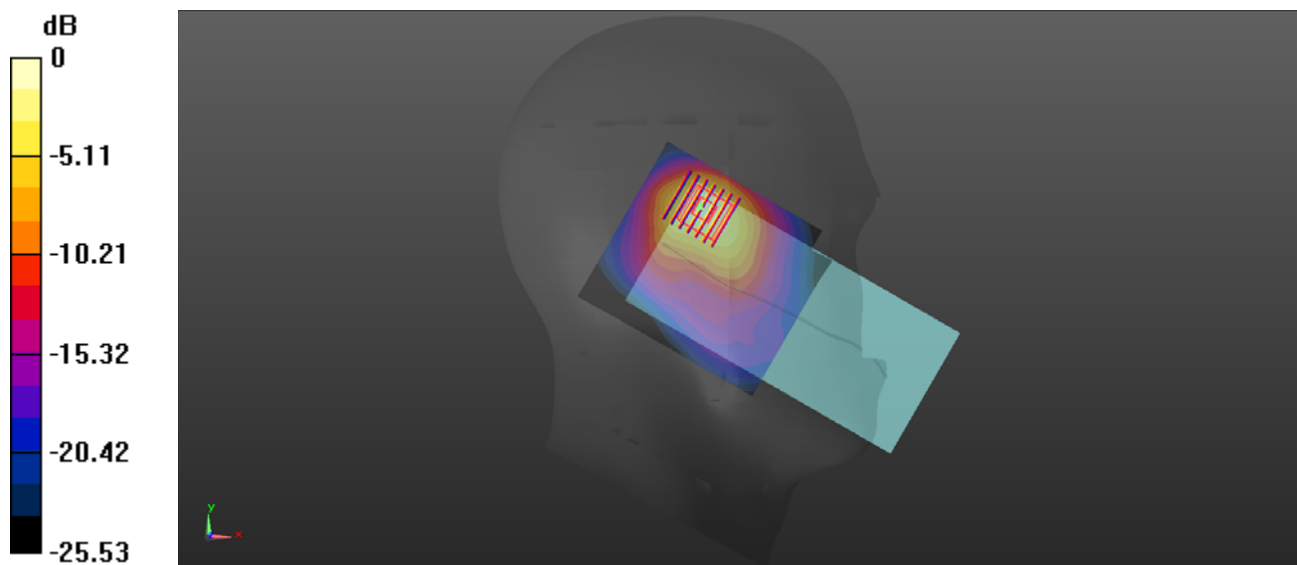

0 dB = 2.09 W/kg = 3.20 dBW/kg

## WLAN 5.2GHz\_802.11a 6Mbps\_Left Cheek\_Ch48


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5250 Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.718$  S/m;  $\epsilon_r = 35.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.36, 5.36, 5.36) @ 5240 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch48/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.937 W/kg

**Ch48/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 4.117 V/m; Power Drift = 0.02 dB  
Peak SAR (extrapolated) = 1.80 W/kg  
**SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.161 W/kg**  
Maximum value of SAR (measured) = 0.945 W/kg

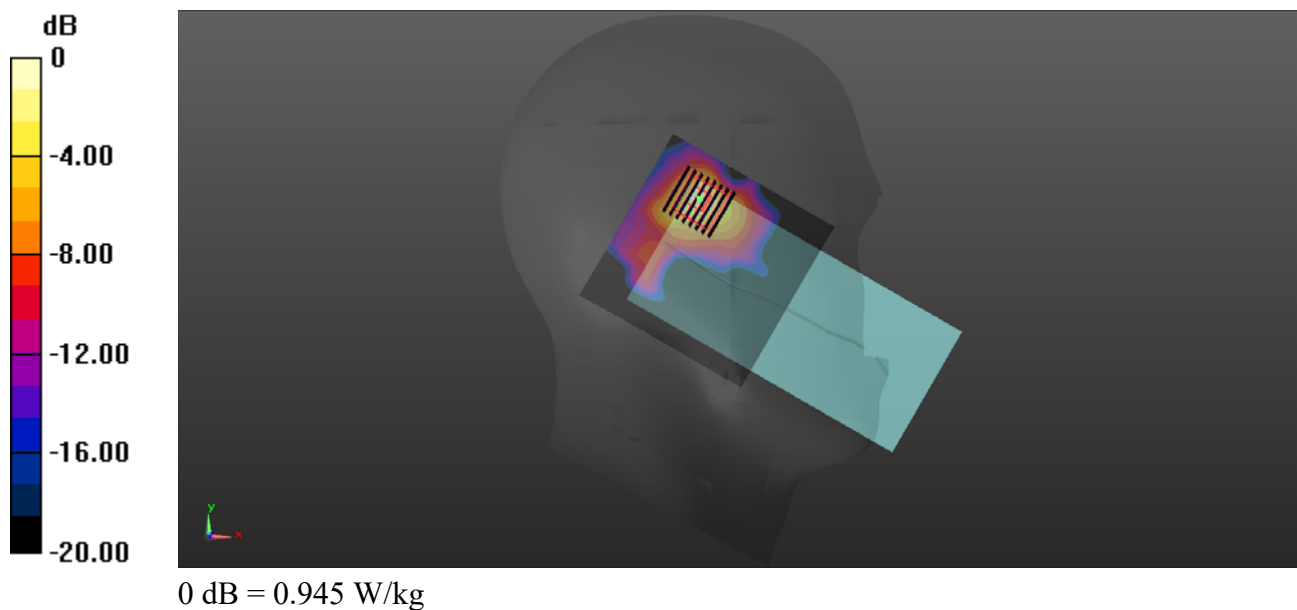

## WLAN 5.3GHz\_802.11a 6Mbps\_Left Cheek\_Ch64


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5250 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.749$  S/m;  $\epsilon_r = 35.822$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.36, 5.36, 5.36) @ 5320 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch64/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.01 W/kg

**Ch64/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 5.725 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 3.83 W/kg  
**SAR(1 g) = 0.914 W/kg; SAR(10 g) = 0.364 W/kg**  
Maximum value of SAR (measured) = 2.01 W/kg

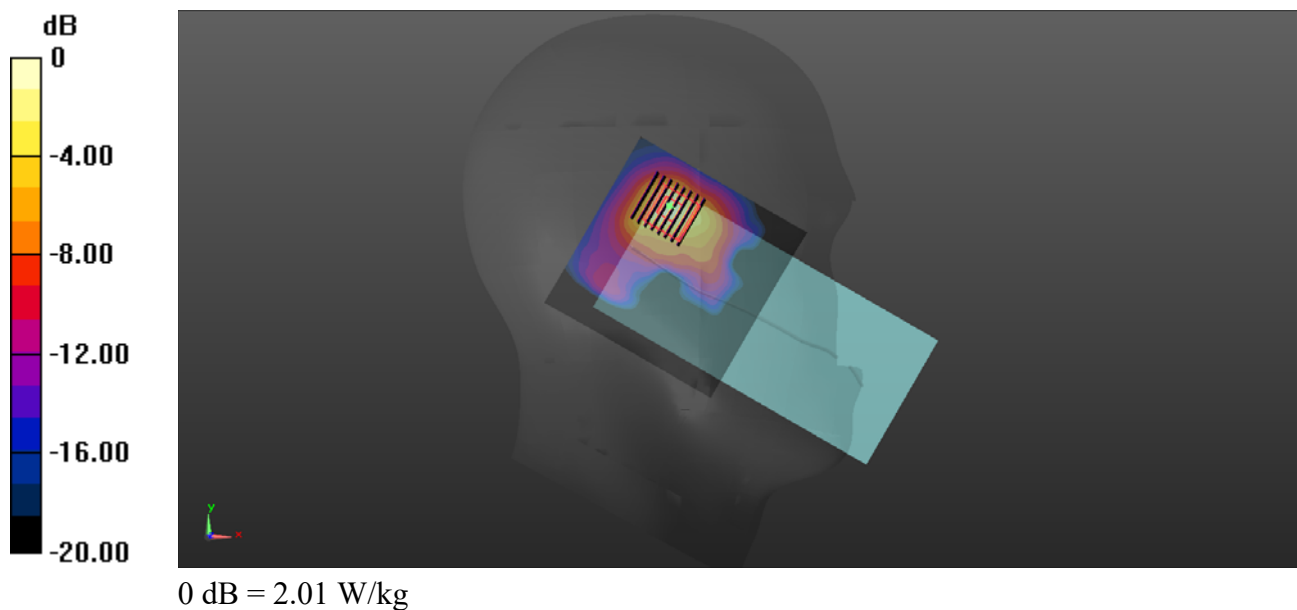

## WLAN 5.8GHz\_802.11a 6Mbps\_Left Cheek\_Ch149


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5750 Medium parameters used:  $f = 5745$  MHz;  $\sigma = 5.188$  S/m;  $\epsilon_r = 35.339$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(4.78, 4.78, 4.78) @ 5745 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch149/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.310 W/kg

**Ch149/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 1.881 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.631 W/kg  
**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.047 W/kg**  
Maximum value of SAR (measured) = 0.312 W/kg

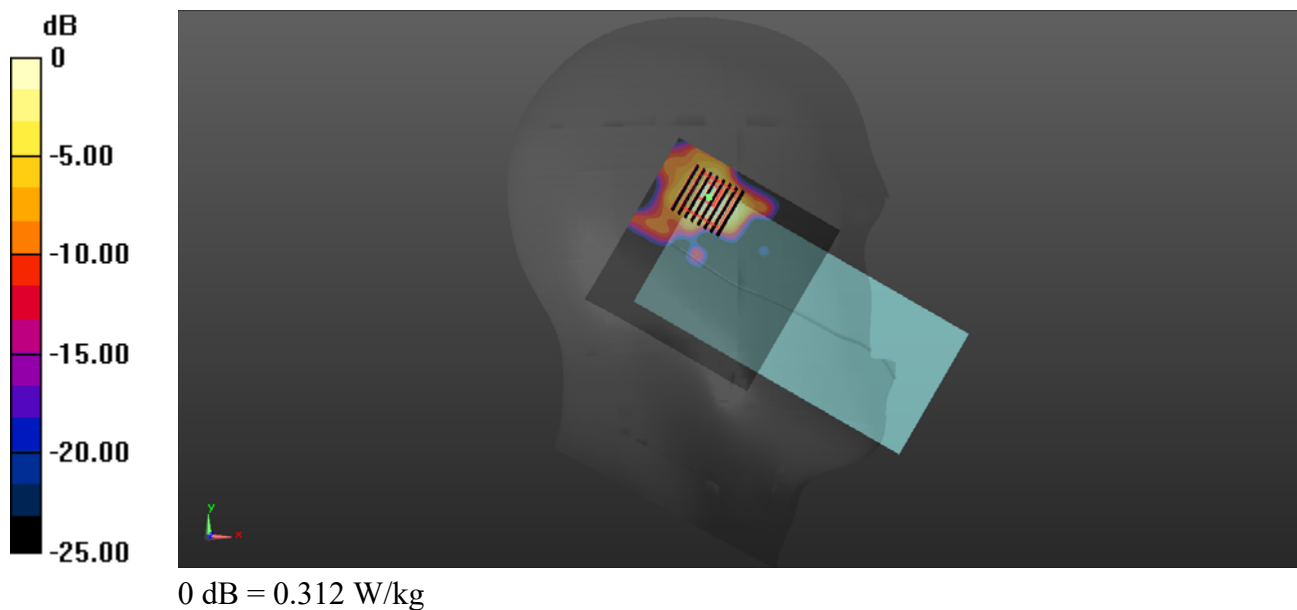

## GSM850\_GPRS(2 TX slots)\_Back Side\_10mm\_Ch128


Communication System: UID 0, GSM850(class 10) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15  
Medium: HSL\_835 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 824.2 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch128/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.563 W/kg

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.34 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.623 W/kg  
**SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.366 W/kg**  
Maximum value of SAR (measured) = 0.561 W/kg

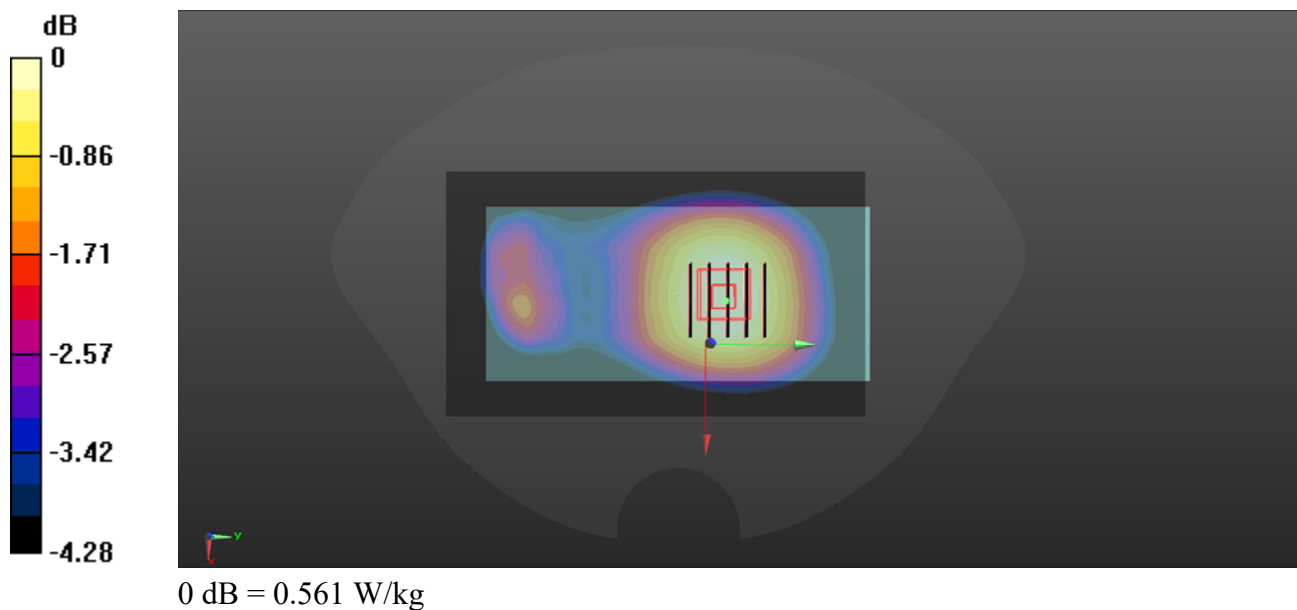



## GSM1900\_GPRS(4 TX slots)\_Back Side\_10mm\_Ch810


Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08  
Medium: HSL\_1900 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.185$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1909.8 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch810/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.512 W/kg

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.937 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.671 W/kg  
**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.211 W/kg**  
Maximum value of SAR (measured) = 0.503 W/kg

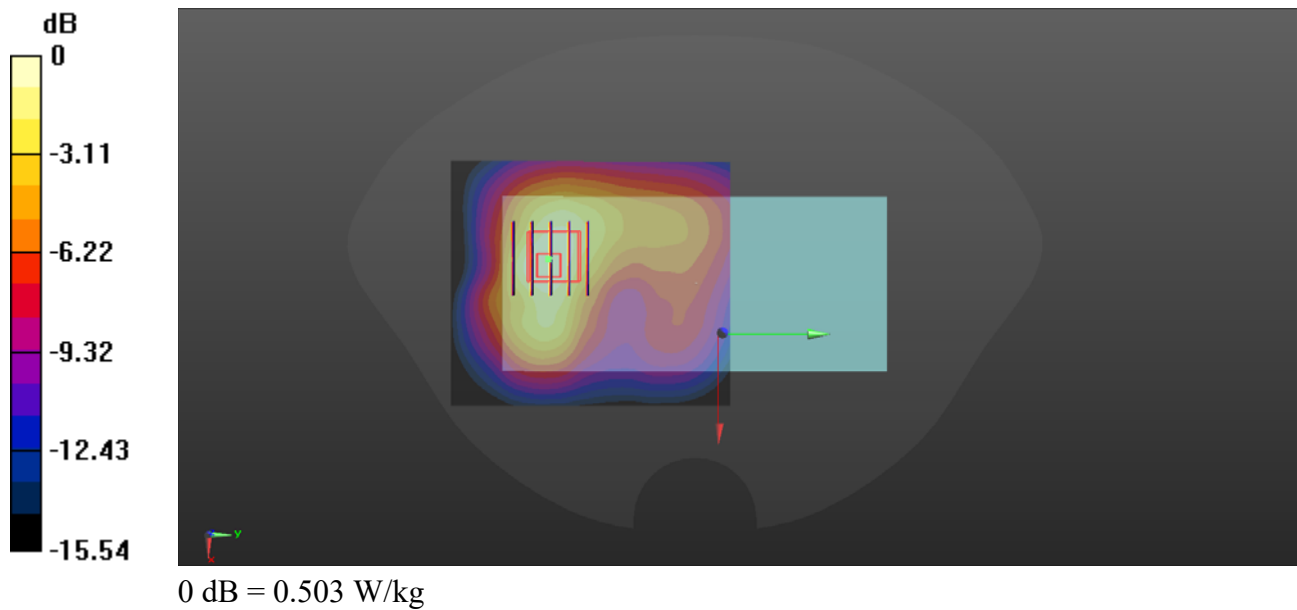

## WCDMA Band II\_RMC 12.2Kbps\_Back Side\_10mm\_Ch9262


Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.42$  S/m;  $\epsilon_r = 40.199$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1852.4 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch9262/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.597 W/kg

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.933 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.817 W/kg  
**SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.241 W/kg**  
Maximum value of SAR (measured) = 0.573 W/kg

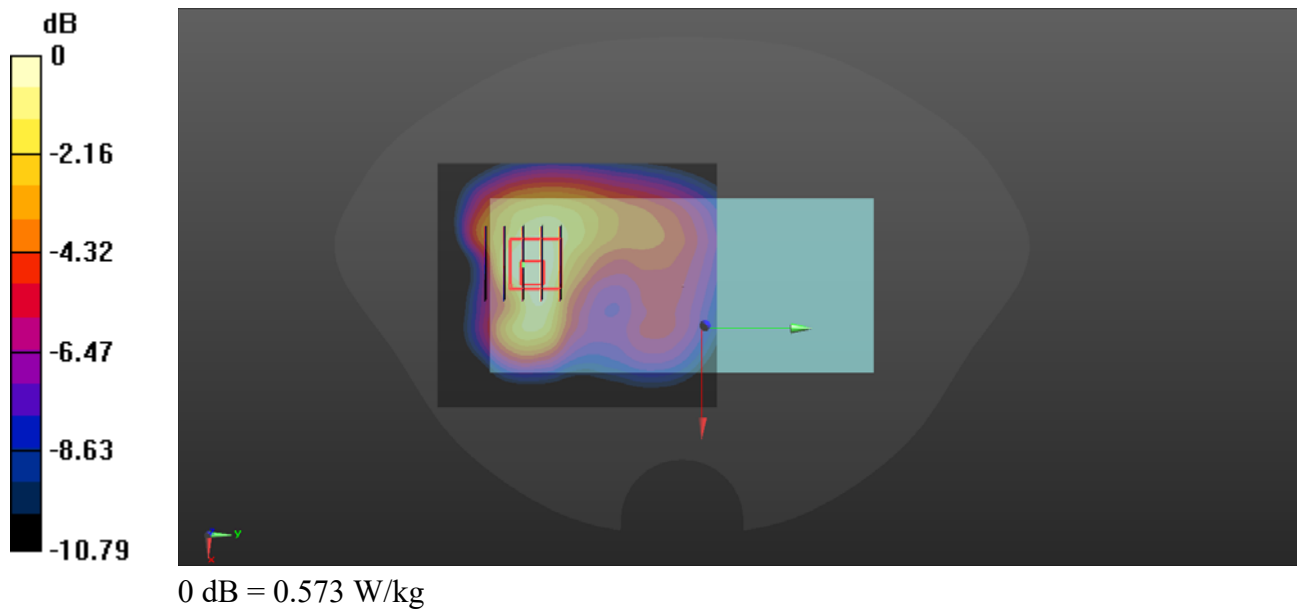

## WCDMA Band IV\_RMC 12.2Kbps\_Back Side\_10mm\_Ch1312


Communication System: UID 0, UMTS-FDD (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750 Medium parameters used :  $f = 1712.4$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.222$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.32, 8.32, 8.32) @ 1712.4 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch1312/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.13 W/kg

**Ch1312/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.820 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 1.43 W/kg  
**SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.413 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

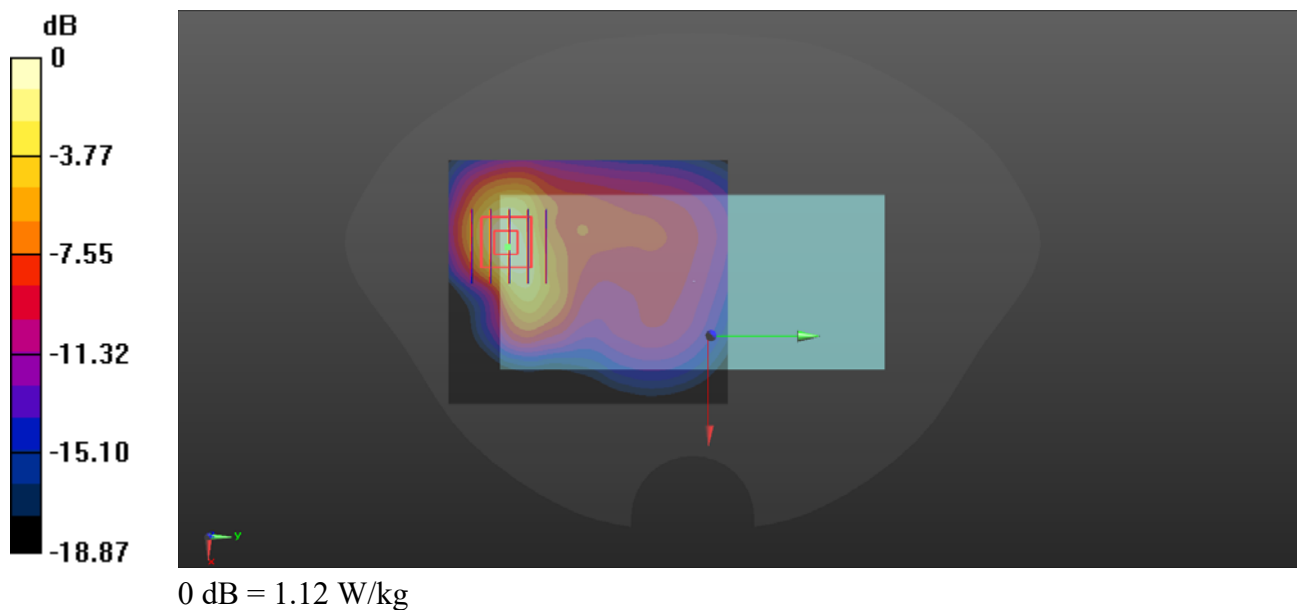

## WCDMA Band V\_RMC 12.2Kbps\_Back Side\_10mm\_Ch4132


Communication System: UID 0, UMTS-FDD (0); Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.352$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 826.4 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch4132/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.328 W/kg

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.16 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.364 W/kg  
**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.214 W/kg**  
Maximum value of SAR (measured) = 0.330 W/kg

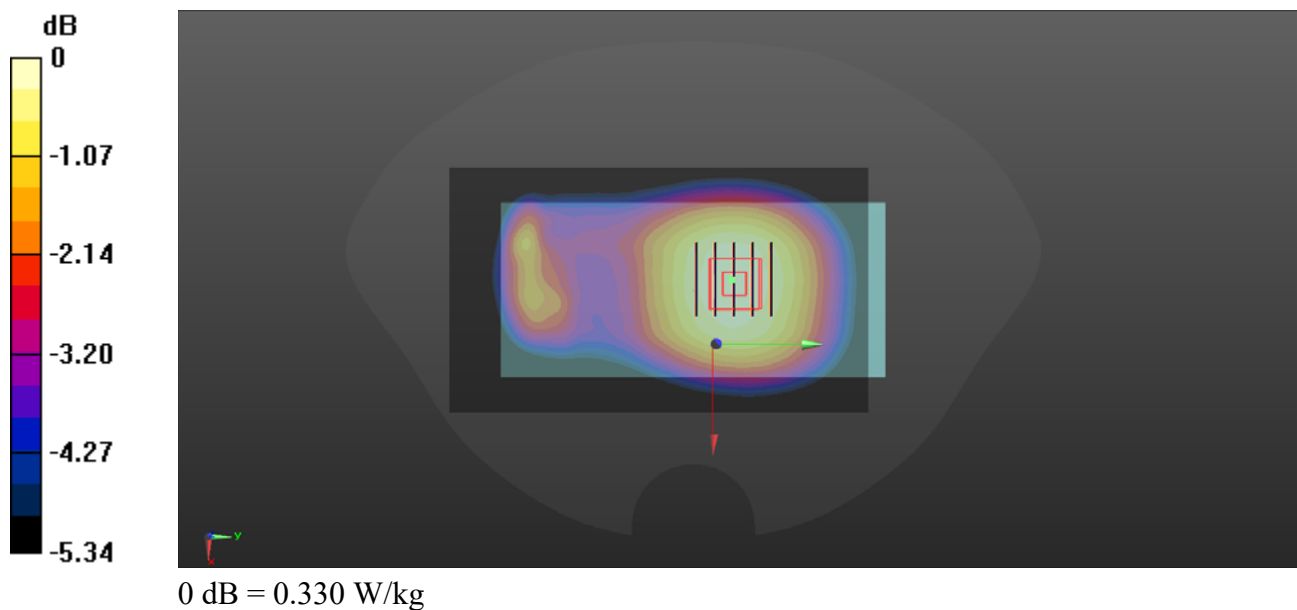

## LTE Band 5\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch20450

Communication System: UID 0, LTE (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 829 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch20450/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.354 W/kg


**Ch20450/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.74 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.307 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.357 W/kg

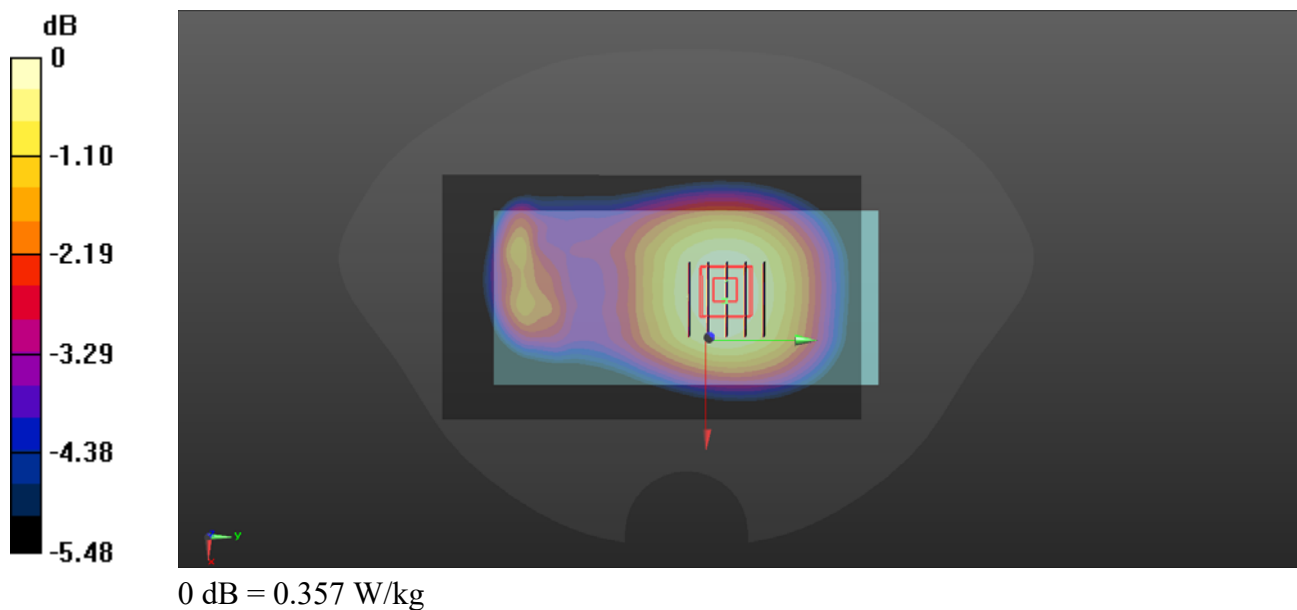

## LTE Band 7\_20MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch21350

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL\_2600 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.928$  S/m;  $\epsilon_r = 39.198$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.4, 7.4, 7.4) @ 2560 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch21350/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.62 W/kg


**Ch21350/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.318 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.500 W/kg**

Maximum value of SAR (measured) = 1.59 W/kg

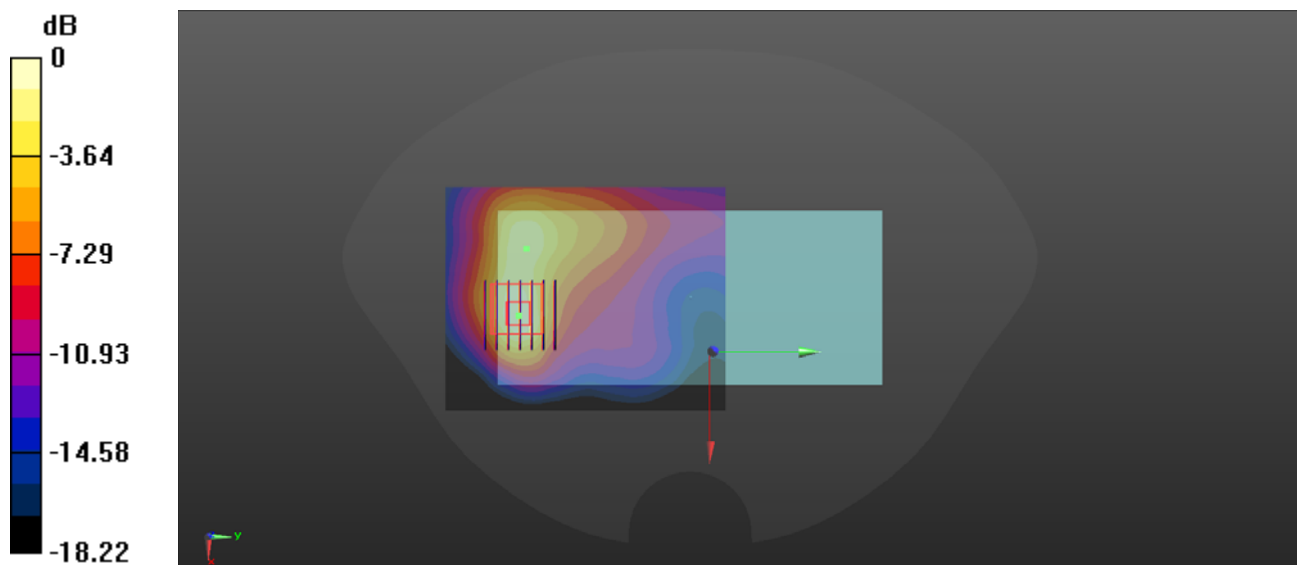

0 dB = 1.59 W/kg

## LTE Band 12\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch23130

Communication System: UID 0, LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium: HSL\_750 Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.915$  S/m;  $\epsilon_r = 42.155$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 711 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23130/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.370 W/kg


**Ch23130/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.89 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 0.368 W/kg

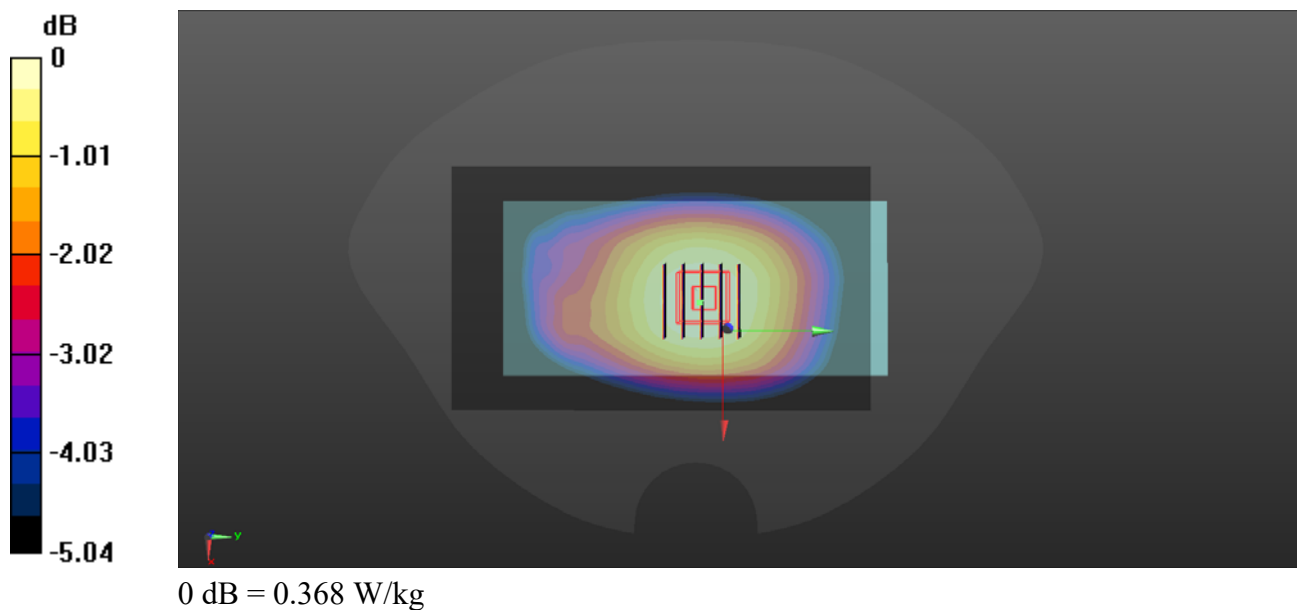

### LTE Band 13\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch23230


Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.87 \text{ S/m}$ ;  $\epsilon_r = 41.722$ ;  $\rho = 1000 \text{ kg/m}^3$   
Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 782 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23230/Area Scan (71x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.258 \text{ W/kg}$

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $15.93 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
Peak SAR (extrapolated) =  $0.283 \text{ W/kg}$   
**SAR(1 g) =  $0.223 \text{ W/kg}$ ; SAR(10 g) =  $0.169 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.257 \text{ W/kg}$

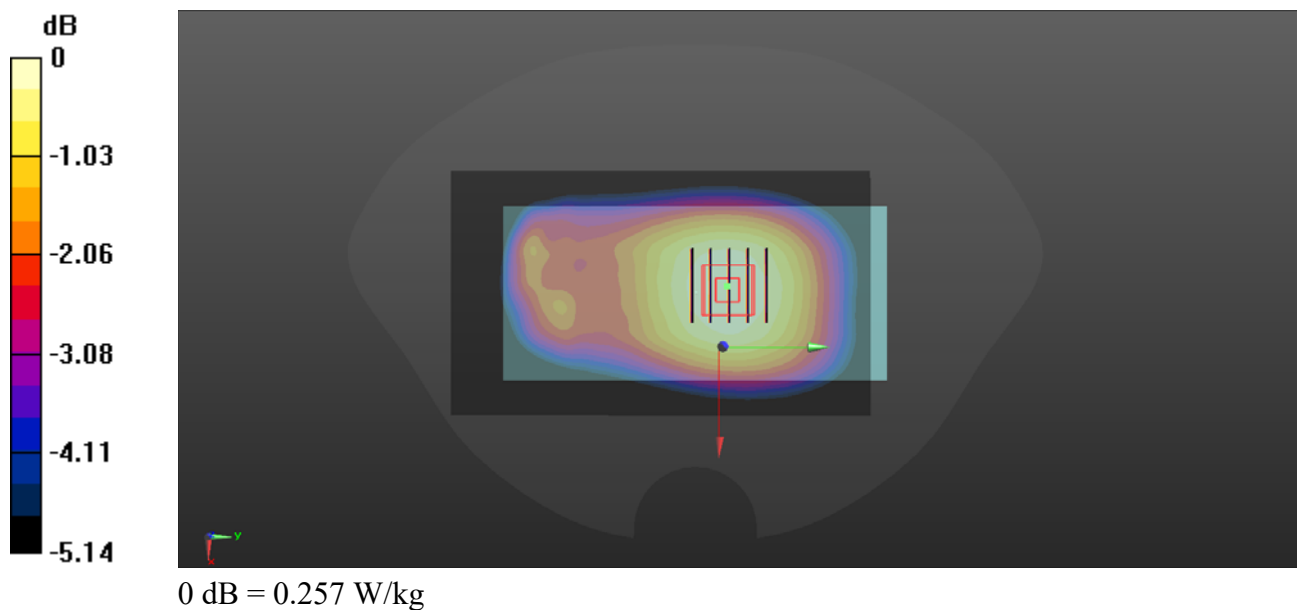



## LTE Band 14\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch23330


Communication System: UID 0, LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1  
Medium: HSL\_750 Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.713$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 793 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch23330/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.226 W/kg

**Ch23330/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.33 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 0.255 W/kg  
**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.152 W/kg**  
Maximum value of SAR (measured) = 0.231 W/kg

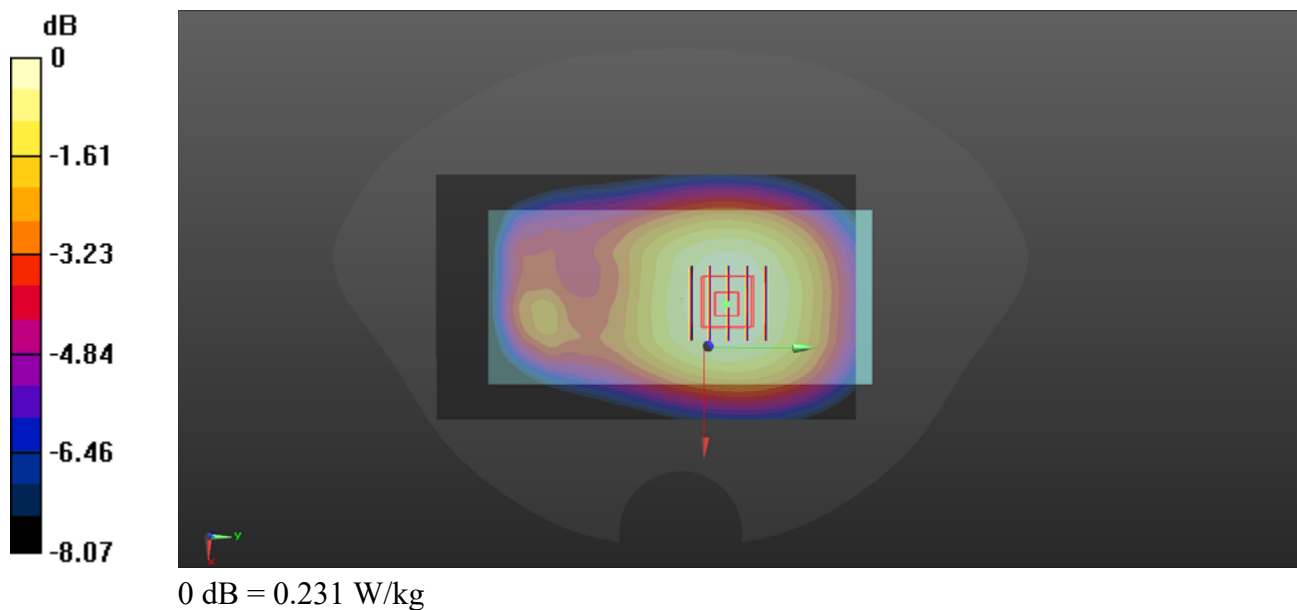

## LTE Band 25\_20MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch26140

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.41$  S/m;  $\epsilon_r = 40.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.04, 8.04, 8.04) @ 1860 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch26140/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.651 W/kg


**Ch26140/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.264 W/kg**

Maximum value of SAR (measured) = 0.630 W/kg

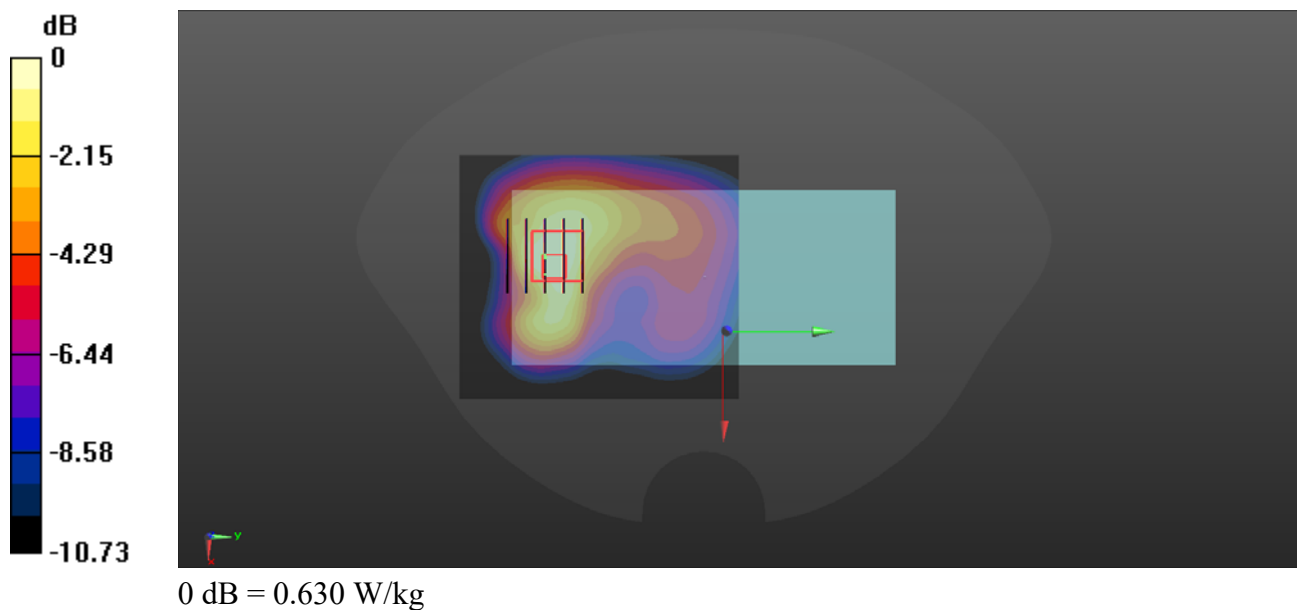

## LTE Band 26\_15MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch26965

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835 Medium parameters used:  $f = 841.5$  MHz;  $\sigma = 0.91$  S/m;  $\epsilon_r = 41.422$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.57, 9.57, 9.57) @ 841.5 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch26965/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.319 W/kg


**Ch26965/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.64 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.352 W/kg

**SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.319 W/kg

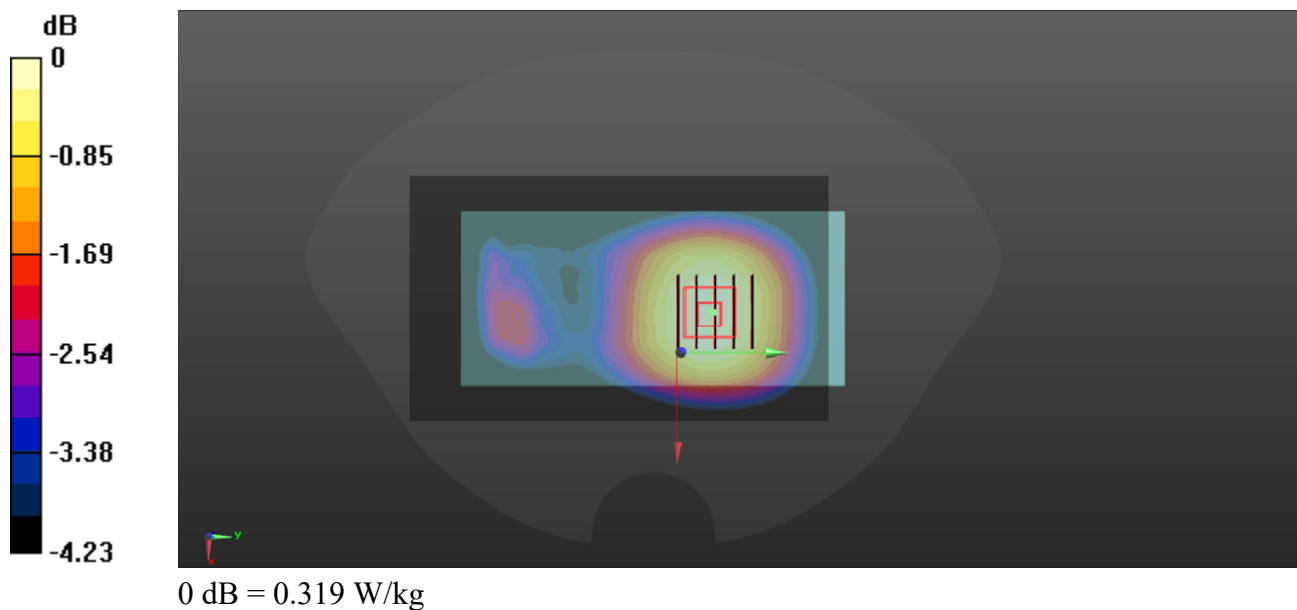

## LTE Band 30\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch27710

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.66$  S/m;  $\epsilon_r = 39.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2310 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch27710/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Ch27710/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.139 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.915 W/kg; SAR(10 g) = 0.524 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

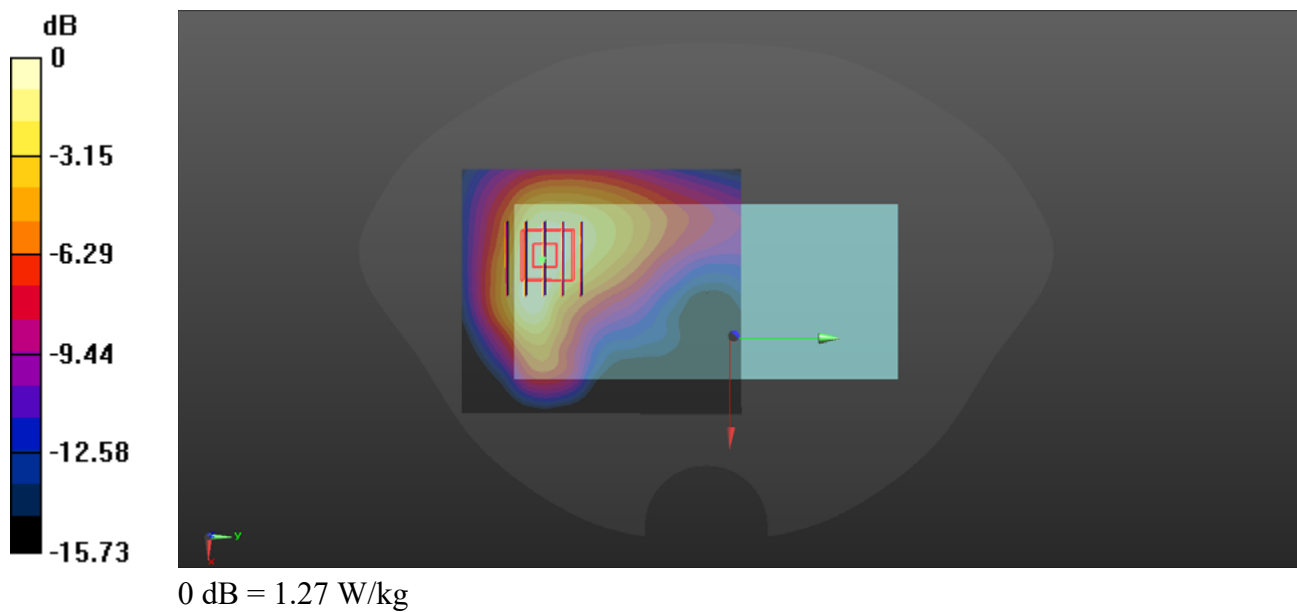

### LTE Band 40A\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch38750

Communication System: UID 0, LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2300 Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.66$  S/m;  $\epsilon_r = 39.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2310 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch38750/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.683 W/kg


**Ch38750/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.659 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.869 W/kg

**SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.247 W/kg**

Maximum value of SAR (measured) = 0.653 W/kg

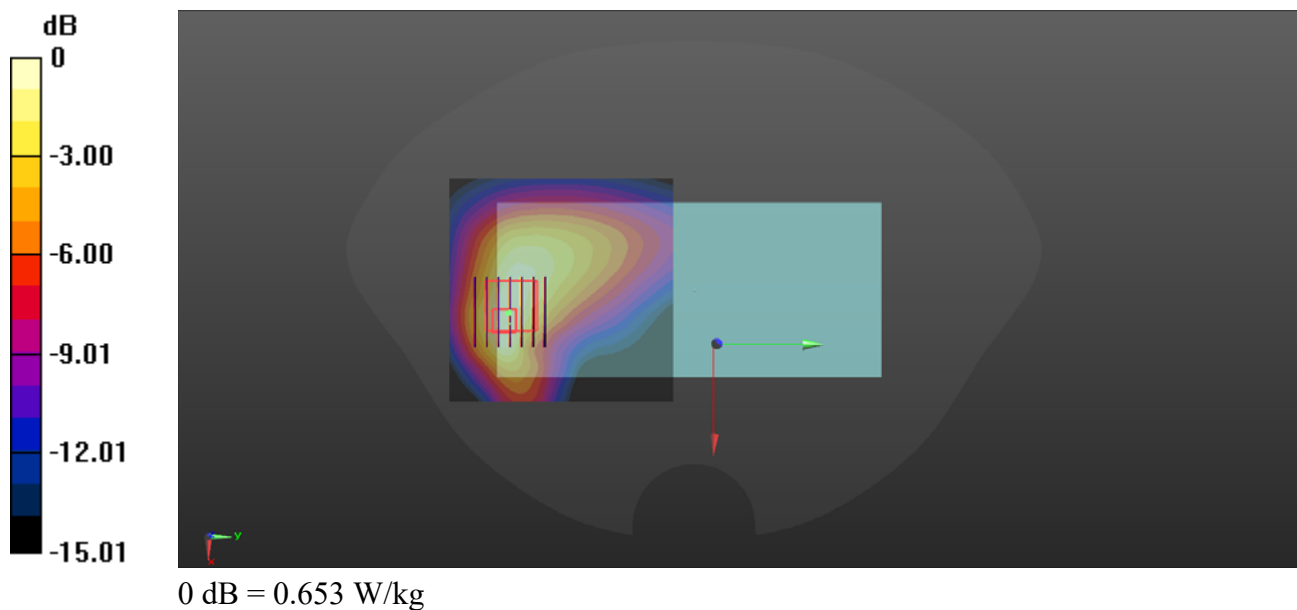

## LTE Band 40B\_10MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch39200

Communication System: UID 0, LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2300 Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.711$  S/m;  $\epsilon_r = 39.995$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.61, 7.61, 7.61) @ 2355 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch39200/Area Scan (81x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.614 W/kg


**Ch39200/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.792 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.847 W/kg

**SAR(1 g) = 0.438 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 0.641 W/kg

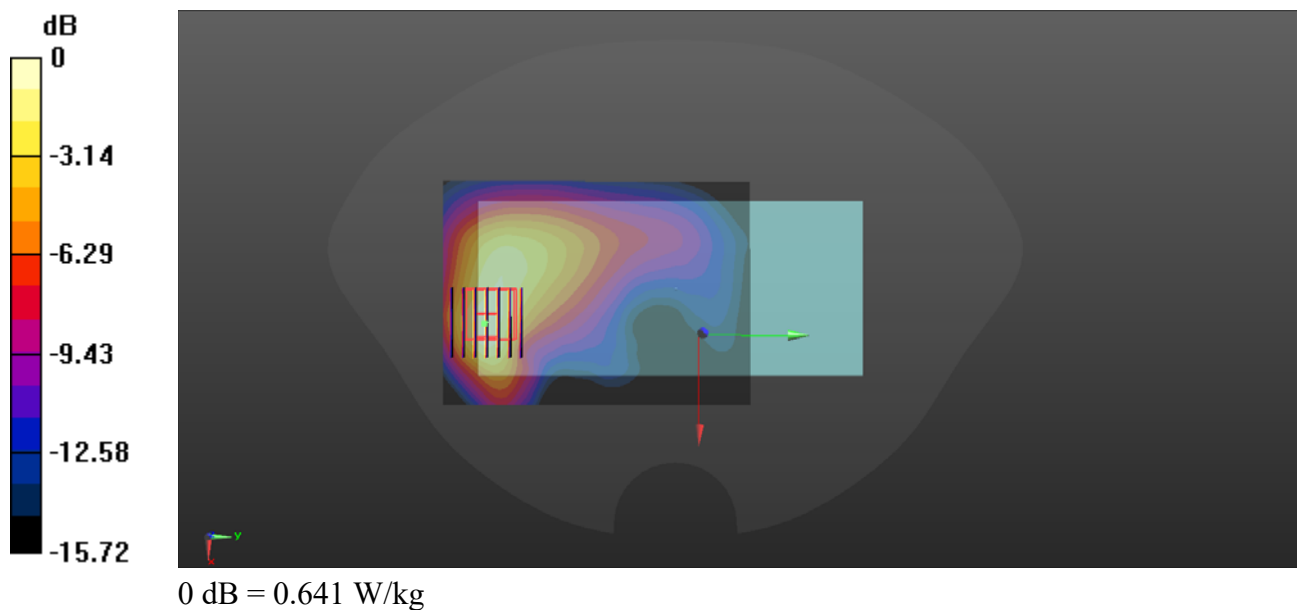

## LTE Band 41\_20MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch40640

Communication System: UID 0, LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59

Medium: HSL\_2600 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.915$  S/m;  $\epsilon_r = 39.145$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.4, 7.4, 7.4) @ 2595 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch40640/Area Scan (81x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.656 W/kg


**Ch40640/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.279 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.954 W/kg

**SAR(1 g) = 0.444 W/kg; SAR(10 g) = 0.195 W/kg**

Maximum value of SAR (measured) = 0.689 W/kg

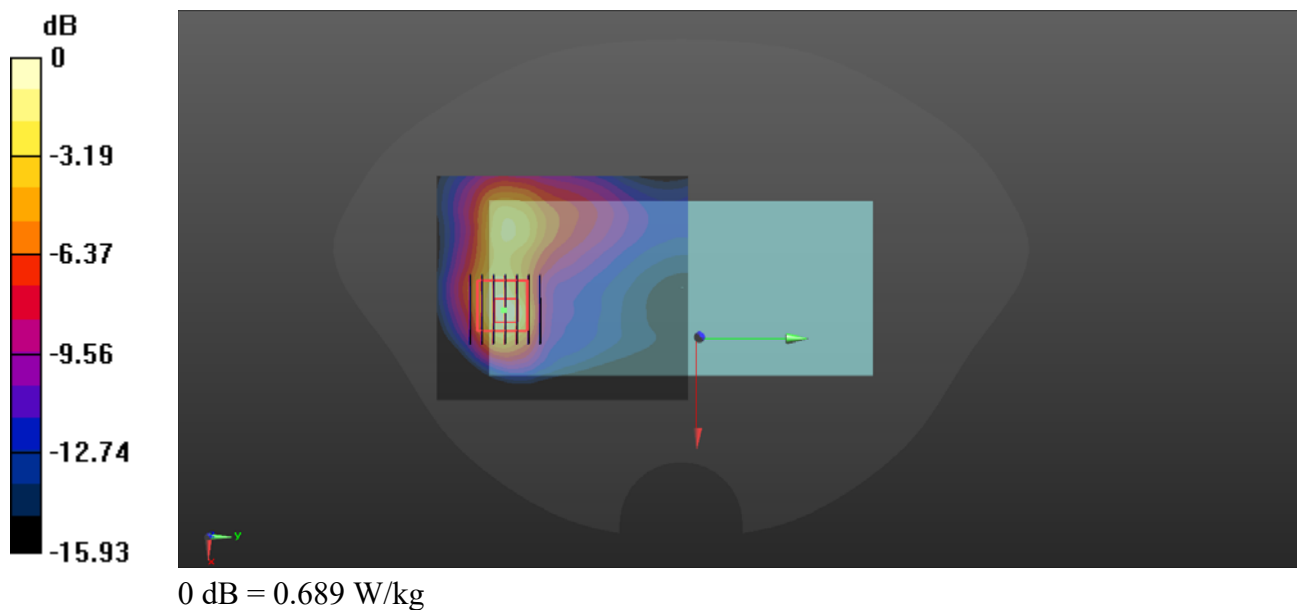

## LTE Band 66\_20MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch132572

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL\_1750 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.111$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(8.32, 8.32, 8.32) @ 1770 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch132572/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.378 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.814 W/kg; SAR(10 g) = 0.426 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

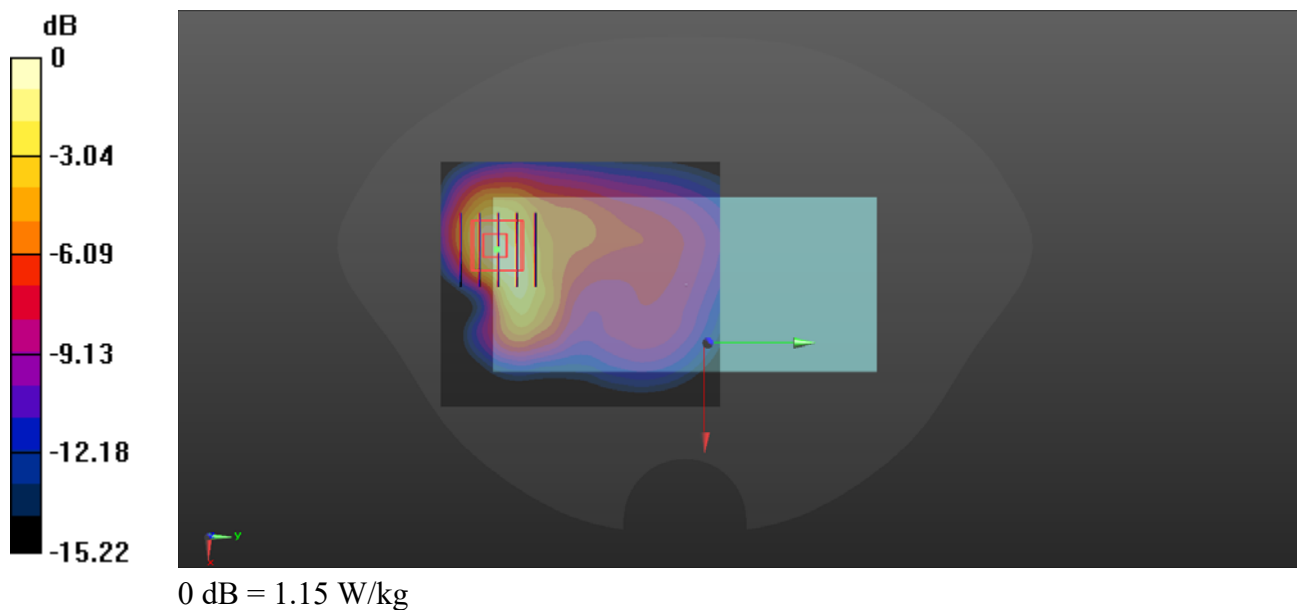



## LTE Band 71\_20MHz\_QPSK\_1RB\_0Offset\_Back Side\_10mm\_Ch133322

Communication System: UID 0, LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL\_750 Medium parameters used:  $f = 683$  MHz;  $\sigma = 0.892$  S/m;  $\epsilon_r = 42.211$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(9.76, 9.76, 9.76) @ 683 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch133322/Area Scan (71x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.523 W/kg

**Ch133322/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.16 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.578 W/kg  
**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.344 W/kg**  
Maximum value of SAR (measured) = 0.524 W/kg

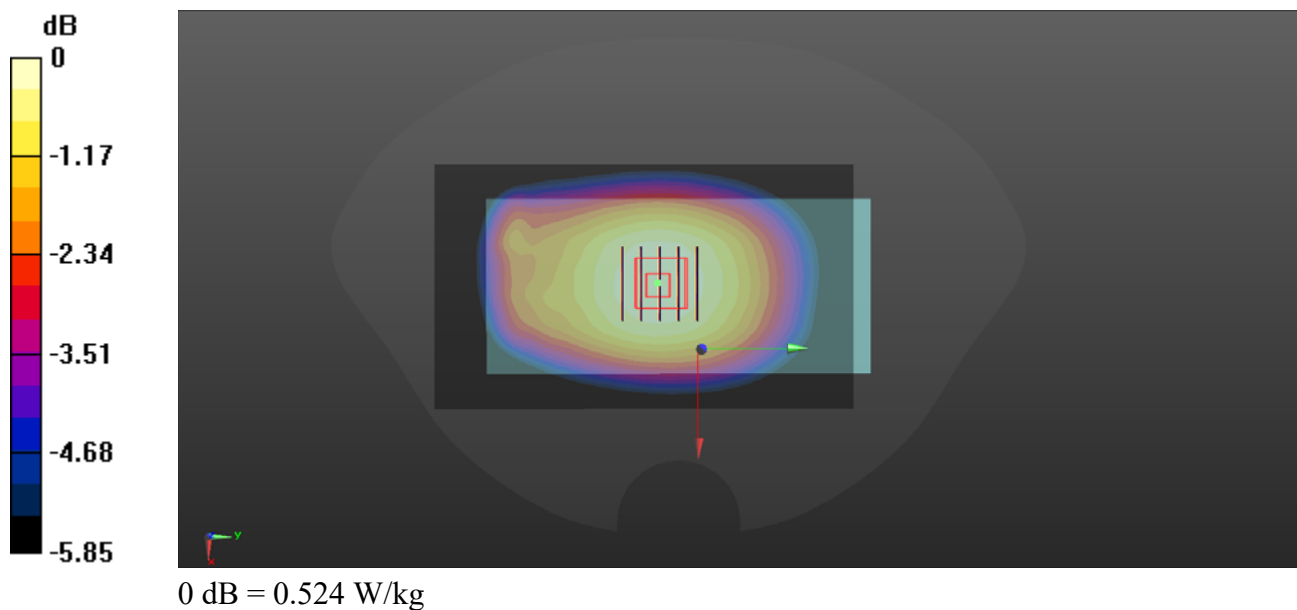

## WLAN 2.4GHz\_802.11b 1Mbps\_Back Side\_10mm\_Ch6

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.78$  S/m;  $\epsilon_r = 39.255$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.58, 7.58, 7.58) @ 2437 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch6/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.283 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.140 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.378 W/kg

**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.264 W/kg

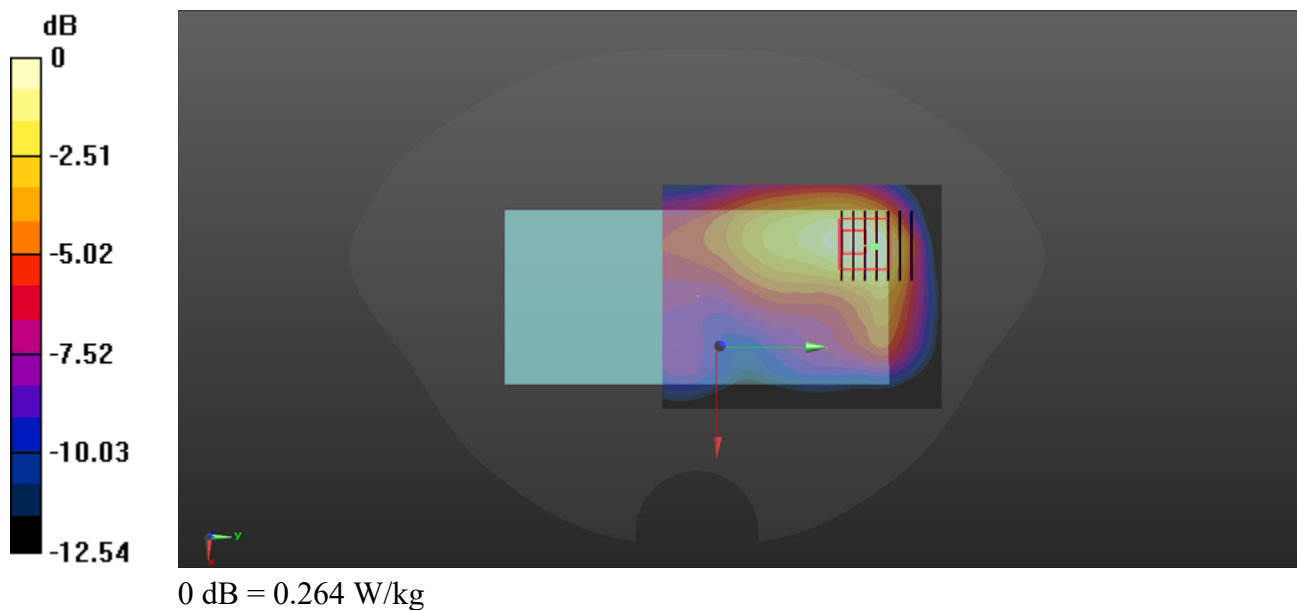

## WLAN 2.4GHz\_802.11b 1Mbps\_Right Side\_10mm\_Ch11

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 39.268$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.58, 7.58, 7.58) @ 2462 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch11/Area Scan (41x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.324 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.785 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.416 W/kg

**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.315 W/kg

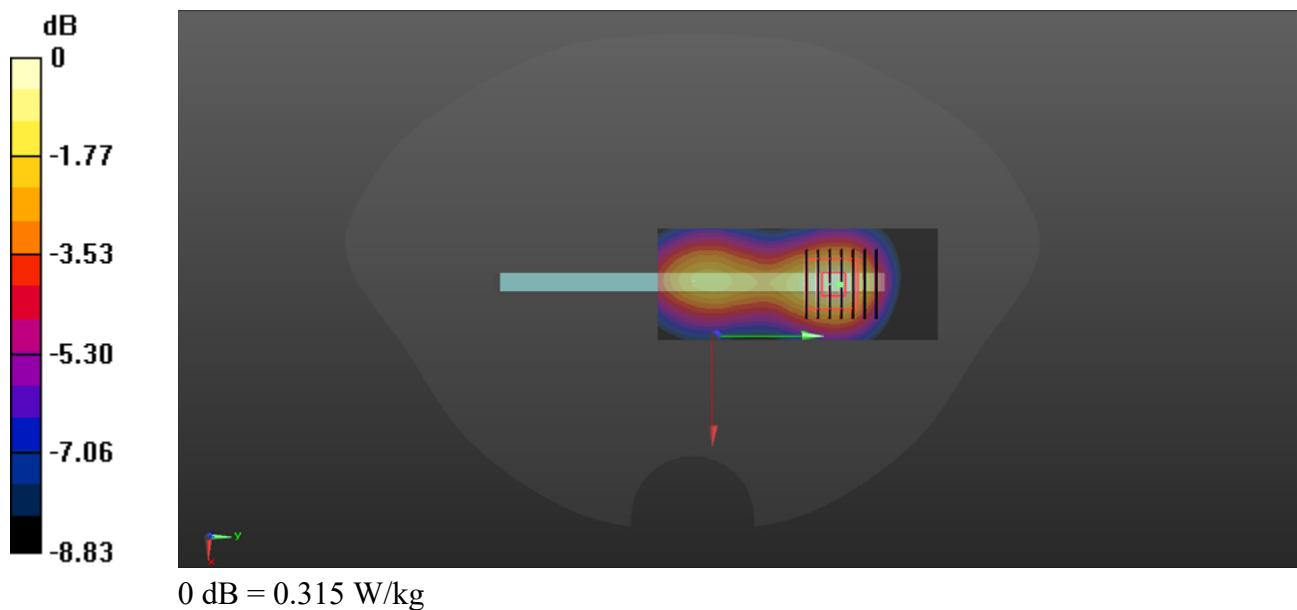

## WLAN 5.2GHz\_802.11a 6Mbps\_Back Side\_10mm\_Ch48


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5250 Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.718$  S/m;  $\epsilon_r = 35.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.36, 5.36, 5.36) @ 5240 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch5240/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.477 W/kg

**Ch5240/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 1.287 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 0.896 W/kg  
**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.092 W/kg**  
Maximum value of SAR (measured) = 0.479 W/kg

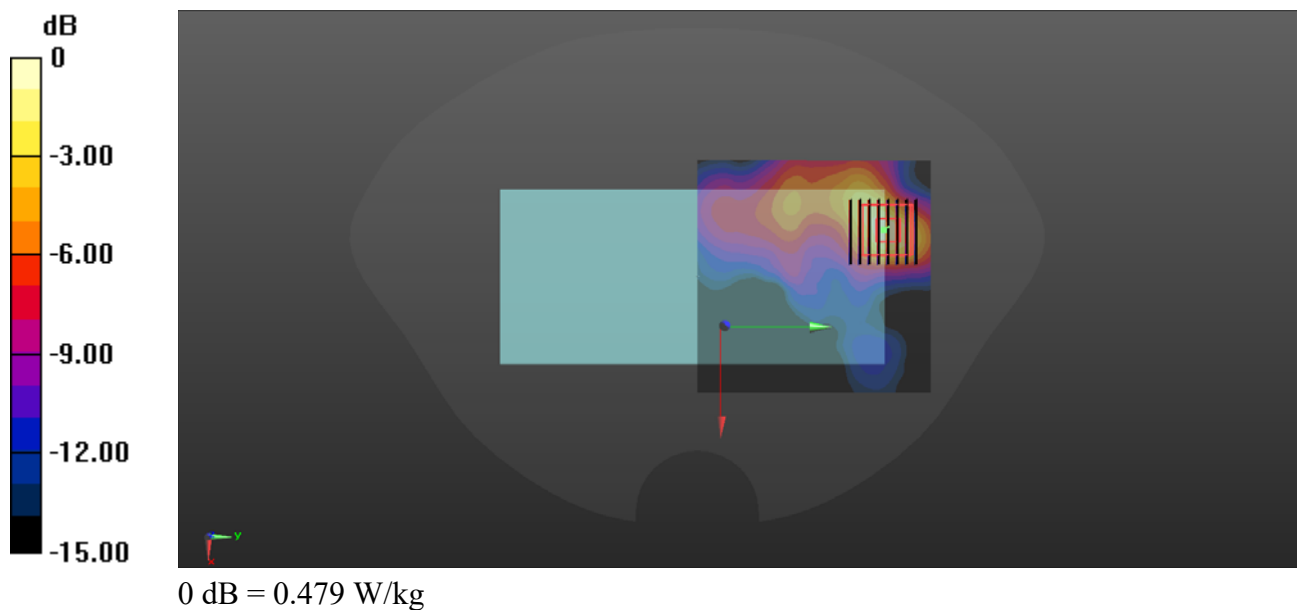

## WLAN 5.2GHz\_802.11a 6Mbps\_Right Side\_10mm\_Ch48


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5250 Medium parameters used:  $f = 5240$  MHz;  $\sigma = 4.718$  S/m;  $\epsilon_r = 35.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.36, 5.36, 5.36) @ 5240 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch5240/Area Scan (51x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.610 W/kg

**Ch5240/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 5.609 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 1.06 W/kg  
**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.125 W/kg**  
Maximum value of SAR (measured) = 0.586 W/kg

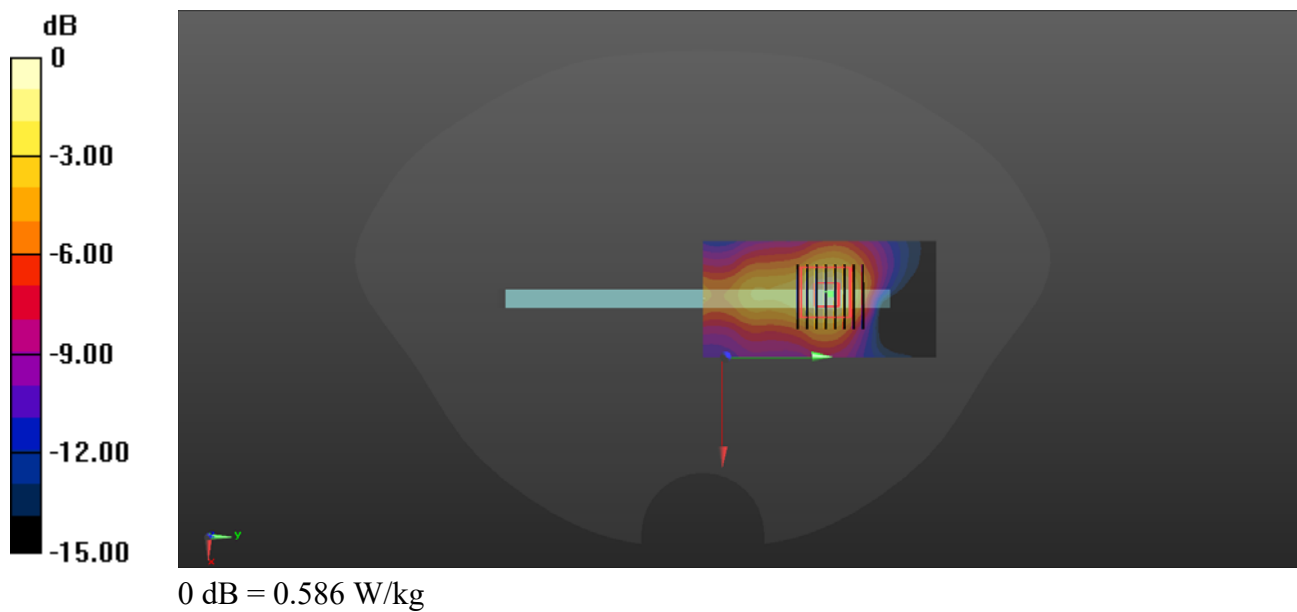

## WLAN 5.3GHz\_802.11a 6Mbps\_Back Side\_10mm\_Ch64


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5320 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5250 Medium parameters used:  $f = 5320$  MHz;  $\sigma = 4.749$  S/m;  $\epsilon_r = 35.822$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(5.36, 5.36, 5.36) @ 5320 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch64/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.436 W/kg

**Ch64/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 0 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.822 W/kg  
**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.082 W/kg**  
Maximum value of SAR (measured) = 0.433 W/kg

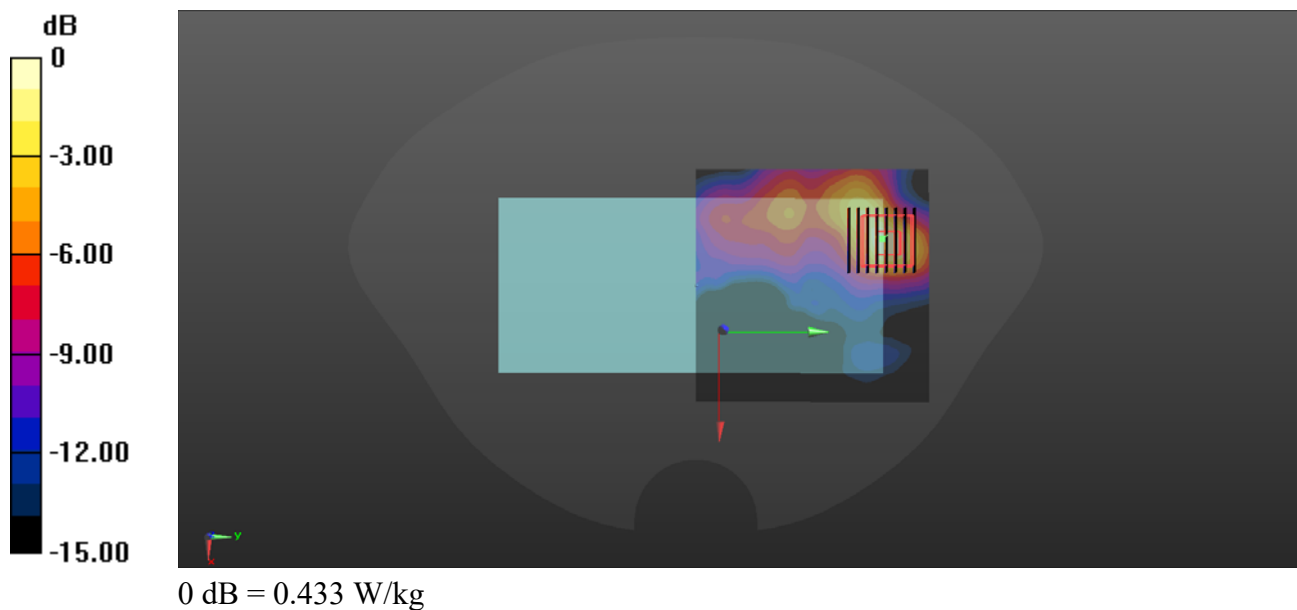

## WLAN 5.8GHz\_802.11a 6Mbps\_Back Side\_10mm\_Ch165


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5825 MHz; Duty Cycle: 1:1.036  
Medium: HSL\_5750 Medium parameters used:  $f = 5825$  MHz;  $\sigma = 5.333$  S/m;  $\epsilon_r = 35.198$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(4.78, 4.78, 4.78) @ 5825 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch165/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.331 W/kg

**Ch165/Zoom Scan (8x8x15)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm  
Reference Value = 0 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.656 W/kg  
**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.055 W/kg**  
Maximum value of SAR (measured) = 0.317 W/kg

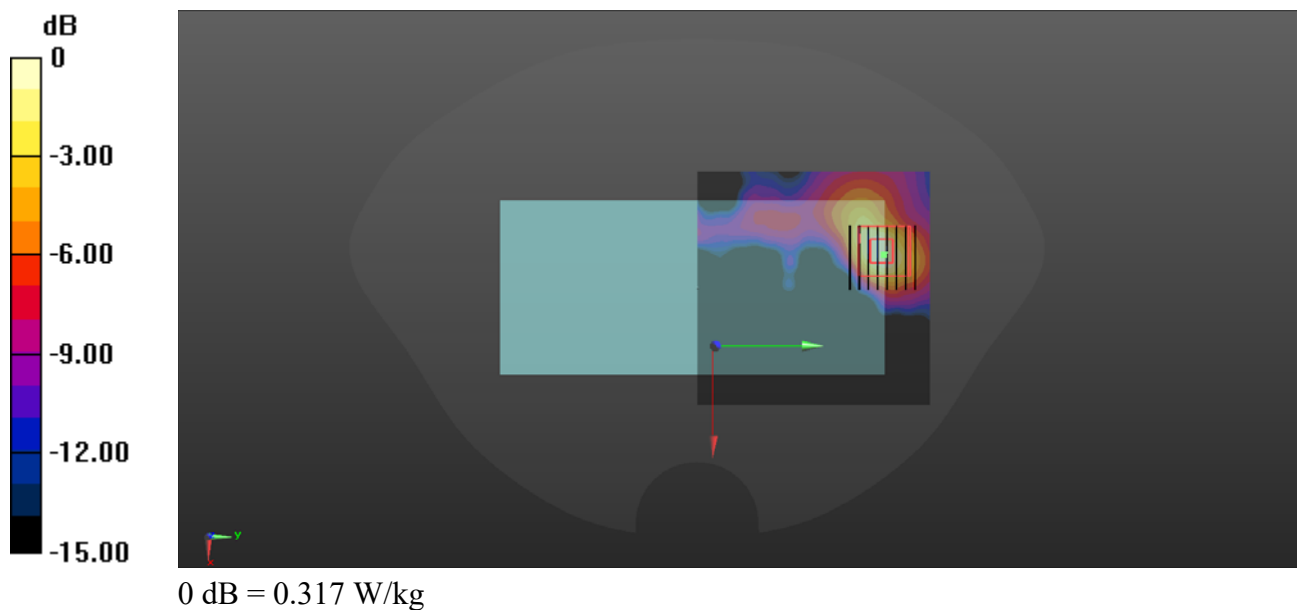

## Bluetooth\_DH5\_Back Side\_10mm\_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.085  
Medium: HSL\_2450 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.82$  S/m;  $\epsilon_r = 39.218$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.58, 7.58, 7.58) @ 2441 MHz; Calibrated: 2020.11.27
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2020.11.30
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch39/Area Scan (81x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.0675 W/kg

**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 0.9810 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.0890 W/kg  
**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.022 W/kg**  
Maximum value of SAR (measured) = 0.0649 W/kg

