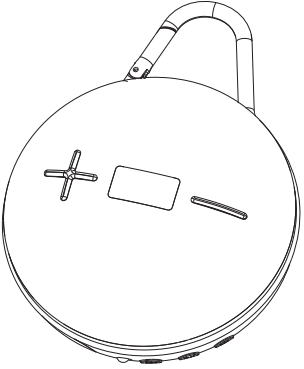

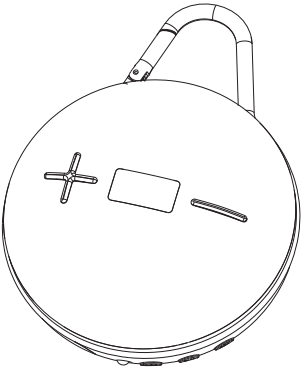



尺寸：50\*100mm, 5折页正反印刷，材料：70g双胶

<h1 style="text-align: center;">TG648</h1> <h2 style="text-align: center;">蓝牙音箱说明书</h2> 	<p><b>基本参数:</b></p> <ul style="list-style-type: none"> <li>◆蓝牙规格: V5.3</li> <li>◆支持蓝牙协议: 支持L2CAP/A2DP(AVCTP/AVDTP/AVRCP), 用来接收立体声音频信号, 通过协议可以控制音频发射端的上下曲操作; 支持HSP/HFP (Handsfree profile), 具有免提功能, 可以进行语音通讯。</li> <li>◆无线传输范围: &gt; 10M</li> <li>◆音频性噪比: ≥85dB</li> <li>◆电池容量: 500mAh</li> <li>◆内置电压: 3.7V</li> <li>◆正常音量播放: 1.5H</li> <li>◆喇叭规格: Φ52mm plus</li> <li>◆喇叭功率: 4Ω/5W</li> <li>◆频率响应: 120Hz-18KHz</li> <li>◆尺寸: L113.7*W149.7*H57mm</li> <li>◆单机重量: 225g</li> <li>◆充电输入: 5V/500mA</li> </ul> <p><b>一、功能特点</b></p> <ol style="list-style-type: none"> <li>1. 魔力扬声系统设计, 惊人双动力内置低频增幅器设计, 中低频更具震撼力, 拥有更好的音质表现;</li> <li>2. 采用先进的蓝牙音频解码芯片支持手机、平板电脑、电视等蓝牙设备配对播放音乐; 蓝牙传输距离长达10米;</li> </ol>	<ol style="list-style-type: none"> <li>3. 支持免提通话功能, 内置高灵敏度麦克风, 让手机通话拥有无比畅快的通话享受;</li> <li>4. 支持U盘和TF卡音乐播放MP3解码, 支持MP3格式的全码率播放;</li> <li>5. FM自动搜索和存储电台, 内置FM收音模块, 可自动搜索及存储电台, 省时省力;</li> <li>6. 支持LED手电筒照明;</li> <li>7. 支持对箱TWS功能。</li> </ol> <p>二: 功能指示</p> 	<ol style="list-style-type: none"> <li>①DC 5V充电接口 (USB TYPE-C充电接口)</li> <li>②U盘输入接口: 当U盘插入时可解码MP3/WAV格式的音频播放;</li> <li>③TF卡输入接口: 当TF卡插入时可解码MP3/WAV格式的音频播放;</li> <li>④手电筒开关按键: 在任何模式下, 长按为打开或关闭手电筒。</li> <li>⑤暂停按键: 在音乐的模式下 (U盘、TF卡、蓝牙), 短按为“播放、暂停”, 在蓝牙模式并配对手机情况下, 来电时短按一下为免提接听, 再按一下为挂断电话; 来电时长按为拒接电话。 (在FM模式下短按为自动搜索电台、在搜台过程中短按一下为取消往后自动搜索电台); 两台音箱同时在开机蓝牙状态且未连接的状态下, 长按其中一台音箱的暂停键4秒听到提示音且其中一台指示灯长亮即连TWS成功, 再连接手机即可。</li> <li>⑥电源开关: 关机状态时长按开机, 开机状态时长按关机; 在音乐的模式</li> </ol>	<p>下, 短按为各模式切换 (U盘、TF卡、FM收音、蓝牙)</p> <ol style="list-style-type: none"> <li>⑦下曲按键: 在音乐的模式下, 短按为“下一曲” 长按音量递增。</li> <li>⑧上曲按键: 在音乐的模式下, 短按为“上一曲” 长按音量递减。</li> </ol>
---	---	---	--	--

<h1 style="text-align: center;">TG648</h1> <h2 style="text-align: center;">SPEAKER User Manual</h2> 	<p><b>Product specifications:</b></p> <ul style="list-style-type: none"> <li>●BT : 5.3</li> <li>●Support: L2CAP/A2DP(AVCTP/AVDTP/AVRCP), can receive AUDIO signal and control the AUDIO device. support HSP/HFP (Handsfree profile), Built-in Mic for hands-free phone call</li> <li>●Working distance: 10M</li> <li>●SNR: ≥85db</li> <li>●Battery: 3.7V 500mAh</li> <li>●Normal volume playing time: 1.5H</li> <li>●Speaker driver : Ø52 mm plus</li> <li>●Power : 4Ω/5W</li> <li>●Frequency response: 120 Hz-18KHz</li> <li>●Unit size: L113.7*W149.7*H57mm</li> <li>●Unit weight: 225g</li> <li>●Charging: 5V/500mA</li> </ul> <p><b>Product Feature:</b></p> <ol style="list-style-type: none"> <li>1. Built-in Low-freq radiators, Super dynamic low-frequency sound pressure gain, listening transparent and flexible.</li> <li>2. International advanced BT chip and circuit design techniques, support all BT device ; Can play music after pairing with BT device . for example mobile/ MID/ TV, the</li> </ol>	<p>working distance is more than 10M.</p> <ol style="list-style-type: none"> <li>3. with Mic for hands-free phone call function.</li> <li>4. Built-in MP3 decoding, can directly play TF card, USB disk</li> <li>5. Built-in the FM radio module, convenient to auto scan and save radio channels.</li> <li>6. With LED torchlight</li> <li>7. Support TWS</li> </ol> <p>key &amp; slot function:</p> 	<ol style="list-style-type: none"> <li>1. DC 5V charging slot: use the standard mini USB TYPE-C charging cable for power charging.</li> <li>2. USB slot: it can decode and play MP3 format audio when put USB card into the slot.</li> <li>3. TF slot: it can decode and play MP3 format audio when put TF card into the slot.</li> <li>4. LED torchlight switch: long press to open/close</li> <li>5. When play music (USB card/ TF card/BT), press short for “play/pause”. under BT mode with mobile paired, when call coming, press short to answer a call, press again to hand up. (in FM mode, press short to search station automatically, press again to stop searching). Keep the TWS speaker under BT mode without pairing, press the “play/pause” key for 4 seconds either of the speaker until hear a hint and meantime the button light stop flashing, now is in TWS mode, then can pair the mobile.</li> <li>6. Power switch: long press to open/close the speaker; when play music (USB card/ TF card/ BT),</li> </ol>	<p>press short to switch USB/TF/FM / BT.</p> <ol style="list-style-type: none"> <li>7. When play music, press short for next song/next FM station, press long to turn up the volume.</li> <li>8. When play music, press short for last song/last FM station, press long to turn down the volume.</li> </ol>
---	--	--	--	---

## **Warning Statement**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.