

TEST REPORT

Product Name: Hasee T8
FCC ID: 2A8MN-T8
Trademark: Hasee
Model Number: T8
Prepared For: SHENZHEN HASEE INNOVATION CO., LTD
Address: West Zone, Floor 1, Hasee Building, Xintianxia Industrial Park, Banxuegang Industrial Aresa, Bantian Street, Longgang District, Shenzhen City, Guangdong, China
Manufacturer: SHENZHEN HASEE INNOVATION CO., LTD
Address: West Zone, Floor 1, Hasee Building, Xintianxia Industrial Park, Banxuegang Industrial Aresa, Bantian Street, Longgang District, Shenzhen City, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China.
Sample Received Date: Aug. 26, 2022
Sample tested Date: Aug. 26, 2022 to Sep. 06, 2022
Issue Date: Sep. 06, 2022
Report No.: CTB220906002RF
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

Chen ZhengArron LiuBin He

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	41
8.1 Block Diagram Of Test Setup	41
8.2 Limit	41
8.3 Test procedure	41
8.4 Test Result	42
9. CONDUCTED OUTPUT POWER	58
9.1 Block Diagram Of Test Setup	58
9.2 Limit	58
9.3 Test procedure	58
9.4 Test Result	59
10. 6DB OCCUPIED BANDWIDTH	60
10.1 Block Diagram Of Test Setup	60
10.2 Limit	60
10.3 Test procedure	60

10.4	Test Result	61
11.	POWER SPECTRAL DENSITY	71
11.1	Block Diagram Of Test Setup	71
11.2	Limit.....	71
11.3	Test procedure	71
11.4	Test Result	72
12.	ANTENNA REQUIREMENT	81
13.	EUT PHOTOGRAPHS	82
14.	EUT TEST SETUP PHOTOGRAPHS	83

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220906002RF	Sep. 06, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59\text{ }^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	T8
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 16.771dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal Antenna
Antenna Gain:	WiFi (2.4G) : 1.75dBi
Ratings:	Adapter Input: AC100-250V, 2.5A Output: DC20V/9A Battery:DC15.4V, 3410mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Keyboard	DELL	KB216t	N/A	AE
2	Mouse	DELL	MS116c	N/A	AE
3	Monitor	DELL	SE2218HV	N/A	AE
4	Router	Huawei	AX2 Pro	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.2dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

- 1) For power spectral density(PSD) measurements,
Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.76dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.75dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	15.4V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30


Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/



6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

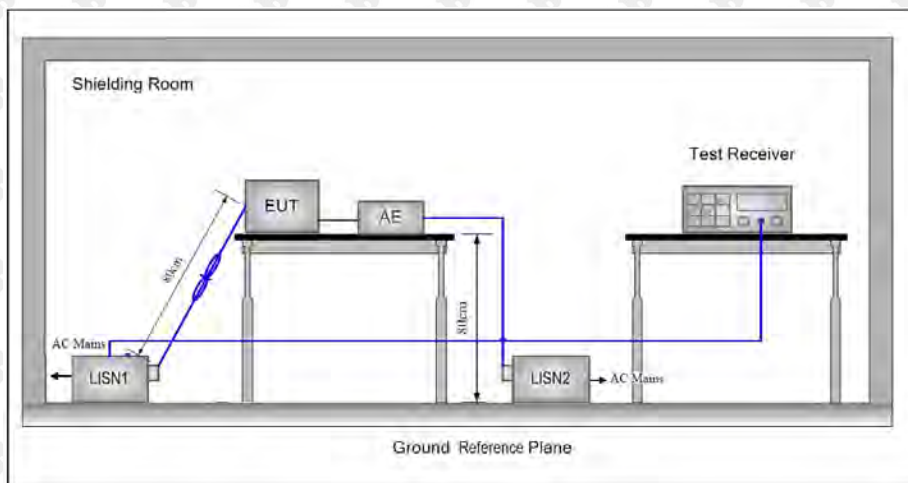

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line


AC 120V 60Hz

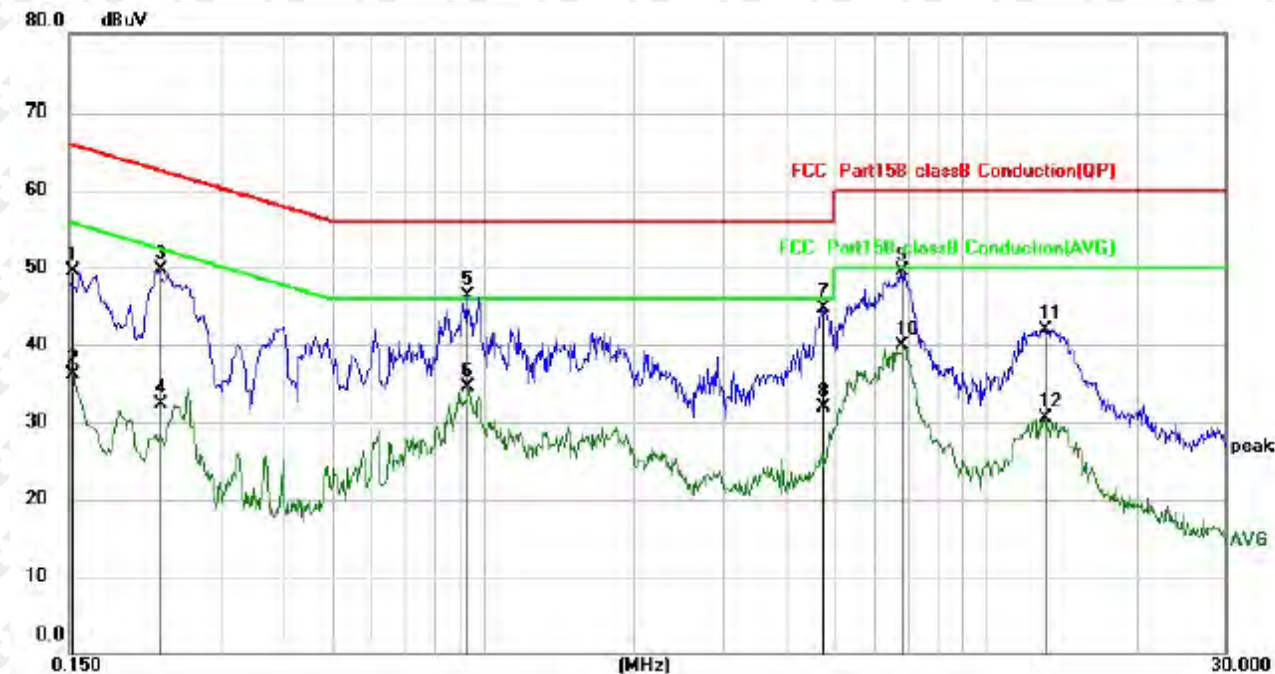

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1524	39.46	10.01	49.47	65.87	-16.40	QP
2		0.1524	26.09	10.01	36.10	55.87	-19.77	AVG
3		0.2268	39.78	10.00	49.78	62.57	-12.79	QP
4		0.2268	22.37	10.00	32.37	52.57	-20.20	AVG
5	*	0.9300	36.31	9.98	46.29	56.00	-9.71	QP
6		0.9300	24.44	9.98	34.42	46.00	-11.58	AVG
7		4.7419	34.58	10.16	44.74	56.00	-11.26	QP
8		4.7419	21.83	10.16	31.99	46.00	-14.01	AVG
9		6.8018	39.36	10.23	49.59	60.00	-10.41	QP
10		6.8018	29.58	10.23	39.81	50.00	-10.19	AVG
11		13.0818	31.51	10.42	41.93	60.00	-18.07	QP
12		13.0818	20.02	10.42	30.44	50.00	-19.56	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

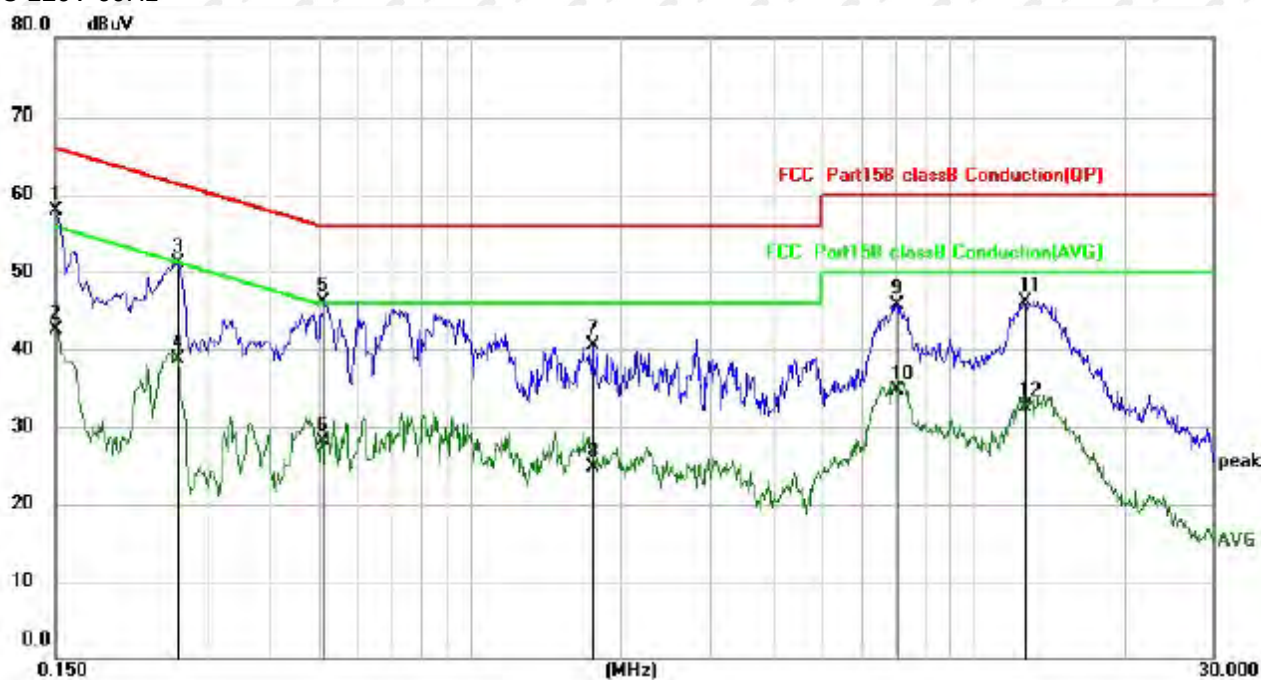

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	47.98	10.01	57.99	66.00	-8.01	QP
2		0.1500	32.54	10.01	42.55	56.00	-13.45	AVG
3		0.2620	41.12	10.00	51.12	61.37	-10.25	QP
4		0.2620	28.61	10.00	38.61	51.37	-12.76	AVG
5		0.5100	36.22	9.97	46.19	56.00	-9.81	QP
6		0.5100	18.15	9.97	28.12	46.00	-17.88	AVG
7		1.7540	30.44	10.02	40.46	56.00	-15.54	QP
8		1.7540	14.66	10.02	24.68	46.00	-21.32	AVG
9		7.0379	35.43	10.24	45.67	60.00	-14.33	QP
10		7.0379	24.43	10.24	34.67	50.00	-15.33	AVG
11		12.7100	35.74	10.41	46.15	60.00	-13.85	QP
12		12.7100	22.04	10.41	32.45	50.00	-17.55	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

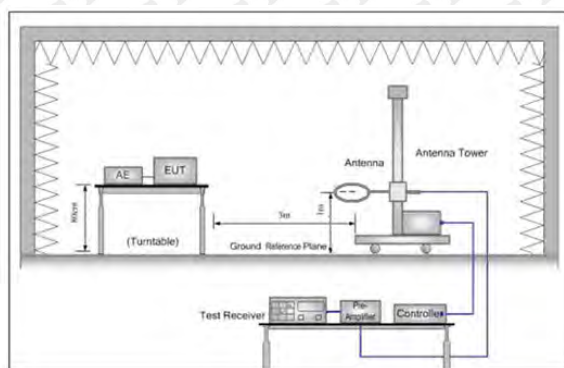


Figure 1. Below 30MHz

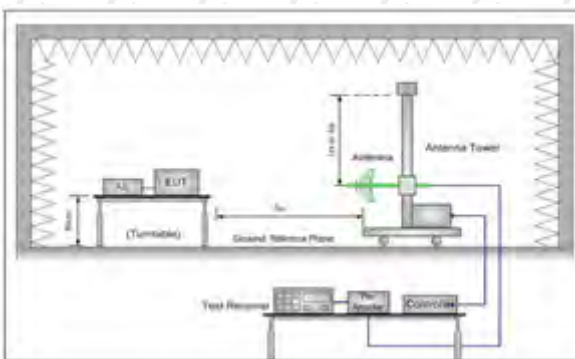


Figure 2. 30MHz to 1GHz

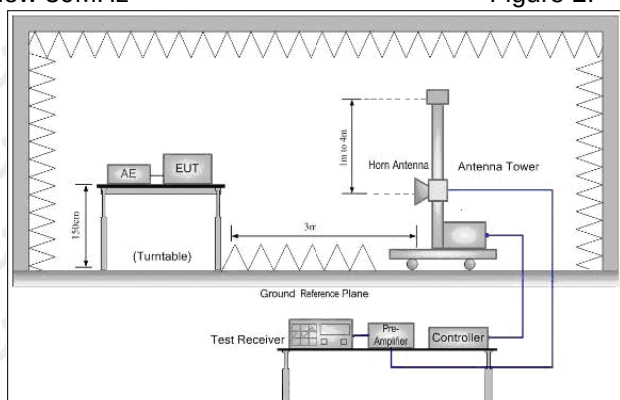


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1	*	69.6003	39.15	-7.86	31.29	40.00	-8.71	QP
2		136.6990	39.61	-5.67	33.94	43.50	-9.56	QP
3		211.8976	40.35	-7.33	33.02	43.50	-10.48	QP
4		319.9368	39.38	-4.51	34.87	46.00	-11.13	QP
5		495.9343	32.31	0.61	32.92	46.00	-13.08	QP
6		892.2907	28.76	6.20	34.96	46.00	-11.04	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		59.9637	39.15	-6.17	32.98	40.00	-7.02	QP
2		140.3420	39.43	-5.44	33.99	43.50	-9.51	QP
3		282.9849	40.53	-5.38	35.15	46.00	-10.85	QP
4	*	355.4272	45.60	-3.26	42.34	46.00	-3.66	QP
5		495.9343	38.63	0.61	39.24	46.00	-6.76	QP
6		854.0247	29.18	6.13	35.31	46.00	-10.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.72	-3.64	60.08	74	-13.92	peak
4824	49.04	-3.64	45.40	54	-8.60	AVG
7236	58.67	-0.95	57.72	74	-16.28	peak
7236	44.84	-0.95	43.89	54	-10.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	47.49	-3.64	43.85	54	-10.15	AVG
7236	58.05	-0.95	57.10	74	-16.90	peak
7236	45.35	-0.95	44.40	54	-9.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.68	-3.51	62.17	74	-11.83	peak
4874	47.96	-3.51	44.45	54	-9.55	AVG
7311	59.87	-0.82	59.05	74	-14.95	peak
7311	43.25	-0.82	42.43	54	-11.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.09	-3.51	60.58	74	-13.42	peak
4874	48.23	-3.51	44.72	54	-9.28	AVG
7311	58.47	-0.82	57.65	74	-16.35	peak
7311	44.10	-0.82	43.28	54	-10.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.52	-3.43	61.09	74	-12.91	peak
4924	47.07	-3.43	43.64	54	-10.36	AVG
7386	59.32	-0.75	58.57	74	-15.43	peak
7386	44.92	-0.75	44.17	54	-9.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.06	-3.43	59.63	74	-14.37	peak
4924	47.29	-3.43	43.86	54	-10.14	AVG
7386	58.79	-0.75	58.04	74	-15.96	peak
7386	43.58	-0.75	42.83	54	-11.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.45	-3.64	59.81	74	-14.19	peak
4824	49.80	-3.64	46.16	54	-7.84	AVG
7236	59.70	-0.95	58.75	74	-15.25	peak
7236	44.90	-0.95	43.95	54	-10.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.61	-3.64	60.97	74	-13.03	peak
4824	47.39	-3.64	43.75	54	-10.25	AVG
7236	58.00	-0.95	57.05	74	-16.95	peak
7236	45.13	-0.95	44.18	54	-9.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.72	-3.51	61.21	74	-12.79	peak
4874	47.32	-3.51	43.81	54	-10.19	AVG
7311	58.18	-0.82	57.36	74	-16.64	peak
7311	44.67	-0.82	43.85	54	-10.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.62	-3.51	60.11	74	-13.89	peak
4874	48.33	-3.51	44.82	54	-9.18	AVG
7311	57.83	-0.82	57.01	74	-16.99	peak
7311	42.92	-0.82	42.10	54	-11.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.42	-3.43	59.99	74	-14.01	peak
4924	48.49	-3.43	45.06	54	-8.94	AVG
7386	57.35	-0.75	56.60	74	-17.40	peak
7386	41.21	-0.75	40.46	54	-13.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.12	-3.43	59.69	74	-14.31	peak
4924	49.37	-3.43	45.94	54	-8.06	AVG
7386	57.45	-0.75	56.70	74	-17.30	peak
7386	41.35	-0.75	40.60	54	-13.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to be completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.48	-3.64	60.84	74	-13.16	peak
4824	48.65	-3.64	45.01	54	-8.99	AVG
7236	58.30	-0.95	57.35	74	-16.65	peak
7236	43.72	-0.95	42.77	54	-11.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.71	-3.64	63.07	74	-10.93	peak
4824	47.34	-3.64	43.70	54	-10.30	AVG
7236	58.43	-0.95	57.48	74	-16.52	peak
7236	44.41	-0.95	43.46	54	-10.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.56	-3.51	60.05	74.00	-13.95	peak
4874.00	48.50	-3.51	44.99	54.00	-9.01	AVG
7311.00	59.74	-0.82	58.92	74.00	-15.08	peak
7311.00	46.14	-0.82	45.32	54.00	-8.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.47	-3.51	60.96	74.00	-13.04	peak
4874.00	48.28	-3.51	44.77	54.00	-9.23	AVG
7311.00	57.94	-0.82	57.12	74.00	-16.88	peak
7311.00	42.69	-0.82	41.87	54.00	-12.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.89	-3.43	60.46	74	-13.54	peak
4924	48.36	-3.43	44.93	54	-9.07	AVG
7386	56.41	-0.75	55.66	74	-18.34	peak
7386	42.58	-0.75	41.83	54	-12.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.05	-3.43	59.62	74	-14.38	peak
4924	46.54	-3.43	43.11	54	-10.89	AVG
7386	58.18	-0.75	57.43	74	-16.57	peak
7386	42.11	-0.75	41.36	54	-12.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	62.93	-3.63	59.30	74	-14.70	peak
4844	48.05	-3.63	44.42	54	-9.58	AVG
7266	59.28	-0.94	58.34	74	-15.66	peak
7266	44.15	-0.94	43.21	54	-10.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.32	-3.63	61.69	74	-12.31	peak
4844	47.78	-3.63	44.15	54	-9.85	AVG
7266	59.15	-0.94	58.21	74	-15.79	peak
7266	45.58	-0.94	44.64	54	-9.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.73	-3.51	61.22	74	-12.78	peak
4874	47.23	-3.51	43.72	54	-10.28	AVG
7311	58.04	-0.82	57.22	74	-16.78	peak
7311	43.84	-0.82	43.02	54	-10.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.70	-0.82	55.88	74	-18.12	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.68	-3.43	61.25	74	-12.75	peak
4904	49.31	-3.43	45.88	54	-8.12	AVG
7356	56.08	-0.75	55.33	74	-18.67	peak
7356	43.02	-0.75	42.27	54	-11.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.36	-3.43	60.93	74	-13.07	peak
4904	46.96	-3.43	43.53	54	-10.47	AVG
7356	57.30	-0.75	56.55	74	-17.45	peak
7356	42.76	-0.75	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.80	-5.81	51.99	74	-22.01	peak
2390	/	-5.81	/	54	/	AVG
2399	63.79	-5.84	57.95	74	-16.05	peak
2399	47.98	-5.84	42.14	54	-11.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.51	-5.81	51.70	74	-22.30	peak
2390	/	-5.81	/	54	/	AVG
2399	62.22	-5.84	56.38	74	-17.62	peak
2399	47.56	-5.84	41.72	54	-12.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.13	-5.65	50.48	74	-23.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.09	-5.65	50.44	74	-23.56	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.99	-5.81	52.18	74	-21.82	
2390	/	-5.81	/	54	/	AVG
2399	63.24	-5.84	57.40	74	-16.60	peak
2399	46.55	-5.84	40.71	54	-13.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.58	-5.81	51.77	74	-22.23	
2390	/	-5.81	/	54	/	AVG
2399	62.61	-5.84	56.77	74	-17.23	peak
2399	46.36	-5.84	40.52	54	-13.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.60	-5.65	51.95	74	-22.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.66	-5.65	51.01	74	-22.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.72	-5.81	51.91	74	-22.09	
2390	/	-5.81	/	54	/	AVG
2399	63.71	-5.84	57.87	74	-16.13	peak
2399	47.45	-5.84	41.61	54	-12.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.32	-5.81	50.51	74	-23.49	
2390	/	-5.81	/	54	/	AVG
2399	60.38	-5.84	54.54	74	-19.46	peak
2399	47.70	-5.84	41.86	54	-12.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.49	-5.65	51.84	74	-22.16	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.13	-5.65	51.48	74	-22.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.88	-5.81	53.07	74	-20.93	peak
2390	/	-5.81	/	54	/	AVG
2399	62.42	-5.84	56.58	74	-17.42	peak
2399	45.70	-5.84	39.86	54	-14.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.58	-5.81	52.77	74	-21.23	peak
2390	/	-5.81	/	54	/	AVG
2399	61.74	-5.84	55.90	74	-18.10	peak
2399	46.40	-5.84	40.56	54	-13.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.62	-5.65	51.97	74	-22.03	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.25	-5.65	50.60	74	-23.40	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

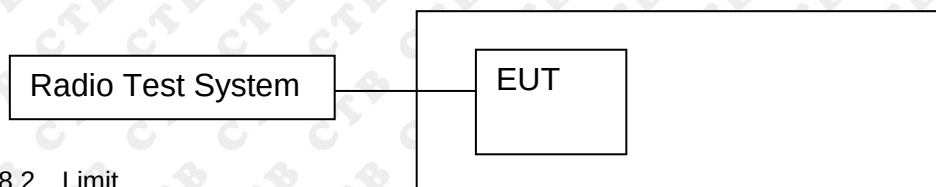

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:



BAND EDGE Graphs

802.11g/LCH

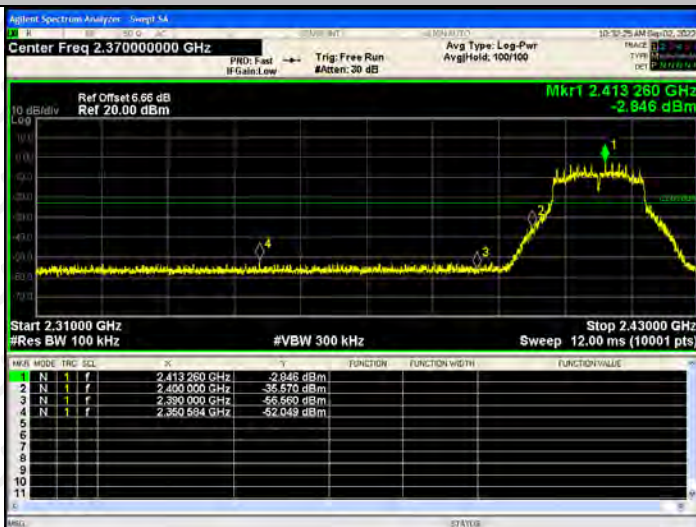


802.11g/HCH



BAND EDGE Graphs

802.11n(HT20)/L
CH

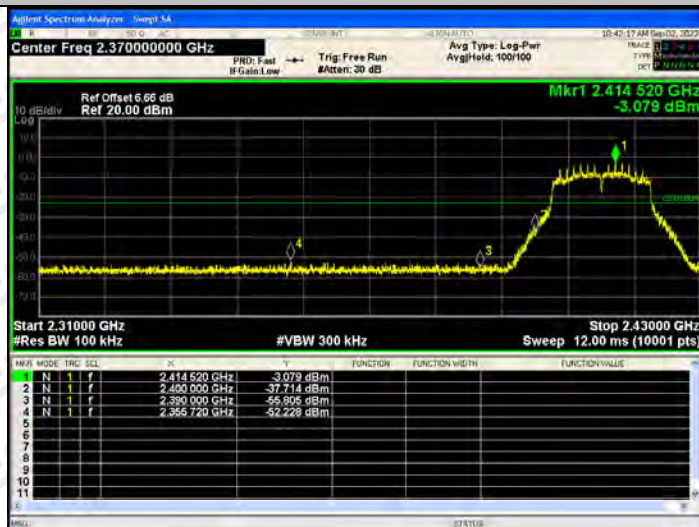

802.11n(HT20)/H
CH



BAND EDGE Graphs

802.11n(HT40)/L
CH




802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs






RF Conducted Spurious Emissions Graphs

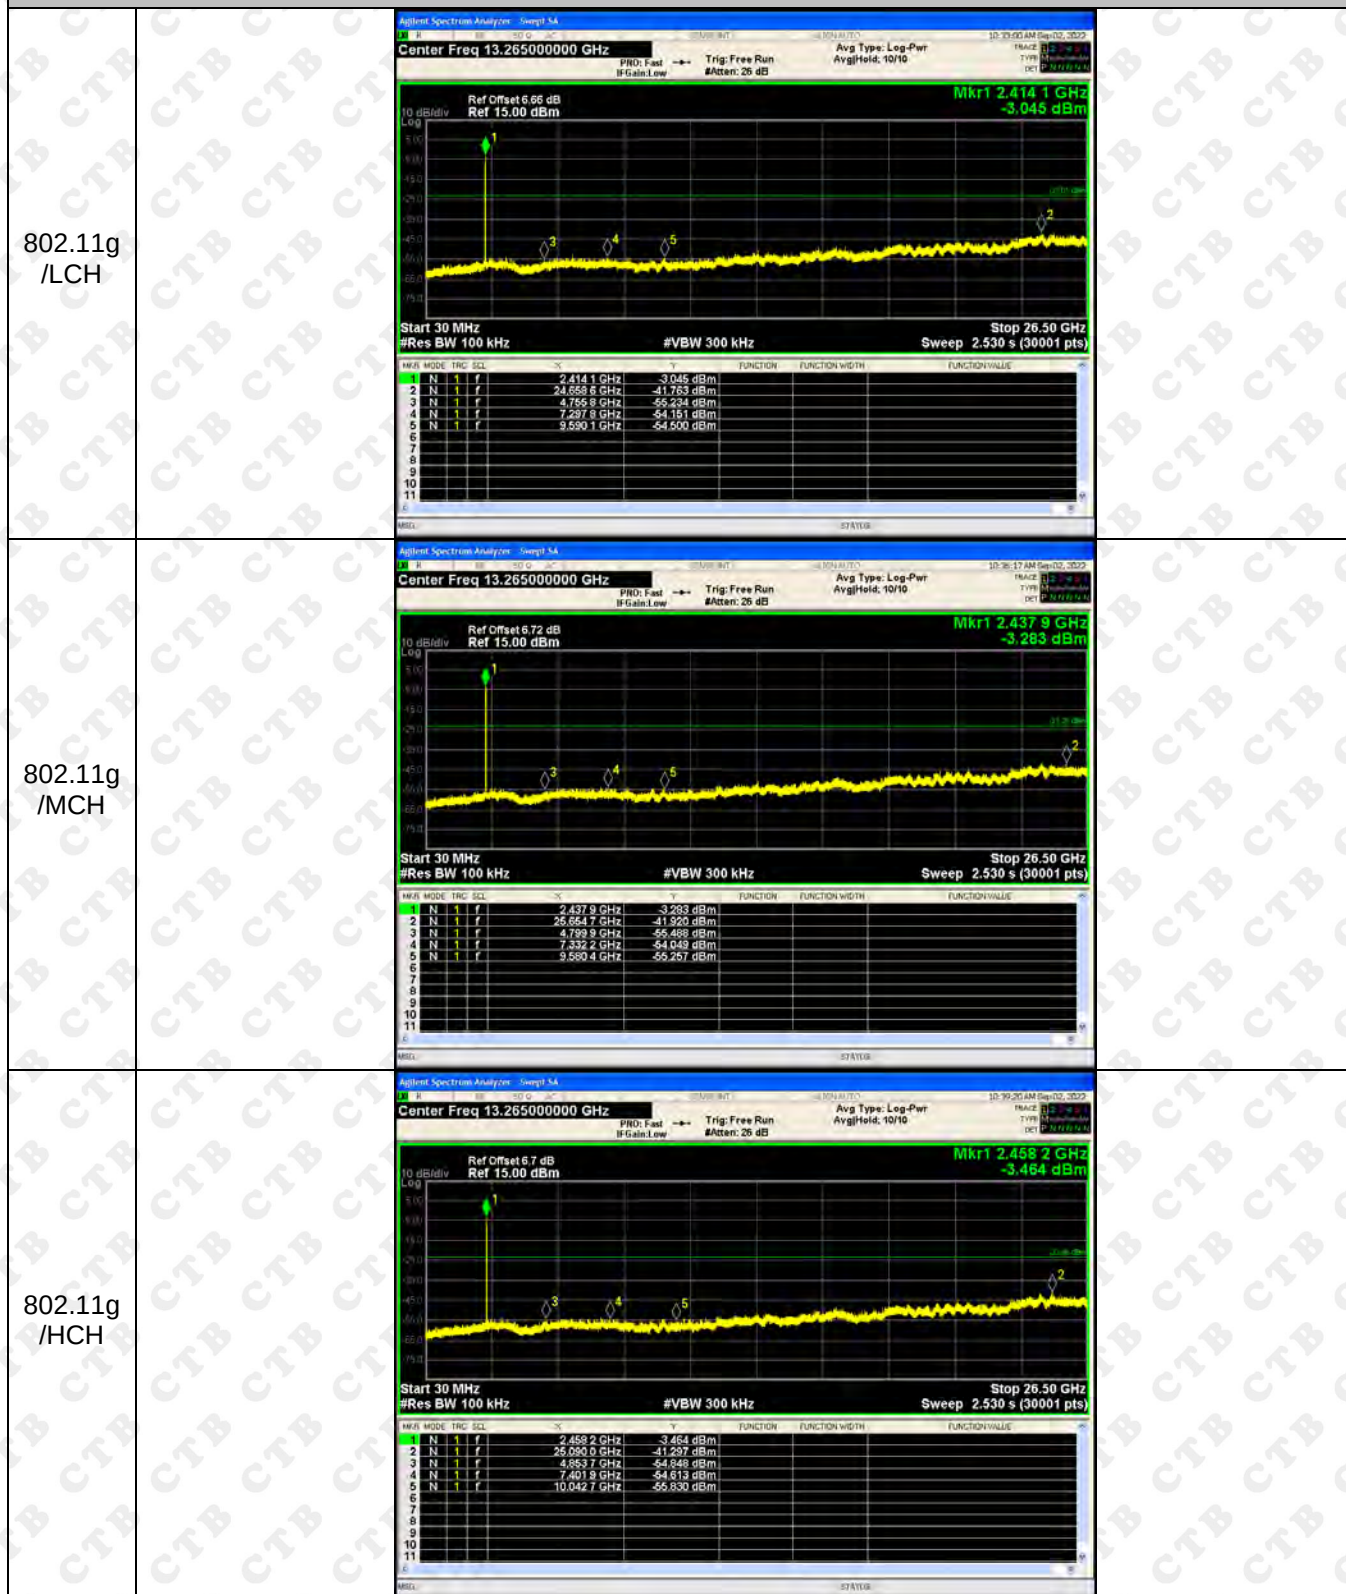

RF Conducted Spurious Emissions Graphs

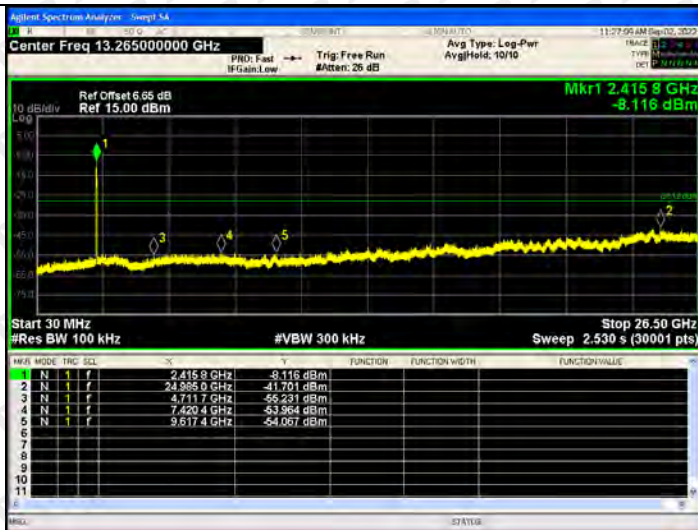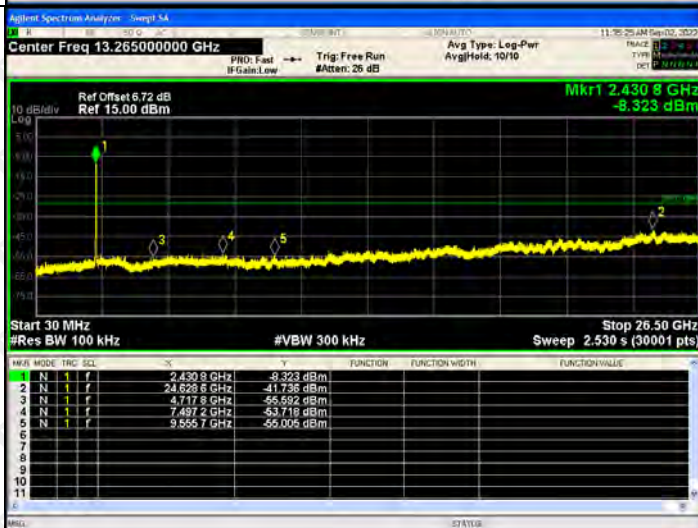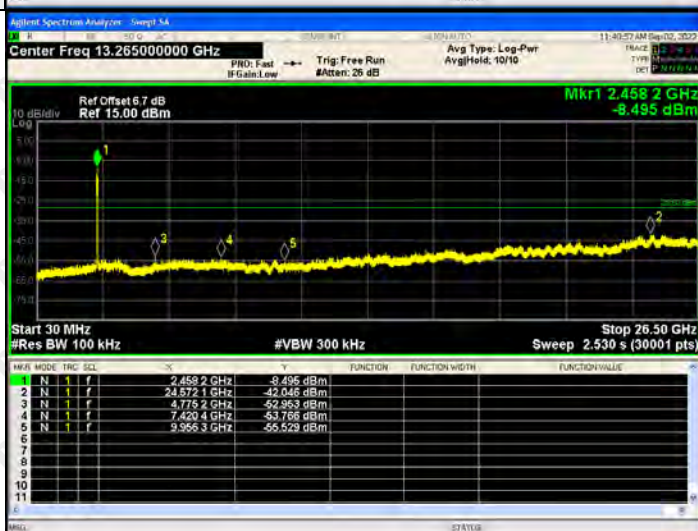


802.11n (HT40)/ LCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 13.265000000 GHz Ref Offset 6.55 dB Ref 15.00 dBm Mkr1 2.415 8 GHz -8.116 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.415 8 GHz</td><td>-8.116 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.385 0 GHz</td><td>-41.701 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.711 7 GHz</td><td>-55.231 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.420 4 GHz</td><td>-53.964 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.617 4 GHz</td><td>-54.067 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.415 8 GHz	-8.116 dBm				2	N	1	f	24.385 0 GHz	-41.701 dBm				3	N	1	f	4.711 7 GHz	-55.231 dBm				4	N	1	f	7.420 4 GHz	-53.964 dBm				5	N	1	f	9.617 4 GHz	-54.067 dBm			
MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.415 8 GHz	-8.116 dBm																																																		
2	N	1	f	24.385 0 GHz	-41.701 dBm																																																		
3	N	1	f	4.711 7 GHz	-55.231 dBm																																																		
4	N	1	f	7.420 4 GHz	-53.964 dBm																																																		
5	N	1	f	9.617 4 GHz	-54.067 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.430 8 GHz -9.323 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.430 8 GHz</td><td>-9.323 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.626 6 GHz</td><td>-41.735 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.711 7 GHz</td><td>-55.582 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.497 2 GHz</td><td>-53.718 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.555 7 GHz</td><td>-55.005 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-9.323 dBm				2	N	1	f	24.626 6 GHz	-41.735 dBm				3	N	1	f	4.711 7 GHz	-55.582 dBm				4	N	1	f	7.497 2 GHz	-53.718 dBm				5	N	1	f	9.555 7 GHz	-55.005 dBm			
MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.430 8 GHz	-9.323 dBm																																																		
2	N	1	f	24.626 6 GHz	-41.735 dBm																																																		
3	N	1	f	4.711 7 GHz	-55.582 dBm																																																		
4	N	1	f	7.497 2 GHz	-53.718 dBm																																																		
5	N	1	f	9.555 7 GHz	-55.005 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.458 2 GHz -8.495 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.458 2 GHz</td><td>-8.495 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.572 1 GHz</td><td>-42.046 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.715 2 GHz</td><td>-52.953 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.420 4 GHz</td><td>-53.786 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.555 3 GHz</td><td>-55.529 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.458 2 GHz	-8.495 dBm				2	N	1	f	24.572 1 GHz	-42.046 dBm				3	N	1	f	4.715 2 GHz	-52.953 dBm				4	N	1	f	7.420 4 GHz	-53.786 dBm				5	N	1	f	9.555 3 GHz	-55.529 dBm			
MKR	MODE	TRIG	SCL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.458 2 GHz	-8.495 dBm																																																		
2	N	1	f	24.572 1 GHz	-42.046 dBm																																																		
3	N	1	f	4.715 2 GHz	-52.953 dBm																																																		
4	N	1	f	7.420 4 GHz	-53.786 dBm																																																		
5	N	1	f	9.555 3 GHz	-55.529 dBm																																																		


ANT2:

BAND EDGE Graphs

802.11b/LCH

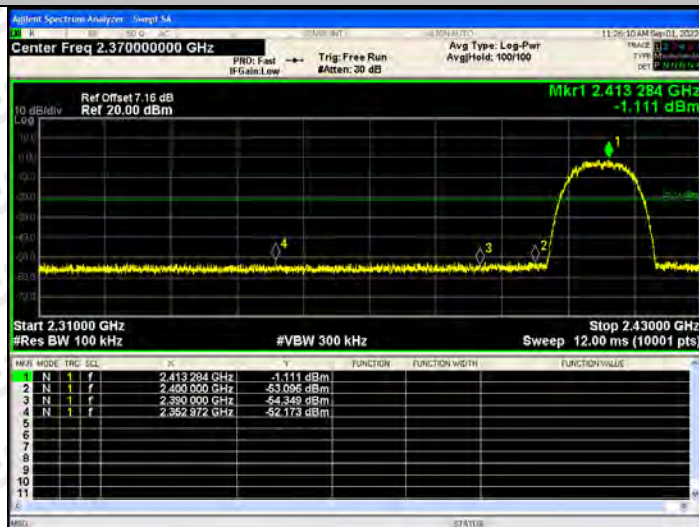


802.11b/HCH

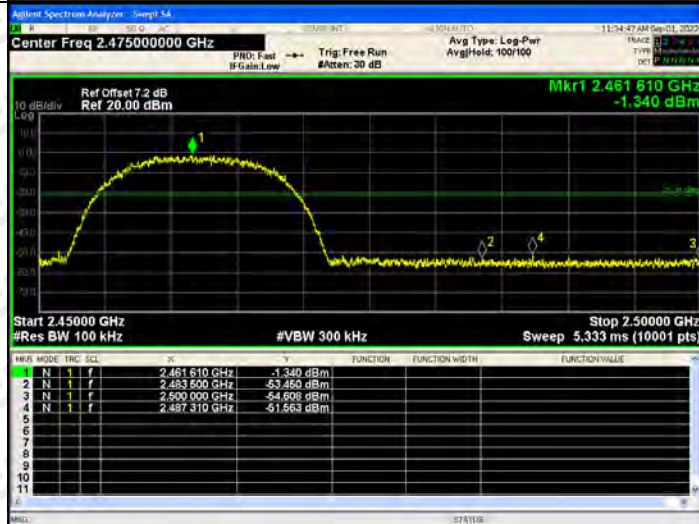

BAND EDGE Graphs

802.11g/LCH

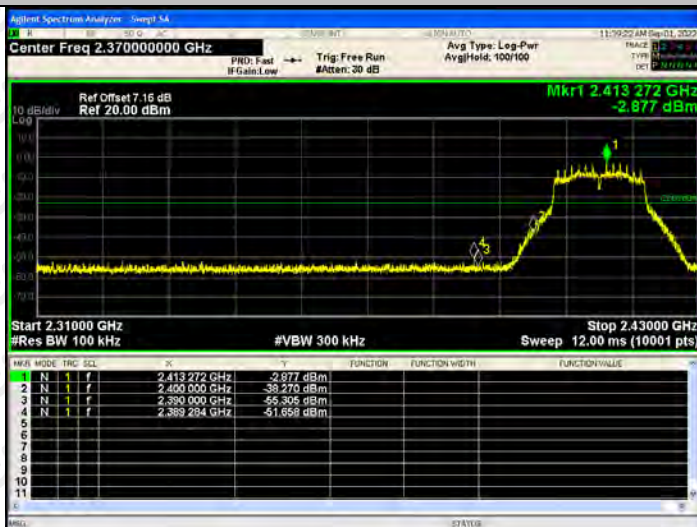


802.11g/HCH



BAND EDGE Graphs

802.11n(HT20)/L
CH

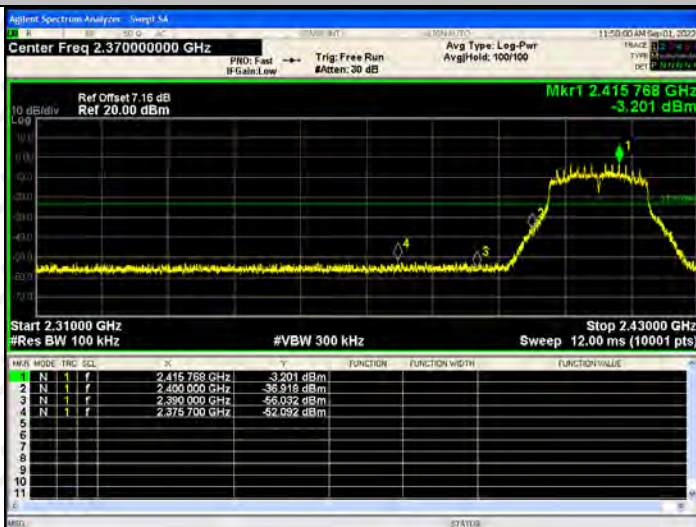

802.11n(HT20)/H
CH



BAND EDGE Graphs


802.11n(HT40)/L
CH




802.11n(HT40)/H
CH



RF Conducted Spurious Emissions Graphs

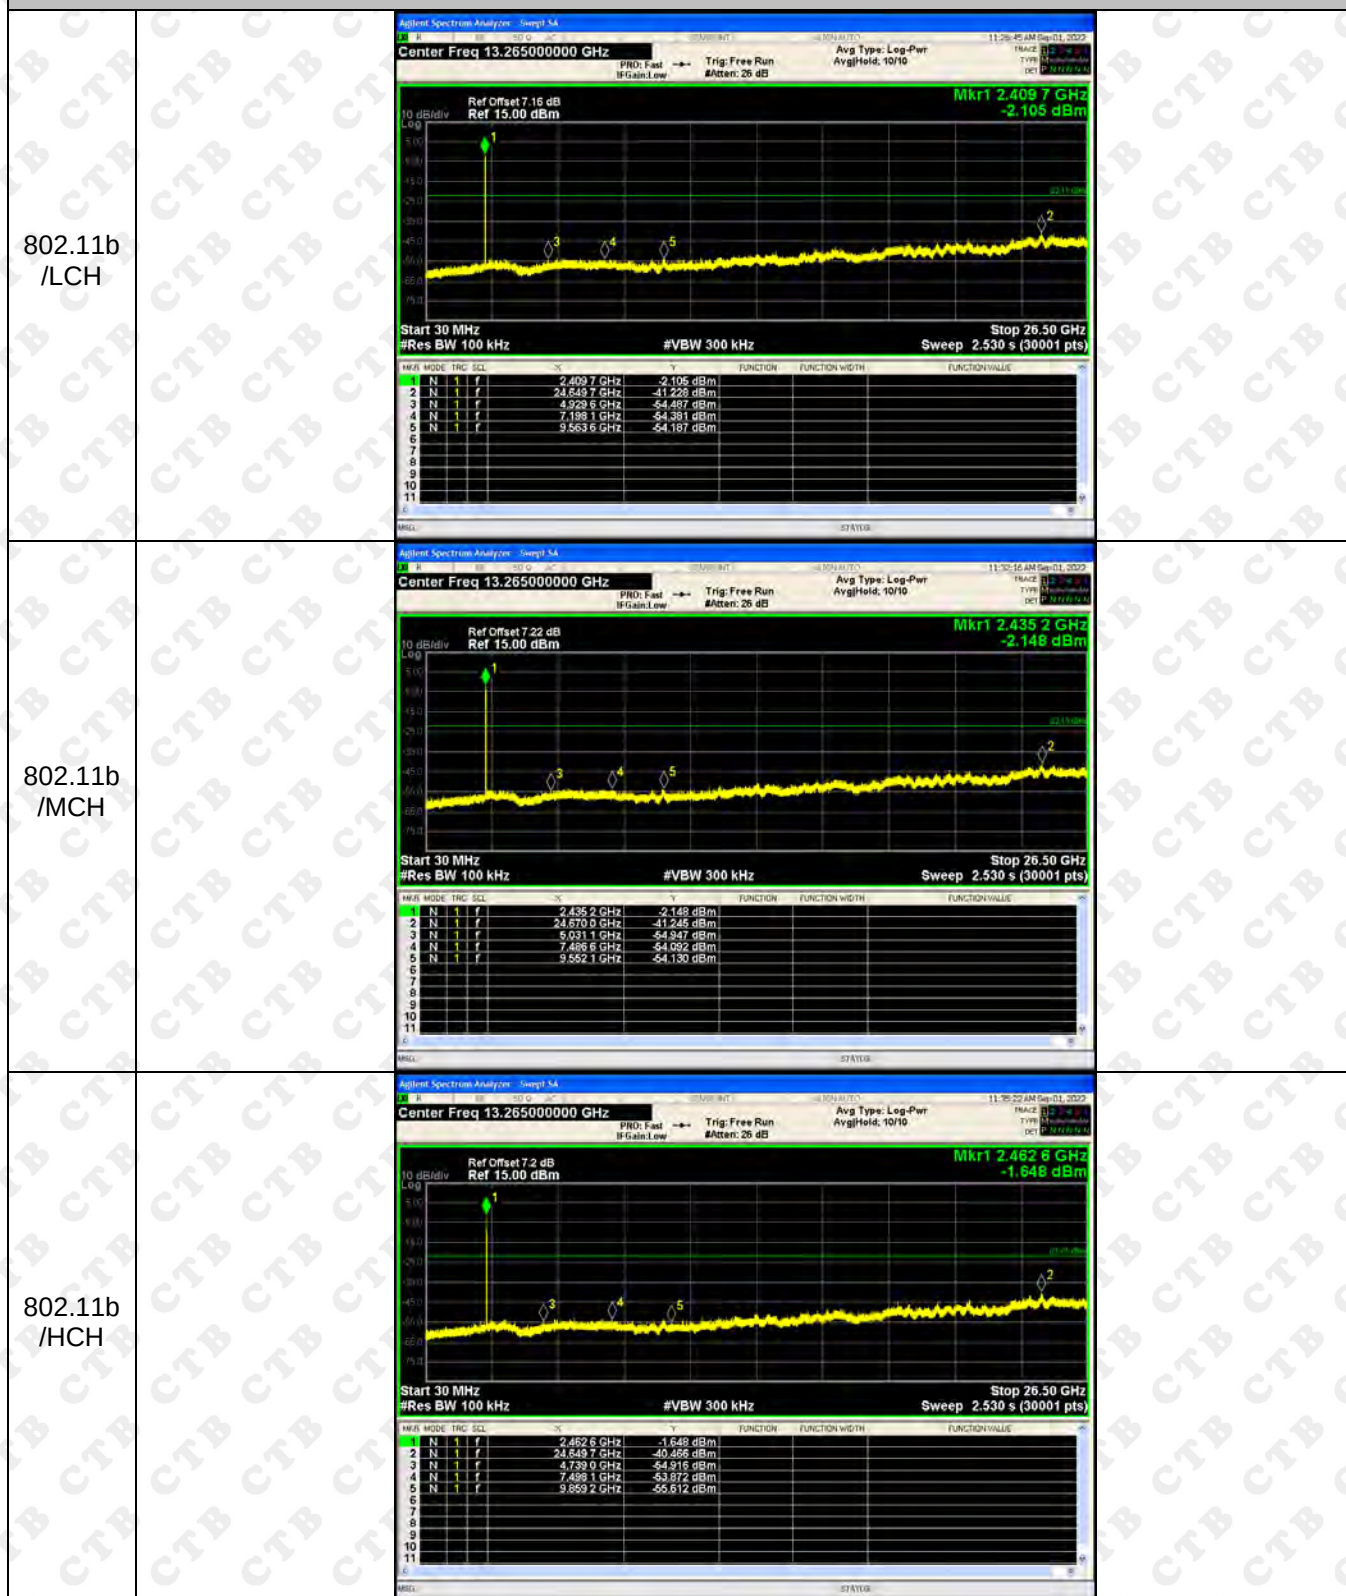


RF Conducted Spurious Emissions Graphs

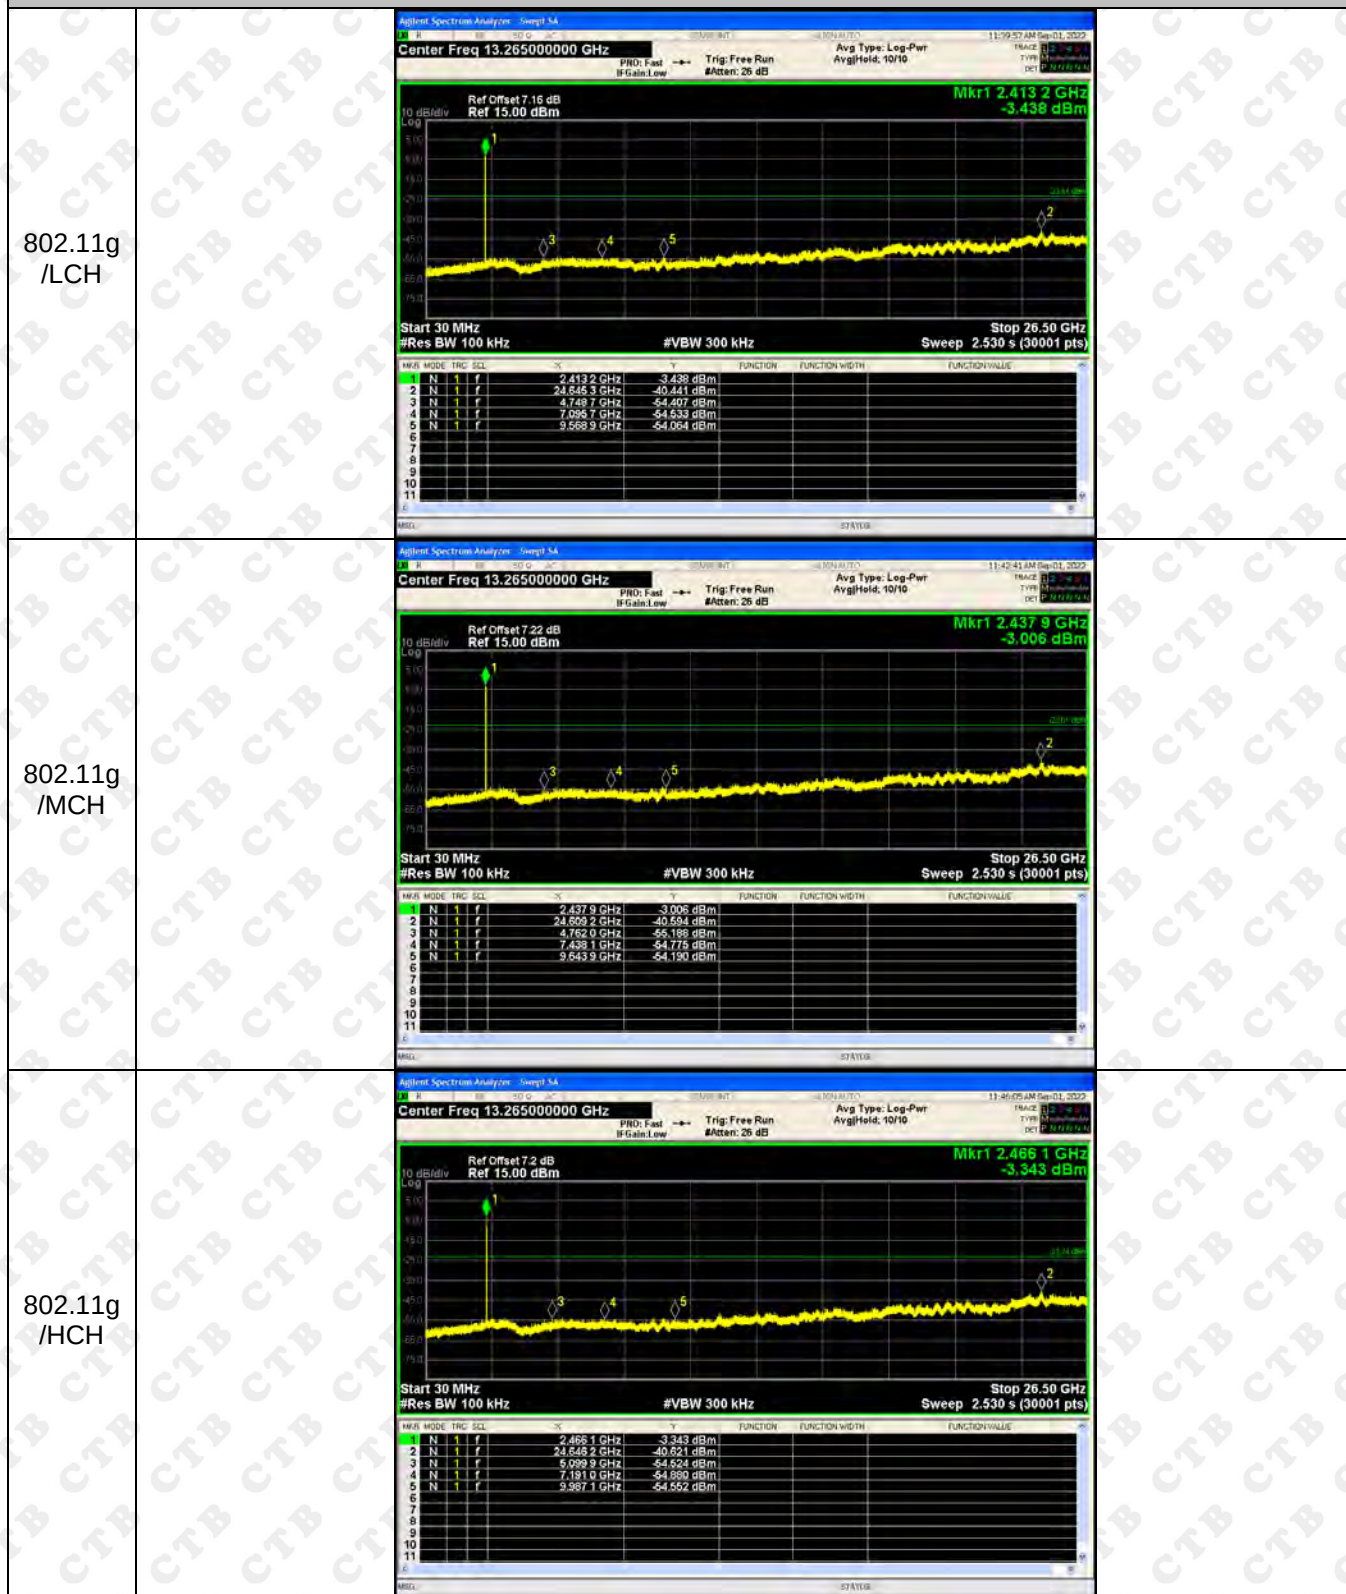


RF Conducted Spurious Emissions Graphs


802.11n
(HT20)/
LCH

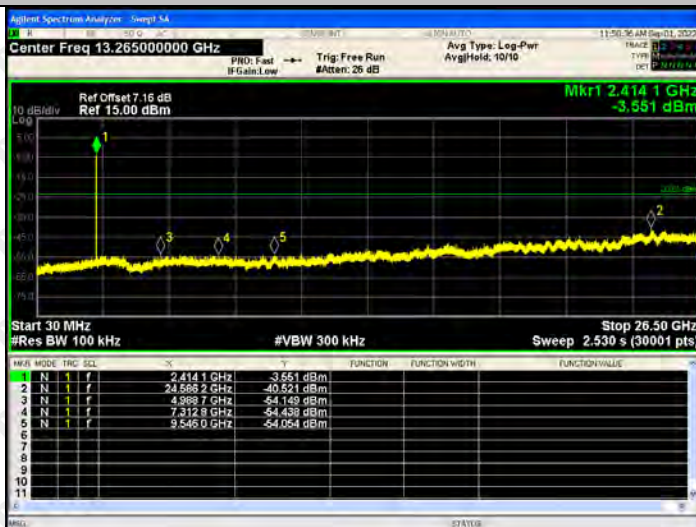


802.11
n(HT20)
/MCH

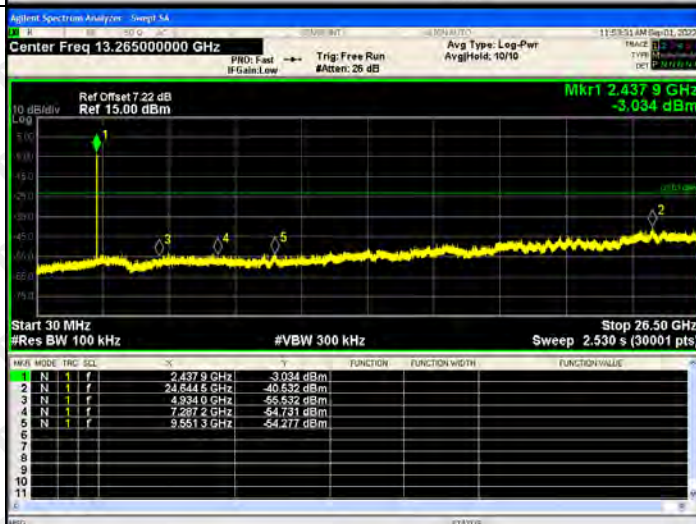

802.11
n(HT20)
/HCH

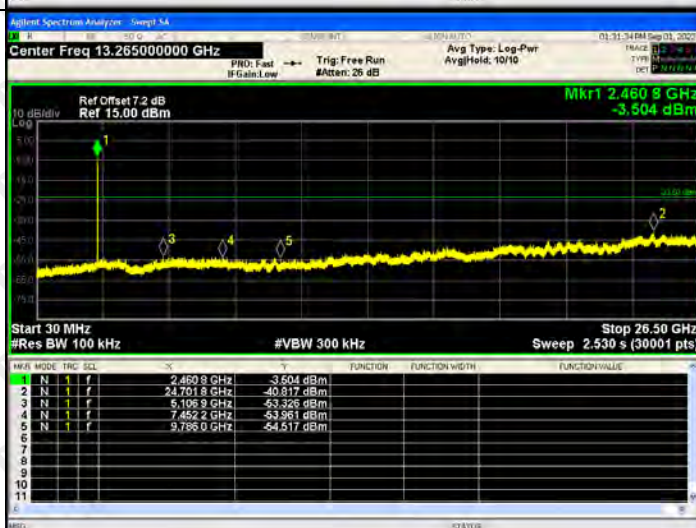


RF Conducted Spurious Emissions Graphs

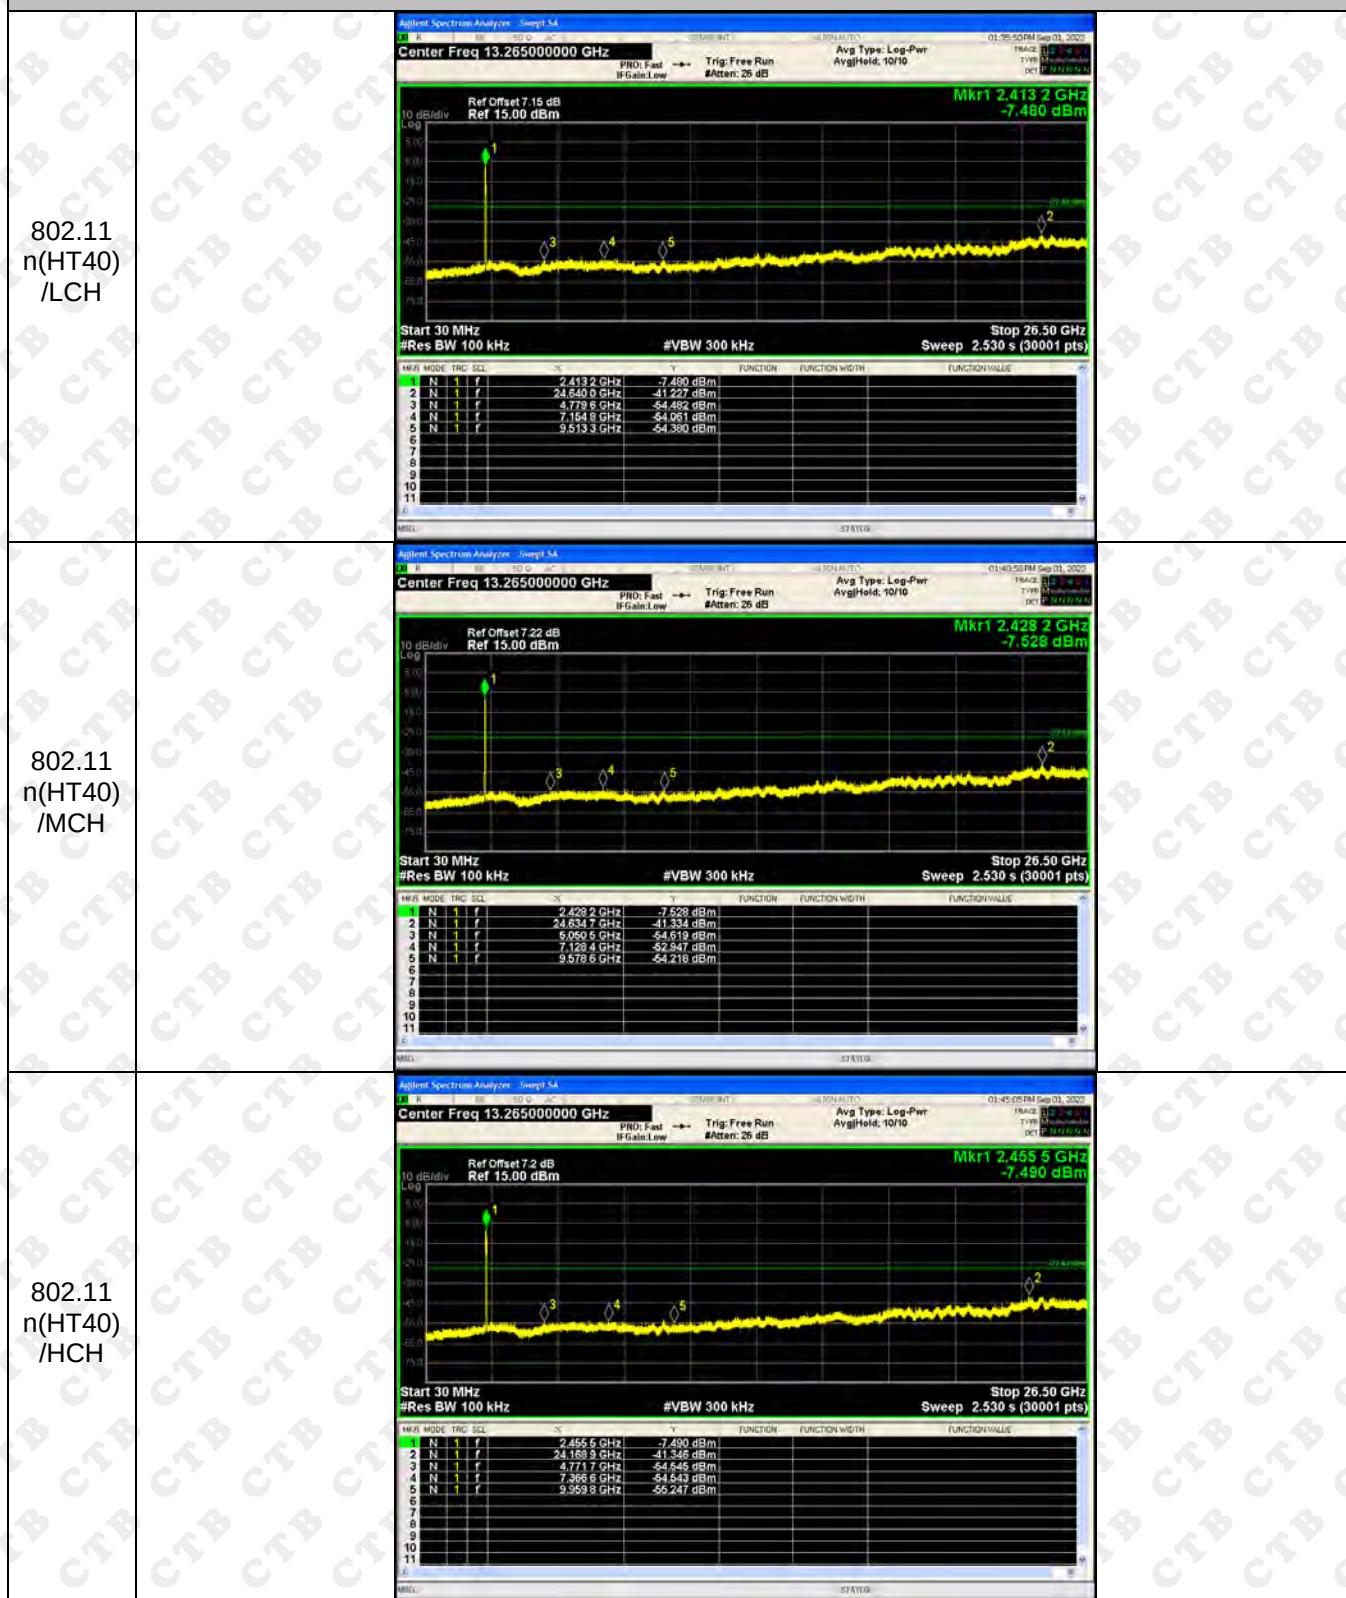

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

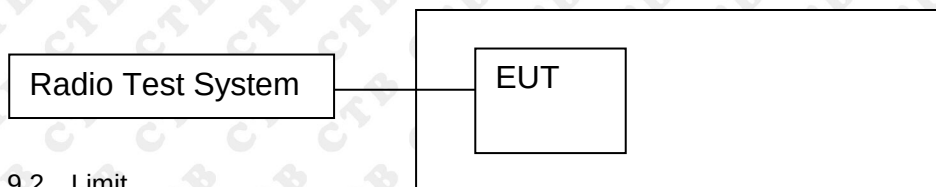

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.577	14.574	/	30
	MCH	14.574	14.524	/	30
	HCH	14.896	14.724	/	30
802.11g	LCH	13.829	13.658	/	30
	MCH	13.712	13.522	/	30
	HCH	13.942	13.792	/	30
802.11n(HT20)	LCH	13.792	13.574	16.695	30
	MCH	13.55	13.501	16.536	30
	HCH	13.876	13.643	16.771	30
802.11n(HT40)	LCH	12.593	12.742	15.678	30
	MCH	12.629	12.844	15.748	30
	HCH	12.519	12.683	15.612	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

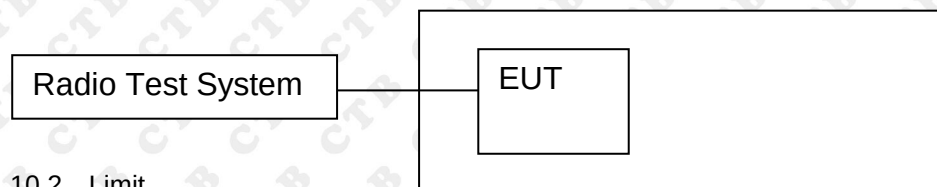

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.389	500	PASS
	MCH	10.383	500	PASS
	HCH	10.466	500	PASS
802.11g	LCH	13.901	500	PASS
	MCH	15.097	500	PASS
	HCH	15.155	500	PASS
802.11n(HT20)	LCH	15.152	500	PASS
	MCH	15.069	500	PASS
	HCH	15.15	500	PASS
802.11n(HT40)	LCH	35.075	500	PASS
	MCH	35.131	500	PASS
	HCH	35.129	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.245	500	PASS
	MCH	10.389	500	PASS
	HCH	10.328	500	PASS
802.11g	LCH	15.149	500	PASS
	MCH	15.157	500	PASS
	HCH	15.143	500	PASS
802.11n(HT20)	LCH	15.137	500	PASS
	MCH	15.148	500	PASS
	HCH	15.149	500	PASS
802.11n(HT40)	LCH	35.101	500	PASS
	MCH	35.1	500	PASS
	HCH	35.112	500	PASS


ANT1:
Test Graph:

Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.417184 GHz -9.6941 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.333 MHz Total Power: 16.4 dBm Transmit Freq Error: -10.536 kHz OBW Power: 99.00 % x dB Bandwidth: 10.39 MHz x dB: -6.00 dB
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.442131 GHz -7.2720 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.371 MHz Total Power: 16.2 dBm Transmit Freq Error: -60.945 kHz OBW Power: 99.00 % x dB Bandwidth: 10.38 MHz x dB: -6.00 dB
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.467205 GHz -7.3928 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.305 MHz Total Power: 16.7 dBm Transmit Freq Error: -27.945 kHz OBW Power: 99.00 % x dB Bandwidth: 10.47 MHz x dB: -6.00 dB


802.11g/LCH




802.11g/MCH

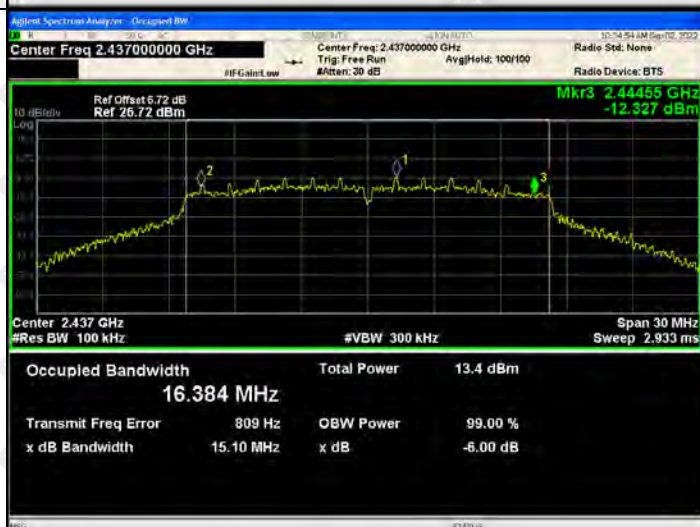

802.11g/HCH

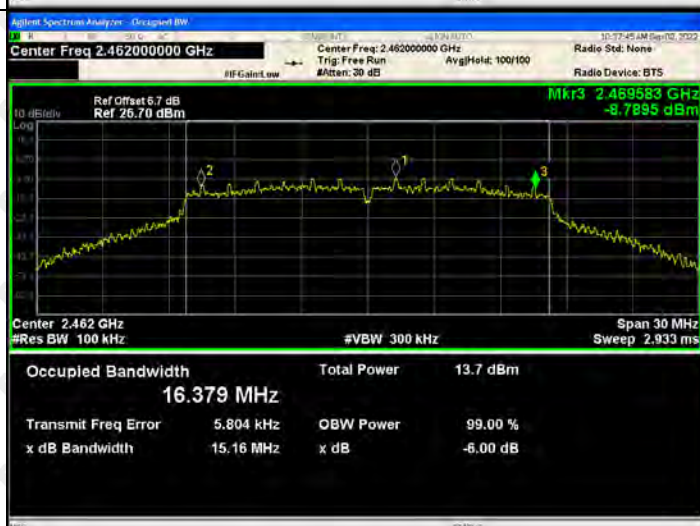

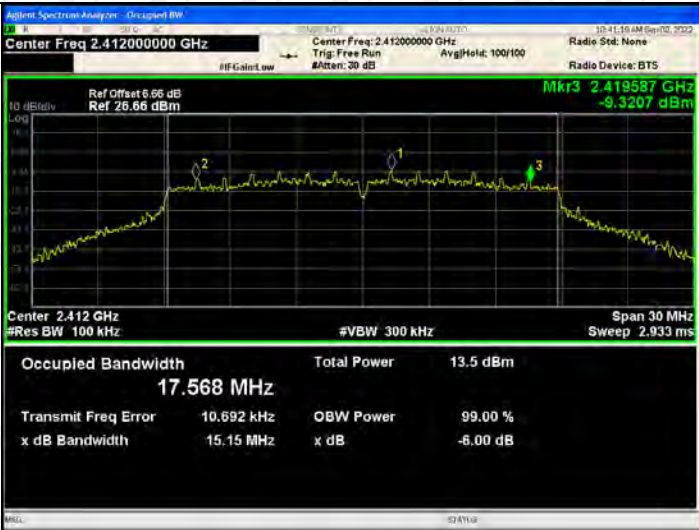
802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 6.56 dB Ref: 26.56 dBm Mkr3: 2.419587 GHz -8.3207 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.5 dBm</td> </tr> <tr> <td>17.568 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>10.692 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.15 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.5 dBm	17.568 MHz			Transmit Freq Error	OBW Power	99.00 %	10.692 kHz			x dB Bandwidth	x dB	-6.00 dB	15.15 MHz			
Occupied Bandwidth	Total Power	13.5 dBm																		
17.568 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
10.692 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.15 MHz																				
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.444532 GHz -6.5335 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.4 dBm</td> </tr> <tr> <td>17.575 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.885 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.07 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.4 dBm	17.575 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.885 kHz			x dB Bandwidth	x dB	-6.00 dB	15.07 MHz			
Occupied Bandwidth	Total Power	13.4 dBm																		
17.575 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-1.885 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.07 MHz																				
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 6.7 dB Ref: 26.70 dBm Mkr3: 2.469571 GHz -7.0685 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.7 dBm</td> </tr> <tr> <td>17.550 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-4.234 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.15 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.7 dBm	17.550 MHz			Transmit Freq Error	OBW Power	99.00 %	-4.234 kHz			x dB Bandwidth	x dB	-6.00 dB	15.15 MHz			
Occupied Bandwidth	Total Power	13.7 dBm																		
17.550 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-4.234 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.15 MHz																				

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Center Freq: 2.42200000 GHz Trig: Free Run AvgHeld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.55 dB Ref 26.65 dBm Mkr3 2.439544 GHz -12.364 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.781 MHz Total Power 12.5 dBm Transmit Freq Error 6.348 kHz OBW Power 99.00 % x dB Bandwidth 35.07 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run AvgHeld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.72 dB Ref 26.72 dBm Mkr3 2.454624 GHz -18.070 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.810 MHz Total Power 12.6 dBm Transmit Freq Error 58.845 kHz OBW Power 99.00 % x dB Bandwidth 35.13 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Center Freq: 2.45200000 GHz Trig: Free Run AvgHeld: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 6.7 dB Ref 26.70 dBm Mkr3 2.469662 GHz -16.276 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.818 MHz Total Power 12.5 dBm Transmit Freq Error 97.093 kHz OBW Power 99.00 % x dB Bandwidth 35.13 MHz x dB -6.00 dB


ANT2:
Test Graph:

Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.16 dB Ref 27.16 dBm Center Freq: 2.41200000 GHz Trig: Free Run #Att: 20 dB Avg/Hold: 100/100 Radio Device: BTS 10 dB/div Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.344 MHz Total Power 16.4 dBm Transmit Freq Error 1.277 kHz OBW Power 99.00 % x dB Bandwidth 10.24 MHz x dB -6.00 dB Mkr3 2.417124 GHz -8.4736 dBm
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.22 dB Ref 27.22 dBm Center Freq: 2.43700000 GHz Trig: Free Run #Att: 20 dB Avg/Hold: 100/100 Radio Device: BTS 10 dB/div Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.349 MHz Total Power 16.1 dBm Transmit Freq Error -23.818 kHz OBW Power 99.00 % x dB Bandwidth 10.39 MHz x dB -6.00 dB Mkr3 2.442171 GHz -9.7193 dBm
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Center Freq: 2.46200000 GHz Trig: Free Run #Att: 20 dB Avg/Hold: 100/100 Radio Device: BTS 10 dB/div Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.334 MHz Total Power 16.4 dBm Transmit Freq Error -45.888 kHz OBW Power 99.00 % x dB Bandwidth 10.33 MHz x dB -6.00 dB Mkr3 2.467118 GHz -9.0194 dBm

802.11g/LCH

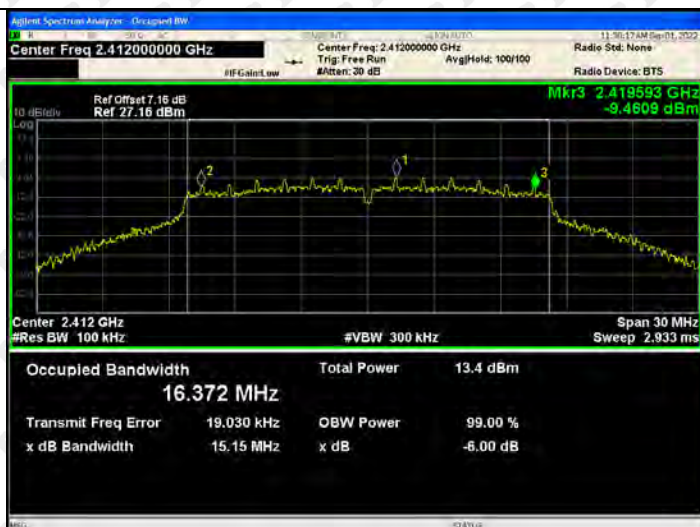



802.11g/MCH

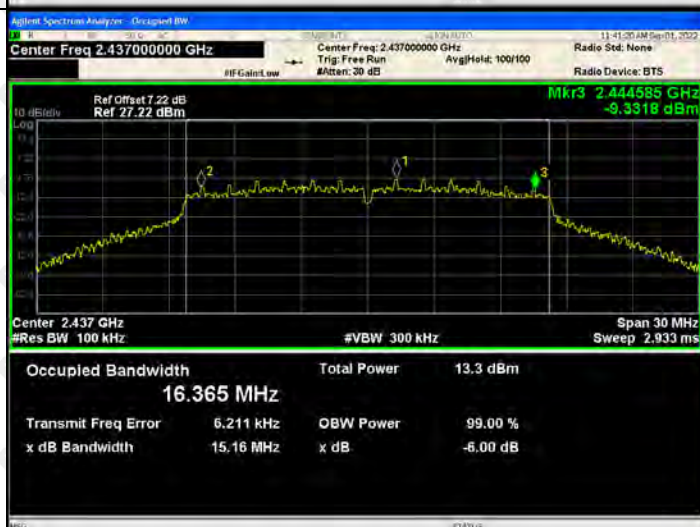

802.11g/HCH

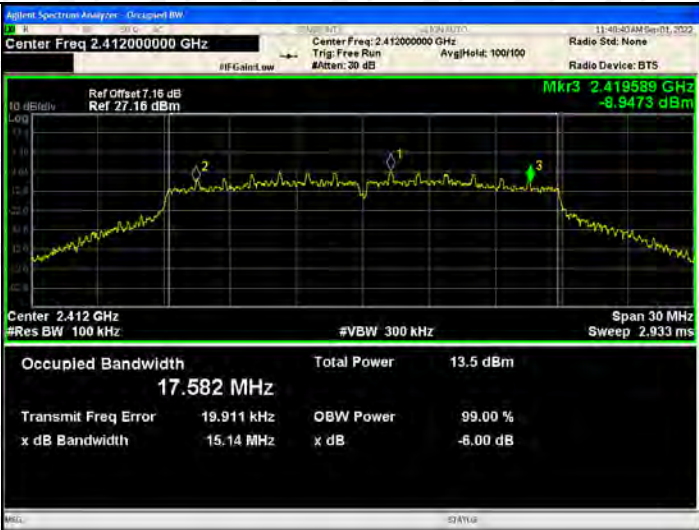


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 7.16 dB Ref: 27.16 dBm Mkr3: 2.419589 GHz -8.9473 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.5 dBm</td> </tr> <tr> <td>17.582 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>19.911 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.14 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.5 dBm	17.582 MHz			Transmit Freq Error	OBW Power	99.00 %	19.911 kHz			x dB Bandwidth	x dB	-6.00 dB	15.14 MHz			
Occupied Bandwidth	Total Power	13.5 dBm																		
17.582 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
19.911 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.14 MHz																				
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.22 dB Ref: 27.22 dBm Mkr3: 2.444578 GHz -9.4618 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.4 dBm</td> </tr> <tr> <td>17.555 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>1.988 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.15 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.4 dBm	17.555 MHz			Transmit Freq Error	OBW Power	99.00 %	1.988 kHz			x dB Bandwidth	x dB	-6.00 dB	15.15 MHz			
Occupied Bandwidth	Total Power	13.4 dBm																		
17.555 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
1.988 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.15 MHz																				
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 7.2 dB Ref: 27.20 dBm Mkr3: 2.46958 GHz -9.5968 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.5 dBm</td> </tr> <tr> <td>17.565 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>5.900 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>15.15 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.5 dBm	17.565 MHz			Transmit Freq Error	OBW Power	99.00 %	5.900 kHz			x dB Bandwidth	x dB	-6.00 dB	15.15 MHz			
Occupied Bandwidth	Total Power	13.5 dBm																		
17.565 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
5.900 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
15.15 MHz																				

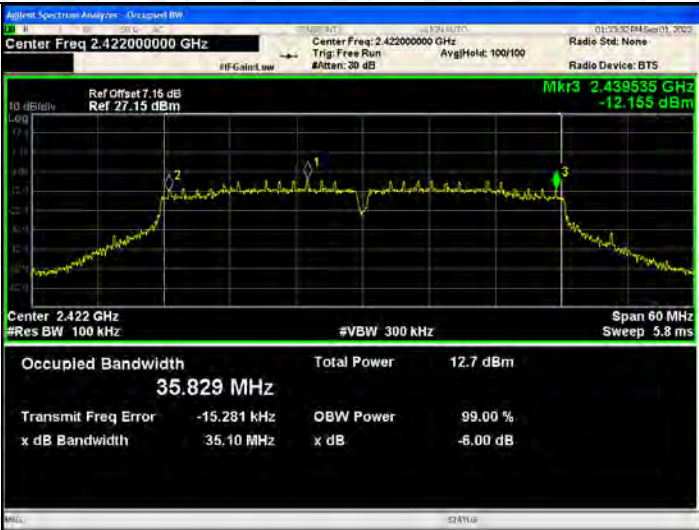802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 7.15 dB Ref: 27.15 dBm Mkr3: 2.439535 GHz -12.155 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td>35.829 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-15.281 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>35.10 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	35.829 MHz			Transmit Freq Error	OBW Power	99.00 %	-15.281 kHz			x dB Bandwidth	x dB	-6.00 dB	35.10 MHz			
Occupied Bandwidth	Total Power	12.7 dBm																		
35.829 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
-15.281 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
35.10 MHz																				
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 7.22 dB Ref: 27.22 dBm Mkr3: 2.454598 GHz -13.189 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td>35.770 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>46.467 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>35.10 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	35.770 MHz			Transmit Freq Error	OBW Power	99.00 %	46.467 kHz			x dB Bandwidth	x dB	-6.00 dB	35.10 MHz			
Occupied Bandwidth	Total Power	12.8 dBm																		
35.770 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
46.467 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
35.10 MHz																				
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 7.2 dB Ref: 27.20 dBm Mkr3: 2.469647 GHz -16.500 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td>35.787 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>91.212 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>35.11 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	35.787 MHz			Transmit Freq Error	OBW Power	99.00 %	91.212 kHz			x dB Bandwidth	x dB	-6.00 dB	35.11 MHz			
Occupied Bandwidth	Total Power	12.7 dBm																		
35.787 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
91.212 kHz																				
x dB Bandwidth	x dB	-6.00 dB																		
35.11 MHz																				

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

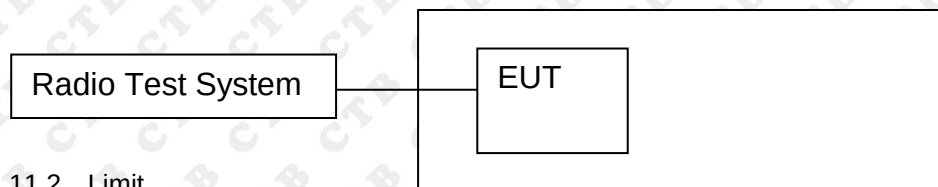

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz]] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-15.056	-15.460	/	8
	MCH	-15.292	-15.433	/	8
	HCH	-15.037	-15.077	/	8
802.11g	LCH	-18.017	-18.058	/	8
	MCH	-18.845	-18.94	/	8
	HCH	-17.996	-17.952	/	8
802.11n(H T20)	LCH	-17.548	-17.816	-14.670	8
	MCH	-18.273	-18.47	-15.360	8
	HCH	-16.875	-17.877	-14.337	8
802.11n(H T40)	LCH	-20.846	-21.278	-18.046	8
	MCH	-21.981	-20.838	-18.362	8
	HCH	-22.185	-21.382	-18.755	8

**ANT1:
Test Graph**

Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.413 29 GHz -15.056 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b /MCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.438 29 GHz -15.292 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b/HCH	Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.463 29 GHz -15.037 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)


802.11g/LCH



802.11g/MCH




802.11g/HCH

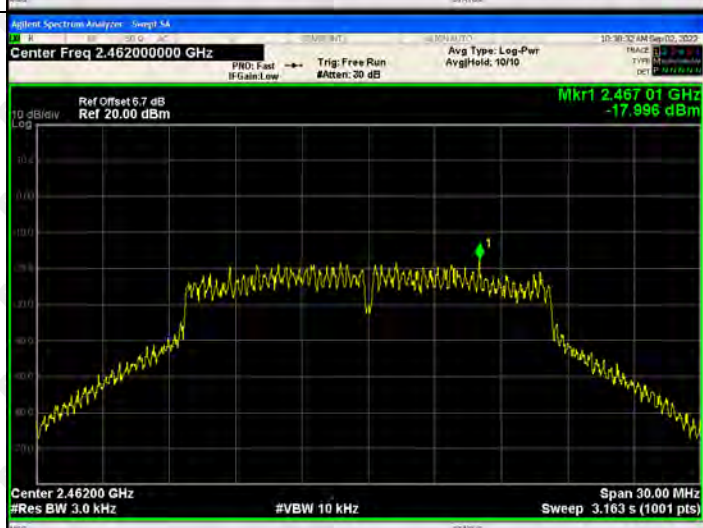

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.41200000 GHz Ref Offset 5.66 dB Ref 20.00 dBm Mkr1 2.415 75 GHz -17.548 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.434 51 GHz -18.273 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 01 GHz -16.875 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.42200000 GHz Ref Offset 5.65 dB Ref 20.00 dBm Mkr1 2.426 98 GHz -20.846 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.43700000 GHz Ref Offset 5.72 dB Ref 20.00 dBm Mkr1 2.440 72 GHz -21.981 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.45200000 GHz Ref Offset 5.7 dB Ref 20.00 dBm Mkr1 2.460 70 GHz -22.185 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

ANT 2: Test Graph

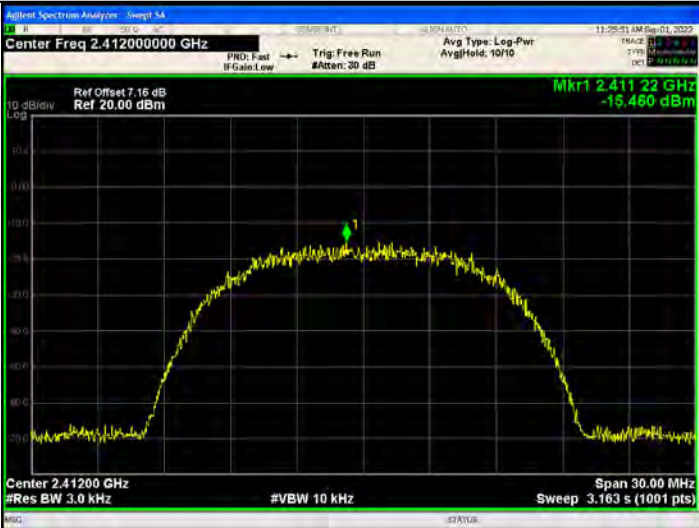Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.41200000 GHz Ref Offset: 7.16 dB Ref 20.00 dBm Mkr1 2.411 22 GHz -15.460 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset: 7.22 dB Ref 20.00 dBm Mkr1 2.436 22 GHz -15.433 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11b/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.46200000 GHz Ref Offset: 7.2 dB Ref 20.00 dBm Mkr1 2.463 29 GHz -15.077 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

802.11g/LCH





802.11g/MCH



802.11g/HCH

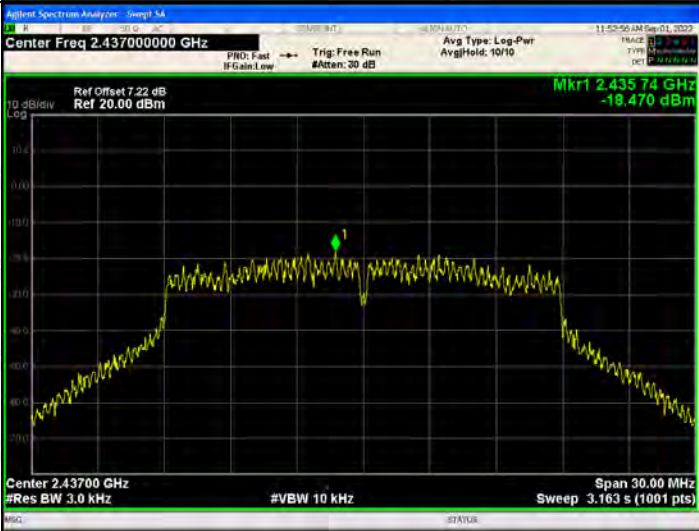

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.41200000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.41098 GHz -17.816 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.43700000 GHz Ref Offset 7.22 dB Ref 20.00 dBm Mkr1 2.43574 GHz -18.470 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.46200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.46101 GHz -17.877 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

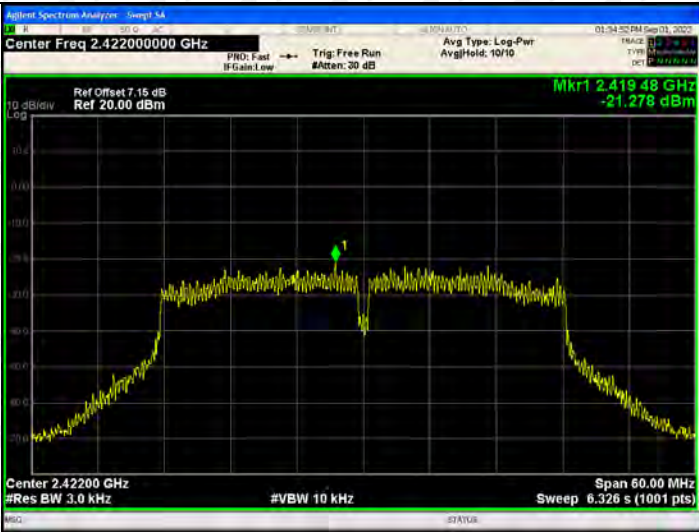802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.42200000 GHz Ref Offset 7.15 dB Ref 20.00 dBm Mkr1 2.419 48 GHz -21.278 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.43700000 GHz Ref Offset 7.22 dB Ref 20.00 dBm Mkr1 2.434 48 GHz -20.838 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep 34 Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.456 98 GHz -21.382 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 1.75dBi.

13. EUT PHOTOGRAPHS

External Photos

EUT Photo 1



EUT Photo 2



14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



***** END OF REPORT *****