


## Appendix E. Test Result of Transmitter Radiated Spurious Emission

### 30 MHz ~ 1 GHz

Site :HC-CB04  
 Condition :3m Horizontal  
 Mode :LF\_n20\_TX\_2412MHz  
 Test By :Scott

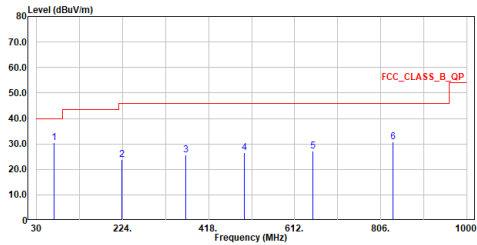


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	69.091	30.38	40.00	-9.62	34.85	-4.47	QP
2	222.642	23.72	46.00	-22.28	30.38	-6.66	QP
3	366.493	25.79	46.00	-20.21	27.08	-1.29	QP
4	499.189	26.42	46.00	-19.58	24.51	1.91	QP
5	652.352	27.23	46.00	-18.77	22.08	5.15	QP
6	833.063	30.79	46.00	-15.21	23.23	7.56	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m Vertical  
 Mode :LF\_n20\_TX\_2412MHz  
 Test By :Scott

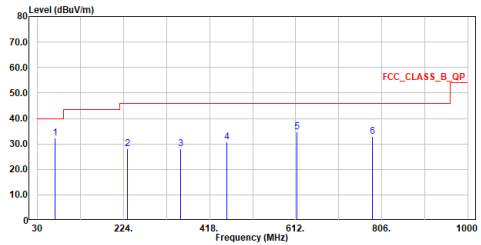


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	68.994	32.40	40.00	-7.60	36.83	-4.43	QP
2	232.536	28.06	46.00	-17.94	33.71	-5.65	QP
3	353.204	28.07	46.00	-17.93	29.81	-1.74	QP
4	457.382	30.82	46.00	-15.18	29.56	1.26	QP
5	615.589	34.77	46.00	-11.23	30.32	4.45	QP
6	785.727	32.86	46.00	-13.14	25.91	6.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

### Above 1 GHz


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

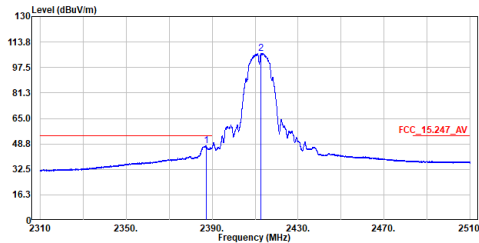

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.160	47.75	54.00	-6.25	37.17	10.58	Average
2	2412.740	106.41	-----	-----	95.73	10.68	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

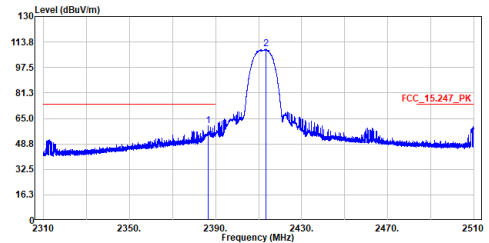

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2386.640	60.21	74.00	-13.79	49.63	10.58	Peak
2	2413.480	109.19	-----	-----	98.51	10.68	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

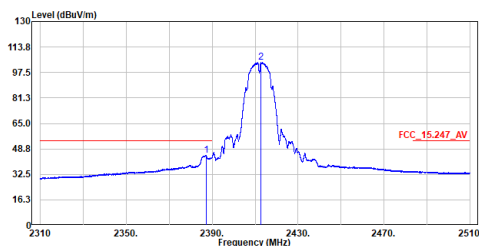

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.240	44.82	54.00	-9.18	34.24	10.58	Average
2	2412.760	103.90	-----	-----	93.22	10.68	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

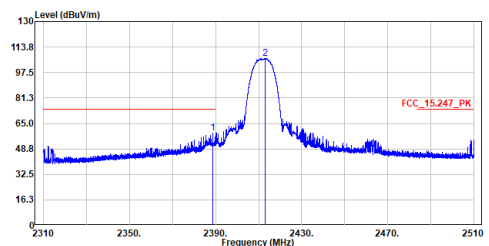

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.600	58.85	74.00	-15.15	48.27	10.58	Peak
2	2412.920	106.46	-----	-----	95.78	10.68	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

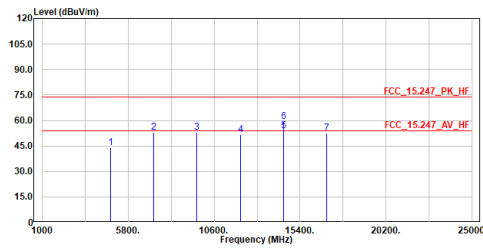

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	44.14	74.00	-29.86	61.97	-17.83	Peak
2	7236.000	52.98	74.00	-21.02	65.71	-12.73	Peak
3	9648.000	53.05	74.00	-20.95	62.11	-9.06	Peak
4	12060.000	51.73	74.00	-22.27	57.50	-5.77	Peak
5	14472.000	53.80	54.00	-0.20	56.75	-2.95	Average
6	14472.000	59.31	74.00	-14.69	62.26	-2.95	Peak
7	16884.000	52.75	74.00	-21.25	56.33	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2412MHz  
 Test By :Scott

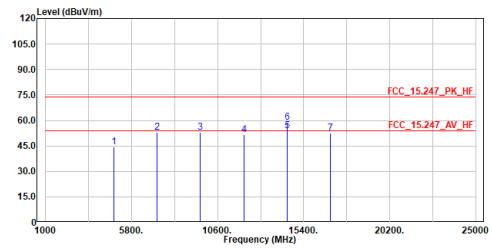

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	44.28	74.00	-29.72	62.11	-17.83	Peak
2	7236.000	53.12	74.00	-20.88	65.85	-12.73	Peak
3	9648.000	52.78	74.00	-21.22	61.84	-9.06	Peak
4	12060.000	51.45	74.00	-22.55	57.22	-5.77	Peak
5	14472.000	53.83	54.00	-0.17	56.78	-2.95	Average
6	14472.000	58.77	74.00	-15.23	61.72	-2.95	Peak
7	16884.000	52.53	74.00	-21.47	56.11	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

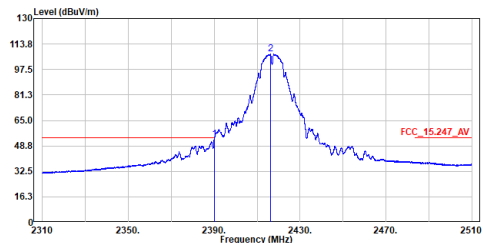

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.99	54.00	-1.01	42.40	10.59	Average
2	2416.240	107.22	-----	-----	96.52	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

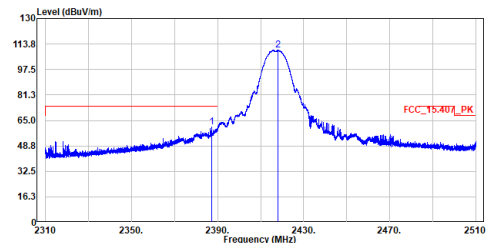

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.120	60.84	74.00	-13.16	50.26	10.58	Peak
2	2417.900	109.82	-----	-----	99.12	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

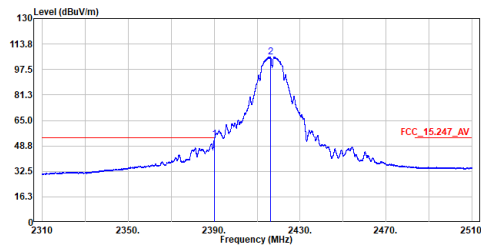

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.74	54.00	-1.26	42.15	10.59	Average
2	2416.320	105.38	-----	-----	94.68	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

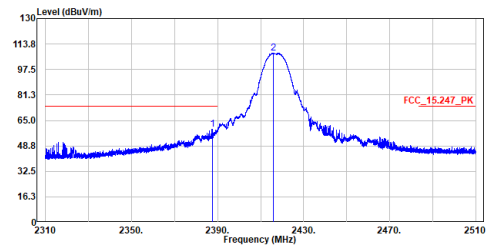

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.560	59.36	74.00	-14.64	48.78	10.58	Peak
2	2416.080	107.97	-----	-----	97.27	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

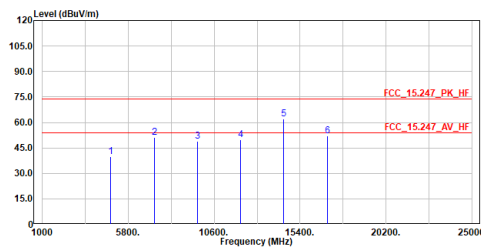

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	39.91	74.00	-34.09	57.71	-17.80	Peak
2	7251.000	51.02	74.00	-22.98	63.73	-12.71	Peak
3	9668.000	49.11	74.00	-24.89	58.15	-9.04	Peak
4	12085.000	49.99	74.00	-24.01	55.73	-5.74	Peak
5	14502.000	62.16	74.00	-11.84	65.00	-2.92	Peak
6	16919.000	52.01	74.00	-21.99	55.61	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2417MHz  
 Test By :Scott

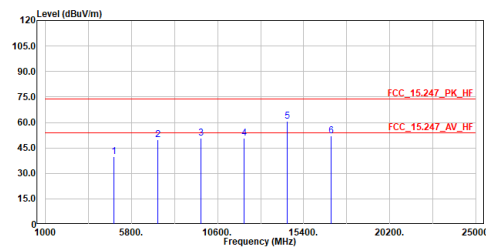

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	39.95	74.00	-34.05	57.75	-17.80	Peak
2	7251.000	49.60	74.00	-24.40	62.31	-12.71	Peak
3	9668.000	50.91	74.00	-23.09	59.95	-9.04	Peak
4	12085.000	50.65	74.00	-23.35	56.39	-5.74	Peak
5	14502.000	60.80	74.00	-13.20	63.72	-2.92	Peak
6	16919.000	51.96	74.00	-22.04	55.56	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

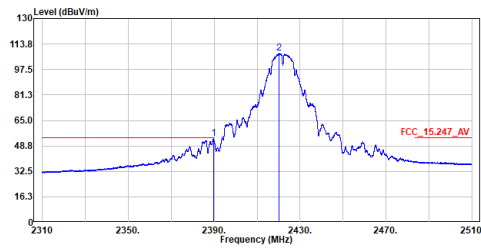

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.660	53.32	54.00	-0.68	42.73	10.59	Average
2	2420.220	107.70	-----	-----	96.98	10.72	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

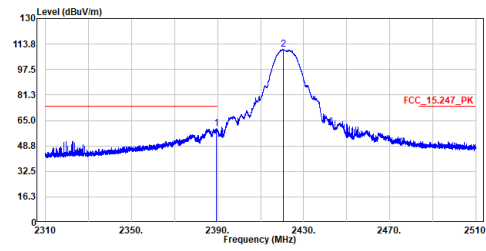

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.440	59.74	74.00	-14.26	49.15	10.59	Peak
2	2420.500	110.24	-----	-----	99.52	10.72	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

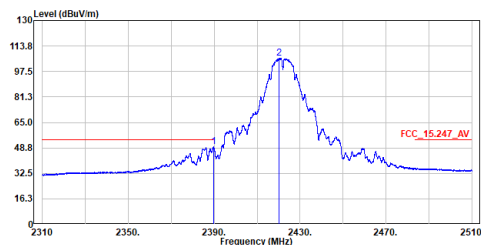

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.720	49.48	54.00	-4.52	38.89	10.59	Average
2	2420.240	105.92	-----	-----	95.20	10.72	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

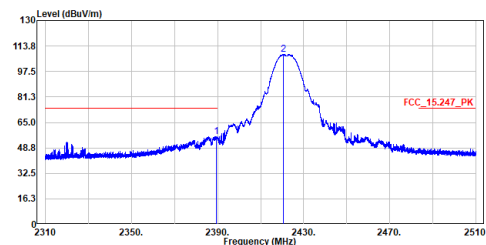

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.400	56.11	74.00	-17.89	45.52	10.59	Peak
2	2420.520	108.47	-----	-----	97.75	10.72	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

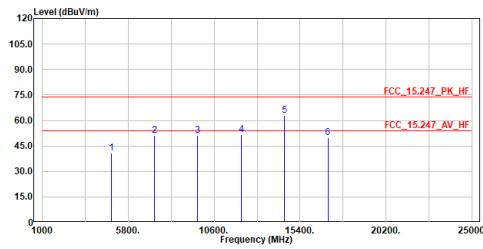

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.53	74.00	-33.47	58.30	-17.77	Peak
2	7266.000	51.11	74.00	-22.89	63.80	-12.69	Peak
3	9688.000	51.10	74.00	-22.90	60.11	-9.01	Peak
4	12110.000	51.75	74.00	-22.25	57.46	-5.71	Peak
5	14532.000	62.99	74.00	-11.05	65.88	-2.93	Peak
6	16954.000	49.87	74.00	-24.13	53.48	-3.61	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2422MHz  
 Test By :Scott

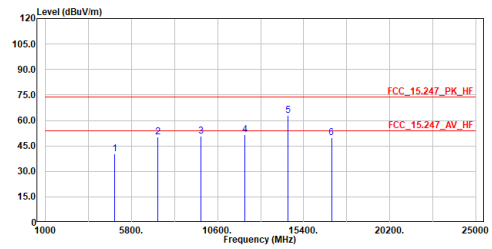

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.13	74.00	-33.87	57.90	-17.77	Peak
2	7266.000	50.42	74.00	-23.58	63.11	-12.69	Peak
3	9688.000	50.62	74.00	-23.38	59.63	-9.01	Peak
4	12110.000	51.49	74.00	-22.51	57.20	-5.71	Peak
5	14532.000	62.99	74.00	-11.01	65.92	-2.93	Peak
6	16954.000	49.94	74.00	-24.06	53.55	-3.61	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

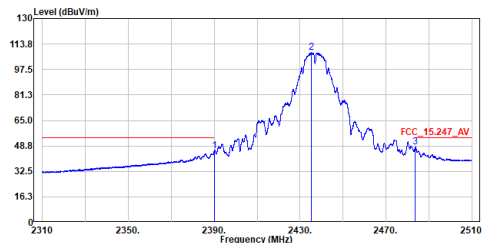

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.980	45.40	54.00	-8.60	34.81	10.59	Average
2	2435.260	108.23	-----	-----	97.45	10.78	Average
3	2483.740	48.03	54.00	-5.97	37.04	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

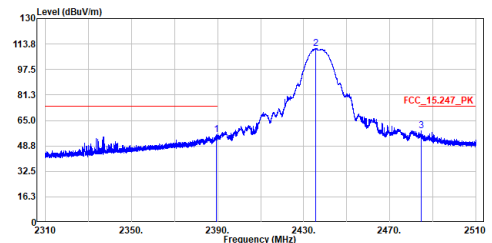

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.420	55.76	74.00	-18.24	45.17	10.59	Peak
2	2435.500	110.81	-----	-----	100.03	10.78	Peak
3	2484.760	58.51	74.00	-15.49	47.51	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

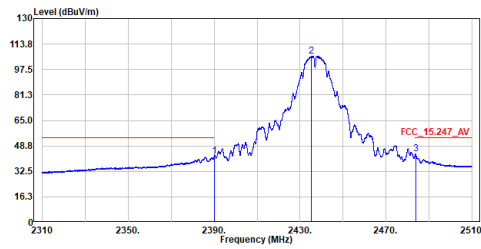

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	42.37	54.00	-11.63	31.78	10.59	Average
2	2435.260	106.04	54.00	52.04	95.26	10.78	Average
3	2483.880	43.63	54.00	-10.37	32.64	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

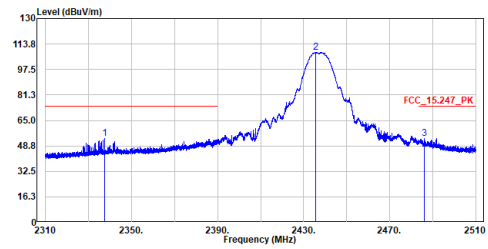

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2337.480	53.35	74.00	-20.65	42.99	10.36	Peak
2	2435.520	108.61	74.00	34.61	97.83	10.78	Peak
3	2486.140	53.43	74.00	-20.57	42.42	11.01	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

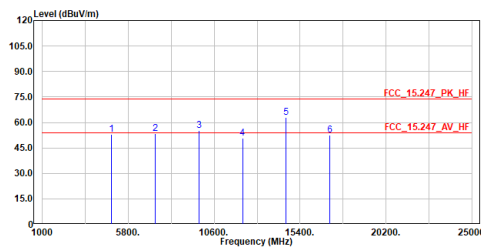

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	53.05	74.00	-20.95	70.72	-17.67	Peak
2	7311.000	53.28	74.00	-20.72	65.90	-12.62	Peak
3	9748.000	55.12	74.00	-18.88	64.05	-8.93	Peak
4	12185.000	50.65	74.00	-23.35	56.26	-5.61	Peak
5	14622.000	62.04	74.00	-11.96	65.84	-3.00	Peak
6	17859.000	52.64	74.00	-21.36	56.21	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2437MHz  
 Test By :Scott

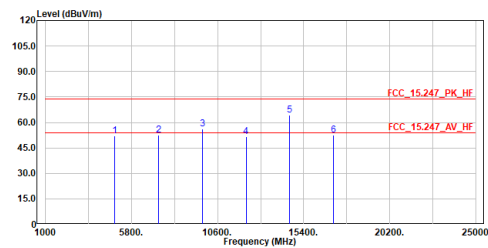

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	51.97	74.00	-22.03	69.64	-17.67	Peak
2	7311.000	52.61	74.00	-21.39	65.23	-12.62	Peak
3	9748.000	56.19	74.00	-17.81	65.12	-8.93	Peak
4	12185.000	51.74	74.00	-22.26	57.35	-5.61	Peak
5	14622.000	64.43	74.00	-9.57	67.43	-3.00	Peak
6	17859.000	52.48	74.00	-21.52	56.05	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

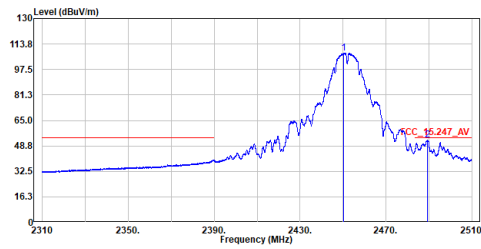

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.220	108.08	-----	-----	97.24	10.84	Average
2	2489.200	52.48	54.00	-1.52	41.47	11.01	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

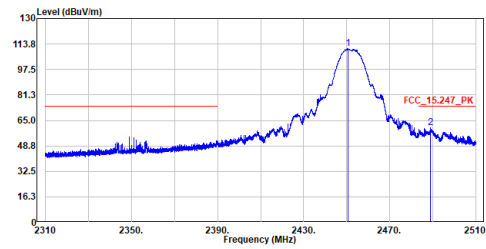

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.520	110.66	-----	-----	99.82	10.84	Peak
2	2488.820	60.18	74.00	-13.82	49.17	11.01	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

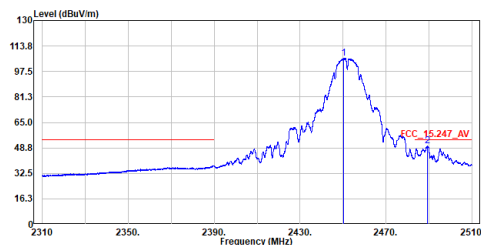

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.240	106.00	-----	-----	95.16	10.84	Average
2	2489.220	49.94	54.00	-4.06	38.93	11.01	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

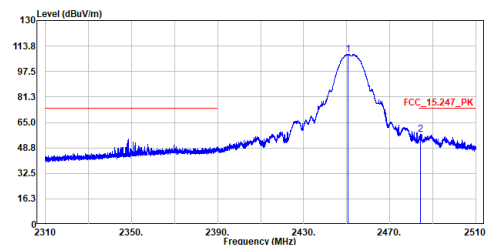


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.500	108.60	-----	-----	97.76	10.84	Peak
2	2484.220	57.46	74.00	-16.54	46.46	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

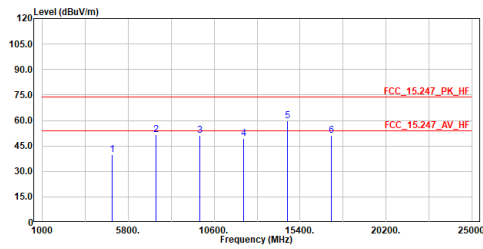

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	39.83	74.00	-34.17	57.41	-17.58	Peak
2	7356.000	51.59	74.00	-22.41	64.14	-12.55	Peak
3	9808.000	51.08	74.00	-22.92	59.91	-8.83	Peak
4	12260.000	49.44	74.00	-24.56	54.97	-5.53	Peak
5	14712.000	59.68	74.00	-14.32	62.72	-3.04	Peak
6	17164.000	51.30	74.00	-22.70	54.72	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2452MHz  
 Test By :Scott

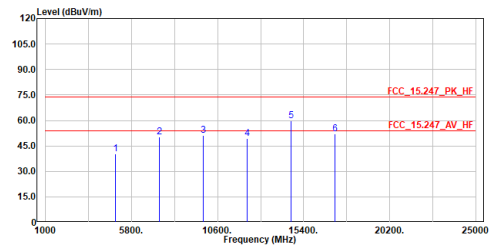

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	40.16	74.00	-33.84	57.74	-17.58	Peak
2	7356.000	50.09	74.00	-23.91	62.64	-12.55	Peak
3	9808.000	51.02	74.00	-22.98	59.85	-8.83	Peak
4	12260.000	49.16	74.00	-24.84	54.69	-5.53	Peak
5	14712.000	59.92	74.00	-14.08	62.96	-3.04	Peak
6	17164.000	52.10	74.00	-21.90	55.52	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

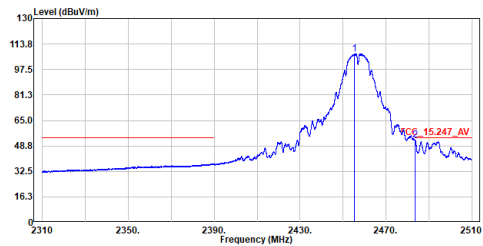

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.260	107.56	-----	-----	96.69	10.87	Average
2	2483.520	52.31	54.00	-1.69	41.33	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

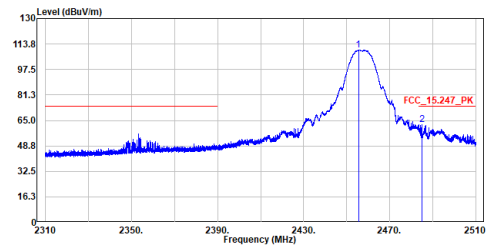

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.480	110.08	-----	-----	99.21	10.87	Peak
2	2485.140	62.34	74.00	-11.66	51.34	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

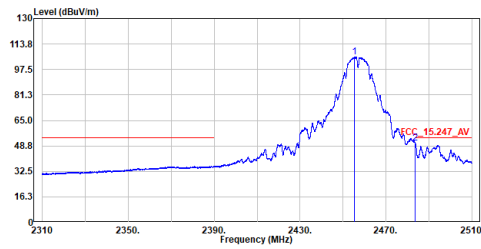

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.260	105.49	48.80	56.69	94.62	10.87	Average
2	2483.520	50.29	54.00	-3.71	39.31	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

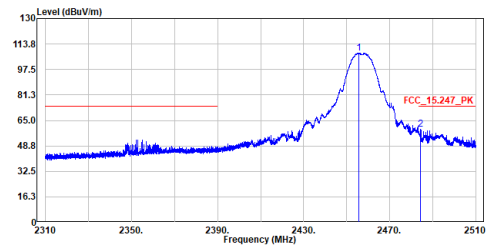

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.500	108.08	65.00	43.08	97.21	10.87	Peak
2	2484.380	59.13	74.00	-14.87	48.13	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

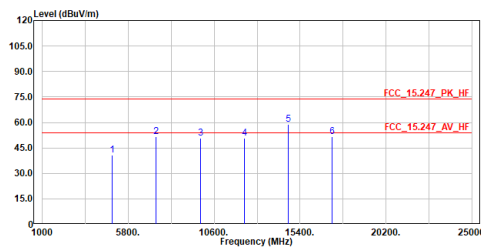

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.77	74.00	-33.23	58.33	-17.56	Peak
2	7371.000	51.65	74.00	-22.35	64.18	-12.53	Peak
3	9828.000	50.87	74.00	-23.13	59.69	-8.82	Peak
4	12285.000	50.80	74.00	-23.20	56.29	-5.49	Peak
5	14742.000	58.94	74.00	-15.06	62.02	-3.08	Peak
6	17199.000	51.56	74.00	-22.44	54.93	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2457MHz  
 Test By :Scott

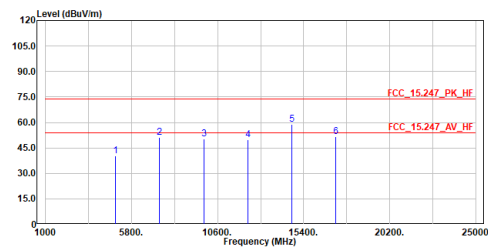

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.22	74.00	-33.78	57.78	-17.56	Peak
2	7371.000	51.14	74.00	-22.86	63.67	-12.53	Peak
3	9828.000	50.25	74.00	-23.75	59.07	-8.82	Peak
4	12285.000	49.89	74.00	-24.11	55.38	-5.49	Peak
5	14742.000	58.84	74.00	-15.16	61.92	-3.08	Peak
6	17199.000	51.60	74.00	-22.40	54.97	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

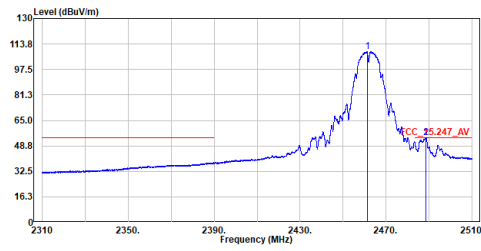

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.240	108.83	-----	-----	97.94	10.89	Average
2	2488.700	53.89	54.00	-0.11	42.88	11.01	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

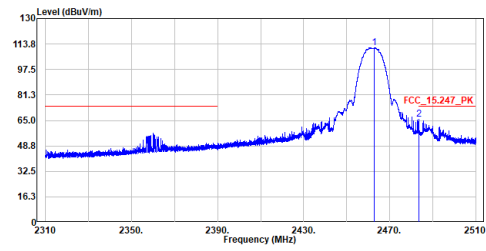

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.920	111.39	-----	-----	100.49	10.90	Peak
2	2483.660	65.70	74.00	-8.30	54.72	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

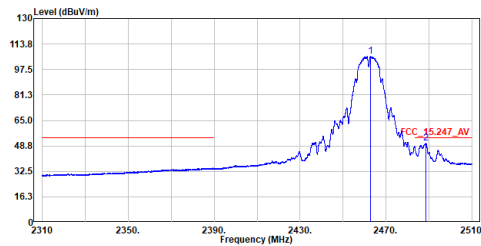

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.780	105.83	-----	-----	94.93	10.90	Average
2	2488.640	50.29	54.00	-3.71	39.28	11.01	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

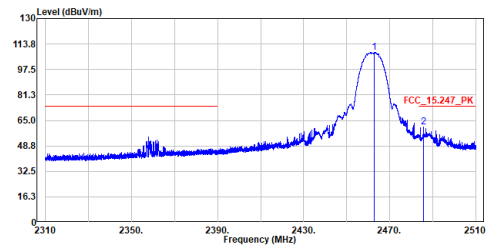

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.900	108.38	-----	-----	97.48	10.90	Peak
2	2485.760	60.94	74.00	-13.06	49.94	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

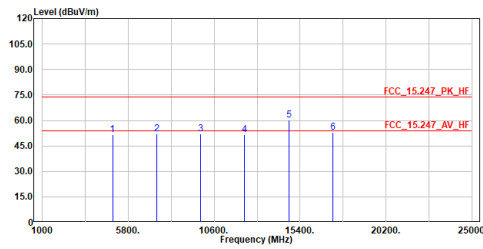

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	51.40	74.00	-22.60	68.92	-17.52	Peak
2	7386.000	52.15	74.00	-21.85	64.66	-12.51	Peak
3	9848.000	52.04	74.00	-21.96	60.82	-8.78	Peak
4	12310.000	51.42	74.00	-22.58	56.89	-5.47	Peak
5	14772.000	60.18	74.00	-13.82	63.27	-3.09	Peak
6	17234.000	52.79	74.00	-21.21	56.11	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :b\_TX\_2462MHz  
 Test By :Scott

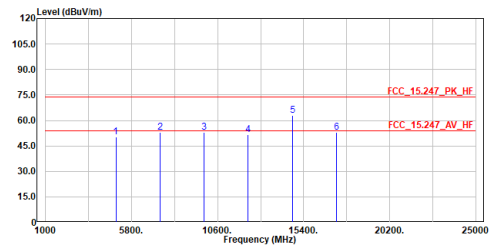

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	50.22	74.00	-23.78	67.74	-17.52	Peak
2	7386.000	52.84	74.00	-21.16	65.35	-12.51	Peak
3	9848.000	52.77	74.00	-21.23	61.55	-8.78	Peak
4	12310.000	51.76	74.00	-22.24	57.23	-5.47	Peak
5	14772.000	62.97	74.00	-11.03	66.06	-3.09	Peak
6	17234.000	52.91	74.00	-21.09	56.23	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

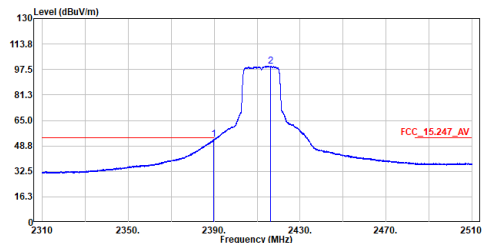

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.940	52.88	54.00	-1.12	42.29	10.59	Average
2	2416.360	99.58	-----	-----	88.88	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

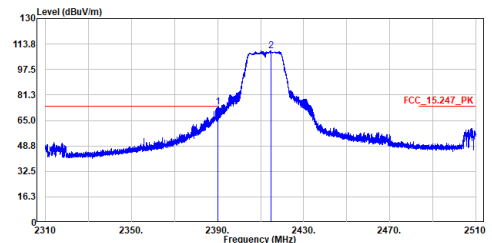

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.980	73.66	74.00	-0.34	63.07	10.59	Peak
2	2414.720	109.36	-----	-----	98.66	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

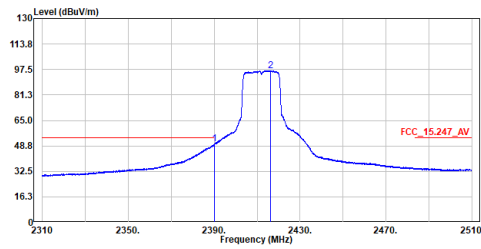

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.980	49.97	54.00	-4.03	39.38	10.59	Average
2	2416.420	96.85	54.00	42.85	86.15	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

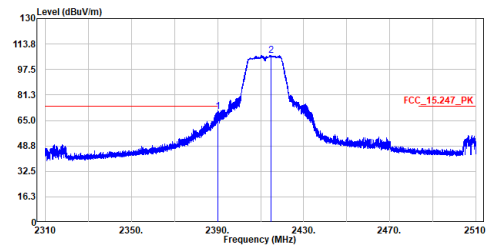

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	70.43	74.00	-3.57	59.84	10.59	Peak
2	2414.700	106.57	74.00	32.57	95.87	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

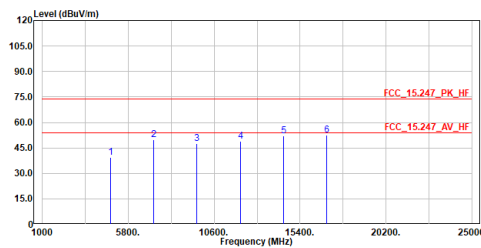

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	39.45	74.00	-34.55	57.28	-17.83	Peak
2	7236.000	49.94	74.00	-24.06	62.67	-12.73	Peak
3	9648.000	47.63	74.00	-26.37	56.69	-9.06	Peak
4	12060.000	48.75	74.00	-25.25	54.52	-5.77	Peak
5	14472.000	51.90	74.00	-22.10	54.85	-2.95	Peak
6	16884.000	52.34	74.00	-21.66	55.92	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2412MHz  
 Test By :Scott

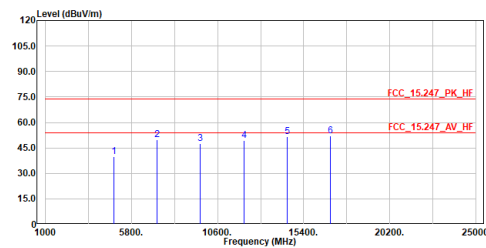

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	39.78	74.00	-34.22	57.61	-17.83	Peak
2	7236.000	49.91	74.00	-24.09	62.64	-12.73	Peak
3	9648.000	47.54	74.00	-26.46	56.60	-9.06	Peak
4	12060.000	49.17	74.00	-24.83	54.94	-5.77	Peak
5	14472.000	51.73	74.00	-22.27	54.68	-2.95	Peak
6	16884.000	52.03	74.00	-21.97	55.61	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

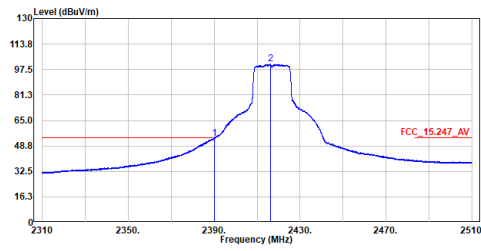

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.980	53.60	54.00	-0.40	43.01	10.59	Average
2	2416.200	100.89	-----	-----	90.19	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

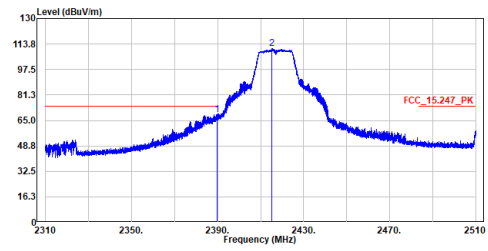

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	68.73	74.00	-5.27	58.14	10.59	Peak
2	2415.200	110.81	-----	-----	100.11	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

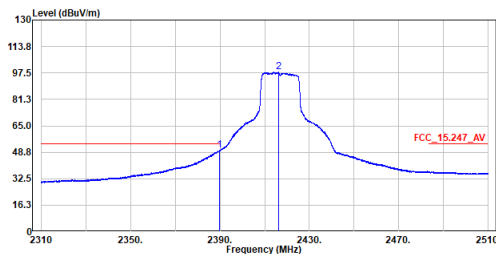

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.840	49.80	54.00	-4.20	39.21	10.59	Average
2	2416.180	97.93	-----	-----	87.23	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

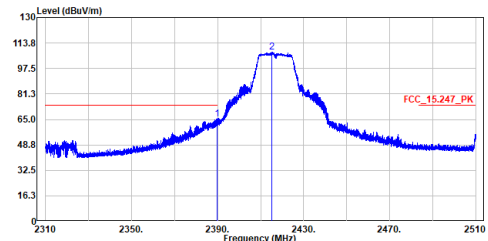

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	65.26	74.00	-8.74	54.67	10.59	Peak
2	2415.260	107.99	-----	-----	97.29	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

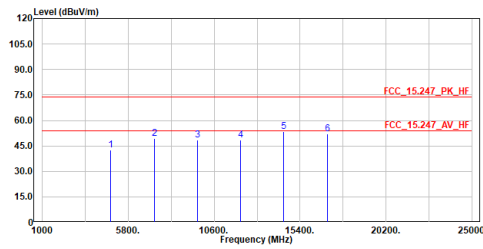

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	42.62	74.00	-31.38	60.42	-17.80	Peak
2	7251.000	49.20	74.00	-24.80	61.91	-12.71	Peak
3	9668.000	48.31	74.00	-25.69	57.35	-9.04	Peak
4	12085.000	48.65	74.00	-25.35	54.39	-5.74	Peak
5	14502.000	53.29	74.00	-20.71	56.21	-2.92	Peak
6	16919.000	52.18	74.00	-21.82	55.78	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2417MHz  
 Test By :Scott

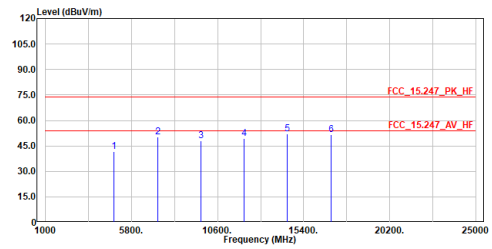

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	41.63	74.00	-32.37	59.43	-17.80	Peak
2	7251.000	50.45	74.00	-23.55	63.16	-12.71	Peak
3	9668.000	47.86	74.00	-26.14	56.90	-9.04	Peak
4	12085.000	49.31	74.00	-24.69	55.05	-5.74	Peak
5	14502.250	52.20	74.00	-21.80	55.12	-2.92	Peak
6	16919.000	51.75	74.00	-22.25	55.35	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

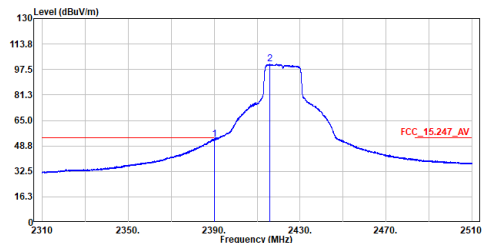

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.980	53.12	54.00	-0.88	42.53	10.59	Average
2	2415.920	100.84	-----	-----	90.14	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

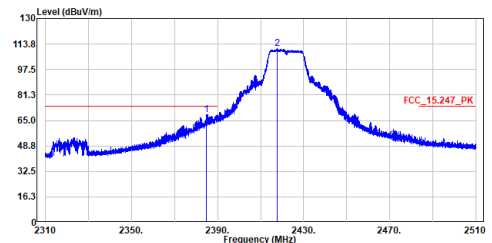

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2384.920	68.66	74.00	-5.34	58.10	10.56	Peak
2	2417.660	110.65	-----	-----	99.95	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

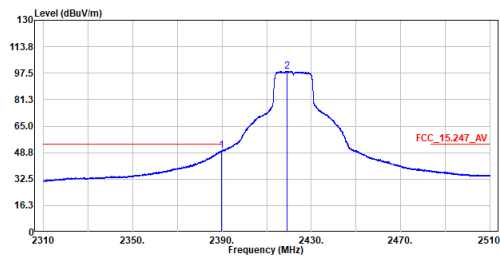


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.760	49.81	54.00	-4.19	39.22	10.59	Average
2	2419.220	98.79	-----	-----	88.08	10.71	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

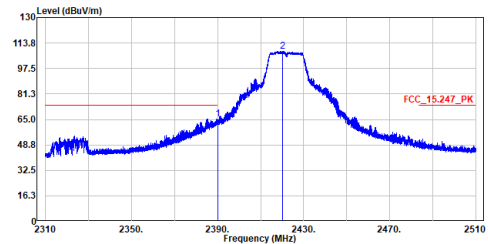


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	65.41	74.00	-8.59	54.82	10.59	Peak
2	2420.180	108.61	-----	-----	97.89	10.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

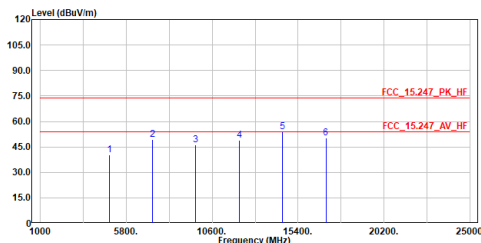


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.20	74.00	-33.80	57.97	-17.77	Peak
2	7266.000	49.23	74.00	-24.77	61.92	-12.69	Peak
3	9688.000	46.26	74.00	-27.74	55.27	-9.01	Peak
4	12110.000	48.89	74.00	-25.11	54.60	-5.71	Peak
5	14532.000	53.97	74.00	-20.03	56.90	-2.93	Peak
6	16954.000	50.18	74.00	-23.82	53.79	-3.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2422MHz  
 Test By :Scott

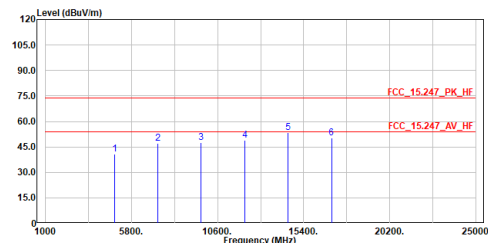


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.66	74.00	-33.34	58.43	-17.77	Peak
2	7266.000	47.16	74.00	-26.84	59.85	-12.69	Peak
3	9688.000	47.68	74.00	-26.32	56.69	-9.01	Peak
4	12110.000	49.12	74.00	-24.88	54.83	-5.71	Peak
5	14532.000	53.42	74.00	-20.58	56.35	-2.93	Peak
6	16954.000	50.21	74.00	-23.79	53.82	-3.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

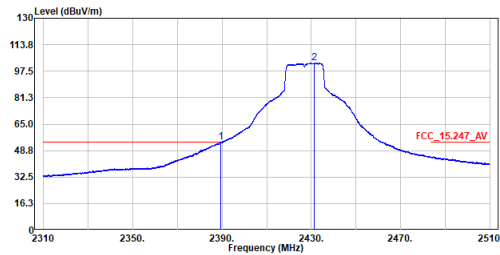

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.340	53.92	54.00	-0.08	43.33	10.59	Average
2	2431.420	102.54	-----	-----	91.77	10.77	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

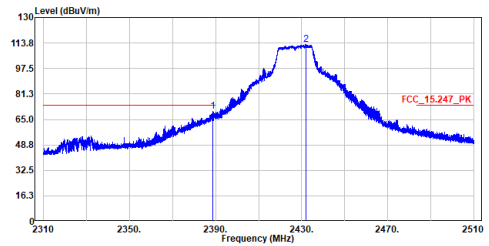

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.720	69.91	74.00	-4.09	59.33	10.58	Peak
2	2432.020	112.73	-----	-----	101.96	10.77	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

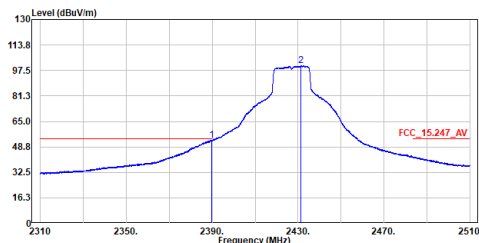

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.640	53.08	54.00	-0.92	42.49	10.59	Average
2	2431.400	100.49	-----	-----	89.72	10.77	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

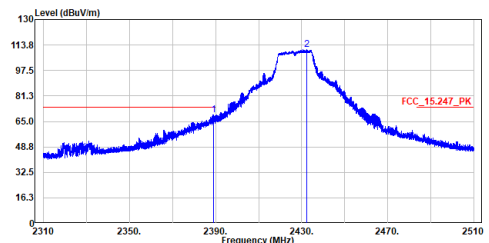

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.980	69.17	74.00	-4.83	58.59	10.58	Peak
2	2432.440	110.95	-----	-----	100.18	10.77	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

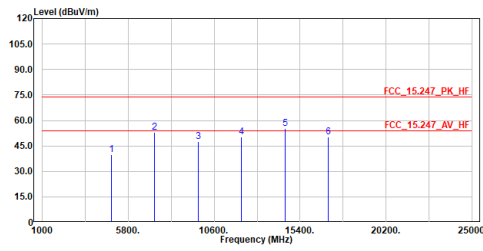

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	39.86	74.00	-34.14	57.60	-17.74	Peak
2	7281.000	52.90	74.00	-21.10	65.57	-12.67	Peak
3	9708.000	47.36	74.00	-26.64	56.33	-8.97	Peak
4	12135.000	50.25	74.00	-23.75	55.93	-5.68	Peak
5	14562.000	55.08	74.00	-18.92	58.03	-2.95	Peak
6	16989.000	50.46	74.00	-23.54	54.10	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2427MHz  
 Test By :Scott

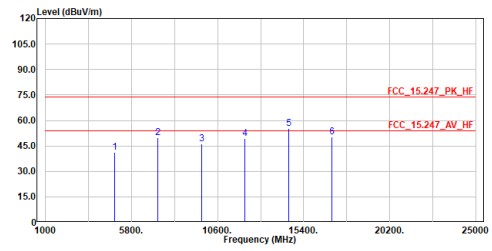

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	41.03	74.00	-32.97	58.77	-17.74	Peak
2	7281.000	49.71	74.00	-24.29	62.38	-12.67	Peak
3	9708.000	46.39	74.00	-27.61	55.36	-8.97	Peak
4	12135.000	49.19	74.00	-24.81	54.87	-5.68	Peak
5	14562.000	55.05	74.00	-18.95	58.00	-2.95	Peak
6	16989.000	50.39	74.00	-23.61	54.03	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

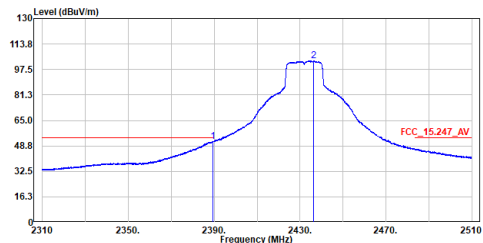

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.280	51.65	54.00	-2.35	41.06	10.59	Average
2	2436.380	102.94	-----	-----	92.15	10.79	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

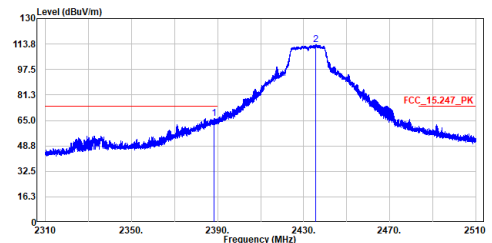

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.440	66.24	74.00	-7.76	55.66	10.58	Peak
2	2435.580	113.30	-----	-----	102.52	10.78	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

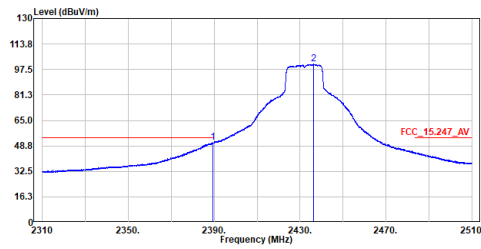

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.440	50.80	54.00	-3.20	40.21	10.59	Average
2	2436.360	100.86	-----	-----	90.07	10.79	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

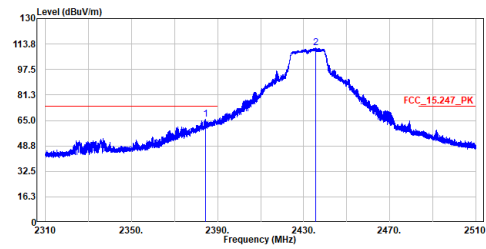

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2384.400	65.78	74.00	-8.22	55.22	10.56	Peak
2	2435.620	111.24	-----	-----	100.46	10.78	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

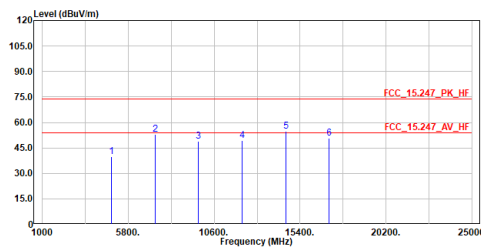

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4864.000	39.91	74.00	-34.09	57.62	-17.71	Peak
2	7290.000	53.11	74.00	-20.89	65.76	-12.65	Peak
3	9728.000	48.79	74.00	-25.21	57.74	-8.95	Peak
4	12160.000	49.28	74.00	-24.72	54.93	-5.65	Peak
5	14591.500	55.01	74.00	-18.99	57.99	-2.98	Peak
6	17024.200	50.62	74.00	-23.38	54.24	-3.62	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2432MHz  
 Test By :Scott

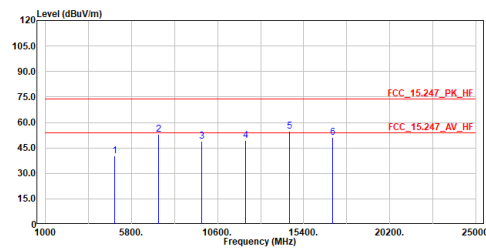

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4864.000	40.44	74.00	-33.56	58.15	-17.71	Peak
2	7291.700	53.01	74.00	-20.99	65.66	-12.65	Peak
3	9728.000	49.03	74.00	-24.97	57.98	-8.95	Peak
4	12160.000	49.38	74.00	-24.62	55.03	-5.65	Peak
5	14591.500	54.95	74.00	-19.05	57.93	-2.98	Peak
6	17024.000	50.98	74.00	-23.02	54.60	-3.62	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

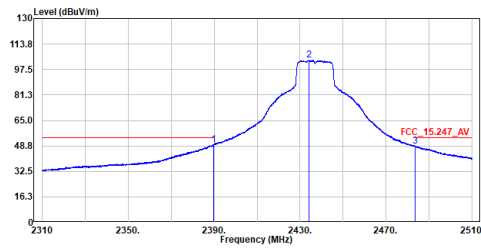

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.860	49.76	54.00	-4.24	39.17	10.59	Average
2	2434.180	103.30	-----	-----	92.52	10.78	Average
3	2483.620	48.62	54.00	-5.38	37.64	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

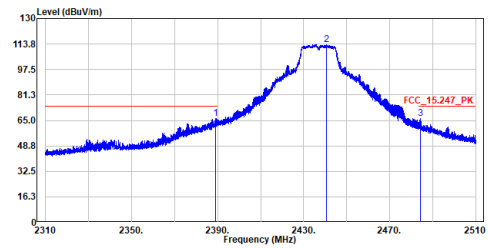

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.100	66.41	74.00	-7.59	55.83	10.58	Peak
2	2440.640	113.34	-----	-----	102.53	10.81	Peak
3	2484.360	66.05	74.00	-7.95	55.05	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

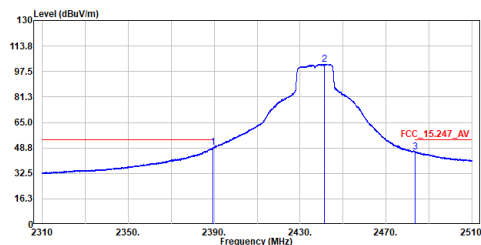

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.500	49.22	54.00	-4.78	38.63	10.59	Average
2	2441.380	102.28	-----	-----	91.47	10.81	Average
3	2483.560	46.15	54.00	-7.85	35.17	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

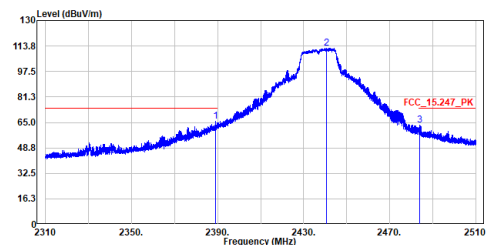

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.140	65.82	74.00	-8.18	55.24	10.58	Peak
2	2440.680	112.55	-----	-----	101.74	10.81	Peak
3	2483.780	63.05	74.00	-10.95	52.06	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

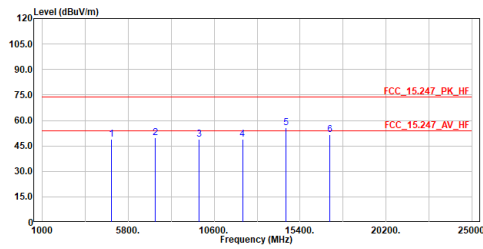

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	48.78	74.00	-25.22	66.45	-17.67	Peak
2	7311.000	49.89	74.00	-24.11	62.51	-12.62	Peak
3	9748.000	48.91	74.00	-25.09	57.84	-8.93	Peak
4	12185.000	48.68	74.00	-25.32	54.29	-5.61	Peak
5	14632.300	55.71	74.00	-18.29	58.71	-3.00	Peak
6	17059.000	51.74	74.00	-22.26	55.31	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2437MHz  
 Test By :Scott

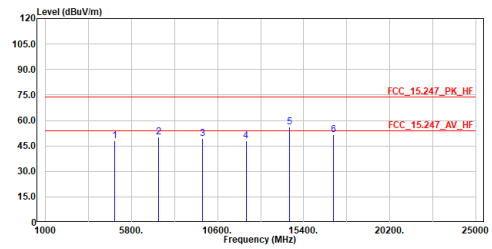

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	48.15	74.00	-25.85	65.82	-17.67	Peak
2	7311.000	50.21	74.00	-23.79	62.83	-12.62	Peak
3	9748.000	49.33	74.00	-24.67	58.26	-8.93	Peak
4	12185.000	48.18	74.00	-25.82	53.79	-5.61	Peak
5	14622.000	56.07	74.00	-17.93	59.07	-3.00	Peak
6	17059.000	51.58	74.00	-22.42	55.15	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

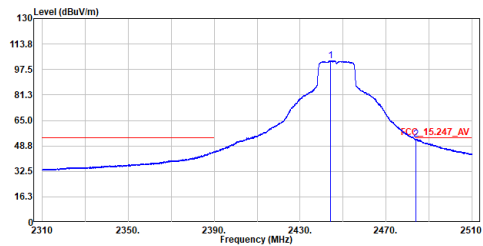

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2444.180	103.07	-----	-----	92.25	10.82	Average
2	2483.880	52.98	54.00	-1.02	41.99	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

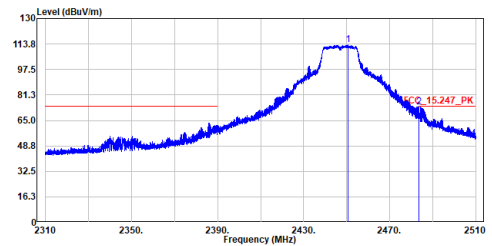

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.640	113.10	-----	-----	102.26	10.84	Peak
2	2483.620	73.68	74.00	-0.32	62.70	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

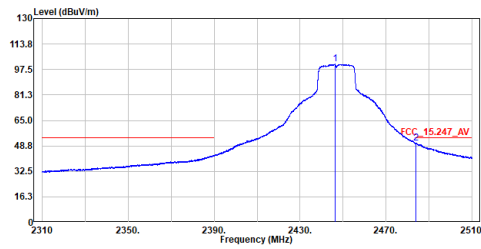

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2446.240	100.82	48.80	52.02	89.99	10.83	Average
2	2484.020	50.47	48.80	1.67	39.48	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

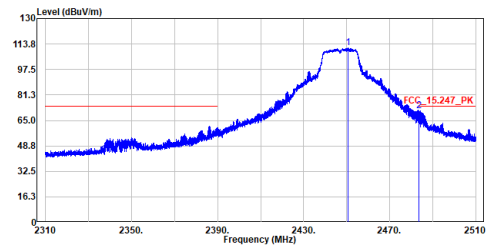

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.620	111.19	48.80	62.39	100.35	10.84	Peak
2	2483.740	71.11	48.80	22.31	60.12	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

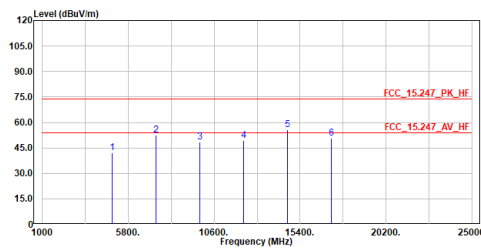

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	41.90	74.00	-32.10	59.52	-17.62	Peak
2	7341.000	52.66	74.00	-21.34	65.24	-12.58	Peak
3	9788.000	48.56	74.00	-25.44	57.43	-8.87	Peak
4	12235.000	49.51	74.00	-24.49	55.06	-5.55	Peak
5	14682.000	55.65	74.00	-18.35	58.69	-3.03	Peak
6	17129.000	50.91	74.00	-23.09	54.38	-3.47	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2447MHz  
 Test By :Scott

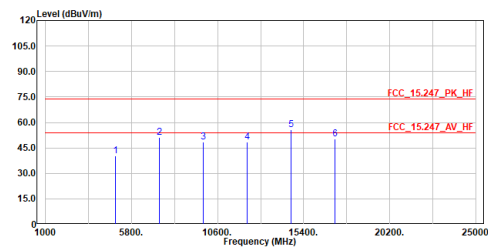

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	40.33	74.00	-33.67	57.95	-17.62	Peak
2	7341.000	51.25	74.00	-22.75	63.83	-12.58	Peak
3	9788.000	48.23	74.00	-25.77	57.10	-8.87	Peak
4	12235.000	48.66	74.00	-25.34	54.21	-5.55	Peak
5	14682.000	55.66	74.00	-18.34	58.69	-3.03	Peak
6	17129.000	50.15	74.00	-23.85	53.62	-3.47	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

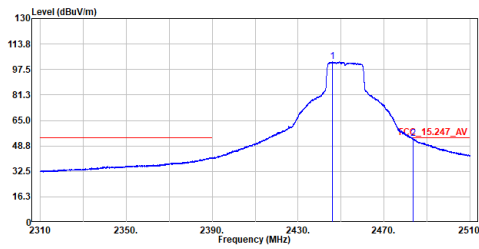

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2445.960	102.34	-----	-----	91.52	10.82	Average
2	2483.520	53.30	54.00	-0.70	42.32	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

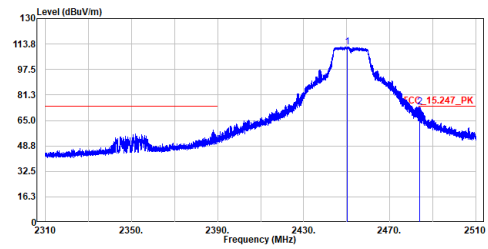

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.180	112.08	-----	-----	101.24	10.84	Peak
2	2483.840	73.77	74.00	-0.23	62.78	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

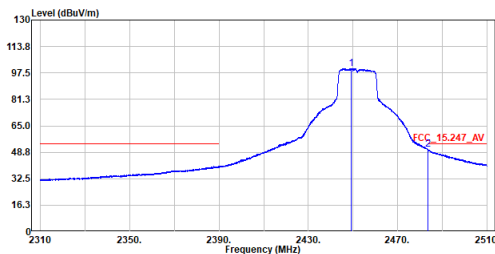

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2449.260	100.18	-----	-----	89.34	10.84	Average
2	2483.600	50.50	54.00	-3.50	39.52	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

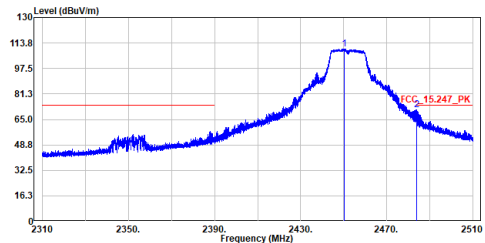

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.260	110.06	-----	-----	99.22	10.84	Peak
2	2483.820	71.12	74.00	-2.88	60.13	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

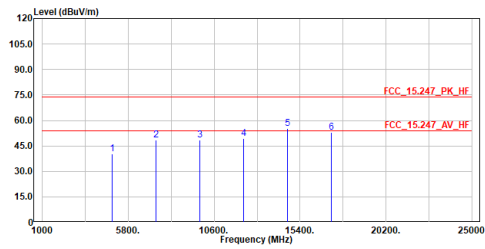

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	40.33	74.00	-33.67	57.91	-17.58	Peak
2	7356.000	48.66	74.00	-25.34	61.21	-12.55	Peak
3	9808.000	48.25	74.00	-25.75	57.08	-8.83	Peak
4	12260.000	49.31	74.00	-24.69	54.84	-5.53	Peak
5	14712.000	55.33	74.00	-18.67	58.37	-3.04	Peak
6	17164.000	53.19	74.00	-20.81	56.61	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2452MHz  
 Test By :Scott

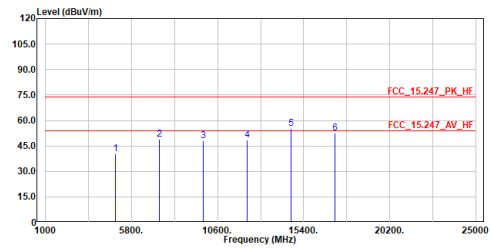

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4904.000	40.31	74.00	-33.69	57.89	-17.58	Peak
2	7356.000	48.91	74.00	-25.09	61.46	-12.55	Peak
3	9808.000	48.15	74.00	-25.85	56.98	-8.83	Peak
4	12260.000	48.66	74.00	-25.34	54.19	-5.53	Peak
5	14712.000	55.11	74.00	-18.89	58.15	-3.04	Peak
6	17164.000	52.69	74.00	-21.31	56.11	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

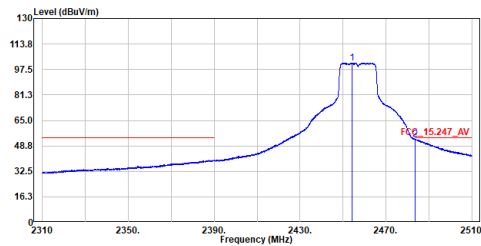

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2454.140	101.74	-----	-----	90.87	10.87	Average
2	2483.520	53.10	54.00	-0.90	42.12	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

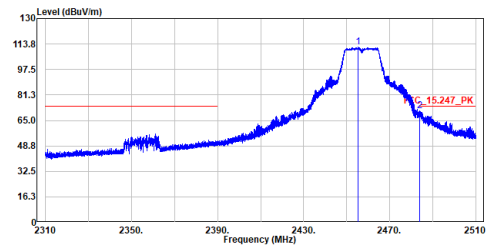


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2455.320	111.74	-----	-----	100.87	10.87	Peak
2	2483.980	71.26	74.00	-2.74	60.27	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

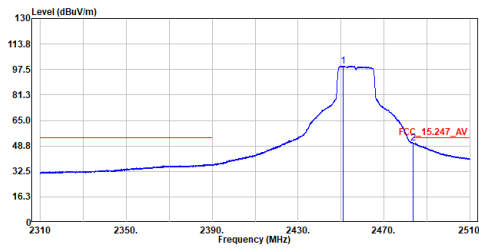

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.940	99.68	-----	-----	88.84	10.84	Average
2	2483.540	50.76	54.00	-3.24	39.78	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

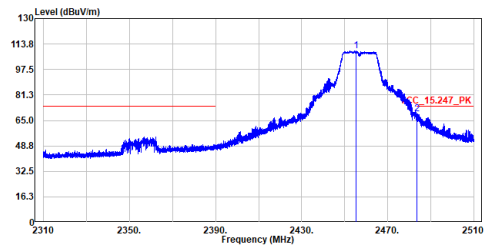

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.220	109.58	-----	-----	98.71	10.87	Peak
2	2483.700	69.32	74.00	-4.68	58.33	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

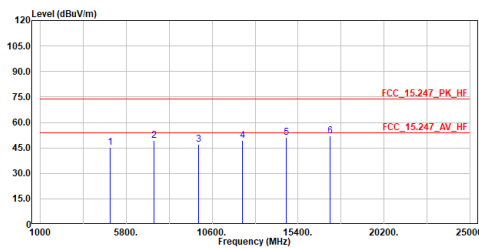

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	45.30	74.00	-28.70	62.86	-17.56	Peak
2	7371.000	49.30	74.00	-24.70	61.83	-12.53	Peak
3	9828.000	47.25	74.00	-26.75	56.07	-8.82	Peak
4	12285.000	49.14	74.00	-24.86	54.63	-5.49	Peak
5	14741.950	51.37	74.00	-22.63	54.45	-3.08	Peak
6	17199.000	52.08	74.00	-21.92	55.45	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2457MHz  
 Test By :Scott

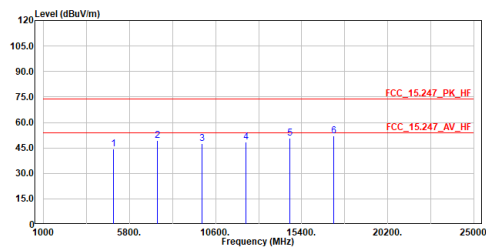

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	44.58	74.00	-29.42	62.14	-17.56	Peak
2	7371.000	49.50	74.00	-24.50	62.03	-12.53	Peak
3	9828.000	47.43	74.00	-26.57	56.25	-8.82	Peak
4	12285.000	48.37	74.00	-25.63	53.86	-5.49	Peak
5	14741.950	50.57	74.00	-23.43	53.65	-3.08	Peak
6	17199.000	51.88	74.00	-22.12	55.25	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

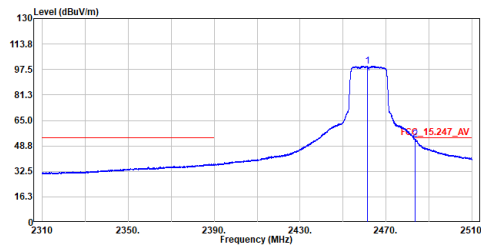

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.300	99.69	-----	-----	88.80	10.89	Average
2	2483.520	53.12	54.00	-0.88	42.14	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

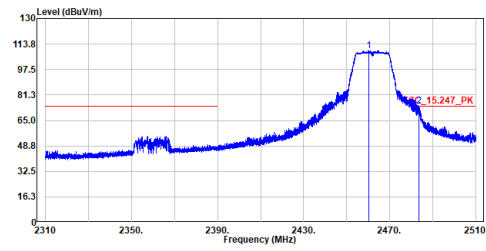

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.300	109.64	-----	-----	98.75	10.89	Peak
2	2483.560	73.91	74.00	-0.09	62.93	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

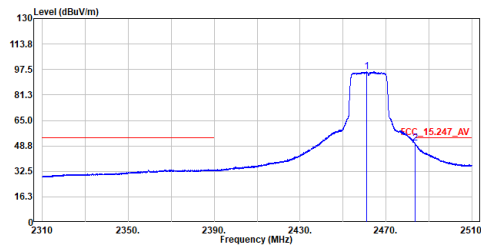

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.000	95.98	-----	-----	85.09	10.89	Average
2	2483.520	50.42	54.00	-3.58	39.44	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

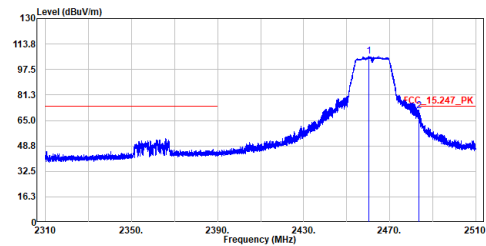

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.300	106.01	-----	-----	95.12	10.89	Peak
2	2483.600	71.15	74.00	-2.85	60.17	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

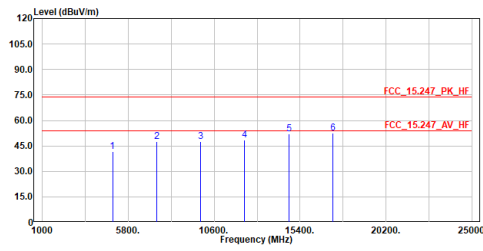

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.46	74.00	-32.54	58.98	-17.52	Peak
2	7386.000	47.51	74.00	-26.49	60.02	-12.51	Peak
3	9848.000	47.51	74.00	-26.49	56.29	-8.78	Peak
4	12310.000	48.65	74.00	-25.35	54.12	-5.47	Peak
5	14772.000	51.98	74.00	-22.02	55.07	-3.09	Peak
6	17234.000	52.59	74.00	-21.41	55.91	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :g\_TX\_2462MHz  
 Test By :Scott

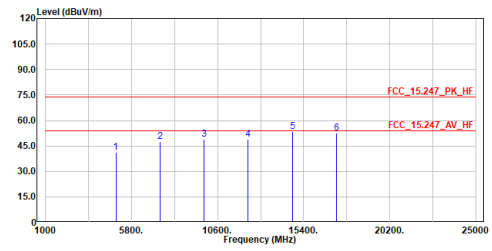

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.36	74.00	-32.64	58.88	-17.52	Peak
2	7386.000	47.36	74.00	-26.64	59.87	-12.51	Peak
3	9848.000	48.71	74.00	-25.29	57.49	-8.78	Peak
4	12310.000	48.68	74.00	-25.32	54.15	-5.47	Peak
5	14772.000	53.25	74.00	-20.75	56.34	-3.09	Peak
6	17234.000	52.56	74.00	-21.44	55.88	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

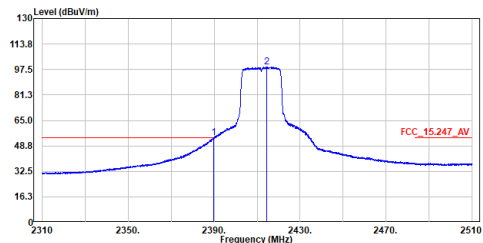

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.920	53.94	54.00	-0.06	43.35	10.59	Average
2	2414.460	99.08	-----	-----	88.39	10.69	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

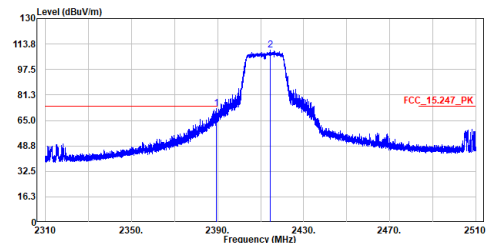

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.320	72.73	74.00	-1.27	62.14	10.59	Peak
2	2414.480	109.95	-----	-----	99.26	10.69	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

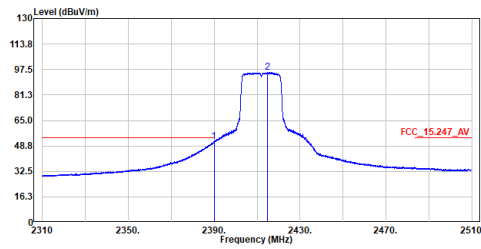

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.960	51.55	54.00	-2.45	40.96	10.59	Average
2	2414.960	95.52	-----	-----	84.82	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

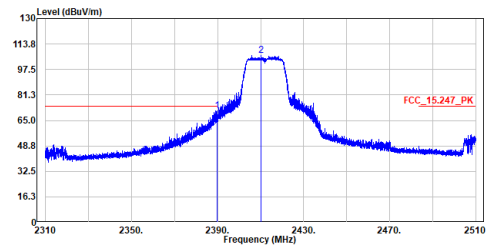

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.840	71.31	74.00	-2.69	60.72	10.59	Peak
2	2410.000	106.46	-----	-----	95.78	10.68	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

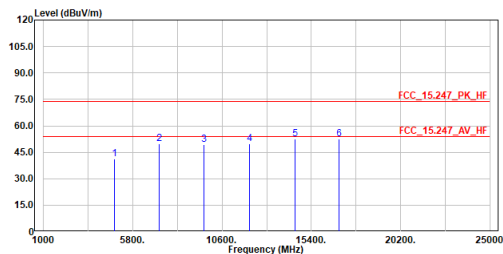

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	41.12	74.00	-32.88	58.95	-17.83	Peak
2	7236.000	49.80	74.00	-24.20	62.53	-12.73	Peak
3	9648.000	49.25	74.00	-24.75	58.31	-9.06	Peak
4	12060.000	49.63	74.00	-24.37	55.40	-5.77	Peak
5	14533.700	52.47	74.00	-21.53	55.40	-2.93	Peak
6	16884.000	52.73	74.00	-21.27	56.31	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2412MHz  
 Test By :Scott

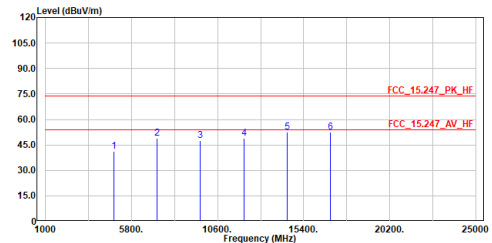

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	41.27	74.00	-32.73	59.10	-17.83	Peak
2	7236.000	48.96	74.00	-25.04	61.69	-12.73	Peak
3	9648.000	47.67	74.00	-26.33	56.73	-9.06	Peak
4	12060.000	49.12	74.00	-24.88	54.89	-5.77	Peak
5	14472.000	52.69	74.00	-21.31	55.64	-2.95	Peak
6	16884.000	52.65	74.00	-21.35	56.23	-3.58	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

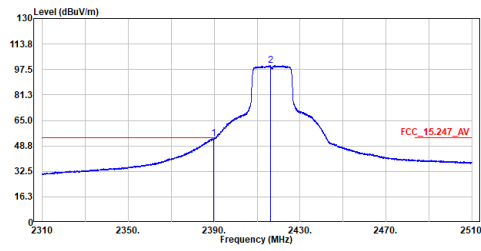

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	53.35	54.00	-0.65	42.76	10.59	Average
2	2416.280	100.09	-----	-----	89.39	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

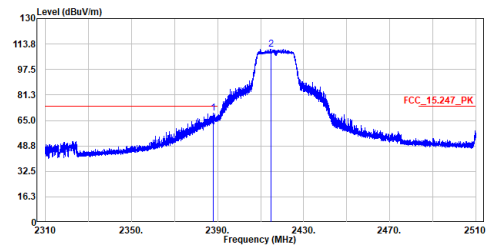

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.020	69.62	74.00	-4.38	59.04	10.58	Peak
2	2414.820	110.24	-----	-----	99.54	10.70	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

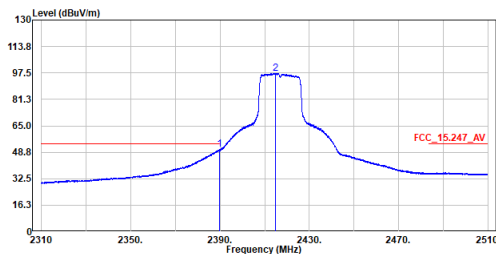

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.820	50.31	54.00	-3.69	39.72	10.59	Average
2	2414.700	97.24	-----	-----	86.54	10.70	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

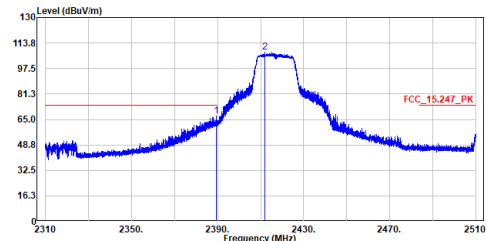

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.320	67.02	74.00	-6.98	56.43	10.59	Peak
2	2411.940	108.09	-----	-----	97.41	10.68	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

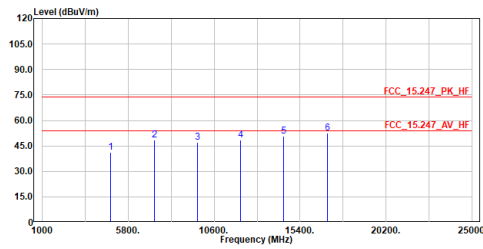

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	41.37	74.00	-32.63	59.17	-17.80	Peak
2	7251.000	48.47	74.00	-25.53	61.18	-12.71	Peak
3	9668.000	47.09	74.00	-26.91	56.13	-9.04	Peak
4	12885.000	48.47	74.00	-25.53	54.21	-5.74	Peak
5	14502.250	50.85	74.00	-23.15	53.77	-2.92	Peak
6	16919.000	52.73	74.00	-21.27	56.33	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2417MHz  
 Test By :Scott

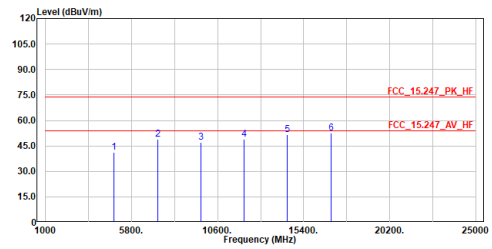

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	41.05	74.00	-32.95	58.85	-17.80	Peak
2	7251.000	48.89	74.00	-25.11	61.60	-12.71	Peak
3	9668.000	47.13	74.00	-26.87	56.17	-9.04	Peak
4	12885.000	48.82	74.00	-25.18	54.56	-5.74	Peak
5	14502.250	51.71	74.00	-22.29	54.63	-2.92	Peak
6	16919.000	52.65	74.00	-21.35	56.25	-3.60	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

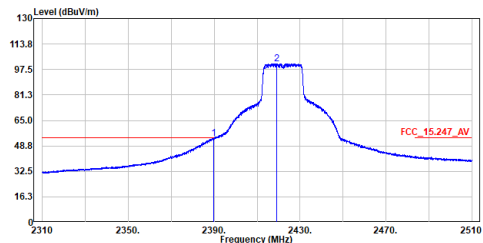

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	53.67	54.00	-0.33	43.08	10.59	Average
2	2418.980	101.26	-----	-----	90.55	10.71	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

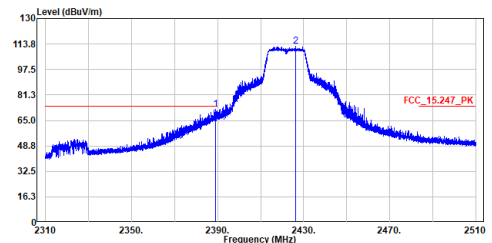

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.120	72.15	74.00	-1.85	61.57	10.58	Peak
2	2426.420	112.13	-----	-----	101.39	10.74	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

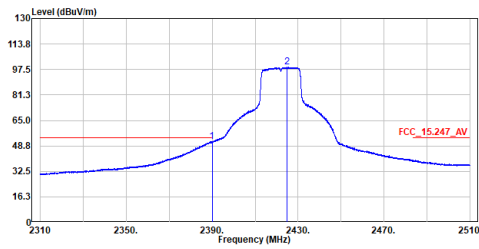

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.960	51.52	54.00	-2.48	40.93	10.59	Average
2	2425.000	98.89	-----	-----	88.16	10.73	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

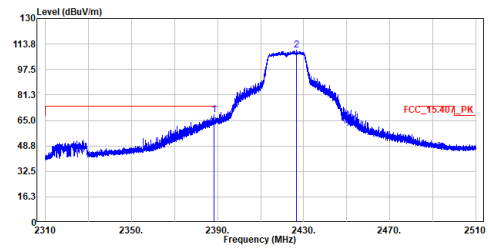

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.400	68.82	74.00	-5.18	58.24	10.58	Peak
2	2426.760	109.90	-----	-----	99.16	10.74	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

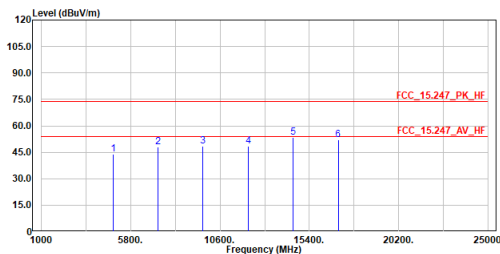

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	43.82	74.00	-30.18	61.59	-17.77	Peak
2	7266.000	48.07	74.00	-25.93	60.76	-12.69	Peak
3	9688.000	48.42	74.00	-25.58	57.43	-9.01	Peak
4	12110.000	48.45	74.00	-25.55	54.16	-5.71	Peak
5	14532.000	53.41	74.00	-20.59	56.34	-2.93	Peak
6	16954.000	52.09	74.00	-21.91	55.70	-3.61	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2422MHz  
 Test By :Scott

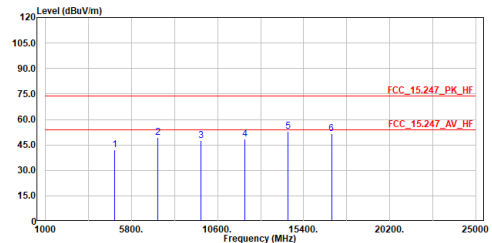

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	42.10	74.00	-31.90	59.87	-17.77	Peak
2	7266.000	49.49	74.00	-24.51	62.18	-12.69	Peak
3	9688.000	47.68	74.00	-26.32	56.69	-9.01	Peak
4	12110.000	48.39	74.00	-25.61	54.10	-5.71	Peak
5	14532.000	52.95	74.00	-21.05	55.88	-2.93	Peak
6	16954.000	51.61	74.00	-22.39	55.22	-3.61	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

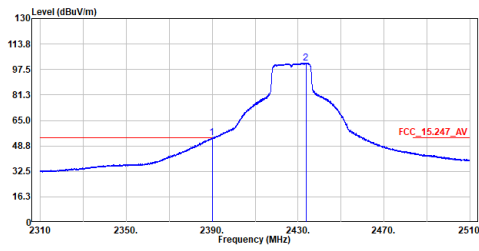

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.960	53.76	54.00	-0.24	43.17	10.59	Average
2	2433.640	101.76	-----	-----	90.98	10.78	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

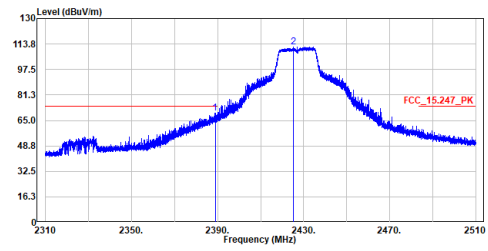

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.800	69.73	74.00	-4.27	59.15	10.58	Peak
2	2425.140	111.81	-----	-----	101.07	10.74	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

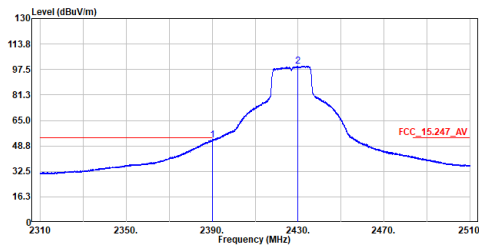

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.34	54.00	-1.66	41.75	10.59	Average
2	2429.940	99.56	-----	-----	88.80	10.76	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

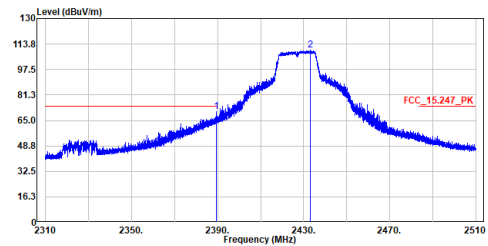


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	70.73	74.00	-3.27	60.14	10.59	Peak
2	2433.040	109.71	-----	-----	98.94	10.77	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.




Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

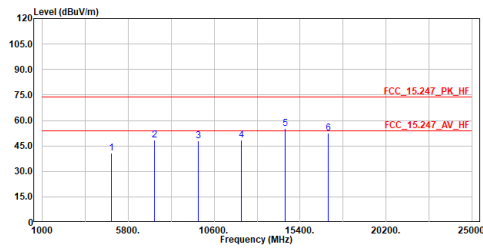

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	40.68	74.00	-33.32	58.42	-17.74	Peak
2	7281.000	48.28	74.00	-25.72	60.95	-12.67	Peak
3	9708.000	47.93	74.00	-26.07	56.90	-8.97	Peak
4	12135.000	48.50	74.00	-25.50	54.18	-5.68	Peak
5	14562.000	55.39	74.00	-18.61	58.34	-2.95	Peak
6	16989.000	52.35	74.00	-21.65	55.99	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2427MHz  
 Test By :Scott

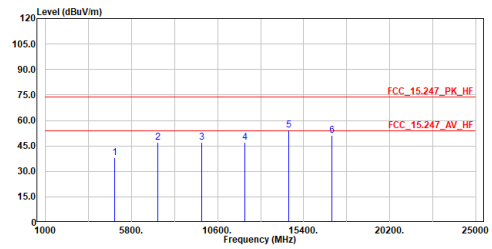

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	38.03	74.00	-35.97	55.77	-17.74	Peak
2	7281.000	47.31	74.00	-26.69	59.98	-12.67	Peak
3	9708.000	46.96	74.00	-27.04	55.93	-8.97	Peak
4	12135.000	47.09	74.00	-26.91	52.77	-5.68	Peak
5	14562.000	54.22	74.00	-19.78	57.17	-2.95	Peak
6	16989.000	51.33	74.00	-22.67	54.97	-3.64	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

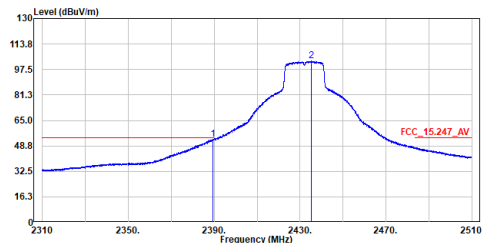

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.580	53.22	54.00	-0.78	42.63	10.59	Average
2	2435.340	102.86	-----	-----	92.08	10.78	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

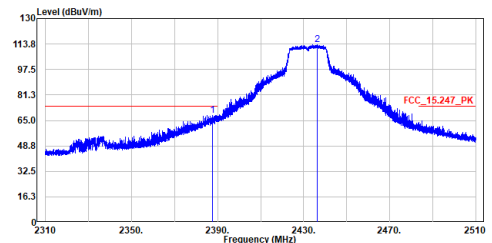

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.780	68.35	74.00	-5.65	57.77	10.58	Peak
2	2436.300	113.29	-----	-----	102.50	10.79	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

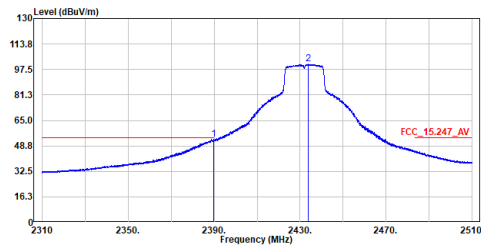

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.920	52.83	54.00	-1.17	42.24	10.59	Average
2	2433.760	100.94	-----	-----	90.16	10.78	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

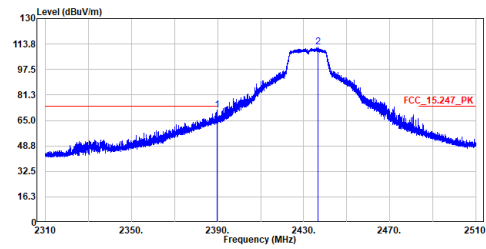

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.760	71.81	74.00	-2.19	61.22	10.59	Peak
2	2436.640	111.93	-----	-----	101.14	10.79	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

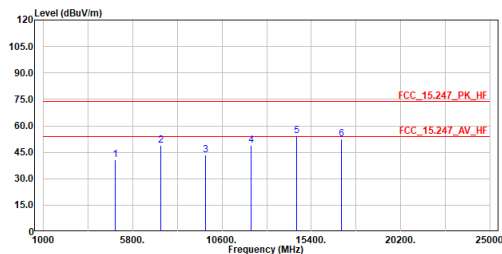

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4864.000	40.65	74.00	-33.35	58.36	-17.71	Peak
2	7296.000	48.76	74.00	-25.24	61.40	-12.64	Peak
3	9728.000	43.48	74.00	-30.52	52.43	-8.95	Peak
4	12160.000	48.96	74.00	-25.04	54.61	-5.65	Peak
5	14592.000	54.33	74.00	-19.67	57.31	-2.98	Peak
6	17024.000	52.35	74.00	-21.65	55.97	-3.62	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2432MHz  
 Test By :Scott

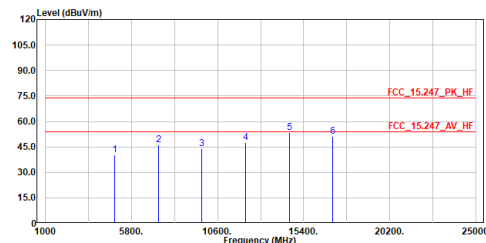

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4864.000	40.23	74.00	-33.77	57.94	-17.71	Peak
2	7296.000	46.06	74.00	-27.94	58.70	-12.64	Peak
3	9728.000	44.02	74.00	-29.98	52.97	-8.95	Peak
4	12160.000	47.56	74.00	-26.44	53.21	-5.65	Peak
5	14592.000	53.33	74.00	-20.67	56.31	-2.98	Peak
6	17024.000	51.31	74.00	-22.69	54.93	-3.62	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

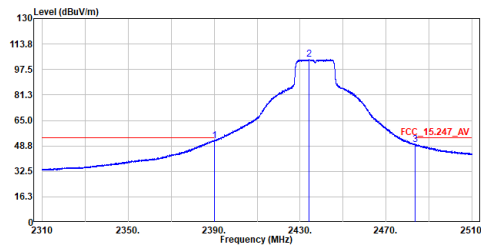

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.07	54.00	-1.93	41.48	10.59	Average
2	2434.200	103.93	-----	-----	93.15	10.78	Average
3	2483.500	49.49	54.00	-4.51	38.51	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

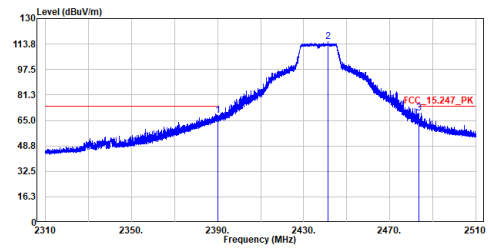

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	68.36	74.00	-5.64	57.77	10.59	Peak
2	2441.220	115.25	-----	-----	104.44	10.81	Peak
3	2483.680	69.61	74.00	-4.39	58.63	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

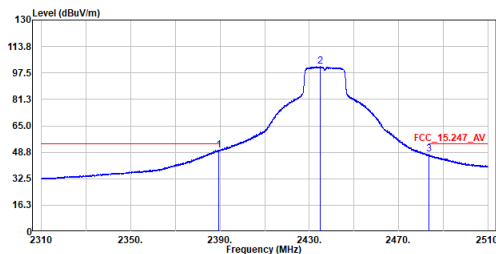

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.480	50.08	54.00	-3.92	39.49	10.59	Average
2	2434.800	101.37	-----	-----	90.59	10.78	Average
3	2483.740	47.43	54.00	-6.57	36.44	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

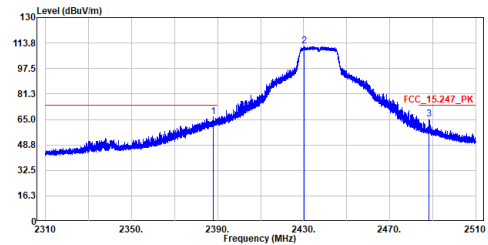

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.900	66.91	74.00	-7.09	56.33	10.58	Peak
2	2430.140	111.82	-----	-----	101.06	10.76	Peak
3	2488.400	65.20	74.00	-8.80	54.19	11.01	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

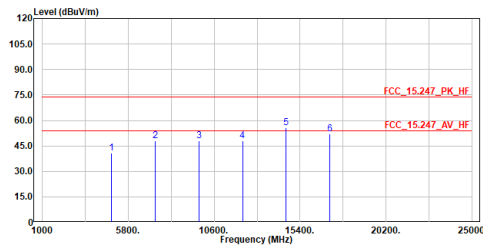

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.56	74.00	-33.44	58.23	-17.67	Peak
2	7311.000	48.06	74.00	-25.94	60.68	-12.62	Peak
3	9748.000	47.79	74.00	-26.21	56.72	-8.93	Peak
4	12185.000	47.91	74.00	-26.09	53.52	-5.61	Peak
5	14622.000	55.72	74.00	-18.28	58.72	-3.00	Peak
6	17059.000	52.04	74.00	-21.96	55.61	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2437MHz  
 Test By :Scott

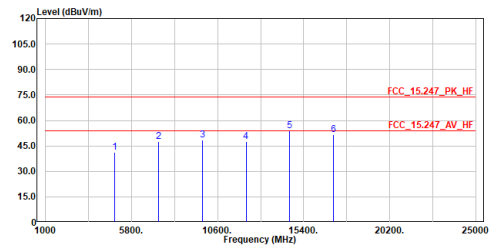

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	41.38	74.00	-32.62	59.05	-17.67	Peak
2	7311.000	47.62	74.00	-26.38	60.24	-12.62	Peak
3	9748.000	48.40	74.00	-25.60	57.33	-8.93	Peak
4	12185.000	47.77	74.00	-26.23	53.38	-5.61	Peak
5	14622.000	54.07	74.00	-19.93	57.07	-3.00	Peak
6	17059.000	51.79	74.00	-22.21	55.36	-3.57	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

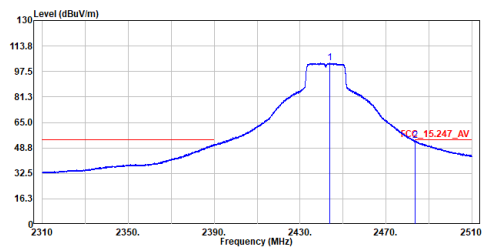

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2443.700	103.00	-----	-----	92.18	10.82	Average
2	2483.520	53.33	54.00	-0.67	42.35	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

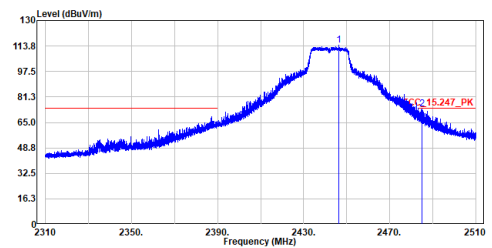

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2446.220	114.09	-----	-----	103.26	10.83	Peak
2	2484.920	73.81	74.00	-0.19	62.81	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

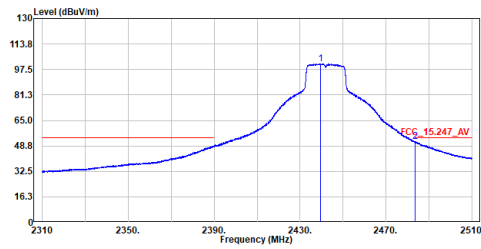

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2439.560	101.05	-----	-----	90.26	10.79	Average
2	2483.660	51.46	54.00	-2.54	40.48	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

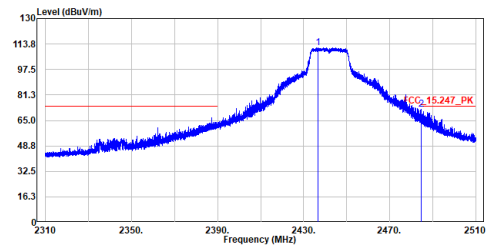

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2436.720	111.53	-----	-----	100.74	10.79	Peak
2	2484.500	71.98	74.00	-2.02	60.98	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

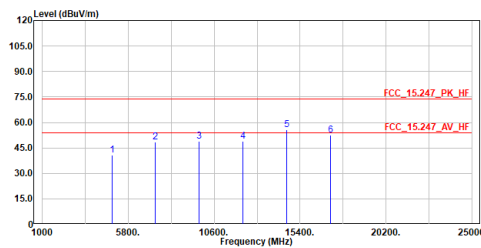

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4884.000	40.55	74.00	-33.45	58.20	-17.65	Peak
2	7326.000	48.31	74.00	-25.69	60.91	-12.60	Peak
3	9768.000	48.80	74.00	-25.20	57.70	-8.90	Peak
4	12210.000	48.77	74.00	-25.23	54.36	-5.59	Peak
5	14652.700	55.71	74.00	-18.29	58.72	-3.01	Peak
6	17894.000	52.58	74.00	-21.42	56.09	-3.51	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2442MHz  
 Test By :Scott

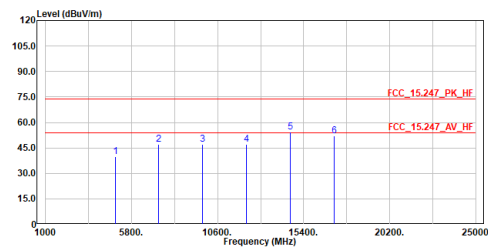

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4884.000	39.84	74.00	-34.16	57.49	-17.65	Peak
2	7326.000	47.12	74.00	-26.88	59.72	-12.60	Peak
3	9768.000	47.27	74.00	-26.73	56.17	-8.90	Peak
4	12210.000	47.25	74.00	-26.75	52.84	-5.59	Peak
5	14652.700	54.50	74.00	-19.50	57.51	-3.01	Peak
6	17893.900	52.15	74.00	-21.85	55.66	-3.51	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

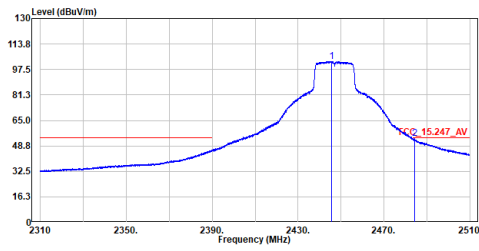

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2445.620	102.68	-----	-----	91.86	10.82	Average
2	2484.380	53.25	54.00	-0.75	42.25	11.00	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

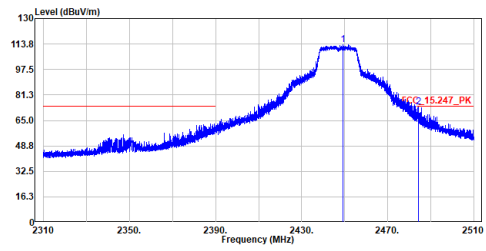

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2449.200	113.41	-----	-----	102.57	10.84	Peak
2	2484.220	73.61	74.00	-0.39	62.61	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

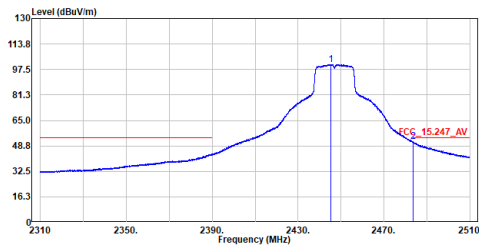

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2445.420	100.65	-----	-----	89.83	10.82	Average
2	2483.520	51.28	54.00	-2.72	40.30	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

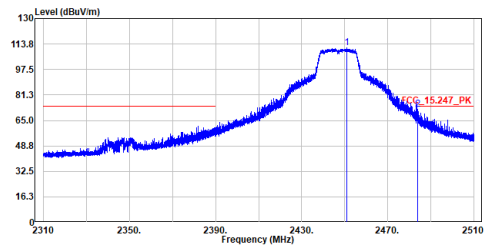

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.900	111.48	-----	-----	100.64	10.84	Peak
2	2484.020	72.28	74.00	-1.72	61.29	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

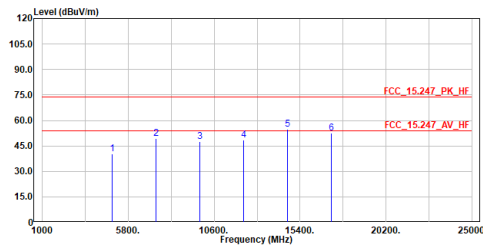

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	40.39	74.00	-33.61	58.01	-17.62	Peak
2	7341.000	49.38	74.00	-24.62	61.96	-12.58	Peak
3	9788.000	47.53	74.00	-26.47	56.40	-8.87	Peak
4	12235.000	48.58	74.00	-25.42	54.13	-5.55	Peak
5	14682.000	54.59	74.00	-19.41	57.62	-3.03	Peak
6	17129.600	52.60	74.00	-21.40	56.07	-3.47	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2447MHz  
 Test By :Scott

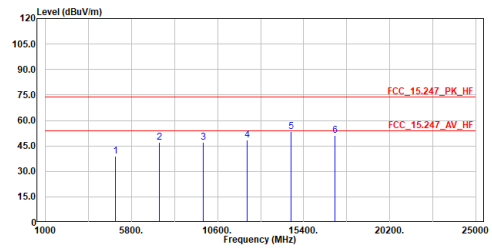

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	39.00	74.00	-35.00	56.62	-17.62	Peak
2	7341.000	47.13	74.00	-26.87	59.71	-12.58	Peak
3	9788.000	47.19	74.00	-26.81	56.06	-8.87	Peak
4	12235.000	48.52	74.00	-25.48	54.07	-5.55	Peak
5	14681.600	53.52	74.00	-20.48	56.55	-3.03	Peak
6	17129.000	51.25	74.00	-22.75	54.72	-3.47	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

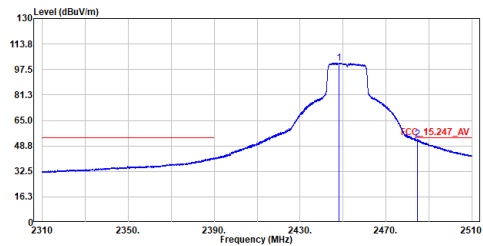

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2448.040	101.74	-----	-----	90.90	10.84	Average
2	2484.580	53.11	54.00	-0.89	42.11	11.00	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

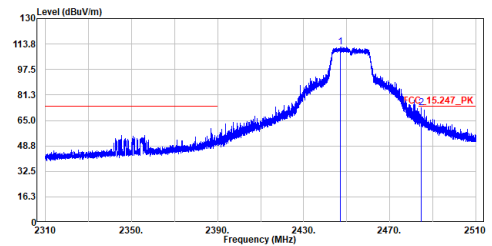

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2447.040	112.09	-----	-----	101.26	10.83	Peak
2	2484.680	72.91	74.00	-1.09	61.91	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

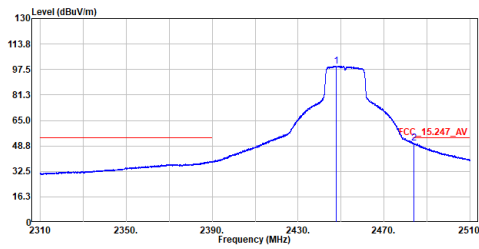

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2447.780	99.66	48.80	50.86	88.82	10.84	Average
2	2483.820	50.76	54.00	-3.24	39.77	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

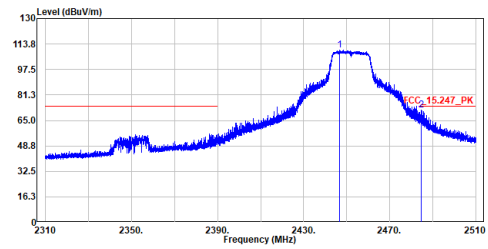

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2446.660	109.95	65.00	44.95	99.12	10.83	Peak
2	2484.500	71.61	74.00	-2.39	60.61	11.00	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

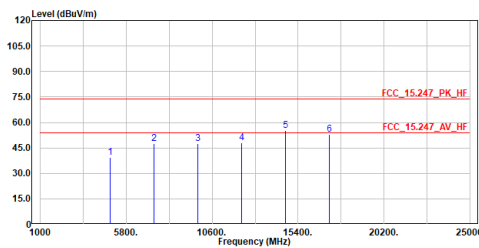

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	39.55	74.00	-34.45	57.13	-17.58	Peak
2	7356.000	47.58	74.00	-26.42	60.13	-12.55	Peak
3	9808.000	47.74	74.00	-26.26	56.57	-8.83	Peak
4	12260.000	47.97	74.00	-26.03	53.50	-5.53	Peak
5	14712.000	55.11	74.00	-18.89	58.15	-3.04	Peak
6	17163.600	52.96	74.00	-21.04	56.38	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2452MHz  
 Test By :Scott

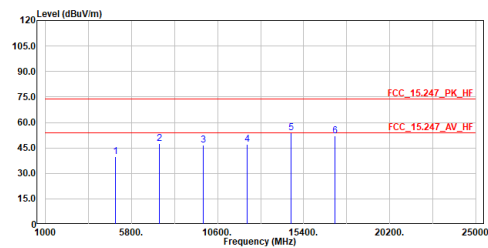


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	40.03	74.00	-33.97	57.61	-17.58	Peak
2	7356.000	47.58	74.00	-26.42	60.13	-12.55	Peak
3	9808.000	46.74	74.00	-27.26	55.57	-8.83	Peak
4	12260.000	46.97	74.00	-27.03	52.50	-5.53	Peak
5	14712.000	54.11	74.00	-19.89	57.15	-3.04	Peak
6	17164.000	51.96	74.00	-22.04	55.38	-3.42	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.



Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

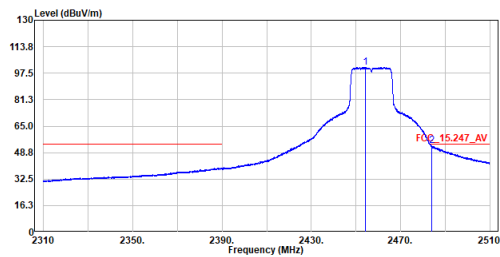


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2454.180	100.99	54.00	-0.93	90.12	10.87	Average
2	2483.840	53.07	54.00	-0.93	42.08	10.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

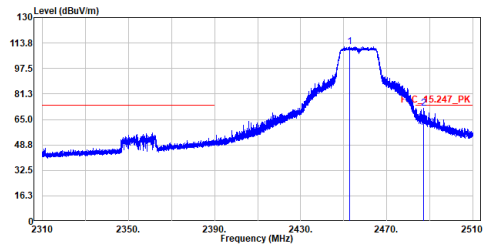


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2452.760	111.50	74.00	-1.83	100.64	10.86	Peak
2	2487.040	72.17	74.00	-1.83	61.16	11.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

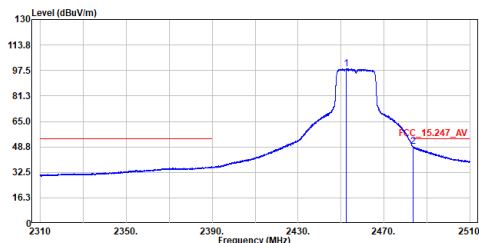


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2452.600	98.58	54.00	-5.10	87.72	10.86	Average
2	2483.620	48.90	54.00	-5.10	37.92	10.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

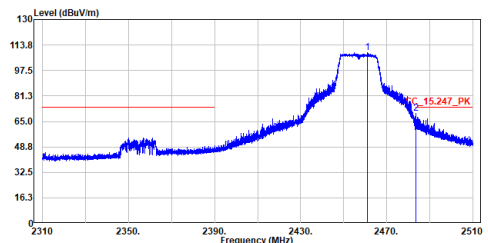


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.040	109.06	74.00	-3.67	98.17	10.89	Peak
2	2483.520	70.33	74.00	-3.67	59.35	10.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

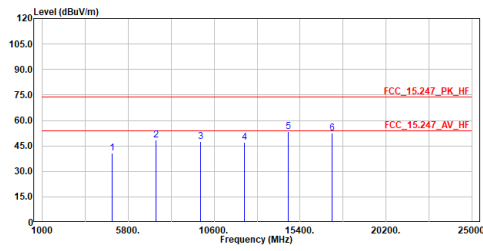

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.78	74.00	-33.22	58.34	-17.56	Peak
2	7371.000	48.58	74.00	-25.42	61.11	-12.53	Peak
3	9828.000	47.50	74.00	-26.50	56.32	-8.82	Peak
4	12285.000	47.19	74.00	-26.81	52.68	-5.49	Peak
5	14742.000	53.62	74.00	-20.38	56.70	-3.08	Peak
6	17199.000	52.73	74.00	-21.27	56.10	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2457MHz  
 Test By :Scott

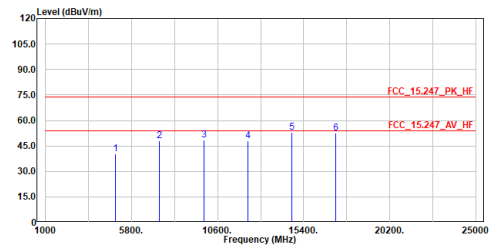

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.16	74.00	-33.84	57.72	-17.56	Peak
2	7371.000	47.88	74.00	-26.12	60.41	-12.53	Peak
3	9828.000	48.30	74.00	-25.70	57.12	-8.82	Peak
4	12285.000	47.83	74.00	-26.17	53.32	-5.49	Peak
5	14742.000	52.81	74.00	-21.19	55.89	-3.08	Peak
6	17199.000	52.54	74.00	-21.46	55.91	-3.37	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

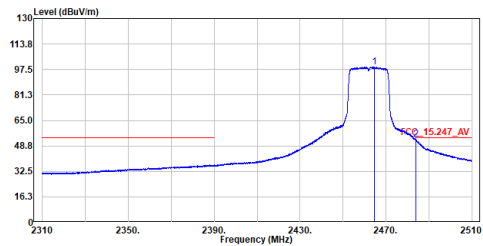

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2464.460	99.13	-----	-----	88.22	10.91	Average
2	2483.840	53.12	54.00	-0.88	42.13	10.99	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

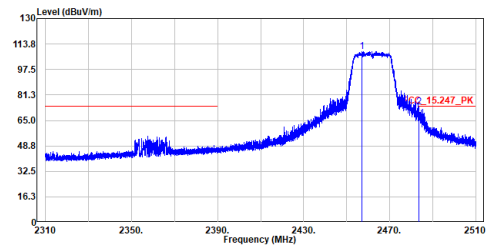

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2457.000	108.96	-----	-----	98.09	10.87	Peak
2	2483.500	73.48	74.00	-0.52	62.50	10.98	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

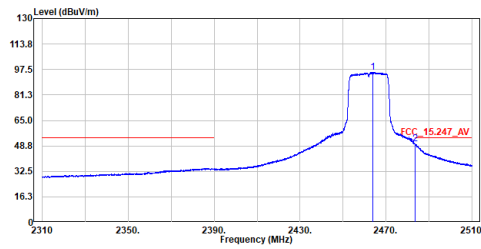

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.768	95.65	48.80	46.85	84.75	10.90	Average
2	2483.620	50.13	48.80	1.33	39.15	10.98	Average

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

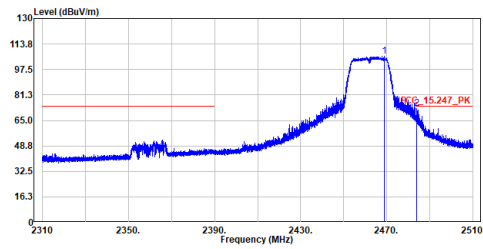

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2468.900	105.97	65.00	40.97	95.05	10.92	Peak
2	2483.820	72.58	65.00	7.58	61.59	10.99	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.


Site :HC-CB04  
 Condition :3m ,Horizontal  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

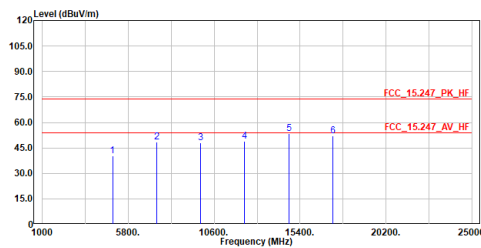

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.10	74.00	-33.90	57.62	-17.52	Peak
2	7386.000	48.35	74.00	-25.65	60.86	-12.51	Peak
3	9848.000	47.93	74.00	-26.07	56.71	-8.78	Peak
4	12310.000	48.70	74.00	-25.30	54.17	-5.47	Peak
5	14772.000	53.47	74.00	-20.53	56.56	-3.09	Peak
6	17234.000	52.25	74.00	-21.75	55.57	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

Site :HC-CB04  
 Condition :3m ,Vertical  
 Mode :n20\_TX\_2462MHz  
 Test By :Scott

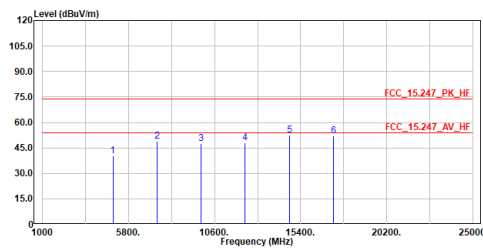


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.39	74.00	-33.61	57.91	-17.52	Peak
2	7386.000	49.05	74.00	-24.95	61.56	-12.51	Peak
3	9848.000	47.34	74.00	-26.66	56.12	-8.78	Peak
4	12310.000	48.22	74.00	-25.78	53.69	-5.47	Peak
5	14772.000	52.42	74.00	-21.58	55.51	-3.09	Peak
6	17234.000	52.07	74.00	-21.93	55.39	-3.32	Peak

Note:  
 1. Level = Read Level + Factor  
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
 3. Over Limit = Level - Limit Line  
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.  
 5. The other emission levels were very low against the limit.

## Appendix F. Test Result of Radiated Emissions Co-location

### WiFi 2.4 GHz + ISM LATAM Band 902~928 MHz 30 MHz ~ 1 GHz:

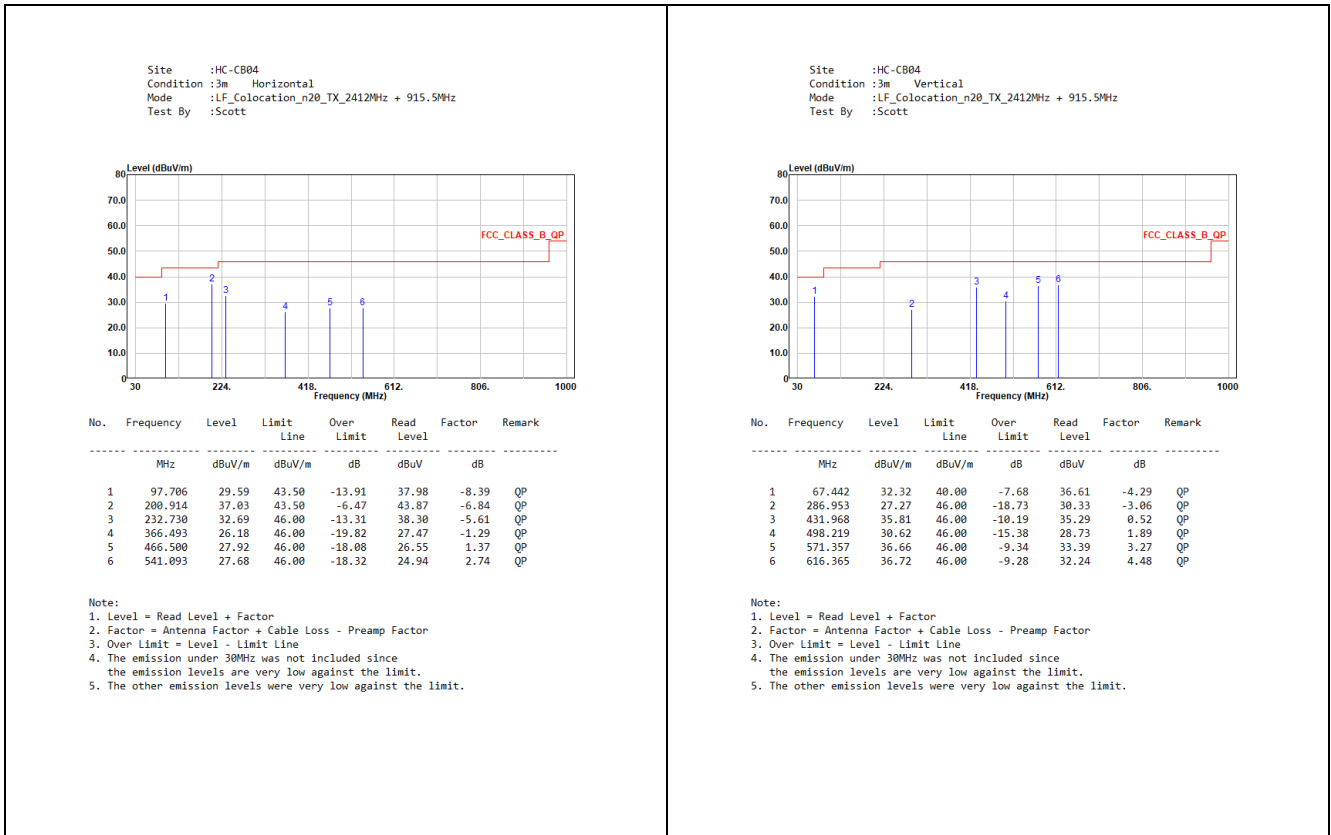

### Above 1 GHz:

