



Test Report No:
23A0395R-RFUSV01S-A

TEST REPORT FCC Rules&Regulations

Product Name	Guardvision Outdoor
Brand Name	Verisure
Model No.	GWL-MD-PIR
FCC ID	2A93W-GWL-MD-PIR
Applicant's Name / Address	Verisure Sarl chemin Jean-Baptiste Vandelle 3 Versoix Switzerland 1290
Manufacturer's Name / Address	Verisure Sarl chemin Jean-Baptiste Vandelle 3 Versoix Switzerland 1290
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By	<i>Hailey Peng</i> Hailey Peng
Approved By	<i>Rueyyan Lin</i> Rueyyan Lin
Date of Receipt	Oct. 17, 2023
Date of Issue	Feb. 02, 2024
Report Version	V3.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions.....	4
Revision History.....	5
Summary of Test Result.....	6
Comments and Remarks.....	6
1. General Information.....	7
1.1. EUT Description.....	7
1.2. EUT Information.....	7
1.3. Testing Applied Standards.....	7
1.4. Testing Location Information.....	8
1.5. Measurement Uncertainty.....	8
1.6. List of Test Equipment.....	9
2. Test Configuration of EUT.....	10
2.1. Test Condition.....	10
2.2. Test Frequency Mode.....	10
2.3. Duty Cycle.....	11
2.4. The Worst Case Measurement Configuration.....	12
2.5. Tested System Details.....	13
2.6. Configuration of Tested System.....	13
3. Occupied Bandwidth & DTS Bandwidth.....	14
3.1. Test Setup.....	14
3.2. Test Limit.....	14
3.3. Test Procedures.....	14
3.4. Test Result of Occupied Bandwidth & DTS Bandwidth.....	14
4. Maximum Conducted Output Power.....	15
4.1. Test Setup.....	15
4.2. Test Limit.....	15
4.3. Test Procedures.....	15
4.4. Test Result of Maximum Conducted Output Power.....	15
5. Maximum Power Spectral Density.....	16
5.1. Test Setup.....	16
5.2. Test Limit.....	16
5.3. Test Procedures.....	16
5.4. Test Result of Maximum Power Spectral Density.....	16
6. Antenna Port Conducted Emission.....	17
6.1. Test Setup.....	17

6.2.	Test Limit	17
6.3.	Test Procedure	17
6.4.	Test Result of Antenna Port Conducted Emission	17
7.	Transmitter Radiated Spurious Emission	18
7.1.	Test Setup	18
7.2.	Test Limit	19
7.3.	Test Procedure	19
7.4.	Test Result of Transmitter Radiated Spurious Emission	19
Appendix A. Test Result of Occupied Bandwidth & DTS Bandwidth		
Appendix B. Test Result of Maximum Conducted Output Power		
Appendix C. Test Result of Maximum Power Spectral Density		
Appendix D. Test Result of Antenna Port Conducted Emission		
Appendix E. Test Result of Transmitter Radiated Spurious Emission		
Appendix F. Test Result of Radiated Emissions Co-location		
Appendix G. Test Setup Photograph		

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report.	Dec. 25, 2023
V2.0	Adding the test frequency description for test mode of radiated emission co-location.	Jan. 29, 2024
V3.0	Adding the annotate the options in the report regarding the duty cycle.	Feb. 02, 2024

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
-	AC Power Line Conducted Emission	N/A	Note
3	Occupied Bandwidth & DTS Bandwidth	PASS	-
4	Maximum Conducted Output Power	PASS	-
5	Maximum Power Spectral Density	PASS	-
6	Antenna Port Conducted Emission	PASS	-
7	Transmitter Radiated Spurious Emission	PASS	-

Note: The EUT was powered by DC voltage (AA Battery*6). It's not necessary to apply to AC Power Line Conducted Emission test.

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz	
Operating Frequency	IEEE 802.11b/g IEEE 802.11n (20 MHz)	2412 ~ 2462 MHz
Channel Number	IEEE 802.11b/g IEEE 802.11n (20 MHz)	11 Channels
Type of Modulation	IEEE 802.11b	DSSS-DBPSK, DQPSK, CCK
	IEEE 802.11g/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
Hardware Version	1A	
Software Version	2.22.6	

Antenna Information				
Ant.	Brand Name	Model No.	Type	Gain (dBi)
0	Arlo Technologies	PCB Printed WiFi antenna	PIFA	3.5

1.2. EUT Information

EUT Power Type	From AA Battery*6			
EUT Function	<input checked="" type="checkbox"/>	Point-to-multipoint	<input type="checkbox"/>	Point-to-point
Beamforming Function	<input type="checkbox"/>	With beamforming	<input checked="" type="checkbox"/>	Without beamforming

1.3. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.4. Testing Location Information

Testing Location Information	
Test Laboratory : DEKRA Testing and Certification Co., Ltd.	
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958
Test site number for address 1 includes HC-SR02. Test site number for address 2 includes HC-CB02, HC-CB03, HC-CB04, HC-SR10 and HC-SR12.	

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted Emission	HC-SR12	Scott Chang	26.5 / 61	2023/10/30
Radiated Emission	HC-CB04	Ling Chen	23~24.3 / 62~65	2023/10/16~2023/10/20
			23 / 65	2023/11/20

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
Occupied Bandwidth & DTS Bandwidth	± 282.55 Hz
Maximum Conducted Output Power	± 1.16 dB
Maximum Power Spectral Density	± 2.47 dB
Antenna Port Conducted Emission	± 2.47 dB
Transmitter Radiated Spurious Emission	± 3.52 dB below 1 GHz ± 3.56 dB above 1 GHz

1.6. List of Test Equipment

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
High Speed Peak Power Meter Dual Input	Anritsu	ML2496A	1602004	0.3-40 GHz	2023/10/25	2024/10/24
Pulse Power Sensor	Anritsu	MA2411B	1531043	0.3-40 GHz	2023/10/25	2024/10/24
Pulse Power Sensor	Anritsu	MA2411B	1531044	0.3-40 GHz	2023/10/25	2024/10/24
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2023/07/03	2024/07/02

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal and Spectrum Analyzer	R&S	FSVA40	101435	10 Hz-40 GHz	2023/05/29	2024/05/28
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1209	30 MHz-2 GHz	2023/06/13	2024/06/12
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211211A18EN	1G-18GHz	2022/11/15	2023/11/14
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211211A18EN	1G-18GHz	2023/11/09	2024/11/08
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2023/02/13	2024/02/12
Pre-Amplifier	EMCI	EMC01820I	980364	30M-8 GHz,20 dB	2023/06/06	2024/06/05
Pre-Amplifier	EMEC	EM01G18GA	060835	1-18 GHz,50 dB	2023/07/24	2024/07/23
Pre-Amplifier	DEKRA	AP-400C	201801231	18G-40 GHz,48 dB	2023/10/03	2024/10/02
EMI Test Receiver	R&S	ESR7	102260	10 Hz-7 GHz	2022/12/01	2023/11/30
EMI Test Receiver	R&S	ESR7	102260	10 Hz-7 GHz	2023/11/27	2024/11/26
Magnetic Loop Antenna	Teseq	HLA 6121	44287	0.01-30 MHz	2023/10/13	2024/10/12
Coaxial Cable(11m)	Suhner	SF102_SF104	HC-CB04	30M-18 GHz	2023/08/08	2024/08/07
Coaxial Cable(3m)	Suhner,Rosnol	SF102_UP0264	HC-CB04-1	18G-40 GHz	2023/08/14	2024/08/13
Radiated Software	AUDIX	e3 V9	HC-CB04_1	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 4.5V

2.2. Test Frequency Mode

Test Software Version	TeraTerm v4.75
-----------------------	----------------

Modulation	Frequency (MHz)	Power Setting
802.11b	2412	82.0
	2417	89.0
	2422	91.0
	2427	92.0
	2437	92.0
	2452	92.0
	2457	91.0
	2462	84.0
802.11g	2412	75.0
	2417	82.0
	2422	92.0
	2437	92.0
	2452	92.0
	2457	84.0
	2462	74.0
	802.11n (20 MHz)	2412
2417		80.0
2422		92.0
2437		92.0
2447		92.0
2452		86.0
2457		83.0
2462		72.0



2.3. Duty Cycle

Modulation	On Times (ms)	On+Off Times (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz) (Note.)
802.11b	8.605	8.710	98.79	0.053	0.010
802.11g	1.425	1.535	92.83	0.323	0.702
802.11n (20 MHz)	1.330	1.445	92.04	0.360	0.752

Note.

For the transmitter unwanted emissions Average power measurement procedures shall be measured using following options below:

- Refer as FCC KDB 558074, clause 8.6 & ANSI C63.10 caluse 11.12.2.5.1(duty cycle \geq 98%).
- Refer as FCC KDB 558074, clause 8.6 & ANSI C63.10 caluse 11.12.2.5.2(duty cycle \leq 98% and variations are less than $\pm 2\%$).
- Refer as FCC KDB 558074, clause 8.6 & ANSI C63.10 caluse 11.12.2.5.3(duty cycle \leq 98% and variations exceed $\pm 2\%$).

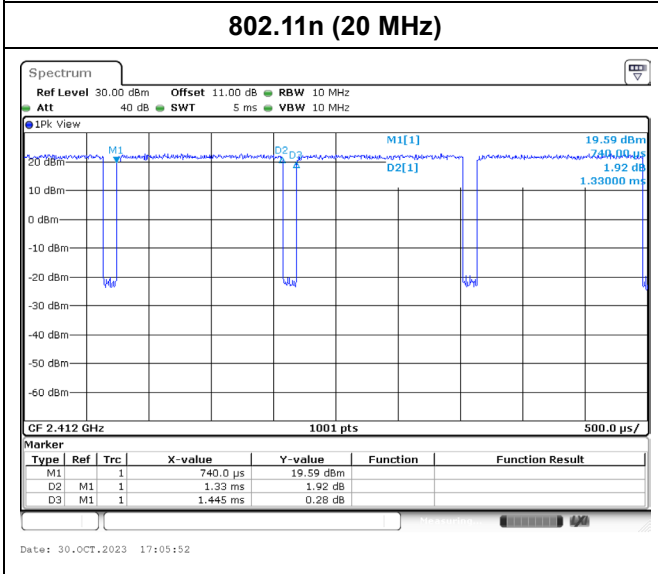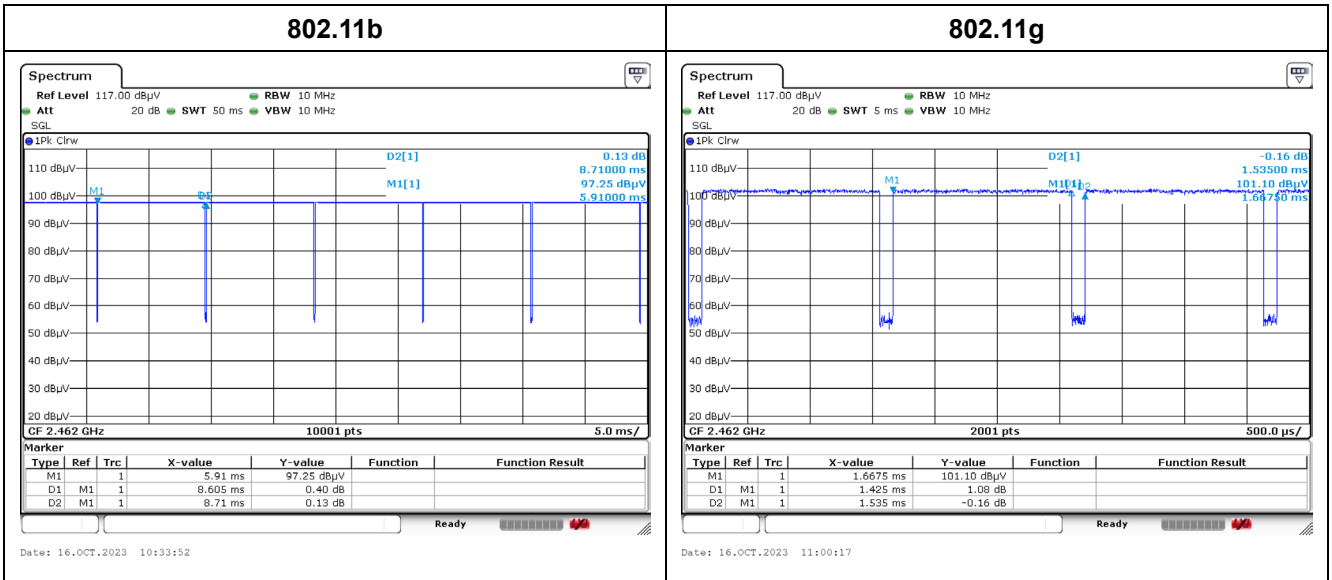

2.4. The Worst Case Measurement Configuration

Tests Item	Occupied Bandwidth & DTS Bandwidth Maximum Conducted Output Power Maximum Power Spectral Density Antenna Port Conducted Emission
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
Operating Mode > 1GHz	Transmit

Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Transmit
1	WiFi 2.4 GHz (802.11b, 2417 MHz) + Sub-GHz (915.5 MHz)
Refer to Appendix F for Radiated Emission Co-location.	


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated spurious emission below 1 GHz has performed all modes of operation were investigated and the worst-case emissions are reported.

2.5. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	AA Battery	Panasonic	LR6TTS/12B	N/A

2.6. Configuration of Tested System

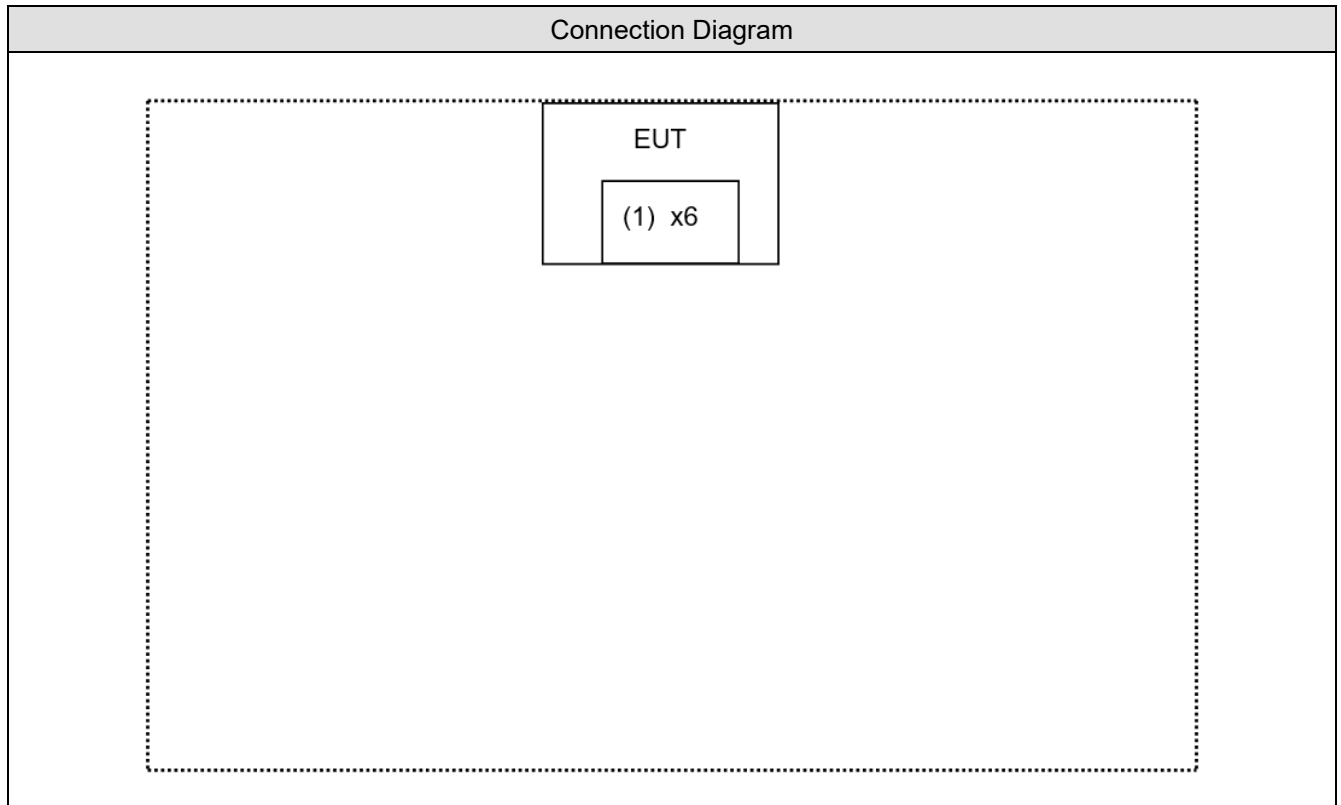

3. Occupied Bandwidth & DTS Bandwidth

3.1. Test Setup

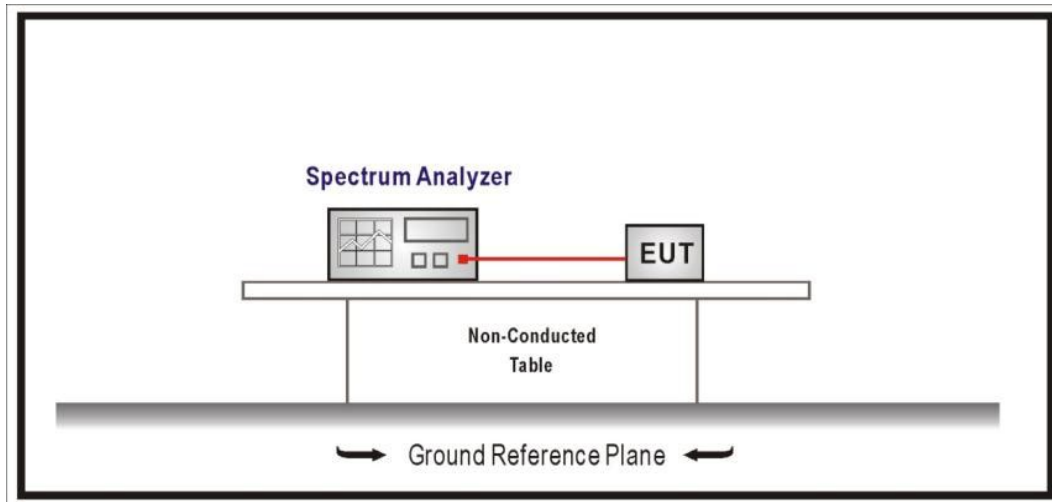

3.2. Test Limit

The 6 dB bandwidth: ≥ 0.50 MHz.

Occupied Bandwidth: N/A

3.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

3.4. Test Result of Occupied Bandwidth & DTS Bandwidth

Refer as Appendix A

4. Maximum Conducted Output Power

4.1. Test Setup

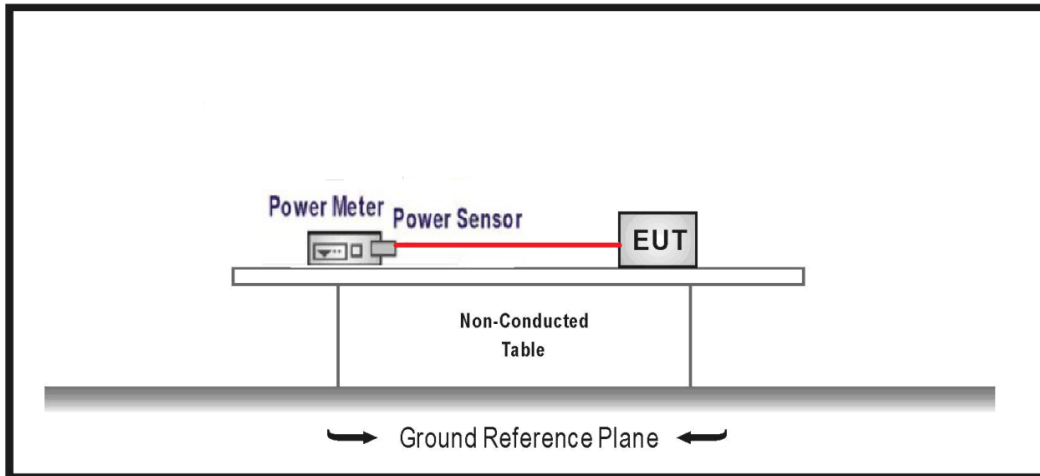

4.2. Test Limit

The maximum conducted output power shall be less 30 dBm (1 Watt).

4.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

4.4. Test Result of Maximum Conducted Output Power

Refer as Appendix B

5. Maximum Power Spectral Density

5.1. Test Setup

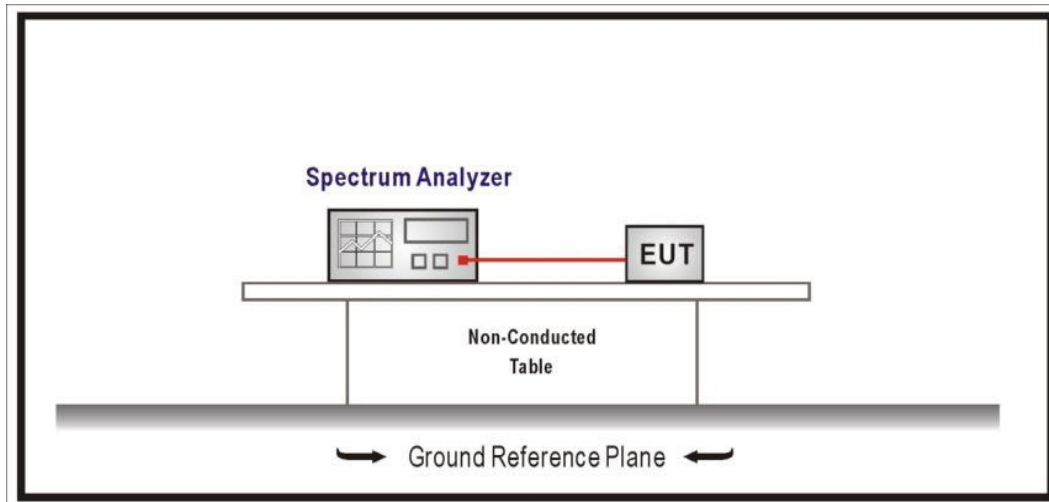

5.2. Test Limit

The peak power spectral density conducted from the intentional radiated to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.3. Test Procedures


The EUT was setup according to ANSI C63.10: 2013; tested according to DTS test procedure of KDB 558074.

5.4. Test Result of Maximum Power Spectral Density

Refer as Appendix C

6. Antenna Port Conducted Emission

6.1. Test Setup

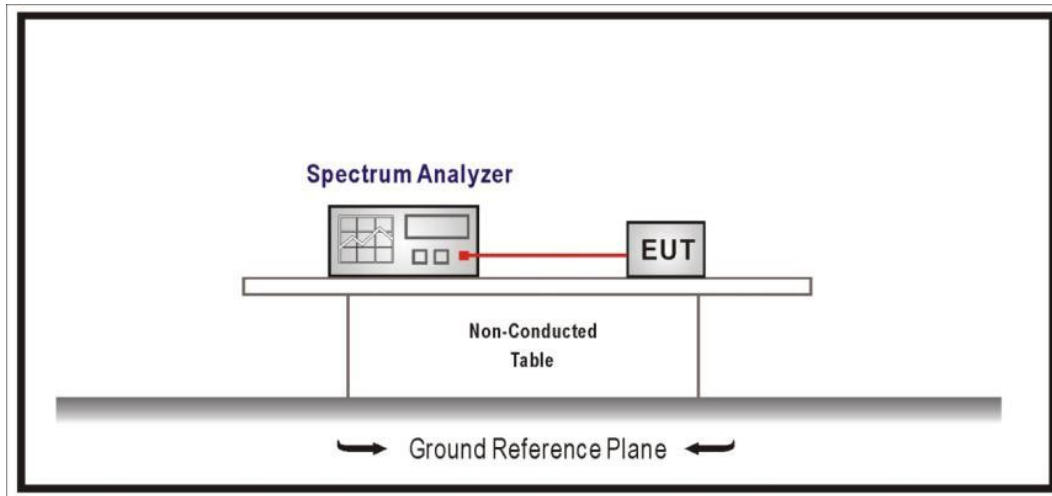

6.2. Test Limit

RF output power procedure	Limit (dBc)
Peak output power procedure	20
Average output power procedure	30

Remarks:

1. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limit.
2. If the transmitter complies with the conducted power limit based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
- 3.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.


6.4. Test Result of Antenna Port Conducted Emission

Refer as Appendix D


7. Transmitter Radiated Spurious Emission

7.1. Test Setup


9 kHz ~ 30 MHz

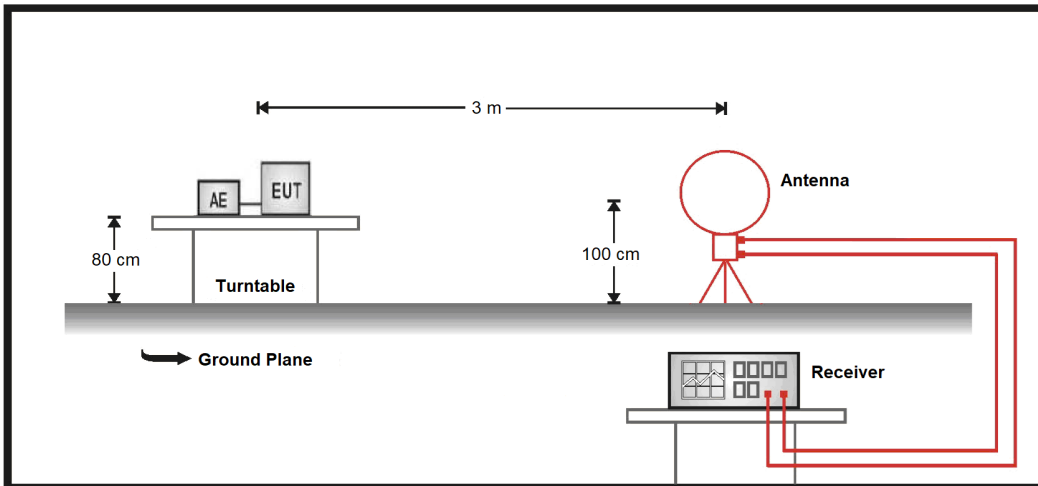

30 MHz ~ 1 GHz

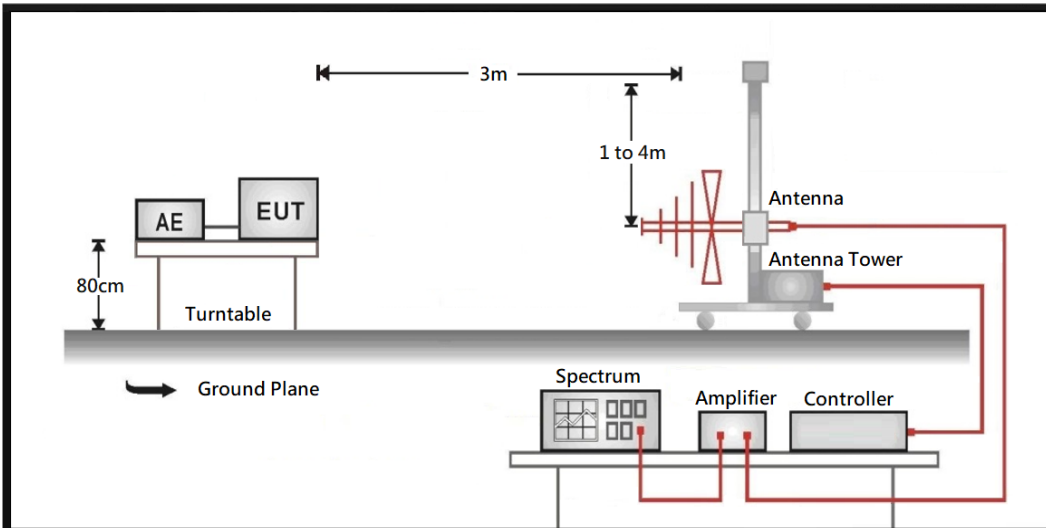

Above 1 GHz

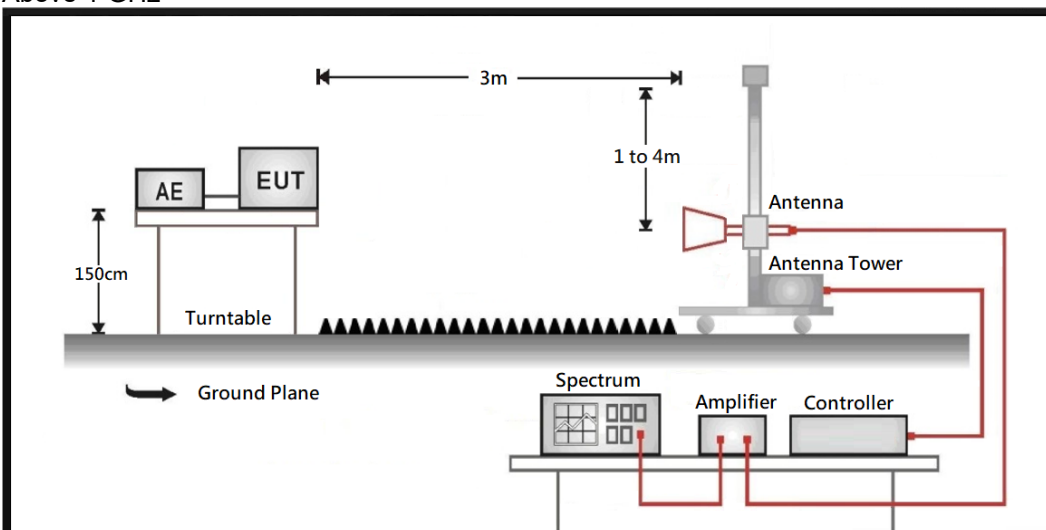

7.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz(include The the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

7.4. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix E

Appendix A.1 Test Result of Occupied Bandwidth


Modulation	Frequency (MHz)	Occupied Bandwidth (MHz)	Limit (MHz)
802.11b	2412	12.027	-
	2417	12.947	-
	2422	13.746	-
	2427	14.425	-
	2437	14.305	-
	2452	14.505	-
	2457	13.986	-
	2462	12.267	-
802.11g	2412	16.863	-
	2417	17.062	-
	2422	17.582	-
	2437	17.742	-
	2452	18.301	-
	2457	18.661	-
	2462	16.863	-
802.11n (20 MHz)	2412	17.822	-
	2417	17.902	-
	2422	18.661	-
	2437	18.821	-
	2447	19.380	-
	2452	19.300	-
	2457	18.541	-
	2462	17.902	-

Spectrum plot of maximum value


802.11b / 2452 MHz



802.11g / 2457 MHz

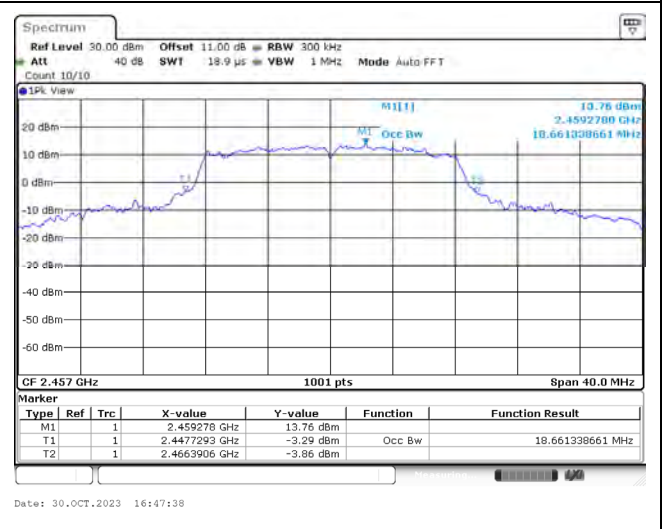

802.11n (20 MHz) / 2447 MHz

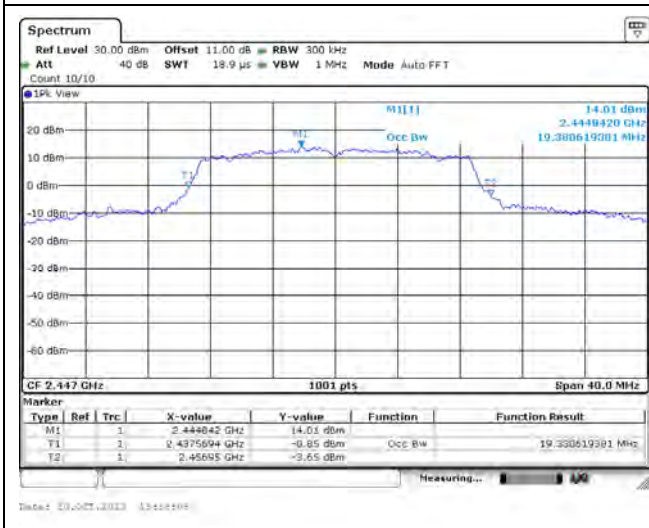


Appendix A.2 Test Result of DTS Bandwidth


Modulation	Frequency (MHz)	DTS Bandwidth (MHz)	Limit (MHz)
802.11b	2412	9.031	0.50
	2417	9.995	0.50
	2422	9.990	0.50
	2427	10.050	0.50
	2437	10.030	0.50
	2452	10.069	0.50
	2457	9.550	0.50
	2462	9.031	0.50
802.11g	2412	15.465	0.50
	2417	16.024	0.50
	2422	15.425	0.50
	2437	15.425	0.50
	2452	15.105	0.50
	2457	15.425	0.50
	2462	15.465	0.50
802.11n (20 MHz)	2412	16.184	0.50
	2417	15.509	0.50
	2422	15.425	0.50
	2437	15.904	0.50
	2447	17.263	0.50
	2452	17.263	0.50
	2457	16.064	0.50
	2462	15.904	0.50

Spectrum plot of worst value


802.11b / 2412 MHz

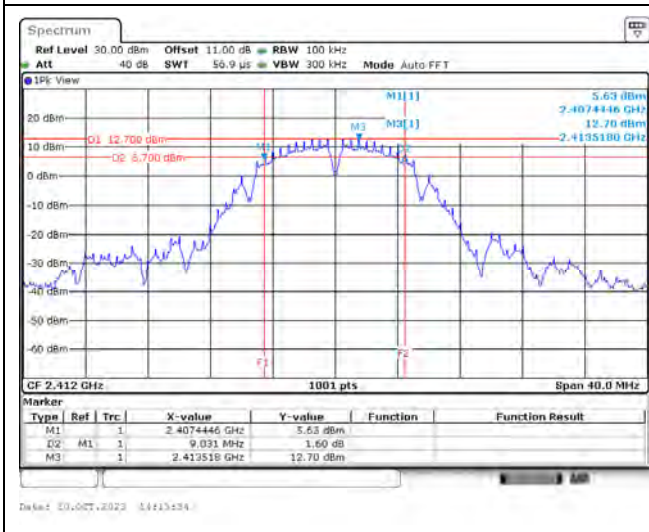

802.11g / 2452 MHz

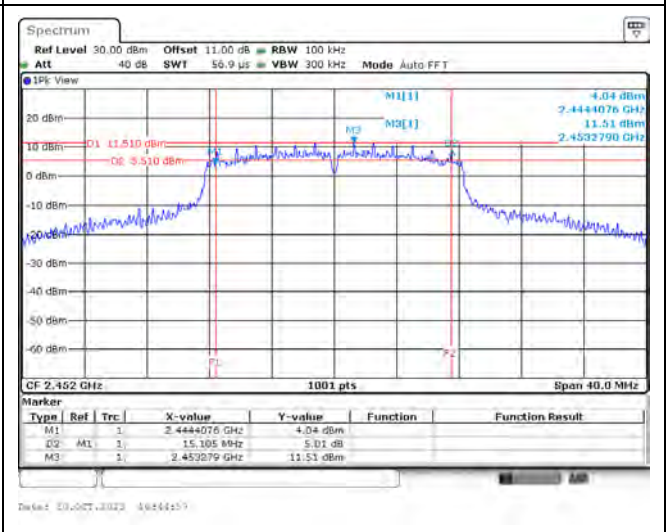

802.11n (20 MHz) / 2422 MHz

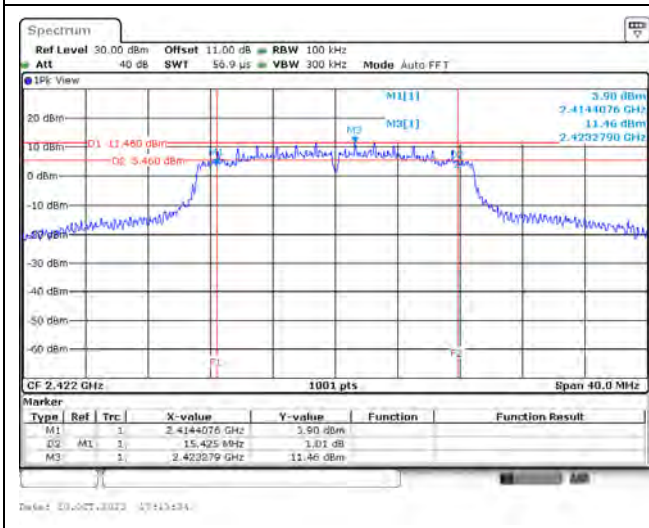

Appendix B. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)		Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 0	Limit			
802.11b	2412	21.59	30.00	3.50	25.09	36.00
	2417	23.42	30.00	3.50	26.92	36.00
	2422	23.91	30.00	3.50	27.41	36.00
	2427	24.14	30.00	3.50	27.64	36.00
	2437	24.13	30.00	3.50	27.63	36.00
	2452	24.15	30.00	3.50	27.65	36.00
	2457	23.94	30.00	3.50	27.44	36.00
	2462	22.58	30.00	3.50	26.08	36.00
802.11g	2412	19.49	30.00	3.50	22.99	36.00
	2417	21.52	30.00	3.50	25.02	36.00
	2422	21.92	30.00	3.50	25.42	36.00
	2437	22.30	30.00	3.50	25.80	36.00
	2452	22.32	30.00	3.50	25.82	36.00
	2457	22.11	30.00	3.50	25.61	36.00
	2462	19.24	30.00	3.50	22.74	36.00
802.11n (20 MHz)	2412	18.86	30.00	3.50	22.36	36.00
	2417	20.89	30.00	3.50	24.39	36.00
	2422	22.03	30.00	3.50	25.53	36.00
	2437	22.46	30.00	3.50	25.96	36.00
	2447	22.46	30.00	3.50	25.96	36.00
	2452	22.42	30.00	3.50	25.92	36.00
	2457	21.77	30.00	3.50	25.27	36.00
	2462	18.72	30.00	3.50	22.22	36.00


Appendix C. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)		Limit (dBm / 3kHz)
		Ant. 0	Total	
802.11b	2412	-5.020	-4.967	8.00
	2417	-3.570	-3.517	8.00
	2422	-3.710	-3.657	8.00
	2427	-3.330	-3.277	8.00
	2437	-3.220	-3.167	8.00
	2452	-3.380	-3.327	8.00
	2457	-3.680	-3.627	8.00
	2462	-4.320	-4.267	8.00
802.11g	2412	-7.860	-7.537	8.00
	2417	-7.770	-7.447	8.00
	2422	-5.980	-5.657	8.00
	2437	-5.510	-5.187	8.00
	2452	-5.350	-5.027	8.00
	2457	-4.960	-4.637	8.00
	2462	-8.260	-7.937	8.00
802.11n (20 MHz)	2412	-10.030	-9.670	8.00
	2417	-10.850	-10.490	8.00
	2422	-6.860	-6.500	8.00
	2437	-7.160	-6.800	8.00
	2447	-6.730	-6.370	8.00
	2452	-6.930	-6.570	8.00
	2457	-7.040	-6.680	8.00
	2462	-9.980	-9.620	8.00


Note: Total power spectral density = power spectral density + duty factor, and the duty factor refer to section 2.3.

Spectrum plot of worst value


802.11b / 2437 MHz

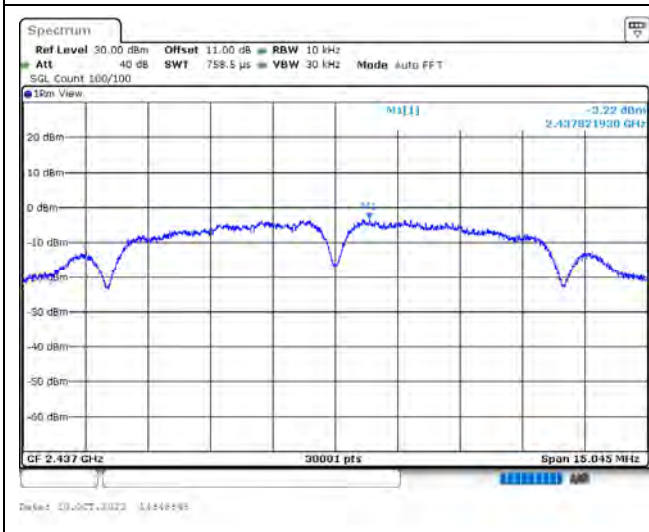

802.11g / 2457 MHz


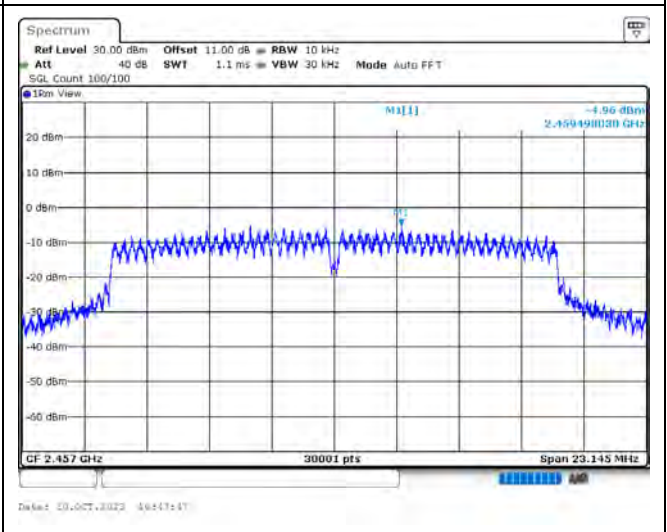


802.11n (20 MHz) / 2447 MHz

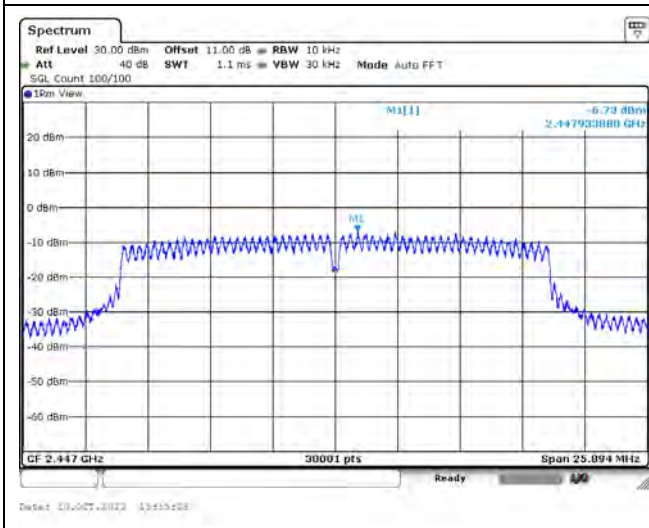


Appendix D. Test Result of Antenna Port Conducted Emission



802.11b / 2412 MHz

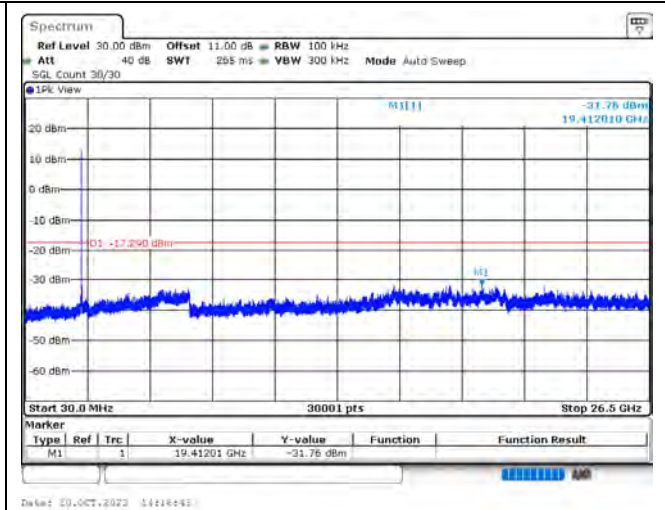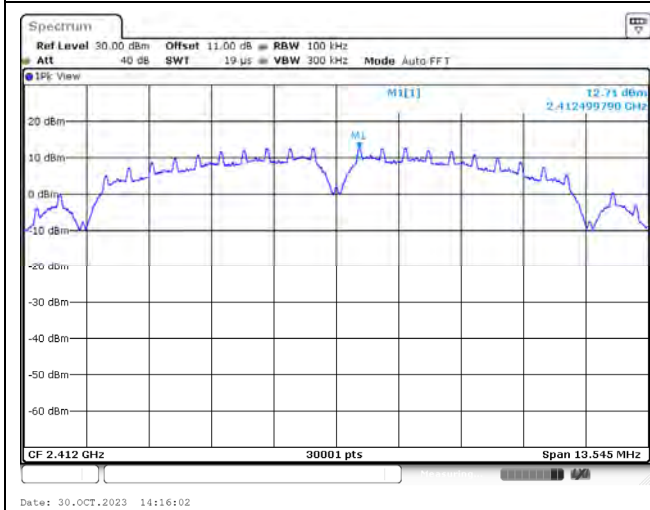



802.11b / 2417 MHz

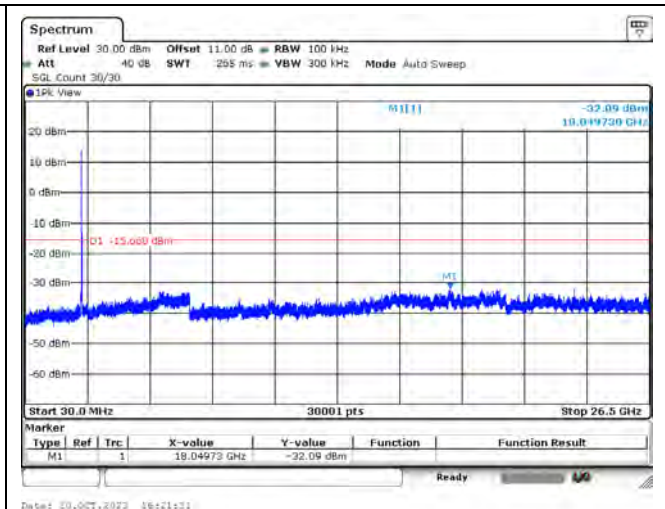



802.11b / 2422 MHz

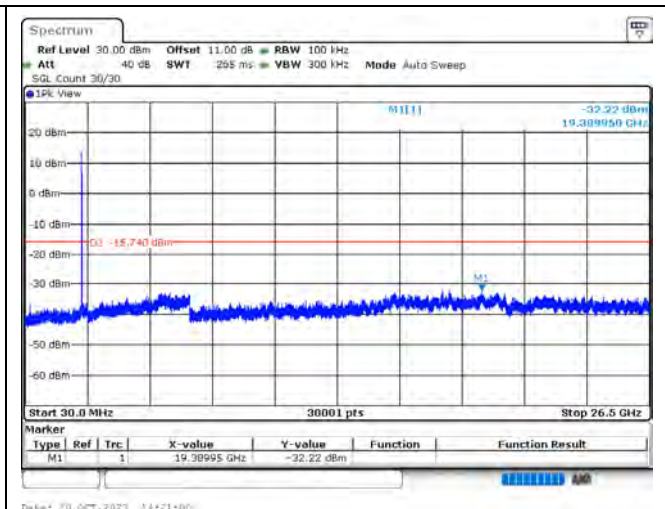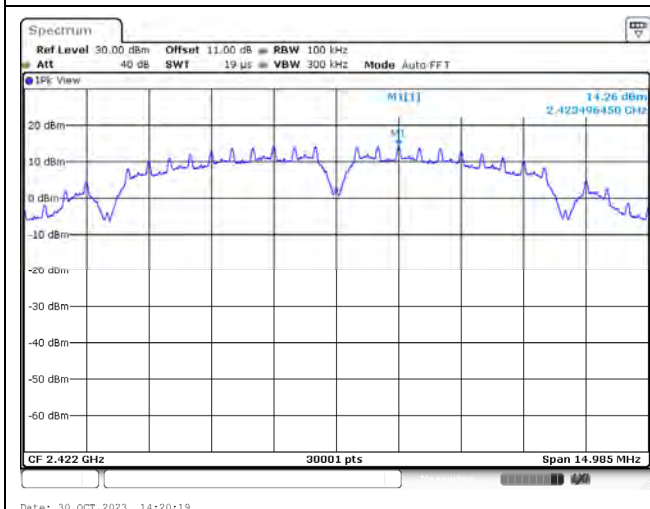



802.11b / 2427 MHz

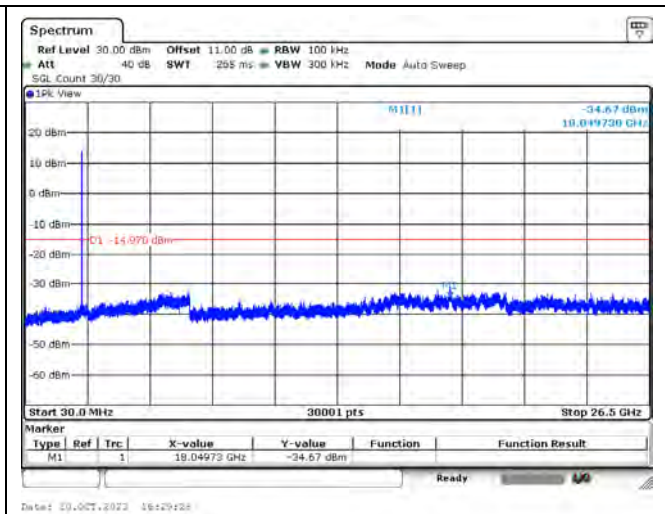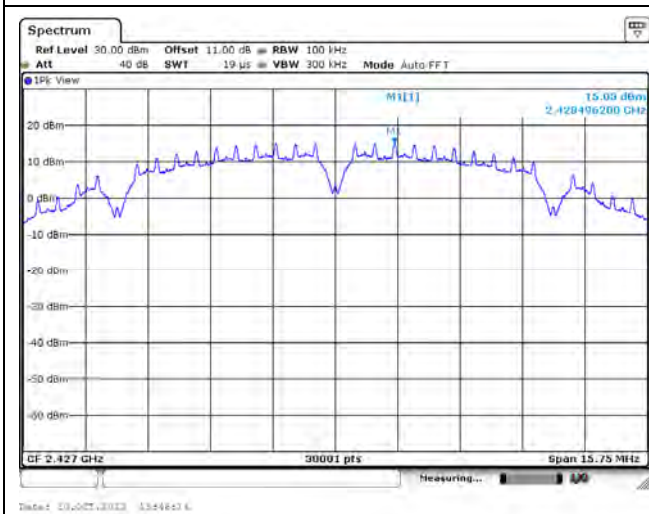


802.11b / 2437 MHz

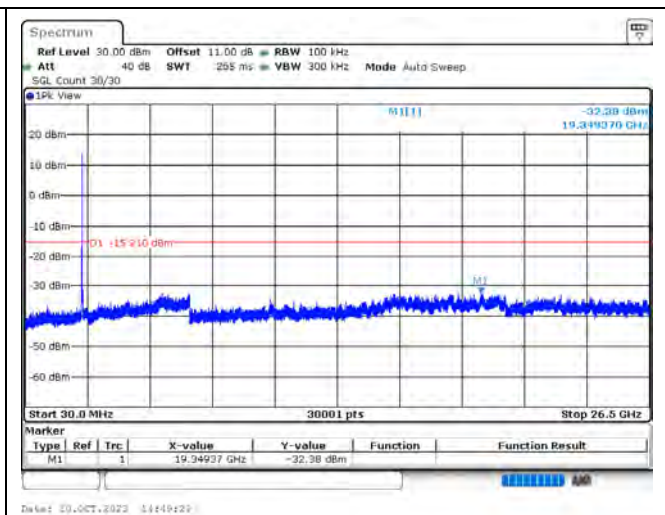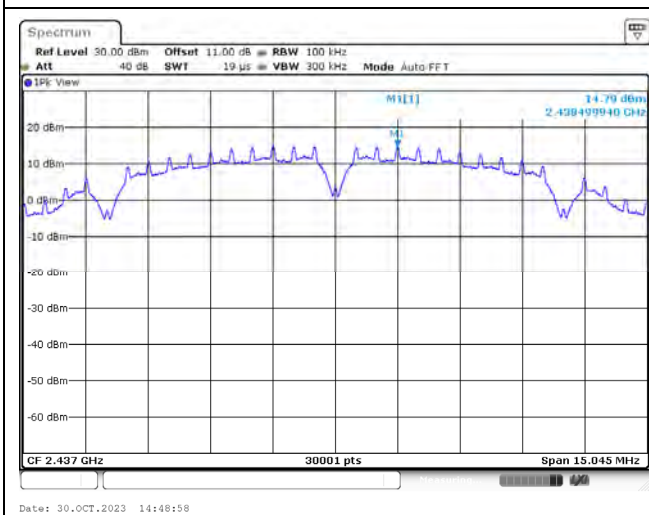



802.11b / 2452 MHz

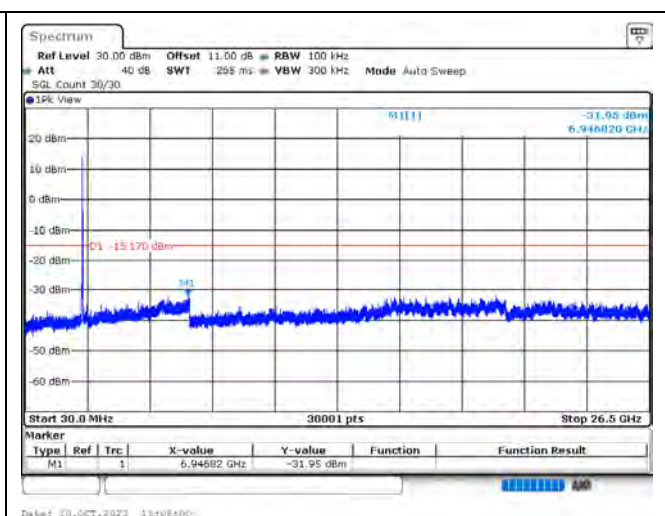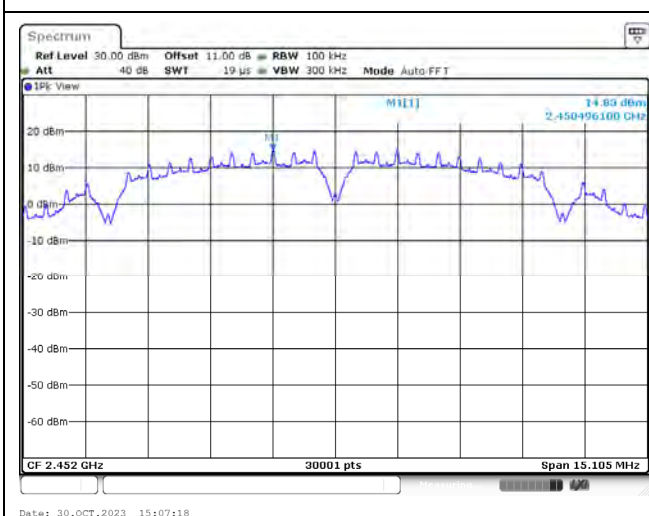



802.11b / 2457 MHz

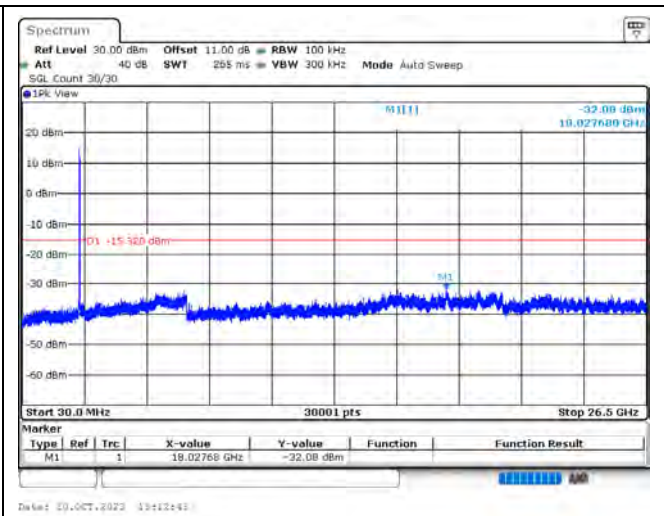



802.11b / 2462 MHz

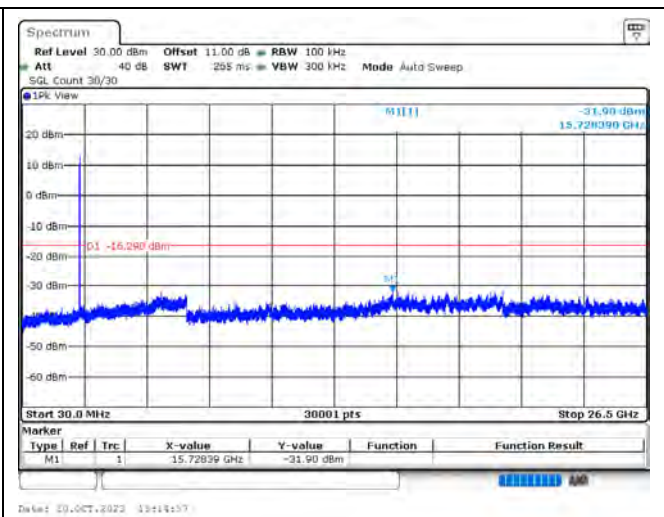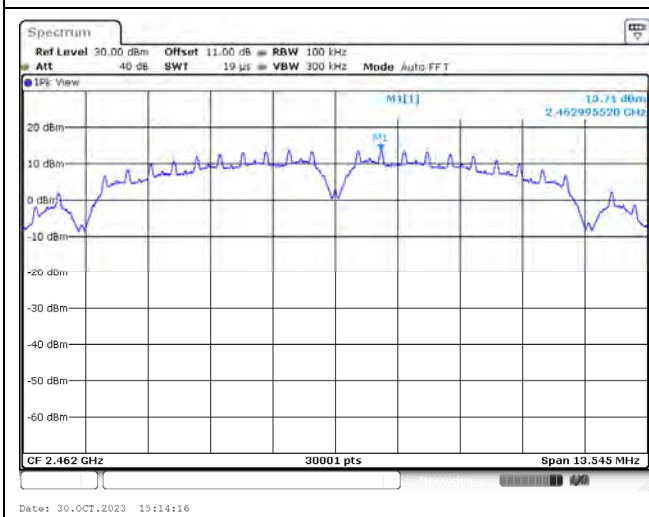



802.11g / 2412 MHz

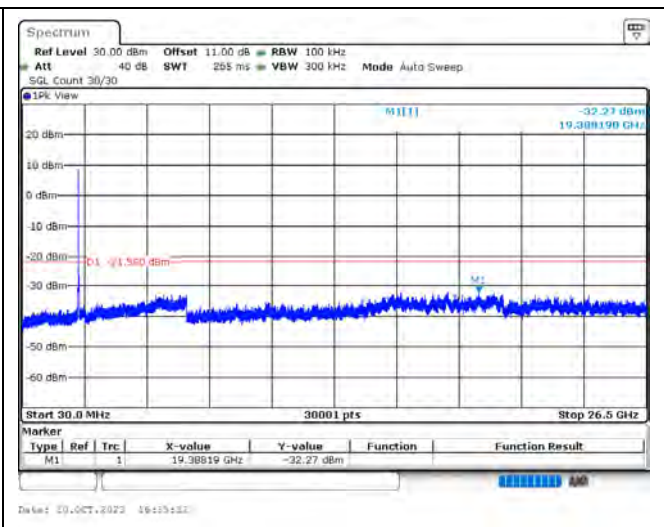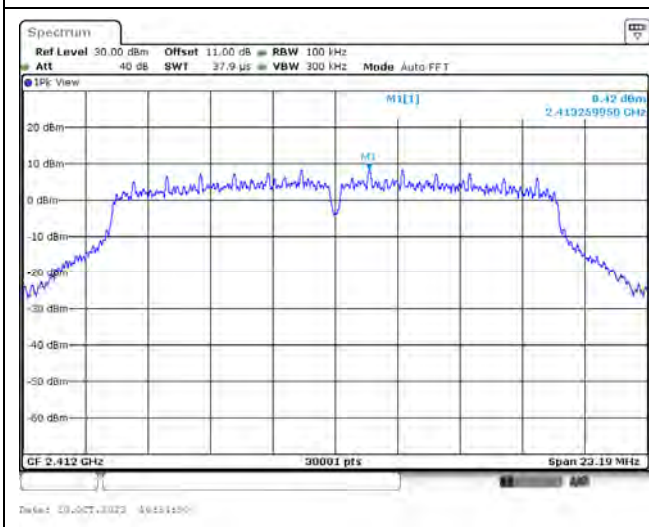



802.11g / 2417 MHz

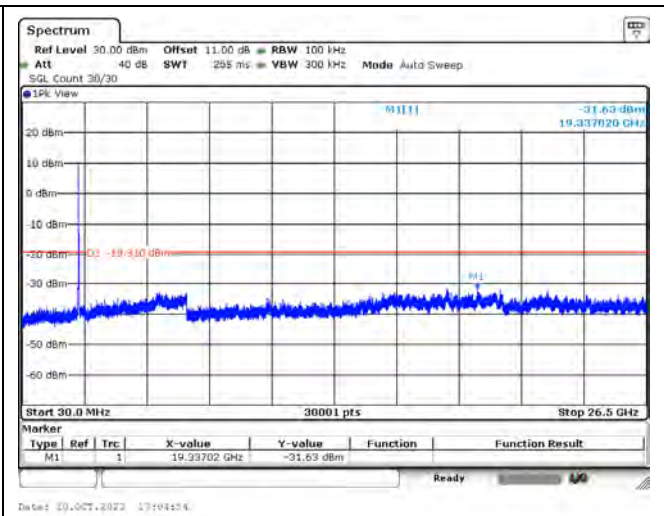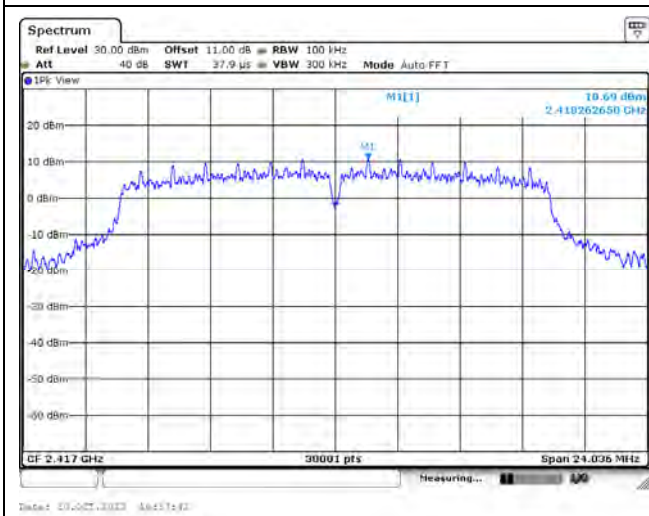



802.11g / 2422 MHz

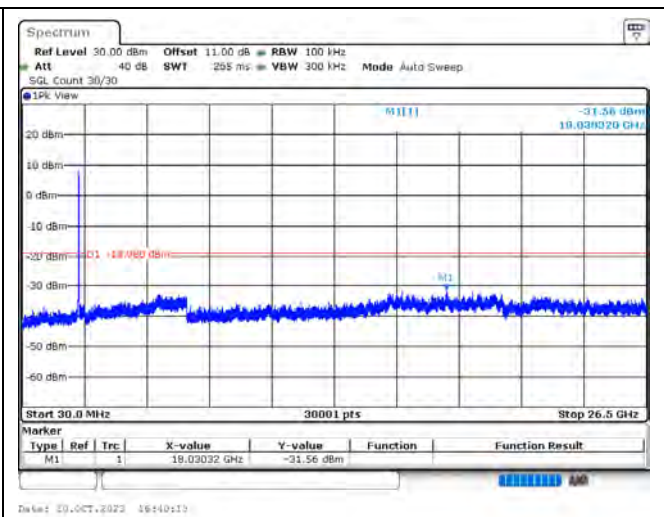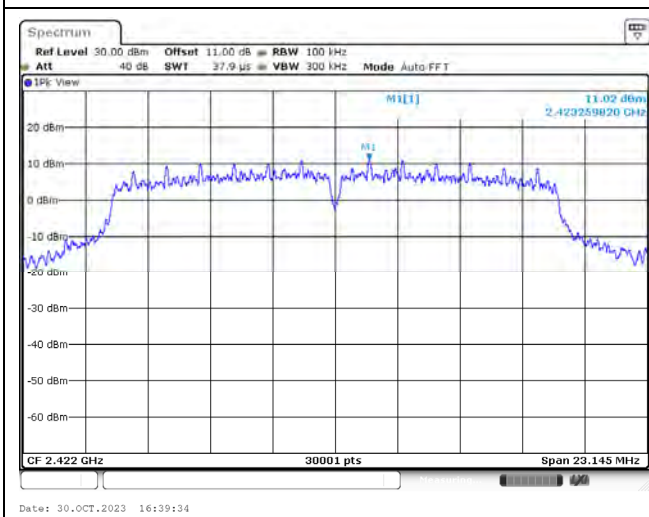



802.11g / 2437 MHz

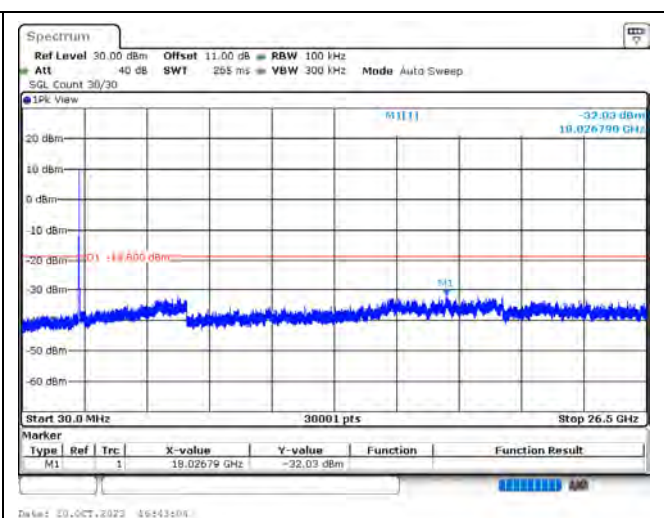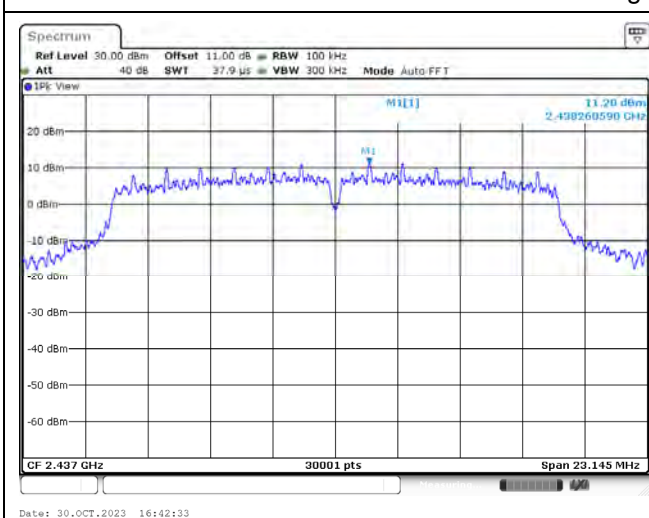



802.11g / 2452 MHz

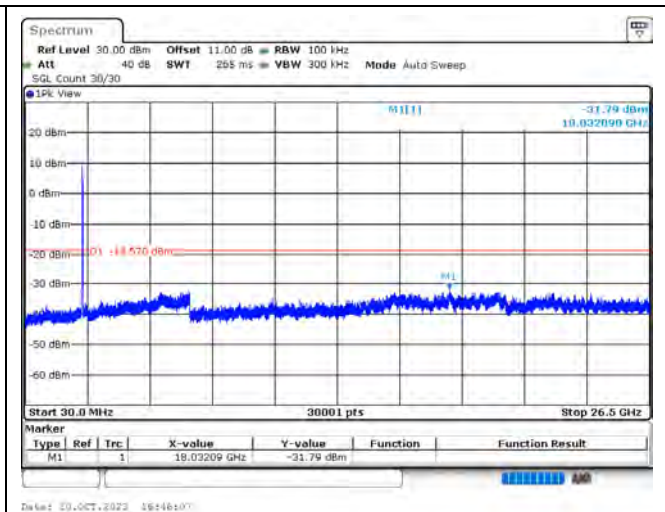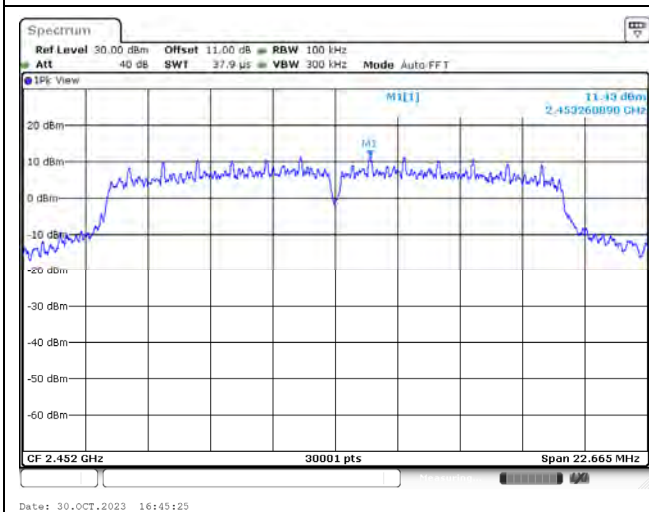


802.11g / 2457 MHz

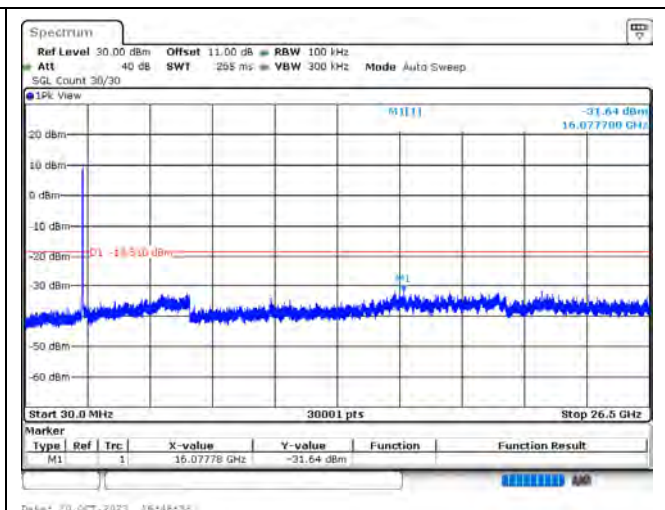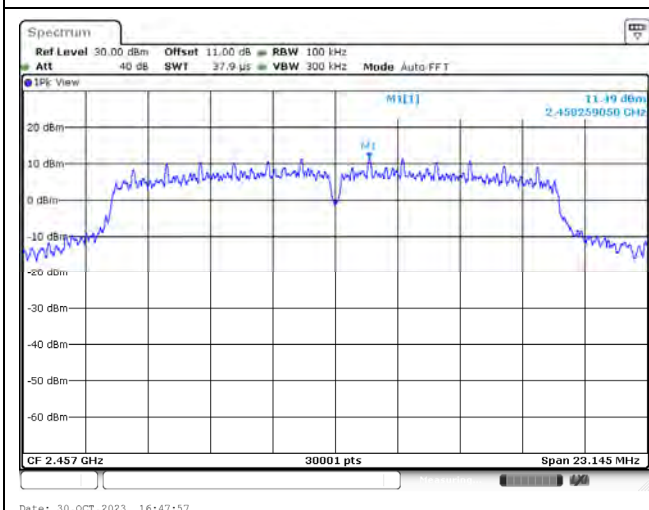


802.11g / 2462 MHz

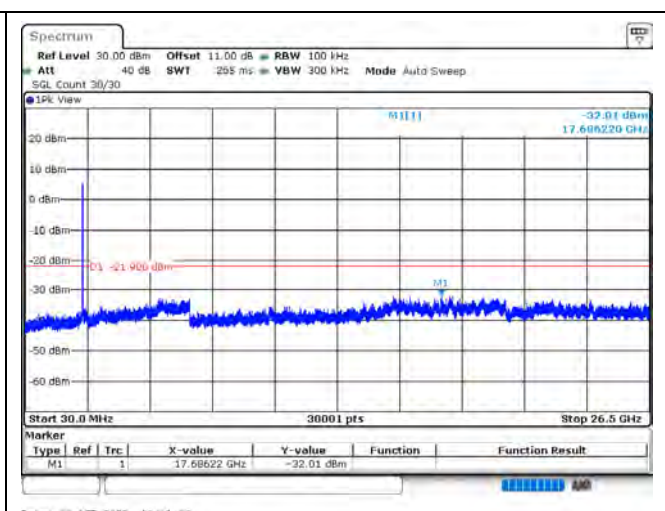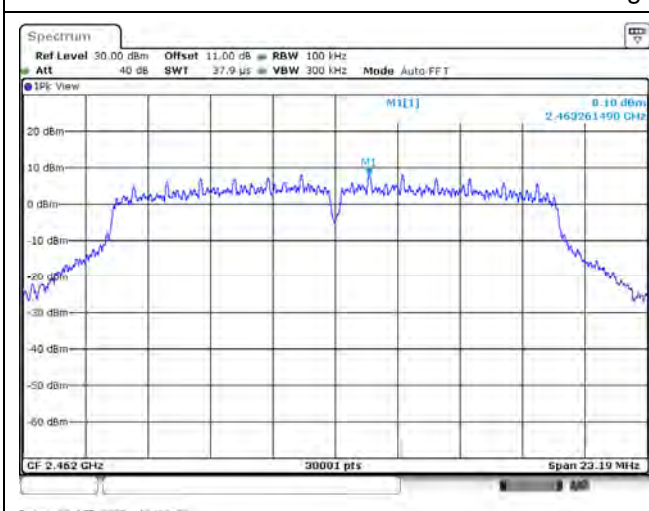


802.11n (20 MHz) / 2412 MHz

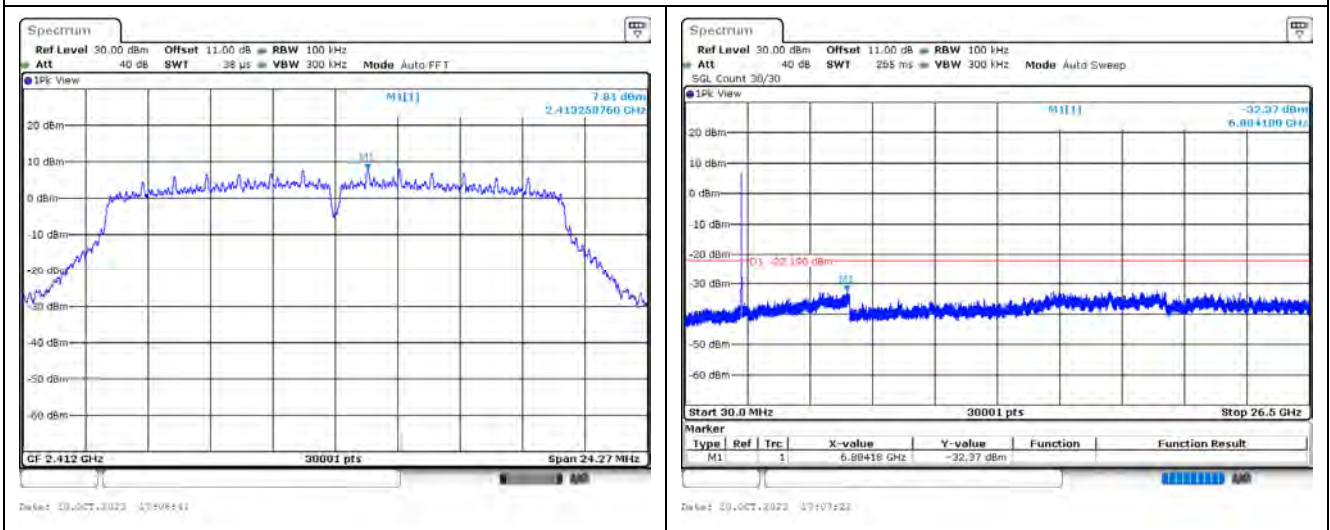



802.11n (20 MHz) / 2417 MHz

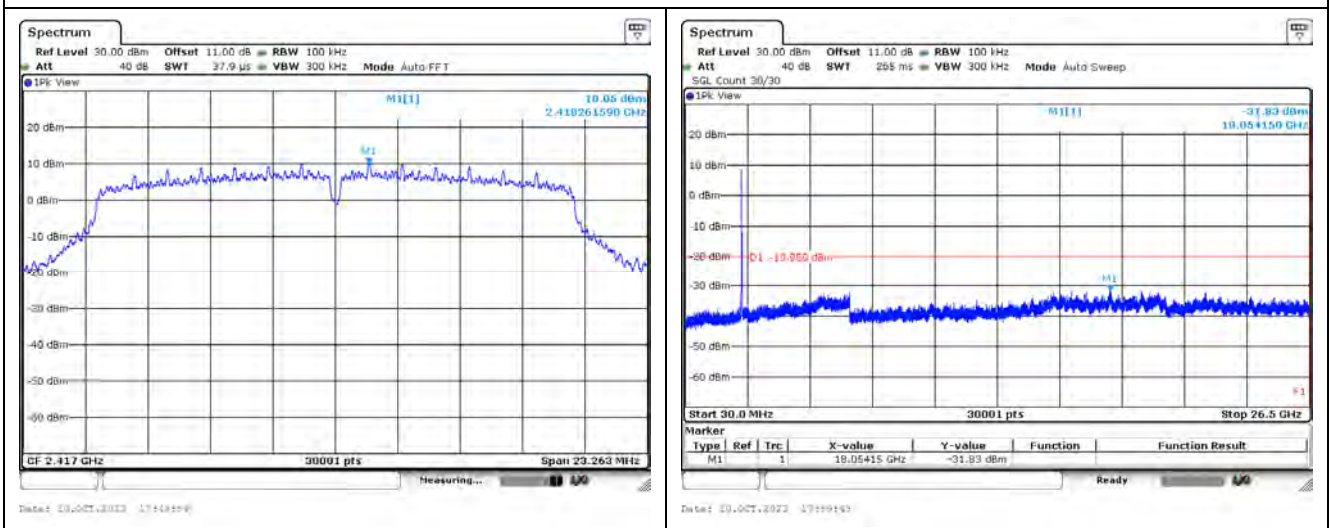



802.11n (20 MHz) / 2422 MHz

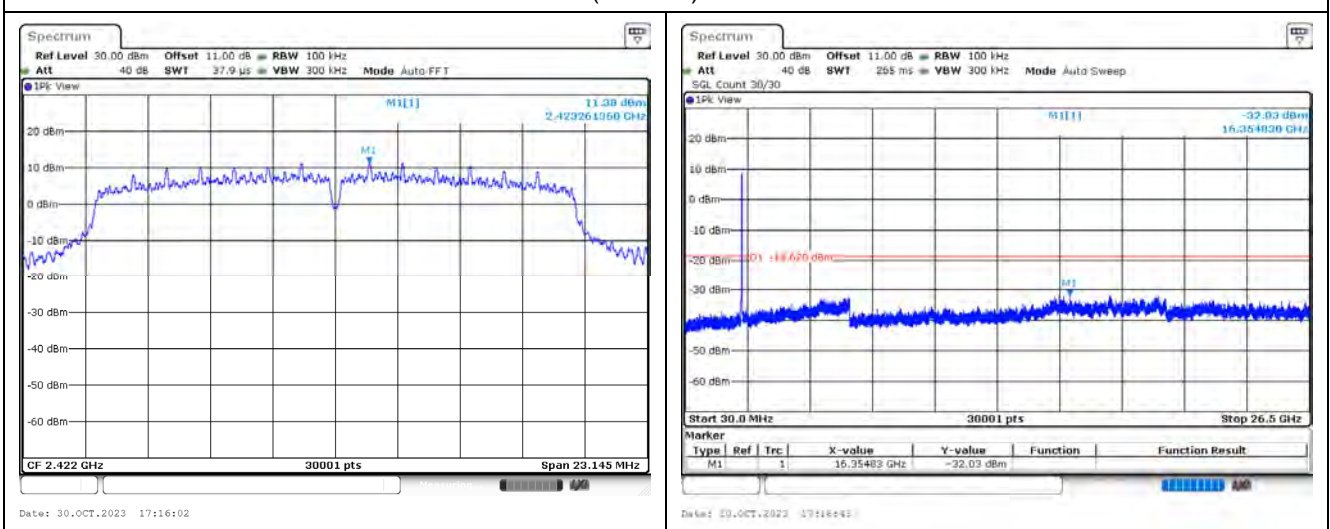



802.11n (20 MHz) / 2437 MHz

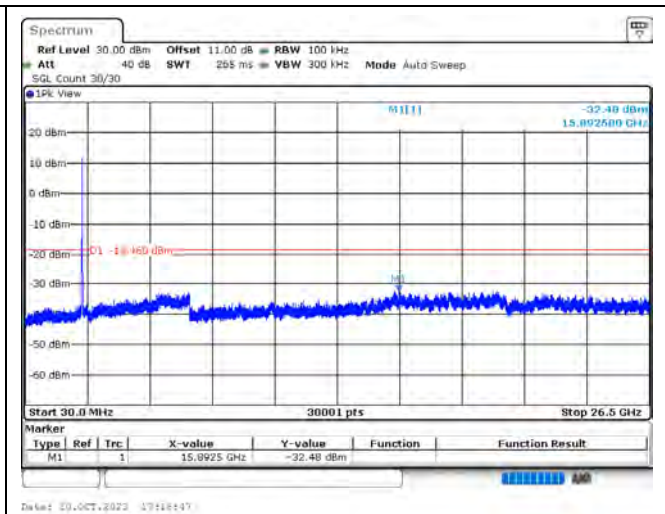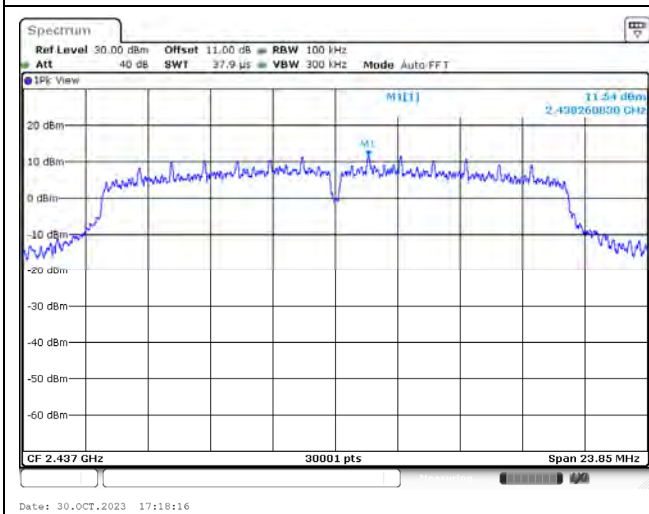



802.11n (20 MHz) / 2447 MHz

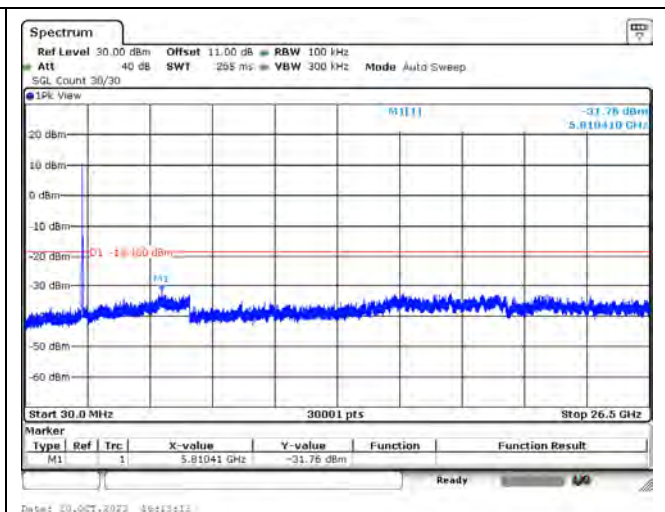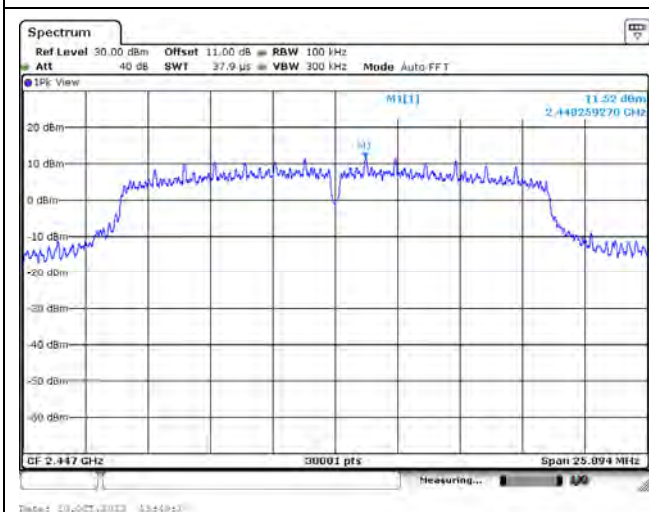



802.11n (20 MHz) / 2452 MHz

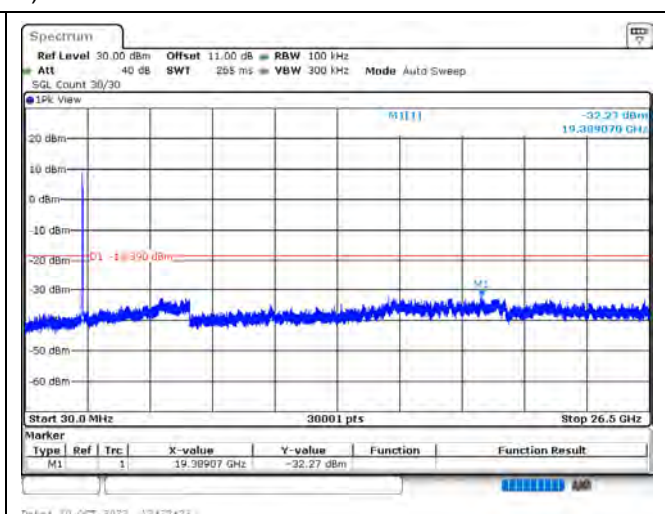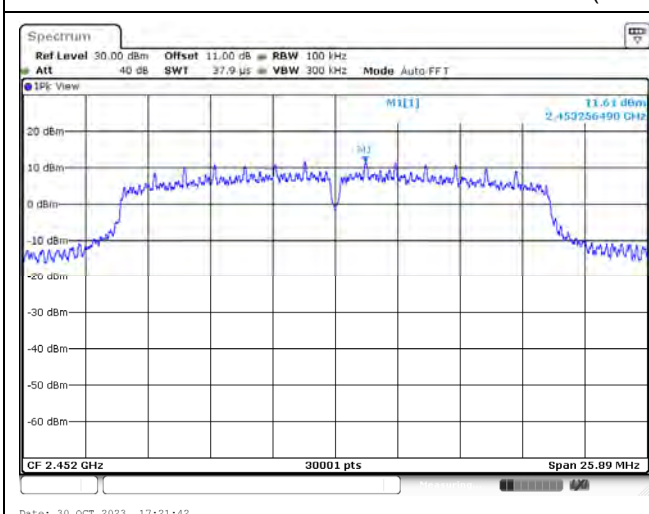


802.11n (20 MHz) / 2457 MHz

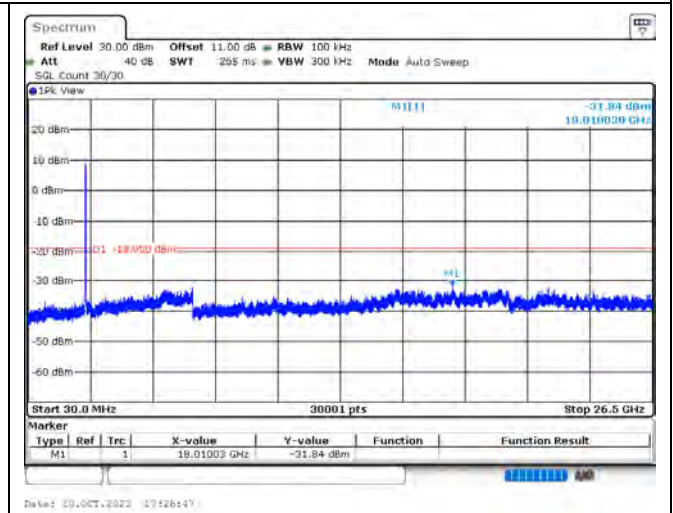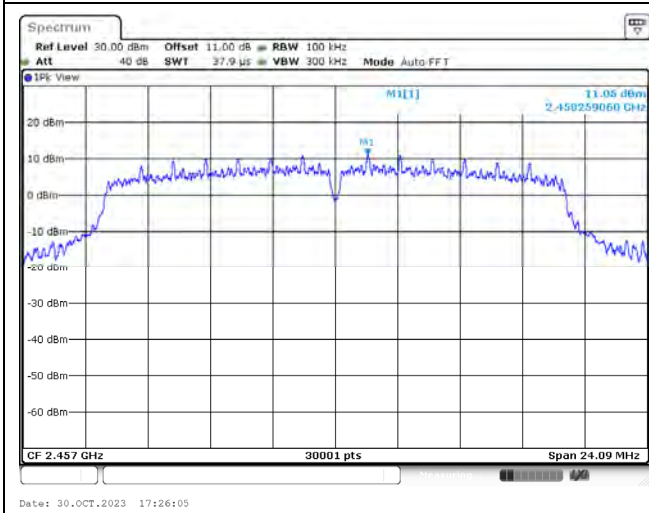


802.11n (20 MHz) / 2462 MHz

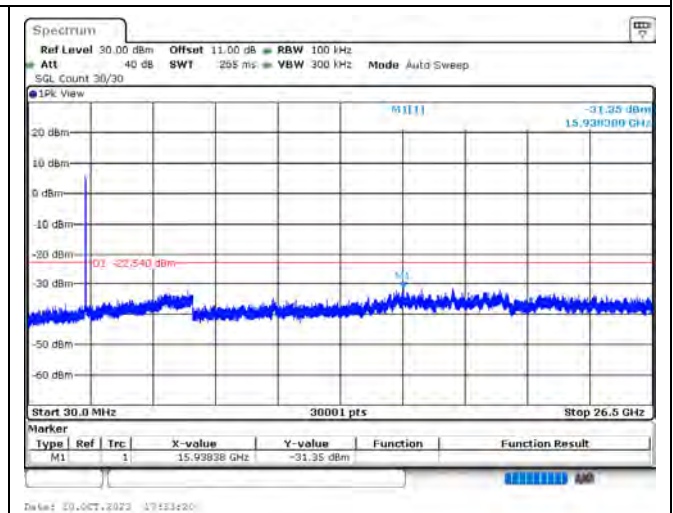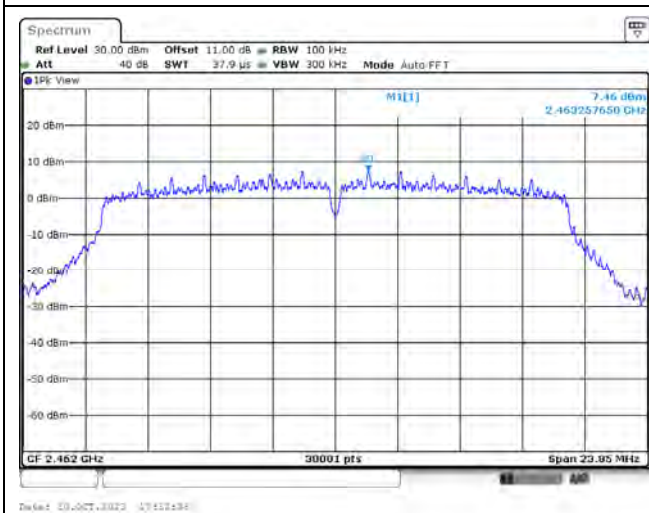


802.11b / 2412 MHz (Band Edge)

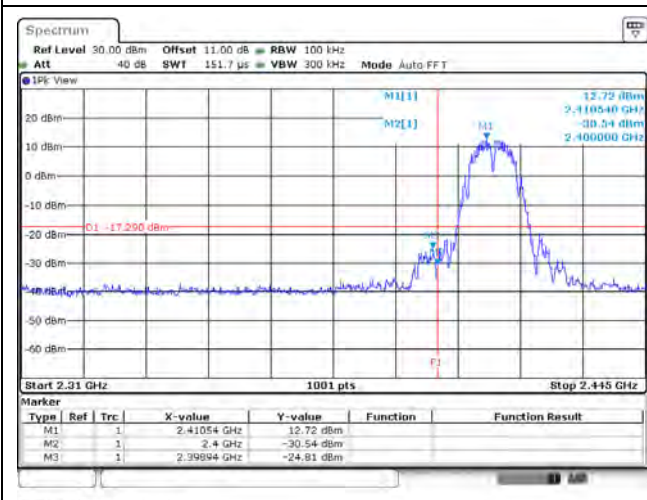


802.11b / 2417 MHz (Band Edge)

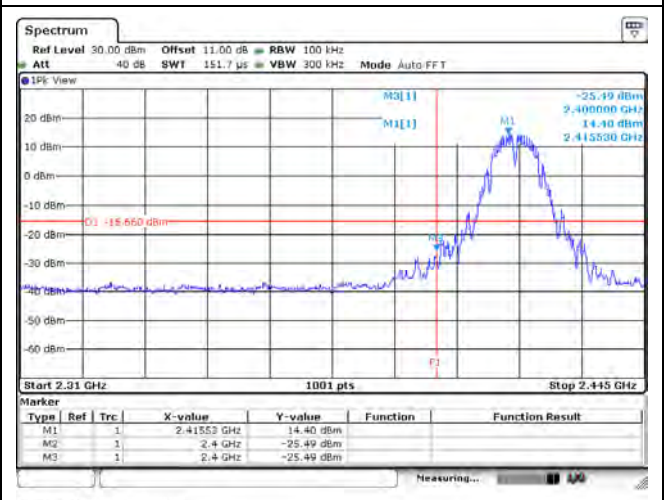


802.11b / 2422 MHz (Band Edge)

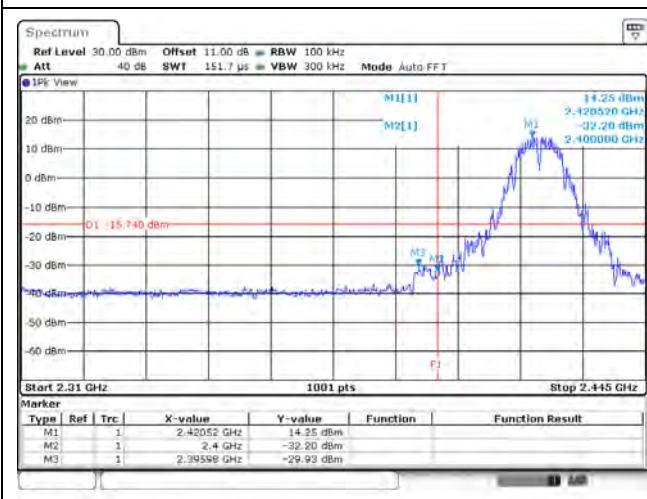


802.11b / 2427 MHz (Band Edge)

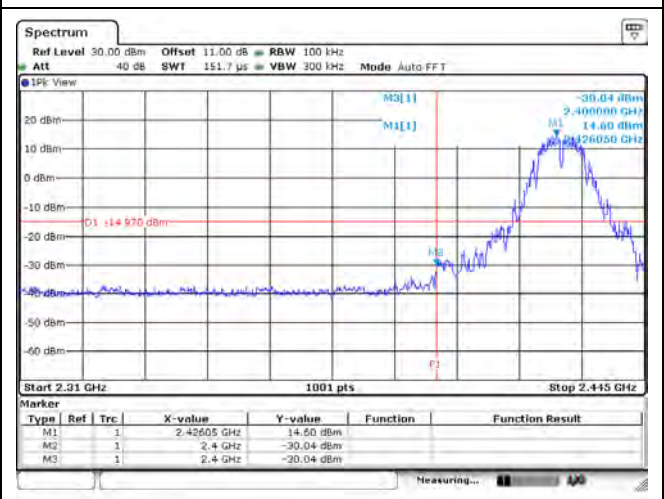


802.11b / 2452 MHz (Band Edge)

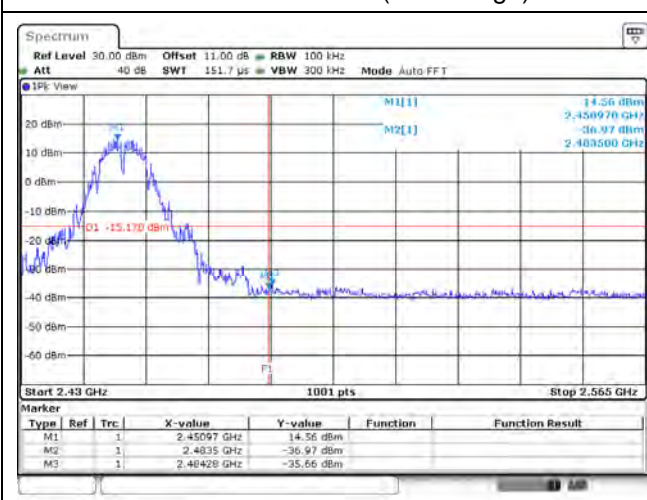


802.11b / 2457 MHz (Band Edge)

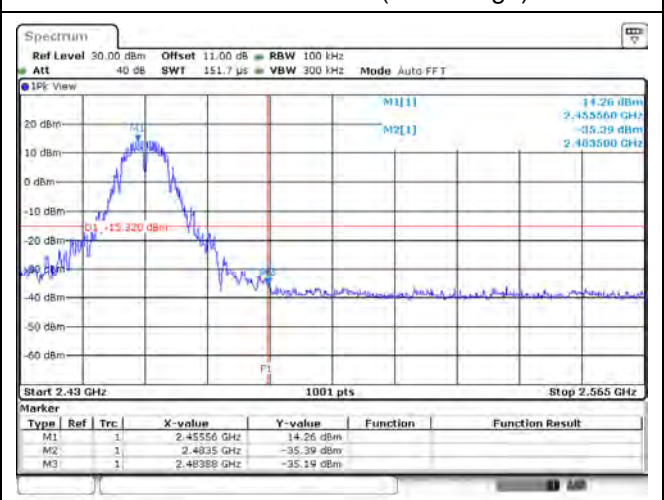

802.11b / 2462 MHz (Band Edge)

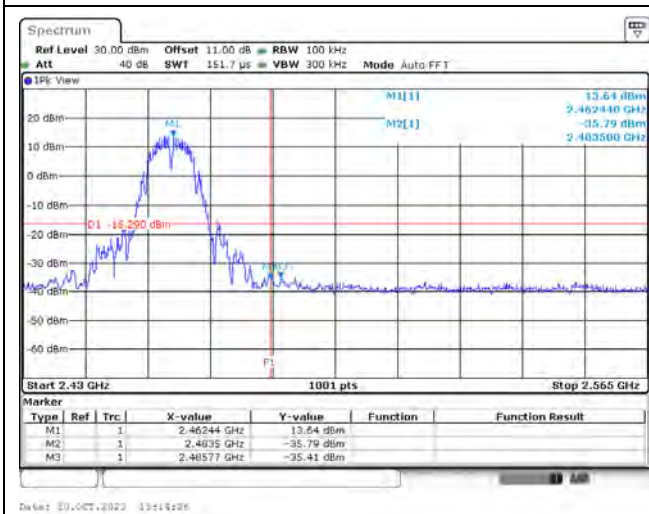


802.11g / 2412 MHz (Band Edge)

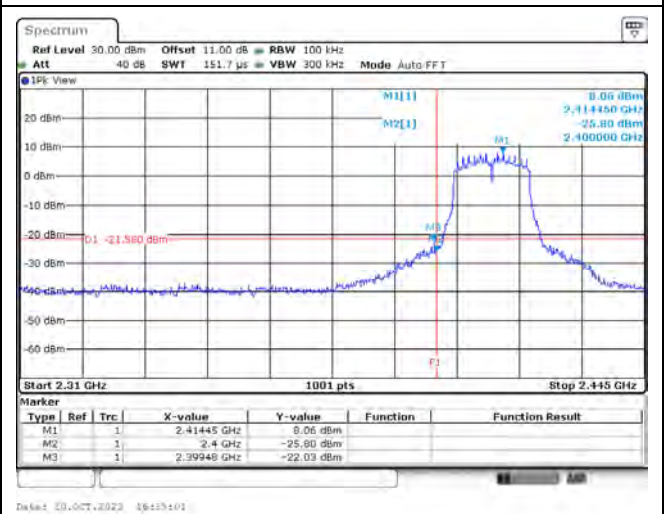


802.11g / 2417 MHz (Band Edge)




802.11g / 2422 MHz (Band Edge)

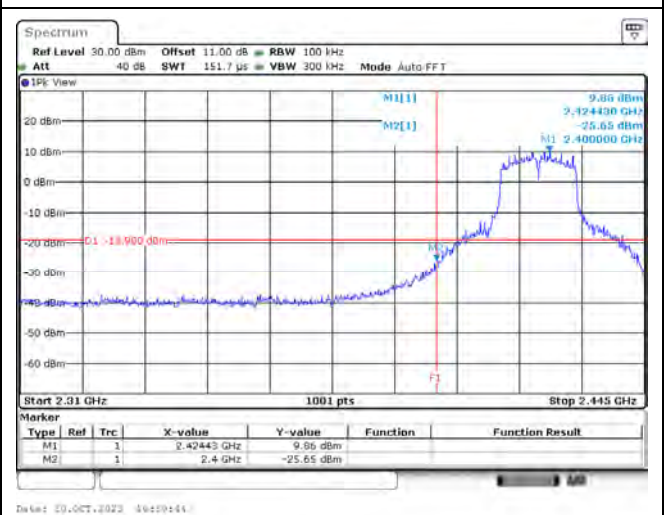


802.11g / 2452 MHz (Band Edge)

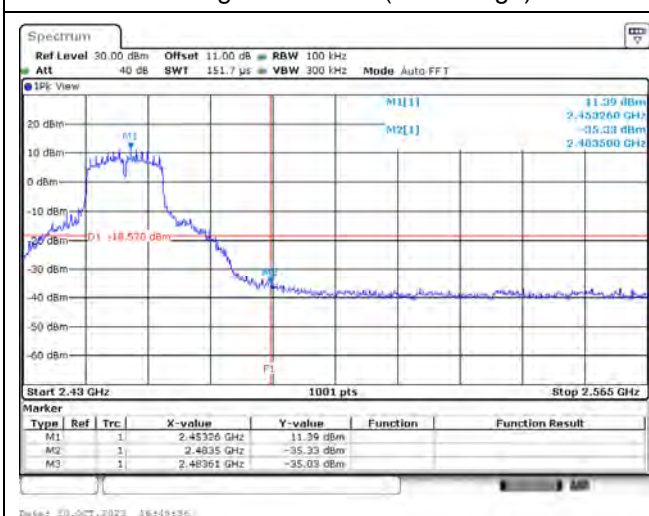


802.11g / 2457 MHz (Band Edge)

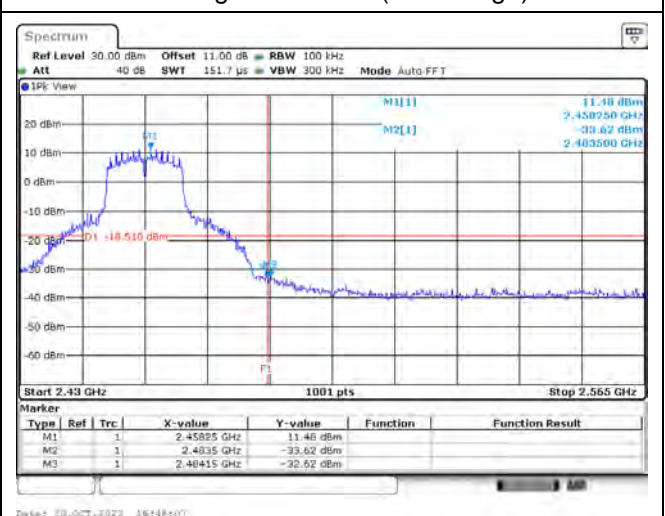


802.11g / 2462 MHz (Band Edge)

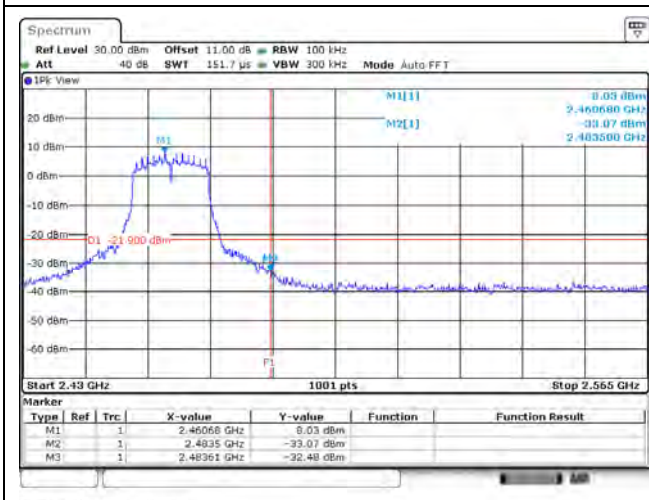


802.11n (20 MHz) / 2412 MHz (Band Edge)

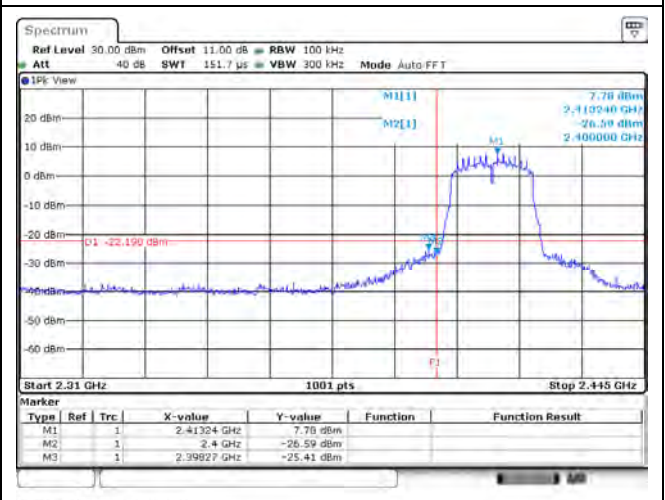


802.11n (20 MHz) / 2417 MHz (Band Edge)

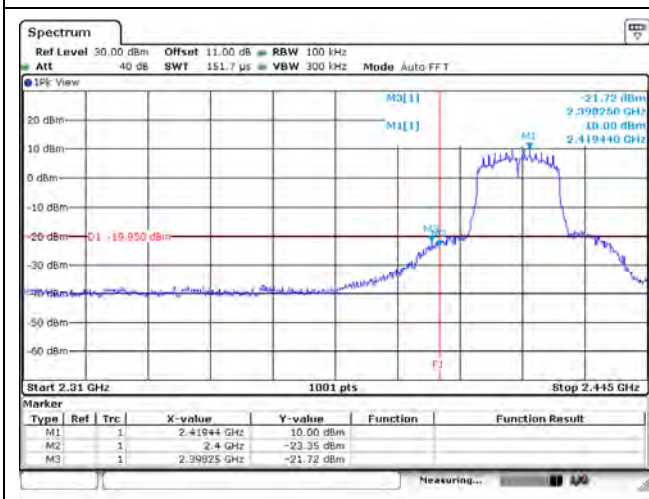


802.11n (20 MHz) / 2422 MHz (Band Edge)

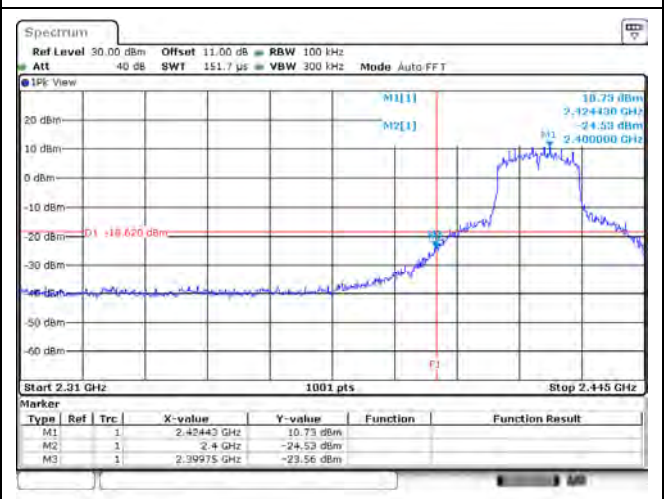


802.11n (20 MHz) / 2447 MHz (Band Edge)

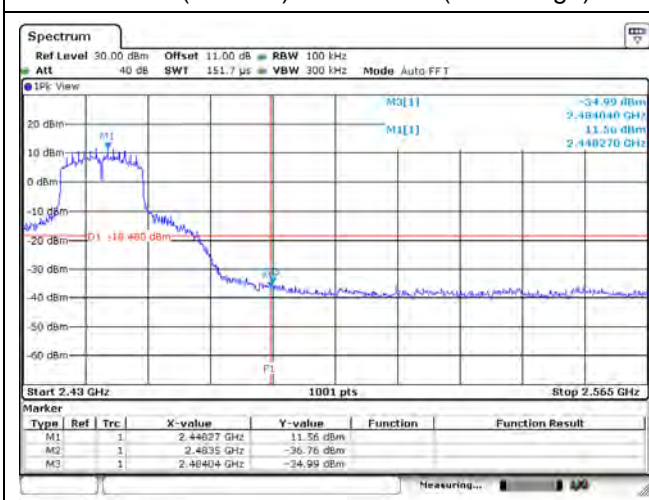


802.11n (20 MHz) / 2452 MHz (Band Edge)

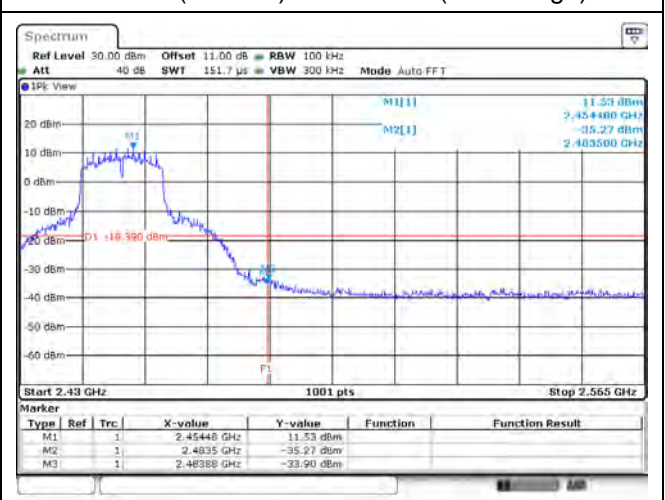

802.11n (20 MHz) / 2457 MHz (Band Edge)

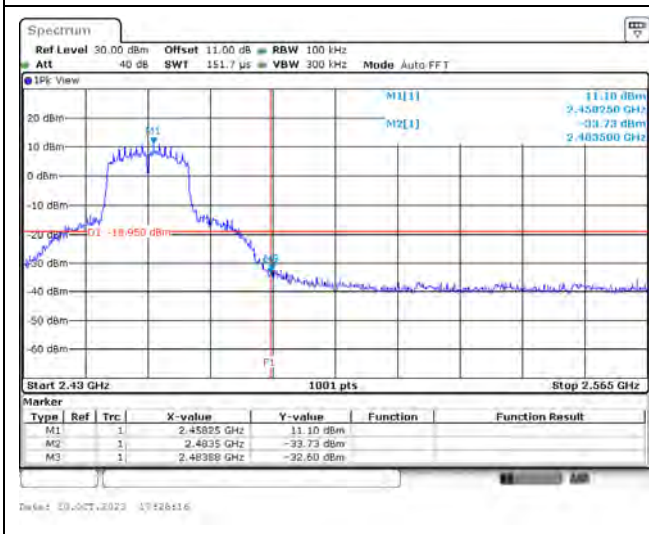


802.11n (20 MHz) / 2462 MHz (Band Edge)

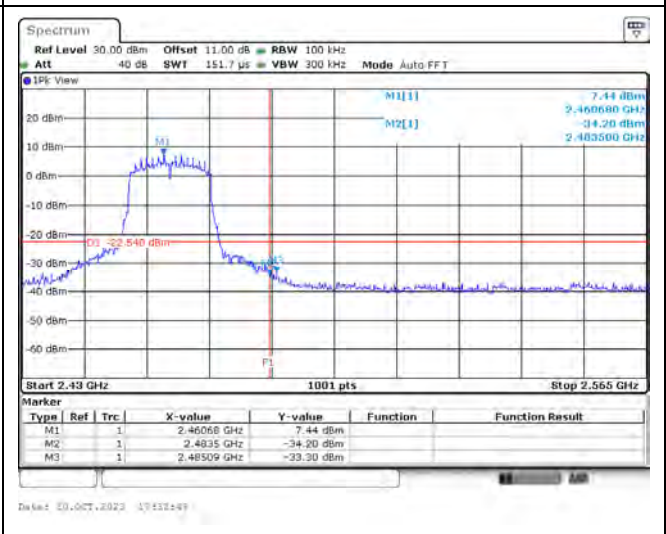

Appendix E. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Site :HC-CB04
 Condition :3m Horizontal
 Mode :LF_g_TX_2417MHz
 Test By :Ling

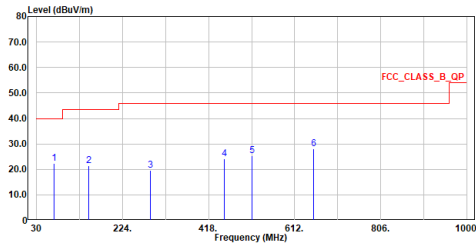


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	70.158	22.21	40.00	-17.79	26.89	-4.68	QP
2	148.389	21.46	43.50	-22.04	24.82	-3.36	QP
3	287.244	19.74	46.00	-26.26	22.60	-2.86	QP
4	453.017	24.05	46.00	-21.95	22.49	1.56	QP
5	516.213	25.34	46.00	-20.66	22.56	2.78	QP
6	654.535	28.19	46.00	-17.81	22.53	5.66	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m Vertical
 Mode :LF_g_TX_2417MHz
 Test By :Ling

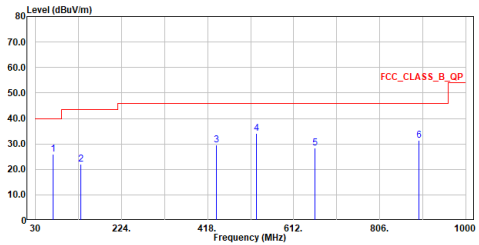


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	69.916	25.84	40.00	-14.16	30.46	-4.62	QP
2	131.414	21.99	43.50	-21.51	26.18	-4.19	QP
3	437.400	29.50	46.00	-16.50	28.39	1.11	QP
4	527.998	33.98	46.00	-12.02	31.01	2.97	QP
5	660.015	28.50	46.00	-17.50	22.82	5.68	QP
6	895.095	31.41	46.00	-14.59	22.60	8.81	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test By :Ling

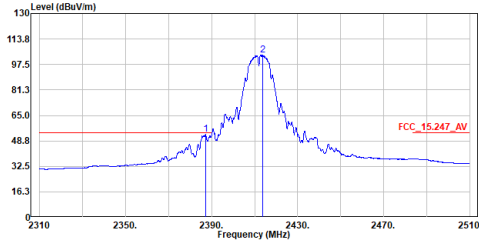

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.200	52.94	54.00	-1.06	42.36	10.58	Average
2	2413.700	103.51	-----	-----	92.83	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test By :Ling

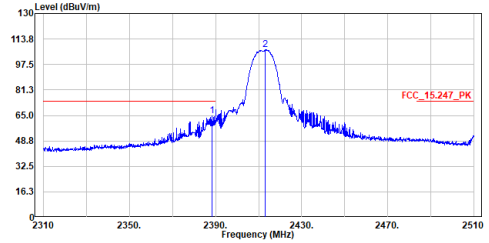

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.400	64.51	74.00	-9.49	53.93	10.58	Peak
2	2413.000	106.88	-----	-----	96.20	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test By :Ling

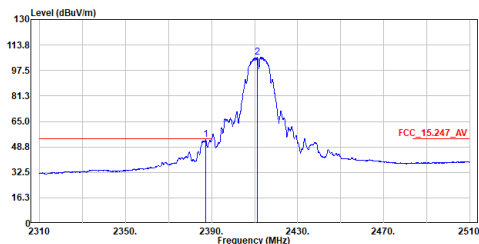

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.200	53.46	54.00	-0.54	42.88	10.58	Average
2	2411.200	105.99	-----	-----	95.31	10.68	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test By :Ling

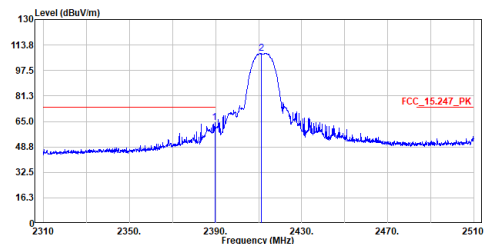

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.600	64.24	74.00	-9.76	53.65	10.59	Peak
2	2411.200	108.63	-----	-----	97.95	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2412MHz
 Test By :Ling

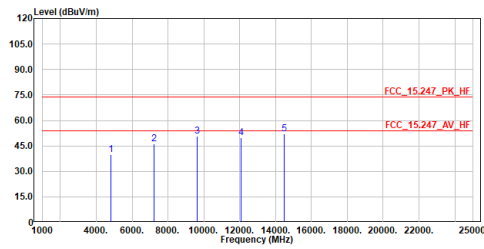

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	39.98	74.00	-34.02	57.81	-17.83	Peak
2	7236.000	46.19	74.00	-27.81	58.92	-12.73	Peak
3	9648.000	50.50	74.00	-23.50	59.56	-9.06	Peak
4	12860.000	49.72	74.00	-24.28	55.49	-5.77	Peak
5	14472.000	51.97	74.00	-22.03	54.92	-2.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2412MHz
 Test By :Ling

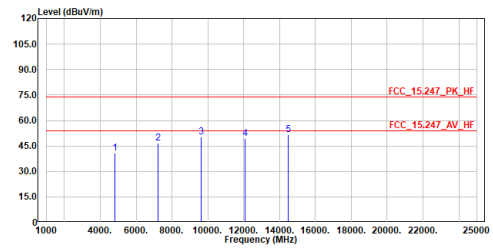

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.80	74.00	-33.20	58.63	-17.83	Peak
2	7236.000	46.42	74.00	-27.58	59.15	-12.73	Peak
3	9648.000	50.34	74.00	-23.66	59.40	-9.06	Peak
4	12860.000	49.28	74.00	-24.72	55.05	-5.77	Peak
5	14472.000	51.78	74.00	-22.22	54.73	-2.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test By :Ling

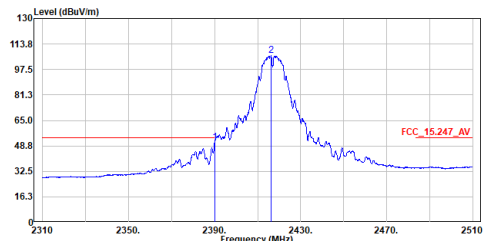

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	50.98	54.00	-3.02	40.39	10.59	Average
2	2416.300	106.22	-----	-----	95.52	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test By :Ling

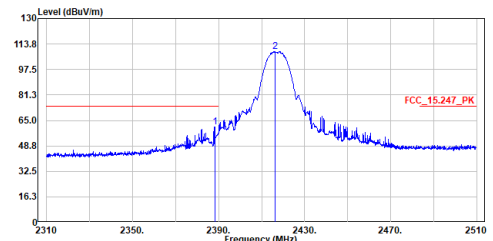

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.200	61.07	74.00	-12.93	50.49	10.58	Peak
2	2416.200	108.95	-----	-----	98.25	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test By :Ling

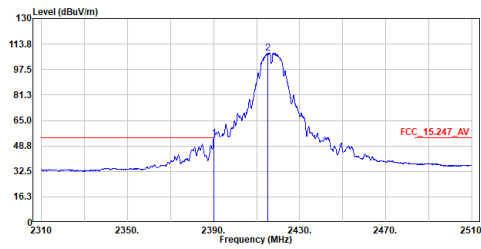

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	53.71	54.00	-0.29	43.12	10.59	Average
2	2415.200	108.13	-----	-----	97.43	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test By :Ling

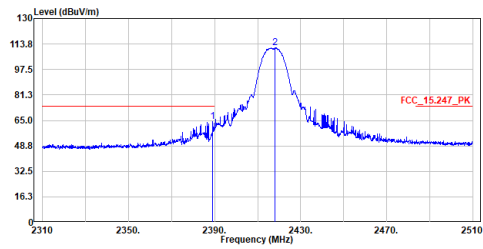

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.200	64.04	74.00	-9.96	53.46	10.58	Peak
2	2418.000	111.31	-----	-----	100.61	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2417MHz
 Test By :Ling

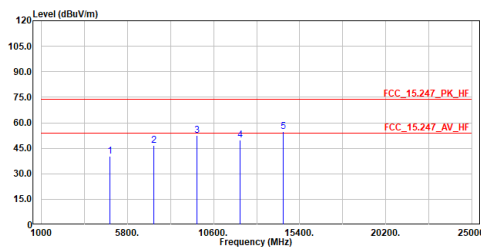

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	40.15	74.00	-33.85	57.95	-17.80	Peak
2	7251.000	46.81	74.00	-27.19	59.52	-12.71	Peak
3	9668.000	52.51	74.00	-21.49	61.55	-9.04	Peak
4	12085.000	49.62	74.00	-24.38	55.36	-5.74	Peak
5	14502.000	54.97	74.00	-19.03	57.89	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2417MHz
 Test By :Ling

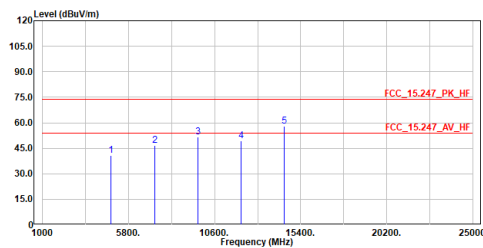

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	40.91	74.00	-33.09	58.71	-17.80	Peak
2	7251.000	46.68	74.00	-27.32	59.39	-12.71	Peak
3	9668.000	51.56	74.00	-22.44	60.60	-9.04	Peak
4	12085.000	49.42	74.00	-24.58	55.16	-5.74	Peak
5	14502.000	57.93	74.00	-16.07	60.85	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2422MHz
 Test By :Ling

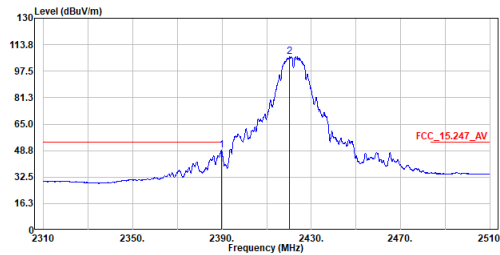

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	49.22	54.00	-4.78	38.63	10.59	Average
2	2420.300	106.36	-----	-----	95.64	10.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2422MHz
 Test By :Ling

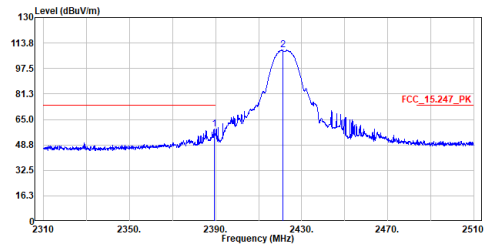

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	59.07	74.00	-14.93	48.48	10.59	Peak
2	2421.200	109.21	-----	-----	98.48	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2422MHz
 Test By :Ling

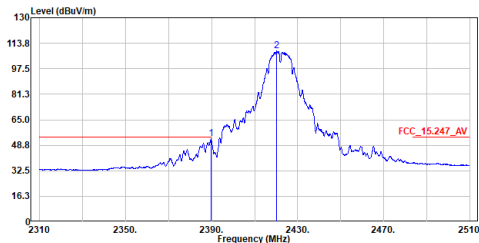

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	53.05	54.00	-0.95	42.46	10.59	Average
2	2420.280	108.75	-----	-----	98.03	10.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2422MHz
 Test By :Ling

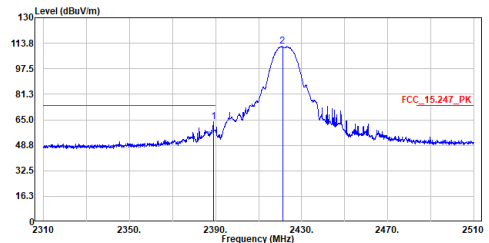

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.900	63.71	74.00	-10.29	53.13	10.58	Peak
2	2421.100	111.66	-----	-----	100.93	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2422MHz
 Test By :Ling

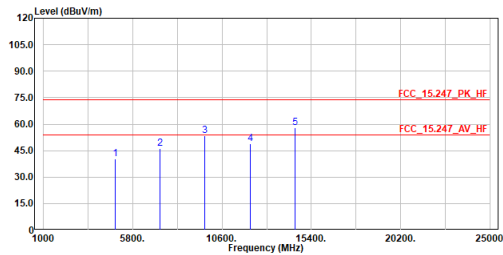

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.49	74.00	-33.51	58.26	-17.77	Peak
2	7266.000	46.29	74.00	-27.71	58.98	-12.69	Peak
3	9688.000	53.47	74.00	-20.53	62.48	-9.01	Peak
4	12110.000	48.88	74.00	-25.12	54.59	-5.71	Peak
5	14532.000	57.95	74.00	-16.05	60.88	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2422MHz
 Test By :Ling

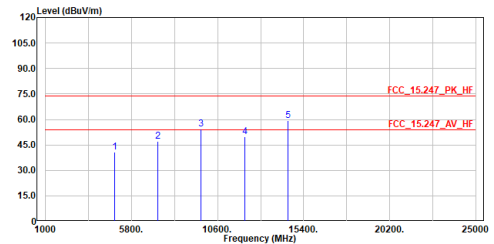

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.65	74.00	-33.35	58.42	-17.77	Peak
2	7266.000	47.07	74.00	-26.93	59.76	-12.69	Peak
3	9688.000	54.51	74.00	-19.49	63.52	-9.01	Peak
4	12110.000	49.63	74.00	-24.37	55.34	-5.71	Peak
5	14532.000	59.17	74.00	-14.83	62.10	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2427MHz
 Test By :Ling

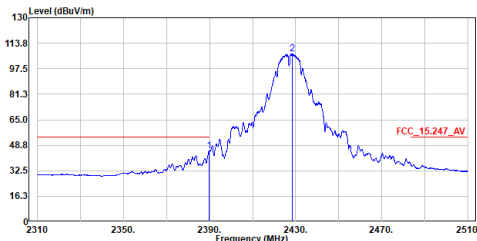

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	45.23	54.00	-8.77	34.64	10.59	Average
2	2428.300	106.83	-----	-----	96.08	10.75	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2427MHz
 Test By :Ling

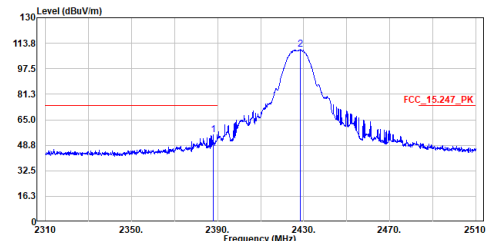

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.900	55.57	74.00	-18.43	44.99	10.58	Peak
2	2428.600	109.71	-----	-----	98.96	10.75	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2427MHz
 Test By :Ling

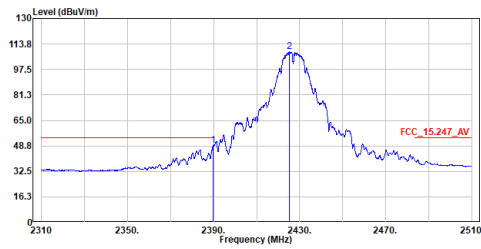

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	49.09	54.00	-4.91	38.50	10.59	Average
2	2425.300	108.97	-----	-----	98.23	10.74	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2427MHz
 Test By :Ling

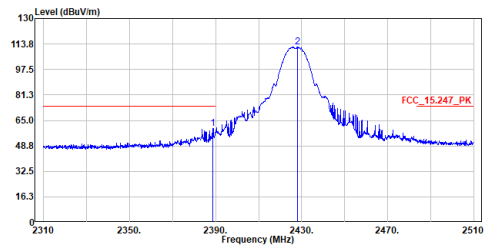

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.700	60.06	74.00	-13.94	49.48	10.58	Peak
2	2428.000	111.93	-----	-----	101.18	10.75	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2427MHz
 Test By :Ling

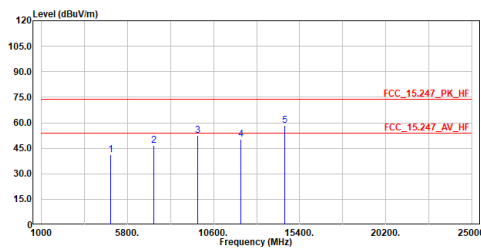

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	41.04	74.00	-32.96	58.78	-17.74	Peak
2	7281.000	46.68	74.00	-27.32	59.35	-12.67	Peak
3	9708.000	52.32	74.00	-21.68	61.29	-8.97	Peak
4	12135.000	50.21	74.00	-23.79	55.89	-5.68	Peak
5	14562.000	58.38	74.00	-15.62	61.35	-2.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2427MHz
 Test By :Ling

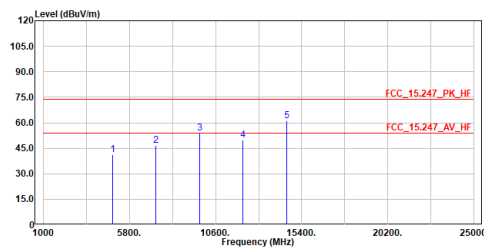

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4854.000	41.06	74.00	-32.94	58.80	-17.74	Peak
2	7281.000	46.52	74.00	-27.48	59.19	-12.67	Peak
3	9708.000	54.04	74.00	-19.96	63.01	-8.97	Peak
4	12135.000	49.88	74.00	-24.12	55.56	-5.68	Peak
5	14562.000	61.20	74.00	-12.80	64.15	-2.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test By :Ling

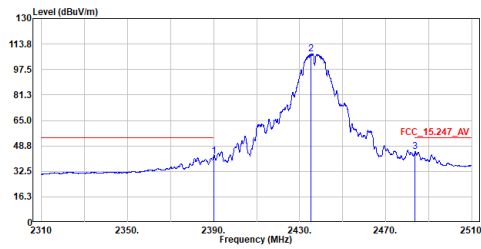

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	42.37	54.00	-11.63	31.78	10.59	Average
2	2435.200	107.48	-----	-----	96.70	10.78	Average
3	2483.700	45.05	54.00	-8.95	34.06	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test By :Ling

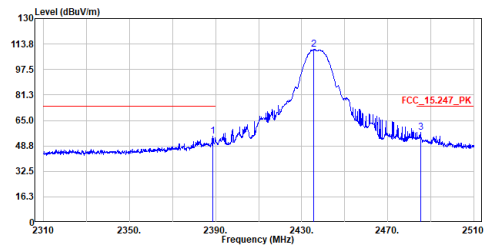

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.600	54.80	74.00	-19.20	44.22	10.58	Peak
2	2435.200	110.29	-----	-----	99.51	10.78	Peak
3	2485.200	57.40	74.00	-16.60	46.40	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test By :Ling

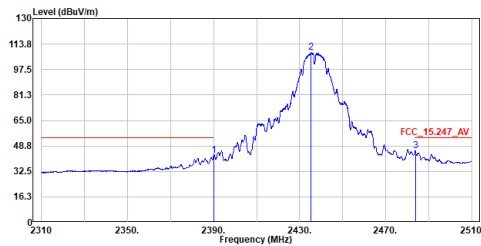

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	42.55	54.00	-11.45	31.96	10.59	Average
2	2435.300	108.26	-----	-----	97.48	10.78	Average
3	2483.800	45.41	54.00	-8.59	34.42	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test By :Ling

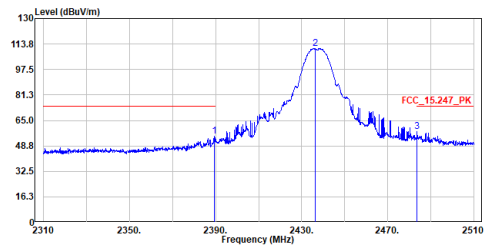

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.300	54.76	74.00	-19.24	44.17	10.59	Peak
2	2436.200	111.03	-----	-----	100.24	10.79	Peak
3	2483.700	57.87	74.00	-16.13	46.88	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2437MHz
 Test By :Ling

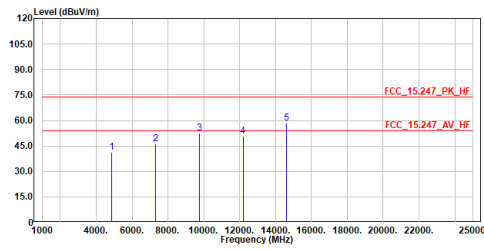

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	41.05	74.00	-32.95	58.72	-17.67	Peak
2	7311.000	46.38	74.00	-27.62	59.00	-12.62	Peak
3	9748.000	52.71	74.00	-21.29	61.64	-8.93	Peak
4	12185.000	50.64	74.00	-23.36	56.25	-5.61	Peak
5	14622.100	58.44	74.00	-15.56	61.44	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2437MHz
 Test By :Ling

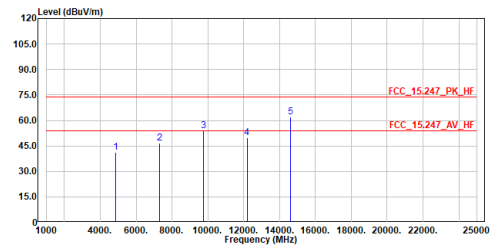

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	41.38	74.00	-32.62	59.05	-17.67	Peak
2	7311.000	46.48	74.00	-27.52	59.10	-12.62	Peak
3	9748.000	54.04	74.00	-19.96	62.97	-8.93	Peak
4	12185.000	49.82	74.00	-24.18	55.43	-5.61	Peak
5	14622.100	61.98	74.00	-12.02	64.98	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2452MHz
 Test By :Ling

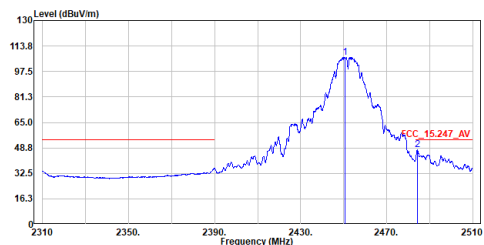

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.700	106.67	-----	-----	95.83	10.84	Average
2	2484.300	47.75	54.00	-6.25	36.75	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2452MHz
 Test By :Ling

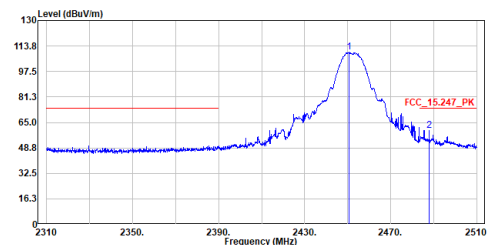

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.600	109.69	-----	-----	98.85	10.84	Peak
2	2487.900	59.95	74.00	-14.05	48.94	11.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2452MHz
 Test By :Ling

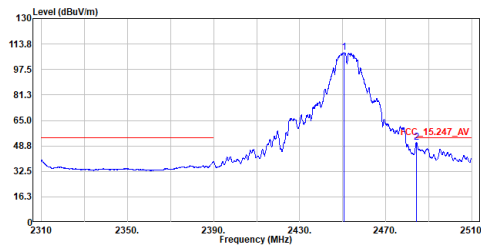

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.800	108.19	-----	-----	97.35	10.84	Average
2	2484.300	51.26	54.00	-2.74	40.26	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2452MHz
 Test By :Ling

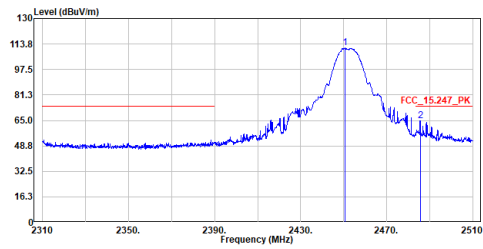

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.600	111.16	-----	-----	100.32	10.84	Peak
2	2485.600	64.72	74.00	-9.28	53.72	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2452MHz
 Test By :Ling

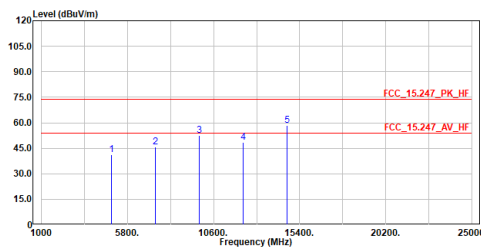

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	41.07	74.00	-32.93	58.65	-17.58	Peak
2	7356.000	45.96	74.00	-28.04	58.51	-12.55	Peak
3	9808.000	52.35	74.00	-21.65	61.18	-8.83	Peak
4	12260.000	48.45	74.00	-25.55	53.98	-5.53	Peak
5	14712.000	58.20	74.00	-15.80	61.24	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2452MHz
 Test By :Ling

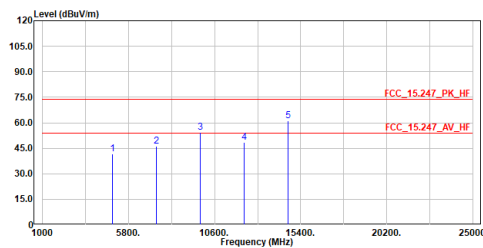

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	41.86	74.00	-32.14	59.44	-17.58	Peak
2	7356.000	46.00	74.00	-28.00	58.55	-12.55	Peak
3	9808.000	54.23	74.00	-19.77	63.06	-8.83	Peak
4	12260.000	48.64	74.00	-25.36	54.17	-5.53	Peak
5	14712.000	61.13	74.00	-12.87	64.17	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test By :Ling

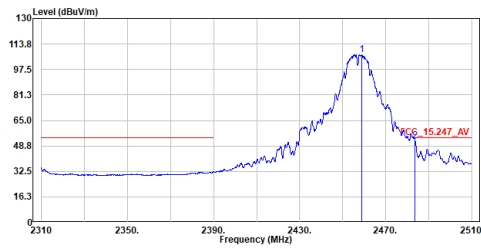

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.800	106.92	-----	-----	96.04	10.88	Average
2	2483.600	51.84	54.00	-2.16	40.86	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test By :Ling

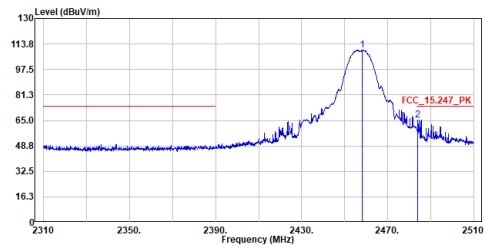

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.000	109.91	-----	-----	99.04	10.87	Peak
2	2484.000	65.37	74.00	-8.63	54.38	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test By :Ling

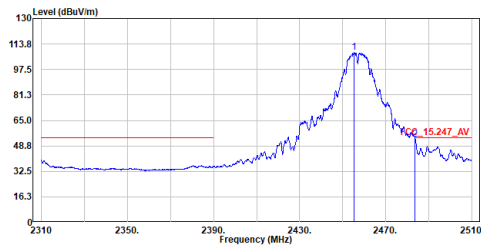

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.300	108.18	-----	-----	97.31	10.87	Average
2	2483.600	53.13	54.00	-0.87	42.15	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test By :Ling

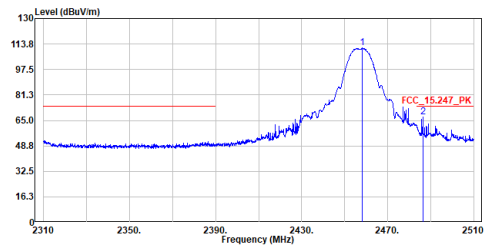

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.100	111.11	-----	-----	100.24	10.87	Peak
2	2486.400	67.08	74.00	-6.92	56.07	11.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2457MHz
 Test By :Ling

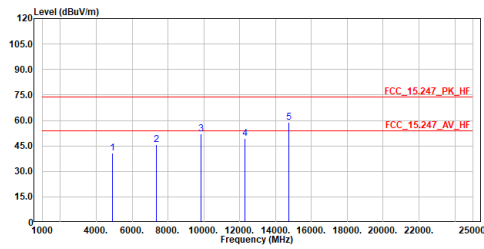

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.81	74.00	-33.19	58.37	-17.56	Peak
2	7371.000	45.89	74.00	-28.11	58.42	-12.53	Peak
3	9828.000	52.08	74.00	-21.92	60.90	-8.82	Peak
4	12285.000	49.38	74.00	-24.62	54.87	-5.49	Peak
5	14742.000	58.83	74.00	-15.17	61.91	-3.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2457MHz
 Test By :Ling

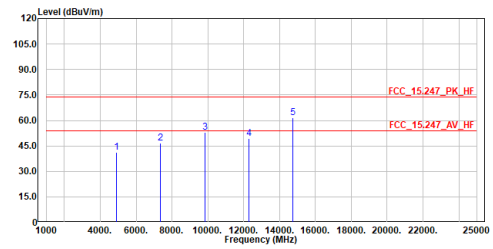

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	41.18	74.00	-32.82	58.74	-17.56	Peak
2	7371.000	46.77	74.00	-27.23	59.30	-12.53	Peak
3	9828.000	52.76	74.00	-21.24	61.58	-8.82	Peak
4	12285.000	49.25	74.00	-24.75	54.74	-5.49	Peak
5	14742.000	61.54	74.00	-12.46	64.62	-3.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test By :Ling

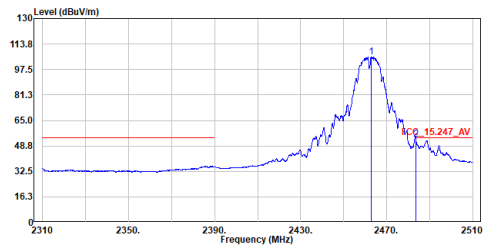

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.700	105.42	-----	-----	94.52	10.90	Average
2	2483.600	52.82	54.00	-1.18	41.84	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test By :Ling

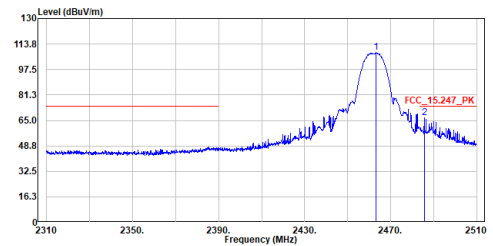

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.100	108.22	-----	-----	97.32	10.90	Peak
2	2485.600	66.48	74.00	-7.52	55.48	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test By :Ling

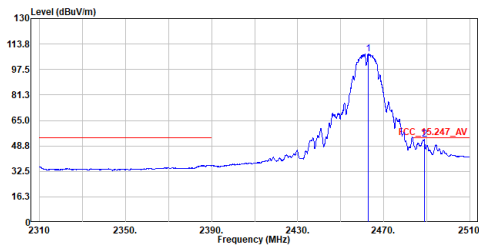

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.700	107.35	-----	-----	96.45	10.90	Average
2	2488.800	53.20	54.00	-0.80	42.19	11.01	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test By :Ling

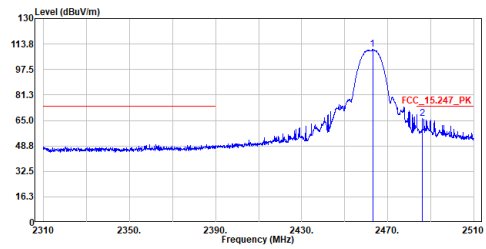

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.000	110.26	-----	-----	99.36	10.90	Peak
2	2486.000	66.37	74.00	-7.63	55.37	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :b_TX_2462MHz
 Test By :Ling

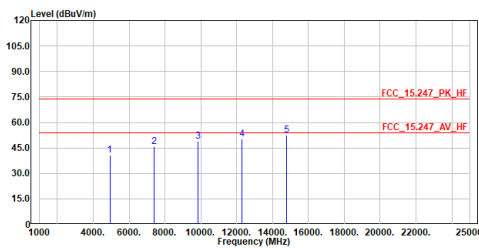

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.85	74.00	-33.15	58.37	-17.52	Peak
2	7386.000	45.67	74.00	-28.33	58.18	-12.51	Peak
3	9848.000	49.06	74.00	-24.94	57.84	-8.78	Peak
4	12310.000	50.42	74.00	-23.58	55.89	-5.47	Peak
5	14772.000	52.33	74.00	-21.67	55.42	-3.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :b_TX_2462MHz
 Test By :Ling

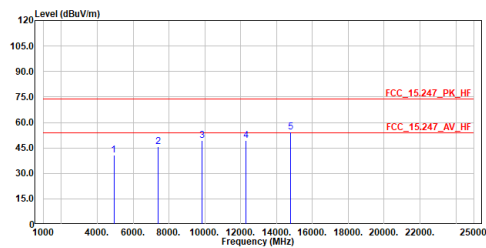

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.91	74.00	-33.09	58.43	-17.52	Peak
2	7386.000	45.53	74.00	-28.47	58.04	-12.51	Peak
3	9848.000	49.53	74.00	-24.47	58.31	-8.78	Peak
4	12310.000	49.54	74.00	-24.46	55.01	-5.47	Peak
5	14772.000	54.50	74.00	-19.50	57.59	-3.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test By :Ling

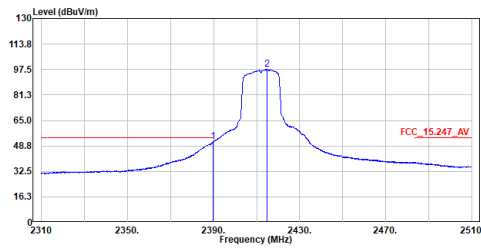

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	51.33	54.00	-2.67	40.74	10.59	Average
2	2414.700	97.44	-----	-----	86.74	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test By :Ling

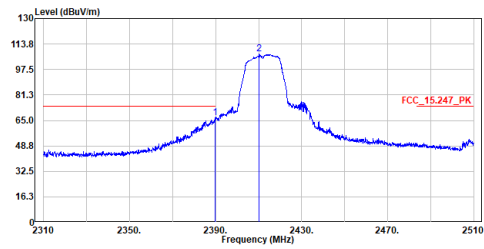

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	66.65	74.00	-7.35	56.06	10.59	Peak
2	2410.300	107.34	-----	-----	96.66	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test By :Ling

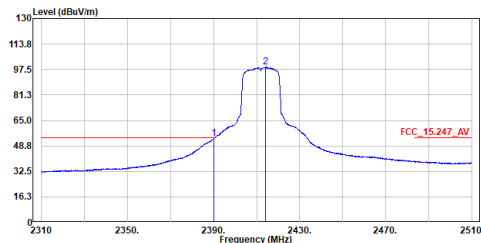

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	53.31	54.00	-0.69	42.72	10.59	Average
2	2414.100	98.92	-----	-----	88.23	10.69	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test By :Ling

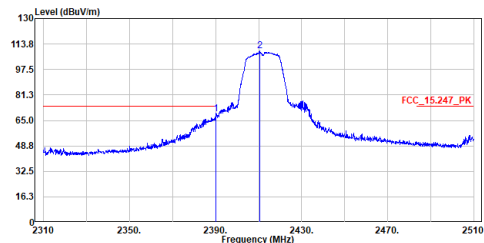

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	69.11	74.00	-4.89	58.52	10.59	Peak
2	2410.400	109.17	-----	-----	98.49	10.68	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2412MHz
 Test By :Ling

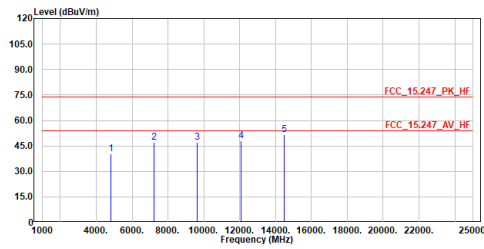

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.22	74.00	-33.78	58.05	-17.83	Peak
2	7236.000	47.00	74.00	-27.00	59.73	-12.73	Peak
3	9648.000	46.91	74.00	-27.09	55.97	-9.06	Peak
4	12860.000	48.17	74.00	-25.83	53.94	-5.77	Peak
5	14472.000	51.54	74.00	-22.46	54.49	-2.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2412MHz
 Test By :Ling

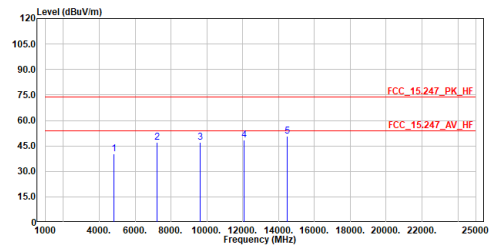

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.14	74.00	-33.86	57.97	-17.83	Peak
2	7236.000	47.19	74.00	-26.81	59.92	-12.73	Peak
3	9648.000	46.99	74.00	-27.01	56.05	-9.06	Peak
4	12860.000	48.65	74.00	-25.35	54.42	-5.77	Peak
5	14472.000	50.65	74.00	-23.35	53.60	-2.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test By :Ling

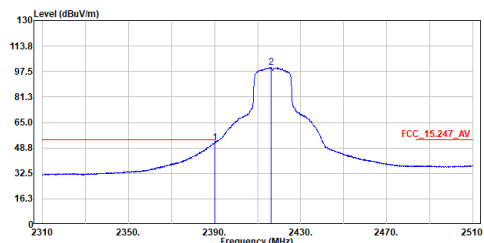

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	52.18	54.00	-1.82	41.59	10.59	Average
2	2416.200	100.18	-----	-----	89.48	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test By :Ling

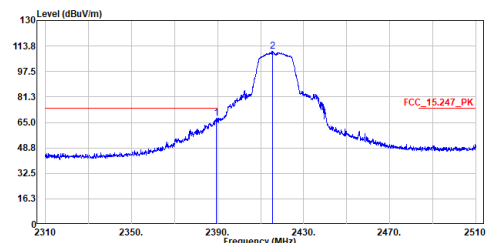

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.400	67.67	74.00	-6.33	57.08	10.59	Peak
2	2415.400	110.61	-----	-----	99.91	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test By :Ling

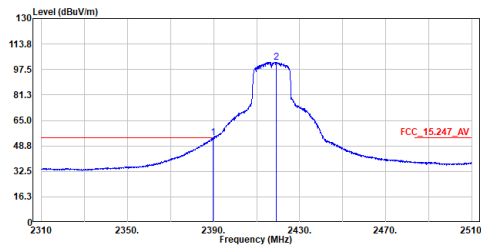

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	53.96	54.00	-0.04	43.37	10.59	Average
2	2419.000	102.17	54.00	48.17	91.46	10.71	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test By :Ling

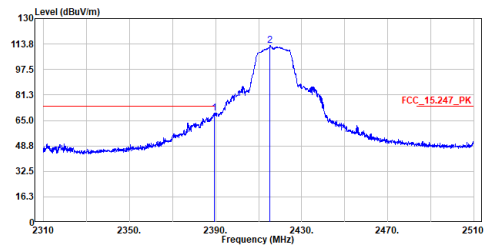

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.400	69.75	74.00	-4.25	59.16	10.59	Peak
2	2415.300	112.70	74.00	38.70	102.00	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2417MHz
 Test By :Ling

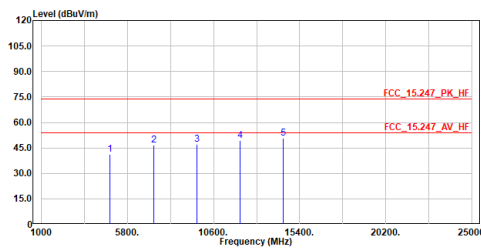

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	41.02	74.00	-32.98	58.82	-17.80	Peak
2	7251.000	46.61	74.00	-27.39	59.32	-12.71	Peak
3	9668.000	47.07	74.00	-26.93	56.11	-9.04	Peak
4	12085.000	49.43	74.00	-24.57	55.17	-5.74	Peak
5	14502.000	50.64	74.00	-23.36	53.56	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2417MHz
 Test By :Ling

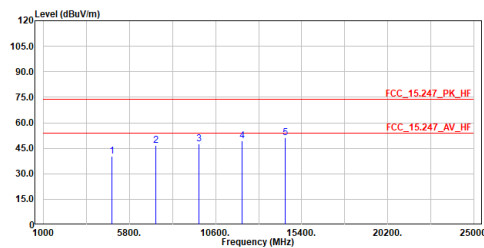

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	40.48	74.00	-33.52	58.28	-17.80	Peak
2	7251.000	46.59	74.00	-27.41	59.30	-12.71	Peak
3	9668.000	47.51	74.00	-26.49	56.55	-9.04	Peak
4	12085.000	49.40	74.00	-24.60	55.14	-5.74	Peak
5	14502.000	51.03	74.00	-22.97	53.95	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2422MHz
 Test By :Ling

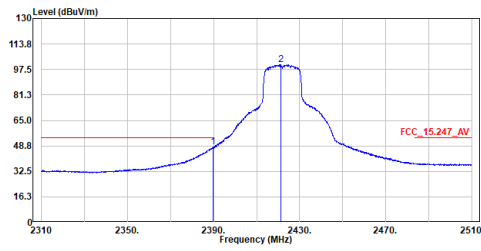

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	47.96	54.00	-6.04	37.37	10.59	Average
2	2421.200	100.60	-----	-----	89.87	10.73	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2422MHz
 Test By :Ling

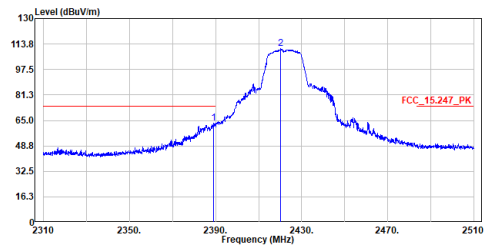

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.100	63.50	74.00	-10.50	52.92	10.58	Peak
2	2420.300	110.94	-----	-----	100.22	10.72	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2422MHz
 Test By :Ling

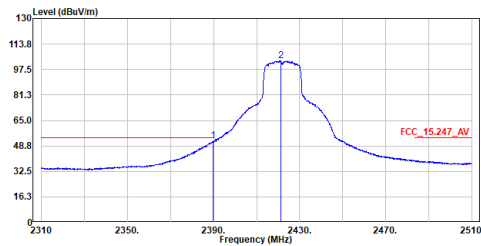

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	52.07	54.00	-1.93	41.48	10.59	Average
2	2421.200	102.95	-----	-----	92.22	10.73	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2422MHz
 Test By :Ling

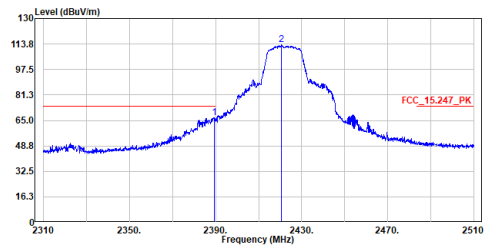

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.400	66.92	74.00	-7.08	56.33	10.59	Peak
2	2420.500	113.27	-----	-----	102.55	10.72	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2422MHz
 Test By :Ling

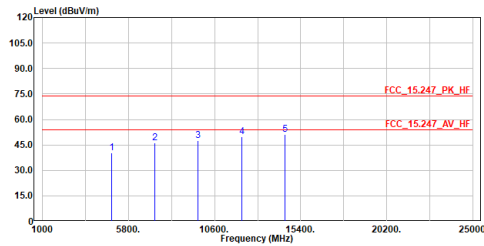

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.28	74.00	-33.72	58.05	-17.77	Peak
2	7266.000	46.25	74.00	-27.75	58.94	-12.69	Peak
3	9688.000	47.73	74.00	-26.27	56.74	-9.01	Peak
4	12110.000	49.99	74.00	-24.01	55.70	-5.71	Peak
5	14532.000	51.24	74.00	-22.76	54.17	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2422MHz
 Test By :Ling

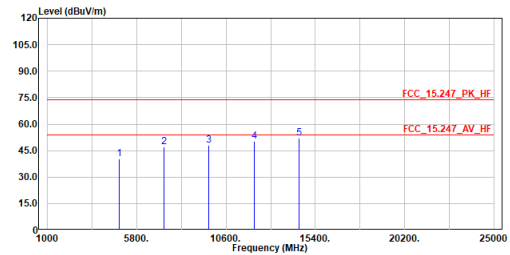

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	40.37	74.00	-33.63	58.14	-17.77	Peak
2	7266.000	47.22	74.00	-26.78	59.91	-12.69	Peak
3	9688.000	48.07	74.00	-25.93	57.08	-9.01	Peak
4	12110.000	50.42	74.00	-23.58	56.13	-5.71	Peak
5	14532.000	52.29	74.00	-21.71	55.22	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test By :Ling

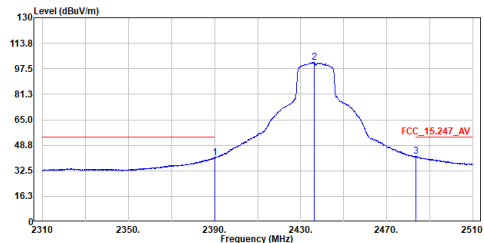

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	40.89	54.00	-13.11	30.30	10.59	Average
2	2436.300	101.37	-----	-----	90.58	10.79	Average
3	2483.600	41.47	54.00	-12.53	30.49	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test By :Ling

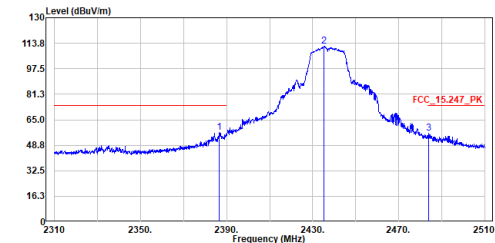

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2386.500	56.82	74.00	-17.18	46.24	10.58	Peak
2	2435.300	111.88	-----	-----	101.10	10.78	Peak
3	2484.000	56.27	74.00	-17.73	45.28	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test By :Ling

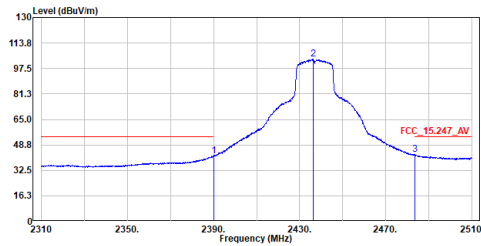

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	41.63	54.00	-12.37	31.04	10.59	Average
2	2436.200	103.34	-----	-----	92.55	10.79	Average
3	2483.700	42.57	54.00	-11.43	31.58	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test By :Ling

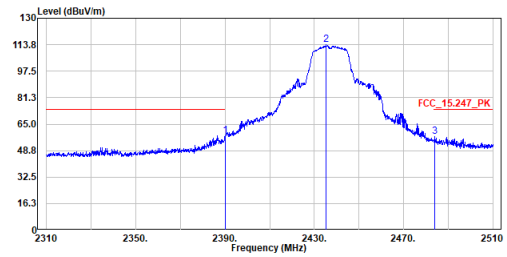

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	57.90	74.00	-16.10	47.31	10.59	Peak
2	2435.400	113.80	-----	-----	103.02	10.78	Peak
3	2483.900	57.30	74.00	-16.70	46.31	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2437MHz
 Test By :Ling

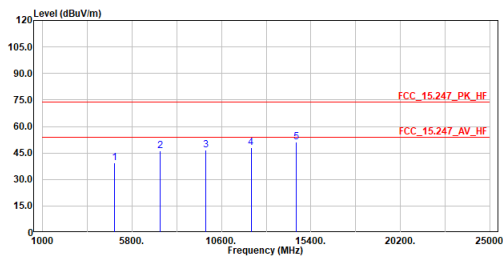

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	39.56	74.00	-34.44	57.23	-17.67	Peak
2	7311.000	46.32	74.00	-27.68	58.94	-12.62	Peak
3	9748.000	46.46	74.00	-27.54	55.39	-8.93	Peak
4	12185.000	48.03	74.00	-25.97	53.64	-5.61	Peak
5	14622.000	51.20	74.00	-22.80	54.20	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2437MHz
 Test By :Ling

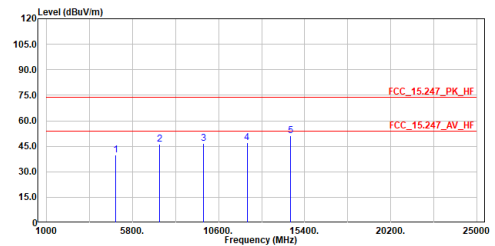

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.02	74.00	-33.98	57.69	-17.67	Peak
2	7311.000	46.25	74.00	-27.75	58.87	-12.62	Peak
3	9748.000	46.57	74.00	-27.43	55.50	-8.93	Peak
4	12185.000	47.02	74.00	-26.98	52.63	-5.61	Peak
5	14622.000	51.31	74.00	-22.69	54.31	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2452MHz
 Test By :Ling

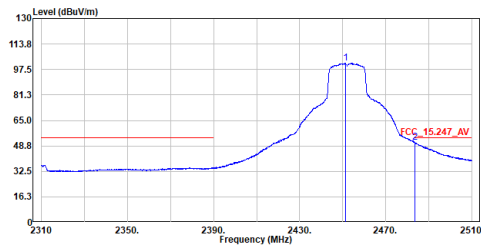

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2451.300	101.51	-----	-----	90.66	10.85	Average
2	2483.600	51.03	54.00	-2.97	40.05	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2452MHz
 Test By :Ling

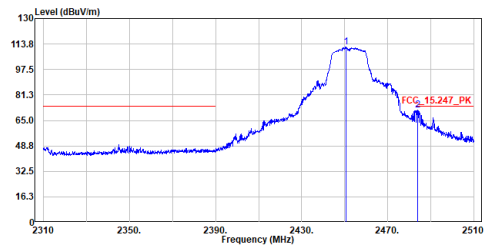

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.500	111.84	-----	-----	101.00	10.84	Peak
2	2483.800	71.51	74.00	-2.49	60.52	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2452MHz
 Test By :Ling

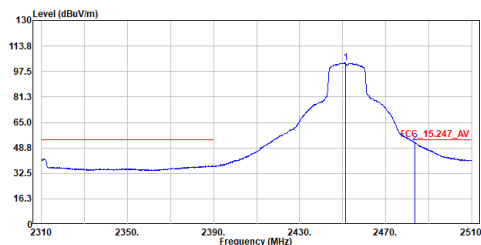

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2451.200	102.93	-----	-----	92.08	10.85	Average
2	2483.700	52.14	54.00	-1.86	41.15	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2452MHz
 Test By :Ling

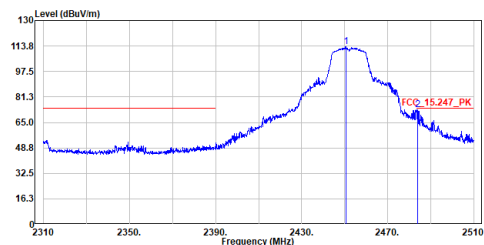

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.500	113.33	-----	-----	102.49	10.84	Peak
2	2483.900	73.29	74.00	-0.71	62.30	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2452MHz
 Test By :Ling

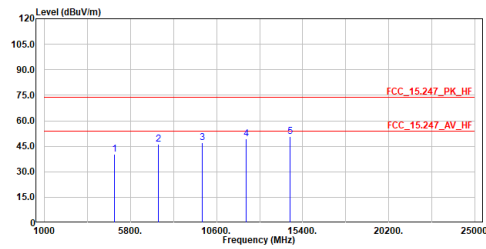

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	40.47	74.00	-33.53	58.05	-17.58	Peak
2	7356.000	46.06	74.00	-27.94	58.61	-12.55	Peak
3	9808.000	46.95	74.00	-27.05	55.78	-8.83	Peak
4	12260.000	49.30	74.00	-24.70	54.83	-5.53	Peak
5	14712.000	50.76	74.00	-23.24	53.80	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2452MHz
 Test By :Ling

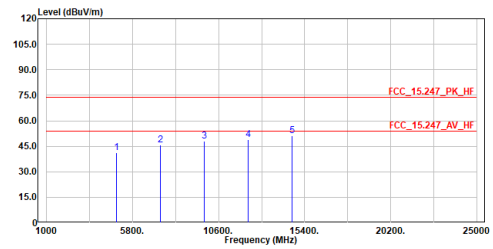

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	41.06	74.00	-32.94	58.64	-17.58	Peak
2	7356.000	45.83	74.00	-28.17	58.38	-12.55	Peak
3	9808.000	48.02	74.00	-25.98	56.85	-8.83	Peak
4	12260.000	48.69	74.00	-25.31	54.22	-5.53	Peak
5	14712.000	51.39	74.00	-22.61	54.43	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test By :Ling

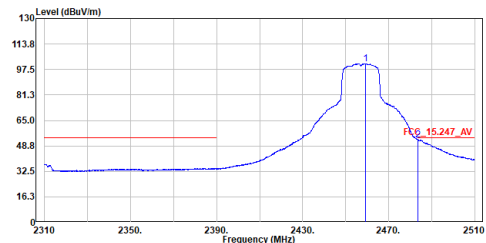

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2459.200	101.29	-----	-----	90.40	10.89	Average
2	2483.700	52.70	54.00	-1.30	41.71	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test By :Ling

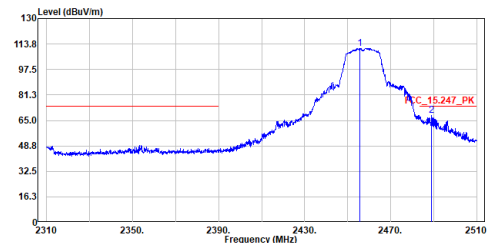

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.800	111.03	-----	-----	100.16	10.87	Peak
2	2488.900	67.96	74.00	-6.04	56.95	11.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test By :Ling

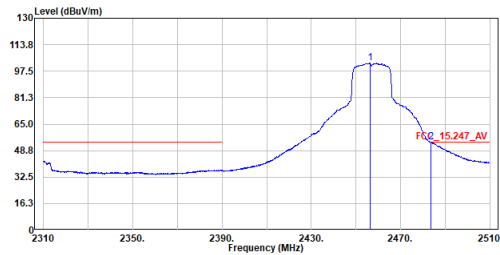


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2456.300	102.37	74.00	-	91.50	10.87	Average
2	2483.600	53.93	54.00	-0.07	42.95	10.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test By :Ling

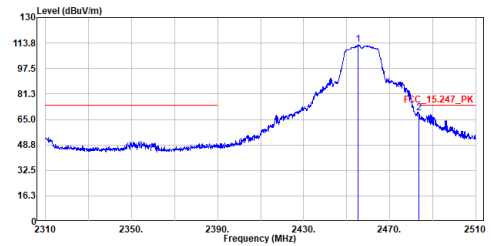


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2455.200	112.68	74.00	-	101.81	10.87	Peak
2	2483.700	68.97	74.00	-5.03	57.98	10.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2457MHz
 Test By :Ling

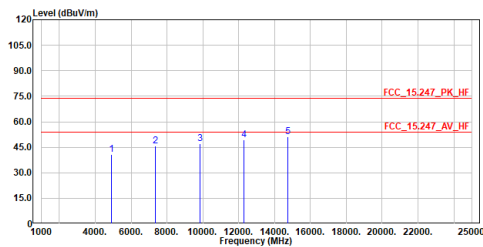


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.66	74.00	-33.34	58.22	-17.56	Peak
2	7371.000	45.75	74.00	-28.25	58.28	-12.53	Peak
3	9828.000	47.12	74.00	-26.88	55.94	-8.82	Peak
4	12285.000	49.47	74.00	-24.53	54.96	-5.49	Peak
5	14742.000	51.37	74.00	-22.63	54.45	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2457MHz
 Test By :Ling

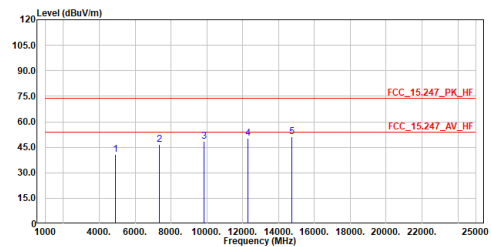


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.81	74.00	-33.19	58.37	-17.56	Peak
2	7371.000	46.55	74.00	-27.45	59.08	-12.53	Peak
3	9828.000	48.34	74.00	-25.66	57.16	-8.82	Peak
4	12285.000	50.39	74.00	-23.61	55.88	-5.49	Peak
5	14742.000	51.01	74.00	-22.99	54.09	-3.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test By :Ling

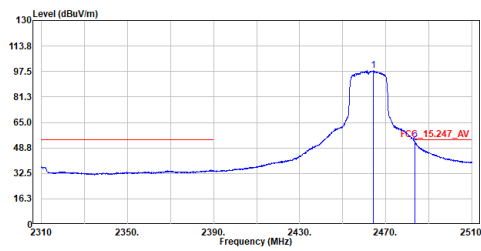

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2464.200	97.91	-----	-----	87.00	10.91	Average
2	2483.600	52.54	54.00	-1.46	41.56	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test By :Ling

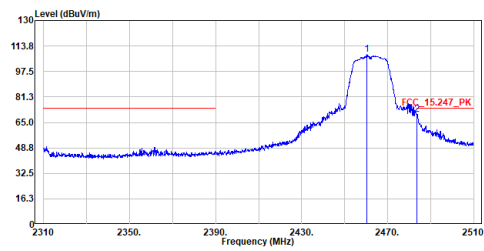

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.300	108.29	-----	-----	97.40	10.89	Peak
2	2483.700	70.37	74.00	-3.63	59.38	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test By :Ling

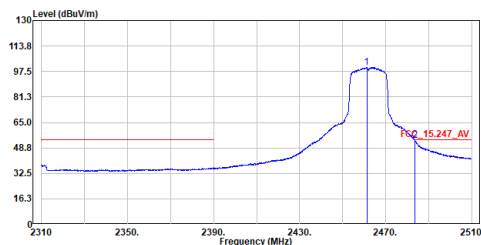

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.200	100.13	-----	-----	89.24	10.89	Average
2	2483.600	53.32	54.00	-0.68	42.34	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test By :Ling

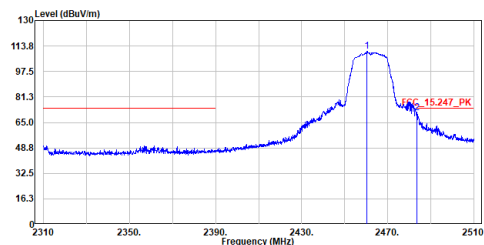

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2460.400	110.54	-----	-----	99.65	10.89	Peak
2	2483.600	71.21	74.00	-2.79	60.23	10.98	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :g_TX_2462MHz
 Test By :Ling

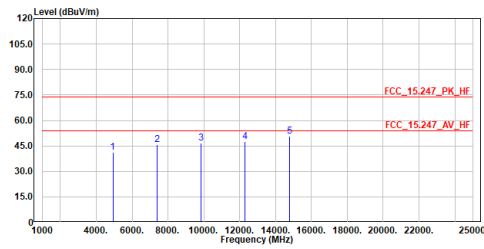

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.02	74.00	-32.98	58.54	-17.52	Peak
2	7386.000	45.68	74.00	-28.32	58.19	-12.51	Peak
3	9848.000	46.81	74.00	-27.19	55.59	-8.78	Peak
4	12310.000	47.42	74.00	-26.58	52.89	-5.47	Peak
5	14772.000	50.71	74.00	-23.29	53.80	-3.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :g_TX_2462MHz
 Test By :Ling

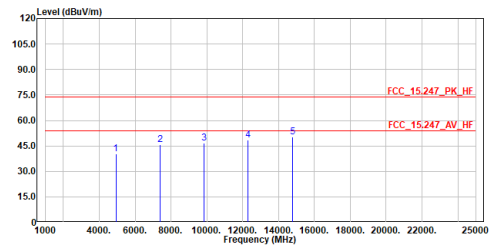

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.09	74.00	-33.91	57.61	-17.52	Peak
2	7386.000	45.62	74.00	-28.38	58.13	-12.51	Peak
3	9848.000	46.71	74.00	-27.29	55.49	-8.78	Peak
4	12310.000	48.31	74.00	-25.69	53.78	-5.47	Peak
5	14772.000	50.17	74.00	-23.83	53.26	-3.09	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2412MHz
 Test By :Ling

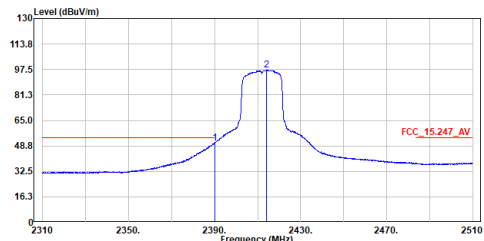

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	50.54	54.00	-3.46	39.95	10.59	Average
2	2414.100	97.07	-----	-----	86.38	10.69	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2412MHz
 Test By :Ling

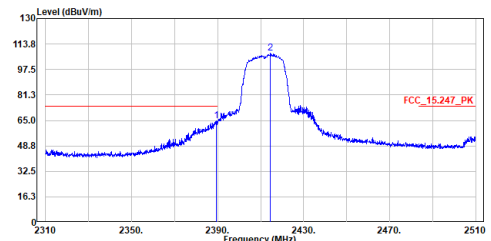

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.500	64.73	74.00	-9.27	54.14	10.59	Peak
2	2414.600	107.89	-----	-----	97.19	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2412MHz
 Test By :Ling

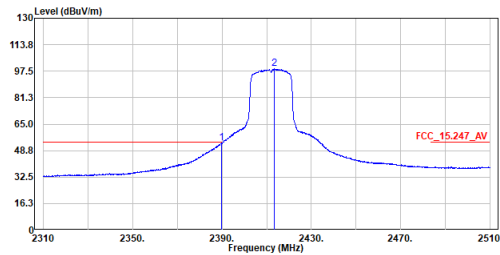


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	53.48	54.00	-0.52	42.89	10.59	Average
2	2413.500	98.87	-----	-----	88.19	10.68	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2412MHz
 Test By :Ling

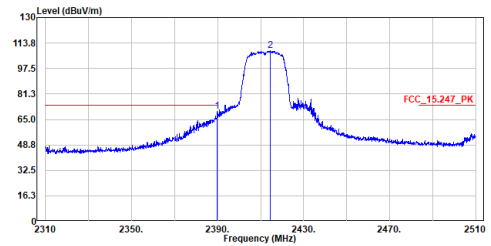


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	70.25	74.00	-3.75	59.66	10.59	Peak
2	2414.400	108.79	-----	-----	98.10	10.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2412MHz
 Test By :Ling

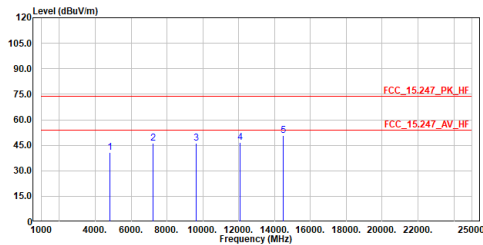


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.90	74.00	-33.10	58.73	-17.83	Peak
2	7236.000	46.32	74.00	-27.68	59.05	-12.73	Peak
3	9648.000	46.18	74.00	-27.82	55.24	-9.06	Peak
4	12060.000	46.72	74.00	-27.28	52.49	-5.77	Peak
5	14472.000	50.73	74.00	-23.27	53.68	-2.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2412MHz
 Test By :Ling

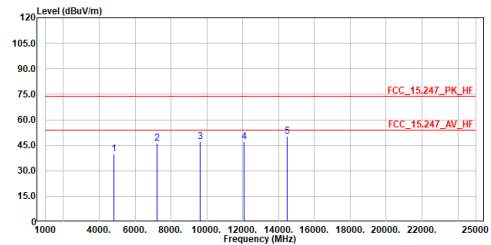


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	39.75	74.00	-34.25	57.58	-17.83	Peak
2	7236.000	46.05	74.00	-27.95	58.78	-12.73	Peak
3	9648.000	47.09	74.00	-26.91	56.15	-9.06	Peak
4	12060.000	47.13	74.00	-26.87	52.90	-5.77	Peak
5	14472.000	50.20	74.00	-23.80	53.15	-2.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2417MHz
 Test By :Ling

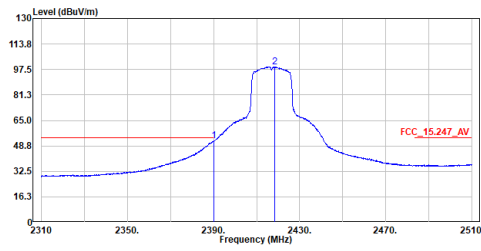

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	51.93	54.00	-2.07	41.34	10.59	Average
2	2418.300	99.31	-----	-----	88.61	10.70	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2417MHz
 Test By :Ling

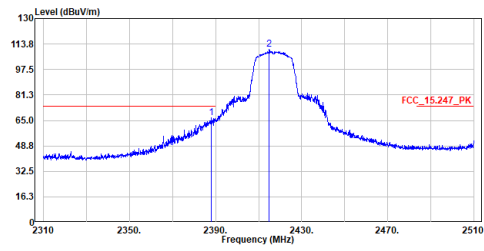

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.900	66.78	74.00	-7.22	56.20	10.58	Peak
2	2414.800	110.25	-----	-----	99.55	10.70	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2417MHz
 Test By :Ling

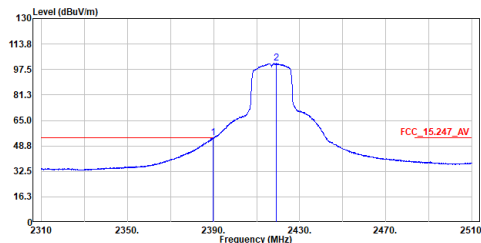

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.900	53.89	54.00	-0.11	43.30	10.59	Average
2	2419.000	101.39	-----	-----	90.68	10.71	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2417MHz
 Test By :Ling

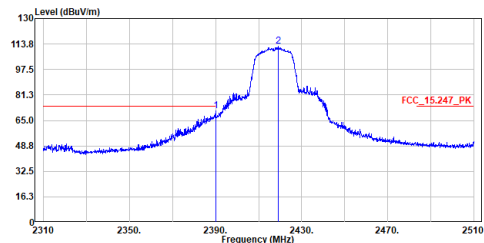

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	71.13	74.00	-2.87	60.54	10.59	Peak
2	2419.300	112.21	-----	-----	101.50	10.71	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2417MHz
 Test By :Ling

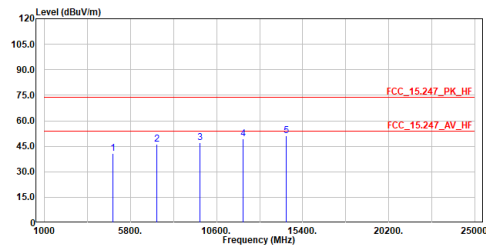

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	40.90	74.00	-33.10	58.70	-17.80	Peak
2	7251.000	45.96	74.00	-28.04	58.67	-12.71	Peak
3	9668.000	46.99	74.00	-27.01	56.03	-9.04	Peak
4	12885.000	49.33	74.00	-24.67	55.07	-5.74	Peak
5	14502.000	51.34	74.00	-22.66	54.26	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2417MHz
 Test By :Ling

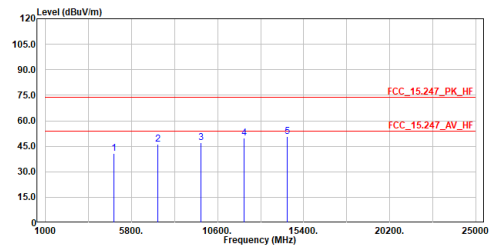

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4834.000	40.87	74.00	-33.13	58.67	-17.80	Peak
2	7251.000	46.12	74.00	-27.88	58.83	-12.71	Peak
3	9668.000	47.13	74.00	-26.87	56.17	-9.04	Peak
4	12885.000	49.94	74.00	-24.06	55.68	-5.74	Peak
5	14502.000	50.59	74.00	-23.41	53.51	-2.92	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2422MHz
 Test By :Ling

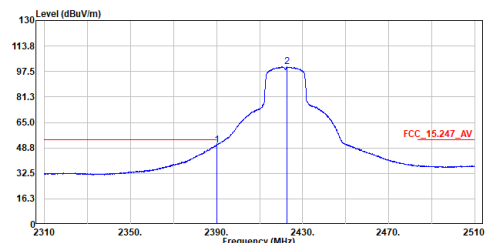

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	50.75	54.00	-3.25	40.16	10.59	Average
2	2422.000	100.43	-----	-----	89.70	10.73	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2422MHz
 Test By :Ling

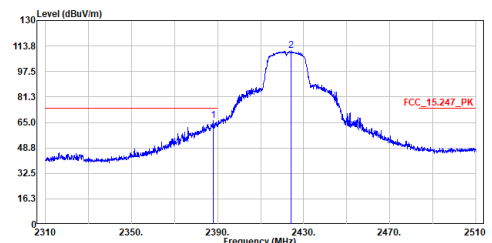

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.100	66.43	74.00	-7.57	55.85	10.58	Peak
2	2424.100	111.01	-----	-----	100.28	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2422MHz
 Test By :Ling

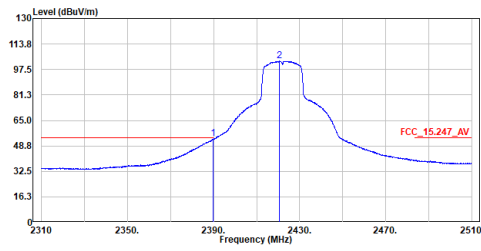

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	53.26	54.00	-0.74	42.67	10.59	Average
2	2420.400	103.09	-----	-----	92.37	10.72	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2422MHz
 Test By :Ling

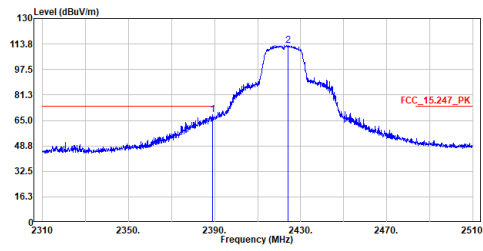

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.200	68.47	74.00	-5.53	57.89	10.58	Peak
2	2424.300	112.91	-----	-----	102.18	10.73	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2422MHz
 Test By :Ling

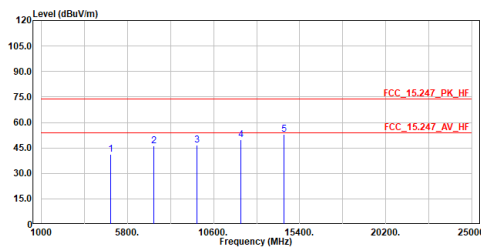

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	41.13	74.00	-32.87	58.90	-17.77	Peak
2	7266.000	46.36	74.00	-27.64	59.05	-12.69	Peak
3	9688.000	46.53	74.00	-27.47	55.54	-9.01	Peak
4	12110.000	49.70	74.00	-24.30	55.41	-5.71	Peak
5	14532.000	53.18	74.00	-20.82	56.11	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2422MHz
 Test By :Ling

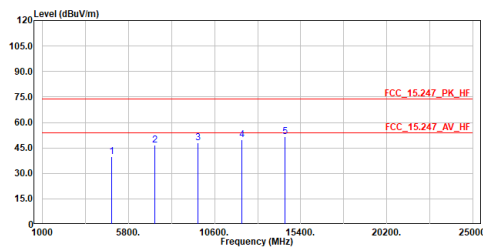

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4844.000	39.80	74.00	-34.20	57.57	-17.77	Peak
2	7266.000	46.62	74.00	-27.38	59.31	-12.69	Peak
3	9688.000	47.87	74.00	-26.13	56.88	-9.01	Peak
4	12110.000	49.69	74.00	-24.31	55.40	-5.71	Peak
5	14532.000	51.75	74.00	-22.25	54.68	-2.93	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2437MHz
 Test By :Ling

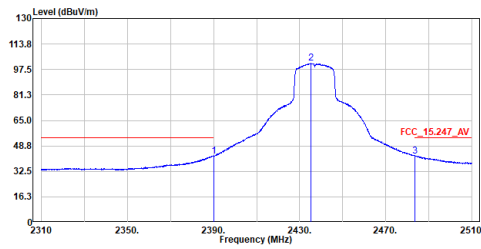

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2390.000	42.30	54.00	-11.70	31.71	10.59	Average
2	2435.400	101.39	-----	-----	90.61	10.78	Average
3	2483.600	42.33	54.00	-11.67	31.35	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2437MHz
 Test By :Ling

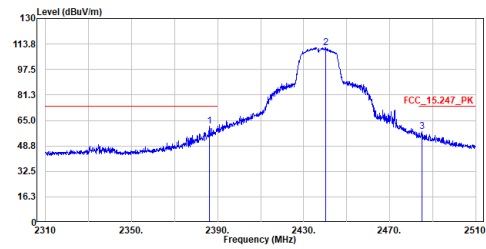

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2386.300	61.51	74.00	-12.49	50.93	10.58	Peak
2	2440.300	111.52	-----	-----	100.71	10.81	Peak
3	2485.100	57.68	74.00	-16.32	46.68	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2437MHz
 Test By :Ling

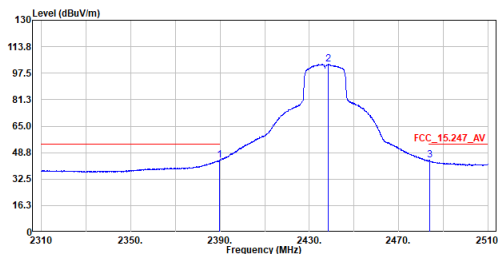

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.700	44.13	54.00	-9.87	33.54	10.59	Average
2	2438.300	103.07	-----	-----	92.28	10.79	Average
3	2483.800	44.36	54.00	-9.64	33.37	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2437MHz
 Test By :Ling

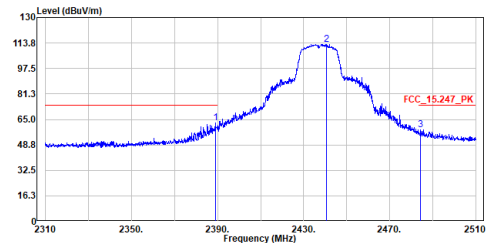

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2388.900	62.79	74.00	-11.21	52.21	10.58	Peak
2	2440.500	112.82	-----	-----	102.01	10.81	Peak
3	2484.300	58.56	74.00	-15.44	47.56	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2437MHz
 Test By :Ling

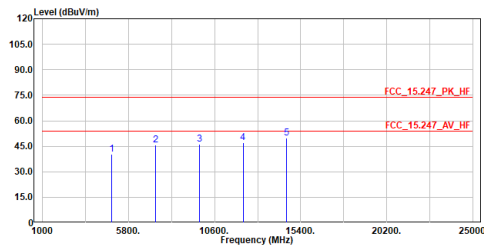

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	40.15	74.00	-33.85	57.82	-17.67	Peak
2	7311.000	45.81	74.00	-28.19	58.43	-12.62	Peak
3	9748.000	46.29	74.00	-27.71	55.22	-8.93	Peak
4	12185.000	47.09	74.00	-26.91	52.70	-5.61	Peak
5	14622.000	49.76	74.00	-24.24	52.76	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2437MHz
 Test By :Ling

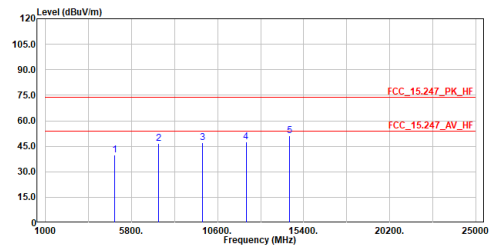

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	39.75	74.00	-34.25	57.42	-17.67	Peak
2	7311.000	46.54	74.00	-27.46	59.16	-12.62	Peak
3	9748.000	46.97	74.00	-27.03	55.90	-8.93	Peak
4	12185.000	47.35	74.00	-26.65	52.96	-5.61	Peak
5	14622.000	50.99	74.00	-23.01	53.99	-3.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2447MHz
 Test By :Ling

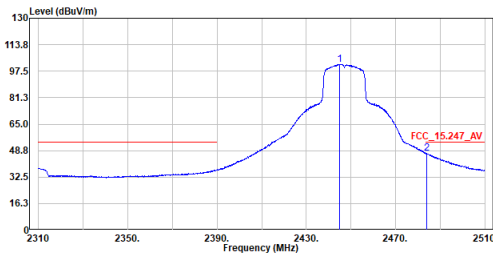

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2444.900	101.79	-----	-----	90.97	10.82	Average
2	2484.000	47.25	54.00	-6.75	36.26	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2447MHz
 Test By :Ling

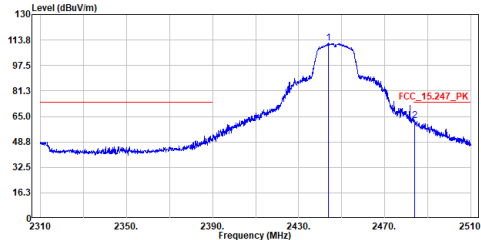

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2443.700	111.83	-----	-----	101.01	10.82	Peak
2	2484.100	62.51	74.00	-11.49	51.52	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2447MHz
 Test By :Ling

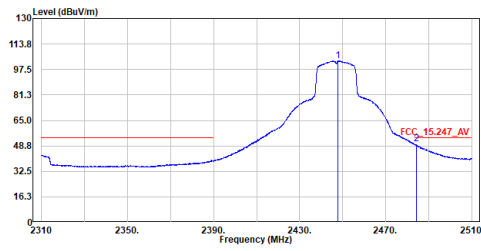

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2447.900	102.95	54.00	-3.98	92.11	10.84	Average
2	2484.300	50.02	54.00	-3.98	39.02	11.00	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2447MHz
 Test By :Ling

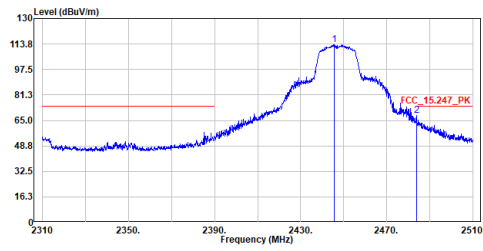

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2445.700	113.28	54.00	-5.90	102.46	10.82	Peak
2	2483.900	68.10	54.00	-5.90	57.11	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2447MHz
 Test By :Ling

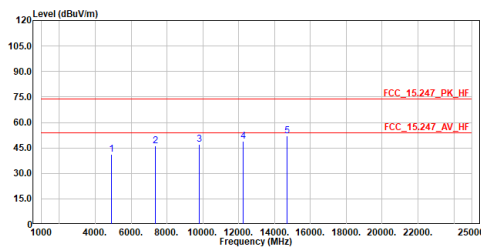

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	41.39	74.00	-32.61	59.01	-17.62	Peak
2	7341.000	46.08	74.00	-27.92	58.66	-12.58	Peak
3	9788.000	47.05	74.00	-26.95	55.92	-8.87	Peak
4	12235.000	48.93	74.00	-25.07	54.48	-5.55	Peak
5	14682.000	52.13	74.00	-21.87	55.16	-3.03	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2447MHz
 Test By :Ling

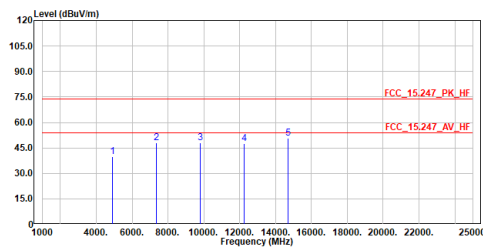

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4894.000	40.02	74.00	-33.98	57.64	-17.62	Peak
2	7341.000	47.82	74.00	-26.18	60.40	-12.58	Peak
3	9788.000	48.10	74.00	-25.90	56.97	-8.87	Peak
4	12235.000	47.73	74.00	-26.27	53.28	-5.55	Peak
5	14682.000	50.69	74.00	-23.31	53.72	-3.03	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2452MHz
 Test By :Ling

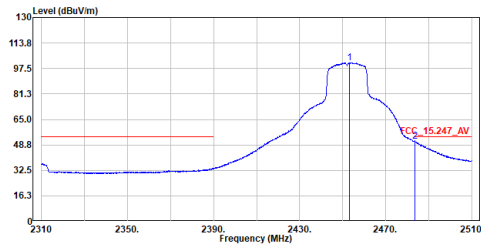

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2453.390	101.09	-----	-----	90.22	10.87	Average
2	2483.700	50.80	54.00	-3.20	39.81	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2452MHz
 Test By :Ling

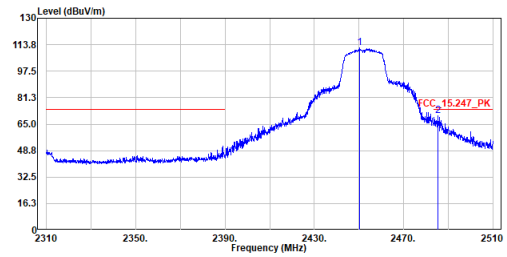

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.400	111.64	-----	-----	100.80	10.84	Peak
2	2485.200	70.00	74.00	-4.00	59.00	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2452MHz
 Test By :Ling

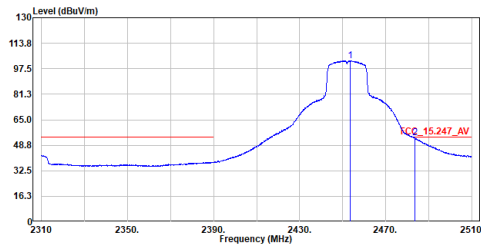

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2453.600	102.74	-----	-----	91.87	10.87	Average
2	2483.600	53.70	54.00	-0.30	42.72	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2452MHz
 Test By :Ling

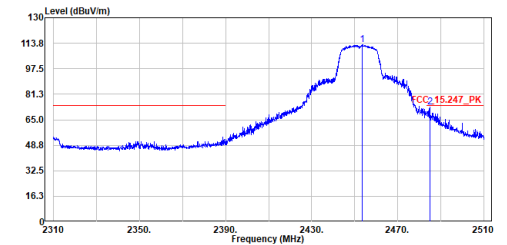

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2453.600	112.73	-----	-----	101.86	10.87	Peak
2	2484.900	73.00	74.00	-1.00	62.00	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2452MHz
 Test By :Ling

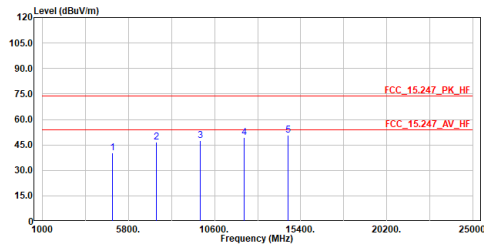

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	40.15	74.00	-33.85	57.73	-17.58	Peak
2	7356.000	46.55	74.00	-27.45	59.10	-12.55	Peak
3	9808.000	47.52	74.00	-26.48	56.35	-8.83	Peak
4	12260.000	49.35	74.00	-24.65	54.88	-5.53	Peak
5	14712.000	50.51	74.00	-23.49	53.55	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2452MHz
 Test By :Ling

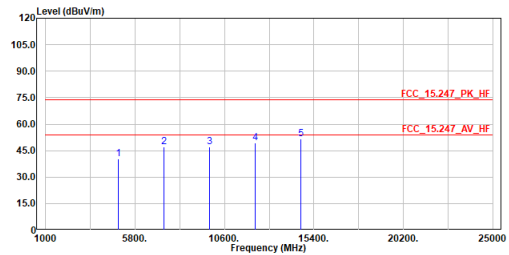

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	40.47	74.00	-33.53	58.05	-17.58	Peak
2	7356.000	47.13	74.00	-26.87	59.68	-12.55	Peak
3	9808.000	46.99	74.00	-27.01	55.82	-8.83	Peak
4	12260.000	49.20	74.00	-24.80	54.73	-5.53	Peak
5	14712.000	51.47	74.00	-22.53	54.51	-3.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2457MHz
 Test By :Ling

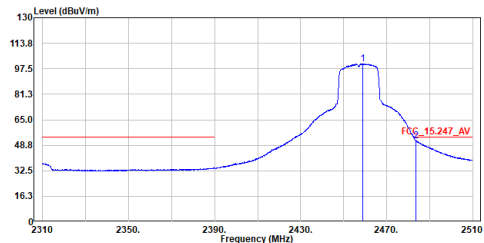

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.800	100.57	-----	-----	89.69	10.88	Average
2	2483.600	51.51	54.00	-2.49	40.53	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2457MHz
 Test By :Ling

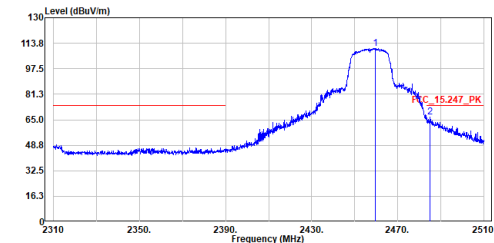

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2459.700	110.55	-----	-----	99.66	10.89	Peak
2	2485.100	66.48	74.00	-7.52	55.48	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2457MHz
 Test By :Ling

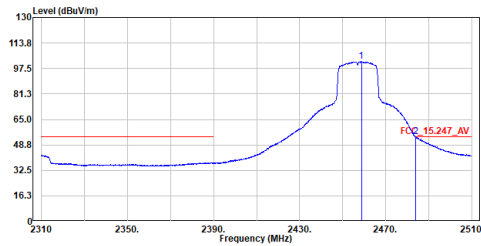

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2458.700	101.85	-----	-----	90.97	10.88	Average
2	2484.000	53.90	54.00	-0.10	42.91	10.99	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2457MHz
 Test By :Ling

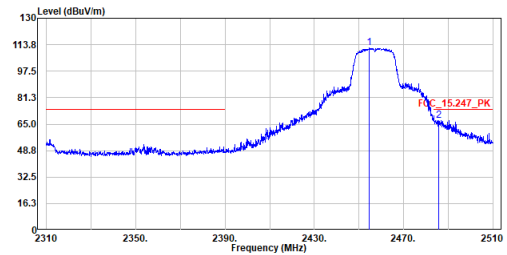

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2454.600	111.94	-----	-----	101.07	10.87	Peak
2	2485.800	67.35	74.00	-6.65	56.35	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2457MHz
 Test By :Ling

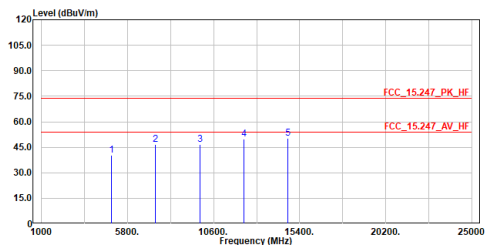

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.30	74.00	-33.70	57.86	-17.56	Peak
2	7371.000	46.57	74.00	-27.43	59.10	-12.53	Peak
3	9828.000	46.67	74.00	-27.33	55.49	-8.82	Peak
4	12285.000	49.82	74.00	-24.18	55.31	-5.49	Peak
5	14742.000	50.33	74.00	-23.67	53.41	-3.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2457MHz
 Test By :Ling

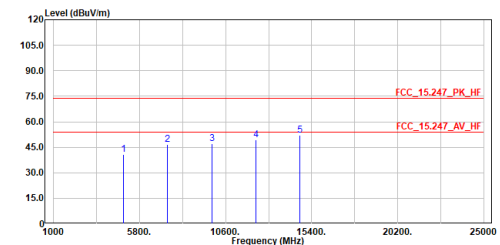

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4914.000	40.64	74.00	-33.36	58.20	-17.56	Peak
2	7371.000	46.45	74.00	-27.55	58.98	-12.53	Peak
3	9828.000	47.02	74.00	-26.98	55.84	-8.82	Peak
4	12285.000	49.23	74.00	-24.77	54.72	-5.49	Peak
5	14742.000	52.24	74.00	-21.76	55.32	-3.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2462MHz
 Test By :Ling

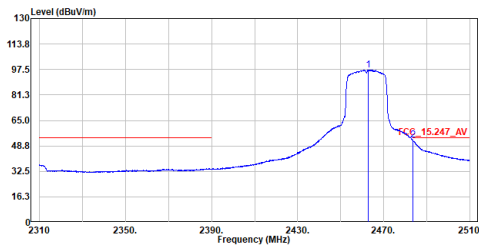

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.700	97.13	-----	-----	86.23	10.90	Average
2	2483.600	52.55	54.00	-1.45	41.57	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :n20_TX_2462MHz
 Test By :Ling

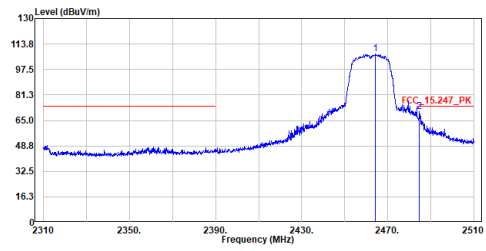

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2464.400	107.29	-----	-----	96.38	10.91	Peak
2	2484.700	70.66	74.00	-3.34	59.66	11.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2462MHz
 Test By :Ling

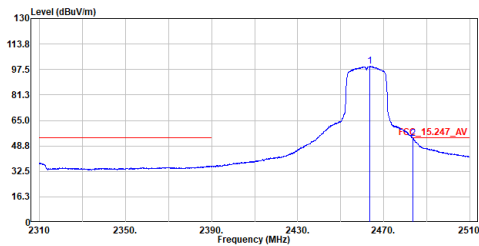

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.700	99.49	-----	-----	88.59	10.90	Average
2	2483.600	53.45	54.00	-0.55	42.47	10.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-CB04
 Condition :3m ,Vertical
 Mode :n20_TX_2462MHz
 Test By :Ling

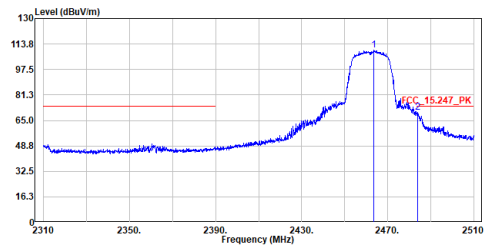

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.500	109.66	-----	-----	98.76	10.90	Peak
2	2483.800	70.10	74.00	-3.90	59.11	10.99	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.


Site :HC-C804
 Condition :3m ,Horizontal
 Mode :n20_TX_2462MHz
 Test By :Ling

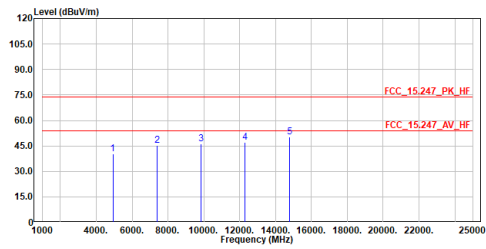

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	40.09	74.00	-33.91	57.61	-17.52	Peak
2	7386.000	45.26	74.00	-28.74	57.77	-12.51	Peak
3	9848.000	46.08	74.00	-27.92	54.86	-8.78	Peak
4	12310.000	47.04	74.00	-26.96	52.51	-5.47	Peak
5	14772.000	50.18	74.00	-23.82	53.27	-3.09	Peak

- Note:
1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Site :HC-C804
 Condition :3m ,Vertical
 Mode :n20_TX_2462MHz
 Test By :Ling


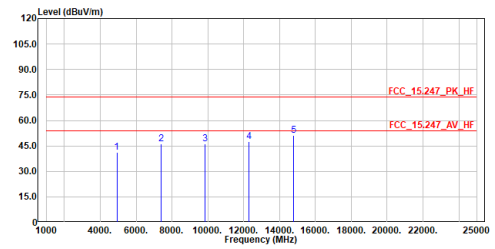


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.24	74.00	-32.76	58.76	-17.52	Peak
2	7386.000	46.37	74.00	-27.63	58.88	-12.51	Peak
3	9848.000	46.18	74.00	-27.82	54.96	-8.78	Peak
4	12310.000	47.65	74.00	-26.35	53.12	-5.47	Peak
5	14772.000	51.13	74.00	-22.87	54.22	-3.09	Peak

- Note:
1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
 5. The other emission levels were very low against the limit.

Appendix F. Test Result of Radiated Emissions Co-location

WiFi 2.4 GHz (802.11b, 2417 MHz) + Sub-GHz (915.5 MHz) 30 MHz ~ 1 GHz:

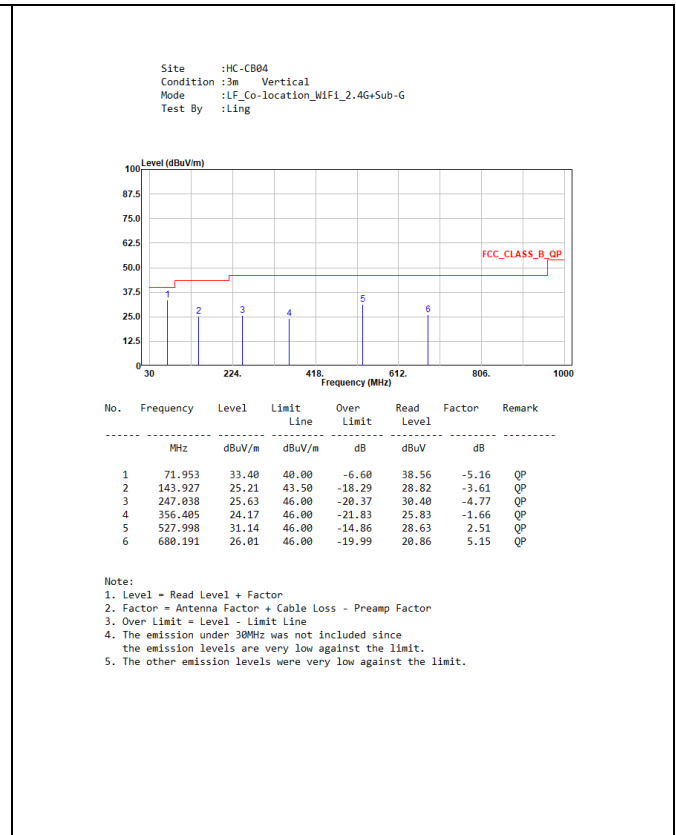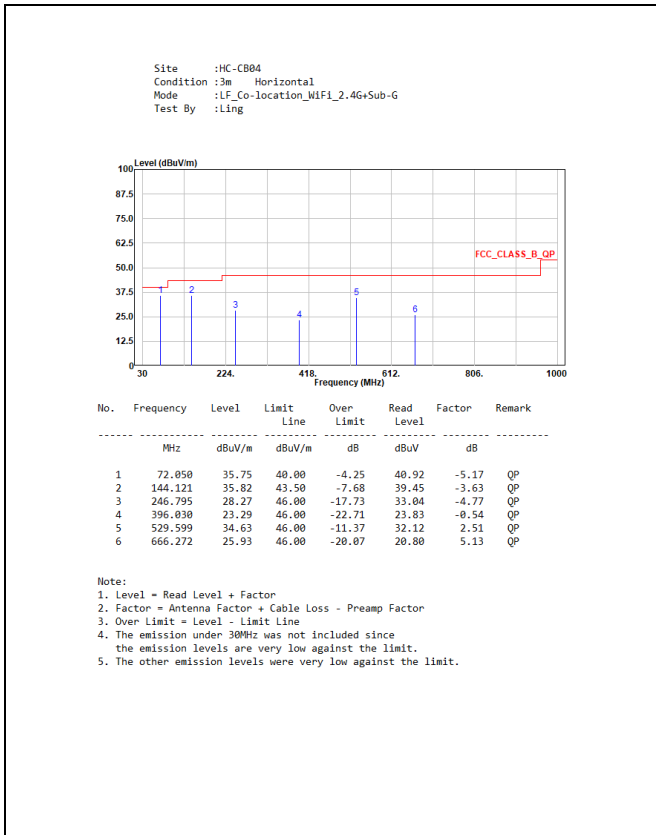

Above 1 GHz:

