

# User Manual

## HK-A326



**Honggi**

# General introduction & Functionality

## Remote Controller



### Button

- A** Receiver A-Port turn on/off
- B** Receiver B-Port turn on/off
- C** Delayed auto off function (2 times press button)
- D** Receiver All-Ports turn on/off




### Battery Specifications



Rear View

DC 3.0V  
AAA X 2

## Receiver & Switcher

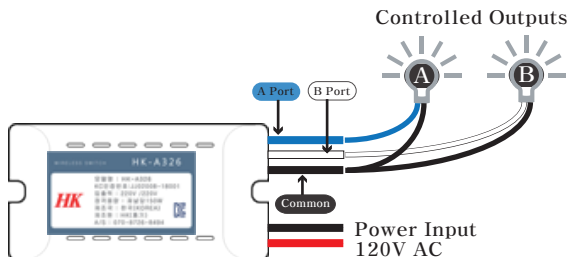

## Safety Instructions

- Do not immerse in water.
- Do not use in wet environment.

## Cleaning and maintenance

- To avoid scratching, remote control should only be cleaned with soft dry cloth.
- Do not use strong chemical or cleaning agent as it may damage the plastic parts.

## Recycling and disposal

- Please dispose in accordance with instructions from the local authority.
- Remove the batteries when you discard the remote control.
- Do not throw the batteries away with normal household waste.

## Warranty and service

- If you service or information or if you have a problem,  
Please contact the store of purchase.
- The product A/S period is 2 years.

## Specifications

Part	Name	Parameters
Receiver	Operation Voltage	AC 120V $\pm$ 10%
	Output power	150 Watts Max. (each Ports)
	Ambient Temperature	0℃ ~ 40℃
Remote controller	Transmission method	RF 315MHz (OOK Mod.)
	Transmission distance	10 Meters Min.(Omni-directional)
	Battery Voltage	DC3.0V ( AAA X 2 )

## FCC ID &..

## **Part 15 statements**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

*Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.*