

TEST REPORT

Product Name: TV
FCC ID: 2A9L7TV40-FS3B
Trademark: GAZER
Model Number: TV40-FS3B, TV40-FS3S, TV40-FS3W, TV40-FS3G, TV32-FS3B, TV32-FS3S, TV32-FS3W, TV32-FS3G
Prepared For: Gazer Limited
Address: 17 HANOVER SQUARE, UNITED KINGDOM, LONDON, W1S 1BN
Manufacturer: Gazer Limited
Address: 17 HANOVER SQUARE, UNITED KINGDOM, LONDON, W1S 1BN
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 29, 2022
Sample tested Date: Oct. 29, 2022 to Nov.07, 2022
Issue Date: Nov.07, 2022
Report No.: CTB221107008RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.
Compiled by: Reviewed by: Approved by:

ChenZheng

Chen Zheng

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	56
9.1 Block Diagram Of Test Setup	56
9.2 Limit	56
9.3 Test procedure	56
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	59
11. POWER SPECTRAL DENSITY	69
11.1 Block Diagram Of Test Setup	69
11.2 Limit	69
11.3 Test procedure	69
11.4 Test Result	70
12. ANTENNA REQUIREMENT	79
13. EUT PHOTOGRAPHS	80
14. EUT TEST SETUP PHOTOGRAPHS	81

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB221107008RFX	Nov.07, 2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TV40-FS3B, TV40-FS3S, TV40-FS3W, TV40-FS3G, TV32-FS3B, TV32-FS3S, TV32-FS3W, TV32-FS3G
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: TV40-FS3B
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 16.744dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: PIFA antenna
Antenna Gain:	WiFi (2.4G) : 4.67dBi
Ratings:	AC 120V~240V 50/60Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Router	Huawei	AX2 Pro	/	/
2	Laptop	DELL	Vostro 5490	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1+ ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 4.67dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 7.68dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 4.67dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22


21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

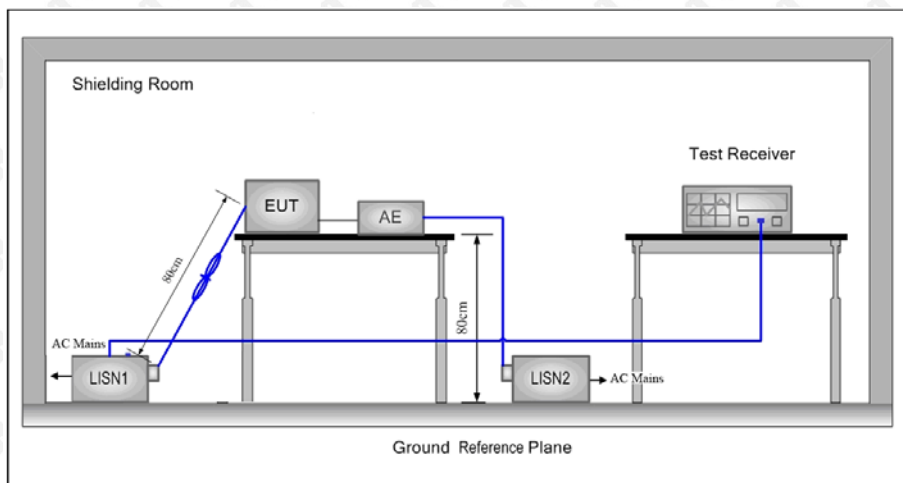

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

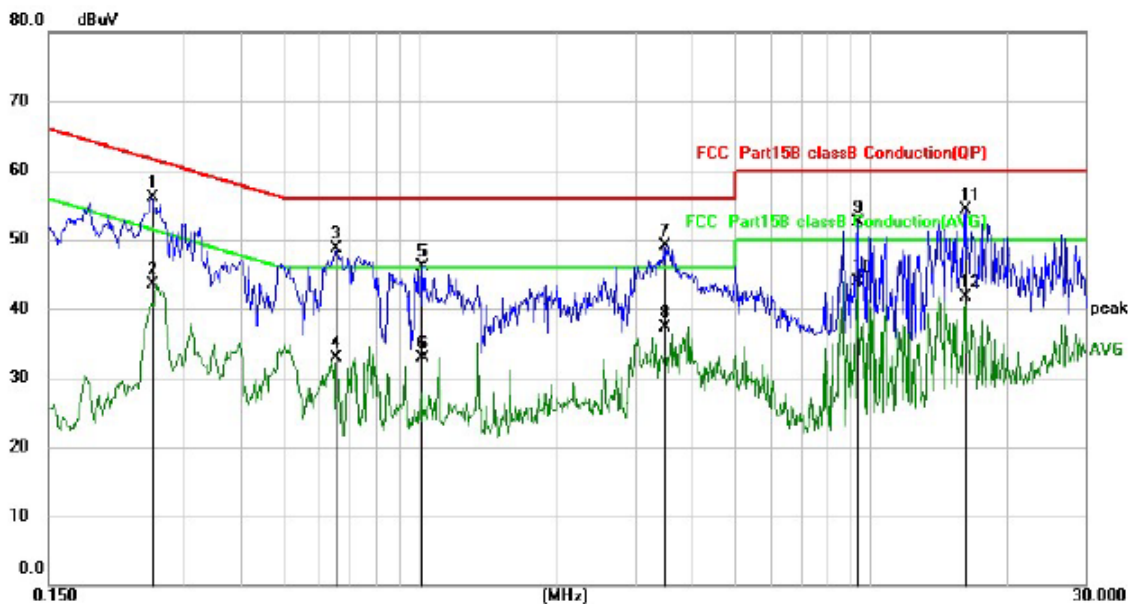

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.2540	46.12	10.00	56.12	61.63	-5.51	QP
2		0.2540	33.53	10.00	43.53	51.63	-8.10	AVG
3		0.6542	38.66	9.97	48.63	56.00	-7.37	QP
4		0.6542	22.86	9.97	32.83	46.00	-13.17	AVG
5		1.0140	36.20	9.98	46.18	56.00	-9.82	QP
6		1.0140	22.93	9.98	32.91	46.00	-13.09	AVG
7		3.4860	39.07	10.10	49.17	56.00	-6.83	QP
8		3.4860	27.16	10.10	37.26	46.00	-8.74	AVG
9		9.3900	42.13	10.33	52.46	60.00	-7.54	QP
10		9.3900	33.58	10.33	43.91	50.00	-6.09	AVG
11		16.2300	43.76	10.49	54.25	60.00	-5.75	QP
12		16.2300	31.26	10.49	41.75	50.00	-8.25	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

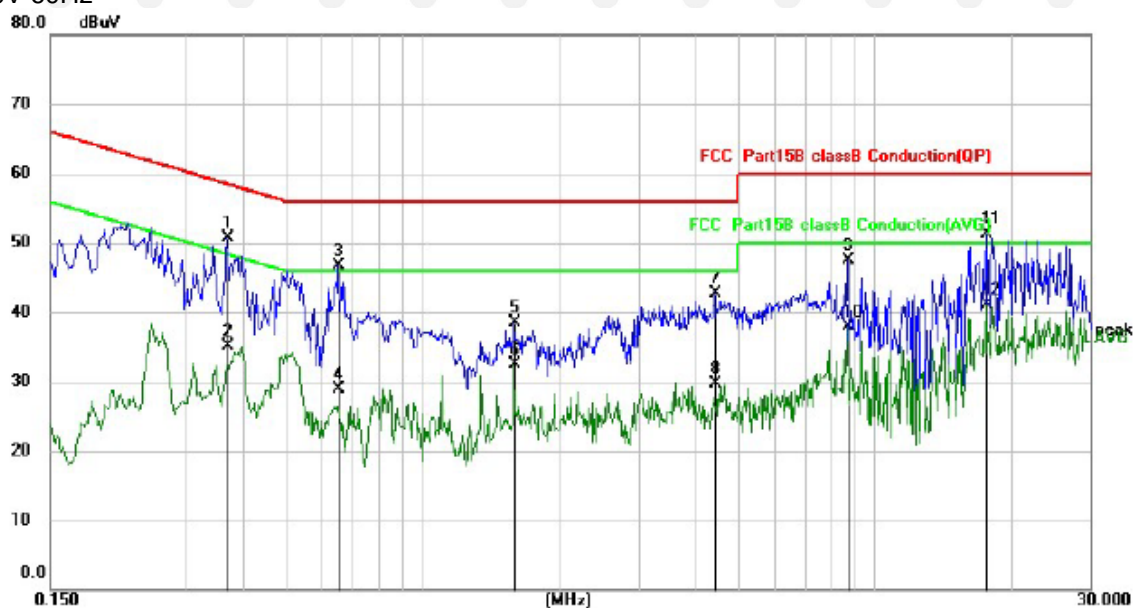

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.3700	40.65	9.98	50.63	58.50	-7.87	QP
2		0.3700	25.05	9.98	35.03	48.50	-13.47	AVG
3		0.6540	36.78	9.97	46.75	56.00	-9.25	QP
4		0.6540	18.97	9.97	28.94	46.00	-17.06	AVG
5		1.5859	28.40	10.01	38.41	56.00	-17.59	QP
6		1.5859	22.48	10.01	32.49	46.00	-13.51	AVG
7		4.4138	32.58	10.14	42.72	56.00	-13.28	QP
8		4.4138	19.60	10.14	29.74	46.00	-16.26	AVG
9		8.7179	37.19	10.30	47.49	60.00	-12.51	QP
10		8.7179	27.56	10.30	37.86	50.00	-12.14	AVG
11		17.6935	40.86	10.52	51.38	60.00	-8.62	QP
12		17.6935	30.53	10.52	41.05	50.00	-8.95	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

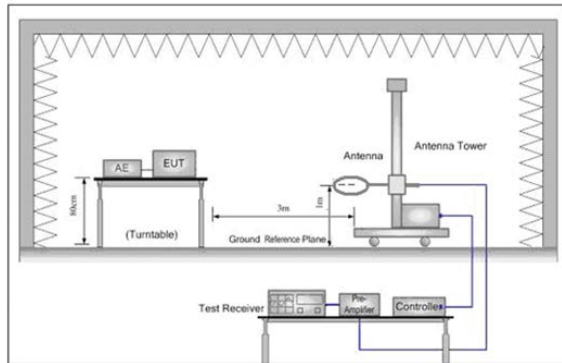


Figure 1. Below 30MHz

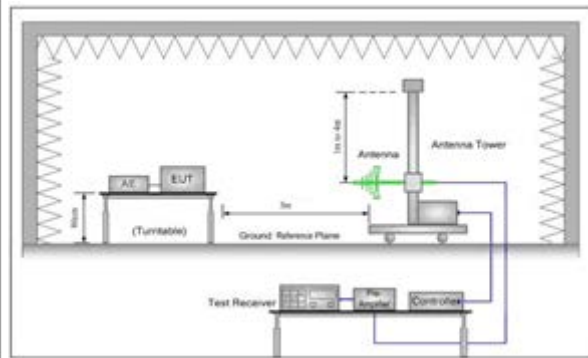


Figure 2. 30MHz to 1GHz

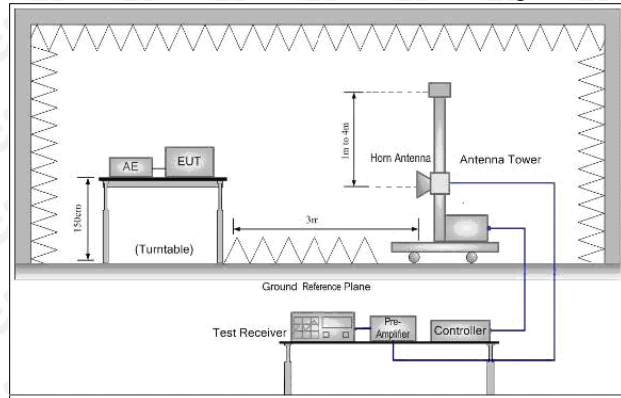


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:
Antenna polarity: H

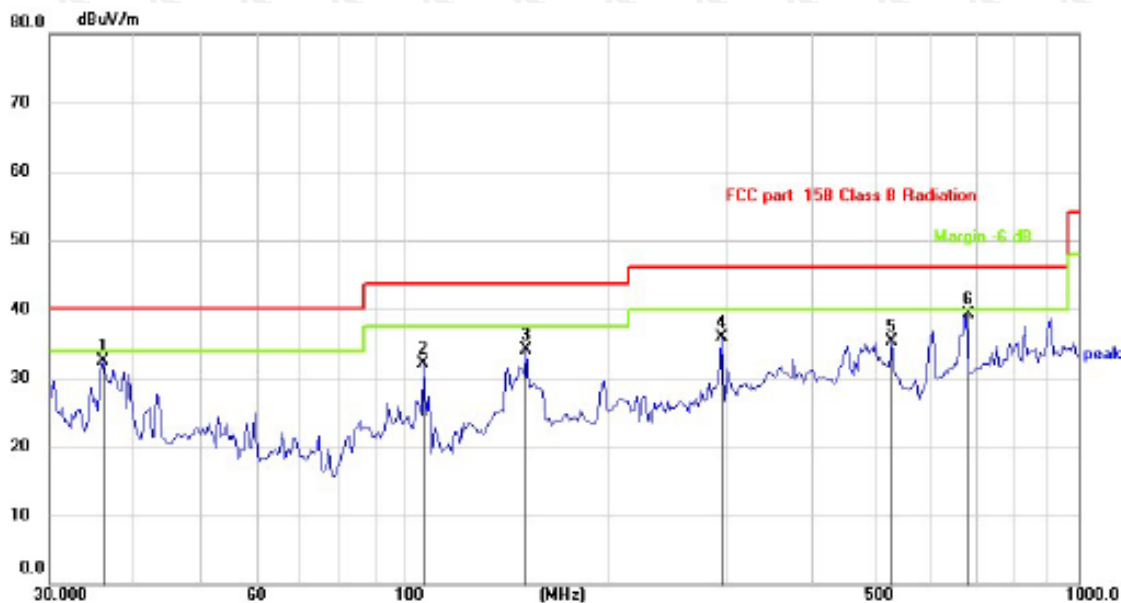

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.0638	39.15	-6.59	32.56	40.00	-7.44	QP
2		106.9458	41.06	-9.05	32.01	43.50	-11.49	QP
3		151.8632	39.52	-5.46	34.06	43.50	-9.44	QP
4		295.6648	41.63	-5.67	35.96	46.00	-10.04	QP
5		527.3201	34.71	0.69	35.40	46.00	-10.60	QP
6	*	679.9600	35.68	3.58	39.26	46.00	-6.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	31.8981	40.66	-6.81	33.85	40.00	-6.15	QP
2		90.5374	43.24	-10.17	33.07	43.50	-10.43	QP
3		142.8240	40.64	-5.50	35.14	43.50	-8.36	QP
4		270.8491	45.50	-6.84	38.66	46.00	-7.34	QP
5		601.4265	33.76	2.47	36.23	46.00	-9.77	QP
6		831.8573	33.63	6.19	39.82	46.00	-6.18	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.19	-3.64	60.55	74	-13.45	peak
4824	50.89	-3.64	47.25	54	-6.75	AVG
7236	59.17	-0.95	58.22	74	-15.78	peak
7236	44.91	-0.95	43.96	54	-10.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.92	-3.64	63.28	74	-10.72	peak
4824	47.96	-3.64	44.32	54	-9.68	AVG
7236	58.93	-0.95	57.98	74	-16.02	peak
7236	42.95	-0.95	42.00	54	-12.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.09	-3.51	60.58	74	-13.42	peak
4874	47.87	-3.51	44.36	54	-9.64	AVG
7311	59.43	-0.82	58.61	74	-15.39	peak
7311	45.54	-0.82	44.72	54	-9.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.26	-3.51	59.75	74	-14.25	peak
4874	47.22	-3.51	43.71	54	-10.29	AVG
7311	58.09	-0.82	57.27	74	-16.73	peak
7311	44.69	-0.82	43.87	54	-10.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.04	-3.43	58.61	74	-15.39	peak
4924	47.20	-3.43	43.77	54	-10.23	AVG
7386	59.16	-0.75	58.41	74	-15.59	peak
7386	44.78	-0.75	44.03	54	-9.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.31	-3.43	59.88	74	-14.12	peak
4924	46.79	-3.43	43.36	54	-10.64	AVG
7386	57.96	-0.75	57.21	74	-16.79	peak
7386	41.47	-0.75	40.72	54	-13.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.08	-3.64	61.44	74	-12.56	peak
4824	50.34	-3.64	46.70	54	-7.30	AVG
7236	59.49	-0.95	58.54	74	-15.46	peak
7236	44.78	-0.95	43.83	54	-10.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.21	-3.64	59.57	74	-14.43	peak
4824	49.24	-3.64	45.60	54	-8.40	AVG
7236	58.33	-0.95	57.38	74	-16.62	peak
7236	43.36	-0.95	42.41	54	-11.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	65.15	-3.51	61.64	74	-12.36	peak
4874	48.71	-3.51	45.20	54	-8.80	AVG
7311	57.73	-0.82	56.91	74	-17.09	peak
7311	44.55	-0.82	43.73	54	-10.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.12	-3.51	60.61	74	-13.39	peak
4874	48.13	-3.51	44.62	54	-9.38	AVG
7311	56.16	-0.82	55.34	74	-18.66	peak
7311	41.74	-0.82	40.92	54	-13.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.59	-3.43	61.16	74	-12.84	peak
4924	49.57	-3.43	46.14	54	-7.86	AVG
7386	57.65	-0.75	56.90	74	-17.10	peak
7386	41.54	-0.75	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.59	-3.43	61.16	74	-12.84	peak
4924	49.57	-3.43	46.14	54	-7.86	AVG
7386	57.65	-0.75	56.90	74	-17.10	peak
7386	41.54	-0.75	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.31	-3.64	61.67	74	-12.33	peak
4824	46.58	-3.64	42.94	54	-11.06	AVG
7236	58.30	-0.95	57.35	74	-16.65	peak
7236	44.87	-0.95	43.92	54	-10.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.33	-3.64	61.69	74	-12.31	peak
4824	48.64	-3.64	45.00	54	-9.00	AVG
7236	59.05	-0.95	58.10	74	-15.90	peak
7236	46.09	-0.95	45.14	54	-8.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	62.24	-3.51	58.73	74.00	-15.27	peak
4874.00	49.92	-3.51	46.41	54.00	-7.59	AVG
7311.00	59.40	-0.82	58.58	74.00	-15.42	peak
7311.00	43.48	-0.82	42.66	54.00	-11.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	61.90	-3.51	58.39	74.00	-15.61	peak
4874.00	46.77	-3.51	43.26	54.00	-10.74	AVG
7311.00	57.76	-0.82	56.94	74.00	-17.06	peak
7311.00	44.10	-0.82	43.28	54.00	-10.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.40	-3.43	59.97	74	-14.03	peak
4924	47.03	-3.43	43.60	54	-10.40	AVG
7386	57.97	-0.75	57.22	74	-16.78	peak
7386	42.36	-0.75	41.61	54	-12.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.23	-3.43	60.80	74	-13.20	peak
4924	46.62	-3.43	43.19	54	-10.81	AVG
7386	57.57	-0.75	56.82	74	-17.18	peak
7386	43.40	-0.75	42.65	54	-11.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.41	-3.63	59.78	74	-14.22	peak
4844	49.76	-3.63	46.13	54	-7.87	AVG
7266	59.68	-0.94	58.74	74	-15.26	peak
7266	44.02	-0.94	43.08	54	-10.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.57	-3.63	61.94	74	-12.06	peak
4844	48.33	-3.63	44.70	54	-9.30	AVG
7266	58.89	-0.94	57.95	74	-16.05	peak
7266	44.76	-0.94	43.82	54	-10.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	49.27	-3.51	45.76	54	-8.24	AVG
7311	59.25	-0.82	58.43	74	-15.57	peak
7311	44.26	-0.82	43.44	54	-10.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.63	-3.43	60.20	74	-13.80	peak
4904	48.98	-3.43	45.55	54	-8.45	AVG
7356	57.21	-0.75	56.46	74	-17.54	peak
7356	42.16	-0.75	41.41	54	-12.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.31	-3.43	58.88	74	-15.12	peak
4904	48.01	-3.43	44.58	54	-9.42	AVG
7356	58.64	-0.75	57.89	74	-16.11	peak
7356	42.65	-0.75	41.90	54	-12.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:
ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.65	-5.81	50.84	74	-23.16	peak
2390	/	-5.81	/	54	/	AVG
2399	64.77	-5.84	58.93	74	-15.07	peak
2399	48.01	-5.84	42.17	54	-11.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.29	-5.81	50.48	74	-23.52	peak
2390	/	-5.81	/	54	/	AVG
2399	62.38	-5.84	56.54	74	-17.46	peak
2399	47.52	-5.84	41.68	54	-12.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.51	-5.65	50.86	74	-23.14	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.16	-5.81	52.35	74	-21.65	peak
2390	/	-5.81	/	54	/	AVG
2399	62.12	-5.84	56.28	74	-17.72	peak
2399	46.98	-5.84	41.14	54	-12.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.19	-5.81	50.38	74	-23.62	peak
2390	/	-5.81	/	54	/	AVG
2399	61.68	-5.84	55.84	74	-18.16	peak
2399	47.12	-5.84	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.35	-5.65	51.70	74	-22.30	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.93	-5.65	52.28	74	-21.72	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.12	-5.81	51.31	74	-22.69	peak
2390	/	-5.81	/	54	/	AVG
2399	63.14	-5.84	57.30	74	-16.70	peak
2399	47.30	-5.84	41.46	54	-12.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.41	-5.81	51.60	74	-22.40	peak
2390	/	-5.81	/	54	/	AVG
2399	61.11	-5.84	55.27	74	-18.73	peak
2399	47.87	-5.84	42.03	54	-11.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.54	-5.65	50.89	74	-23.11	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.04	-5.65	51.39	74	-22.61	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.54	-5.81	52.73	74	-21.27	peak
2390	/	-5.81	/	54	/	AVG
2399	63.27	-5.84	57.43	74	-16.57	peak
2399	46.63	-5.84	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.16	-5.81	51.35	74	-22.65	peak
2390	/	-5.81	/	54	/	AVG
2399	61.33	-5.84	55.49	74	-18.51	peak
2399	46.70	-5.84	40.86	54	-13.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.27	-5.65	51.62	74	-22.38	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.30	-5.65	50.65	74	-23.35	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

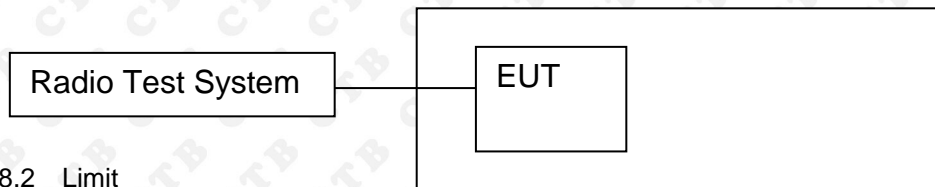

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:

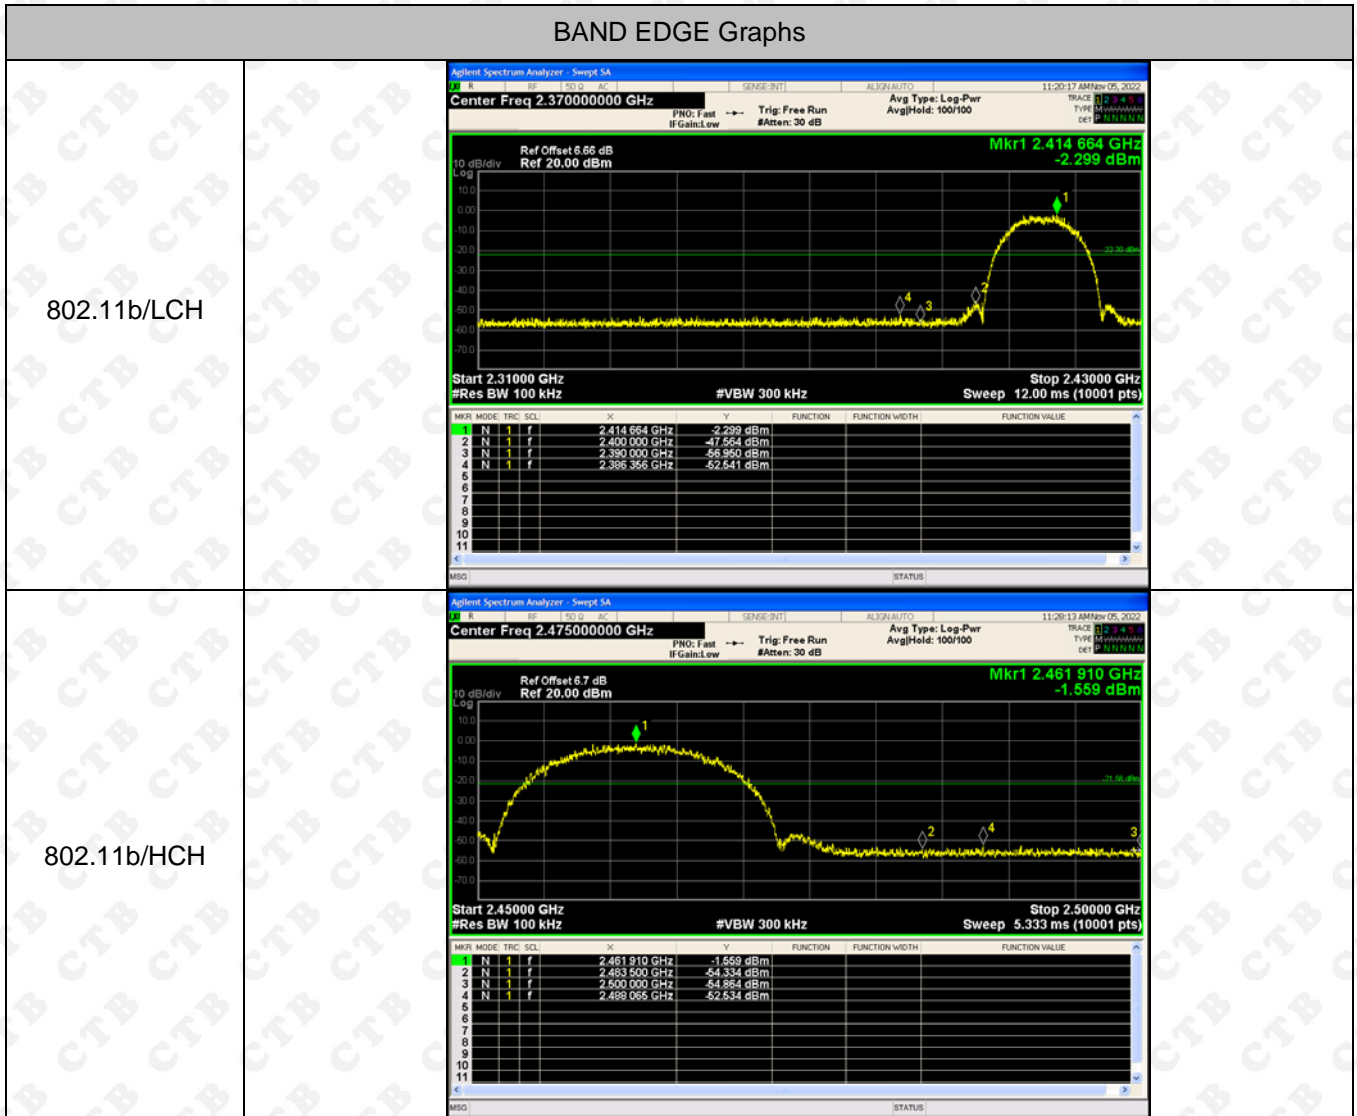


BAND EDGE Graphs

802.11g/LCH

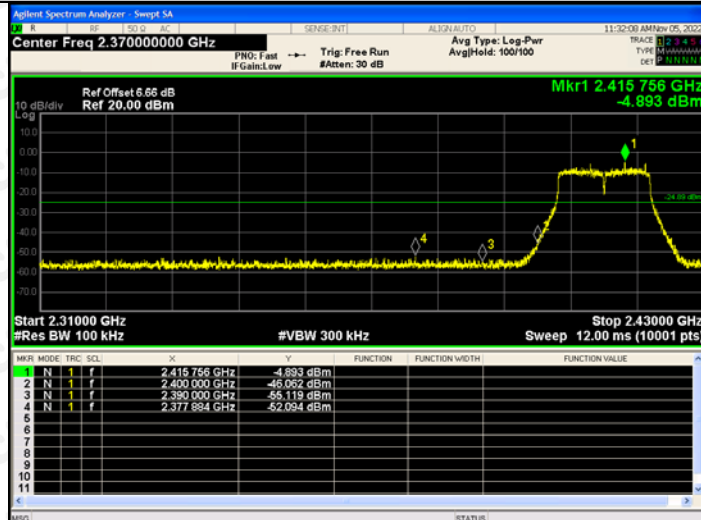


802.11g/HCH

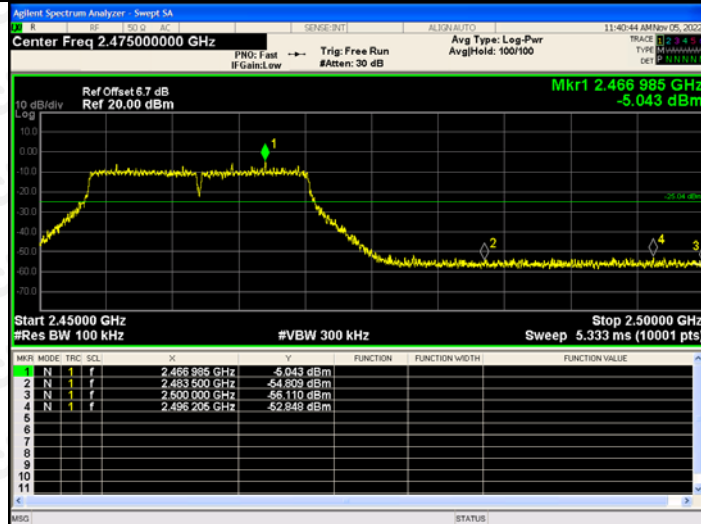


BAND EDGE Graphs

802.11n(HT20)/L
CH

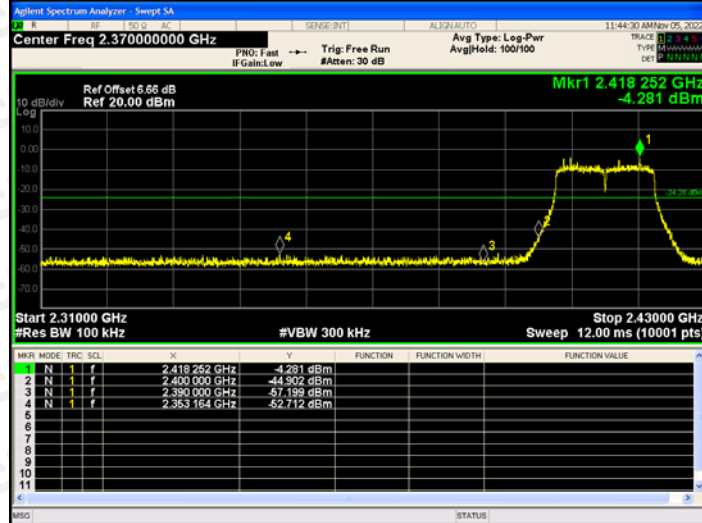


802.11n(HT20)/H
CH

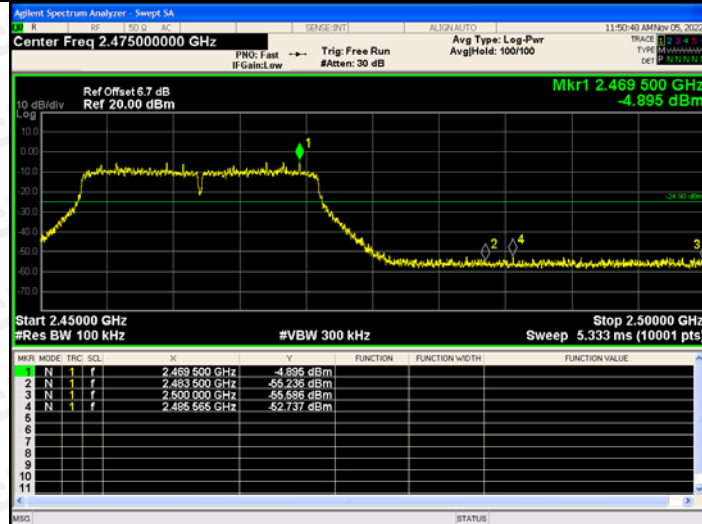


BAND EDGE Graphs

802.11n(HT40)/L
CH

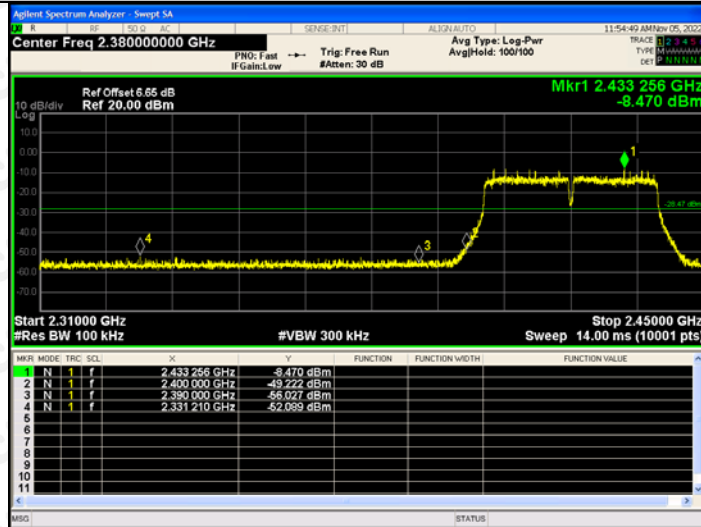


802.11n(HT40)/H
CH

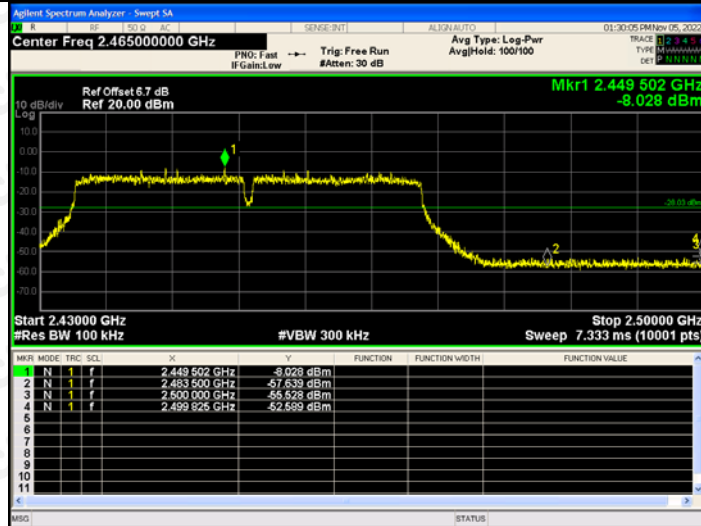


RF Conducted Spurious Emissions Graphs


802.11b
/LCH

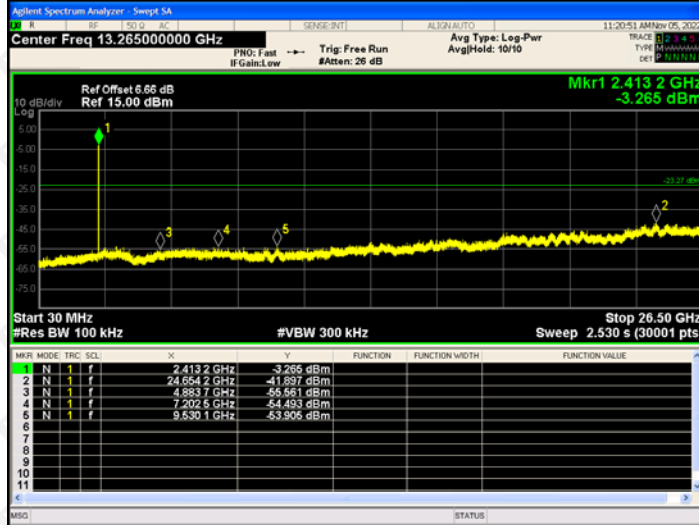


802.11b
/MCH

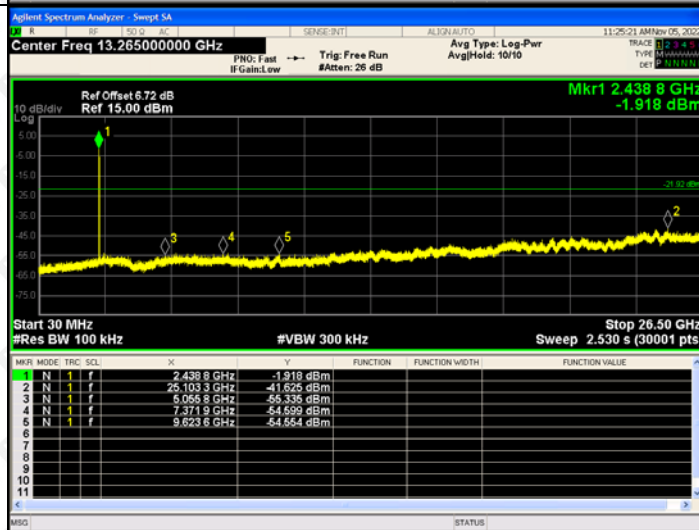

802.11b
/HCH

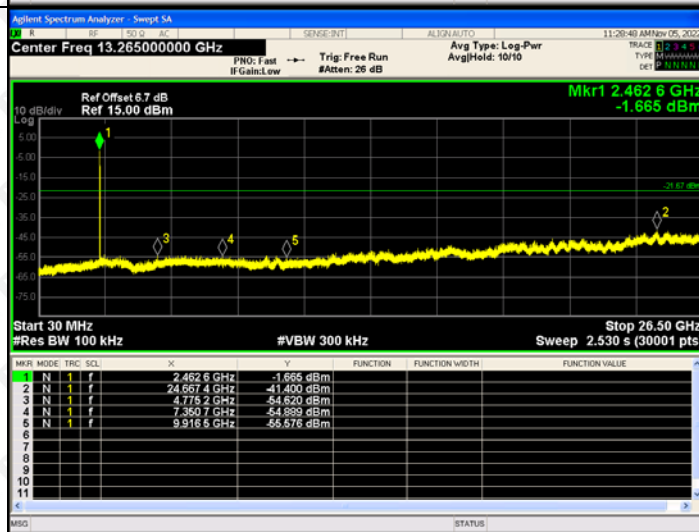

RF Conducted Spurious Emissions Graphs

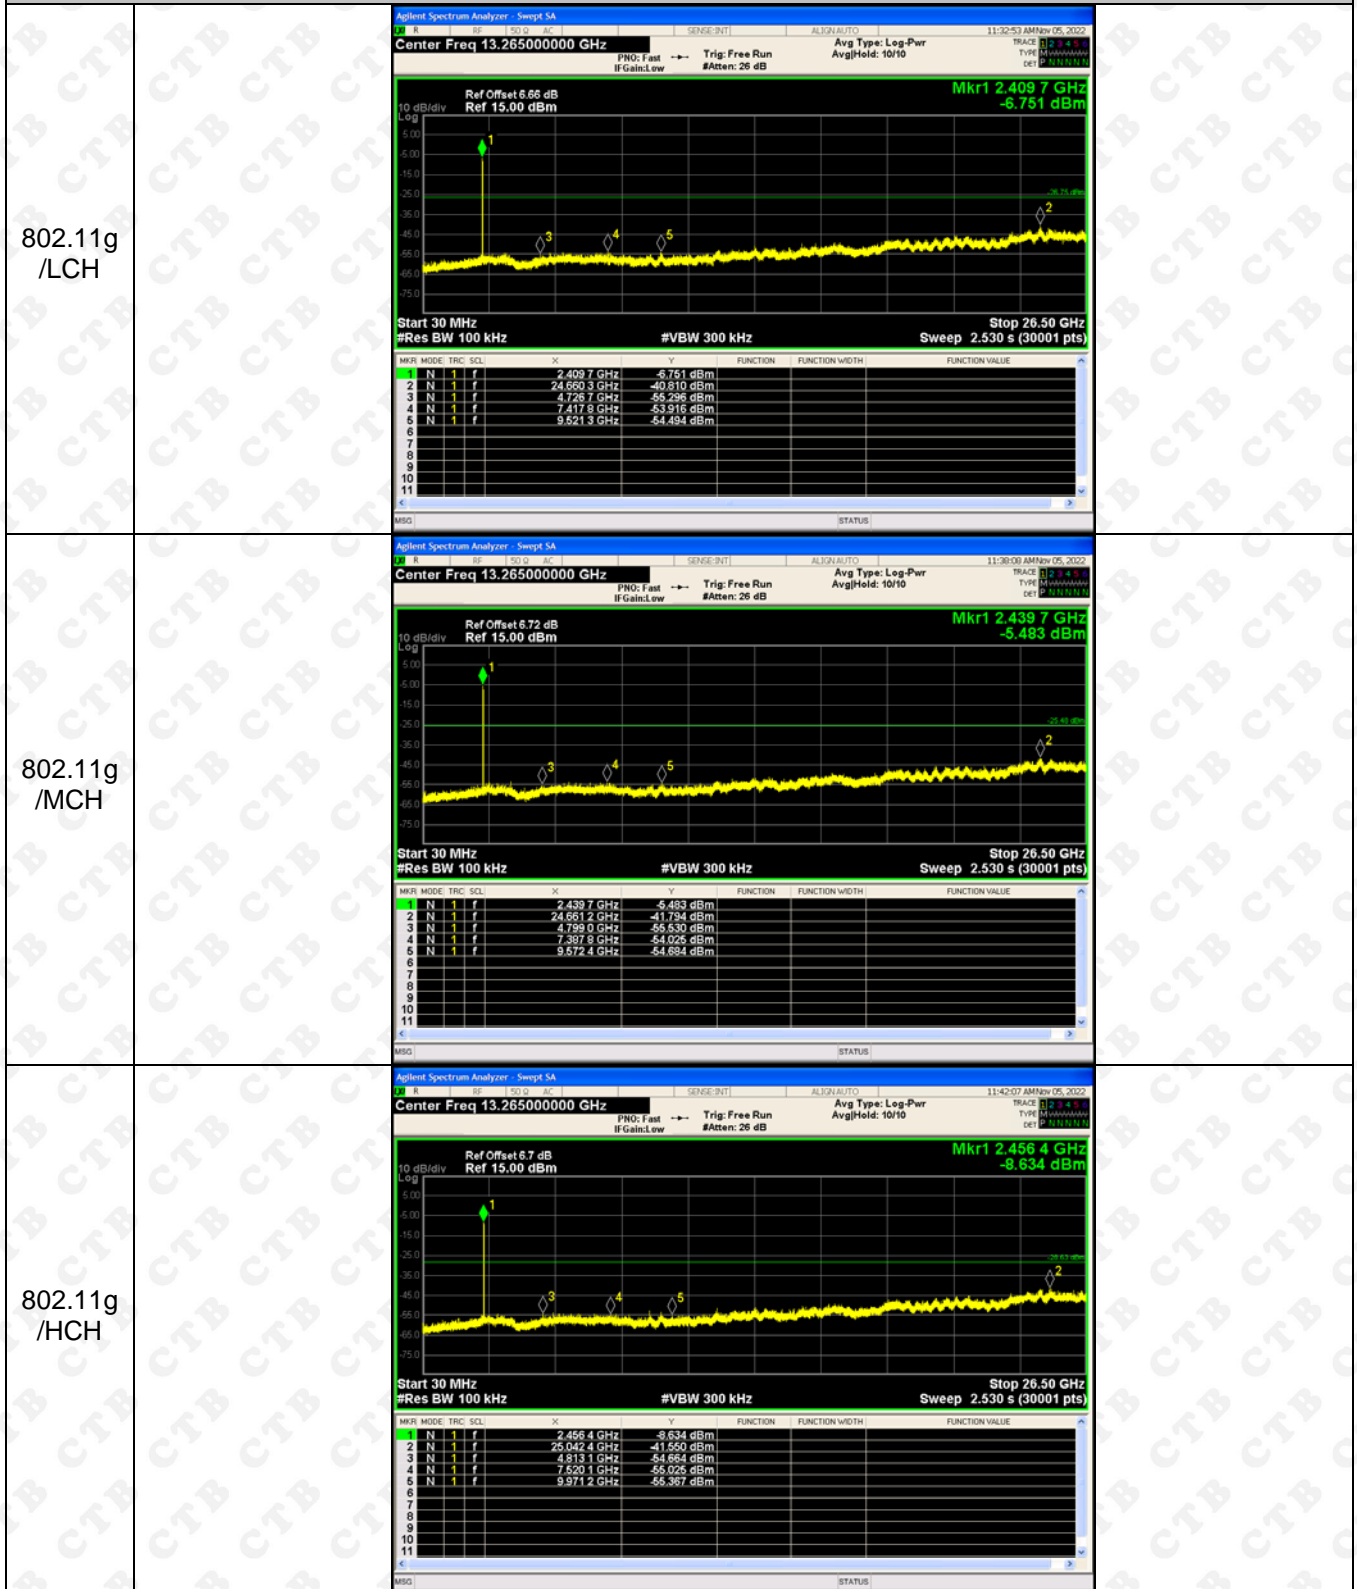


RF Conducted Spurious Emissions Graphs

<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.407 0 GHz</td> <td>-7.590 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.617 1 GHz</td> <td>-41.506 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.008 4 GHz</td> <td>-55.142 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.216 4 GHz</td> <td>-54.652 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.522 1 GHz</td> <td>-54.257 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407 0 GHz	-7.590 dBm				2	N	1	f	24.617 1 GHz	-41.506 dBm				3	N	1	f	5.008 4 GHz	-55.142 dBm				4	N	1	f	7.216 4 GHz	-54.652 dBm				5	N	1	f	9.522 1 GHz	-54.257 dBm				
MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.407 0 GHz	-7.590 dBm																																																			
2	N	1	f	24.617 1 GHz	-41.506 dBm																																																			
3	N	1	f	5.008 4 GHz	-55.142 dBm																																																			
4	N	1	f	7.216 4 GHz	-54.652 dBm																																																			
5	N	1	f	9.522 1 GHz	-54.257 dBm																																																			
<p>802.11 n(HT20) /MCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 5 GHz</td> <td>-4.628 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.666 5 GHz</td> <td>-41.697 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.800 8 GHz</td> <td>-55.072 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.422 2 GHz</td> <td>-53.674 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.553 9 GHz</td> <td>-54.951 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-4.628 dBm				2	N	1	f	24.666 5 GHz	-41.697 dBm				3	N	1	f	4.800 8 GHz	-55.072 dBm				4	N	1	f	7.422 2 GHz	-53.674 dBm				5	N	1	f	9.553 9 GHz	-54.951 dBm				
MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.440 5 GHz	-4.628 dBm																																																			
2	N	1	f	24.666 5 GHz	-41.697 dBm																																																			
3	N	1	f	4.800 8 GHz	-55.072 dBm																																																			
4	N	1	f	7.422 2 GHz	-53.674 dBm																																																			
5	N	1	f	9.553 9 GHz	-54.951 dBm																																																			
<p>802.11 n(HT20) /HCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.469 7 GHz</td> <td>-5.048 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.670 0 GHz</td> <td>-41.937 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.118 7 GHz</td> <td>-54.522 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.480 1 GHz</td> <td>-53.336 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.033 9 GHz</td> <td>-56.639 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.469 7 GHz	-5.048 dBm				2	N	1	f	24.670 0 GHz	-41.937 dBm				3	N	1	f	5.118 7 GHz	-54.522 dBm				4	N	1	f	7.480 1 GHz	-53.336 dBm				5	N	1	f	10.033 9 GHz	-56.639 dBm				
MFR	MODE	TRIG	SCL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.469 7 GHz	-5.048 dBm																																																			
2	N	1	f	24.670 0 GHz	-41.937 dBm																																																			
3	N	1	f	5.118 7 GHz	-54.522 dBm																																																			
4	N	1	f	7.480 1 GHz	-53.336 dBm																																																			
5	N	1	f	10.033 9 GHz	-56.639 dBm																																																			


<p>802.11n (HT40)/ LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.65 dB Ref 15.00 dBm Mkr1 2.415 8 GHz -9.013 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.415 8 GHz</td> <td>-9.013 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.639 2 GHz</td> <td>-41.372 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.808 6 GHz</td> <td>-55.730 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.079 0 GHz</td> <td>-54.418 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.636 3 GHz</td> <td>-54.592 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.415 8 GHz	-9.013 dBm				2	N	1	f	24.639 2 GHz	-41.372 dBm				3	N	1	f	4.808 6 GHz	-55.730 dBm				4	N	1	f	7.079 0 GHz	-54.418 dBm				5	N	1	f	9.636 3 GHz	-54.592 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.415 8 GHz	-9.013 dBm																																																			
2	N	1	f	24.639 2 GHz	-41.372 dBm																																																			
3	N	1	f	4.808 6 GHz	-55.730 dBm																																																			
4	N	1	f	7.079 0 GHz	-54.418 dBm																																																			
5	N	1	f	9.636 3 GHz	-54.592 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.421 1 GHz -9.057 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.421 1 GHz</td> <td>-9.057 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.183 6 GHz</td> <td>-41.333 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.819 0 GHz</td> <td>-54.423 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.304 8 GHz</td> <td>-54.379 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.667 4 GHz</td> <td>-54.967 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421 1 GHz	-9.057 dBm				2	N	1	f	25.183 6 GHz	-41.333 dBm				3	N	1	f	4.819 0 GHz	-54.423 dBm				4	N	1	f	7.304 8 GHz	-54.379 dBm				5	N	1	f	9.667 4 GHz	-54.967 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.421 1 GHz	-9.057 dBm																																																			
2	N	1	f	25.183 6 GHz	-41.333 dBm																																																			
3	N	1	f	4.819 0 GHz	-54.423 dBm																																																			
4	N	1	f	7.304 8 GHz	-54.379 dBm																																																			
5	N	1	f	9.667 4 GHz	-54.967 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.439 7 GHz -10.596 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 7 GHz</td> <td>-10.596 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.648 2 GHz</td> <td>-41.009 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.100 8 GHz</td> <td>-54.274 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.444 9 GHz</td> <td>-55.000 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.959 8 GHz</td> <td>-55.204 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-10.596 dBm				2	N	1	f	24.648 2 GHz	-41.009 dBm				3	N	1	f	5.100 8 GHz	-54.274 dBm				4	N	1	f	7.444 9 GHz	-55.000 dBm				5	N	1	f	9.959 8 GHz	-55.204 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.439 7 GHz	-10.596 dBm																																																			
2	N	1	f	24.648 2 GHz	-41.009 dBm																																																			
3	N	1	f	5.100 8 GHz	-54.274 dBm																																																			
4	N	1	f	7.444 9 GHz	-55.000 dBm																																																			
5	N	1	f	9.959 8 GHz	-55.204 dBm																																																			

ANT2:

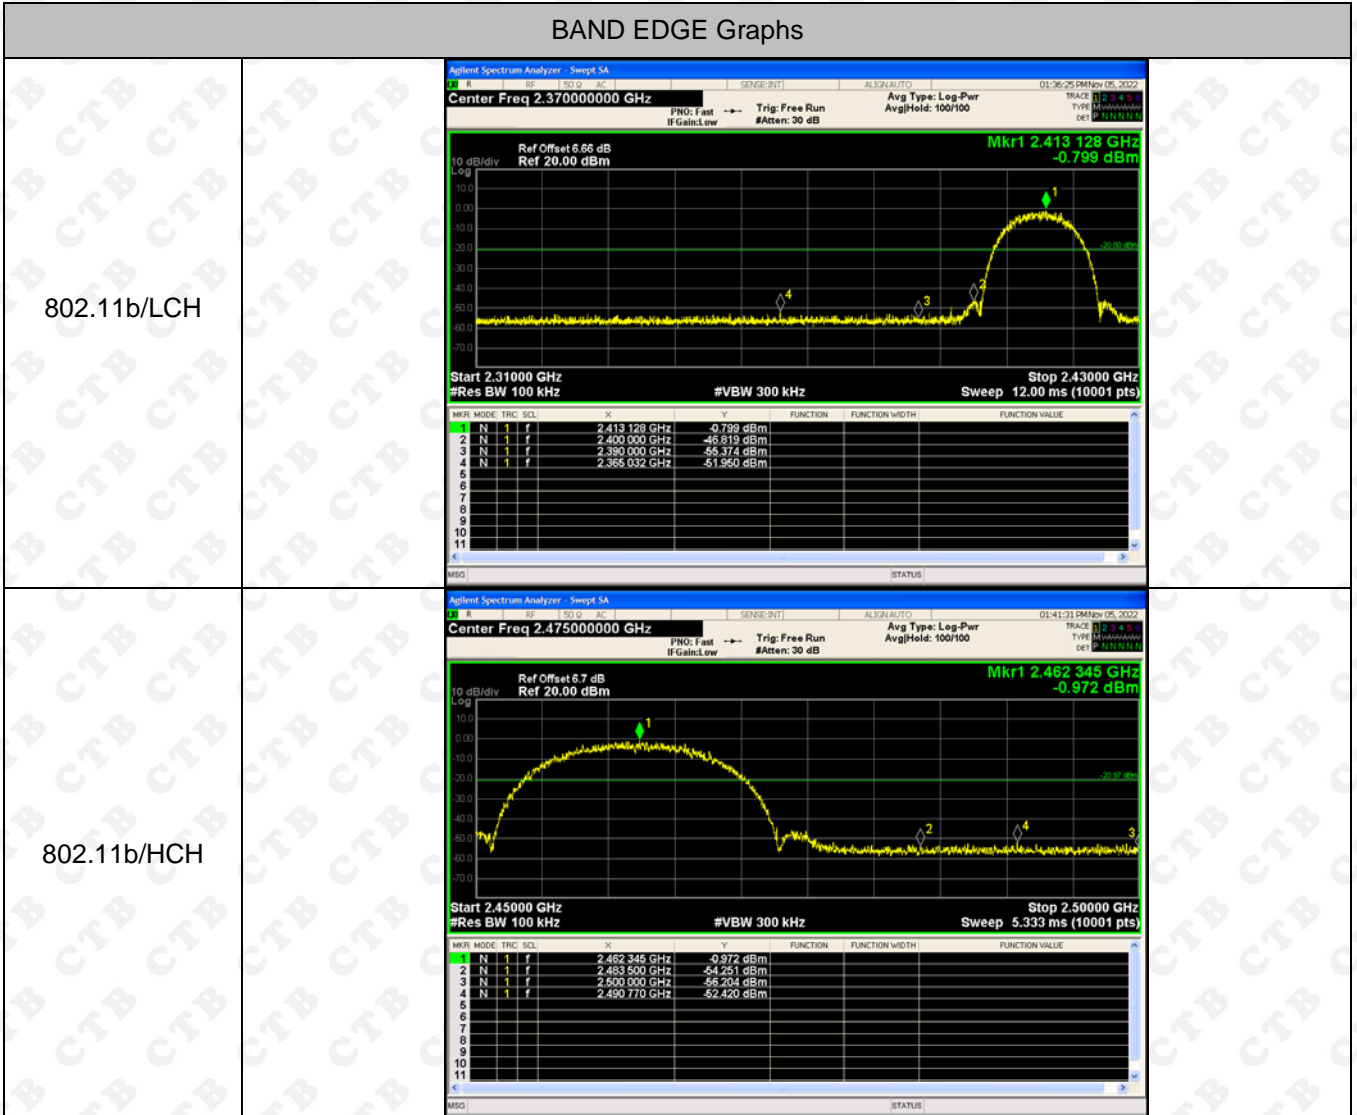


BAND EDGE Graphs

802.11g/LCH

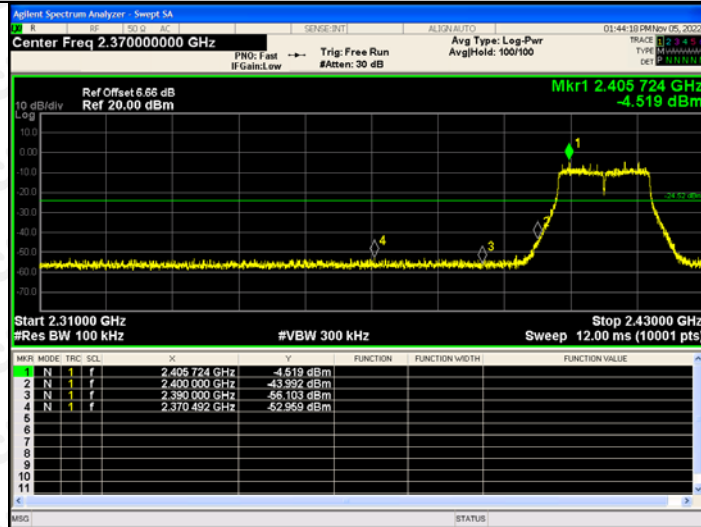


802.11g/HCH

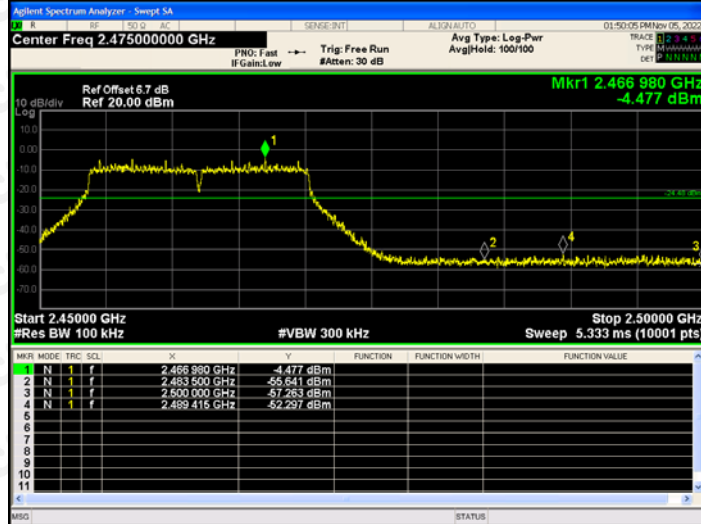


BAND EDGE Graphs

802.11n(HT20)/L
CH

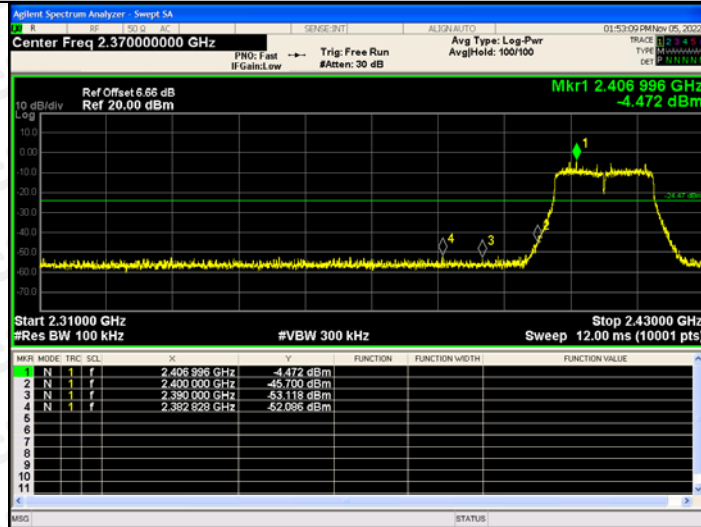


802.11n(HT20)/H
CH

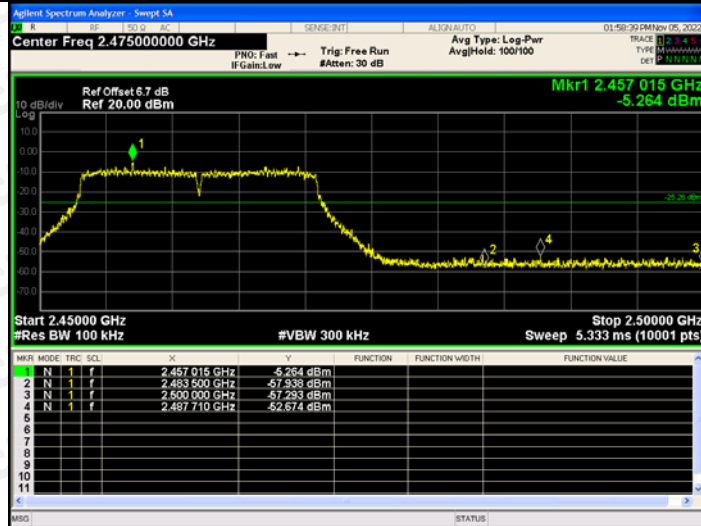


BAND EDGE Graphs

802.11n(HT40)/L
CH

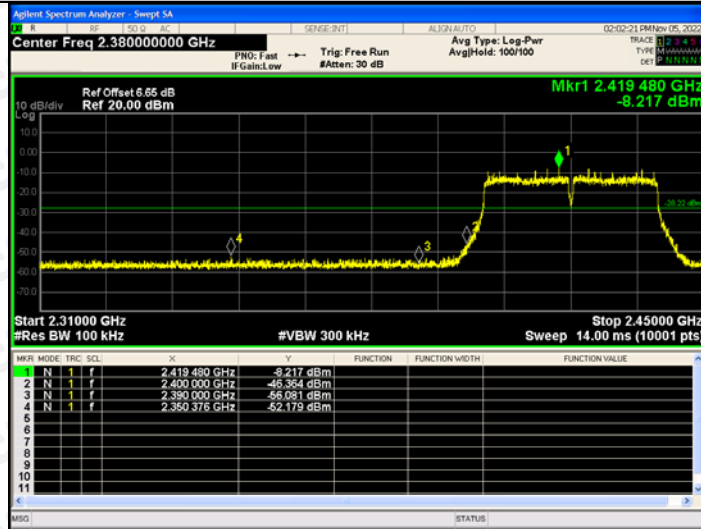

802.11n(HT40)/H
CH

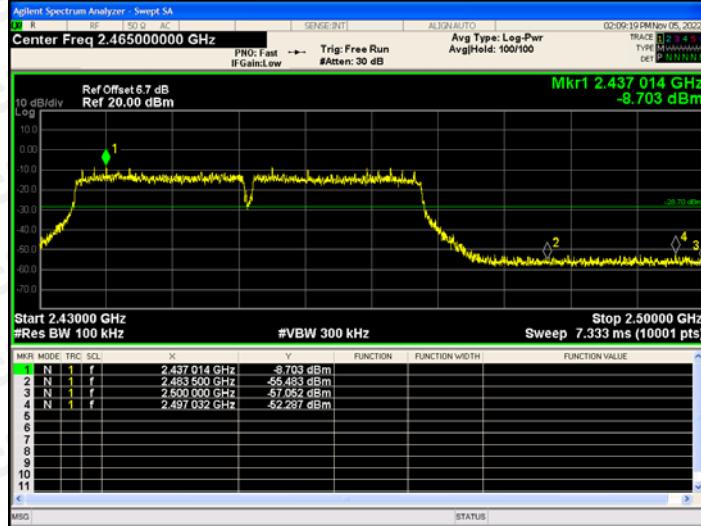

RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs


<p>802.11n (HT20)/ LCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4061 GHz</td> <td></td> <td></td> <td>-7.884 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6630 GHz</td> <td></td> <td></td> <td>-41.339 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7875 GHz</td> <td></td> <td></td> <td>-55.246 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0498 GHz</td> <td></td> <td></td> <td>-54.321 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6318 GHz</td> <td></td> <td></td> <td>-53.976 dBm</td> </tr> </tbody> </table>	MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4061 GHz			-7.884 dBm	2	N	1	f	24.6630 GHz			-41.339 dBm	3	N	1	f	4.7875 GHz			-55.246 dBm	4	N	1	f	7.0498 GHz			-54.321 dBm	5	N	1	f	9.6318 GHz			-53.976 dBm	
MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.4061 GHz			-7.884 dBm																																											
2	N	1	f	24.6630 GHz			-41.339 dBm																																											
3	N	1	f	4.7875 GHz			-55.246 dBm																																											
4	N	1	f	7.0498 GHz			-54.321 dBm																																											
5	N	1	f	9.6318 GHz			-53.976 dBm																																											
<p>802.11n (HT20)/ MCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4335 GHz</td> <td></td> <td></td> <td>-6.790 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6303 GHz</td> <td></td> <td></td> <td>-41.922 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8620 GHz</td> <td></td> <td></td> <td>-54.564 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3075 GHz</td> <td></td> <td></td> <td>-54.569 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6530 GHz</td> <td></td> <td></td> <td>-56.132 dBm</td> </tr> </tbody> </table>	MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4335 GHz			-6.790 dBm	2	N	1	f	24.6303 GHz			-41.922 dBm	3	N	1	f	4.8620 GHz			-54.564 dBm	4	N	1	f	7.3075 GHz			-54.569 dBm	5	N	1	f	9.6530 GHz			-56.132 dBm	
MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.4335 GHz			-6.790 dBm																																											
2	N	1	f	24.6303 GHz			-41.922 dBm																																											
3	N	1	f	4.8620 GHz			-54.564 dBm																																											
4	N	1	f	7.3075 GHz			-54.569 dBm																																											
5	N	1	f	9.6530 GHz			-56.132 dBm																																											
<p>802.11n (HT20)/ HCH</p>	<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4547 GHz</td> <td></td> <td></td> <td>-5.056 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.1045 GHz</td> <td></td> <td></td> <td>-41.671 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.1228 GHz</td> <td></td> <td></td> <td>-54.284 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4548 GHz</td> <td></td> <td></td> <td>-53.669 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0427 GHz</td> <td></td> <td></td> <td>-56.223 dBm</td> </tr> </tbody> </table>	MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4547 GHz			-5.056 dBm	2	N	1	f	24.1045 GHz			-41.671 dBm	3	N	1	f	5.1228 GHz			-54.284 dBm	4	N	1	f	7.4548 GHz			-53.669 dBm	5	N	1	f	10.0427 GHz			-56.223 dBm	
MFR	MODE	TRC	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.4547 GHz			-5.056 dBm																																											
2	N	1	f	24.1045 GHz			-41.671 dBm																																											
3	N	1	f	5.1228 GHz			-54.284 dBm																																											
4	N	1	f	7.4548 GHz			-53.669 dBm																																											
5	N	1	f	10.0427 GHz			-56.223 dBm																																											

RF Conducted Spurious Emissions Graphs

802.11
n(HT40)
/LCH

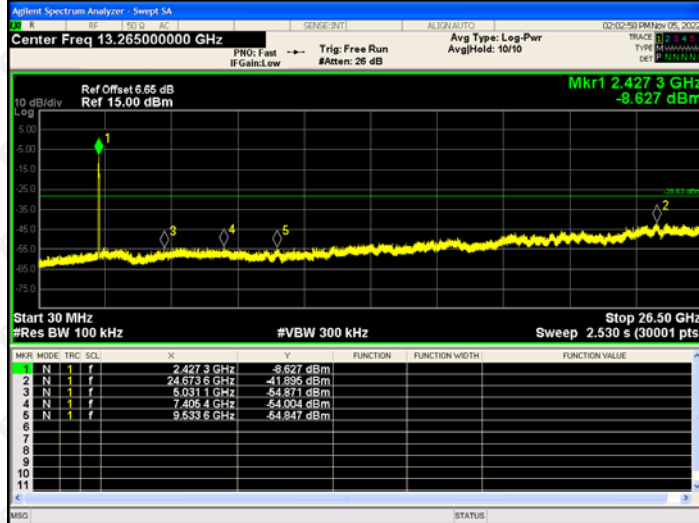

802.11
n(HT40)
/MCH

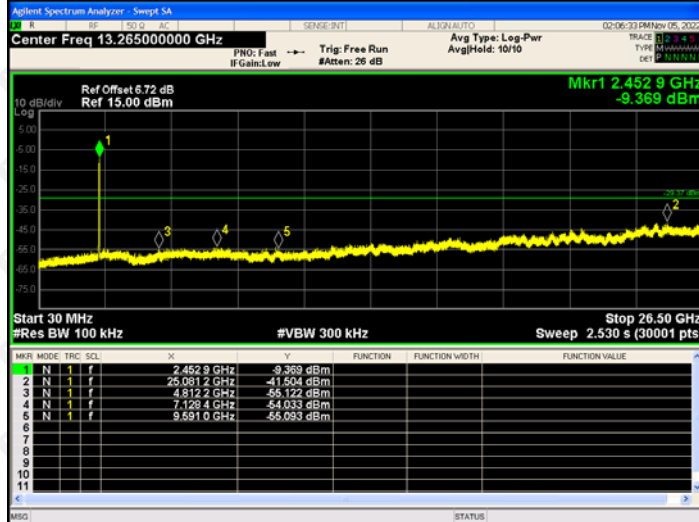

802.11
n(HT40)
/HCH

