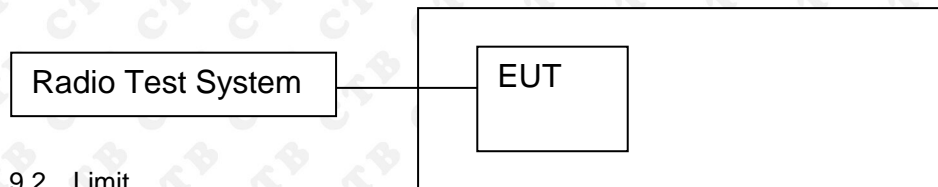


9. CODUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

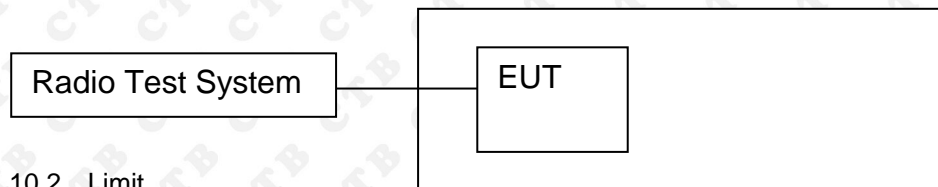
1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.332	14.765	/	30
	MCH	14.164	14.515	/	30
	HCH	14.66	14.593	/	30
802.11g	LCH	13.408	13.594	/	30
	MCH	13.227	13.41	/	30
	HCH	13.113	13.754	/	30
802.11n(HT20)	LCH	13.889	13.551	16.734	30
	MCH	13.643	13.822	16.744	30
	HCH	13.58	13.212	16.410	30
802.11n(HT40)	LCH	12.666	12.626	15.656	30
	MCH	12.848	12.544	15.709	30
	HCH	12.804	12.436	15.634	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup



10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.685	500	PASS
	MCH	10.237	500	PASS
	HCH	9.911	500	PASS
802.11g	LCH	16.352	500	PASS
	MCH	16.347	500	PASS
	HCH	16.332	500	PASS
802.11n(HT20)	LCH	17.565	500	PASS
	MCH	17.288	500	PASS
	HCH	17.079	500	PASS
802.11n(HT40)	LCH	35.172	500	PASS
	MCH	35.399	500	PASS
	HCH	35.568	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.7	500	PASS
	MCH	10.613	500	PASS
	HCH	10.656	500	PASS
802.11g	LCH	16.345	500	PASS
	MCH	16.323	500	PASS
	HCH	16.359	500	PASS
802.11n(HT20)	LCH	17.277	500	PASS
	MCH	17.027	500	PASS
	HCH	17.208	500	PASS
802.11n(HT40)	LCH	35.447	500	PASS
	MCH	35.344	500	PASS
	HCH	35.204	500	PASS

ANT1:
Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Radio Std: None Trig: Free Run Avg/Hold: 100/100 #IF Gain: Low #Atten: 30 dB</p> <p>Ref Offset 6.66 dB Ref 26.66 dB Mkr3 2.41737 GHz -8.5223 dBm</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.900 MHz Total Power 15.7 dBm</p> <p>Transmit Freq Error 27.235 kHz OBW Power 99.00 % x dB Bandwidth 10.69 MHz x dB -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Radio Std: None Trig: Free Run Avg/Hold: 100/100 #IF Gain: Low #Atten: 30 dB</p> <p>Ref Offset 6.72 dB Ref 26.72 dB Mkr3 2.442106 GHz -8.5391 dBm</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.897 MHz Total Power 15.5 dBm</p> <p>Transmit Freq Error -12.164 kHz OBW Power 99.00 % x dB Bandwidth 10.24 MHz x dB -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Radio Std: None Trig: Free Run Avg/Hold: 100/100 #IF Gain: Low #Atten: 30 dB</p> <p>Ref Offset 6.7 dB Ref 26.70 dB Mkr3 2.46691 GHz -7.8751 dBm</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.846 MHz Total Power 16.1 dBm</p> <p>Transmit Freq Error -45.177 kHz OBW Power 99.00 % x dB Bandwidth 9.911 MHz x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3 2.420172 GHz</p> <p>-10.263 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.440 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -4.064 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.35 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.445162 GHz</p> <p>-10.682 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.441 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -11.892 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.35 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.470167 GHz</p> <p>-10.889 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.474 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error 1.354 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.33 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420772 GHz -10.422 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td colspan="3">17.611 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	17.611 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.9 dBm												
17.611 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445633 GHz -12.214 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">17.575 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.575 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.8 dBm												
17.575 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470532 GHz -9.9741 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.621 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.621 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.6 dBm												
17.621 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.65 dB</p> <p>Ref: 26.65 dBm</p> <p>Mkr3 2.439582 GHz</p> <p>-15.114 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.027 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -3.967 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.17 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.454677 GHz</p> <p>-14.935 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.045 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error -22.970 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.40 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.469752 GHz</p> <p>-14.002 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.039 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -32.182 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.57 MHz</p> <p>x dB -6.00 dB</p>

ANT2:
Test Graph:



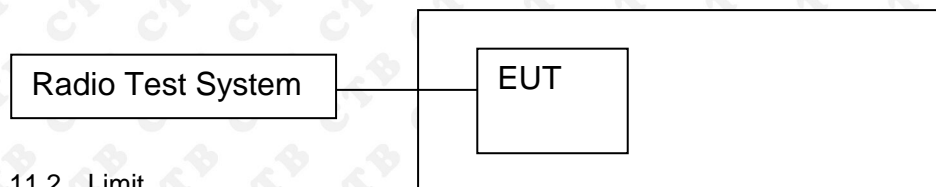
<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420169 GHz -10.281 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.444 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.444 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
16.444 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445146 GHz -10.626 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.450 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	16.450 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.5 dBm											
16.450 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470159 GHz -9.8357 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">16.441 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	16.441 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.7 dBm											
16.441 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420637 GHz -12.057 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td colspan="3">17.583 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	17.583 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.7 dBm												
17.583 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445507 GHz -10.952 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">17.597 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.597 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.8 dBm												
17.597 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.470607 GHz -12.184 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3">17.616 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	17.616 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB	
Occupied Bandwidth	Total Power	12.1 dBm												
17.616 MHz														
Transmit Freq Error	OBW Power	99.00 %												
x dB Bandwidth	x dB	-6.00 dB												

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.65 dB</p> <p>Ref: 26.65 dBm</p> <p>Mkr3 2.439689 GHz</p> <p>-14.395 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.033 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -34.464 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.45 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.454644 GHz</p> <p>-15.940 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.020 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -28.392 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.34 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.469562 GHz</p> <p>-14.209 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 35.996 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error -39.781 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.20 MHz</p> <p>x dB -6.00 dB</p>

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

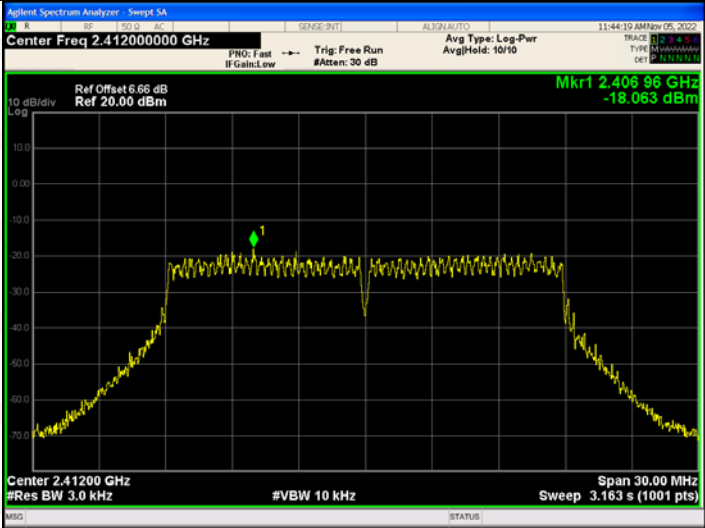
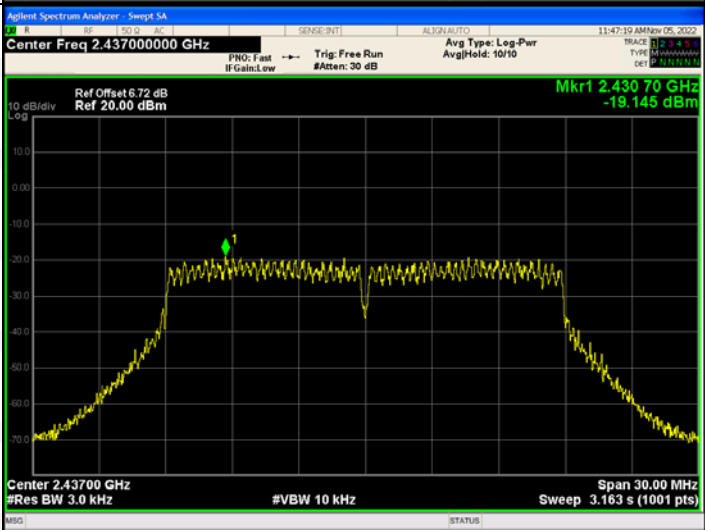
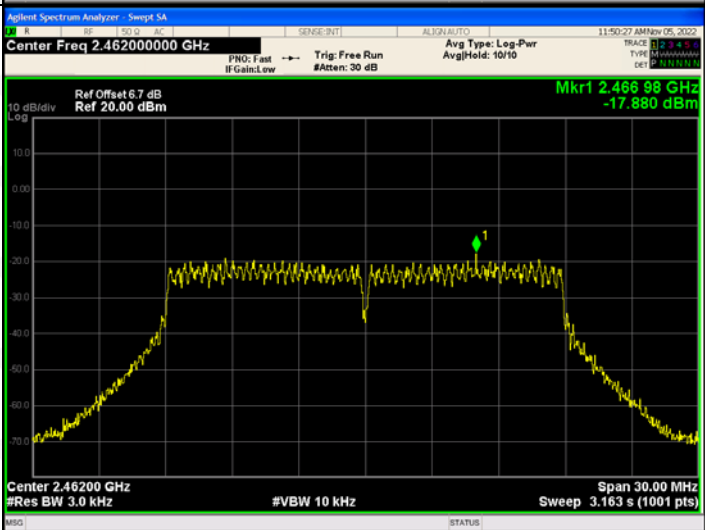
11.4 Test Result

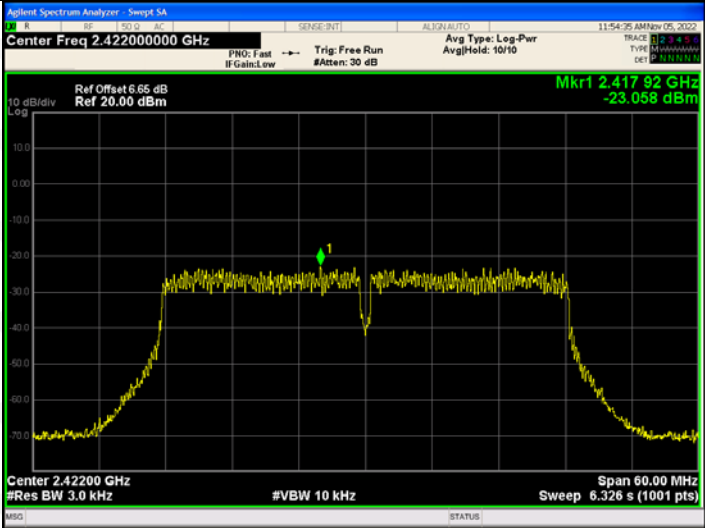
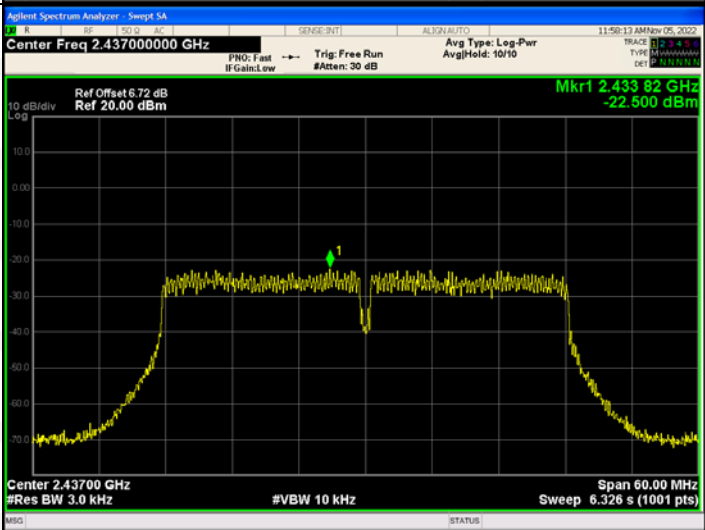
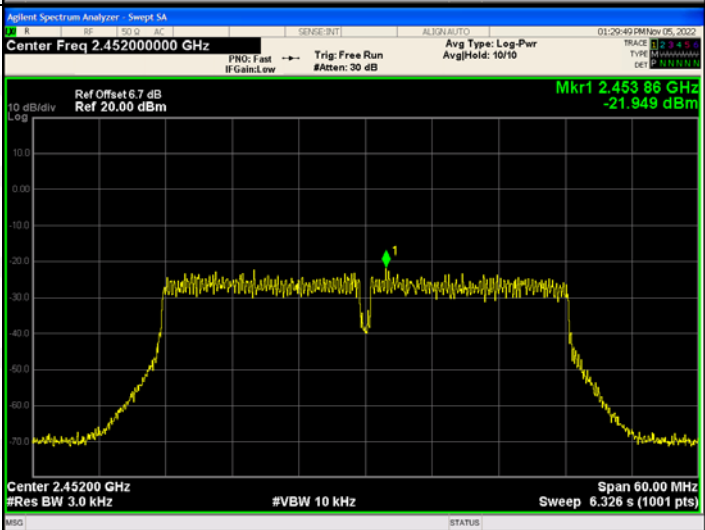
Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-15.717	-14.976	/	6.32
	MCH	-15.554	-15.093	/	6.32
	HCH	-14.931	-14.792	/	6.32
802.11g	LCH	-17.899	-18.154	/	6.32
	MCH	-18.523	-18.178	/	6.32
	HCH	-18.984	-18.231	/	6.32
802.11n(H T20)	LCH	-18.063	-19.672	-15.783	6.32
	MCH	-19.145	-19.001	-16.062	6.32
	HCH	-17.88	-18.587	-15.209	6.32
802.11n(H T40)	LCH	-23.058	-22.9	-19.968	6.32
	MCH	-22.5	-21.325	-18.863	6.32
	HCH	-21.949	-23.077	-19.466	6.32

**ANT1:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.410 23 GHz -15.717 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.436 91 GHz -15.554 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.461 91 GHz -14.931 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.418 24 GHz -17.899 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.431 99 GHz -18.523 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.468 87 GHz -18.984 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	

<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		

<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 6.65 dB Ref 20.00 dBm</p> <p>Mkr1 2.417 92 GHz -23.058 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.433 82 GHz -22.500 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.453 86 GHz -21.949 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

**ANT 2:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.411 85 GHz -14.976 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.435 77 GHz -15.093 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.463 77 GHz -14.792 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.40573 GHz -18.154 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.43199 GHz -18.178 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.45573 GHz -18.231 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz</p> <p>Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB Ref 20.00 dBm</p> <p>Mkr1 2.407 02 GHz -19.672 dBm</p> <p>Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.433 28 GHz -19.001 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.455 10 GHz -18.587 dBm</p> <p>Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>	

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset 6.65 dB Ref 20.00 dBm</p> <p>Mkr1 2.43730 GHz -22.900 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p>Mkr1 2.45074 GHz -21.325 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset 6.7 dB Ref 20.00 dBm</p> <p>Mkr1 2.43820 GHz -23.077 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PIFA antenna and no consideration of replacement. The best case gain of the antenna is 4.67dBi.

13. EUT PHOTOGRAPHS**External Photos
EUT Photo 1****EUT Photo 2**

14. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



※※※※ END OF REPORT ※※※※