



Start Fred 1.000000000 GHz Stop Freq 5.420000000 GHz **CF Step** 442.000000 MHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 1.000 GHz #Res BW 1.0 MHz Stop 5.420 GHz Sweep 8.000 ms (30000 pts) Log #VBW 3.0 MHz Test_Graph_802.11a_ANT2_5500_6Mbps_Frequency Band 2








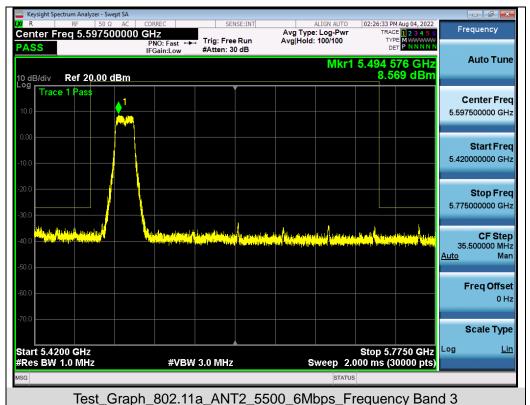

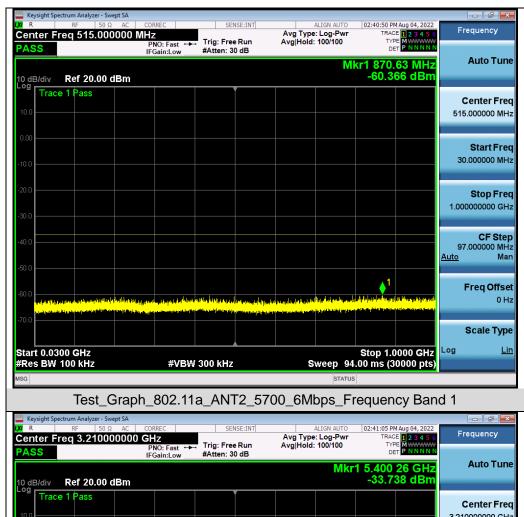

3.210000000 GHz Start Fred 1.000000000 GHz Stop Freq 5.420000000 GHz **CF Step** 442.000000 MHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 1.000 GHz #Res BW 1.0 MHz Stop 5.420 GHz Sweep 8.000 ms (30000 pts) Log #VBW 3.0 MHz Test_Graph_802.11a_ANT2_5700_6Mbps_Frequency Band 2



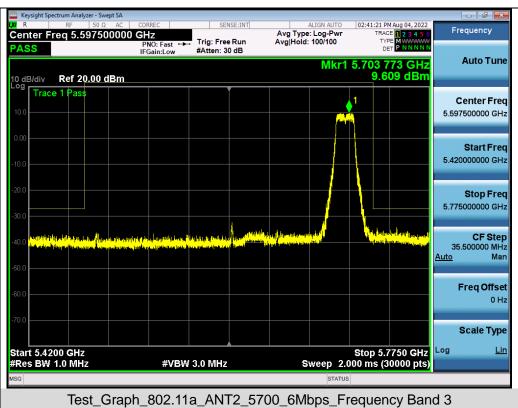



Stop Freq 5.420000000 GHz

CF Step 442.000000 MHz

> Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Stop 5.420 GHz Sweep 8.000 ms (30000 pts)



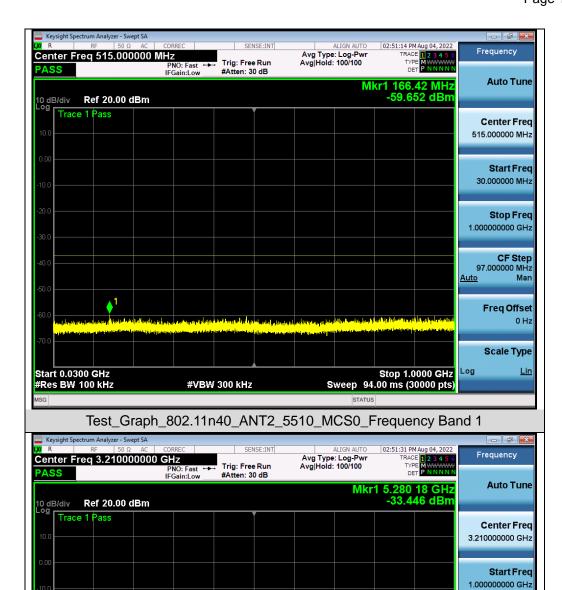


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_5510_MCS0_Frequency Band 2

#VBW 3.0 MHz

Start 1.000 GHz #Res BW 1.0 MHz



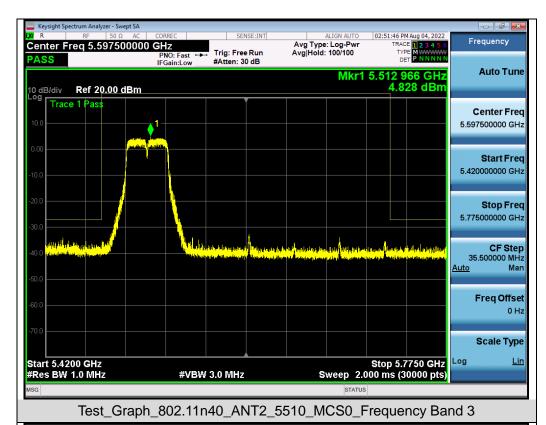




Test_Graph_802.11n40_ANT2_5510_MCS0_Frequency Band 4







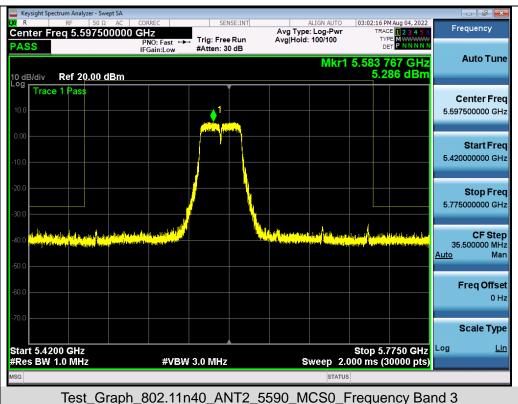



1.000000000 GHz

Stop Freq 5.420000000 GHz


CF Step 442.000000 MHz

> Freq Offset 0 Hz

Mar

<u>Auto</u>



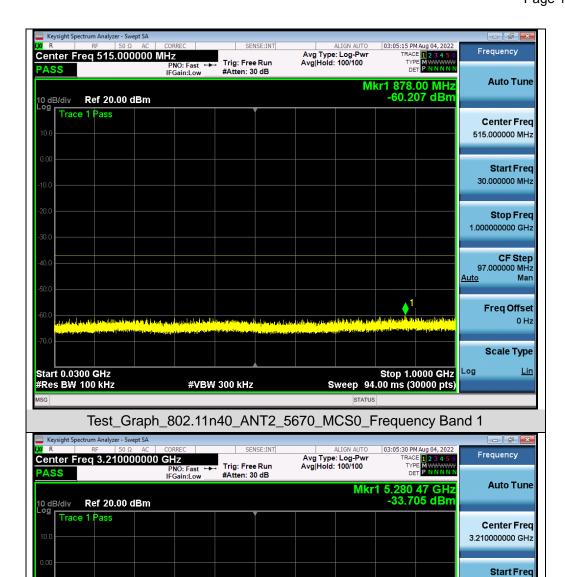


Start 1.000 GHz
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 8.000 ms (30000 pts)


Test_Graph_802.11n40_ANT2_5670_MCS0_Frequency Band 2

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



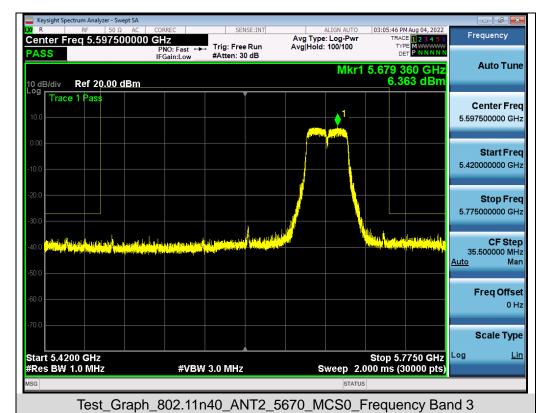









Test Graphs of Spurious Emissions outside of the 5.725-5.85 GHz band for transmitters operating in the 5.725-5.85 GHz band

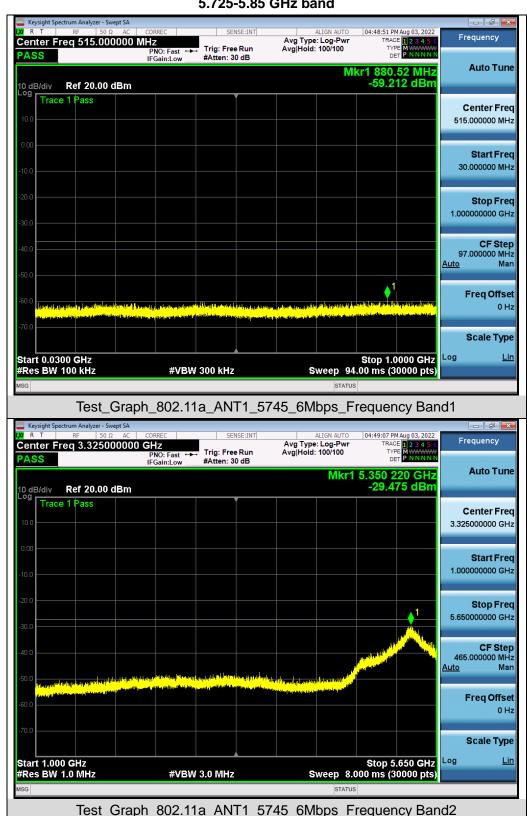


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



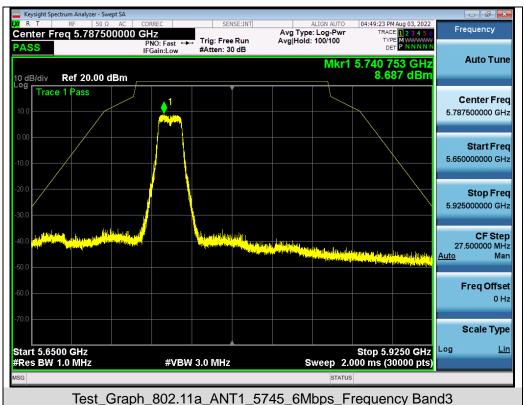






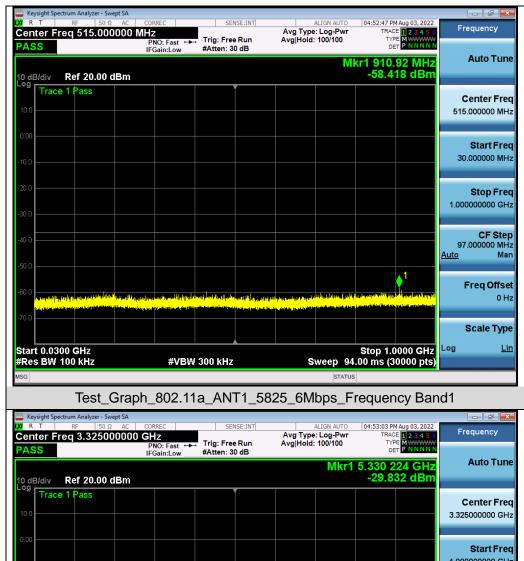




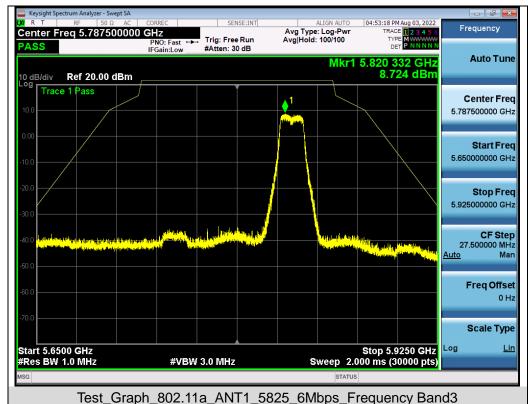





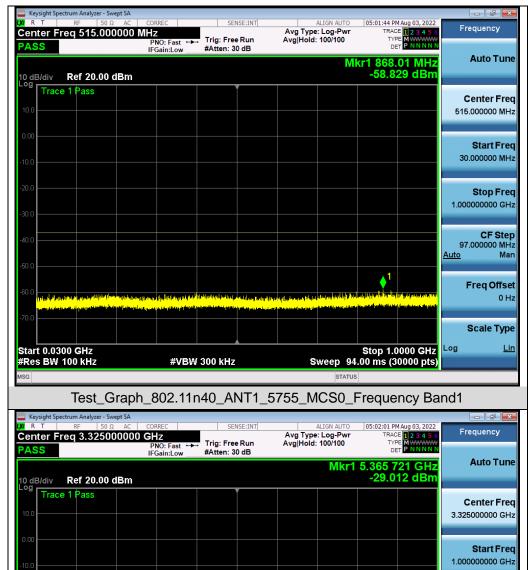

Stop Freq
5.650000000 GHz


CF Step
465.000000 MHz
Auto Man

Freq Offset
0 Hz

#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 8.000 ms (30000 pts)

Test_Graph_802.11n40_ANT1_5755_MCS0_Frequency Band2




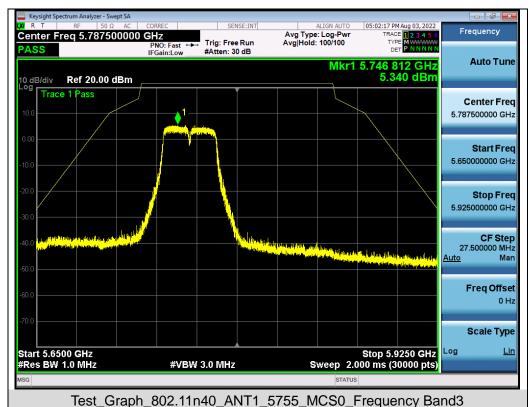


um Analyzer - Swept SA





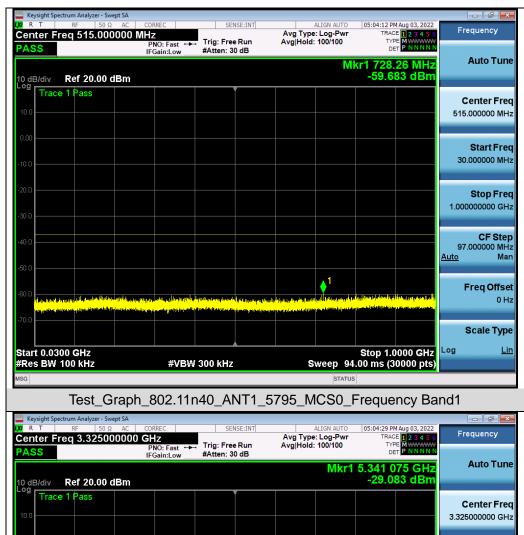



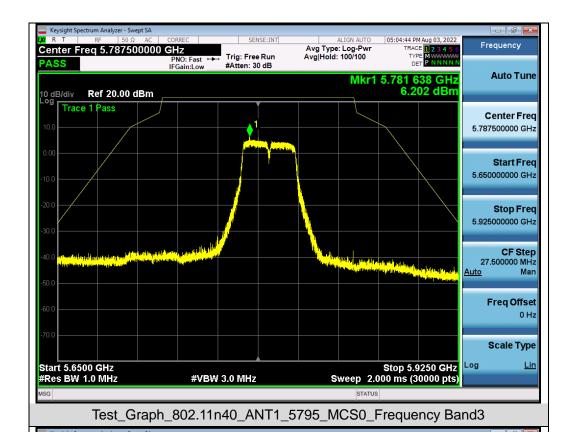

05:05:05 PM Aug 03, 2022

TRACE 1 2 3 4 5 6

TYPE M Center Freq 16.462500000 GHz
PNO: Fast
FGain:Low Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 25.058 2 GHz -38.967 dBm 10 dB/div Ref 20.00 dBm Trace 1 Pass Center Freq 16.462500000 GHz Start Fred 5.925000000 GHz Stop Freq 27.000000000 GHz **CF Step** 2.107500000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 5.93 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 54.00 ms (30000 pts) Log

Test_Graph_802.11n40_ANT1_5795_MCS0_Frequency Band4

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

#VBW 3.0 MHz

Web: http://www.agccert.com/

5.650000000 GHz

<u>Auto</u>

Log


Stop 5.650 GHz Sweep 8.000 ms (30000 pts) CF Step 465.000000 MHz

> Freq Offset 0 Hz

Scale Type

Mar



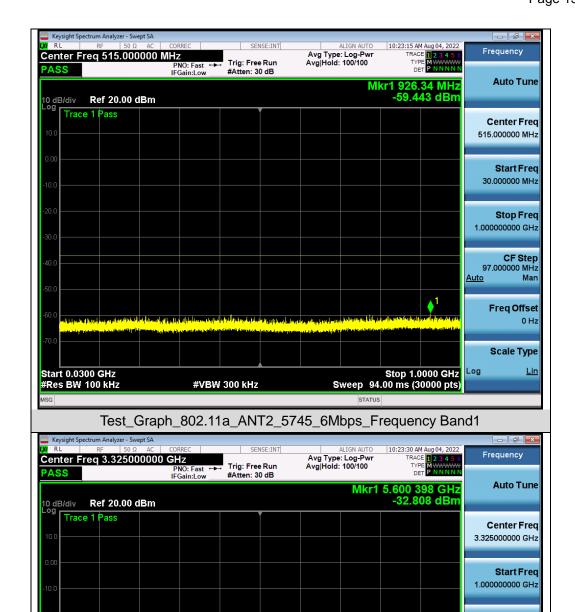


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11a_ANT2_5745_6Mbps_Frequency Band2

#VBW 3.0 MHz


Start 1.000 GHz #Res BW 1.0 MHz



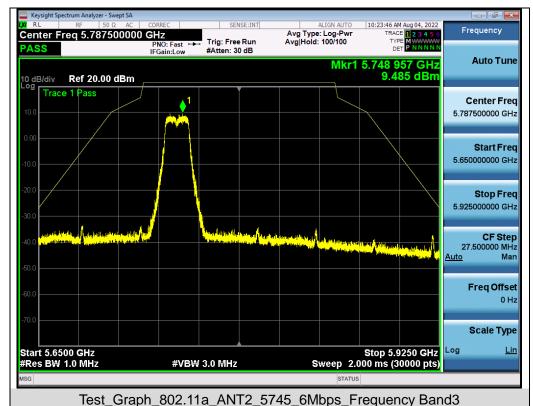






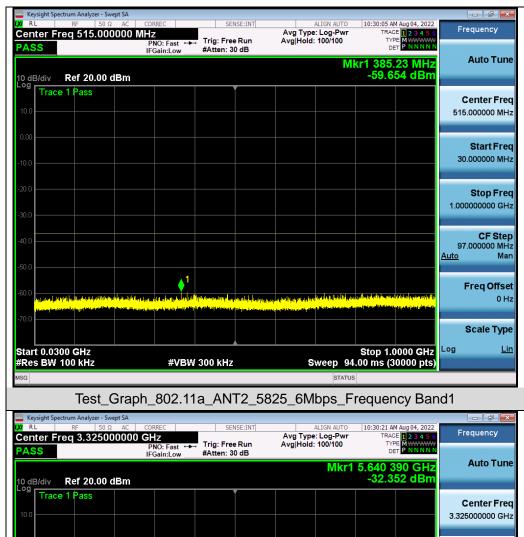



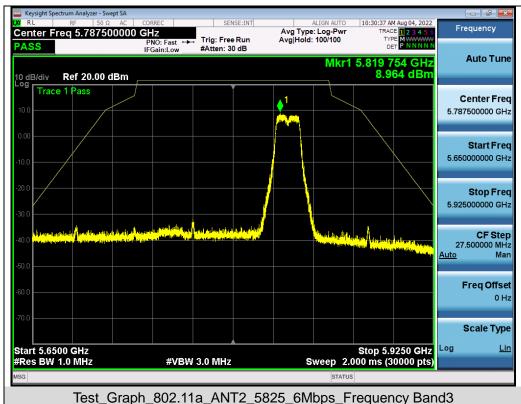



CF Step 465.000000 MHz

> Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)



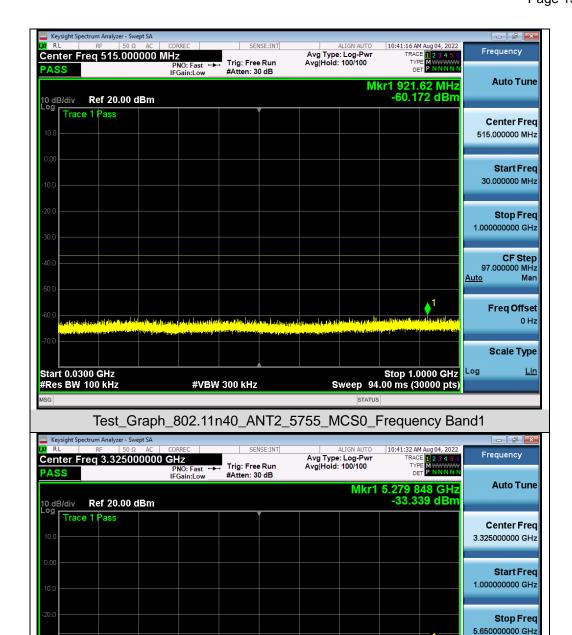


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_5755_MCS0_Frequency Band2

#VBW 3.0 MHz

Start 1.000 GHz #Res BW 1.0 MHz



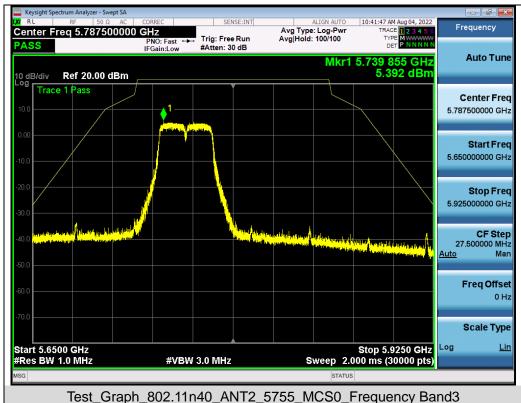



CF Step 465.000000 MHz

> Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Stop 5.650 GHz Sweep 8.000 ms (30000 pts)



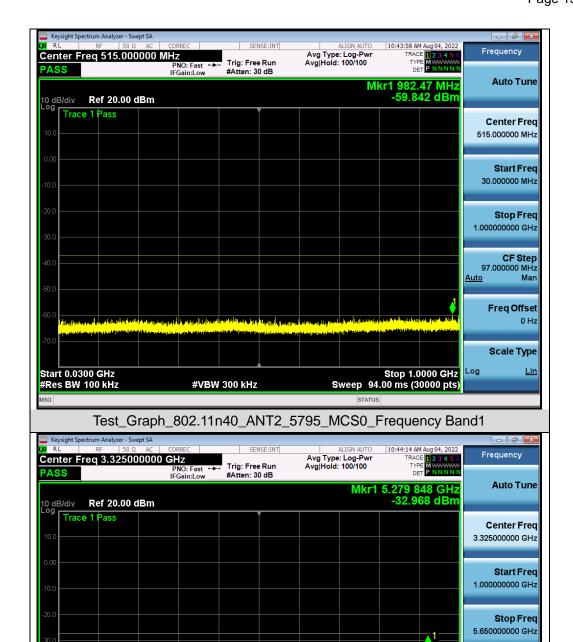


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT2_5795_MCS0_Frequency Band2

#VBW 3.0 MHz

Start 1.000 GHz #Res BW 1.0 MHz



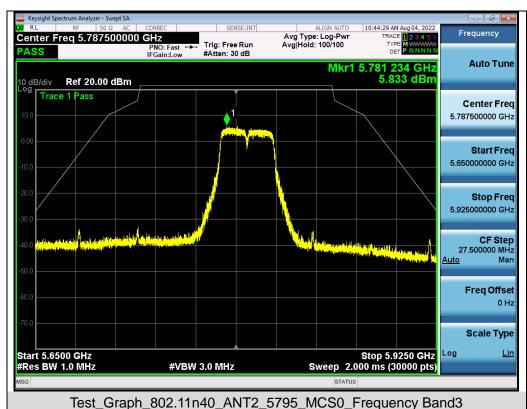

10:44:51 AM Aug 04, 2022

TRACE 1 2 3 4 5 6

TYPE M P N N N N Frequency Avg Type: Log-Pwi Avg|Hold: 100/100 Trig: Free Run #Atten: 30 dB **Auto Tune** Mkr1 25.564 7 GHz -39.292 dBm 10 dB/div Ref 20.00 dBm Trace 1 Pass Center Freq 16.462500000 GHz Start Fred 5.925000000 GHz Stop Freq 27.000000000 GHz **CF Step** 2.107500000 GHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Start 5.93 GHz #Res BW 1.0 MHz Stop 27.00 GHz Sweep 54.00 ms (30000 pts) Log #VBW 3.0 MHz Test_Graph_802.11n40_ANT2_5795_MCS0_Frequency Band4



Report No.: AGC12845220706FE06

Page 138 of 175

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

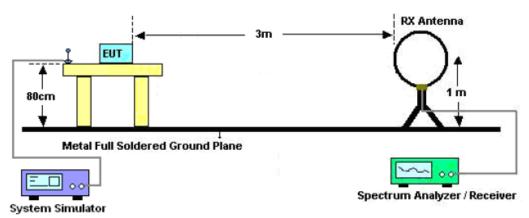

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

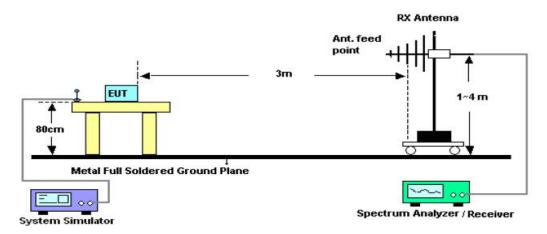

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

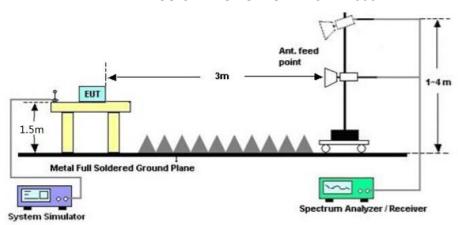

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Report No.: AGC12845220706FE06

Page 140 of 175

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz BAND 1

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

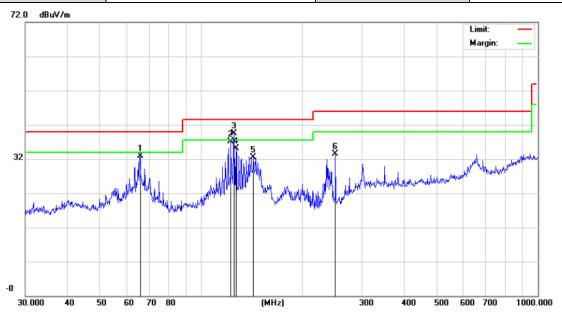


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		65.8031	16.05	16.85	32.90	40.00	-7.10	peak
2	,	122.4039	19.09	17.93	37.02	43.50	-6.48	peak
3	*	125.0066	21.58	17.89	39.47	43.50	-4.03	peak
4	,	126.7723	17.15	17.86	35.01	43.50	-8.49	peak
5	,	142.8242	15.15	17.44	32.59	43.50	-10.91	peak
6	-	250.3011	16.99	16.48	33.47	46.00	-12.53	peak

RESULT: PASS



EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

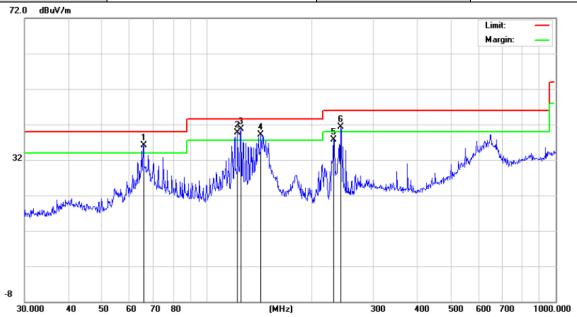


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBu∨	dB	dBuV/m	dBuV/m	dB	Detector
1	ļ	65.8031	19.01	17.01	36.02	40.00	-3.98	peak
2	ļ	122.4039	21.76	18.00	39.76	43.50	-3.74	peak
3	*	125.0066	22.74	18.03	40.77	43.50	-2.73	QP
4	İ	142.8243	21.18	17.94	39.12	43.50	-4.38	peak
5		230.9068	20.60	17.11	37.71	46.00	-8.29	peak
6	İ	241.6762	22.62	18.63	41.25	46.00	-4.75	peak

RESULT: PASS



Radiated emission from 30MHz to 1000MHz BAND 3

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

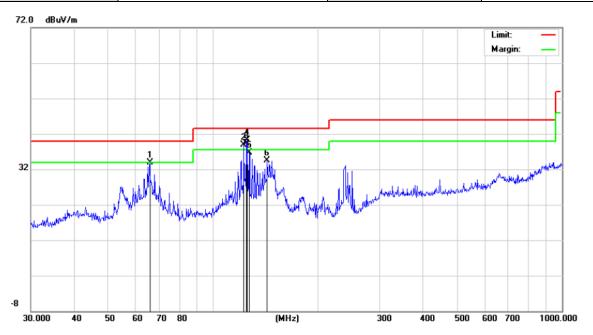


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		65.8031	16.96	16.85	33.81	40.00	-6.19	peak
2	İ	122.4040	20.90	17.93	38.83	43.50	-4.67	peak
3	ļ	124.5690	21.42	17.89	39.31	43.50	-4.19	peak
4	*	125.0066	22.50	17.89	40.39	43.50	-3.11	peak
5		126.7723	18.86	17.86	36.72	43.50	-6.78	peak
6		142.8243	16.98	17.44	34.42	43.50	-9.08	peak

RESULT: PASS



EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

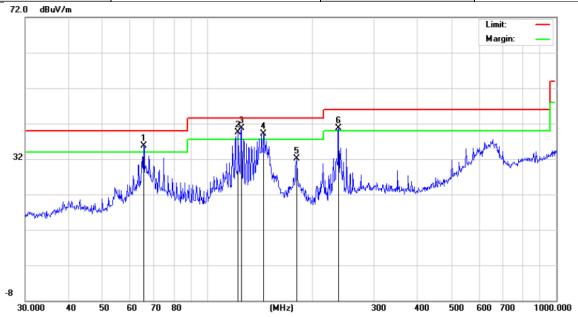


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	İ	65.5726	18.67	17.00	35.67	40.00	-4.33	peak
2	İ	122.4039	21.56	18.00	39.56	43.50	-3.94	peak
3	*	125.0066	22.76	18.03	40.79	43.50	-2.71	QP
4	İ	144.8418	21.35	17.74	39.09	43.50	-4.41	peak
5		180.0165	14.99	17.13	32.12	43.50	-11.38	peak
6	İ	237.4759	22.53	18.23	40.76	46.00	-5.24	peak

RESULT: PASS



Radiated emission from 30MHz to 1000MHz BAND 4

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

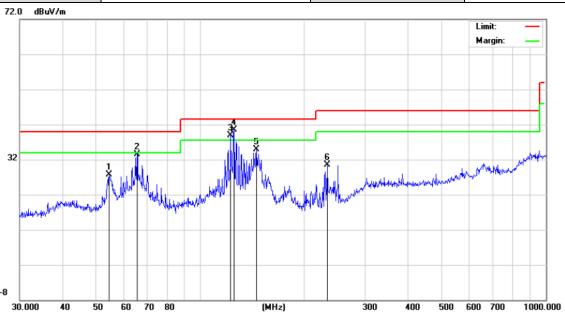


MHz dBuV dB 1 54.4515 12.78 14.95 2 65.5726 16.71 16.83 3 ! 122.4039 20.98 17.93	or ment Limit Over
2 65.5726 16.71 16.83	dBuV/m dBuV/m dB Detector
	5 27.73 40.00 -12.27 peak
3 1 122 /039 20 98 17 93	3 33.54 40.00 -6.46 peak
3 : 122.4039	3 38.91 43.50 -4.59 peak
4 * 125.0066 22.60 17.89	9 40.49 43.50 -3.01 QP
5 145.3505 17.67 17.25	5 34.92 43.50 -8.58 peak
6 233.3487 14.65 15.86	30.51 46.00 -15.49 peak

RESULT: PASS



EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

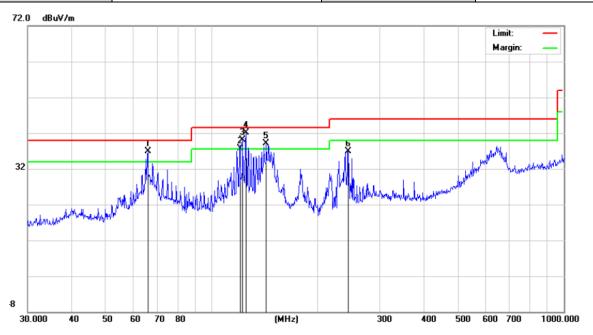

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	İ	65.8031	19.80	17.01	36.81	40.00	-3.19	peak
2	İ	119.8556	19.82	17.93	37.75	43.50	-5.75	peak
3	İ	122.4040	22.18	18.00	40.18	43.50	-3.32	peak
4	*	125.0066	24.01	18.04	42.05	43.50	-1.45	QP
5	į	142.8243	21.07	17.94	39.01	43.50	-4.49	peak
6		244.2321	18.39	18.59	36.98	46.00	-9.02	peak

RESULT: PASS

Note: All test channels had been tested. The 802.11a20 at 5180MHz is the worst case and recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Report No.: AGC12845220706FE06

Page 147 of 175

Radiated emission above 1GHz

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM	
Temperature	25°C	Relative Humidity	60%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5180MHz	Antenna	Horizontal/Vertical	

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
10360.042	48.52	9.14	57.66	68.20	-10.54	peak	
15540.063	42.03	10.22	52.25	74.00	-21.75	peak	
15540.063	32.59	10.22	42.81	54.00	-11.19	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
10360.042	47.06	9.14	56.20	68.20	-12.00	peak	
15540.063	41.88	10.22	52.10	74.00	-21.90	peak	
15540.063	32.74	10.22	42.96	54.00	-11.04	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							
	•						



Page 148 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5200MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	48.24	9.14	57.38	68.20	-10.82	peak
15600.063	43.51	10.22	53.73	74.00	-20.27	peak
15600.063	32.58	10.22	42.80	54.00	-11.20	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-ar	mplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10400.042	47.58	9.14	56.72	68.20	-11.48	peak
15600.063	42.15	10.22	52.37	74.00	-21.63	peak
15600.063	33.01	10.22	43.23	54.00	-10.77	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Page 149 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5240MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10480.042	48.25	9.14	57.39	68.20	-10.81	peak
15720.063	42.16	10.22	52.38	74.00	-21.62	peak
15720.063	31.89	10.22	42.11	54.00	-11.89	AVG
Remark:						
Factor = Anten	na Factor + Cabl	le Loss – Pre-ai	mplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
10480.042	47.56	9.14	56.70	68.20	-11.50	peak
15720.063	42.11	10.22	52.33	74.00	-21.67	peak
15720.063	32.05	10.22	42.27	54.00	-11.73	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			
			1			



Page 150 of 175

Radiated emission above 1GHz

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5500MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11000.056	48.03	9.14	57.17	74.00	-16.83	peak		
11000.056	32.04	9.14	41.18	54.00	-12.82	AVG		
16500.023	46.63	10.22	56.85	68.20	-11.35	peak		
Remark:								
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
11000.056	49.51	9.14	58.65	74.00	-15.35	peak
11000.056	31.33	9.14	40.47	54.00	-13.53	AVG
16500.023	43.88	10.22	54.10	68.20	-14.10	peak
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			



Page 151 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5600MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11200.022	46.58	9.14	55.72	74.00	-18.28	peak
11200.022	32.11	9.14	41.25	54.00	-12.75	AVG
16800.025	47.03	10.22	57.25	68.20	-10.95	peak
Remark:						•
Factor = Anten	na Factor + Cab	e Loss – Pre-ai	mplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11200.022	48.33	9.14	57.47	74.00	-16.53	peak
11200.022	32.45	9.14	41.59	54.00	-12.41	AVG
16800.025	42.56	10.22	52.78	68.20	-15.42	peak
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Page 152 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5700MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11400.025	48.05	9.14	57.19	74.00	-16.81	peak	
11400.025	32.79	9.14	41.93	54.00	-12.07	AVG	
17100.056	41.11	10.22	51.33	68.20	-16.87	peak	
Remark:	•		•		•	•	
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11400.025	48.57	9.14	57.71	74.00	-16.29	peak
11400.025	31.04	9.14	40.18	54.00	-13.82	AVG
17100.056	42.74	10.22	52.96	68.20	-15.24	peak
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-	amplifier.			



Page 153 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5745MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11490.042	47.13	9.14	56.27	74.00	-17.73	peak
11490.042	32.50	10.22	42.72	54.00	-11.28	peak
17235.063	41.02	10.22	51.24	68.20	-16.96	AVG
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
11490.042	46.38	9.14	55.52	74.00	-18.48	peak
11490.042	35.24	10.22	45.46	54.00	-8.54	peak
17235.063	40.03	10.22	50.25	68.20	-17.95	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	amplifier.			



Page 154 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5785MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11570.042	47.03	9.14	56.17	74.00	-17.83	peak
11570.042	35.85	10.22	46.07	54.00	-7.93	peak
17355.063	41.34	10.22	51.56	68.20	-16.64	AVG
Remark:						
Factor = Anter	nna Factor + Cab	le Loss – Pre-ai	mplifier.			

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	· Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
11570.042	48.01	9.14	57.15	74.00	-16.85	peak
11570.042	33.17	10.22	43.39	54.00	-10.61	peak
17355.063	39.99	10.22	50.21	68.20	-17.99	AVG
Remark:						
Factor = Anter	na Factor + Cabl	e Loss – Pre-a	mplifier.			



Page 155 of 175

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5825MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
11650.042	47.77	9.62	57.39	74.00	-16.61	peak	
11650.042	36.25	9.62	45.87	54.00	-8.13	peak	
17475.063	40.36	10.75	51.11	68.20	-17.09	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11650.042	48.03	9.62	57.65	74.00	-16.35	peak		
11650.042	35.24	9.62	44.86	54.00	-9.14	peak		
17475.063	41.23	10.75	51.98	68.20	-16.22	AVG		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Note: Both adapters have been tested. All test channels of each antenna had been tested. The 802.11a20 of antenna 1 is the worst case and recorded in the test report.

Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.


The "Factor" value can be calculated automatically by software of measurement system.




Test result for band edge emission at restricted bands BAND 1 antenna 1

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement

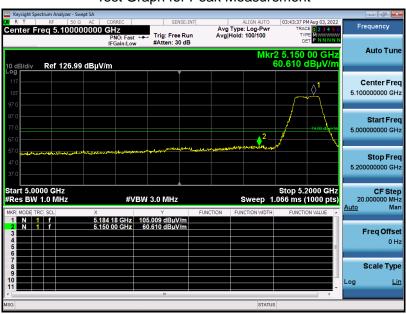

Test Graph for Average Measurement

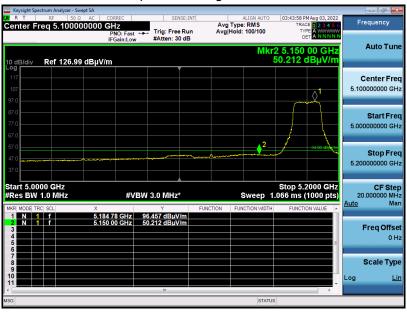


RESULT: PASS




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement

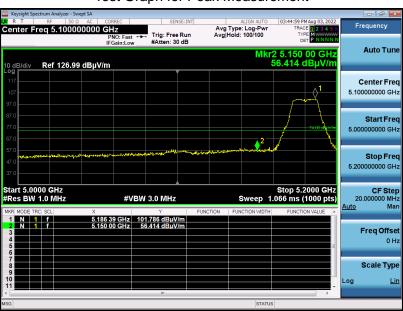

Test Graph for Average Measurement

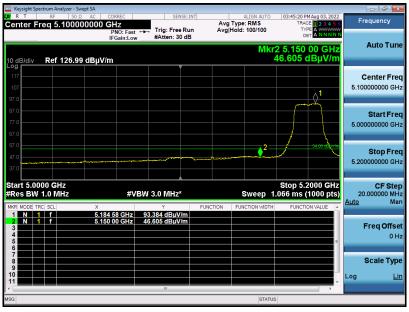




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

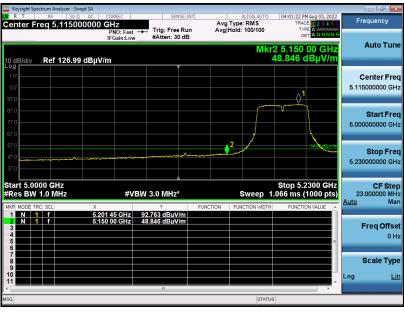



EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement







Test result for band edge emission at restricted bands BAND 1 antenna 2

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement

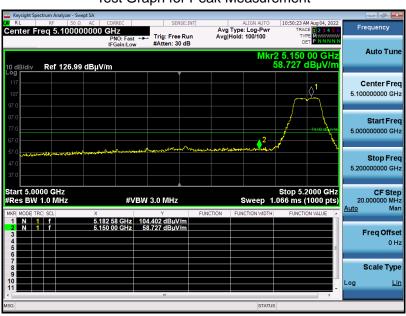

Test Graph for Average Measurement

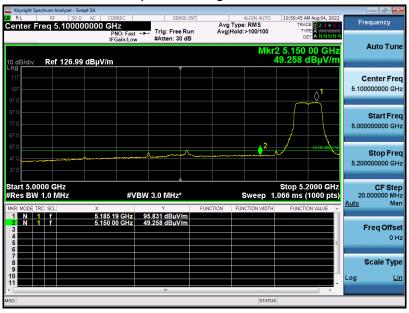

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement

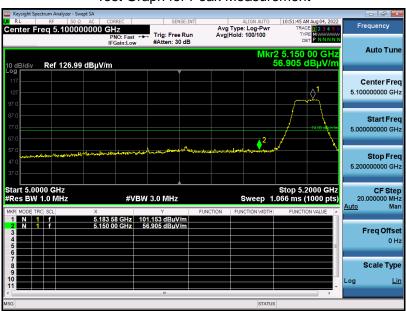


Test Graph for Average Measurement

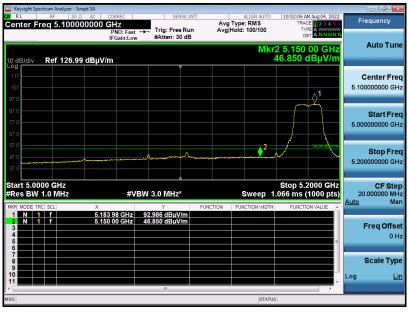




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement

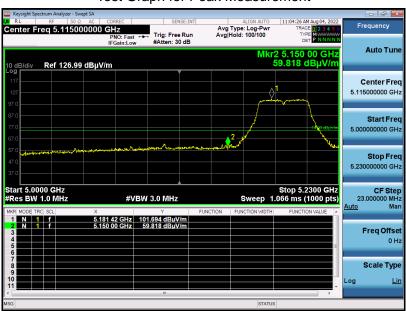


Test Graph for Average Measurement

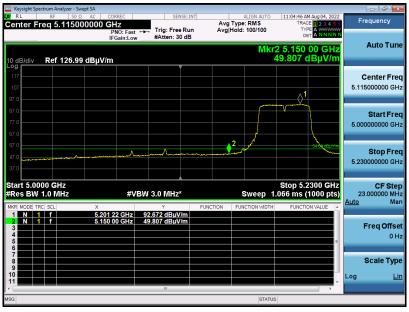




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement

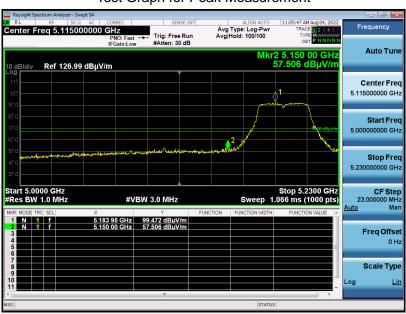

Test Graph for Average Measurement

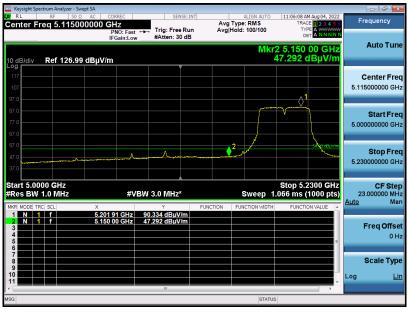





Test result for band edge emission at restricted bands BAND 3 antenna 1

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement

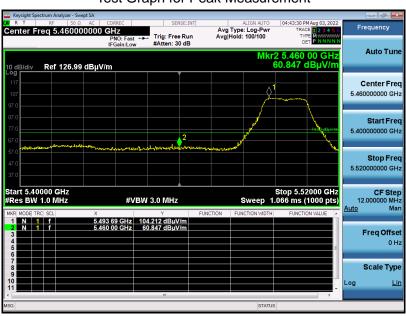

Test Graph for Average Measurement

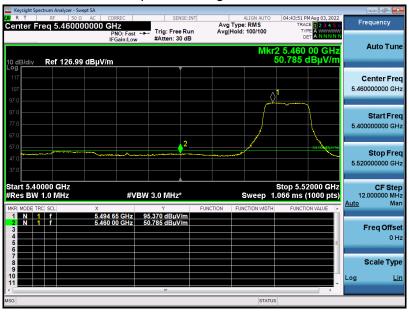

RESULT: PASS




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

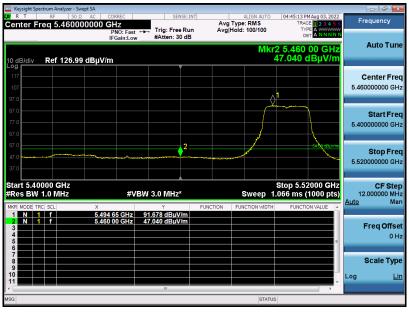





EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

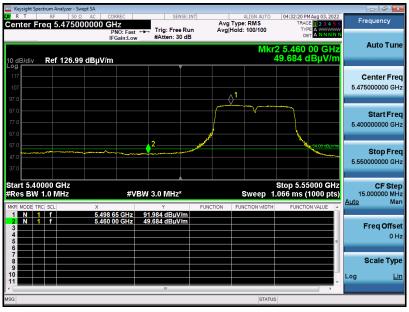






EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

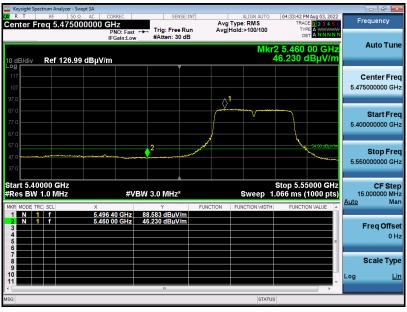




Test result for band edge emission at restricted bands BAND 3 antenna 2

EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

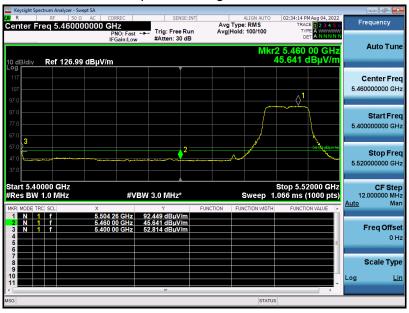

RESULT: PASS




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11a20 5180MHz	Antenna	Vertical

Test Graph for Peak Measurement




Test Graph for Average Measurement

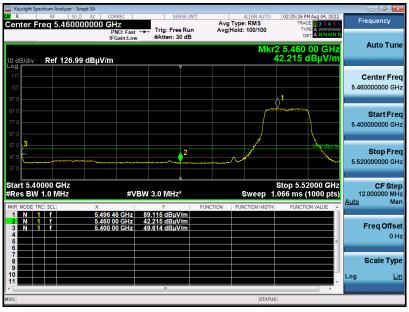




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Horizontal

Test Graph for Peak Measurement

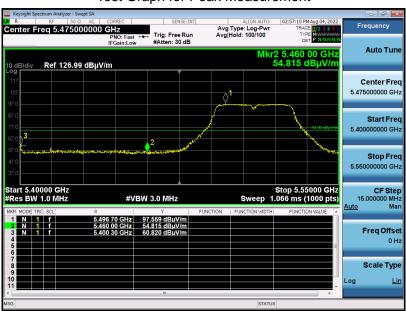


Test Graph for Average Measurement

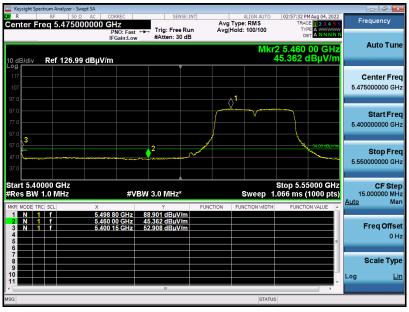




EUT	Vision-based Obstacle Avoidance Module	Model Name	FJDZ42P-VM
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 5190MHz	Antenna	Vertical

Test Graph for Peak Measurement

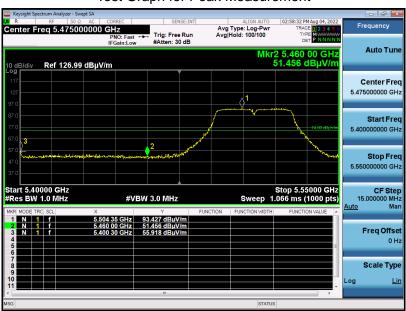

Test Graph for Average Measurement

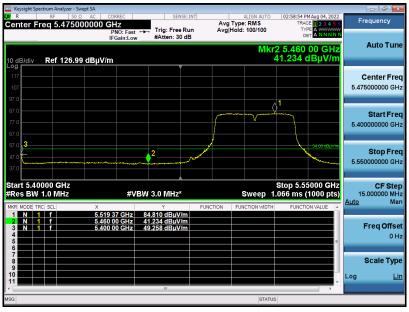




Page 172 of 175

1. Note: All the antennas have been pre-tested, and all modes of each antenna are tested. All the 20MHz bandwidth modulation had been tested, the antenna 1 in 802.11a20 at 5180MHz was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the antenna 1+2 in 802.11N40 at 5190MHz was the worst case and record in his test report.

- Only the data of band edge emission at the restricted band 4.5GHz-5.15GHz and 5.35GHz-5.46GHz
 record in the report. Other restricted band 7.25GHz-7.77GHz were considered as ambient noise. No
 recording in the test report.
- The sideband standard of U NII-3 frequency band is not defined, the transmitted signal does not fall in the
 restricted band, and the edge signal is far away from the edge of other restricted bands, and it is not reco
 rded in the report.





12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage		
	Q.P (dBµV)	Average (dBμV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

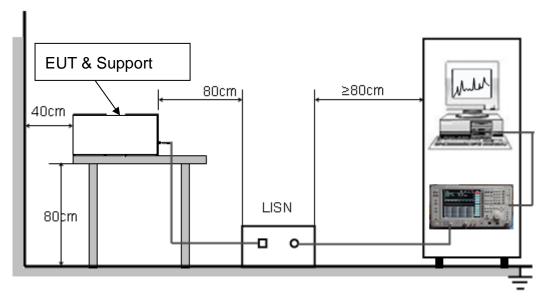



Page 174 of 175

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was repoted on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

RESULT: Not applicable



Page 175 of 175

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC12845220706AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC12845220706AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.