

TEST REPORT

Product Name: TWS Bluetooth headset
FCC ID: 2A9NQ-P50
Trademark: CIRCE
Model Number: P50, LX01, LX02, LX03, LX04, LX05, LX06, LX07, LX08, LX09, M1, M6, M8, M9, M11, M12, M15 PRO, M16, M16 PRO, M26, M27, M29, M30, M31, M33, M35, M37, M40, M41, M42, M43, M45, M46, M47, M48, M50, M60, M66 PRO, M70, M80, M88 PLUS M90, Pro6S, Pro8S, Pro9, Pro12, Pro18, Pro80, Pro90, Pro100, Pro200, Pro300, Pro500, S2, S03, S4, S5, S6, S8, S9, S15, S16, S18, S19, Y90, YD mini, YD06, YD07, YD08, YD09, E6S, H18, JS352, JS80, L12, N35, P47, Q35, A80, Air 11 pro, Air 13 pro, TG10, V28, V8S, V9, VG09, VL1, X12, X16, X18S, X20S, XT11, B30, B39, BQ20, BQ30, BQ40, BQ50, BQ60, BQ70, BQ80, F1, F3, F6, F7, F8, G1, G11, G35, G9S, GT01, K30, K40, K50, K60, KJ10, KJ12, KJ18, M17 X16S, X16PRO, L10 D32, R3, F06, J9 P4PRO, BH441, T1

Prepared For: Shenzhen lanxingxin Technology Co., Ltd.
Address: 301, No. 8, East Zone, Shengjingyuan Industrial Park, Fuqian Road, Fumin Community, Fucheng Street, Longhua District, Shenzhen
Manufacturer: Shenzhen lanxingxin Technology Co., Ltd.
Address: 301, No. 8, East Zone, Shengjingyuan Industrial Park, Fuqian Road, Fumin Community, Fucheng Street, Longhua District, Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 20, 2023
Sample tested Date: Apr. 20, 2023 to May. 17, 2023
Issue Date: May. 17, 2023
Report No.: CTB230504009RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

*ChenZheng*Chen Zheng

Reviewed by:

*Arron Liu*Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. CONDUCTED PEAK OUTPUT POWER	46
9.1 Block Diagram Of Test Setup	46
9.2 Limit	46
9.3 Test procedure	46
9.4 Test Result	47
10. 20DB OCCUPIED BANDWIDTH	52
10.1 Block Diagram Of Test Setup	52
10.2 Limit	52
10.3 Test procedure	52
10.4 Test Result	52
11. CARRIER FREQUENCIES SEPARATION	57
11.1 Block Diagram Of Test Setup	57
11.2 Limit	57
11.3 Test procedure	57
11.4 Test Result	57
12. HOPPING CHANNEL NUMBER	62
12.1 Block Diagram Of Test Setup	62
12.2 Limit	62
12.3 Test procedure	62
12.4 Test Result	62
13. DWELL TIME	65
13.1 Block Diagram Of Test Setup	65

13.2	Limit	65
13.3	Test procedure	65
13.4	Test Result	66
14.	PSEUDORANDOM FREQUENCY	69
14.1	Limit	69
14.2	Test procedure	69
14.3	Test Result	70
15.	ANTENNA REQUIREMENT	71
16.	EUT TEST SETUP PHOTOGRAPHS	72

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB230504009RFX	May. 17, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): P50, LX01, LX02, LX03, LX04, LX05, LX06, LX07, LX08, LX09, M1, M6, M8, M9, M11, M12, M15 PRO, M16, M16 PRO, M26, M27, M29, M30, M31, M33, M35, M37, M40, M41, M42, M43, M45, M46, M47, M48, M50, M60, M66 PRO, M70, M80, M88 PLUS M90, Pro6S, Pro8S, Pro9, Pro12, Pro18, Pro80, Pro90, Pro100, Pro200, Pro300, Pro500, S2, S03, S4, S5, S6, S8, S9, S15, S16, S18, S19, Y90, YD mini, YD06, YD07, YD08, YD09, E6S, H18, JS352, JS80, L12, N35, P47, Q35, A80, Air 11 pro, Air 13 pro, TG10, V28, V8S, V9, VG09, VL1, X12, X16, X18S, X20S, XT11, B30, B39, BQ20, BQ30, BQ40, BQ50, BQ60, BQ70, BQ80, F1, F3, F6, F7, F8, G1, G11, G35, G9S, GT01, K30, K40, K50, K60, KJ10, KJ12, KJ18 , M17 X16S , X16PRO, L10 D32, R3, F06, J9 P4PRO , BH441, T1

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: P50

Bluetooth Version: Bluetooth 5.0

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 0.439 dBm(Right ear)
Bluetooth: 0.674 dBm(Left ear)

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK

Antenna installation: Bluetooth: Chip antenna

Antenna Gain: Bluetooth: 2.7dBi

Ratings: DC 5V by adapter
DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XLBLQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

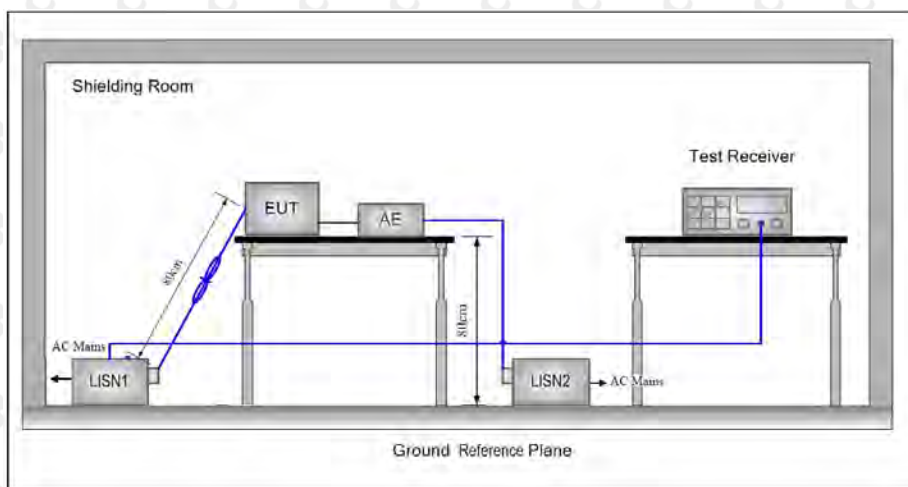

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

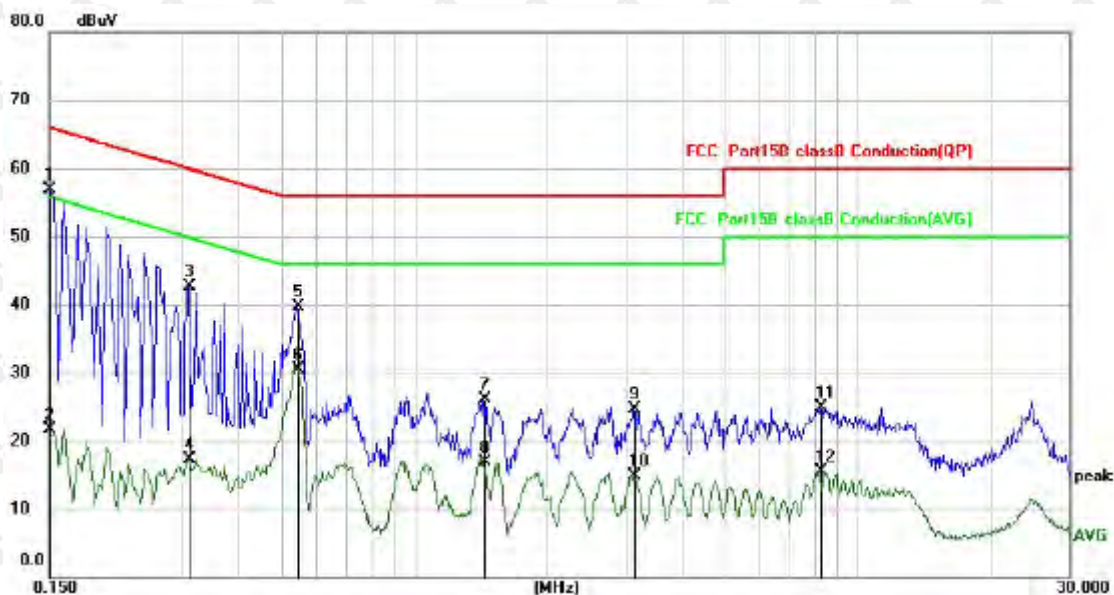


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	46.96	10.01	56.97	66.00	-9.03	QP
2		0.1500	11.67	10.01	21.68	56.00	-34.32	AVG
3		0.3100	32.62	9.99	42.61	59.97	-17.36	QP
4		0.3100	7.27	9.99	17.26	49.97	-32.71	AVG
5		0.5460	29.73	9.97	39.70	56.00	-16.30	QP
6		0.5460	20.51	9.97	30.48	46.00	-15.52	AVG
7		1.4340	16.19	10.00	26.19	56.00	-29.81	QP
8		1.4340	6.93	10.00	16.93	46.00	-29.07	AVG
9		3.1260	14.60	10.08	24.68	56.00	-31.32	QP
10		3.1260	4.75	10.08	14.83	46.00	-31.17	AVG
11		8.1940	14.67	10.28	24.95	60.00	-35.05	QP
12		8.1940	5.14	10.28	15.42	50.00	-34.58	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
 Measurement=Reading level+correct facto

N: Worst case-GFSK(low channel)

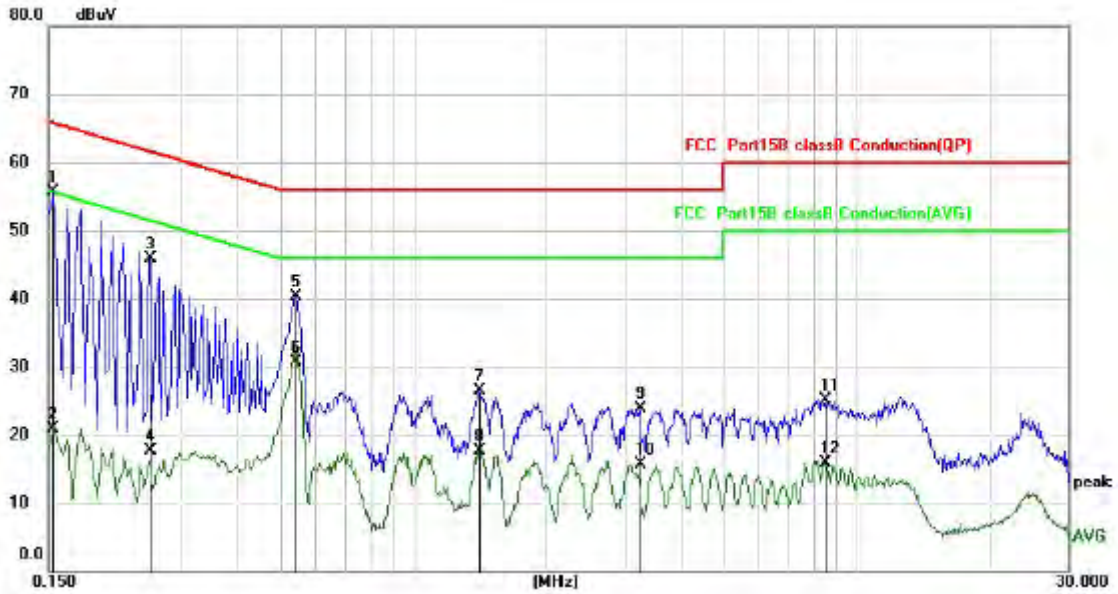

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	45.79	10.01	55.80	65.79	-9.99	QP
2		0.1539	10.83	10.01	20.84	55.79	-34.95	AVG
3		0.2540	35.99	10.00	45.99	61.63	-15.64	QP
4		0.2540	7.76	10.00	17.76	51.63	-33.87	AVG
5		0.5420	30.27	9.97	40.24	56.00	-15.76	QP
6		0.5420	20.72	9.97	30.69	46.00	-15.31	AVG
7		1.4100	16.55	10.00	26.55	56.00	-29.45	QP
8		1.4100	7.61	10.00	17.61	46.00	-28.39	AVG
9		3.2420	13.84	10.09	23.93	56.00	-32.07	QP
10		3.2420	5.57	10.09	15.66	46.00	-30.34	AVG
11		8.4819	14.90	10.30	25.20	60.00	-34.80	QP
12		8.4819	5.65	10.30	15.95	50.00	-34.05	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit
 Measurement=Reading level+correct facto

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

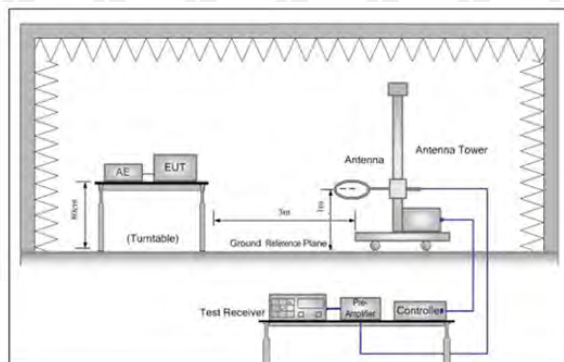


Figure 1. Below 30MHz

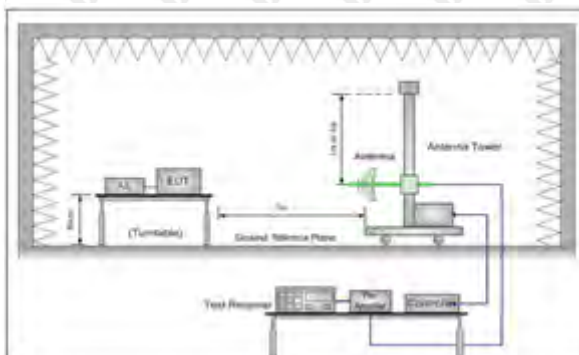


Figure 2. 30MHz to 1GHz

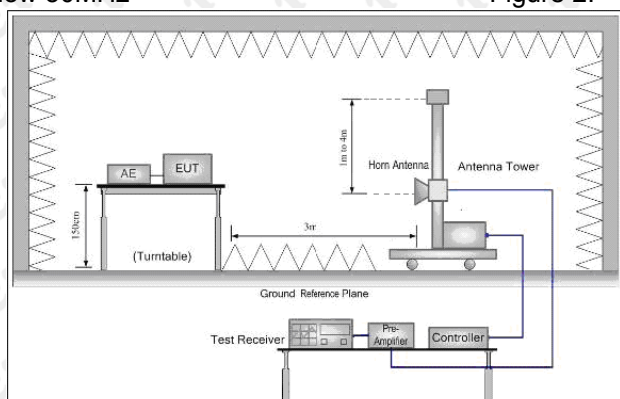


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		49.0144	29.48	-6.61	22.87	40.00	-17.13	QP
2		85.1486	30.42	-10.35	20.07	40.00	-19.93	QP
3		130.8369	31.46	-6.23	25.23	43.50	-18.27	QP
4		355.4272	30.18	-3.90	26.28	46.00	-19.72	QP
5		755.3872	29.30	4.92	34.22	46.00	-11.78	QP
6	*	948.7608	29.64	7.63	37.27	46.00	-8.73	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit
 Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)

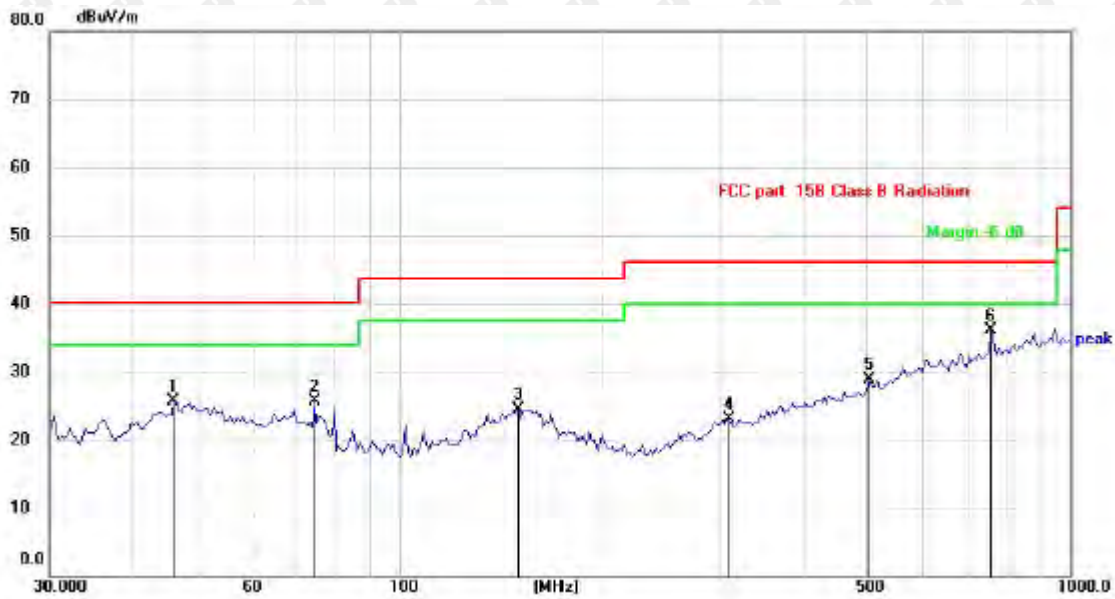

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		46.0970	32.27	-6.56	25.71	40.00	-14.29	QP
2		74.6568	35.46	-9.74	25.72	40.00	-14.28	QP
3		150.5377	29.94	-5.46	24.48	43.50	-19.02	QP
4		311.6324	28.28	-5.14	23.14	46.00	-22.86	QP
5		504.7062	28.70	0.14	28.84	46.00	-17.16	QP
6	*	762.0384	30.99	5.05	36.04	46.00	-9.96	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit
Measurement = Reading level + correct facto

Left ear:

Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		49.0144	34.48	-6.61	27.87	40.00	-12.13	QP
2		130.8369	34.96	-6.23	28.73	43.50	-14.77	QP
3		259.2336	30.81	-7.38	23.43	46.00	-22.57	QP
4		349.2500	29.39	-4.08	25.31	46.00	-20.69	QP
5		606.7219	29.62	2.54	32.16	46.00	-13.84	QP
6	*	755.3872	31.80	4.92	36.72	46.00	-9.28	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit
 Measurement=Reading level+correct facto

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		48.5865	35.63	-6.60	29.03	40.00	-10.97	QP
2		74.6568	38.96	-9.74	29.22	40.00	-10.78	QP
3		160.0646	34.21	-5.48	28.73	43.50	-14.77	QP
4		438.6553	31.17	-1.61	29.56	46.00	-16.44	QP
5		565.6295	31.56	1.62	33.18	46.00	-12.82	QP
6	*	762.0384	31.49	5.05	36.54	46.00	-9.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit
Measurement=Reading level+correct fact

Right ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	57.61	-3.65	53.96	74.00	-20.04	peak
4804	50.38	-3.65	46.73	54.00	-7.27	AVG
7206	60.40	-0.95	59.45	74.00	-14.55	peak
7206	41.73	-0.95	40.78	54.00	-13.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	57.28	-3.65	53.63	74.00	-20.37	peak
4804	49.46	-3.65	45.81	54.00	-8.19	AVG
7206	59.94	-0.95	58.99	74.00	-15.01	peak
7206	41.06	-0.95	40.11	54.00	-13.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	58.33	-3.54	54.79	74.00	-19.21	peak
4882.00	46.73	-3.54	43.19	54.00	-10.81	AVG
7323.00	56.71	-0.81	55.90	74.00	-18.10	peak
7323.00	42.20	-0.81	41.39	54.00	-12.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	57.20	-3.54	53.66	74.00	-20.34	peak
4882.00	50.15	-3.54	46.61	54.00	-7.39	AVG
7323.00	57.99	-0.81	57.18	74.00	-16.82	peak
7323.00	41.30	-0.81	40.49	54.00	-13.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.73	-3.43	54.30	74.00	-19.70	peak
4960	49.49	-3.44	46.05	54.00	-7.95	AVG
7440	60.72	-0.77	59.95	74.00	-14.05	peak
7440	39.95	-0.77	39.18	54.00	-14.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.34	-3.43	54.91	74.00	-19.09	peak
4960	47.90	-3.44	44.46	54.00	-9.54	AVG
7440	58.97	-0.77	58.20	74.00	-15.80	peak
7440	40.24	-0.77	39.47	54.00	-14.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.90	-5.81	51.09	74.00	-22.91	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.10	-5.84	50.26	74.00	-23.74	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.60	-5.81	49.79	74.00	-24.21	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.86	-5.84	50.02	74.00	-23.98	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.61	-5.81	49.80	74.00	-24.20	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.50	-6.06	48.44	74.00	-25.56	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.63	-5.81	50.82	74.00	-23.18	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.36	-6.06	49.30	74.00	-24.70	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.45	-5.81	49.64	74.00	-24.36	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.41	-5.84	49.57	74.00	-24.43	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.12	-5.81	48.31	74.00	-25.69	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.22	-5.84	47.38	74.00	-26.62	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.76	-5.81	50.95	74.00	-23.05	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.42	-6.06	48.36	74.00	-25.64	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.70	-5.81	49.89	74.00	-24.11	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.45	-6.06	48.39	74.00	-25.61	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	58.94	-3.65	55.29	74.00	-18.71	peak
4804	49.90	-3.65	46.25	54.00	-7.75	AVG
7206	58.91	-0.95	57.96	74.00	-16.04	peak
7206	41.06	-0.95	40.11	54.00	-13.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	59.05	-3.65	55.40	74.00	-18.60	peak
4804	49.21	-3.65	45.56	54.00	-8.44	AVG
7206	61.39	-0.95	60.44	74.00	-13.56	peak
7206	42.66	-0.95	41.71	54.00	-12.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	58.78	-3.54	55.24	74.00	-18.76	peak
4882.00	48.48	-3.54	44.94	54.00	-9.06	AVG
7323.00	55.51	-0.81	54.70	74.00	-19.30	peak
7323.00	41.65	-0.81	40.84	54.00	-13.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4882.00	57.71	-3.54	54.17	74.00	-19.83	peak
4882.00	48.91	-3.54	45.37	54.00	-8.63	AVG
7323.00	58.59	-0.81	57.78	74.00	-16.22	peak
7323.00	43.57	-0.81	42.76	54.00	-11.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

H High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	59.19	-3.43	55.76	74.00	-18.24	peak
4960	49.65	-3.44	46.21	54.00	-7.79	AVG
7440	60.24	-0.77	59.47	74.00	-14.53	peak
7440	40.91	-0.77	40.14	54.00	-13.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	56.95	-3.43	53.52	74.00	-20.48	peak
4960	48.73	-3.44	45.29	54.00	-8.71	AVG
7440	58.92	-0.77	58.15	74.00	-15.85	peak
7440	40.98	-0.77	40.21	54.00	-13.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

 hopping
 Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.34	-5.81	50.53	74.00	-23.47	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.57	-5.84	50.73	74.00	-23.27	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.11	-5.81	50.30	74.00	-23.70	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.87	-5.84	51.03	74.00	-22.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.79	-5.81	49.98	74.00	-24.02	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.33	-6.06	47.27	74.00	-26.73	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.03	-5.81	50.22	74.00	-23.78	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.48	-6.06	48.42	74.00	-25.58	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.98	-5.81	50.17	74.00	-23.83	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.10	-5.84	50.26	74.00	-23.74	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.67	-5.81	48.86	74.00	-25.14	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.99	-5.84	48.15	74.00	-25.85	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	55.70	-5.81	49.89	74.00	-24.11	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.85	-6.06	47.79	74.00	-26.21	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.50	56.40	-5.81	50.59	74.00	-23.41	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.83	-6.06	48.77	74.00	-25.23	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

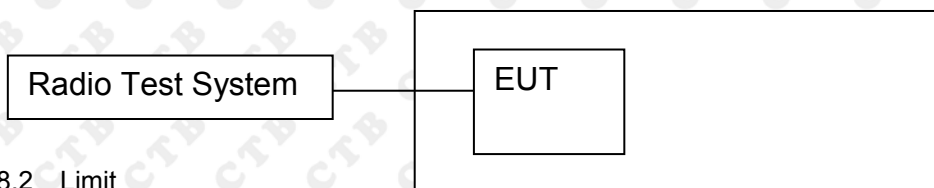

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold

8.4 Test Result

Right ear:

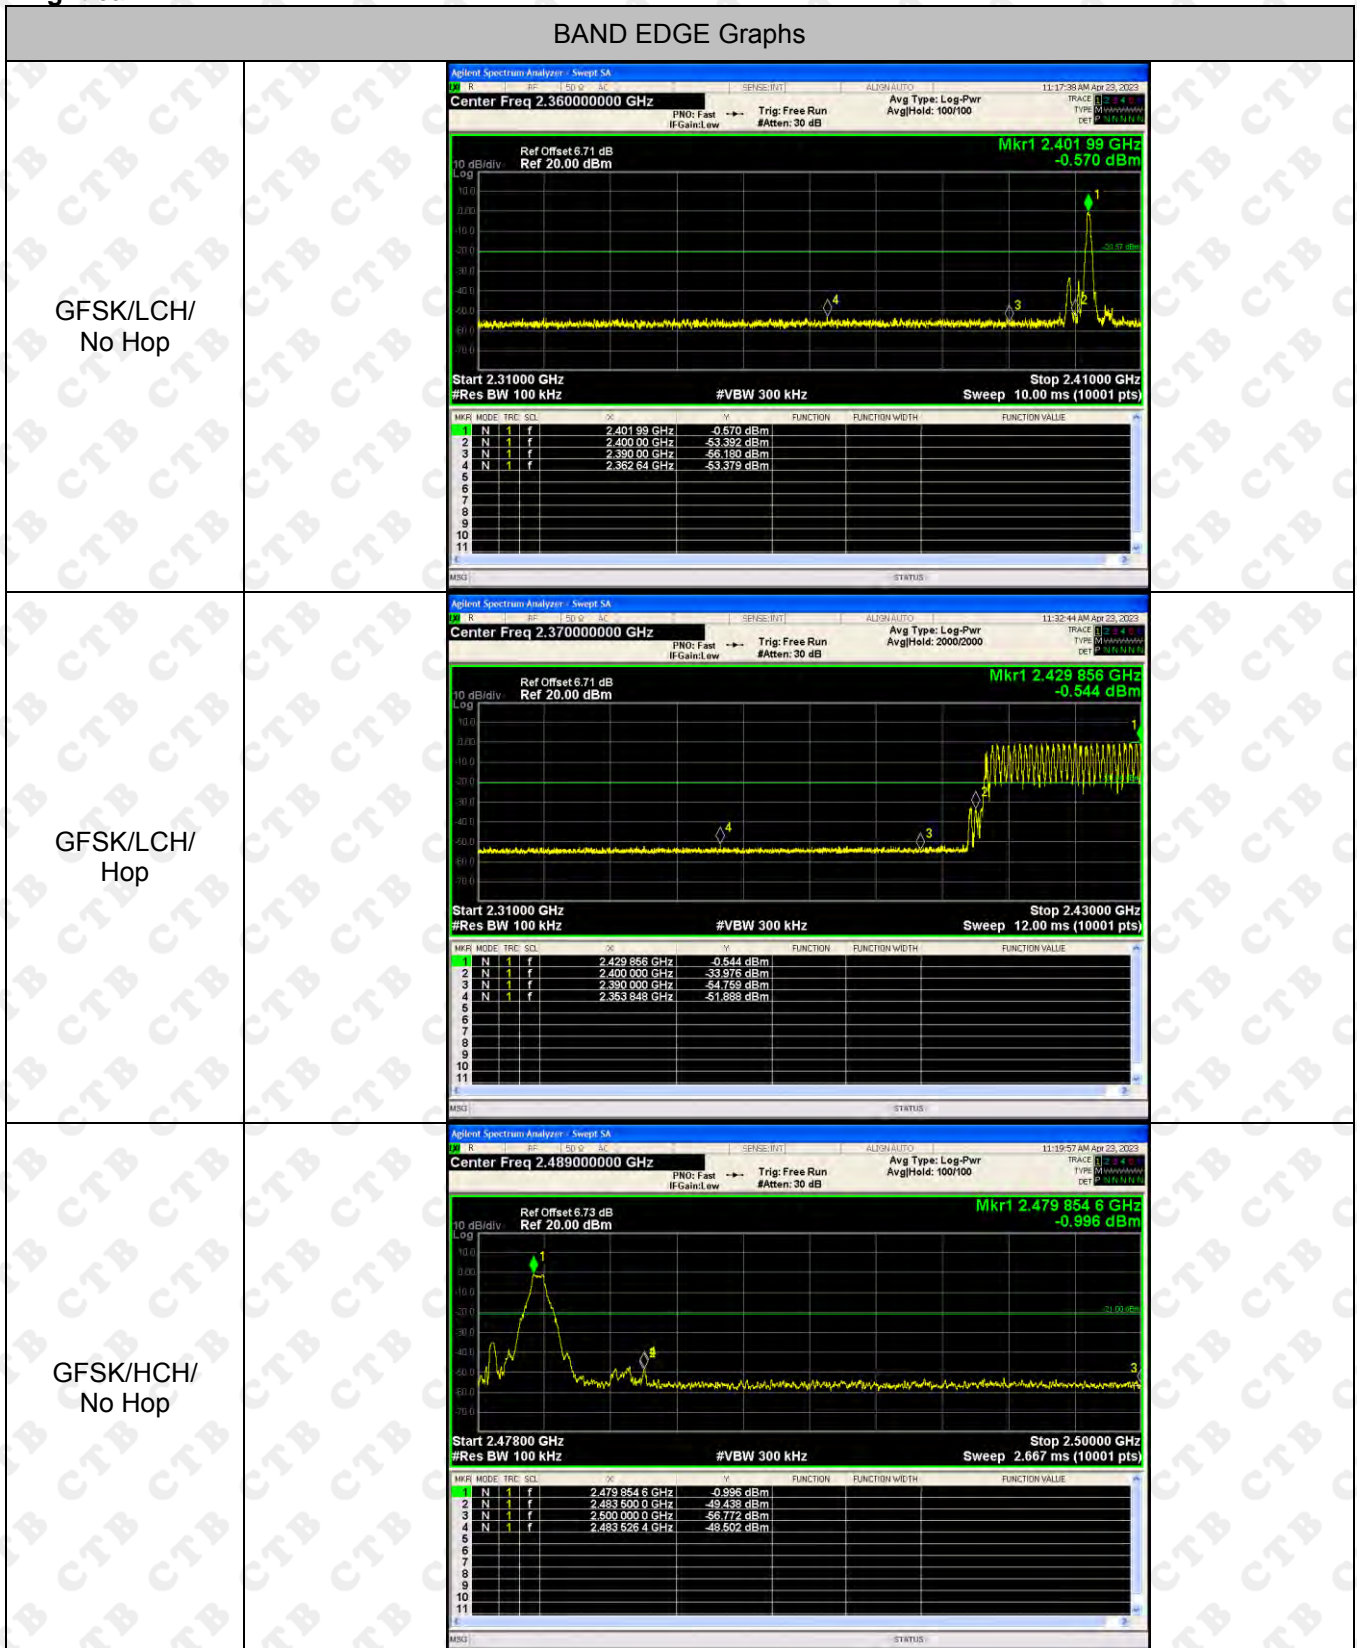


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.448 987 50 GHz -0.138 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5								6								7								8								9								10								11							
MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f																																																																																														
2	N	1	f																																																																																														
3	N	1	f																																																																																														
4	N	1	f																																																																																														
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.401 98 GHz -1.788 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5								6								7								8								9								10								11							
MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f																																																																																														
2	N	1	f																																																																																														
3	N	1	f																																																																																														
4	N	1	f																																																																																														
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.421 852 GHz -0.841 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td></td><td></td><td></td></tr> <tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f					2	N	1	f					3	N	1	f					4	N	1	f					5								6								7								8								9								10								11							
MKR MODE	TRC	SC	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																										
1	N	1	f																																																																																														
2	N	1	f																																																																																														
3	N	1	f																																																																																														
4	N	1	f																																																																																														
5																																																																																																	
6																																																																																																	
7																																																																																																	
8																																																																																																	
9																																																																																																	
10																																																																																																	
11																																																																																																	




RF Conducted Spurious Emissions Graphs


GFSK/LCH

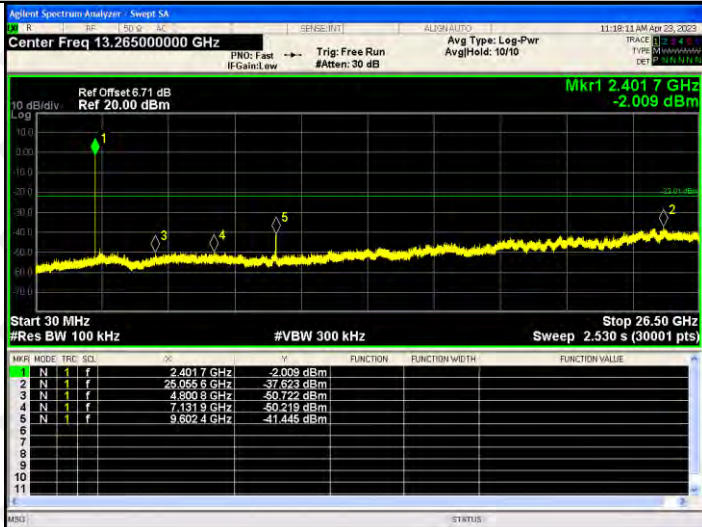

GFSK/MCH

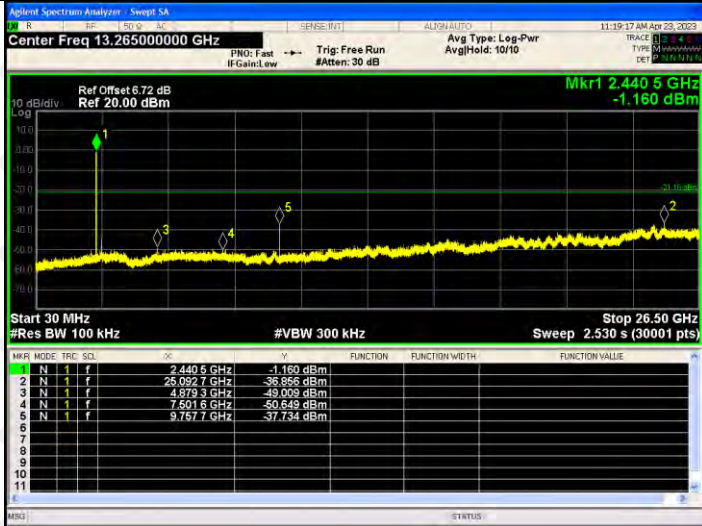

GFSK/HCH

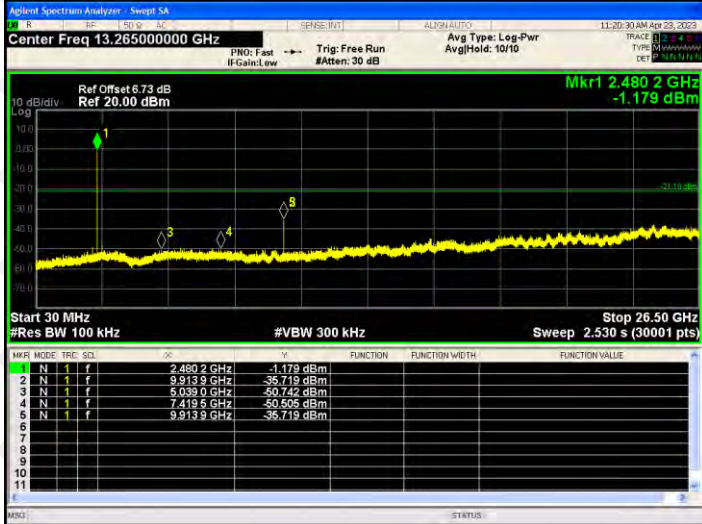


<p>$\pi/4$DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4017 GHz</td> <td>-2.287 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.6085 GHz</td> <td>-36.711 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.8009 GHz</td> <td>-38.771 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.2007 GHz</td> <td>-39.053 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.6024 GHz</td> <td>-41.478 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4017 GHz	-2.287 dBm				2	N	24.6085 GHz	-36.711 dBm				3	N	4.8009 GHz	-38.771 dBm				4	N	7.2007 GHz	-39.053 dBm				5	N	9.6024 GHz	-41.478 dBm			
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4017 GHz	-2.287 dBm																																								
2	N	24.6085 GHz	-36.711 dBm																																								
3	N	4.8009 GHz	-38.771 dBm																																								
4	N	7.2007 GHz	-39.053 dBm																																								
5	N	9.6024 GHz	-41.478 dBm																																								
<p>$\pi/4$DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4414 GHz</td> <td>-5.481 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>24.6880 GHz</td> <td>-36.789 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>4.8793 GHz</td> <td>-49.333 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.1779 GHz</td> <td>-50.554 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.7577 GHz</td> <td>-38.130 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4414 GHz	-5.481 dBm				2	N	24.6880 GHz	-36.789 dBm				3	N	4.8793 GHz	-49.333 dBm				4	N	7.1779 GHz	-50.554 dBm				5	N	9.7577 GHz	-38.130 dBm			
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4414 GHz	-5.481 dBm																																								
2	N	24.6880 GHz	-36.789 dBm																																								
3	N	4.8793 GHz	-49.333 dBm																																								
4	N	7.1779 GHz	-50.554 dBm																																								
5	N	9.7577 GHz	-38.130 dBm																																								
<p>$\pi/4$DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.4802 GHz</td> <td>-5.584 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>9.9139 GHz</td> <td>-36.644 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>5.1519 GHz</td> <td>-49.654 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>7.6242 GHz</td> <td>-51.051 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>9.9139 GHz</td> <td>-36.644 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4802 GHz	-5.584 dBm				2	N	9.9139 GHz	-36.644 dBm				3	N	5.1519 GHz	-49.654 dBm				4	N	7.6242 GHz	-51.051 dBm				5	N	9.9139 GHz	-36.644 dBm			
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	2.4802 GHz	-5.584 dBm																																								
2	N	9.9139 GHz	-36.644 dBm																																								
3	N	5.1519 GHz	-49.654 dBm																																								
4	N	7.6242 GHz	-51.051 dBm																																								
5	N	9.9139 GHz	-36.644 dBm																																								


Left ear:

BAND EDGE Graphs


GFSK/LCH/
No Hop



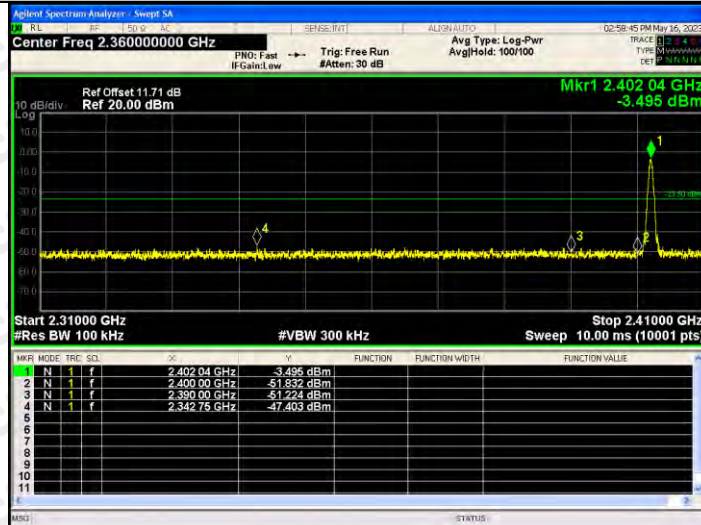


GFSK/LCH/
Hop

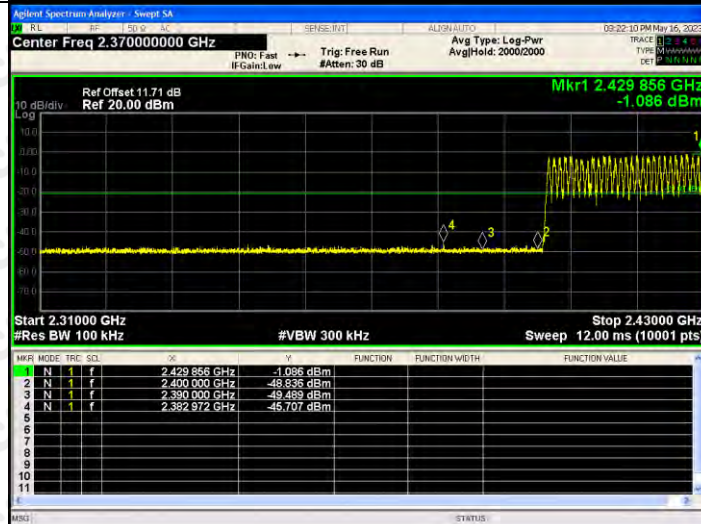

GFSK/HCH/
No Hop

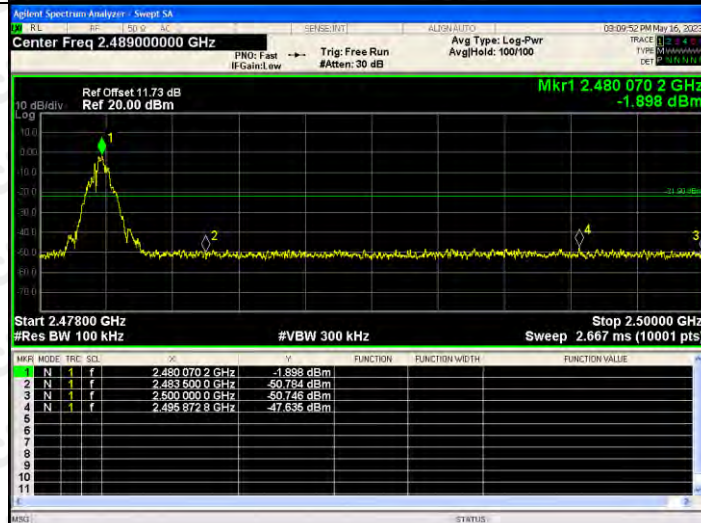

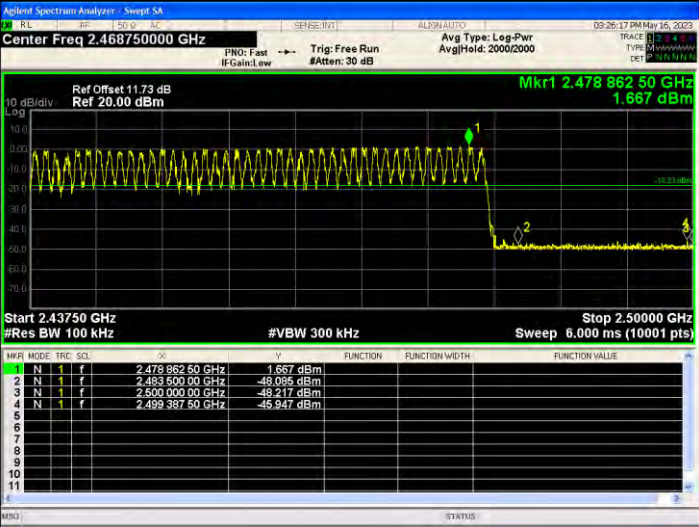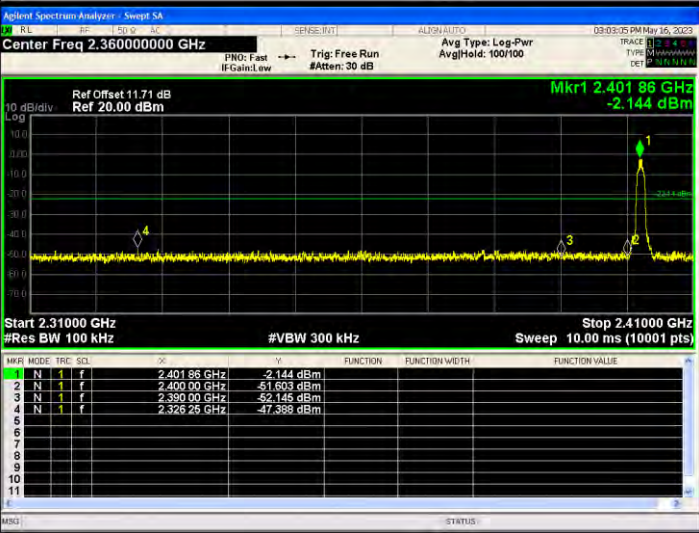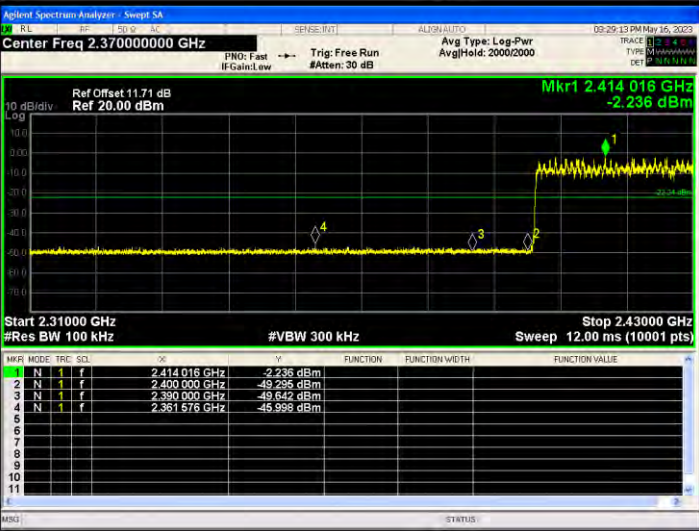
<p>GFSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 11.73 dB Ref 20.00 dBm Mkr1 2.478 862 50 GHz 1.667 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N 1 f</td> <td>2.478 862 50 GHz</td> <td></td> <td></td> <td>1.667 dBm</td> </tr> <tr> <td>2</td> <td>N 1 f</td> <td>2.483 500 00 GHz</td> <td></td> <td></td> <td>-48.085 dBm</td> </tr> <tr> <td>3</td> <td>N 1 f</td> <td>2.600 000 00 GHz</td> <td></td> <td></td> <td>-48.217 dBm</td> </tr> <tr> <td>4</td> <td>N 1 f</td> <td>2.489 397 50 GHz</td> <td></td> <td></td> <td>-45.947 dBm</td> </tr> </tbody> </table>	MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N 1 f	2.478 862 50 GHz			1.667 dBm	2	N 1 f	2.483 500 00 GHz			-48.085 dBm	3	N 1 f	2.600 000 00 GHz			-48.217 dBm	4	N 1 f	2.489 397 50 GHz			-45.947 dBm
MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N 1 f	2.478 862 50 GHz			1.667 dBm																										
2	N 1 f	2.483 500 00 GHz			-48.085 dBm																										
3	N 1 f	2.600 000 00 GHz			-48.217 dBm																										
4	N 1 f	2.489 397 50 GHz			-45.947 dBm																										
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 11.71 dB Ref 20.00 dBm Mkr1 2.401 86 GHz -2.144 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N 1 f</td> <td>2.401 86 GHz</td> <td></td> <td></td> <td>-2.144 dBm</td> </tr> <tr> <td>2</td> <td>N 1 f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-51.603 dBm</td> </tr> <tr> <td>3</td> <td>N 1 f</td> <td>2.390 00 GHz</td> <td></td> <td></td> <td>-52.145 dBm</td> </tr> <tr> <td>4</td> <td>N 1 f</td> <td>2.320 29 GHz</td> <td></td> <td></td> <td>-47.359 dBm</td> </tr> </tbody> </table>	MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N 1 f	2.401 86 GHz			-2.144 dBm	2	N 1 f	2.400 00 GHz			-51.603 dBm	3	N 1 f	2.390 00 GHz			-52.145 dBm	4	N 1 f	2.320 29 GHz			-47.359 dBm
MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N 1 f	2.401 86 GHz			-2.144 dBm																										
2	N 1 f	2.400 00 GHz			-51.603 dBm																										
3	N 1 f	2.390 00 GHz			-52.145 dBm																										
4	N 1 f	2.320 29 GHz			-47.359 dBm																										
<p>$\pi/4$DQPSK/LCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 11.71 dB Ref 20.00 dBm Mkr1 2.414 016 GHz -2.236 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>FREQ</th> <th>POW</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N 1 f</td> <td>2.414 016 GHz</td> <td></td> <td></td> <td>-2.236 dBm</td> </tr> <tr> <td>2</td> <td>N 1 f</td> <td>2.400 000 GHz</td> <td></td> <td></td> <td>-49.285 dBm</td> </tr> <tr> <td>3</td> <td>N 1 f</td> <td>2.390 000 GHz</td> <td></td> <td></td> <td>-49.642 dBm</td> </tr> <tr> <td>4</td> <td>N 1 f</td> <td>2.351 576 GHz</td> <td></td> <td></td> <td>-45.959 dBm</td> </tr> </tbody> </table>	MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N 1 f	2.414 016 GHz			-2.236 dBm	2	N 1 f	2.400 000 GHz			-49.285 dBm	3	N 1 f	2.390 000 GHz			-49.642 dBm	4	N 1 f	2.351 576 GHz			-45.959 dBm
MKR MODE	FREQ	POW	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	N 1 f	2.414 016 GHz			-2.236 dBm																										
2	N 1 f	2.400 000 GHz			-49.285 dBm																										
3	N 1 f	2.390 000 GHz			-49.642 dBm																										
4	N 1 f	2.351 576 GHz			-45.959 dBm																										




RF Conducted Spurious Emissions Graphs


GFSK/LCH

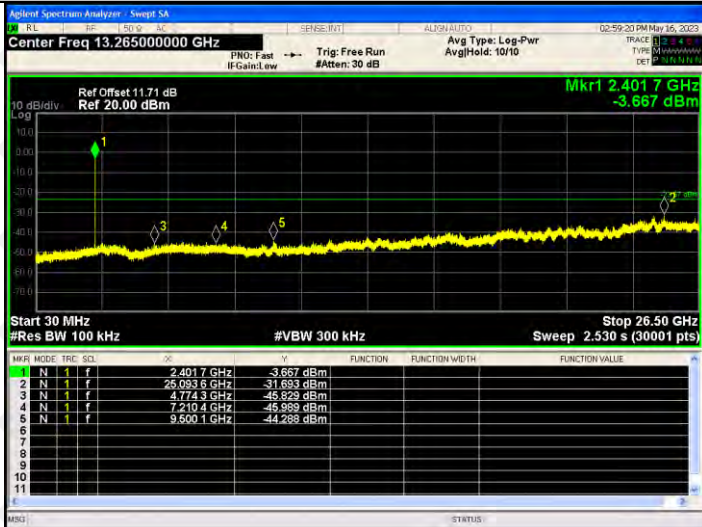

GFSK/MCH

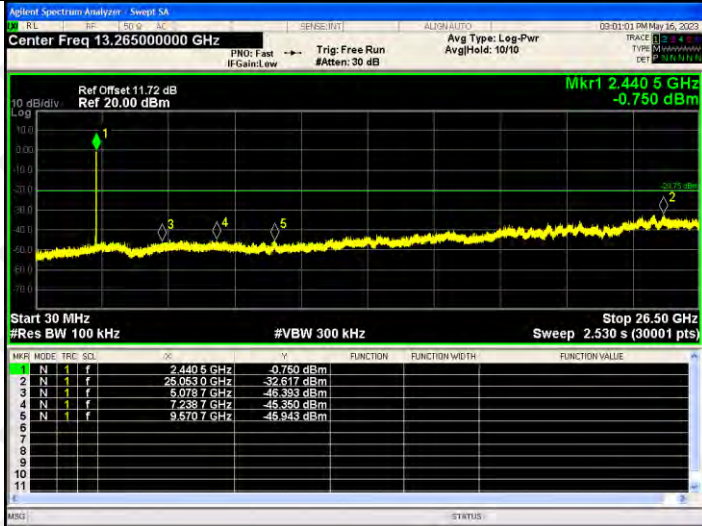


GFSK/HCH

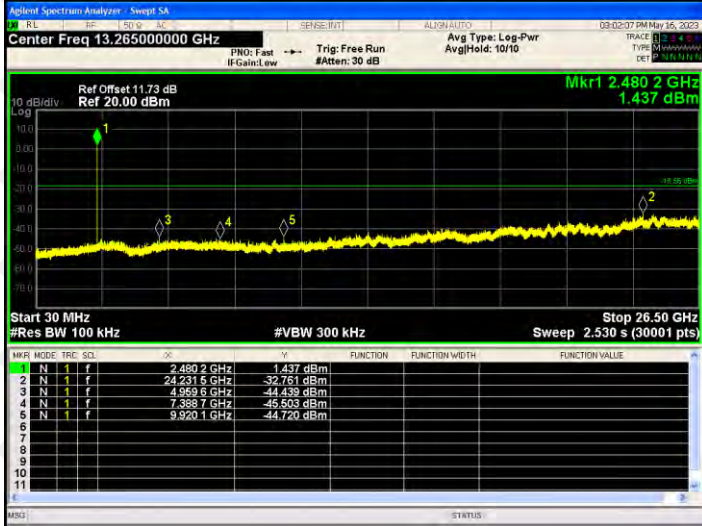

<p>$\pi/4$DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQZ</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-2.606 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0883 GHz</td> <td>-32.231 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7330 GHz</td> <td>-45.875 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0772 GHz</td> <td>-45.445 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6495 GHz</td> <td>-45.285 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-2.606 dBm				2	N	1	f	26.0883 GHz	-32.231 dBm				3	N	1	f	4.7330 GHz	-45.875 dBm				4	N	1	f	7.0772 GHz	-45.445 dBm				5	N	1	f	9.6495 GHz	-45.285 dBm			
MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-2.606 dBm																																																		
2	N	1	f	26.0883 GHz	-32.231 dBm																																																		
3	N	1	f	4.7330 GHz	-45.875 dBm																																																		
4	N	1	f	7.0772 GHz	-45.445 dBm																																																		
5	N	1	f	9.6495 GHz	-45.285 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQZ</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-4.036 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.2612 GHz</td> <td>-31.929 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8943 GHz</td> <td>-45.633 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2172 GHz</td> <td>-44.906 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6910 GHz</td> <td>-46.329 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-4.036 dBm				2	N	1	f	26.2612 GHz	-31.929 dBm				3	N	1	f	4.8943 GHz	-45.633 dBm				4	N	1	f	7.2172 GHz	-44.906 dBm				5	N	1	f	9.6910 GHz	-46.329 dBm			
MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-4.036 dBm																																																		
2	N	1	f	26.2612 GHz	-31.929 dBm																																																		
3	N	1	f	4.8943 GHz	-45.633 dBm																																																		
4	N	1	f	7.2172 GHz	-44.906 dBm																																																		
5	N	1	f	9.6910 GHz	-46.329 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQZ</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-2.843 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.6323 GHz</td> <td>-29.701 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.1484 GHz</td> <td>-45.474 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4372 GHz</td> <td>-45.127 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0242 GHz</td> <td>-45.697 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-2.843 dBm				2	N	1	f	2.6323 GHz	-29.701 dBm				3	N	1	f	5.1484 GHz	-45.474 dBm				4	N	1	f	7.4372 GHz	-45.127 dBm				5	N	1	f	10.0242 GHz	-45.697 dBm			
MNR	MODE	TRF	SQZ	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-2.843 dBm																																																		
2	N	1	f	2.6323 GHz	-29.701 dBm																																																		
3	N	1	f	5.1484 GHz	-45.474 dBm																																																		
4	N	1	f	7.4372 GHz	-45.127 dBm																																																		
5	N	1	f	10.0242 GHz	-45.697 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

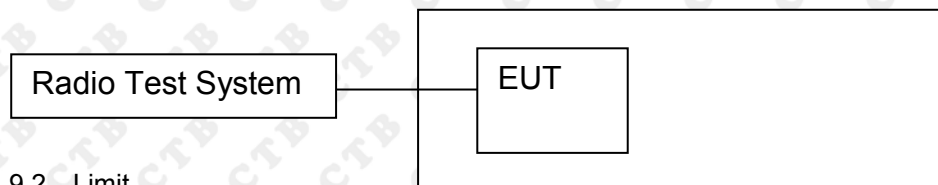

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result


Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.587	20.97	PASS
	MCH	-0.311	20.97	PASS
	HCH	-0.854	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	0.162	20.97	PASS
	MCH	0.439	20.97	PASS
	HCH	-0.105	20.97	PASS

Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-1.791	20.97	PASS
	MCH	0.032	20.97	PASS
	HCH	0.079	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-1.036	20.97	PASS
	MCH	0.674	20.97	PASS
	HCH	0.029	20.97	PASS

Right ear:
Test Graph:

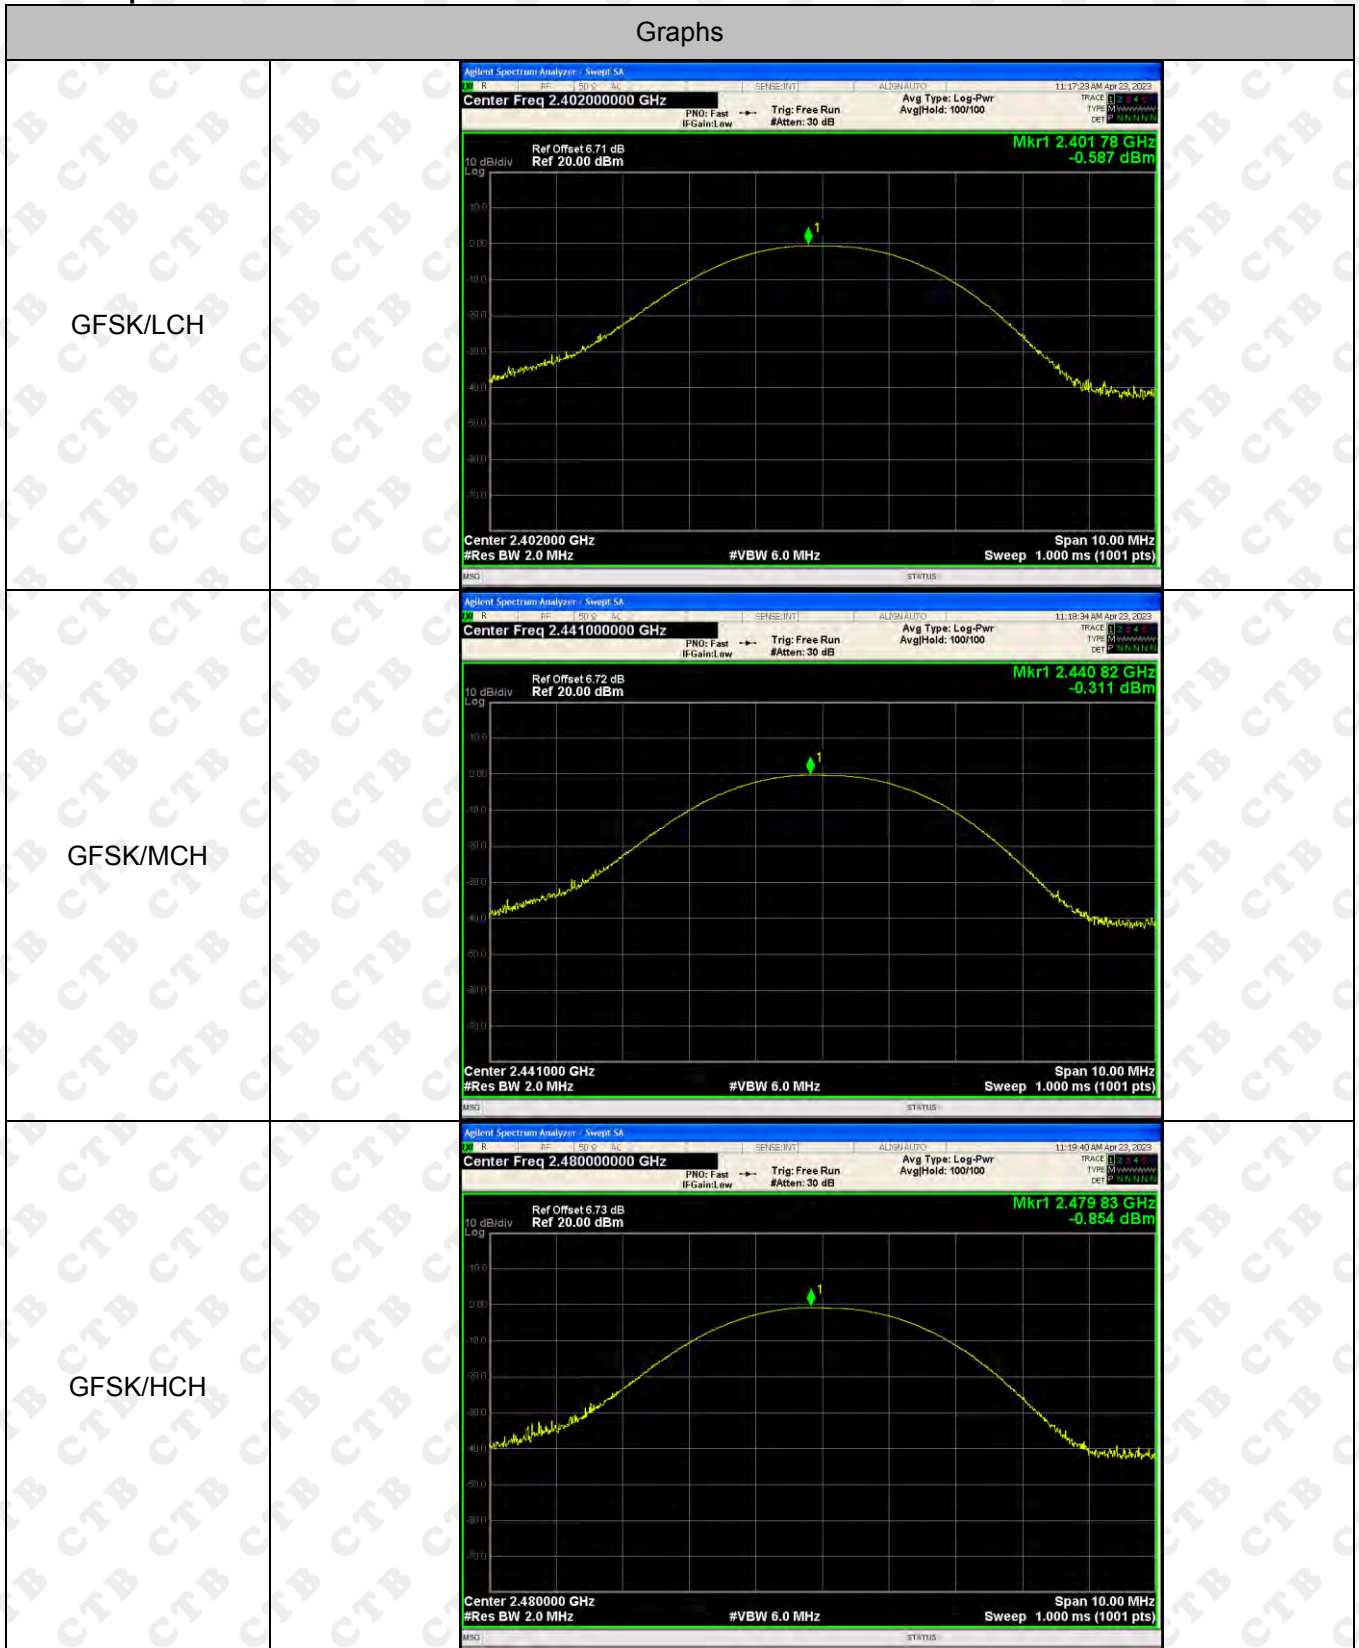

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40190 GHz 0.162 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44091 GHz 0.439 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47993 GHz -0.105 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>


Left ear:
Test Graph:

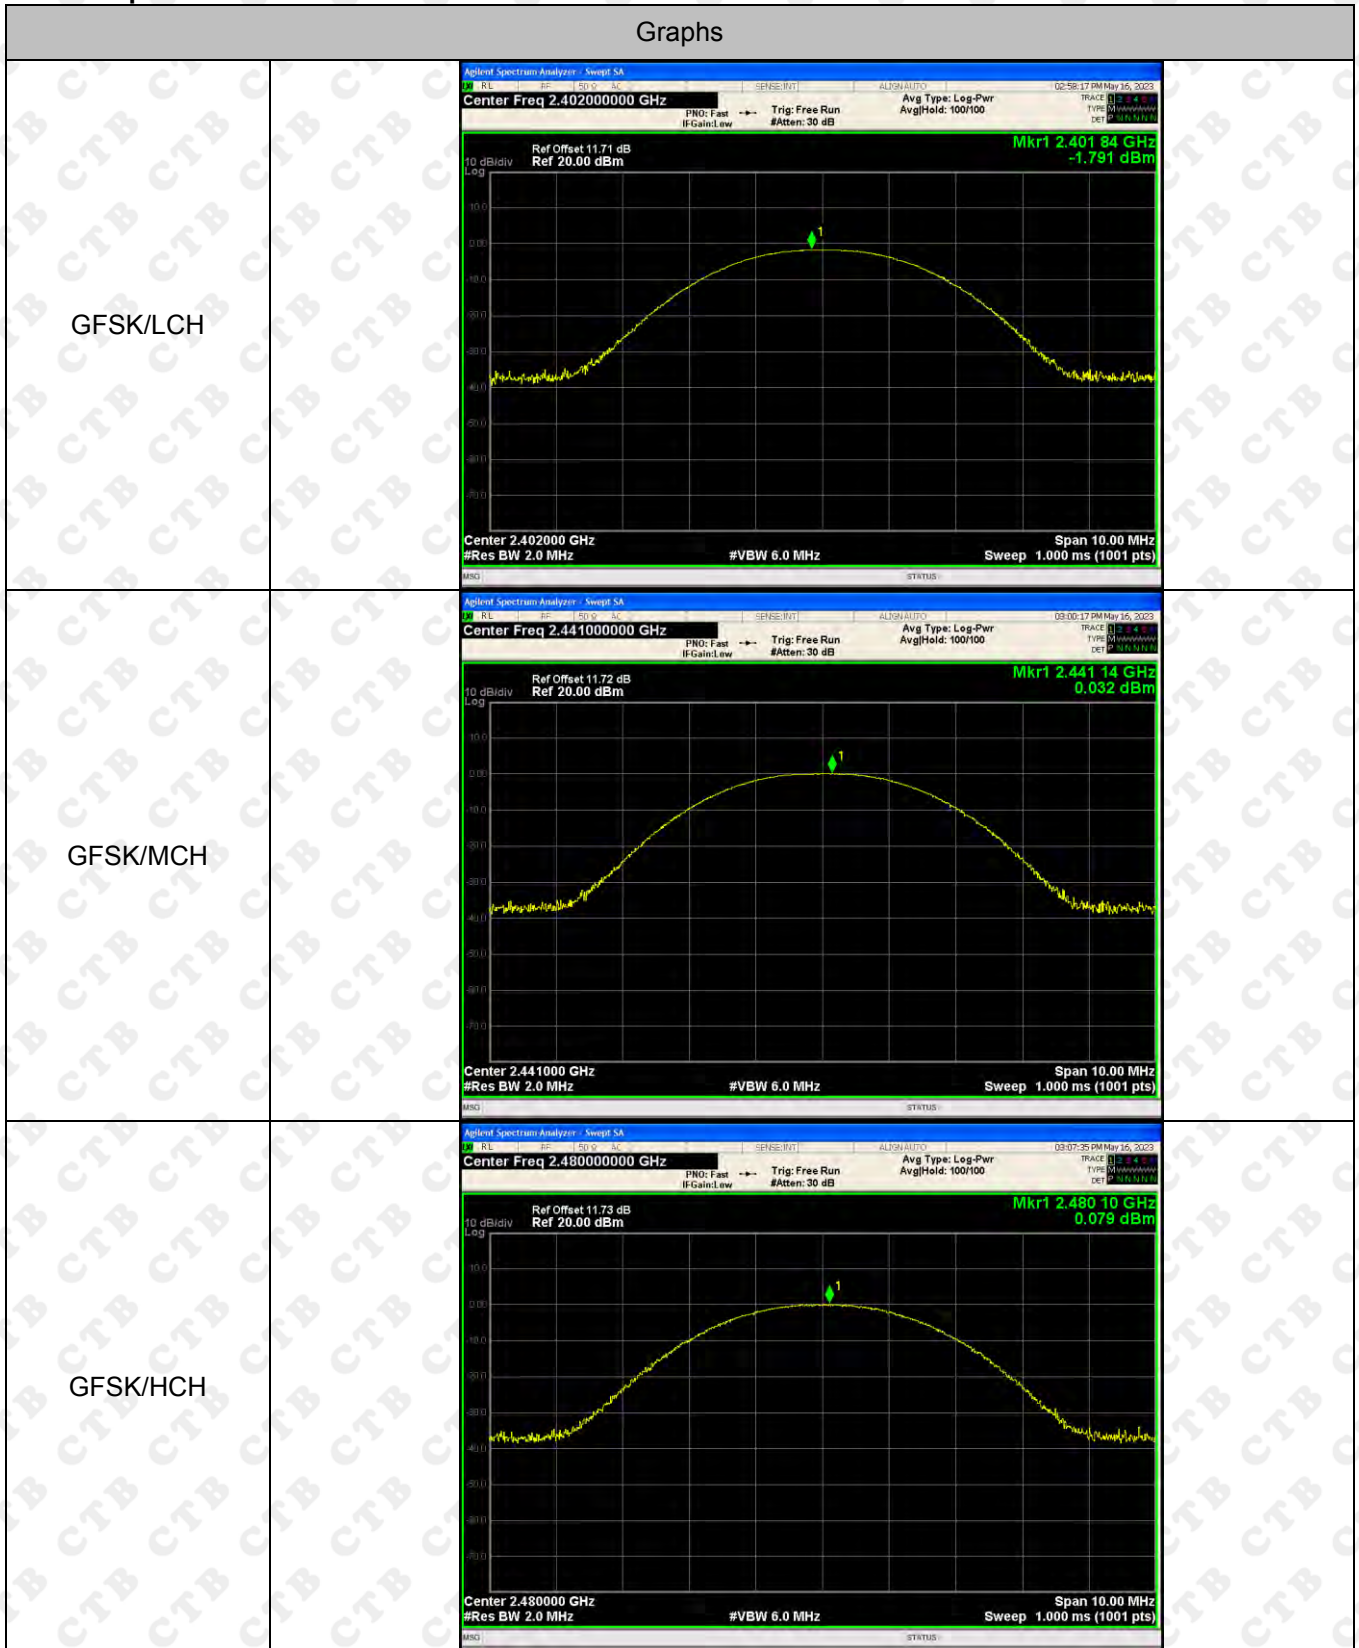

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 11.71 dB Ref 20.00 dBm Mkr1 2.40182 GHz -1.036 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 11.72 dB Ref 20.00 dBm Mkr1 2.44099 GHz 0.674 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 11.73 dB Ref 20.00 dBm Mkr1 2.48007 GHz 0.029 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

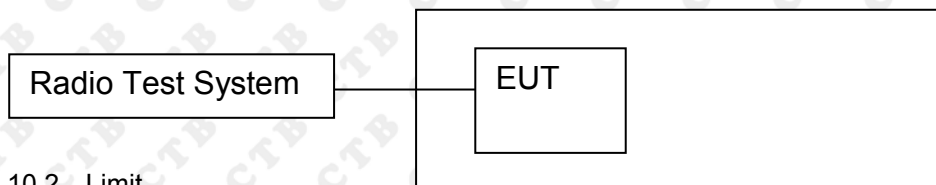

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.882	PASS
	Mid channel	0.87	PASS
	High channel	0.885	PASS
π/4DQPSK	Low channel	1.333	PASS
	Mid channel	1.278	PASS
	High channel	1.28	PASS

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.843	PASS
	Mid channel	1.027	PASS
	High channel	0.837	PASS
π/4DQPSK	Low channel	1.328	PASS
	Mid channel	1.351	PASS
	High channel	1.282	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Right ear:
Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>10 dB/div Ref Offset 6.71 dB Ref 26.71 dBm Mkr3 2.402441 GHz -23.987 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 816.07 kHz Total Power 5.81 dBm Transmit Freq Error -383 Hz OBW Power 99.00 % x dB Bandwidth 882.5 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>10 dB/div Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.441435 GHz -23.665 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 815.89 kHz Total Power 6.03 dBm Transmit Freq Error 19 Hz OBW Power 99.00 % x dB Bandwidth 869.9 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>10 dB/div Ref Offset 6.73 dB Ref 26.73 dBm Mkr3 2.480441 GHz -24.352 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 822.74 kHz Total Power 5.17 dBm Transmit Freq Error -1.172 kHz OBW Power 99.00 % x dB Bandwidth 885.2 kHz x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.402668 GHz -25.875 dBm Ref Offset: 6.71 dB Ref: 26.71 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1876 MHz Total Power 4.88 dBm Transmit Freq Error 2.036 kHz OBW Power 99.00 % x dB Bandwidth 1.333 MHz x dB -20.00 dB</p>
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.441642 GHz -21.831 dBm Ref Offset: 6.72 dB Ref: 26.72 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1798 MHz Total Power 5.71 dBm Transmit Freq Error 2.416 kHz OBW Power 99.00 % x dB Bandwidth 1.278 MHz x dB -20.00 dB</p>
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.480642 GHz -21.848 dBm Ref Offset: 6.73 dB Ref: 26.73 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1851 MHz Total Power 5.17 dBm Transmit Freq Error 1.946 kHz OBW Power 99.00 % x dB Bandwidth 1.280 MHz x dB -20.00 dB</p>

Left ear:


Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Attenu: 30 dB Avg/Hold: 100/100 Radio Device: BTS 02:58:33 PM May 16, 2023</p> <p>10 dB/div Ref Offset 11.71 dB Ref 31.71 dBm Mkr3 2.40242 GHz -23.573 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.65 dBm</td> </tr> <tr> <td>821.43 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.046 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>842.9 kHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.65 dBm	821.43 kHz			Transmit Freq Error	OBW Power	99.00 %	-1.046 kHz	x dB	-20.00 dB	x dB Bandwidth			842.9 kHz		
Occupied Bandwidth	Total Power	4.65 dBm																	
821.43 kHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.046 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
842.9 kHz																			
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Attenu: 30 dB Avg/Hold: 100/100 Radio Device: BTS 03:00:28 PM May 16, 2023</p> <p>10 dB/div Ref Offset 11.72 dB Ref 31.72 dBm Mkr3 2.441516 GHz -21.763 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.23 dBm</td> </tr> <tr> <td>899.69 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>2.455 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.027 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.23 dBm	899.69 kHz			Transmit Freq Error	OBW Power	99.00 %	2.455 kHz	x dB	-20.00 dB	x dB Bandwidth			1.027 MHz		
Occupied Bandwidth	Total Power	6.23 dBm																	
899.69 kHz																			
Transmit Freq Error	OBW Power	99.00 %																	
2.455 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.027 MHz																			
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Attenu: 30 dB Avg/Hold: 100/100 Radio Device: BTS 03:09:37 PM May 16, 2023</p> <p>10 dB/div Ref Offset 11.73 dB Ref 31.73 dBm Mkr3 2.48042 GHz -23.211 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.47 dBm</td> </tr> <tr> <td>848.41 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>2.023 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>836.7 kHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.47 dBm	848.41 kHz			Transmit Freq Error	OBW Power	99.00 %	2.023 kHz	x dB	-20.00 dB	x dB Bandwidth			836.7 kHz		
Occupied Bandwidth	Total Power	5.47 dBm																	
848.41 kHz																			
Transmit Freq Error	OBW Power	99.00 %																	
2.023 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
836.7 kHz																			

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz #IF-Gain: low #Atten: 30 dB AvgHold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 11.71 dB Ref: 31.71 dBm Mkr3: 2.402675 GHz -27.008 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.09 dBm</td> </tr> <tr> <td>1.1924 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>11.178 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.328 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.09 dBm	1.1924 MHz			Transmit Freq Error	OBW Power	99.00 %	11.178 kHz	x dB	-20.00 dB	x dB Bandwidth			1.328 MHz		
Occupied Bandwidth	Total Power	4.09 dBm																	
1.1924 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
11.178 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.328 MHz																			
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz #IF-Gain: low #Atten: 30 dB AvgHold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 11.72 dB Ref: 31.72 dBm Mkr3: 2.441685 GHz -25.858 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.41 dBm</td> </tr> <tr> <td>1.2220 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>9.427 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.351 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.41 dBm	1.2220 MHz			Transmit Freq Error	OBW Power	99.00 %	9.427 kHz	x dB	-20.00 dB	x dB Bandwidth			1.351 MHz		
Occupied Bandwidth	Total Power	5.41 dBm																	
1.2220 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
9.427 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.351 MHz																			
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz #IF-Gain: low #Atten: 30 dB AvgHold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 11.73 dB Ref: 31.73 dBm Mkr3: 2.480653 GHz -22.283 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.30 dBm</td> </tr> <tr> <td>1.1893 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>11.613 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.282 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.30 dBm	1.1893 MHz			Transmit Freq Error	OBW Power	99.00 %	11.613 kHz	x dB	-20.00 dB	x dB Bandwidth			1.282 MHz		
Occupied Bandwidth	Total Power	5.30 dBm																	
1.1893 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
11.613 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.282 MHz																			

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

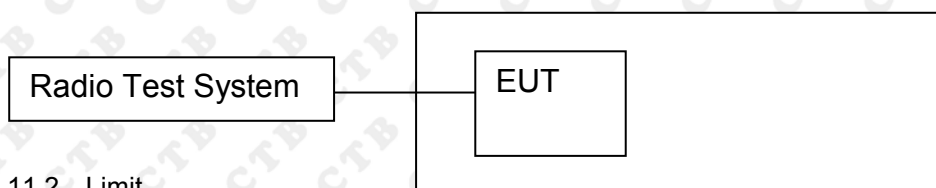

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.588	PASS
GFSK	MCH	0.998	0.580	PASS
GFSK	HCH	1.000	0.590	PASS
$\pi/4$ DQPSK	LCH	0.998	0.889	PASS
$\pi/4$ DQPSK	MCH	1.000	0.852	PASS
$\pi/4$ DQPSK	HCH	1.000	0.853	PASS

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.562	PASS
GFSK	MCH	1.002	0.685	PASS
GFSK	HCH	0.998	0.558	PASS
$\pi/4$ DQPSK	LCH	1.006	0.885	PASS
$\pi/4$ DQPSK	MCH	0.998	0.901	PASS
$\pi/4$ DQPSK	HCH	0.994	0.855	PASS

Right ear:
Test Graph



<p>$\pi/4$DQPSK/LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>998 kHz (A)</td> <td>-2.259 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 004 GHz</td> <td>-4.124 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	998 kHz (A)	-2.259 dB			2	F	1	f		2.402 004 GHz	-4.124 dBm		
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(A)	998 kHz (A)	-2.259 dB																						
2	F	1	f		2.402 004 GHz	-4.124 dBm																						
<p>$\pi/4$DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz (A)</td> <td>0.494 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 000 GHz</td> <td>-4.433 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	1.000 MHz (A)	0.494 dB			2	F	1	f		2.441 000 GHz	-4.433 dBm		
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(A)	1.000 MHz (A)	0.494 dB																						
2	F	1	f		2.441 000 GHz	-4.433 dBm																						
<p>$\pi/4$DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz (A)</td> <td>-0.603 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478 996 GHz</td> <td>-4.579 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	1.000 MHz (A)	-0.603 dB			2	F	1	f		2.478 996 GHz	-4.579 dBm		
MKR	MODE	TRC	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(A)	1.000 MHz (A)	-0.603 dB																						
2	F	1	f		2.478 996 GHz	-4.579 dBm																						


Left ear:
Test Graph



<p>$\pi/4$DQPSK/LCH</p>	 <table border="1" data-bbox="592 548 1294 705"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.006 MHz</td> <td>-1.122 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401840 GHz</td> <td>-7.208 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	1.006 MHz	-1.122 dB				2	F	1	f		2.401840 GHz	-7.208 dBm			
MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	AZ	1	f	(A)	1.006 MHz	-1.122 dB																									
2	F	1	f		2.401840 GHz	-7.208 dBm																									
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1" data-bbox="592 1077 1294 1234"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>998 kHz</td> <td>-0.493 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441006 GHz</td> <td>-4.268 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	998 kHz	-0.493 dB				2	F	1	f		2.441006 GHz	-4.268 dBm			
MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	AZ	1	f	(A)	998 kHz	-0.493 dB																									
2	F	1	f		2.441006 GHz	-4.268 dBm																									
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1" data-bbox="592 1603 1294 1760"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>SC2</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>994 kHz</td> <td>-0.173 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479178 GHz</td> <td>-4.032 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	994 kHz	-0.173 dB				2	F	1	f		2.479178 GHz	-4.032 dBm			
MKR	MODE	TRC	SC1	SC2	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																						
1	AZ	1	f	(A)	994 kHz	-0.173 dB																									
2	F	1	f		2.479178 GHz	-4.032 dBm																									

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

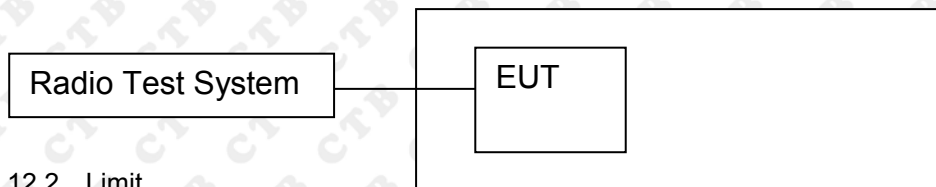

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS


Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS

Right ear:
Test Graph

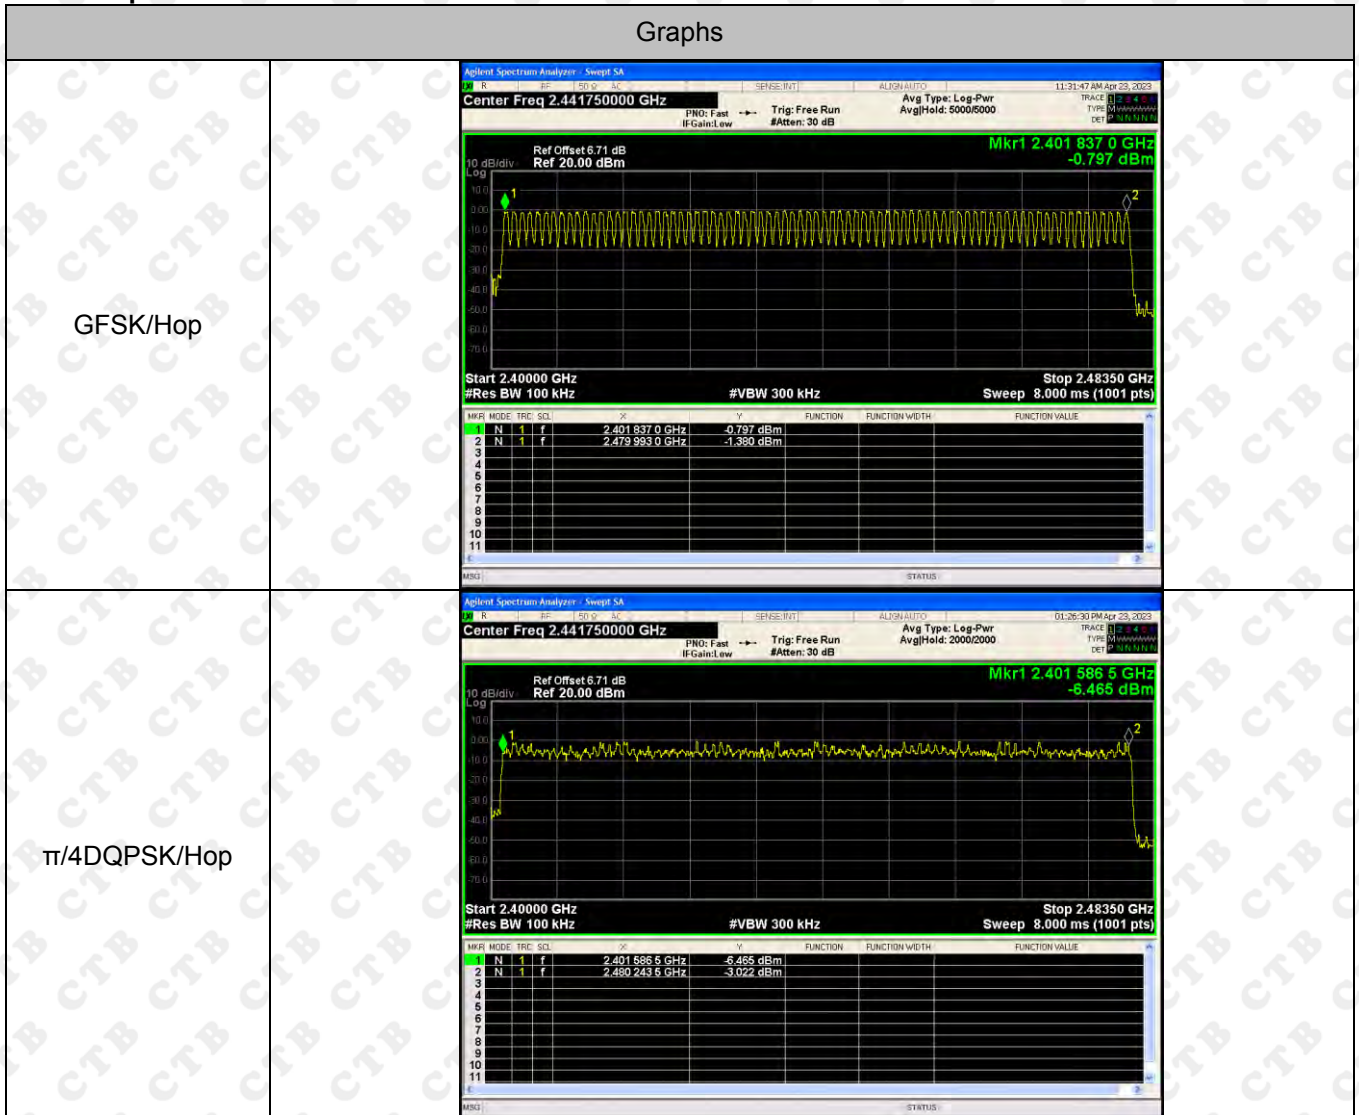


Left ear:
Test Graph

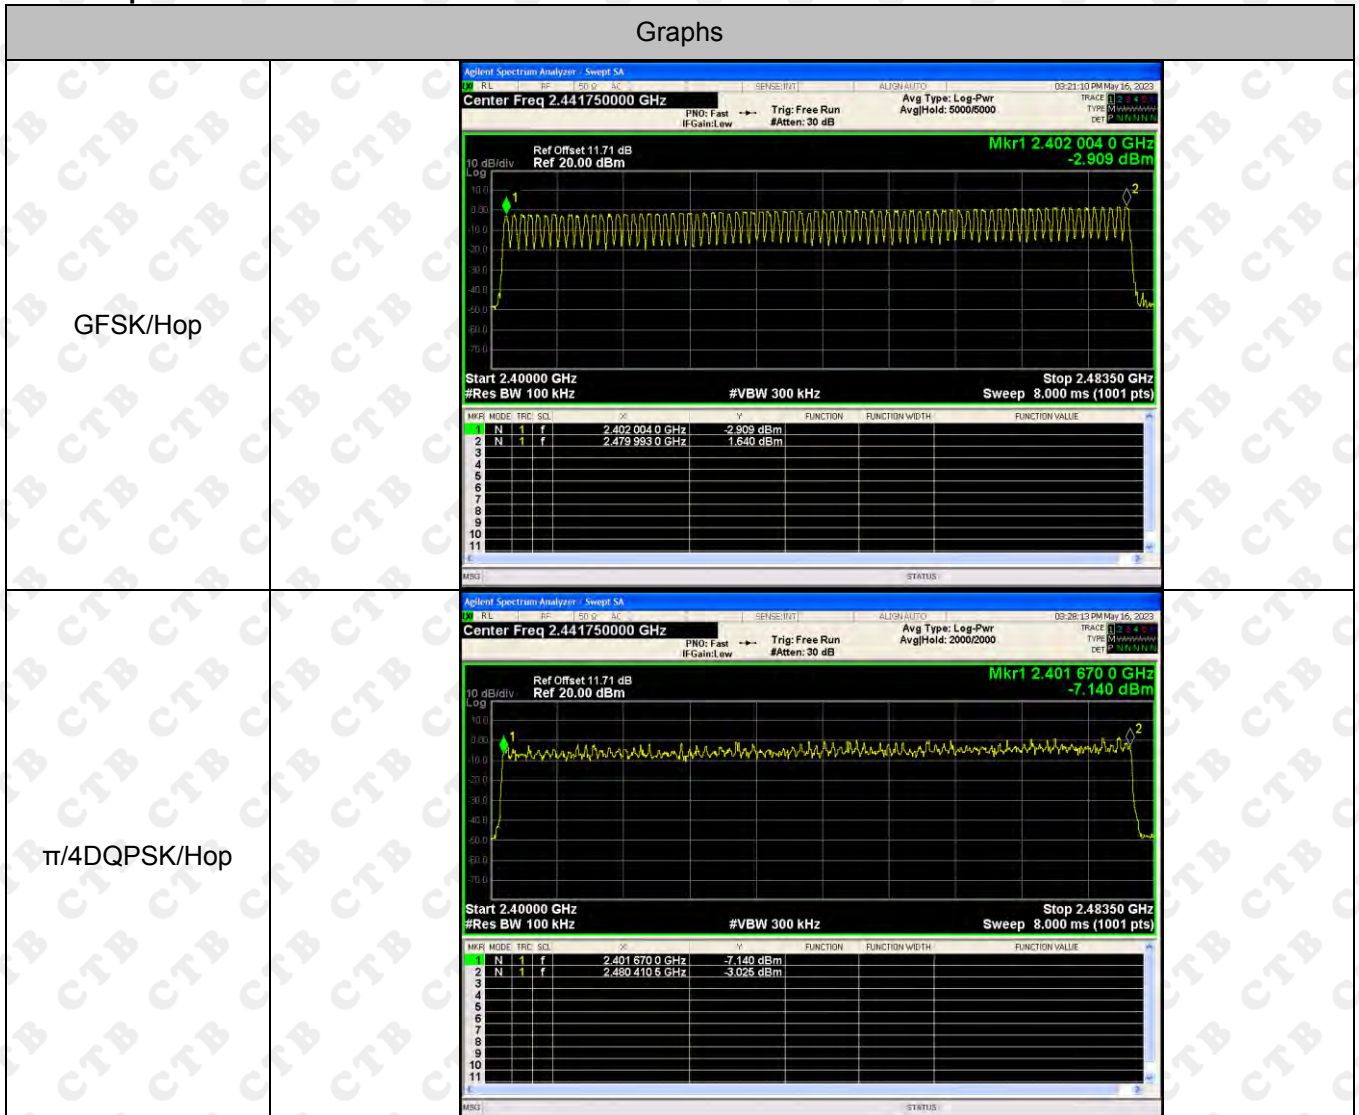

13. DWELL TIME

13.1 Block Diagram Of Test Setup

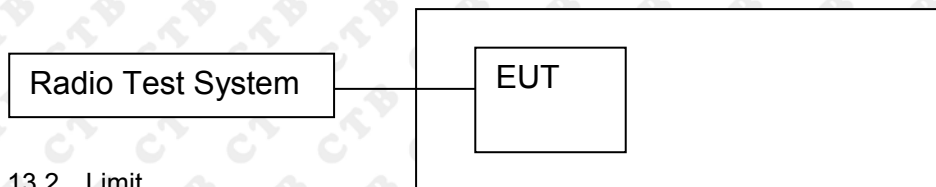

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Right ear:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	Hop	0.382	122.24	400	PASS
	DH3	Hop	1.644	263.04	400	PASS
	DH5	Hop	2.887	307.947	400	PASS
π/4DQ PSK	2DH1	Hop	0.383	122.56	400	PASS
	2DH3	Hop	1.644	263.04	400	PASS
	2DH5	Hop	2.887	307.947	400	PASS

Left ear:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	Hop	0.382	122.24	400	PASS
	DH3	Hop	1.644	263.04	400	PASS
	DH5	Hop	2.887	307.947	400	PASS
π/4DQ PSK	2DH1	Hop	0.382	122.24	400	PASS
	2DH3	Hop	1.644	263.04	400	PASS
	2DH5	Hop	2.887	307.947	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Remark: Only showed the worst mode in this report.

Right ear:
Test Graph

GFSK_DH5/HOP

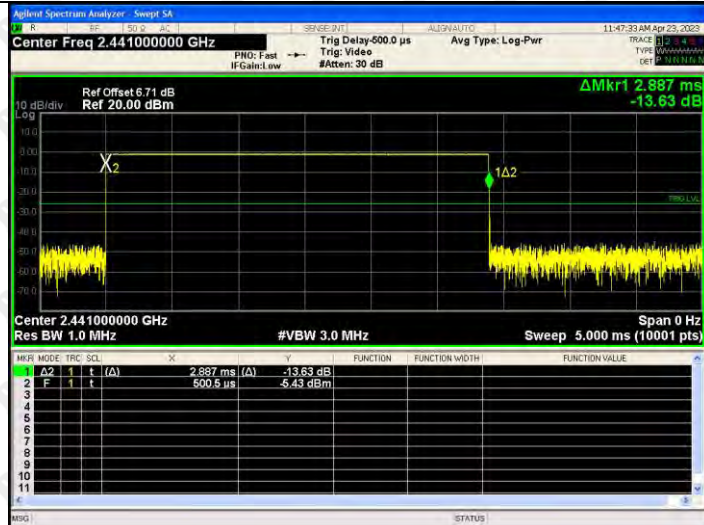

$\pi/4$ DQPSK_2DH5/
HOP

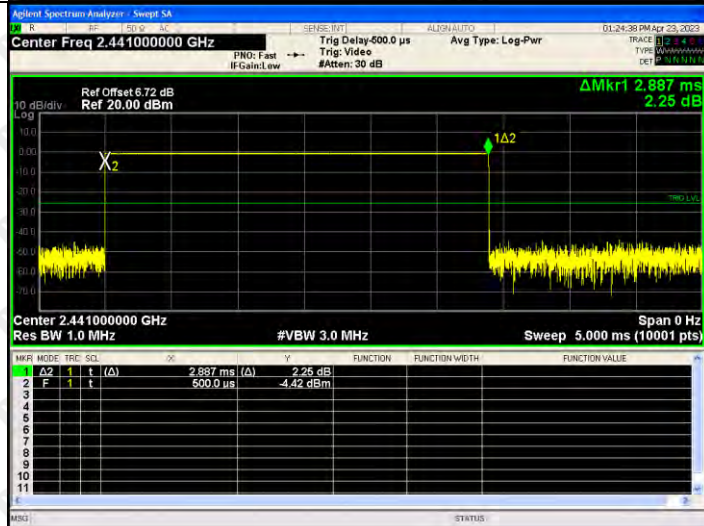


Left ear:
Test Graph

GFSK_DH5/HOP



$\pi/4$ DQPSK_2DH5/
HOP

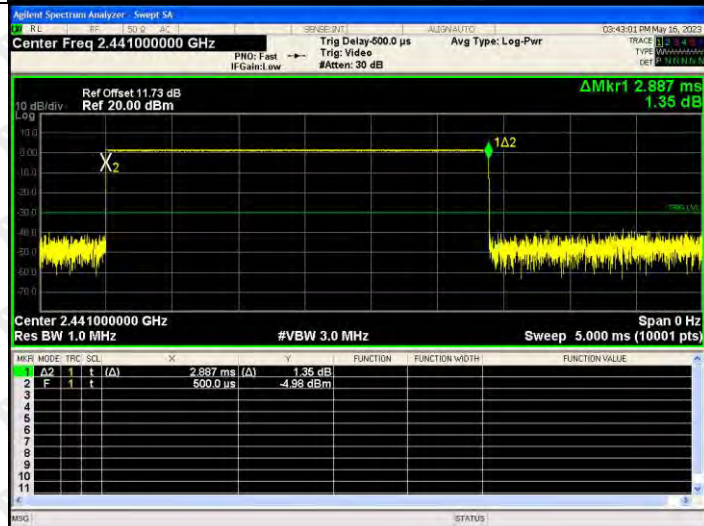

14. PSEUDORANDOM FREQUENCY


14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

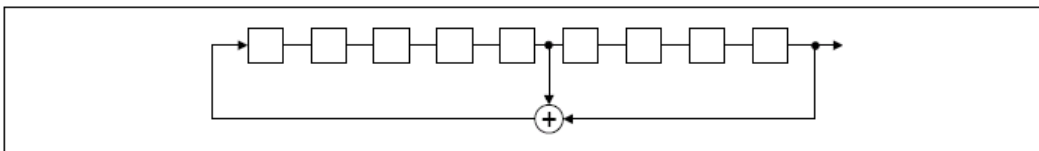

An example of Pseudorandom Frequency Hopping Sequence as follow:

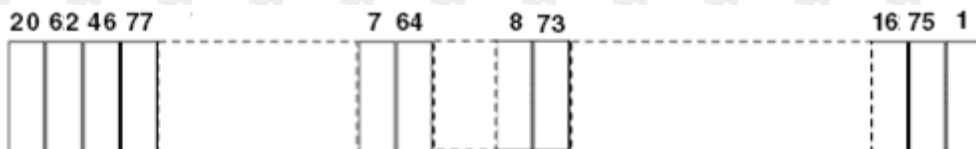

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Chip antenna. The best case gain of the antenna is 2.70dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



※※※※ END OF REPORT ※※※※