



TEST REPORT

No. I23N01803-HAC RF

For

Shenzhen Tengfei Technology Management Ltd.

5G Mobile Phone

Model Name: NX769J

With

Hardware Version: NX769J_V1AMB

Software Version: REDMAGICOS9.0.0_NX769J_GB

FCC ID: 2A9QD-NX769J

Results Summary: M Category = M3

Issued Date: 2023-11-30

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518000.

Tel:+86(0)755-33322000, Fax:+86(0)755-33322001

Email: yewu@saict.ac.cn. www.saict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23N01803-HAC RF	Rev.0	1st edition	2023-11-30

CONTENTS

1. SUMMARY OF TEST REPORT	5
1.1. TEST ITEMS	5
1.2. TEST STANDARDS	5
1.3. TEST RESULT	5
1.4. TESTING LOCATION	5
1.5. PROJECT DATA	5
1.6. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. AIR INTERFACES / BANDS INDICATING OPERATING MODES	8
4. REFERENCE DOCUMENTS	9
5. OPERATIONAL CONDITIONS DURING TEST	10
5.1. HAC MEASUREMENT SET-UP	10
5.2. PROBE SPECIFICATION	11
5.3. TEST ARCH PHANTOM & PHONE POSITIONER.....	12
5.4. ROBOTIC SYSTEM SPECIFICATIONS	12
6. EUT ARRANGEMENT	13
6.1. WD RF EMISSION MEASUREMENTS REFERENCE AND PLANE	13
7. SYSTEM VALIDATION	14
7.1. VALIDATION PROCEDURE	14
7.2. VALIDATION RESULT	14
8. MODULATION INTERFERENCE FACTOR (MIF)	15
9. EVALUATION FOR LOW-POWER EXEMPTION	17
9.1. PRODUCT TESTING THRESHOLD	17
9.2. AVERAGE CONDUCTED POWER	17
10. RF TEST PROCEDURES.....	19
11. MEASUREMENT RESULTS (E-FIELD)	20
12. ANSI C 63.19-2011 LIMITS	21
13. MEASUREMENT UNCERTAINTY	22
14. MAIN TEST INSTRUMENTS.....	23



ANNEX A: RF EMISSION TEST PLOT.....	24
ANNEX B: SYSTEM VALIDATION RESULT	52
ANNEX C: DIPOLE CALIBRATION CERTIFICATE	55
ANNEX D: PROBE CALIBRATION CERTIFICATE.....	70
ANNEX E: DAE CALIBRATION CERTIFICATE	91
ANNEX F: UID SPECIFICATION.....	94

1. Summary of Test Report

1.1. Test Items

Description:	5G Mobile Phone
Model Name:	NX769J
Applicant's Name:	Shenzhen Tengfei Technology Management Ltd.
Manufacturer's Name:	Shenzhen Tengfei Technology Management Ltd.

1.2. Test Standards

ANSI C63.19-2011

1.3. Test Result

Pass

1.4. Testing Location


Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China

1.5. Project Data


Testing Start Date: 2023-11-01

Testing End Date: 2023-11-02


1.6. Signature



Li Yongfu
(Prepared this test report)



Liu Jian
(Reviewed this test report)



Cao Junfei
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name:	Shenzhen Tengfei Technology Management Ltd.
Address:	Room 3101, Building D1, Chuangzhi Yuncheng, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen
City:	Shenzhen
Country:	China
Telephone:	+86 0755 86360200

2.2. Manufacturer Information

Company Name:	Shenzhen Tengfei Technology Management Ltd.
Address:	Room 3101, Building D1, Chuangzhi Yuncheng, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen
City:	Shenzhen
Country:	China
Telephone:	+86 0755 86360200

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description:	5G Mobile Phone
Mode Name:	NX769J
Condition of EUT as received:	No obvious damage in appearance
Frequency Bands:	GSM 850/1900, CDMA BC0, WCDMA Band 2/4/5, LTE Band 2/4/5/7/12/17/26/41/66, NR n2/n5/n7/n41/n66/n77/n78, Bluetooth, WLAN 2.4GHz/5GHz

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Receipt Date
UT01aa	862664060009115	NX769J_V1AMB	REDMAGICOS9.0.0_ NX769J_GB	2023-10-31
UT02aa	862664060009651	NX769J_V1AMB	REDMAGICOS9.0.0_ NX769J_GB	2023-10-31

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test HAC with the UT01aa & UT02aa.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
/	/	/	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. Air Interfaces / Bands Indicating Operating Modes

Air-interface	Band(MHz)	Type	C63.19 / tested	Simultaneous Transmissions	Name of Voice Service
GSM	GSM 850/1900	VO	Yes	BT, WLAN	CMRS Voice
	EDGE	DT	No	BT, WLAN	NA
CDMA	BC0	VO	Yes	BT, WLAN	CMRS Voice
	EVDO	DT	No	BT, WLAN	NA
WCDMA	B2/B4/B5	VO	No	BT, WLAN	CMRS Voice
	HSPA	DT	No	BT, WLAN	NA
LTE (FDD)	2/4/5/7/12/17/26/66	VD	No	NR, BT, WLAN	VoLTE
LTE (TDD)	41	VD	Yes	NR, BT, WLAN	VoLTE
NR(FDD)	n2/n5/n7/n66	VD	No	LTE, BT, WLAN	VoNR
NR(TDD)	n41/n77/n78	VD	No	LTE, BT, WLAN	VoNR
WLAN	2.4GHz	DT	No	WWAN	NA
WLAN	5GHz	DT	No	WWAN	NA
Bluetooth	2.4GHz	DT	No	WWAN	NA

VO: Voice CMRS/PSTN Service Only

VD: Voice CMRS/PSTN and Data Service

DT: Digital Transport

4. Reference Documents

The following document listed in this section is referred for testing.

Reference	Title	Version
ANSI C63.19-2011	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids	2011
KDB 285076 D01	Equipment Authorization Guidance for Hearing Aid Compatibility	v06r02
KDB 285076 D02	Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services	v04
KDB 285076 D03	Hearing Aid Compatibility Frequently Asked Questions	v01r06

5. Operational Conditions During Test

5.1. HAC Measurement Set-up

These measurements are performed using the DASY5 NEO automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Intel Core2 1.86 GHz computer with Windows XP system and HAC Measurement Software DASY5 NEO, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

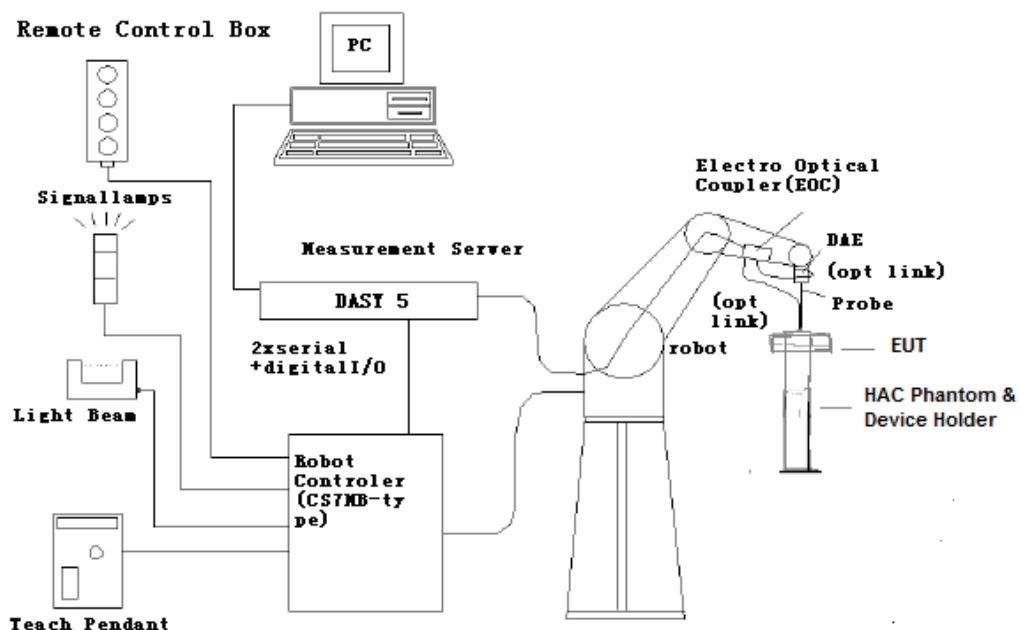



Fig. 1 HAC Test Measurement Set-up

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

5.2. Probe Specification

E-Field Probe Description

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	40 MHz to > 6 GHz (can be extended to < 20 MHz) Linearity: ± 0.2 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms



[ER3DV6]

5.3. Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field $< \pm 0.5$ dB.

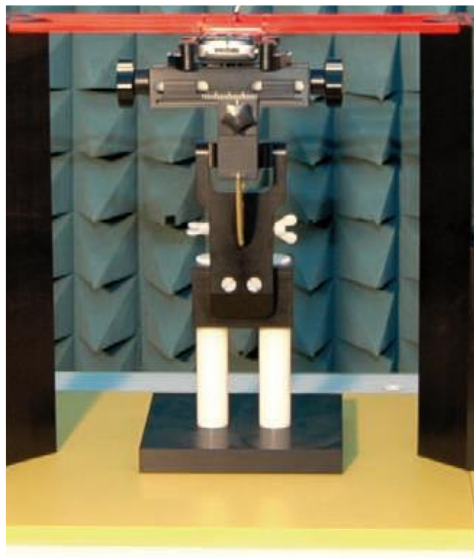


Fig. 2 HAC Phantom & Device Holder

5.4. Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX160XL

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Intel Core2

Clock Speed: 1.86 GHz

Operating System: Windows XP

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY5 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

6. EUT Arrangement

6.1. WD RF Emission Measurements Reference and Plane

Figure 4 illustrates the references and reference plane that shall be used in the WD emissions measurement.

- The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
- The grid is centered on the audio frequency output transducer of the WD (speaker or T-coil).
- The grid is located by reference to a reference plane. This reference plane is the planar area that contains the highest point in the area of the WD that normally rests against the user's ear
- The measurement plane is located parallel to the reference plane and 15 mm from it, out from the phone. The grid is located in the measurement plane.

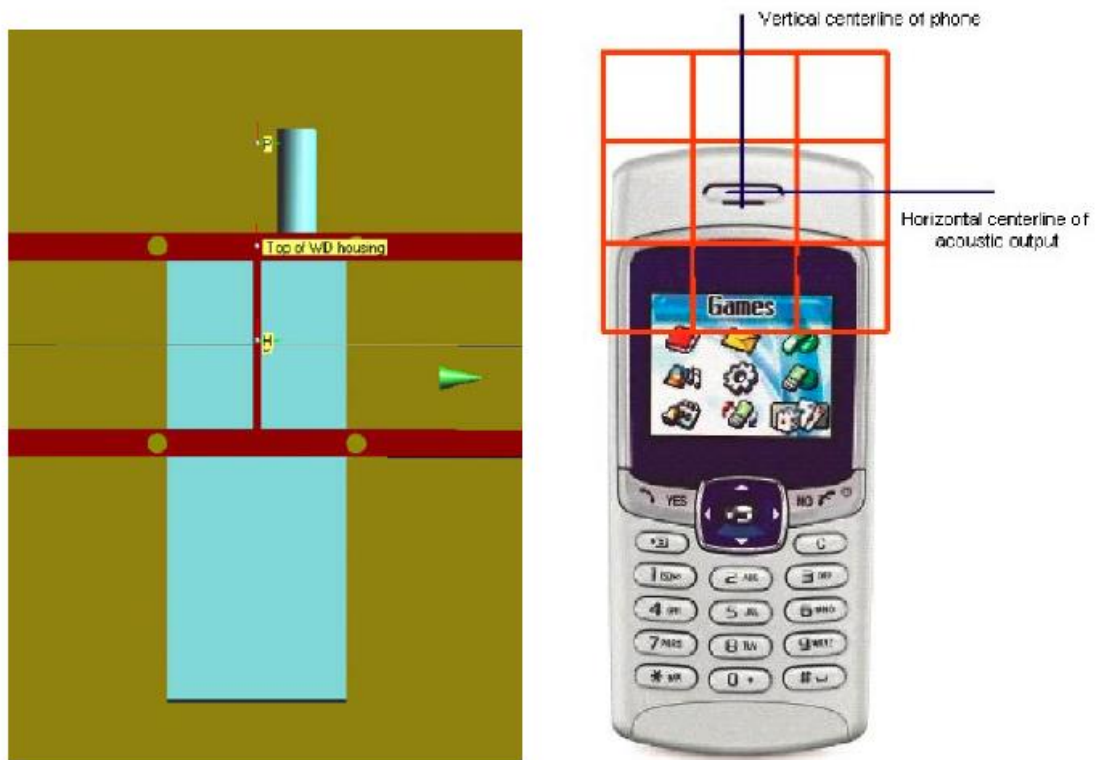


Fig. 3 WD reference and plane for RF emission measurements

7. System Validation

7.1. Validation Procedure

Place a dipole antenna meeting the requirements given in ANSI C63.19 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical output. Position the E-field probes so that:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) are 15 mm from the closest surface of the dipole elements.

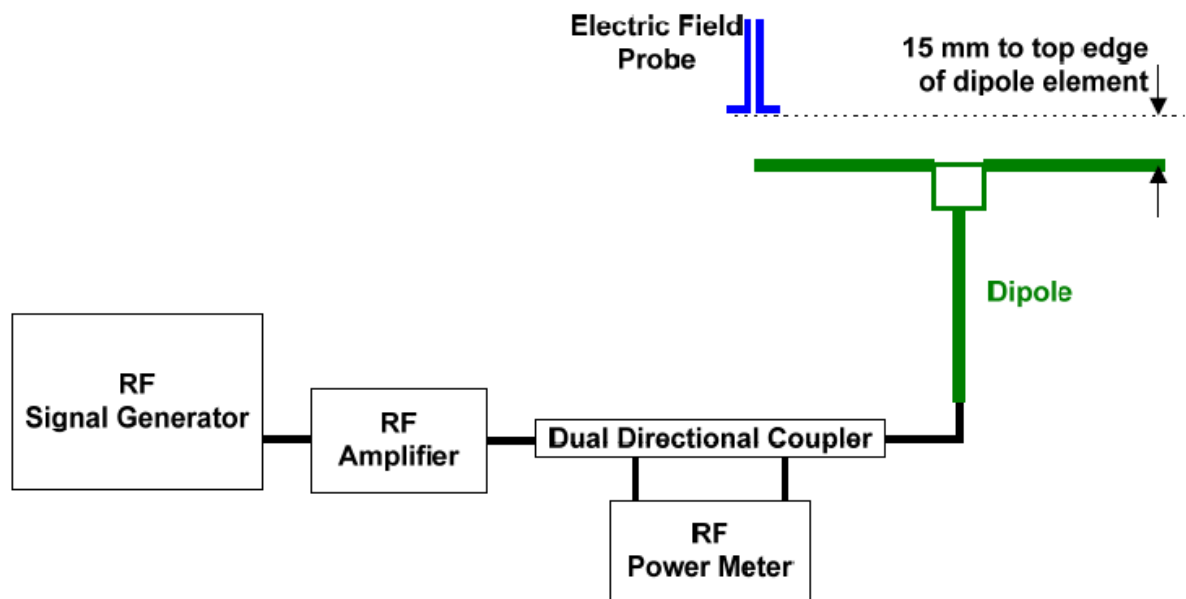


Fig. 4 Dipole Validation Setup

7.2. Validation Result

E-Field Scan						
Mode	Frequency (MHz)	Input Power (mW)	Measured ¹ Value(dBV/m)	Target ² Value(dBV/m)	Deviation ³ (%)	Limit ⁴ (%)
CW	835	100	44.58	41.15	8.34	±25
CW	1880	100	39.73	38.93	2.05	±25
CW	2600	100	37.96	38.62	-1.71	±25

Notes:

1. Please refer to the attachment for detailed measurement data and plot.
2. Target value is provided by SPEAD in the calibration certificate of specific dipoles.
3. Deviation (%) = $100 \times (\text{Measured value} - \text{Target value}) / \text{Target value}$.
4. ANSI C63.19 requires values within $\pm 25\%$ are acceptable, of which 12% is deviation and 13% is measurement uncertainty. Values independently validated for the dipole actually used in the measurements should be used, when available.

8. Modulation Interference Factor (MIF)

The HAC Standard ANSI C63.19-2011 defines a new scaling using the Modulation Interference Factor (MIF) which replaces the need for the Articulation Weighting Factor (AWF) during the evaluation and is applicable to any modulation scheme.

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics. Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63-2007.

Definitions

ER3D, E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the “indirect” measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by probe modulation response (PMR) calibration in order to not overestimate the field reading.

The evaluation method or the MIF is defined in ANSI C63.19-2011 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak detector. The averaged output of these filtering is called to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty. It may alternatively be determined through analysis and simulation, because it is constraint and characteristic for a communication signal. DASY52 uses well defined signals for PMR calibration. The MIF of these signals has been determined by simulation and is automatically applied.

MIF values were not tested by a probe or as specified in the standards but are based on analysis provided by SPEAG for all the air interfaces (GSM, WCDMA, CDMA, LTE). The data included in this report are for the worst case operating modes. The UIDs used are listed below:

UID	Communication System Name	MIF (dB)
10021	GSM-FDD (TDMA, GMSK)	3.63
10295	CDMA2000 (RC1, SO3, 1/8th Rate 25 fr.)	3.26
10460	UMTS-FDD (WCDMA, AMR)	-25.43
10170	LTE-FDD(SC-FDMA, 1RB, 20MHz, 16-QAM)	-9.76
10176	LTE-FDD(SC-FDMA, 1RB, 10MHz, 16-QAM)	-9.76
10173	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16QAM)	-1.44
10769	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08

A PMR calibrated probe is linearized for the selected waveform over the full dynamic range within the uncertainty specified in its calibration certificate. ER3D, EF3D and EU2D E-field probes have a bandwidth <10 kHz and can therefore not evaluate the RF envelope in the full audio band. DASY52 is therefore using the "indirect" measurement method according to ANSI C63.19-2011 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading.

The MIF measurement uncertainty is estimated as follows, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

- 0.2 dB for MIF -7 to +5 dB,
- 0.5 dB for MIF -13 to +11 dB
- 1 dB for MIF > -20 dB

9. Evaluation for low-power exemption

9.1. Product testing threshold

There are two methods for exempting an RF air interface technology from testing. The first method requires evaluation of the MIF for the worst-case operating mode. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is ≤ 17 dBm for any of its operating modes. The second method does not require determination of the MIF. The RF emissions testing exemption shall be applied to an RF air interface technology in a device whose peak antenna input power, averaged over intervals $\leq 50 \mu s$, is ≤ 23 dBm. An RF air interface technology that is exempted from testing by either method shall be rated as M4.

The first method is used to be exempt from testing for the RF air interface technology in this report.

9.2. Average conducted power

Antenna	Band	Power (dBm)	MIF (dB)	Sum (dBm)	HAC Test
Ant.2	GSM 850	33.5	3.63	37.13	Yes
Ant.3	GSM 850	33.5	3.63	37.13	Yes
Ant.2	GSM 1900	30.5	3.63	34.13	Yes
Ant.4	GSM 1900	30.5	3.63	34.13	Yes
Ant.2	CDMA BC0	23.0	3.26	26.26	Yes
Ant.3	CDMA BC0	23.0	3.26	26.26	Yes
Ant.2	WCDMA Band 2	23.0	-25.43	-2.43	No
Ant.4	WCDMA Band 2	23.0	-25.43	-2.43	No
Ant.2	WCDMA Band 4	24.0	-25.43	-1.43	No
Ant.4	WCDMA Band 4	24.0	-25.43	-1.43	No
Ant.2	WCDMA Band 5	24.0	-25.43	-1.43	No
Ant.3	WCDMA Band 5	24.0	-25.43	-1.43	No
Ant.2	LTE Band 2	23.0	-9.76	13.24	No
Ant.4	LTE Band 2	23.0	-9.76	13.24	No
Ant.2	LTE Band 4	24.0	-9.76	14.24	No
Ant.4	LTE Band 4	24.0	-9.76	14.24	No
Ant.2	LTE Band 5	24.0	-9.76	14.24	No
Ant.3	LTE Band 5	24.0	-9.76	14.24	No
Ant.2	LTE Band 7	24.0	-9.76	14.24	No
Ant.4	LTE Band 7	24.0	-9.76	14.24	No
Ant.2	LTE Band 12	24.0	-9.76	14.24	No
Ant.3	LTE Band 12	24.0	-9.76	14.24	No
Ant.2	LTE Band 17	24.0	-9.76	14.24	No
Ant.3	LTE Band 17	24.0	-9.76	14.24	No
Ant.2	LTE Band 26	24.0	-9.76	14.24	No
Ant.3	LTE Band 26	24.0	-9.76	14.24	No
Ant.2	LTE Band 66	24.0	-9.76	14.24	No
Ant.4	LTE Band 66	24.0	-9.76	14.24	No
Ant.2	LTE Band 41	24.0	-1.44	22.56	Yes
Ant.4	LTE Band 41	24.0	-1.44	22.56	Yes
Ant.4	NR n2	22.0	-12.08	9.92	No
Ant.2	NR n5	22.0	-12.08	9.92	No
Ant.4	NR n7	19.0	-12.08	6.92	No
Ant.1	NR n41	20.0	-12.08	7.92	No
Ant.4	NR n66	22.0	-12.08	9.92	No
Ant.1	NR n77	19.0	-12.08	6.92	No
Ant.1	NR n78	20.0	-12.08	7.92	No

Note: Power = Max tune-up limit

10. RF Test Procedures

The evaluation was performed with the following procedure:

- 1) Confirm proper operation of the field probe, probe measurement system and other instrumentation and the positioning system.
- 2) Position the WD in its intended test position. The gauge block can simplify this positioning.
- 3) Configure the WD normal operation for maximum rated RF output power, at the desired channel and other operating parameters (e.g., test mode), as intended for the test.
- 4) The center sub-grid shall be centered on the center of the T-Coil mode axial measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane. If the field alignment method is used, align the probe for maximum field reception.
- 5) Record the reading.
- 6) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- 7) Identify the five contiguous sub-grids around the center sub-grid whose maximum reading is the lowest of all available choices. This eliminates the three sub-grids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- 8) Identify the maximum field reading within the non-excluded sub-grids identified in Step 7)
- 9) Evaluate the MIF and add to the maximum steady-state rms field-strength reading to obtain the RF audio interference level..
- 10) Compare this RF audio interference level with the categories and record the resulting WD category rating.

11. Measurement Results (E-Field)

Frequency		Measured Value (dBV/m)	Power Drift (dB)	Category
Channel	MHz			
Ant.2 - GSM 850				
251	848.8	30.03	-0.06	M4 (see Fig A.1)
190	836.6	31.65	-0.02	M4 (see Fig A.2)
128	824.2	32.35	-0.02	M4 (see Fig A.3)
Ant.3 - GSM 850				
251	848.8	18.22	0.05	M4 (see Fig A.4)
190	836.6	20.38	0.15	M4 (see Fig A.5)
128	824.2	20.96	0.09	M4 (see Fig A.6)
Ant.2 - GSM 1900				
810	1909.8	31.01	0.03	M3 (see Fig A.7)
661	1880.0	29.62	0.06	M4 (see Fig A.8)
512	1850.2	29.18	0.04	M4 (see Fig A.9)
Ant.4 - GSM 1900				
810	1909.8	23.82	-0.12	M4 (see Fig A.10)
661	1880.0	23.30	-0.03	M4 (see Fig A.11)
512	1850.2	22.32	-0.01	M4 (see Fig A.12)
Ant.2 - CDMA BC0				
777	848.31	12.86	-0.11	M4 (see Fig A.13)
384	836.52	14.02	-0.08	M4 (see Fig A.14)
1013	824.70	13.66	-0.11	M4 (see Fig A.15)
Ant.3 - CDMA BC0				
777	848.31	12.42	0.09	M4 (see Fig A.16)
384	836.52	13.18	-0.06	M4 (see Fig A.17)
1013	824.70	13.36	0.02	M4 (see Fig A.18)
Ant.2 - LTE Band 41				
41490	2680.0	19.72	0.01	M4 (see Fig A.19)
41055	2636.5	21.24	0.02	M4 (see Fig A.20)
40620	2593.0	22.04	0.00	M4 (see Fig A.21)
40185	2549.5	22.67	0.08	M4 (see Fig A.22)
39750	2506.0	22.90	0.01	M4 (see Fig A.23)
Ant.4 - LTE Band 41				
41490	2680.0	11.80	-0.12	M4 (see Fig A.24)
41055	2636.5	12.38	-0.03	M4 (see Fig A.25)
40620	2593.0	13.43	-0.07	M4 (see Fig A.26)
40185	2549.5	14.98	-0.06	M4 (see Fig A.27)
39750	2506.0	14.30	-0.09	M4 (see Fig A.28)

12. ANSI C 63.19-2011 Limits

WD RF audio interference level categories in logarithmic units

Emission categories	< 960 MHz	
	E-field emissions	
Category M1	50 to 55	dB (V/m)
Category M2	45 to 50	dB (V/m)
Category M3	40 to 45	dB (V/m)
Category M4	< 40	dB (V/m)
Emission categories	> 960 MHz	
	E-field emissions	
Category M1	40 to 45	dB (V/m)
Category M2	35 to 40	dB (V/m)
Category M3	30 to 35	dB (V/m)
Category M4	< 30	dB (V/m)

13. Measurement Uncertainty

No.	Error source	Type	Uncertainty Value (%)	Prob. Dist.	k	c_i	Standard Uncertainty (%) u_i (%)	Degree of freedom V_{eff} or v_i	source
1	System repeatability	A	0.24	N	1	1	0.24	9	Measurement
Measurement System									
2	Probe Calibration	B	5.1	N	1	1	5.1	∞	Manufacturer
3	Axial Isotropy	B	4.7	R	$\sqrt{3}$	1	2.7	∞	Cal report
4	Sensor Displacement	B	16.5	R	$\sqrt{3}$	1	9.5	∞	Manufacturer
5	Boundary Effects	B	2.4	R	$\sqrt{3}$	1	1.4	∞	Manufacturer
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞	Cal report
7	Scaling to Peak Envelope Power	B	2.0	R	$\sqrt{3}$	1	1.2	∞	Standard
8	System Detection Limit	B	1.0	R	$\sqrt{3}$	1	0.6	∞	Manufacturer
9	Readout Electronics	B	0.3	N	1	1	0.3	∞	Manufacturer
10	Response Time	B	0.8	R	$\sqrt{3}$	1	0.5	∞	Manufacturer
11	Integration Time	B	2.6	R	$\sqrt{3}$	1	1.5	∞	Manufacturer
12	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.7	∞	Measurement
13	RF Reflections	B	12.0	R	$\sqrt{3}$	1	6.9	∞	Measurement
14	Probe Positioner	A	1.2	R	$\sqrt{3}$	1	0.7	∞	Manufacturer
15	Probe Positioning	A	4.7	R	$\sqrt{3}$	1	2.7	∞	Manufacturer
16	Extra. And Interpolation	B	1.0	R	$\sqrt{3}$	1	0.6	∞	Manufacturer
Test Sample Related									
17	Device Positioning Vertical	B	4.7	R	$\sqrt{3}$	1	2.7	∞	Manufacturer
18	Device Positioning Lateral	B	1.0	R	$\sqrt{3}$	1	0.6	∞	Manufacturer
19	Device Holder and Phantom	B	2.4	R	$\sqrt{3}$	1	1.4	∞	Manufacturer
20	Power Drift	B	5.0	R	$\sqrt{3}$	1	2.9	∞	Measurement
Phantom and Setup related									
21	Phantom Thickness	B	2.4	R	$\sqrt{3}$	1	1.4	∞	Manufacturer
MIF related									
22	Monitor amplitude	B	2.8	R	$\sqrt{3}$	1	1.6	∞	Manufacturer
23	Setup repeatability	A	2.7	N	1	1	2.7	9	Manufacturer
24	Sensor amplitude	B	11.6	R	$\sqrt{3}$	1	6.7	∞	Manufacturer
Combined standard uncertainty (%)		$u_c = \sqrt{\sum_{i=1}^{24} c_i^2 u_i^2}$		18.3					
Expanded uncertainty (Confidence interval of 95 %)		$u_e = 2u_c$		N		k=2		36.6	

14. Main Test Instruments

Table 14-1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Signal Generator	E8257D	MY47461211	2023-01-13	One year
02	Power meter	NRP	102603	2022-12-29	One year
03	Power sensor	NRP-Z51	102211	2022-12-29	One year
04	Amplifier	VTL5400	0404	/	/
05	HAC Test Arch	N/A	1150	/	/
06	DAE	DAE4	1527	2023-08-07	One year
07	E-Field Probe	EF3DV3	4094	2023-08-10	Three years
08	HAC Dipole	CD835V3	1165	2021-05-18	Three years
09	HAC Dipole	CD1880V3	1149	2021-05-18	Three years
10	HAC Dipole	CD2600V3	1020	2021-05-18	Three years
11	BTS	CMW500	152499	2023-07-14	One year
12	Software	DASY5	/	/	/

ANNEX A: RF Emission Test Plot

HAC RF E-Field Ant.2 - GSM 850 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.43 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 30.03 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 30.78 dBV/m	Grid 2 M4 29.39 dBV/m	Grid 3 M4 28.49 dBV/m
Grid 4 M4 28.68 dBV/m	Grid 5 M4 29.13 dBV/m	Grid 6 M4 28.66 dBV/m
Grid 7 M4 29.71 dBV/m	Grid 8 M4 30.03 dBV/m	Grid 9 M4 29.41 dBV/m

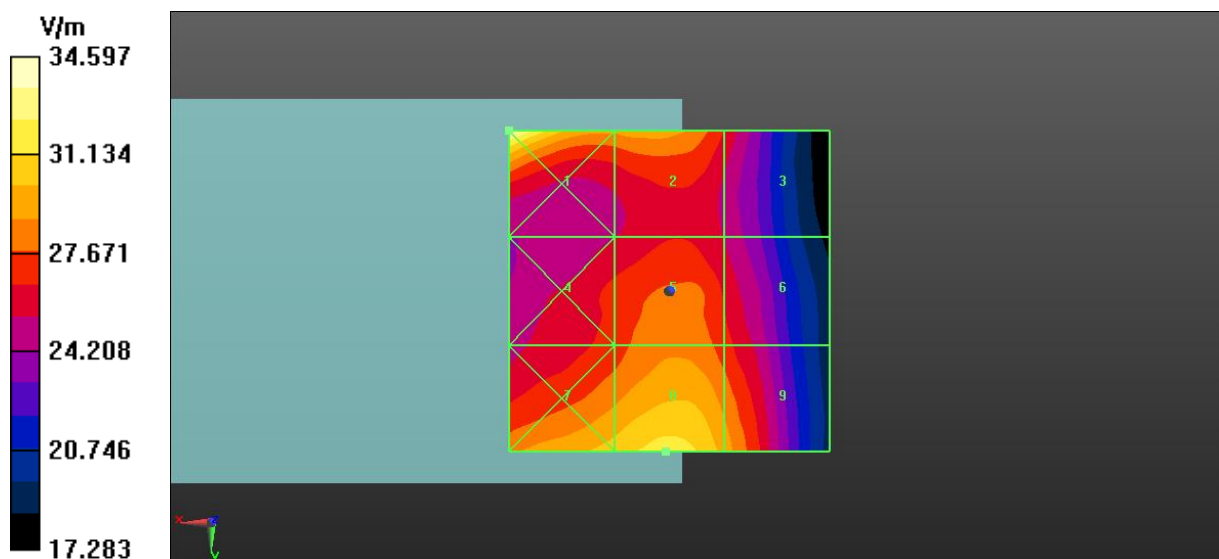


Fig A.1 HAC RF E-Field GSM 850

HAC RF E-Field Ant.2 - GSM 850 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 29.44 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.65 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.01 dBV/m	Grid 2 M4 30.66 dBV/m	Grid 3 M4 29.87 dBV/m
Grid 4 M4 30.31 dBV/m	Grid 5 M4 30.76 dBV/m	Grid 6 M4 30.38 dBV/m
Grid 7 M4 31.33 dBV/m	Grid 8 M4 31.65 dBV/m	Grid 9 M4 31.08 dBV/m

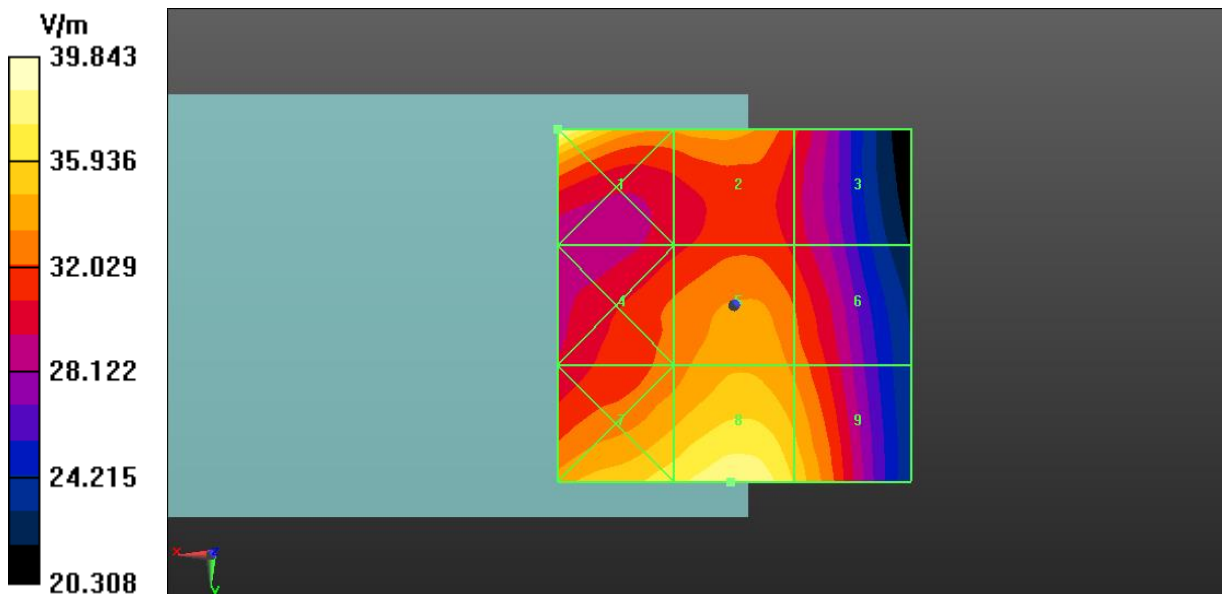


Fig A.2 HAC RF E-Field GSM 850

HAC RF E-Field Ant.2 - GSM 850 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.41 V/m; Power Drift = -0.02 dB

Applied MIF = 3.63 dB

RF audio interference level = 32.35 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 32.66 dBV/m	Grid 2 M4 31.38 dBV/m	Grid 3 M4 30.53 dBV/m
Grid 4 M4 31.11 dBV/m	Grid 5 M4 31.57 dBV/m	Grid 6 M4 31.13 dBV/m
Grid 7 M4 32.02 dBV/m	Grid 8 M4 32.35 dBV/m	Grid 9 M4 31.78 dBV/m

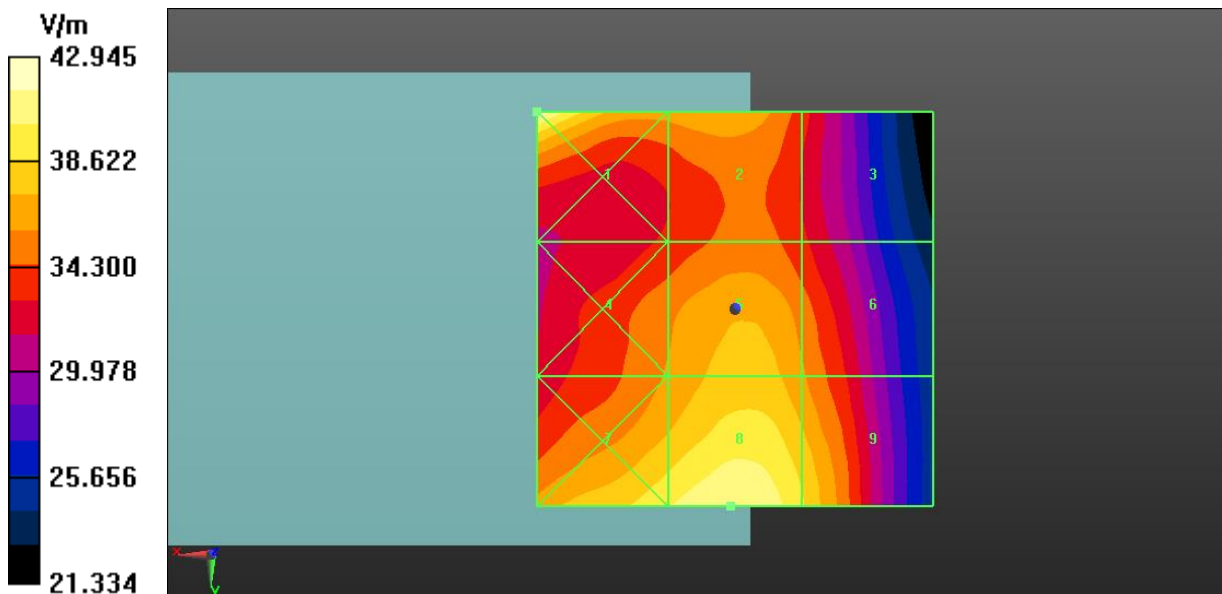


Fig A.3 HAC RF E-Field GSM 850

HAC RF E-Field Ant.3 - GSM 850 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 848.8 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.557 V/m; Power Drift = 0.05 dB

Applied MIF = 3.63 dB

RF audio interference level = 18.22 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 17.23 dBV/m	Grid 2 M4 15.17 dBV/m	Grid 3 M4 15.39 dBV/m
Grid 4 M4 17.78 dBV/m	Grid 5 M4 18.22 dBV/m	Grid 6 M4 18.08 dBV/m
Grid 7 M4 21.13 dBV/m	Grid 8 M4 21.38 dBV/m	Grid 9 M4 20.97 dBV/m

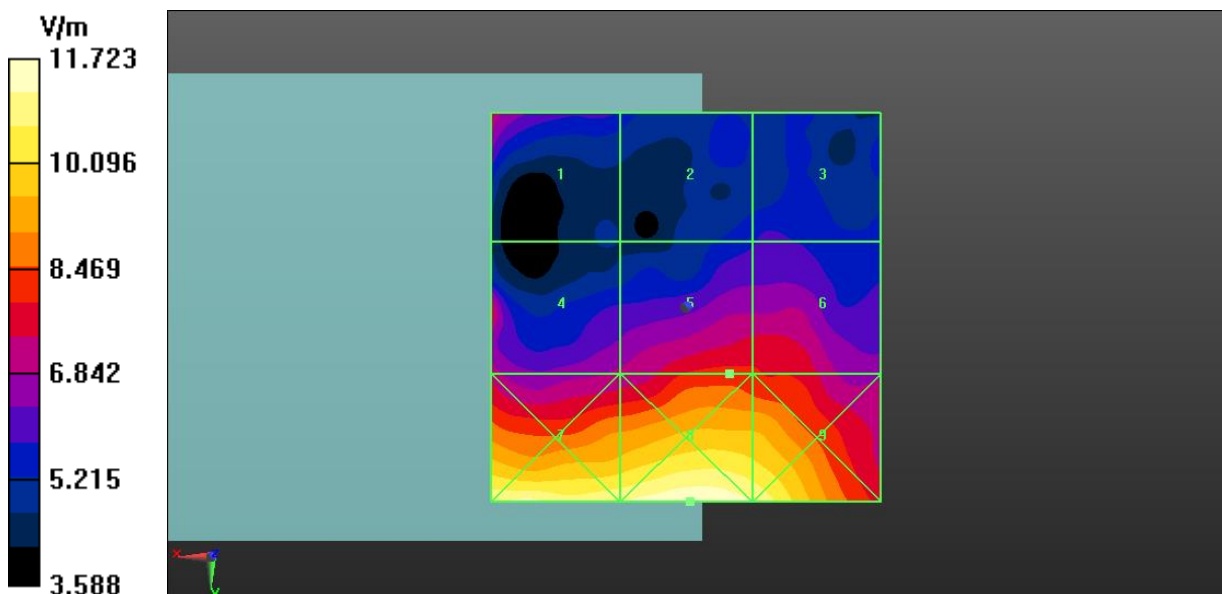


Fig A.4 HAC RF E-Field GSM 850

HAC RF E-Field Ant.3 - GSM 850 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 836.6 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.878 V/m; Power Drift = 0.15 dB

Applied MIF = 3.63 dB

RF audio interference level = 20.38 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 16.98 dBV/m	Grid 2 M4 17.56 dBV/m	Grid 3 M4 17.54 dBV/m
Grid 4 M4 19.14 dBV/m	Grid 5 M4 20.38 dBV/m	Grid 6 M4 20.35 dBV/m
Grid 7 M4 22.58 dBV/m	Grid 8 M4 23.11 dBV/m	Grid 9 M4 22.56 dBV/m

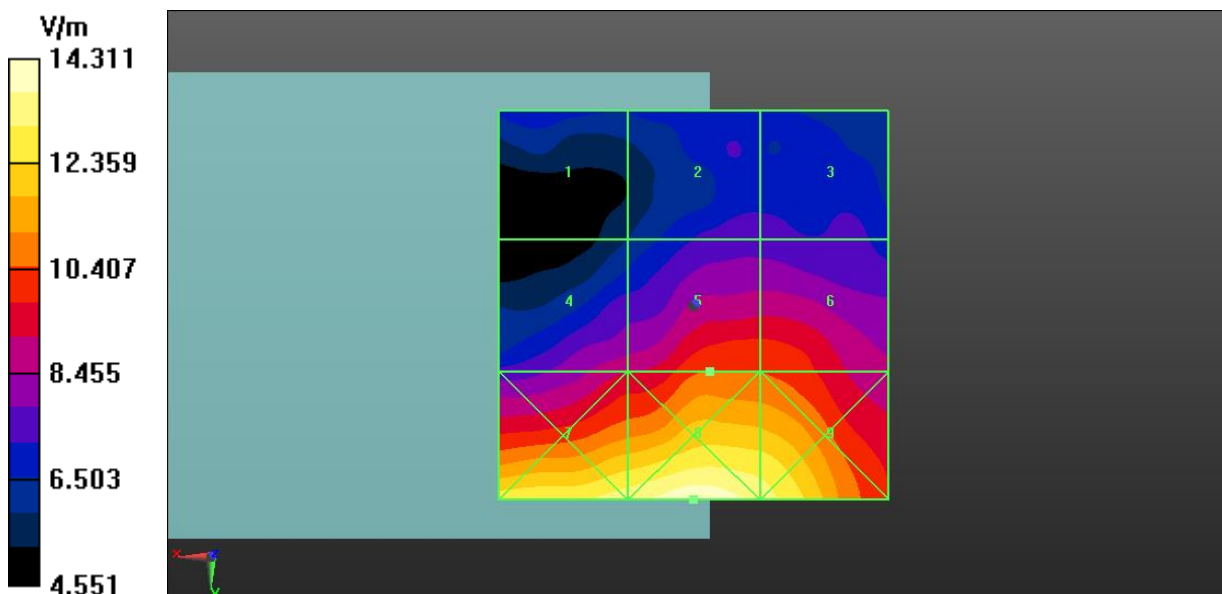


Fig A.5 HAC RF E-Field GSM 850

HAC RF E-Field Ant.3 - GSM 850 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 824.2 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.001 V/m; Power Drift = 0.09 dB

Applied MIF = 3.63 dB

RF audio interference level = 20.96 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 16.75 dBV/m	Grid 2 M4 18.14 dBV/m	Grid 3 M4 18.27 dBV/m
Grid 4 M4 20.21 dBV/m	Grid 5 M4 20.96 dBV/m	Grid 6 M4 20.92 dBV/m
Grid 7 M4 23.36 dBV/m	Grid 8 M4 23.58 dBV/m	Grid 9 M4 23.07 dBV/m

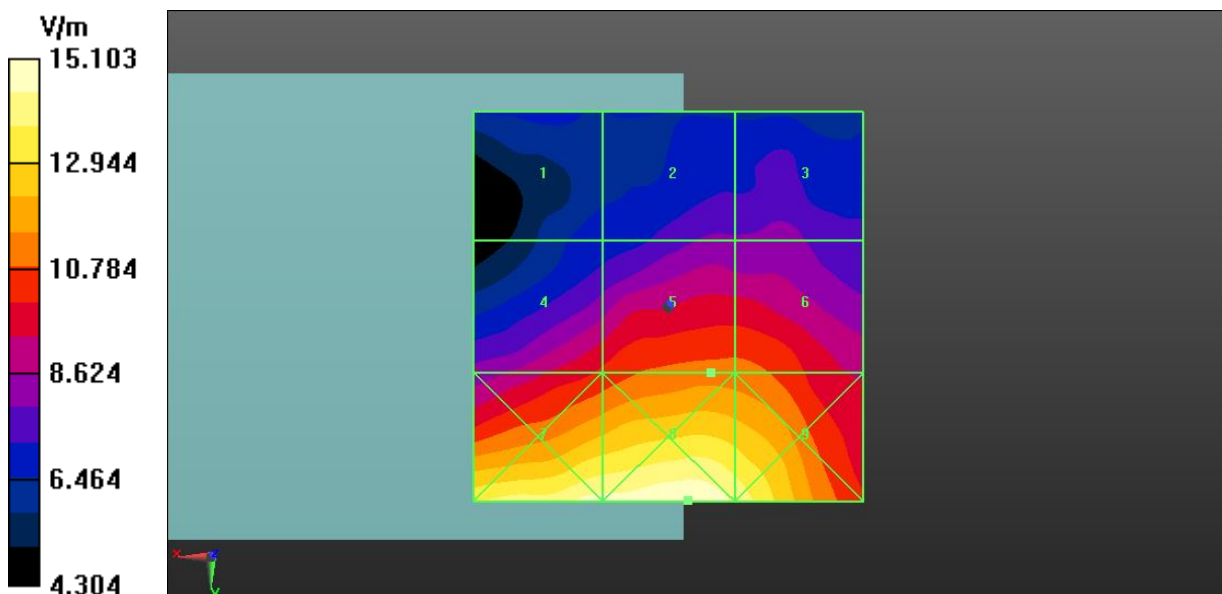


Fig A.6 HAC RF E-Field GSM 850

HAC RF E-Field Ant.2 - GSM 1900 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.96 V/m; Power Drift = 0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.01 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 33.03 dBV/m	Grid 2 M3 32.56 dBV/m	Grid 3 M3 31.67 dBV/m
Grid 4 M4 29.98 dBV/m	Grid 5 M3 31.01 dBV/m	Grid 6 M3 30.81 dBV/m
Grid 7 M4 28.27 dBV/m	Grid 8 M3 30.11 dBV/m	Grid 9 M3 30.05 dBV/m

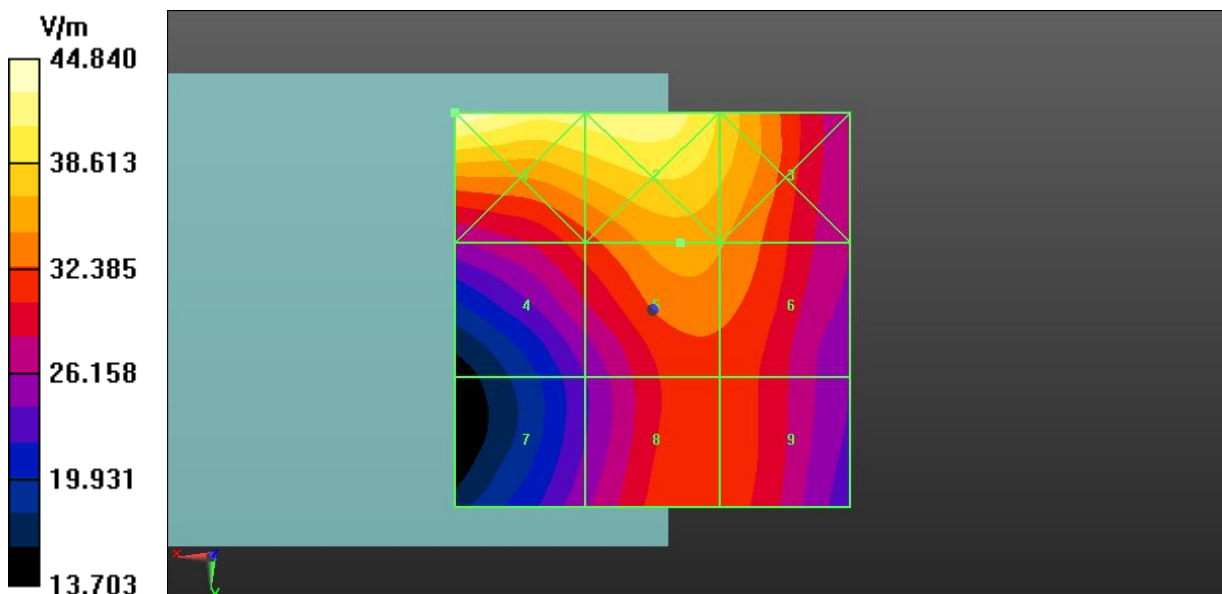


Fig A.7 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.2 - GSM 1900 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 23.89 V/m; Power Drift = 0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 29.62 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M3 32.66 dBV/m	Grid 2 M3 31.44 dBV/m	Grid 3 M3 30.25 dBV/m
Grid 4 M4 29.05 dBV/m	Grid 5 M4 29.62 dBV/m	Grid 6 M4 29.27 dBV/m
Grid 7 M4 26.93 dBV/m	Grid 8 M4 28.29 dBV/m	Grid 9 M4 28.11 dBV/m

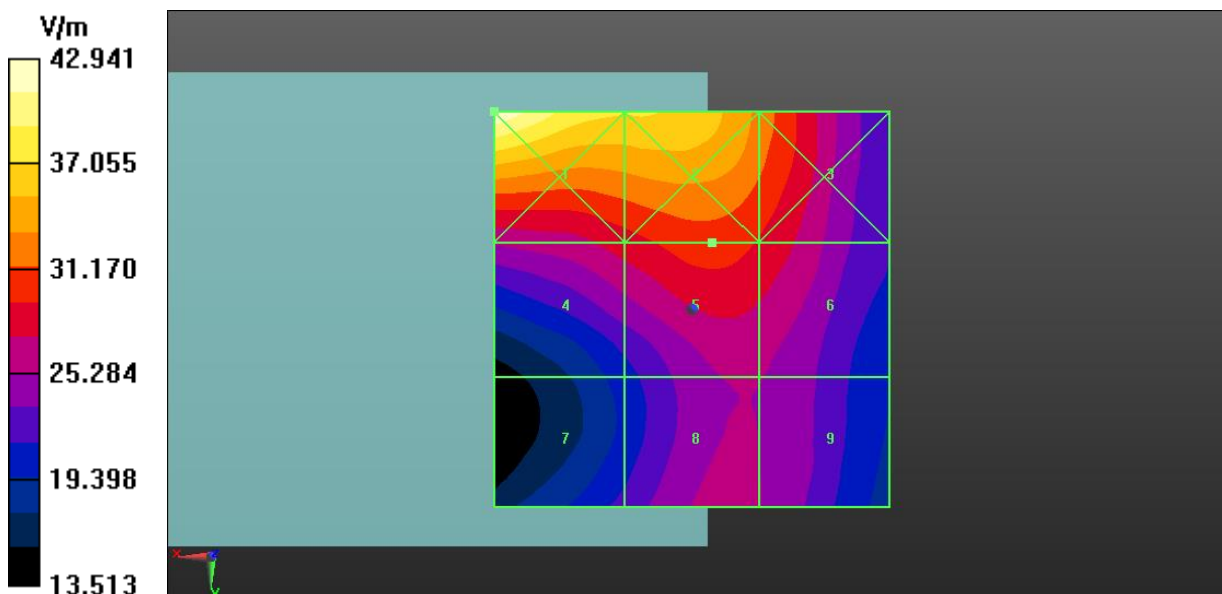


Fig A.8 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.2 - GSM 1900 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 22.18 V/m; Power Drift = 0.04 dB

Applied MIF = 3.63 dB

RF audio interference level = 29.18 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M3 32.03 dBV/m	Grid 2 M3 31.14 dBV/m	Grid 3 M3 30.02 dBV/m
Grid 4 M4 28.61 dBV/m	Grid 5 M4 29.18 dBV/m	Grid 6 M4 28.8 dBV/m
Grid 7 M4 25.65 dBV/m	Grid 8 M4 27.2 dBV/m	Grid 9 M4 27.16 dBV/m

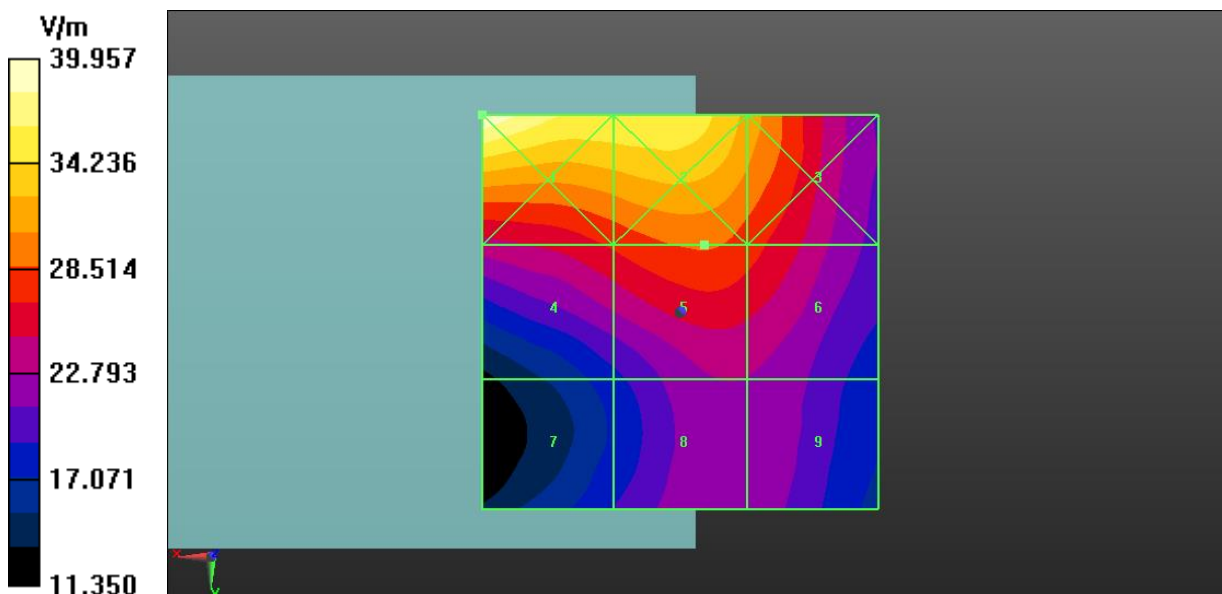


Fig A.9 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.4 - GSM 1900 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1909.8 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.407 V/m; Power Drift = -0.12 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.82 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.12 dBV/m	Grid 2 M4 23.82 dBV/m	Grid 3 M4 23.82 dBV/m
Grid 4 M4 18.58 dBV/m	Grid 5 M4 22.6 dBV/m	Grid 6 M4 22.65 dBV/m
Grid 7 M4 23.62 dBV/m	Grid 8 M4 24.14 dBV/m	Grid 9 M4 23.67 dBV/m

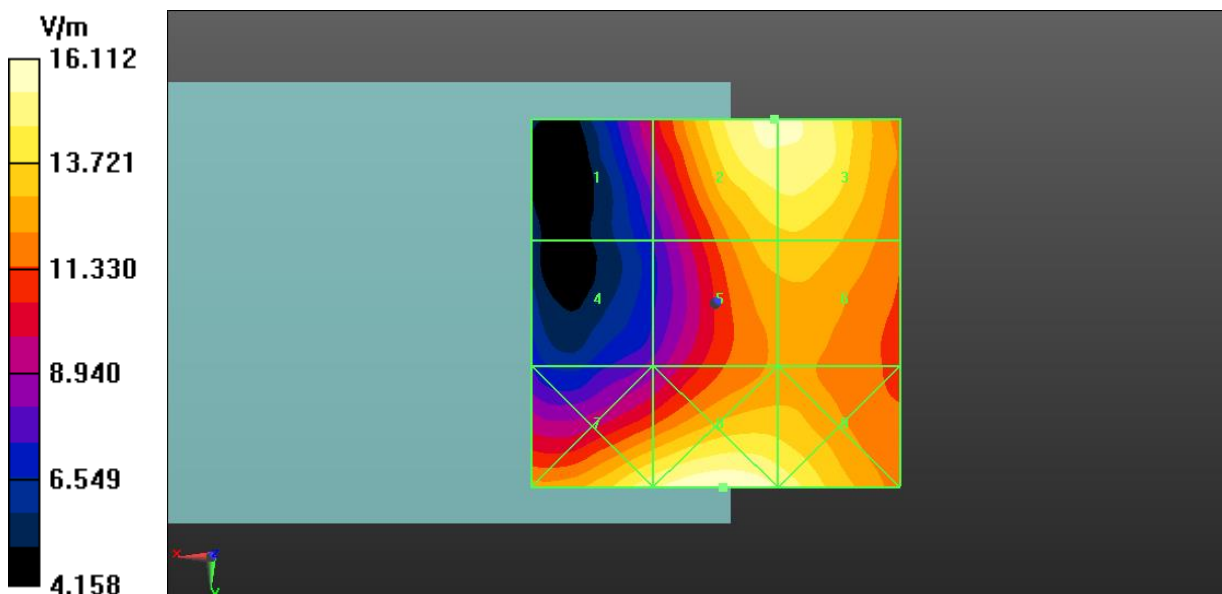


Fig A.10 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.4 - GSM 1900 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1880 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.492 V/m; Power Drift = -0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 23.30 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 22.28 dBV/m	Grid 2 M4 24.98 dBV/m	Grid 3 M4 24.88 dBV/m
Grid 4 M4 19.27 dBV/m	Grid 5 M4 23.3 dBV/m	Grid 6 M4 23.31 dBV/m
Grid 7 M4 22.49 dBV/m	Grid 8 M4 22.66 dBV/m	Grid 9 M4 21.87 dBV/m

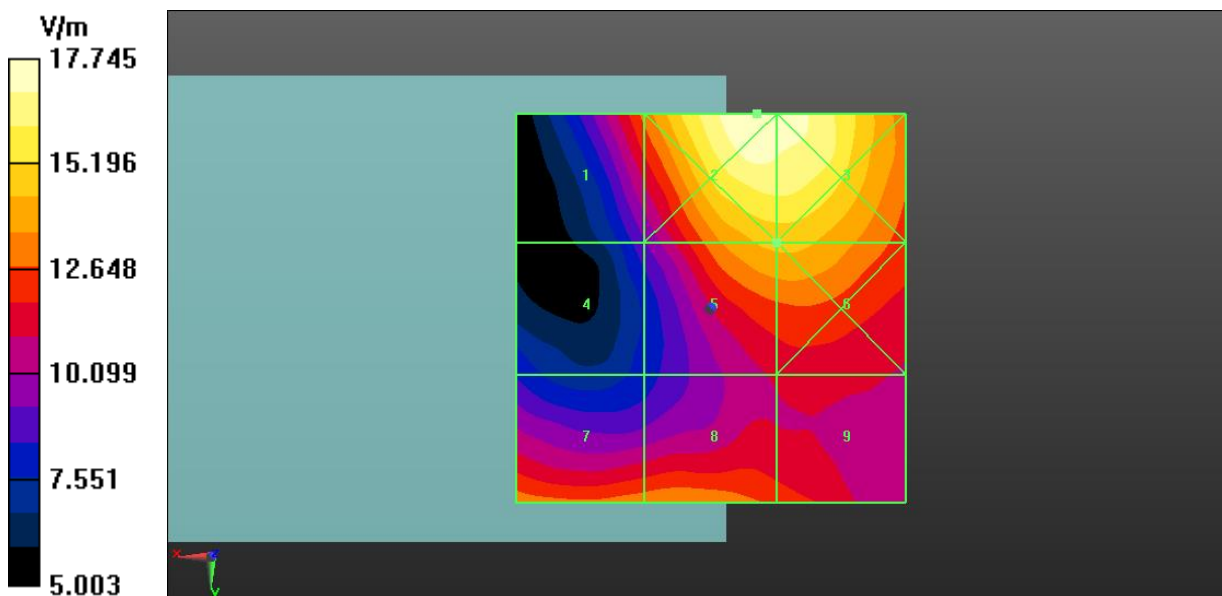


Fig A.11 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.4 - GSM 1900 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, GSM (0) Frequency: 1850.2 MHz Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.991 V/m; Power Drift = -0.01 dB

Applied MIF = 3.63 dB

RF audio interference level = 22.32 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 20.28 dBV/m	Grid 2 M4 23.26 dBV/m	Grid 3 M4 23.21 dBV/m
Grid 4 M4 18.52 dBV/m	Grid 5 M4 22.32 dBV/m	Grid 6 M4 22.32 dBV/m
Grid 7 M4 20.8 dBV/m	Grid 8 M4 20.95 dBV/m	Grid 9 M4 20.85 dBV/m

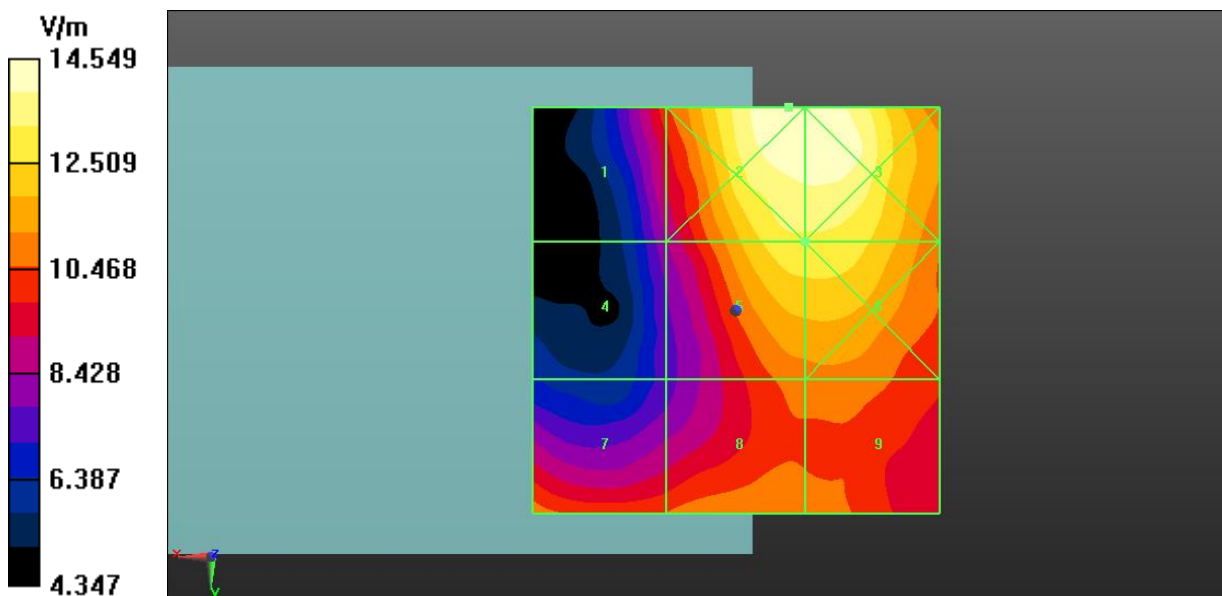


Fig A.12 HAC RF E-Field GSM 1900

HAC RF E-Field Ant.2 - CDMA BC0 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.014 V/m; Power Drift = -0.11 dB

Applied MIF = 3.26 dB

RF audio interference level = 12.86 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 14.62 dBV/m	Grid 2 M4 12.86 dBV/m	Grid 3 M4 11.12 dBV/m
Grid 4 M4 13.7 dBV/m	Grid 5 M4 12.48 dBV/m	Grid 6 M4 9.87 dBV/m
Grid 7 M4 13.36 dBV/m	Grid 8 M4 11.49 dBV/m	Grid 9 M4 10.24 dBV/m

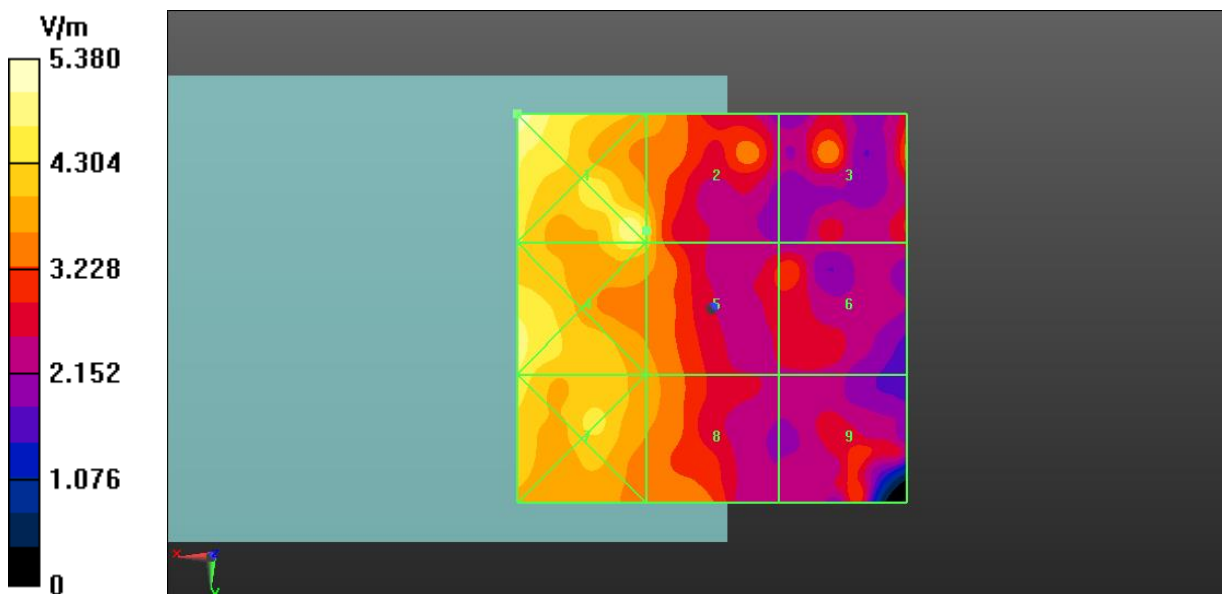


Fig A.13 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.2 - CDMA BC0 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 2.771 V/m; Power Drift = -0.08 dB

Applied MIF = 3.26 dB

RF audio interference level = 14.02 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 13.73 dBV/m	Grid 2 M4 12.33 dBV/m	Grid 3 M4 10.31 dBV/m
Grid 4 M4 14.02 dBV/m	Grid 5 M4 10.19 dBV/m	Grid 6 M4 9.85 dBV/m
Grid 7 M4 14.31 dBV/m	Grid 8 M4 17 dBV/m	Grid 9 M4 17.01 dBV/m

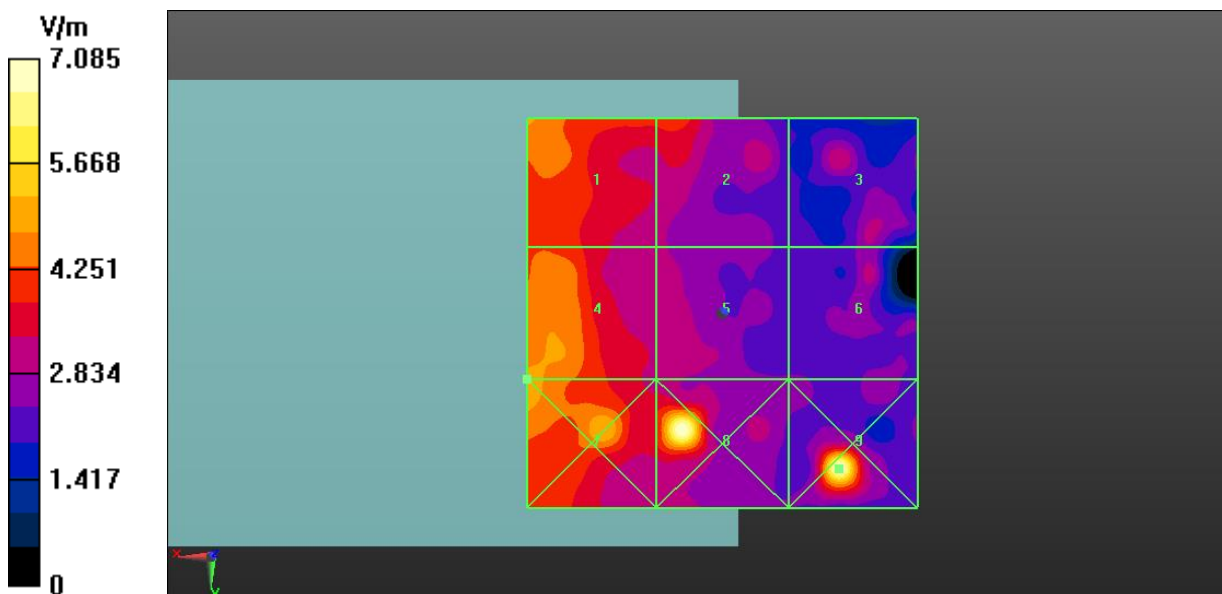


Fig A.14 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.2 - CDMA BC0 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 3.509 V/m; Power Drift = -0.11 dB

Applied MIF = 3.26 dB

RF audio interference level = 13.66 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 14.4 dBV/m	Grid 2 M4 12.39 dBV/m	Grid 3 M4 11.68 dBV/m
Grid 4 M4 14.3 dBV/m	Grid 5 M4 11.58 dBV/m	Grid 6 M4 13.66 dBV/m
Grid 7 M4 14.21 dBV/m	Grid 8 M4 11.29 dBV/m	Grid 9 M4 8.96 dBV/m

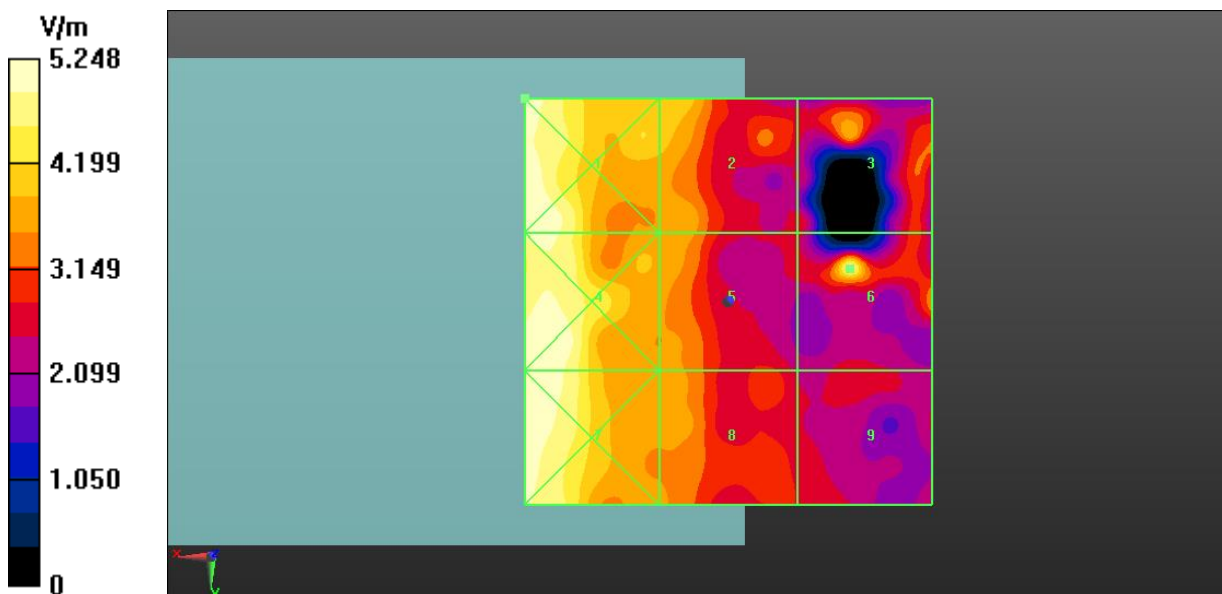


Fig A.15 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.3 - CDMA BC0 High

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 2.704 V/m; Power Drift = 0.09 dB

Applied MIF = 3.26 dB

RF audio interference level = 12.42 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 13.24 dBV/m	Grid 2 M4 14.78 dBV/m	Grid 3 M4 13.41 dBV/m
Grid 4 M4 12.36 dBV/m	Grid 5 M4 11.24 dBV/m	Grid 6 M4 9.2 dBV/m
Grid 7 M4 12.42 dBV/m	Grid 8 M4 10.58 dBV/m	Grid 9 M4 10.9 dBV/m

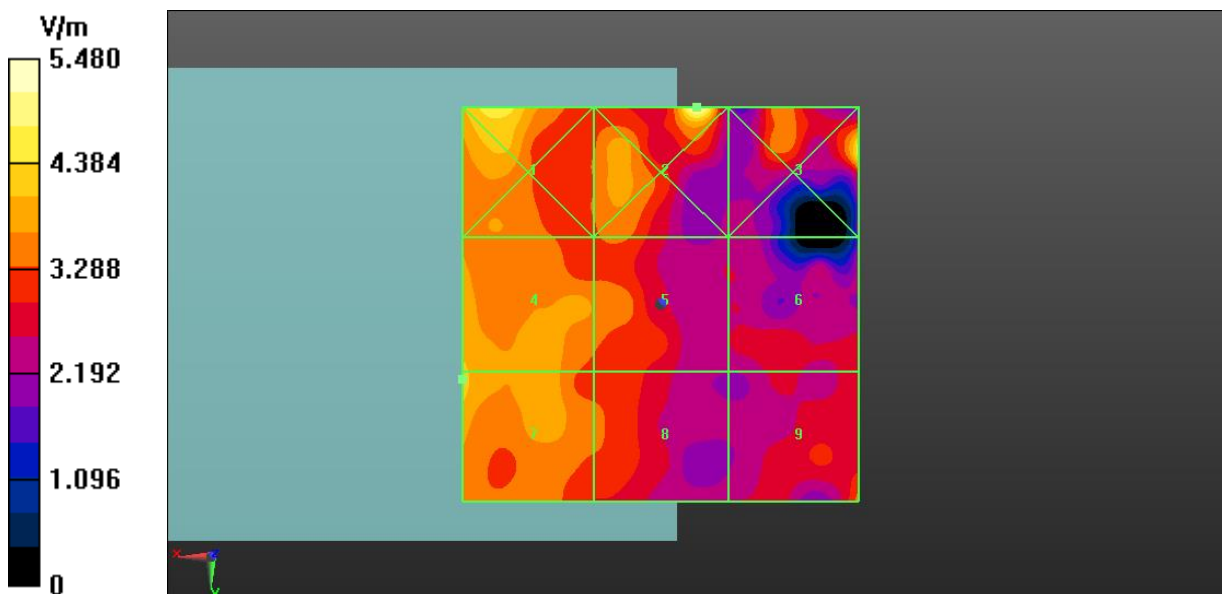


Fig A.16 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.3 - CDMA BC0 Middle

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.330 V/m; Power Drift = -0.06 dB

Applied MIF = 3.26 dB

RF audio interference level = 13.18 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 12.85 dBV/m	Grid 2 M4 12.75 dBV/m	Grid 3 M4 9.94 dBV/m
Grid 4 M4 13.15 dBV/m	Grid 5 M4 13.18 dBV/m	Grid 6 M4 12.94 dBV/m
Grid 7 M4 13.19 dBV/m	Grid 8 M4 12.24 dBV/m	Grid 9 M4 10.39 dBV/m

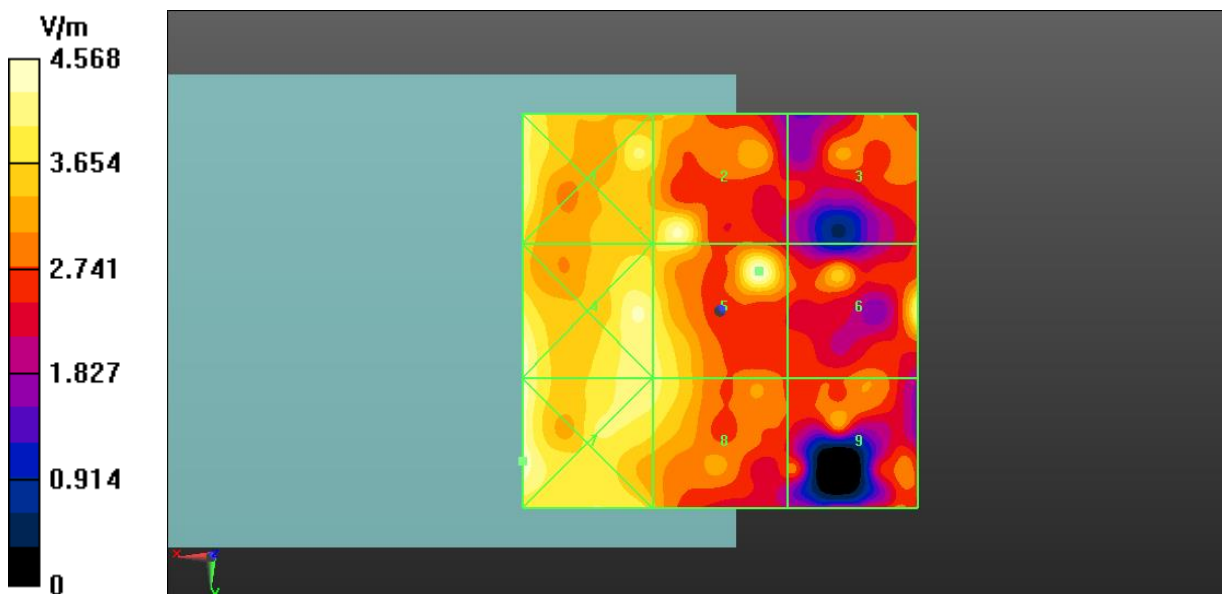


Fig A.17 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.3 - CDMA BC0 Low

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, CDMA (0) Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 2.575 V/m; Power Drift = 0.02 dB

Applied MIF = 3.26 dB

RF audio interference level = 13.36 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 12.53 dBV/m	Grid 2 M4 12.59 dBV/m	Grid 3 M4 11.83 dBV/m
Grid 4 M4 13.36 dBV/m	Grid 5 M4 11.23 dBV/m	Grid 6 M4 8.97 dBV/m
Grid 7 M4 19.21 dBV/m	Grid 8 M4 17.56 dBV/m	Grid 9 M4 19.21 dBV/m

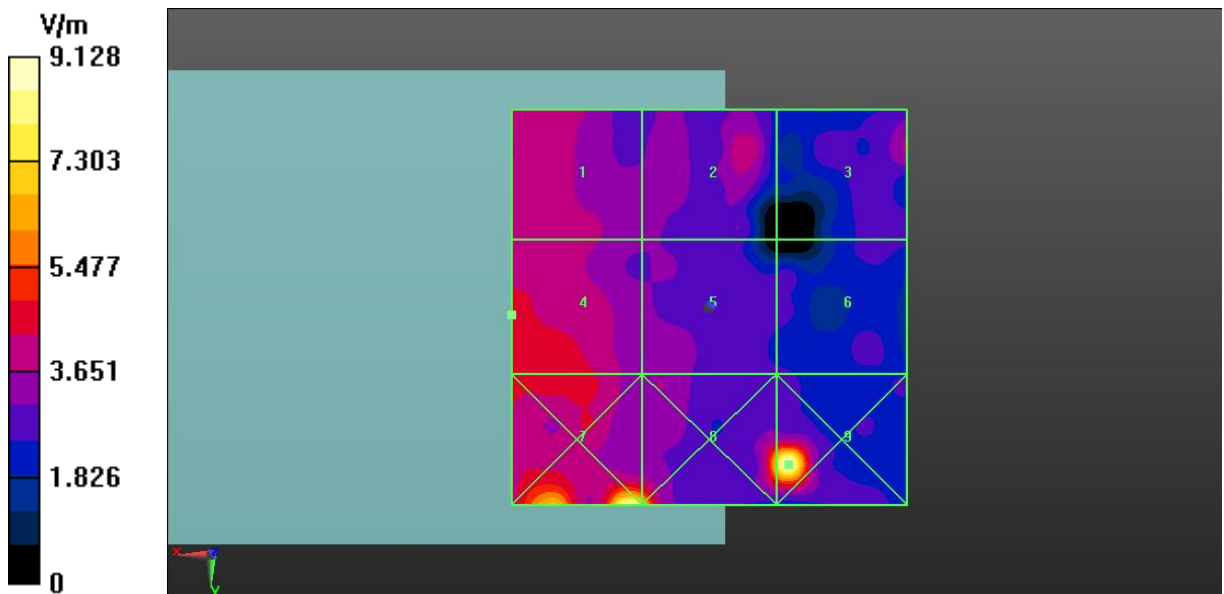


Fig A.18 HAC RF E-Field CDMA BC0

HAC RF E-Field Ant.2 - LTE-Band 41 High

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2680 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 8.592 V/m; Power Drift = 0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 19.72 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 23.91 dBV/m	Grid 2 M4 20.15 dBV/m	Grid 3 M4 19.72 dBV/m
Grid 4 M4 20.76 dBV/m	Grid 5 M4 17.35 dBV/m	Grid 6 M4 17.15 dBV/m
Grid 7 M4 18.5 dBV/m	Grid 8 M4 13.8 dBV/m	Grid 9 M4 12.89 dBV/m

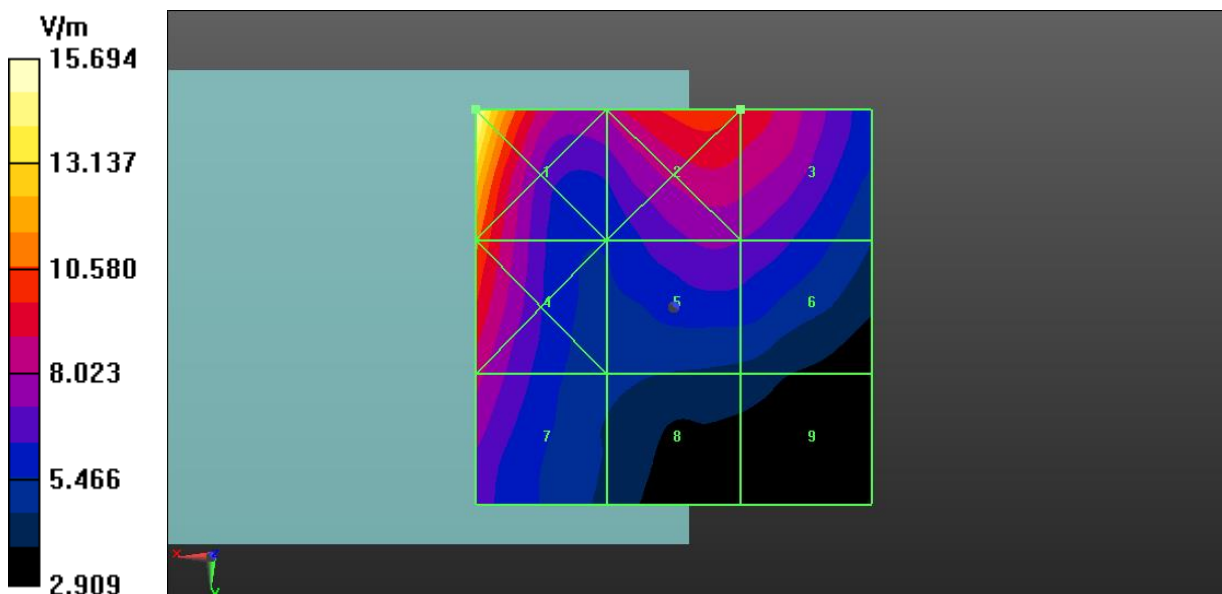


Fig A.19 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.2 - LTE-Band 41 Middle-1

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2636.5 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.121 V/m; Power Drift = 0.02 dB

Applied MIF = -1.44 dB

RF audio interference level = 21.24 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 25.44 dBV/m	Grid 2 M4 21.65 dBV/m	Grid 3 M4 21.24 dBV/m
Grid 4 M4 21.94 dBV/m	Grid 5 M4 18.01 dBV/m	Grid 6 M4 17.8 dBV/m
Grid 7 M4 19.84 dBV/m	Grid 8 M4 14.51 dBV/m	Grid 9 M4 12.31 dBV/m

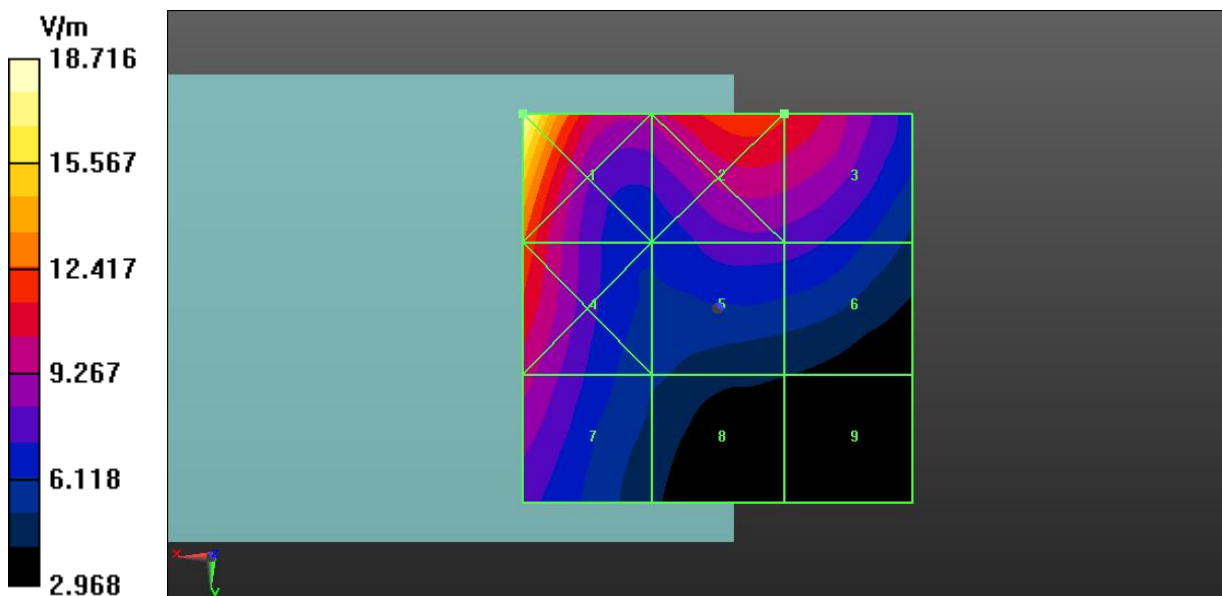


Fig A.20 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.2 - LTE-Band 41 Middle-2

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2593 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 9.357 V/m; Power Drift = 0.00 dB

Applied MIF = -1.44 dB

RF audio interference level = 22.04 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.33 dBV/m	Grid 2 M4 22.58 dBV/m	Grid 3 M4 22.04 dBV/m
Grid 4 M4 22.58 dBV/m	Grid 5 M4 18.43 dBV/m	Grid 6 M4 18.16 dBV/m
Grid 7 M4 20.56 dBV/m	Grid 8 M4 14.69 dBV/m	Grid 9 M4 14.08 dBV/m

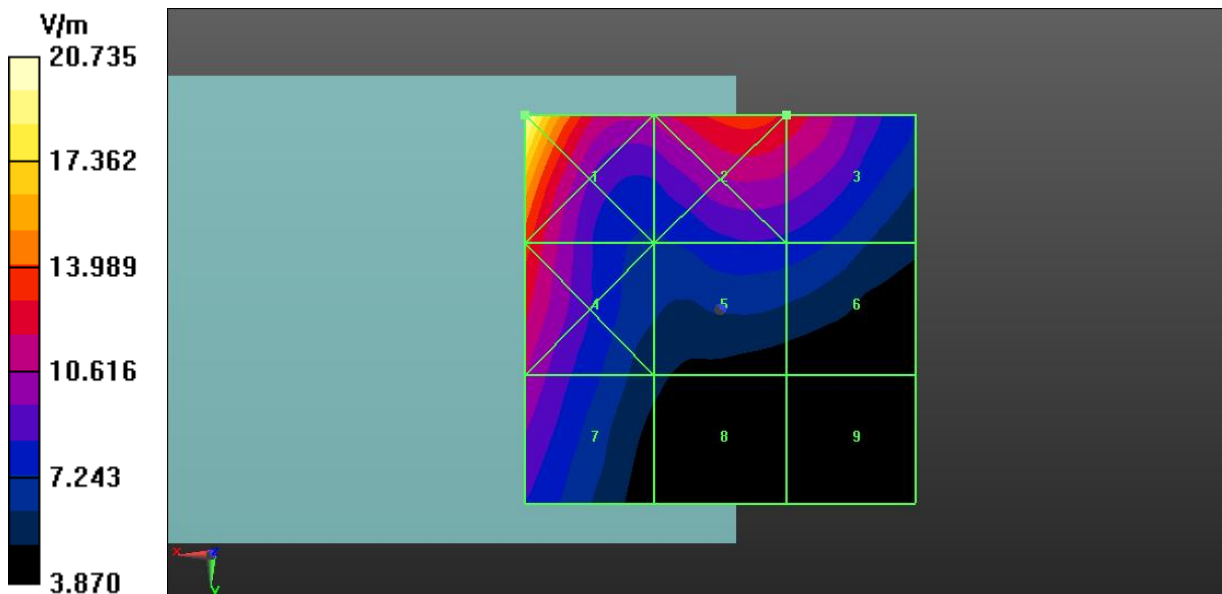


Fig A.21 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.2 - LTE-Band 41 Middle-3

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2549.5 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 11.12 V/m; Power Drift = 0.08 dB

Applied MIF = -1.44 dB

RF audio interference level = 22.67 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.7 dBV/m	Grid 2 M4 23.9 dBV/m	Grid 3 M4 23.43 dBV/m
Grid 4 M4 22.67 dBV/m	Grid 5 M4 19.96 dBV/m	Grid 6 M4 19.66 dBV/m
Grid 7 M4 20.42 dBV/m	Grid 8 M4 15.47 dBV/m	Grid 9 M4 16.41 dBV/m

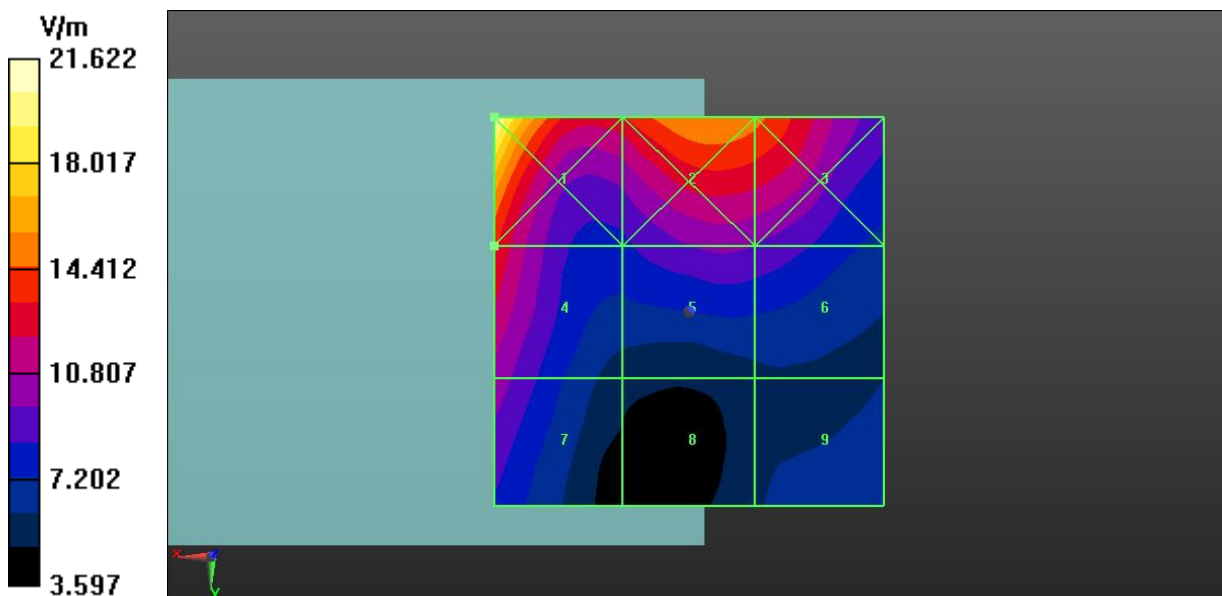


Fig A.22 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.2 - LTE-Band 41 Low

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2506 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 13.43 V/m; Power Drift = 0.01 dB

Applied MIF = -1.44 dB

RF audio interference level = 22.90 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 26.97 dBV/m	Grid 2 M4 24.67 dBV/m	Grid 3 M4 24.1 dBV/m
Grid 4 M4 22.9 dBV/m	Grid 5 M4 21.26 dBV/m	Grid 6 M4 21.1 dBV/m
Grid 7 M4 19.96 dBV/m	Grid 8 M4 17.77 dBV/m	Grid 9 M4 17.89 dBV/m

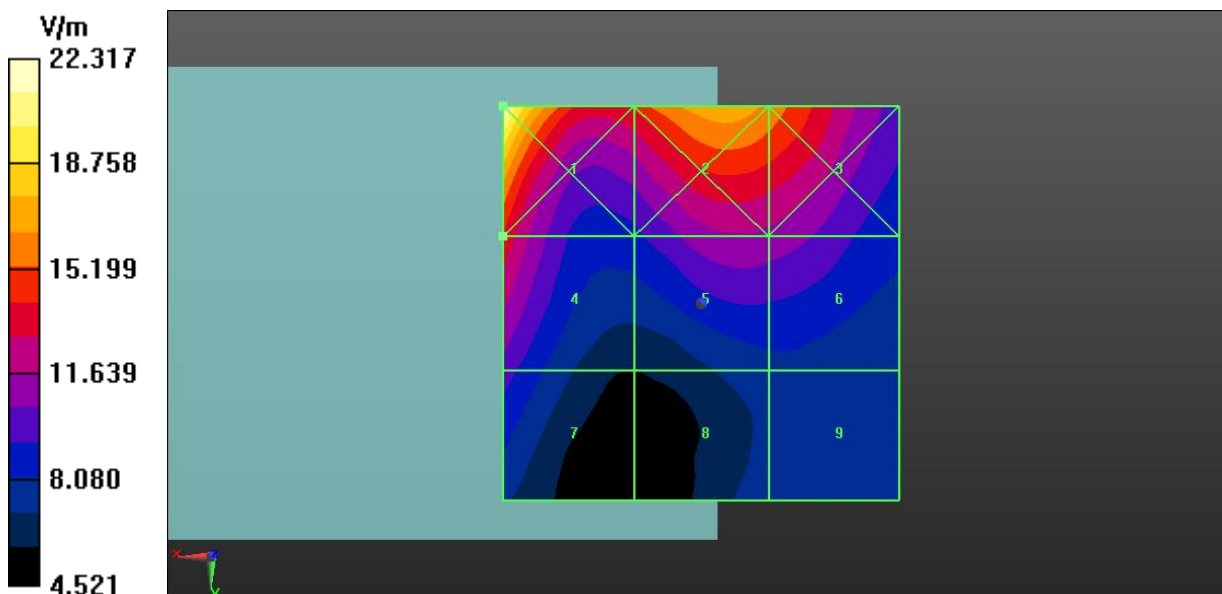


Fig A.23 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.4 - LTE-Band 41 High

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2680 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.992 V/m; Power Drift = -0.12 dB

Applied MIF = -1.44 dB

RF audio interference level = 11.80 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 13.07 dBV/m	Grid 2 M4 12.88 dBV/m	Grid 3 M4 12.24 dBV/m
Grid 4 M4 11.8 dBV/m	Grid 5 M4 11.67 dBV/m	Grid 6 M4 11.63 dBV/m
Grid 7 M4 11.65 dBV/m	Grid 8 M4 10.39 dBV/m	Grid 9 M4 10.28 dBV/m

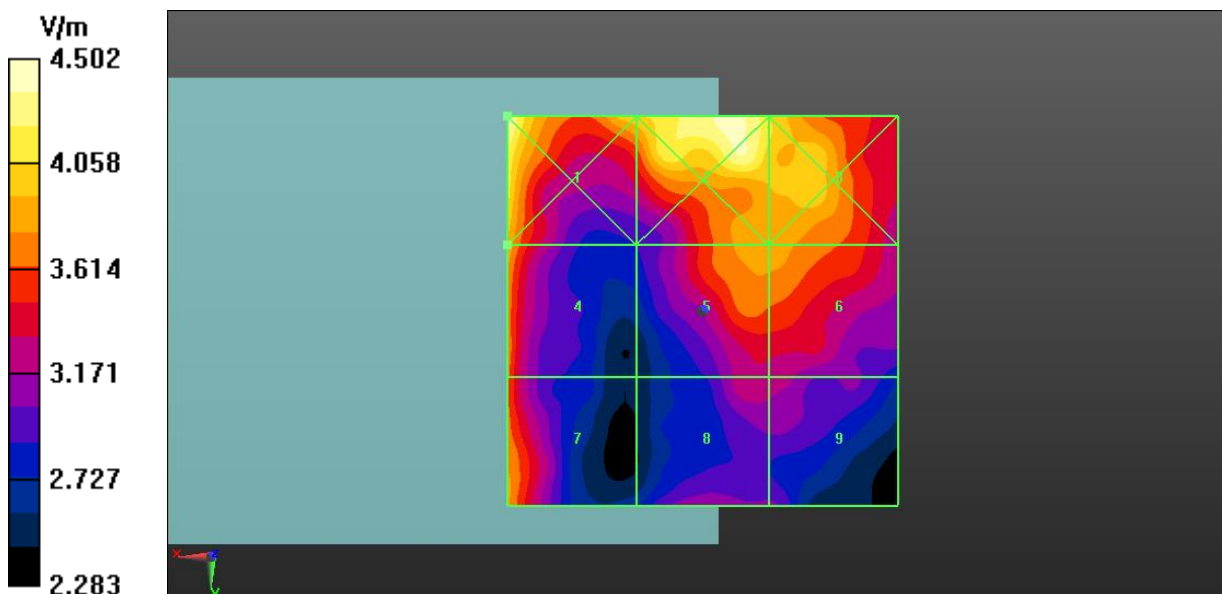


Fig A.24 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.4 - LTE-Band 41 Middle-1

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2636.5 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.567 V/m; Power Drift = -0.03 dB

Applied MIF = -1.44 dB

RF audio interference level = 12.38 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 13.38 dBV/m	Grid 2 M4 11.6 dBV/m	Grid 3 M4 10.92 dBV/m
Grid 4 M4 13.03 dBV/m	Grid 5 M4 11.48 dBV/m	Grid 6 M4 11.61 dBV/m
Grid 7 M4 12.94 dBV/m	Grid 8 M4 12.38 dBV/m	Grid 9 M4 12.36 dBV/m

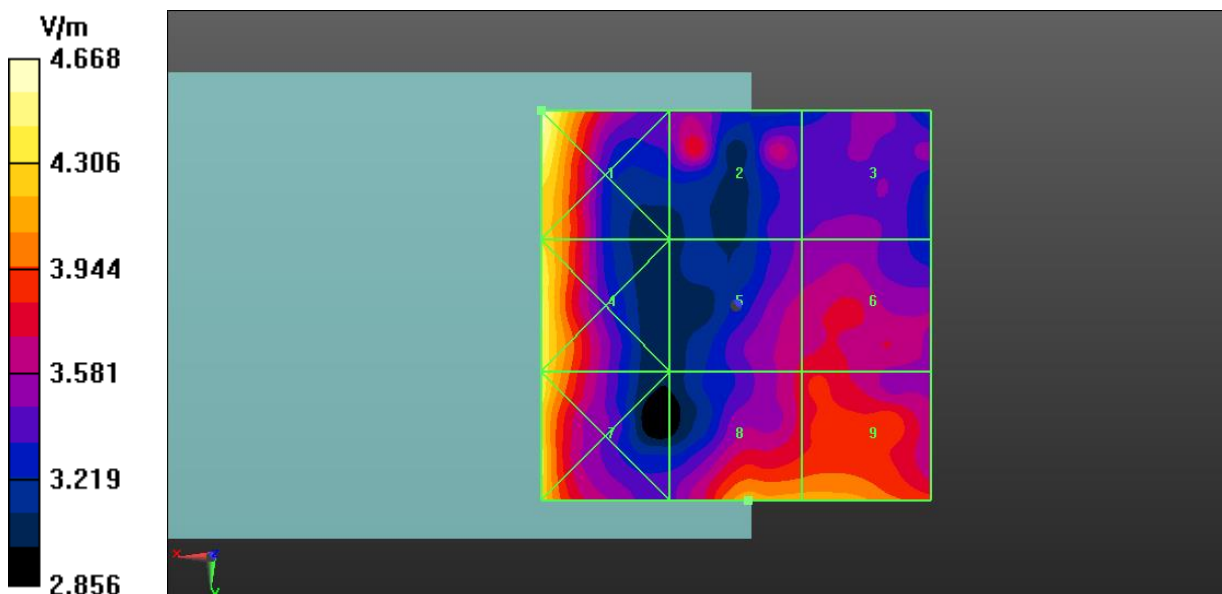


Fig A.25 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.4 - LTE-Band 41 Middle-2

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2593 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.375 V/m; Power Drift = -0.07 dB

Applied MIF = -1.44 dB

RF audio interference level = 13.43 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 12.71 dBV/m	Grid 2 M4 11.27 dBV/m	Grid 3 M4 11.11 dBV/m
Grid 4 M4 13.17 dBV/m	Grid 5 M4 13.43 dBV/m	Grid 6 M4 12.79 dBV/m
Grid 7 M4 14.15 dBV/m	Grid 8 M4 14.42 dBV/m	Grid 9 M4 13.67 dBV/m

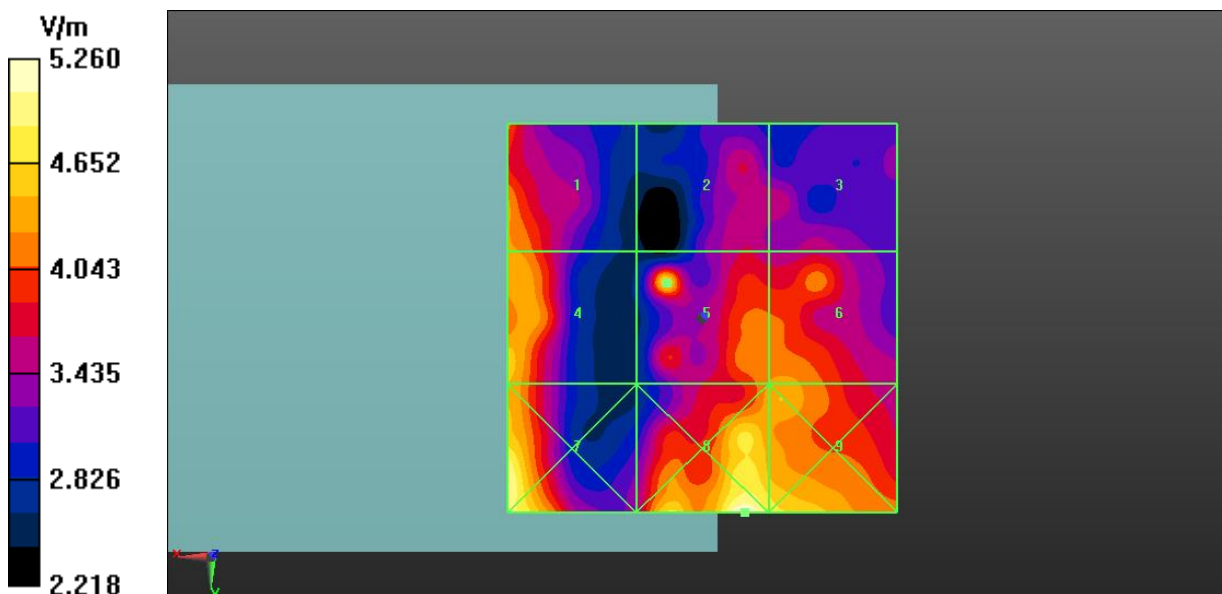


Fig A.26 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.4 - LTE-Band 41 Middle-3

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2549.5 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 5.622 V/m; Power Drift = -0.06 dB

Applied MIF = -1.44 dB

RF audio interference level = 14.98 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 13.87 dBV/m	Grid 2 M4 12.4 dBV/m	Grid 3 M4 13.08 dBV/m
Grid 4 M4 14.98 dBV/m	Grid 5 M4 14.52 dBV/m	Grid 6 M4 14.88 dBV/m
Grid 7 M4 16.09 dBV/m	Grid 8 M4 16.95 dBV/m	Grid 9 M4 16.95 dBV/m

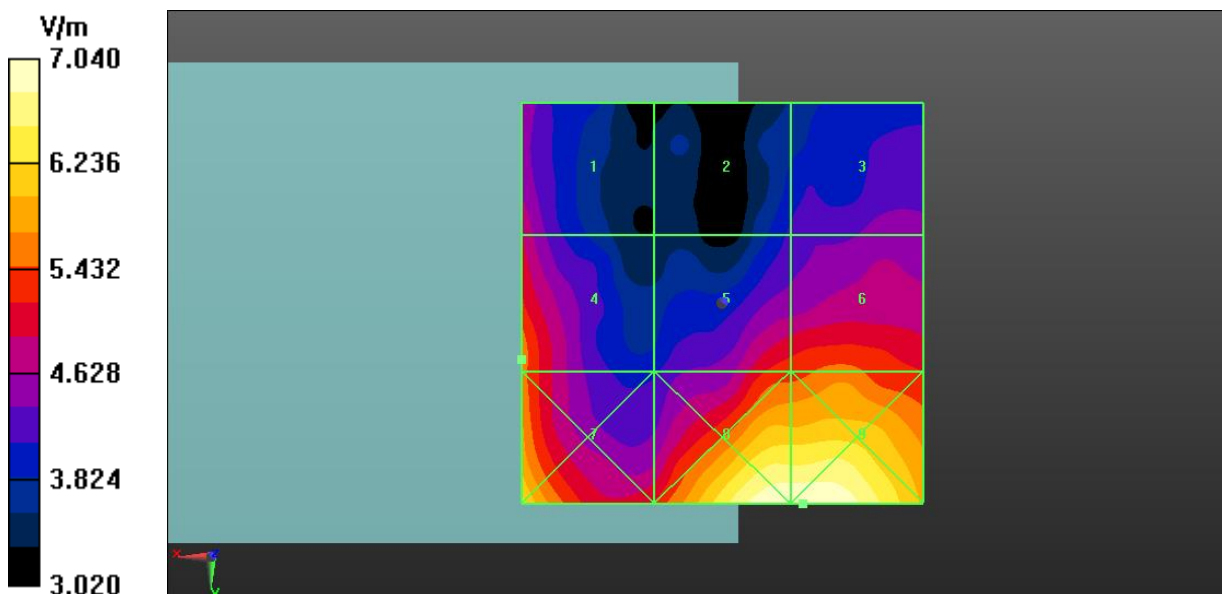


Fig A.27 HAC RF E-Field LTE-Band 41

HAC RF E-Field Ant.4 - LTE-Band 41 Low

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: UID 0, LTE_TDD Frequency: 2506 MHz Duty Cycle: 1:1.58

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device /Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 4.624 V/m; Power Drift = -0.09 dB

Applied MIF = -1.44 dB

RF audio interference level = 14.30 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 14.3 dBV/m	Grid 2 M4 13.29 dBV/m	Grid 3 M4 13.63 dBV/m
Grid 4 M4 14.25 dBV/m	Grid 5 M4 13.47 dBV/m	Grid 6 M4 13.52 dBV/m
Grid 7 M4 16.29 dBV/m	Grid 8 M4 16.56 dBV/m	Grid 9 M4 16.56 dBV/m

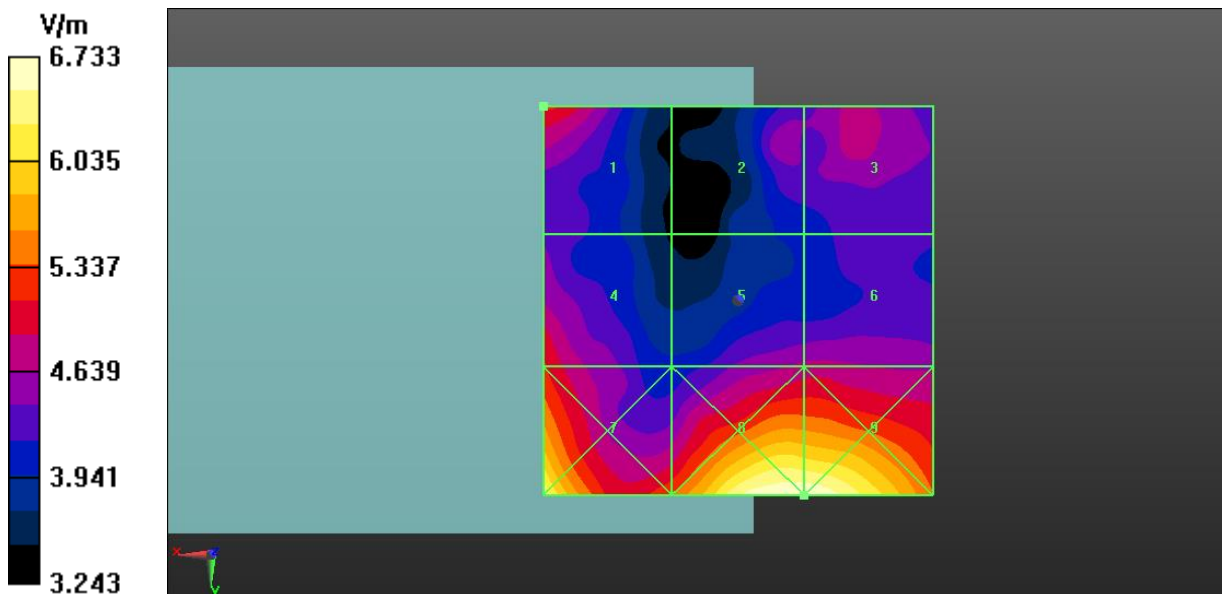


Fig A.28 HAC RF E-Field LTE-Band 41

ANNEX B: System Validation Result

835MHz

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - measurement distance from the probe sensor center to CD835 Dipole = 15mm

/Hearing Aid Compatibility Test (41x361x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 133.6 V/m; Power Drift = 0.09 dB


Applied MIF = 0.00 dB

RF audio interference level = 44.58 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3 43.76 dBV/m	Grid 2 M3 44.45 dBV/m	Grid 3 M3 44.19 dBV/m
Grid 4 M4 39.41 dBV/m	Grid 5 M4 39.76 dBV/m	Grid 6 M4 39.63 dBV/m
Grid 7 M3 43.93 dBV/m	Grid 8 M3 44.58 dBV/m	Grid 9 M3 44.32 dBV/m

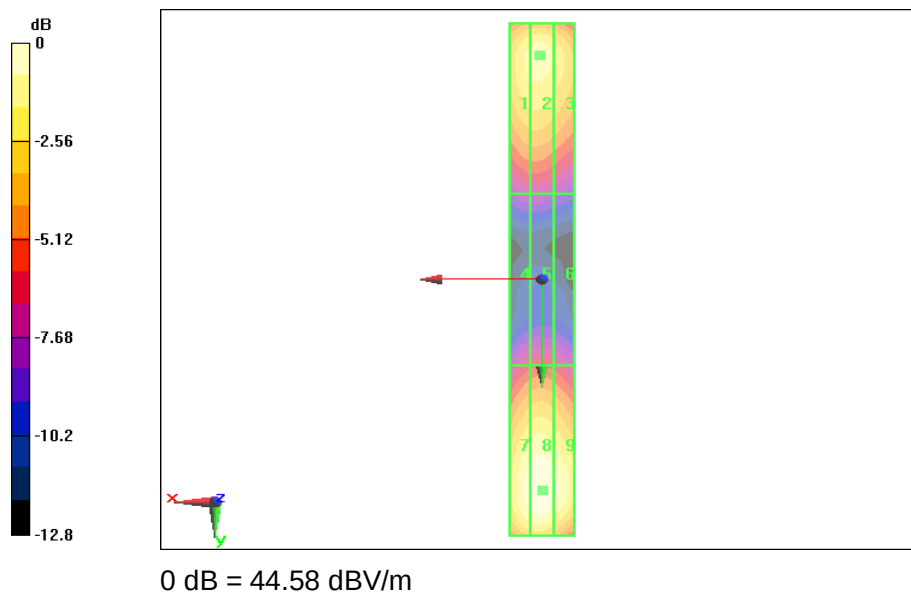

1880MHz

Date: 2023-11-01

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 15mm

/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 126.9 V/m; Power Drift = 0.12 dB


Applied MIF = 0.00 dB

RF audio interference level = 39.73 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2 39.11 dBV/m	Grid 2 M2 39.62 dBV/m	Grid 3 M2 39.44 dBV/m
Grid 4 M2 37.55 dBV/m	Grid 5 M2 38.19 dBV/m	Grid 6 M2 38.03 dBV/m
Grid 7 M2 39.24 dBV/m	Grid 8 M2 39.73 dB V/m	Grid 9 M2 39.58 dBV/m

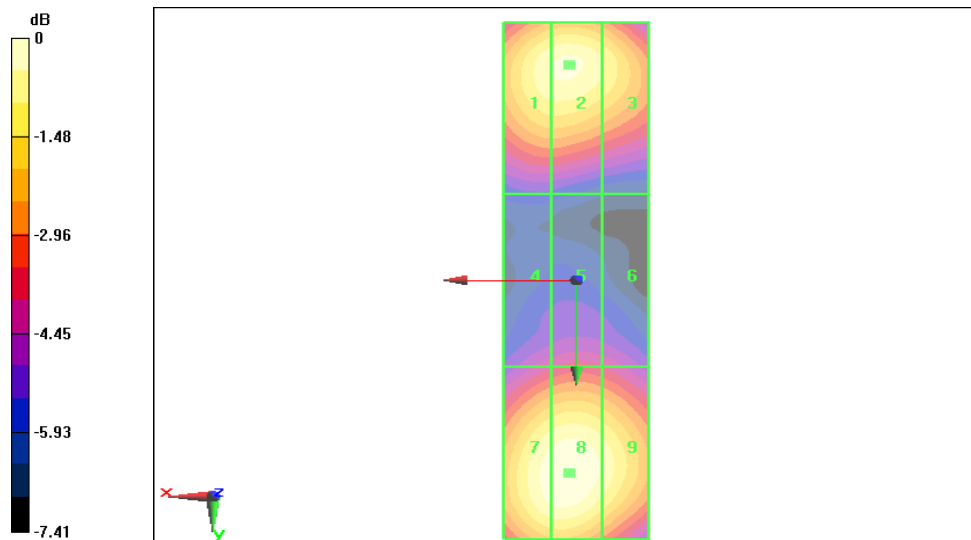

0 dB = 39.73 dBV/m

2600MHz

Date: 2023-11-02

Electronics: DAE4 Sn1527

Medium: Air

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EF3DV3 - SN4094 ConvF(1, 1, 1)

E Scan - measurement distance from the probe sensor center to CD2600 Dipole = 15mm

/Hearing Aid Compatibility Test (41x181x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 66.72 V/m; Power Drift = -0.03 dB


Applied MIF = 0.00 dB

RF audio interference level = 37.96 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2 37.39 dBV/m	Grid 2 M2 37.73 dBV/m	Grid 3 M2 37.58 dBV/m
Grid 4 M2 36.11 dBV/m	Grid 5 M2 36.35 dBV/m	Grid 6 M2 36.22 dBV/m
Grid 7 M2 37.66 dBV/m	Grid 8 M2 37.96 dB V/m	Grid 9 M2 37.81 dBV/m

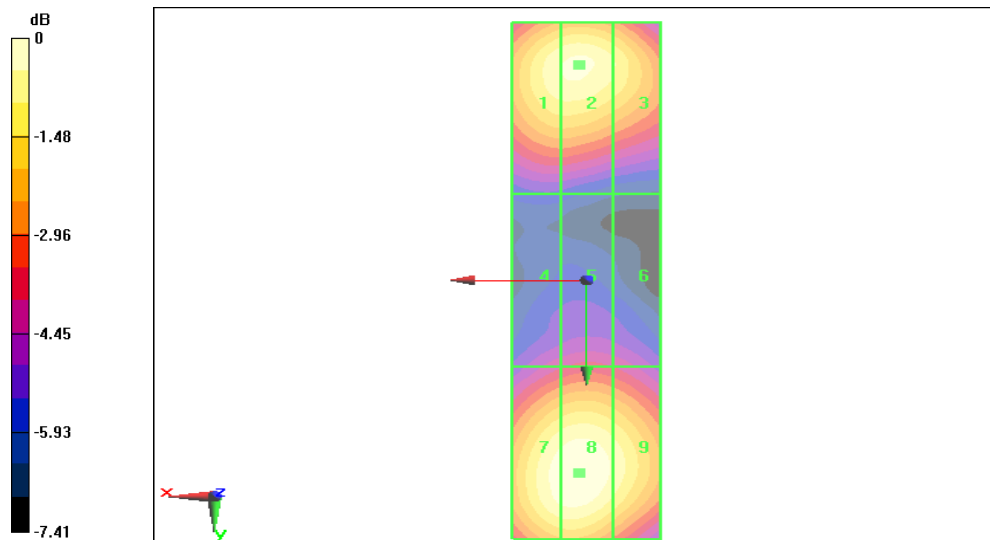

0 dB = 37.96 dBV/m

ANNEX C: Dipole Calibration Certificate

CD835V3

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TMC-SZ (Auden)**

Certificate No: **CD835V3-1165_May21**

CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1165**

Calibration procedure(s) **QA CAL-20.v7**
Calibration Procedure for Validation Sources in air

Calibration date: **May 18, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-291	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-291	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: B14394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 31b382 / 08327	09-Apr-21 (No. 217-03344)	Apr-22
Probe EF3DV3	SN: 4013	28-Dec-20 (No. EF3-4013_Dec20)	Dec-21
DAE4	SN: 781	23-Dec-20 (No. DAE4-781_Dec20)	Dec-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB424201B1	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-20)	In house check: Oct-23
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
RF generator R&S SMT-06	SN: 837633/005	10-Jan-19 (in house check Oct-20)	In house check: Oct-23
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Leif Krysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory. Issued: May 18, 2021

Certificate No: CD835V3-1165_May21

Page 1 of 5

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

References

- [1] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications
Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASYS Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 835 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	114.1 V/m = 41.15 dBV/m
Maximum measured above low end	100 mW input power	108.4 V/m = 40.70 dBV/m
Averaged maximum above arm	100 mW input power	111.3 V/m $\pm$ 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	17.5 dB	41.5 Ω - 8.8 j Ω
835 MHz	27.8 dB	53.2 Ω + 2.7 j Ω
880 MHz	17.0 dB	60.4 Ω - 11.8 j Ω
900 MHz	16.7 dB	51.8 Ω - 14.9 j Ω
945 MHz	24.9 dB	46.0 Ω + 3.7 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

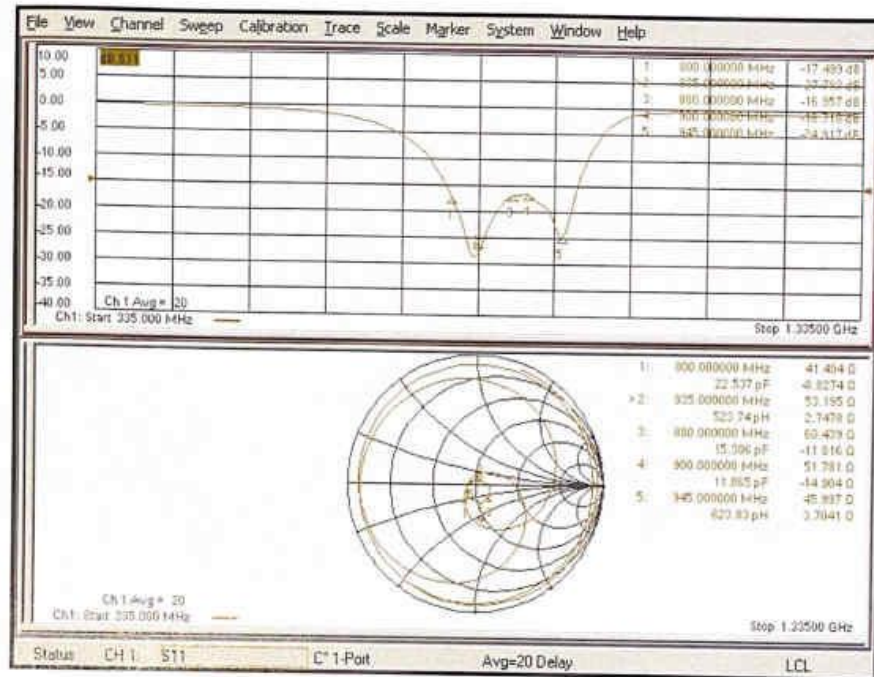

DASY5 E-field Result

Date: 18.05.2021

Test Laboratory: SPEAG Lab2

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1165

Communication System: UID 0 - CW ; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 835 MHz; Calibrated: 28.12.2020
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 23.12.2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 135.0 V/m; Power Drift = 0.01 dB


Applied MIF = 0.00 dB

RF audio interference level = 41.15 dBV/m

Emission category: M3

MIF scaled E-field

Grid 1 M3	Grid 2 M3	Grid 3 M3
40.65 dBV/m	40.7 dBV/m	40.35 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
35.83 dBV/m	35.86 dBV/m	35.57 dBV/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
41.07 dBV/m	41.15 dBV/m	40.84 dBV/m

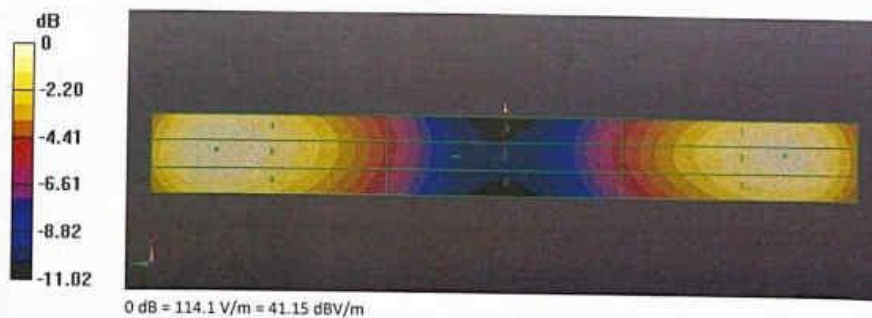

CD1880V3

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TMC-SZ (Auden)**

Certificate No: **CD1880V3-1149_May21**

CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1149**

Calibration procedure(s) **QA CAL-20.v7
Calibration Procedure for Validation Sources in air**

Calibration date: **May 18, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Probe EF3DV3	SN: 4013	28-Dec-20 (No. EF3-4013_Dec20)	Dec-21
DAE4	SN: 781	23-Dec-20 (No. DAE4-781_Dec20)	Dec-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-20)	In house check: Oct-23
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
RF generator R&S SMT-06	SN: 837633/005	10-Jan-19 (in house check Oct-20)	In house check: Oct-23
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by:	Name: Leif Klysner	Function: Laboratory Technician	Signature: 
----------------	---------------------------	--	--

Approved by:	Name: Katja Pokovic	Function: Technical Manager	Signature: 
--------------	----------------------------	------------------------------------	--

Issued: May 18, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD1880V3-1149_May21

Page 1 of 5

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

References

- [1] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications
Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	1880 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 1880 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	88.4 V/m = 38.93 dBV/m
Maximum measured above low end	100 mW input power	86.7 V/m = 38.76 dBV/m
Averaged maximum above arm	100 mW input power	87.5 V/m $\pm$ 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
1730 MHz	24.1 dB	54.4 Ω + 4.8 j Ω
1880 MHz	22.6 dB	54.8 Ω + 6.2 j Ω
1900 MHz	23.1 dB	56.3 Ω + 3.9 j Ω
1950 MHz	30.8 dB	52.7 Ω - 1.3 j Ω
2000 MHz	21.6 dB	44.8 Ω + 5.9 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

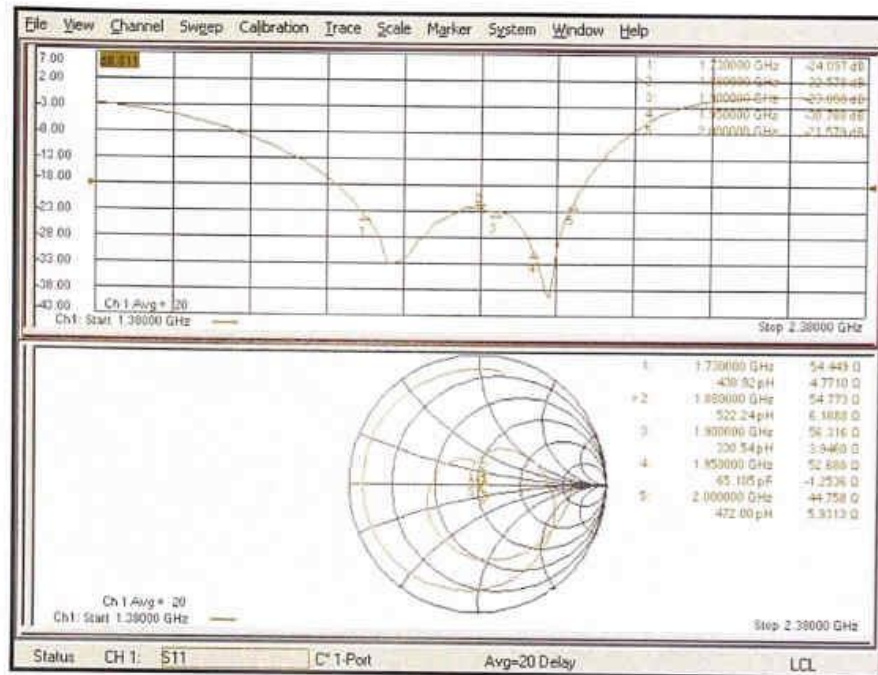

DASY5 E-field Result

Date: 18.05.2021

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1149

Communication System: UID 0 - CW ; Frequency: 1880 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 28.12.2020
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 23.12.2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 161.6 V/m; Power Drift = -0.01 dB



Applied MIF = 0.00 dB

RF audio interference level = 38.93 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.66 dBV/m	38.76 dBV/m	38.5 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
36.09 dBV/m	36.12 dBV/m	35.97 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.83 dBV/m	38.93 dBV/m	38.63 dBV/m

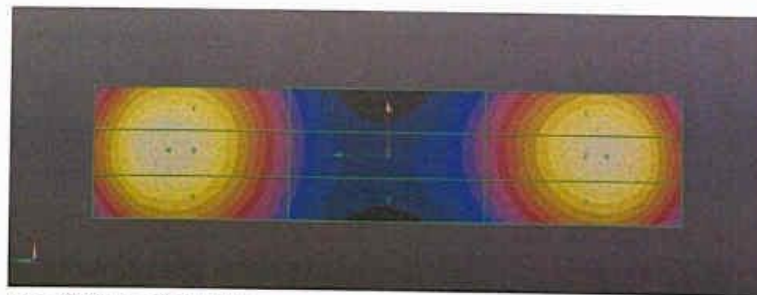

0 dB = 88.38 V/m = 38.93 dBV/m

CD2600V3

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TMC-SZ (Auden)**

Certificate No: **CD2600V3-1020_May21**

CALIBRATION CERTIFICATE

Object **CD2600V3 - SN: 1020**

Calibration procedure(s) **QA CAL-20.v7
Calibration Procedure for Validation Sources in air**

Calibration date: **May 18, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BHP394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Probe EF3DV3	SN: 4013	28-Dec-20 (No. EF3-4013_Dec20)	Dec-21
DAE4	SN: 781	23-Dec-20 (No. DAE4-781_Dec20)	Dec-21

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter Agilent 4419B	SN: GB42420191	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
Power sensor HP E4412A	SN: US38485102	05-Jan-10 (in house check Oct-20)	In house check: Oct-23
Power sensor HP 8482A	SN: US37295597	09-Oct-09 (in house check Oct-20)	In house check: Oct-23
RF generator R&S SMT-06	SN: 637633/005	10-Jan-19 (in house check Oct-20)	In house check: Oct-23
Network Analyzer Agilent E8358A	SN: US41060477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

	Name	Function	Signature
Calibrated by:	Leif Klysner	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: May 18, 2021

Certificate No: CD2600V3-1020_May21

Page 1 of 5

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

References

- [1] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications
Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASYS Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.4
Phantom	HAC Test Arch	
Distance Dipole Top - Probe Center	15 mm	
Scan resolution	dx, dy = 5 mm	
Frequency	2600 MHz $\pm$ 1 MHz	
Input power drift	< 0.05 dB	

Maximum Field values at 2600 MHz

E-field 15 mm above dipole surface	condition	Interpolated maximum
Maximum measured above high end	100 mW input power	85.3 V/m = 38.62 dBV/m
Maximum measured above low end	100 mW input power	83.2 V/m = 38.40 dBV/m
Averaged maximum above arm	100 mW input power	84.3 V/m $\pm$ 12.8 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters

Frequency	Return Loss	Impedance
2450 MHz	18.0 dB	42.7 Ω - 9.2 j Ω
2550 MHz	26.7 dB	45.9 Ω + 1.6 j Ω
2600 MHz	34.5 dB	49.3 Ω + 1.7 j Ω
2650 MHz	33.6 dB	52.1 Ω + 0.5 j Ω
2750 MHz	19.9 dB	50.7 Ω - 10.2 j Ω

3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

Impedance Measurement Plot

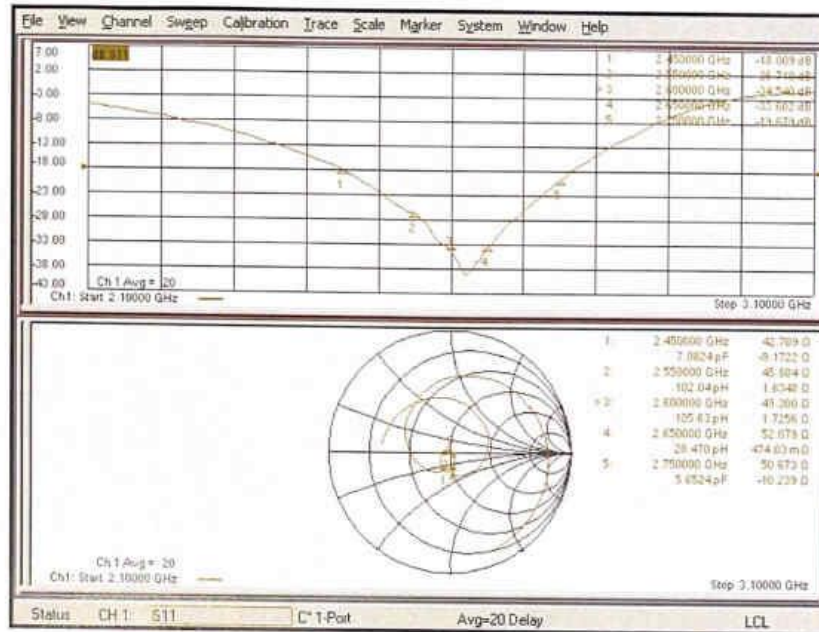

DASY5 E-field Result

Date: 18.05.2021

Test Laboratory: SPEAG Lab2

DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1020

Communication System: UID 0 - CW ; Frequency: 2600 MHz:

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 28.12.2020
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 23.12.2020
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole E-Field measurement @ 2600MHz/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 67.80 V/m; Power Drift = 0.00 dB


Applied MIF = 0.00 dB

RF audio interference level = 38.62 dBV/m

Emission category: M2

MIF scaled E-field

Grid 1 M2	Grid 2 M2	Grid 3 M2
38.28 dBV/m	38.4 dBV/m	38.16 dBV/m
Grid 4 M2	Grid 5 M2	Grid 6 M2
37.79 dBV/m	37.85 dBV/m	37.68 dBV/m
Grid 7 M2	Grid 8 M2	Grid 9 M2
38.51 dBV/m	38.62 dBV/m	38.37 dBV/m

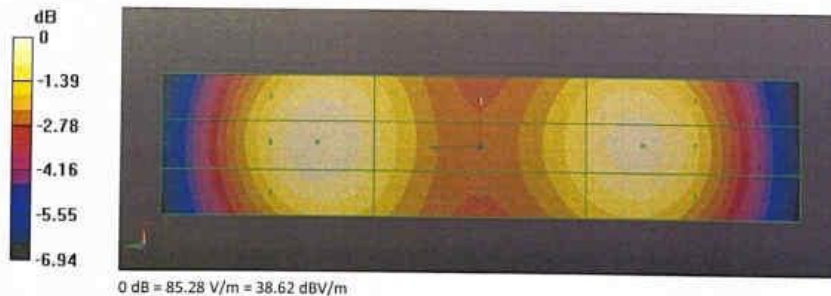

Certificate No: CD2600V3-1020_May21

Page 5 of 5

ANNEX D: Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SAICT**
Shenzhen

Certificate No. **EF-4094_Aug23**

CALIBRATION CERTIFICATE

Object **EF3DV3 - SN:4094**

Calibration procedure(s) **QA CAL-02.v9, QA CAL-25.v8**
Calibration procedure for E-field probes optimized for close near field
evaluations in air

Calibration date **August 10, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
Power sensor NRP-Z91	SN: 103245	30-Mar-23 (No. 217-03805)	Mar-24
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03809)	Mar-24
DAE4	SN: 789	03-Jan-23 (No. DAE4-789_Jan23)	Jan-24
Reference Probe ER3DV6	SN: 2328	06-Oct-22 (No. ER3-2328_Oct22)	Oct-23

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Jeffrey Katzman	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: August 10, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
E _n	incident E-field orientation normal to probe axis
E _p	incident E-field orientation parallel to probe axis
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- CTIA Test Plan for Hearing Aid Compatibility, Rev 3.1.1, May 2017

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ for XY sensors and $\theta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz in R22 waveguide).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart).
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EF3DV3 - SN:4094

August 10, 2023

Parameters of Probe: EF3DV3 - SN:4094

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu V/(V/m)^2$)	1.01	1.05	1.85	$\pm 10.1\%$
DCP (mV) ^B	106.0	102.0	103.5	$\pm 4.7\%$

Calibration Results for Frequency Response (30 MHz – 5.8 GHz)

Frequency MHz	Target E-field (En) V/m	Measured E-field (En) V/m	Deviation E-field (En)	Target E-field (Ep) V/m	Measured E-field (Ep) V/m	Deviation E-field (Ep)	Unc (k = 2)
30	77.1	76.9	-0.2%	77.2	77.7	0.7%	$\pm 5.1\%$
100	76.9	78.0	1.4%	77.0	78.1	1.4%	$\pm 5.1\%$
450	77.2	78.4	1.5%	76.8	77.9	1.4%	$\pm 5.1\%$
600	77.1	77.9	1.0%	77.2	77.8	0.8%	$\pm 5.1\%$
750	77.2	77.6	0.6%	77.2	77.5	0.4%	$\pm 5.1\%$
1800	143.1	140.1	-2.2%	143.2	140.2	-2.1%	$\pm 5.1\%$
2000	134.9	129.5	-4.0%	134.8	129.3	-4.0%	$\pm 5.1\%$
2200	127.5	124.4	-2.4%	127.7	125.8	-1.5%	$\pm 5.1\%$
2500	125.5	120.2	-4.2%	125.5	121.2	-3.4%	$\pm 5.1\%$
3000	79.3	76.0	-4.1%	79.3	77.2	-2.7%	$\pm 5.1\%$
3500	256.2	255.4	-0.3%	256.0	252.9	-1.2%	$\pm 5.1\%$
3700	249.6	244.1	-2.2%	249.7	242.9	-2.7%	$\pm 5.1\%$
5200	50.7	50.6	-0.3%	50.8	51.1	0.8%	$\pm 5.1\%$
5500	49.6	48.7	-1.8%	49.6	49.1	-1.0%	$\pm 5.1\%$
5800	48.9	47.9	-2.0%	48.9	47.6	-2.6%	$\pm 5.1\%$

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Linearization parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EF3DV3 - SN:4094

August 10, 2023

Parameters of Probe: EF3DV3 - SN:4094

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Max dev.	Max Unc ^E k = 2
0	CW	X	0.00	0.00	1.00	0.00	153.1	$\pm 2.7\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		152.7		
		Z	0.00	0.00	1.00		127.1		
10352	Pulse Waveform (200Hz, 10%)	X	2.52	64.62	8.74	10.00	60.0	$\pm 3.3\%$	$\pm 9.6\%$
		Y	2.43	64.72	8.76		60.0		
		Z	2.54	64.89	8.96		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	1.29	62.39	6.69	6.99	80.0	$\pm 1.1\%$	$\pm 9.6\%$
		Y	1.24	62.47	6.70		80.0		
		Z	1.23	62.42	6.80		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	24.00	80.00	11.00	3.98	95.0	$\pm 1.1\%$	$\pm 9.6\%$
		Y	22.00	80.00	11.00		95.0		
		Z	22.00	80.00	11.00		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	0.31	60.15	3.79	2.22	120.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	0.37	60.75	4.00		120.0		
		Z	0.27	60.00	3.82		120.0		
10387	QPSK Waveform, 1 MHz	X	0.72	69.10	15.26	1.00	150.0	$\pm 3.3\%$	$\pm 9.6\%$
		Y	1.05	71.53	16.10		150.0		
		Z	1.17	75.01	18.10		150.0		
10388	QPSK Waveform, 10 MHz	X	1.55	68.82	15.27	0.00	150.0	$\pm 1.2\%$	$\pm 9.6\%$
		Y	1.70	68.81	15.69		150.0		
		Z	1.76	70.21	16.41		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.98	67.65	17.49	3.01	150.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	1.86	66.61	17.34		150.0		
		Z	1.67	65.01	16.62		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.86	66.98	15.51	0.00	150.0	$\pm 2.2\%$	$\pm 9.6\%$
		Y	3.00	66.89	15.62		150.0		
		Z	2.99	67.30	15.87		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.80	66.48	15.52	0.00	150.0	$\pm 3.7\%$	$\pm 9.6\%$
		Y	4.03	66.35	15.69		150.0		
		Z	3.96	66.58	15.79		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^B Linearization parameter uncertainty for maximum specified field strength.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EF3DV3 - SN:4094

August 10, 2023

Parameters of Probe: EF3DV3 - SN:4094**Sensor Frequency Model Parameters**

	Sensor X	Sensor Y	Sensor Z
Frequency Corr. (LF)	-0.28	-0.17	10.96
Frequency Corr. (HF)	2.82	2.82	2.82

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $ms V^{-2}$	T2 $ms V^{-1}$	T3 ms	T4 V^{-2}	T5 V^{-1}	T6
x	9.9	62.18	33.37	5.87	0.00	4.96	0.64	0.00	1.00
y	12.8	82.36	35.07	5.66	0.00	4.96	0.39	0.00	1.00
z	11.6	73.13	34.05	4.71	0.00	4.96	0.00	0.03	1.00


Other Probe Parameters

Sensor Arrangement	Rectangular
Connector Angle	-148.8°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	12 mm
Tip Length	25 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	1.5 mm
Probe Tip to Sensor Y Calibration Point	1.5 mm
Probe Tip to Sensor Z Calibration Point	1.5 mm


EF3DV3 - SN:4094

August 10, 2023

Receiving Pattern (ϕ), $\theta = 0^\circ$

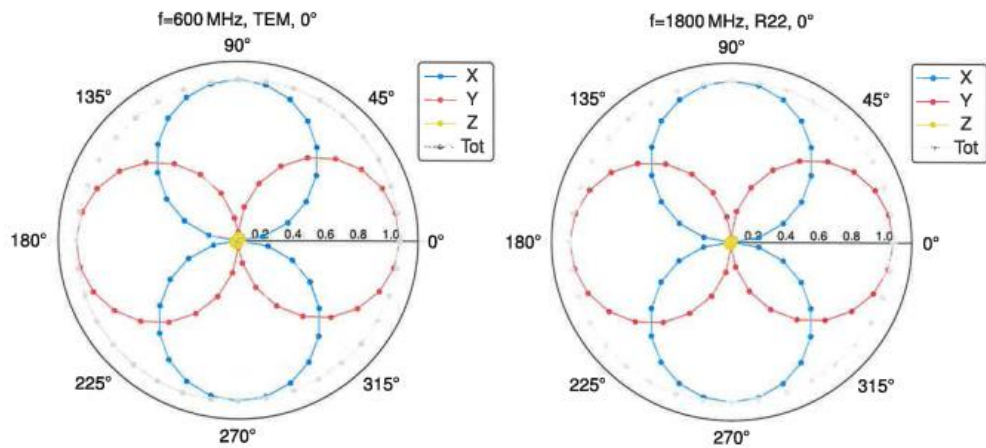


Receiving Pattern (ϕ), $\theta = 90^\circ$

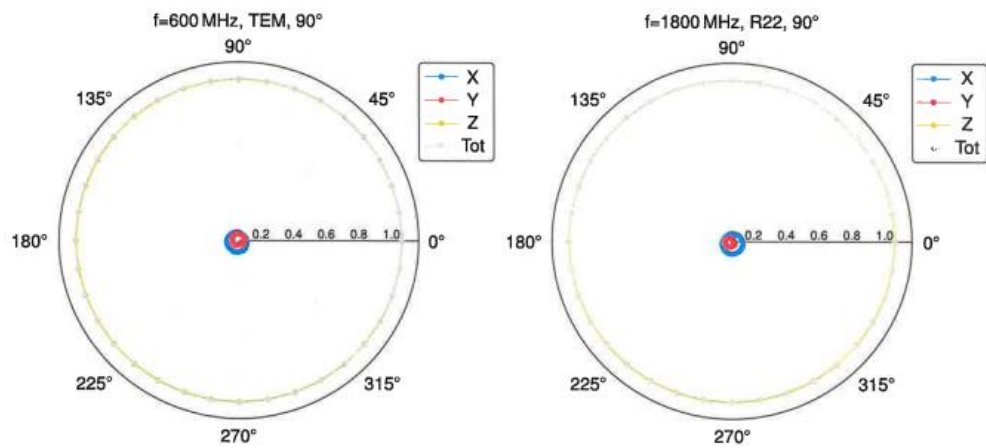


EF3DV3 - SN:4094

August 10, 2023

Receiving Pattern (ϕ), $\theta = 0^\circ$

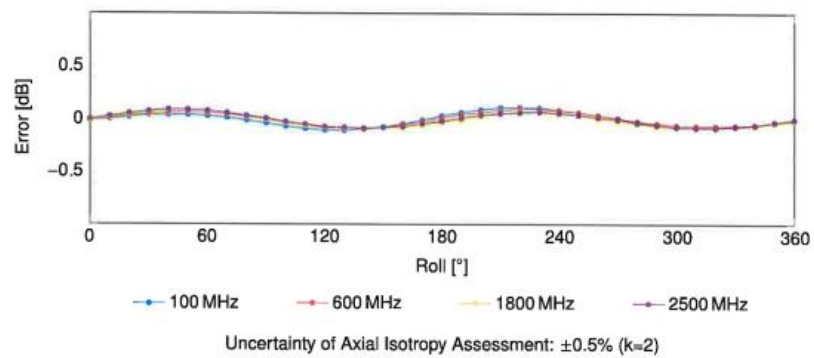


Receiving Pattern (ϕ), $\theta = 90^\circ$

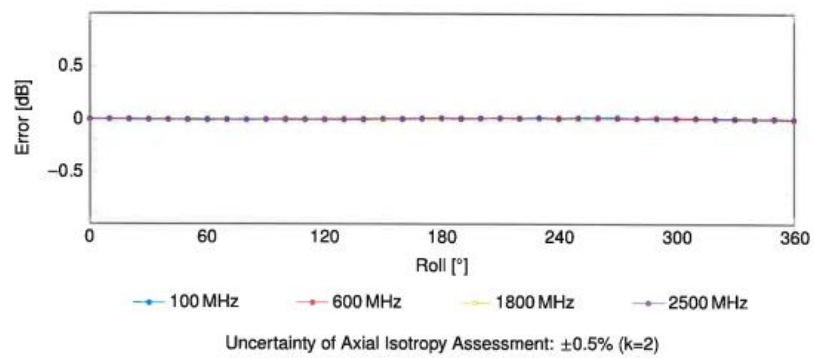


EF3DV3 - SN:4094

August 10, 2023

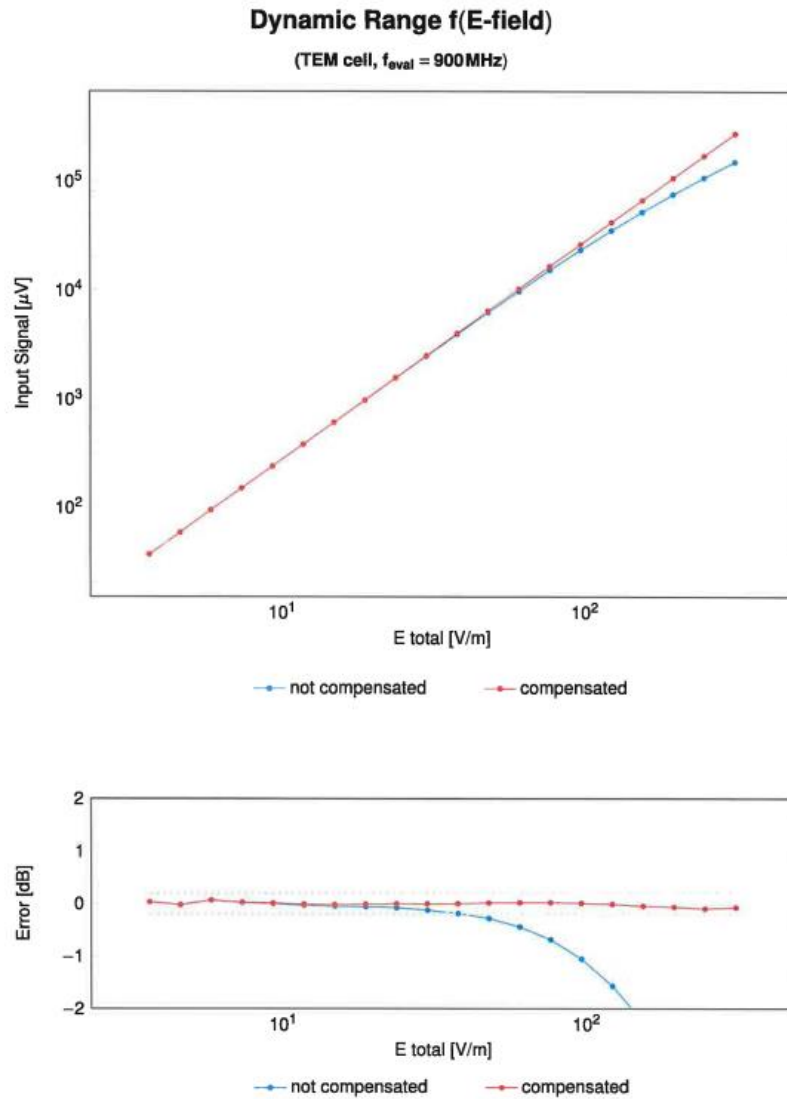

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

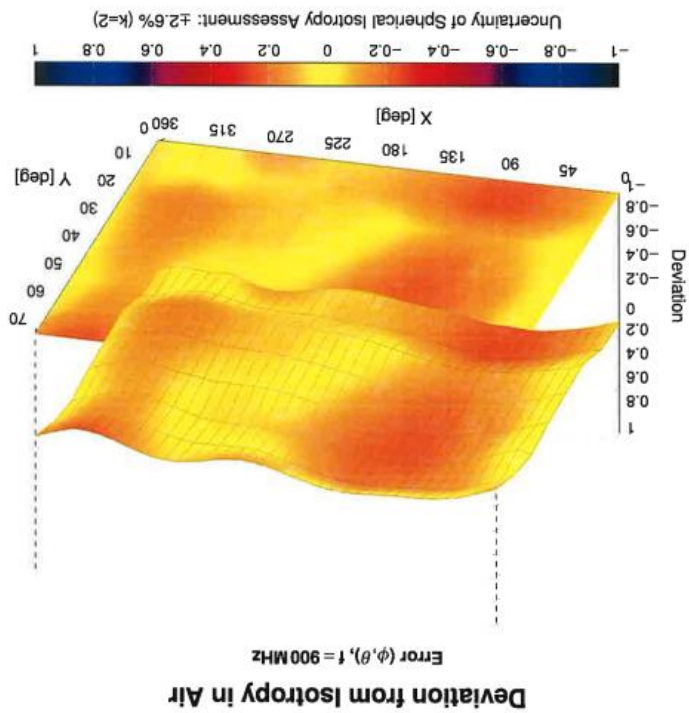

EF3DV3 - SN:4094

August 10, 2023

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
0		CW	CW	0.00	±4.7
10010	CAB	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	CAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAF	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAH	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6

Certificate No: EF-4094_Aug23

Page 10 of 21

EF3DV3 - SN:4094

August 10, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^E k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	AAF	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAH	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAJ	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	CAH	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAH	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	AAE	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	AAF	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	AAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAD	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	CAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAD	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAD	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10197	CAD	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10198	CAD	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10219	CAD	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	CAD	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAD	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10222	CAD	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

Certificate No: EF-4094_Aug23

Page 11 of 21

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ⁵ K = 2
10225	CAC	UMTS-FDD (HS-PA+)	WCDMA	5.97	±9.6
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8, 10)	WCDMA	4.87	±9.6
10275	CAC	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8, 4)	WCDMA	3.96	±9.6
10277	CAH	PHS (QPSK)	PHS	11.81	±9.6
10278	CAH	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.6
10279	CAH	PHS (QPSK, BW 884 MHz, Roll-off 0.38)	PHS	12.18	±9.6
10290	AAB	CDMA2000, RC1, SO5, Full Rate	CDMA2000	3.91	±9.6
10291	AAB	CDMA2000, RC3, SO5, Full Rate	CDMA2000	3.46	±9.6
10292	AAB	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	AAB	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 ft.	CDMA2000	12.49	±9.6
10297	AAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	AAE	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	AAA	IEEE 802.16e WIMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WIMAX	12.03	±9.6
10302	AAA	IEEE 802.16e WIMAX (29:18, 5 ms, 10 MHz, QPSK, 3 CTRL symbols)	WIMAX	12.57	±9.6
10303	AAA	IEEE 802.16e WIMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	12.52	±9.6
10304	AAA	IEEE 802.16e WIMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	11.86	±9.6
10305	AAA	IEEE 802.16e WIMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	15.24	±9.6
10306	AAA	IEEE 802.16e WIMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC, 18 symbols)	WIMAX	14.67	±9.6