

TEST REPORT

Product Name: Label Maker
FCC ID: 2A9RA-PM220
Trademark: Nelko
Model Number: PM220
Prepared For: ZHUHAI NELKO TECHNOLOGY CO.,LTD.
Address: RM 325, 3/F, FORMING WORKSHOP (BLDG A), NO. 8, PINGDONG 2ND ROAD, NANPING, ZHUHAI, GUANGDONG, China
Manufacturer: Zhongshan Polono Electronic Technology Co., Ltd.
Address: One of the second floor, Building A, No. 138, Tanshen South Road, Tanzhou Town, Zhongshan City, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 29, 2024
Sample tested Date: Mar. 29, 2024 to Apr. 08, 2024
Issue Date: Apr. 08, 2024
Report No.: CTB240408041RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

| Test Report Declaration | Page |
|---|-----------|
| 1. VERSION..... | 3 |
| 2. TEST SUMMARY | 4 |
| 3. MEASUREMENT UNCERTAINTY | 5 |
| 4. PRODUCT INFORMATION AND TEST SETUP | 6 |
| 4.1 Product Information | 6 |
| 4.2 Test Setup Configuration..... | 6 |
| 4.3 Support Equipment..... | 6 |
| 4.4 Channel List | 7 |
| 4.5 Test Mode | 7 |
| 4.6 Test Environment | 7 |
| 5. TEST FACILITY AND TEST INSTRUMENT USED | 8 |
| 5.1 Test Facility | 8 |
| 5.2 Test Instrument Used | 8 |
| 6. AC POWER LINE CONDUCTED EMISSION | 10 |
| 6.1 Block Diagram Of Test Setup..... | 10 |
| 6.2 Limit..... | 10 |
| 6.3 Test procedure | 10 |
| 6.4 Test Result | 12 |
| 7. RADIATED SPURIOUS EMISSION | 14 |
| 7.1 Block Diagram Of Test Setup..... | 14 |
| 7.2 Limit..... | 14 |
| 7.3 Test procedure | 15 |
| 7.4 Test Result | 16 |
| 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS | 23 |
| 8.1 Block Diagram Of Test Setup..... | 23 |
| 8.2 Limit..... | 23 |
| 8.3 Test procedure | 23 |
| 8.4 Test Result | 24 |
| 9. CONDUCTED OUTPUT POWER..... | 26 |
| 9.1 Block Diagram Of Test Setup..... | 26 |
| 9.2 Limit..... | 26 |
| 9.3 Test procedure | 26 |
| 9.4 Test Result | 27 |
| 10. 6DB OCCUPIED BANDWIDTH..... | 29 |
| 10.1 Block Diagram Of Test Setup..... | 29 |
| 10.2 Limit..... | 29 |
| 10.3 Test procedure | 29 |
| 10.4 Test Result | 29 |
| 11. POWER SPECTRAL DENSITY..... | 31 |
| 11.1 Block Diagram Of Test Setup..... | 31 |
| 11.2 Limit..... | 31 |
| 11.3 Test procedure | 31 |
| 11.4 Test Result | 31 |
| 12. ANTENNA REQUIREMENT | 33 |
| 13. EUT TEST SETUP PHOTOGRAPHS..... | 34 |

(Note: N/A means not applicable)

1. VERSION

| Report No. | Issue Date | Description | Approved |
|-----------------|---------------|-------------|----------|
| CTB240408041RFX | Apr. 08, 2024 | Original | Valid |

2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item | Test Requirement | Test method | Result |
|--|--|--|--------|
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Radiated Spurious emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |
| Band edge and RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a) | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(3) | ANSI C63.10-2013 | PASS |
| Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(2) | ANSI C63.10-2013 | PASS |
| Power Spectral Density | 47 CFR Part 15 Subpart C Section 15.247 (e) | ANSI C63.10-2013/ KDB 558074 D01v05r02 | PASS |
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (b) | / | PASS |

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Item | Uncertainty |
|---|--------------------|
| Occupancy bandwidth | 54.3kHz |
| Conducted output power Above 1G | 0.9dB |
| Conducted output power below 1G | 0.9dB |
| Power Spectral Density , Conduction | 0.9dB |
| Conduction spurious emissions | 2.0dB |
| Out of band emission | 2.0dB |
| 3m chamber Radiated spurious emission(9K-30MHz) | 4.8dB |
| 3m chamber Radiated spurious emission(30MHz-1GHz) | 4.6dB |
| 3m chamber Radiated spurious emission(1GHz-18GHz) | 5.1dB |
| 3m chamber Radiated spurious emission(18GHz-40GHz) | 3.4dB |
| humidity uncertainty | 5.5% |
| Temperature uncertainty | 0.63°C |
| frequency | 1×10 ⁻⁷ |
| Conducted Emission (150KHz-30MHz) | 3.2 dB |
| Radiated Emission(30MHz ~ 1000MHz) | 4.8 dB |
| Radiated Emission(1GHz ~6GHz) | 4.9 dB |

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): PM220
 Model Description: N/A
 Bluetooth Version: Bluetooth 5.0
 Hardware Version: V1.00
 Software Version: V1.00

Operation Frequency: Bluetooth: 2402-2480MHz
 Max. RF output power: Bluetooth: -1.93dBm
 Type of Modulation: Bluetooth: GFSK
 Antenna installation: Bluetooth: PCB antenna
 Antenna Gain: Bluetooth: -0.93dBi
 Ratings: DC 5V charging from adapter
 DC 7.4V from battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| 1 | Adapter | JIYIN | JY-05100C | / | / |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

| CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) | CH No. | Frequency (MHz) |
|--------|-----------------|--------|-----------------|--------|-----------------|--------|-----------------|
| 0 | 2402 | 1 | 2404 | 2 | 2406 | 3 | 2408 |
| 4 | 2410 | 5 | 2412 | 6 | 2414 | 7 | 2416 |
| 8 | 2418 | 9 | 2420 | 10 | 2422 | 11 | 2424 |
| 12 | 2426 | 13 | 2428 | 14 | 2430 | 15 | 2432 |
| 16 | 2434 | 17 | 2436 | 18 | 2438 | 19 | 2440 |
| 20 | 2442 | 21 | 2444 | 22 | 2446 | 23 | 2448 |
| 24 | 2450 | 25 | 2452 | 26 | 2454 | 27 | 2456 |
| 28 | 2458 | 29 | 2460 | 30 | 2462 | 31 | 2464 |
| 32 | 2466 | 33 | 2468 | 34 | 2470 | 35 | 2472 |
| 36 | 2474 | 37 | 2476 | 38 | 2478 | 39 | 2480 |

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

| Test mode | Low channel | Middle channel | High channel |
|------------------------|-------------|----------------|--------------|
| Transmitting (GFSK) | 2402MHz | 2440MHz | 2480MHz |

4.6 Test Environment

| | |
|----------------------------|------|
| Humidity(%): | 54 |
| Atmospheric Pressure(kPa): | 101 |
| Normal Voltage(DC): | 7.4V |
| Normal Temperature(°C) | 23 |
| Low Temperature(°C) | 0 |
| High Temperature(°C) | 40 |

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

| No. | Equipment | Manufacturer | Type No. | Serial No. | Firmware Version | Calibrated until |
|-----|---|--------------|---------------------------|--------------|----------------------------|------------------|
| 1 | Spectrum Analyzer | Agilent | N9020A | MY52090073 | A.14.16 | 2024.07.05 |
| 2 | Power Sensor | Agilent | U2021XA | MY56120032 | / | 2024.07.05 |
| 3 | Power Sensor | Agilent | U2021XA | MY56120034 | / | 2024.07.05 |
| 4 | Communication test set | R&S | CMW500 | 108058 | V3.5.80 | 2024.07.05 |
| 5 | Spectrum Analyzer | KEYSIGHT | N9020A | MY51289897 | A.14.16 | 2024.07.05 |
| 6 | Signal Generator | Agilent | N5181A | MY50140365 | A.01.60 | 2024.07.05 |
| 7 | Vector signal generator | Agilent | N5182A | MY47420195 | A.01.87 | 2024.07.05 |
| 8 | Communication test set | Agilent | E5515C | MY50102567 | B.19.07 (E1962B) | 2024.07.06 |
| 9 | 2.4 GHz Filter | Shenxiang | MSF2400-24 83.5MS-1154 | 20181015001 | / | 2024.07.05 |
| 10 | 5 GHz Filter | Shenxiang | MSF5150-58 50MS-1155 | 20181015001 | / | 2024.07.06 |
| 11 | Filter | Xingbo | XBLBQ-DZA 120 | 190821-1-1 | / | 2024.07.06 |
| 12 | BT&WI-FI Automatic test software | Microwave | MTS8000 | Ver. 2.0.0.0 | / | / |
| 13 | Rohde & Schwarz SFU Broadcast Test System | R&S | SFU | 101017 | / | 2024.10.30 |
| 14 | Temperature humidity chamber | Hongjing | TH-80CH | DG-15174 | / | 2024.07.05 |
| 15 | 234G Automatic test software | Microwave | MTS8200 | Ver. 2.0.0.0 | / | / |
| 16 | 966 chamber | C.R.T. | 966 | / | / | 2024.08.11 |
| 17 | Receiver | R&S | ESPI | 100362 | RF_ATTEN_7 (104489/003) | 2024.07.05 |
| 18 | Amplifier | HP | 8447E | 2945A02747 | / | 2024.07.05 |
| 19 | Amplifier | Agilent | 8449B | 3008A01838 | / | 2024.07.05 |
| 20 | TRILOG Broadband Antenna | Schwarzbeck | VULB 9168 | 00869 | / | 2024.07.08 |

| | | | | | | |
|----|--------------------------------------|-------------|------------|------------|---|------------|
| 21 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA9120D | 01911 | / | 2024.07.08 |
| 22 | EMI test software | Fala | EZ-EMC | FA-03A2 RE | / | / |
| 23 | Loop Antenna | Schwarzbeck | FMZB 1519B | 1519B-224 | / | 2024.07.08 |
| 24 | loop antenna | ZHINAN | ZN30900A | GTS534 | / | / |
| 25 | 40G Horn antenna | A/H/System | SAS-574 | 588 | / | 2024.10.30 |
| 26 | Amplifier | AEROFLEX | Aeroflex | 097 | / | 2024.07.05 |

Continuous disturbance


| No. | Equipment | Manufacturer | Model No. | Serial No. | Firmware Version | Calibrated until |
|-----|------------------------|---------------|-----------------------|------------|---------------------|------------------|
| 1 | LISN | ROHDE&SCHWARZ | ESH3-Z5 | 100318 | / | 2024.07.05 |
| 2 | Pulse limiter | ROHDE&SCHWARZ | ESH3Z2 | 357881052 | / | 2024.07.05 |
| 3 | EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100428/003 | V4.42.SP3 | 2024.07.05 |
| 4 | Coaxial cable | ZDECL | Z302S-NJ-SM AJ-12M | 18091905 | / | 2024.07.05 |
| 5 | ISN | Schwarzbeck | NTFM8158 | 183 | / | 2024.07.05 |
| 6 | Communication test set | Agilent | E5515C | MY50102567 | B.19.07 (E1962B) | 2024.07.05 |
| 7 | Communication test set | R&S | CMW500 | 108058 | V3.5.80 | 2024.07.05 |
| 8 | EZ-EMC | Frad | EMC-con3A1.1 | / | / | / |

Radiated emission

| No. | Equipment | Manufacturer | Model No. | Serial No. | Firmware Version | Calibrated until |
|-----|--------------------------------------|---------------|----------------------------|------------|---------------------|------------------|
| 1 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA 9120 D | 01911 | / | 2024.07.08 |
| 2 | TRILOG Broadband Antenna | Schwarzbeck | VULB 9168 | 00869 | / | 2024.07.08 |
| 3 | Amplifier | Agilent | 8449B | 3008A01838 | / | 2024.07.05 |
| 4 | Amplifier | HP | 8447E | 2945A02747 | / | 2024.07.05 |
| 5 | EMI TEST RECEIVER | ROHDE&SCHWARZ | ESCI | 100428/003 | V4.42.SP3 | 2024.07.05 |
| 6 | Coaxial cable | ETS | RFC-SNS-100-N MS-80 NI | / | / | 2024.07.05 |
| 7 | Coaxial cable | ETS | RFC-SNS-100-N MS-20 NI | / | / | 2024.07.05 |
| 8 | Coaxial cable | ETS | RFC-SNS-100-S MS-20 NI | / | / | 2024.07.05 |
| 9 | Coaxial cable | ETS | RFC-NNS-100- NMS-300 NI | / | / | 2024.07.05 |
| 10 | Communication test set | Agilent | E5515C | MY50102567 | B.19.07 (E1962B) | 2024.07.05 |
| 11 | Communication test set | R&S | CMW500 | 108058 | V3.5.80 | 2024.07.05 |
| 12 | EZ-EMC | Frad | EMC-con3A1.1 | / | / | / |

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

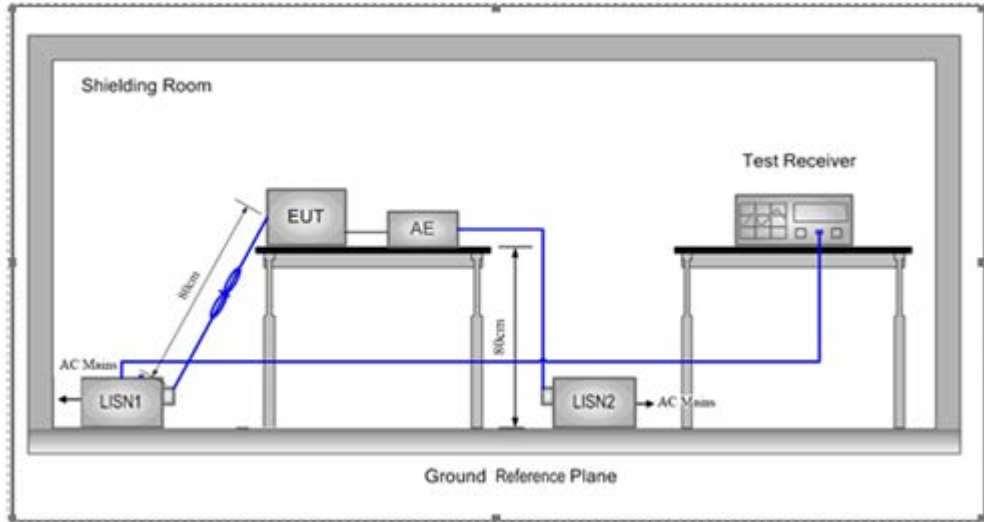

6.2 Limit

Table 4 – AC power-line conducted emissions limits

| Frequency (MHz) | Conducted limit (dB μ V) | |
|-----------------|------------------------------|----------------------------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 ^{Note 1} | 56 to 46 ^{Note 1} |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under

test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

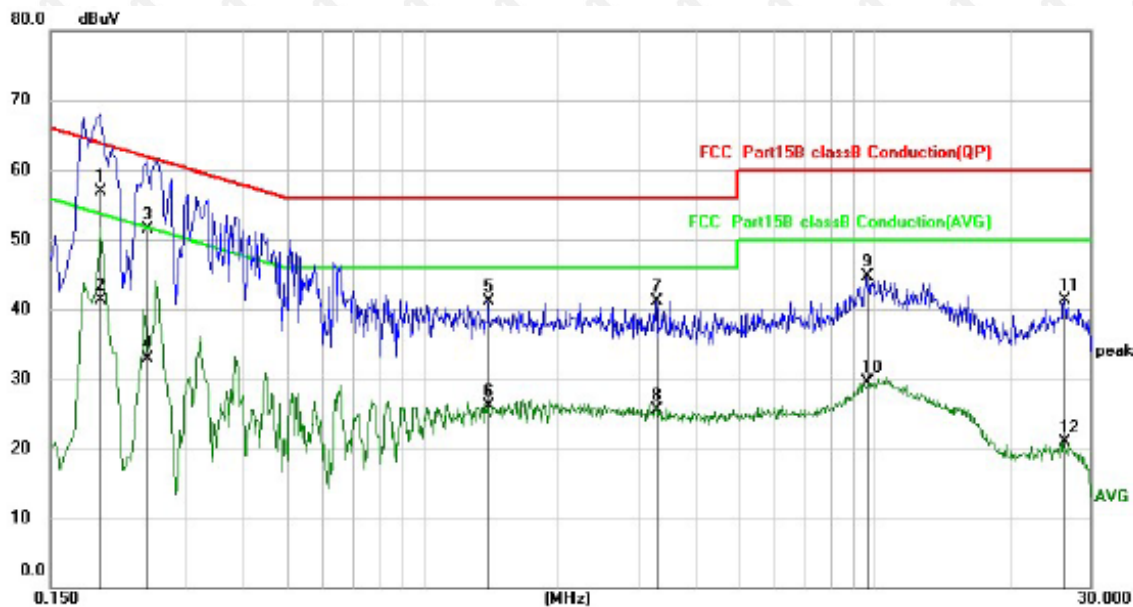


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1 | * | 0.1940 | 46.94 | 9.95 | 56.89 | 63.86 | -6.97 | QP |
| 2 | | 0.1940 | 31.26 | 9.95 | 41.21 | 53.86 | -12.65 | AVG |
| 3 | | 0.2460 | 41.55 | 9.96 | 51.51 | 61.89 | -10.38 | QP |
| 4 | | 0.2460 | 23.04 | 9.96 | 33.00 | 51.89 | -18.89 | AVG |
| 5 | | 1.3980 | 31.04 | 10.04 | 41.08 | 56.00 | -14.92 | QP |
| 6 | | 1.3980 | 16.05 | 10.04 | 26.09 | 46.00 | -19.91 | AVG |
| 7 | | 3.2820 | 30.85 | 10.21 | 41.06 | 56.00 | -14.94 | QP |
| 8 | | 3.2820 | 15.26 | 10.21 | 25.47 | 46.00 | -20.53 | AVG |
| 9 | | 9.6260 | 34.23 | 10.57 | 44.80 | 60.00 | -15.20 | QP |
| 10 | | 9.6260 | 18.95 | 10.57 | 29.52 | 50.00 | -20.48 | AVG |
| 11 | | 26.2300 | 30.11 | 11.12 | 41.23 | 60.00 | -18.77 | QP |
| 12 | | 26.2300 | 9.79 | 11.12 | 20.91 | 50.00 | -29.09 | AVG |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

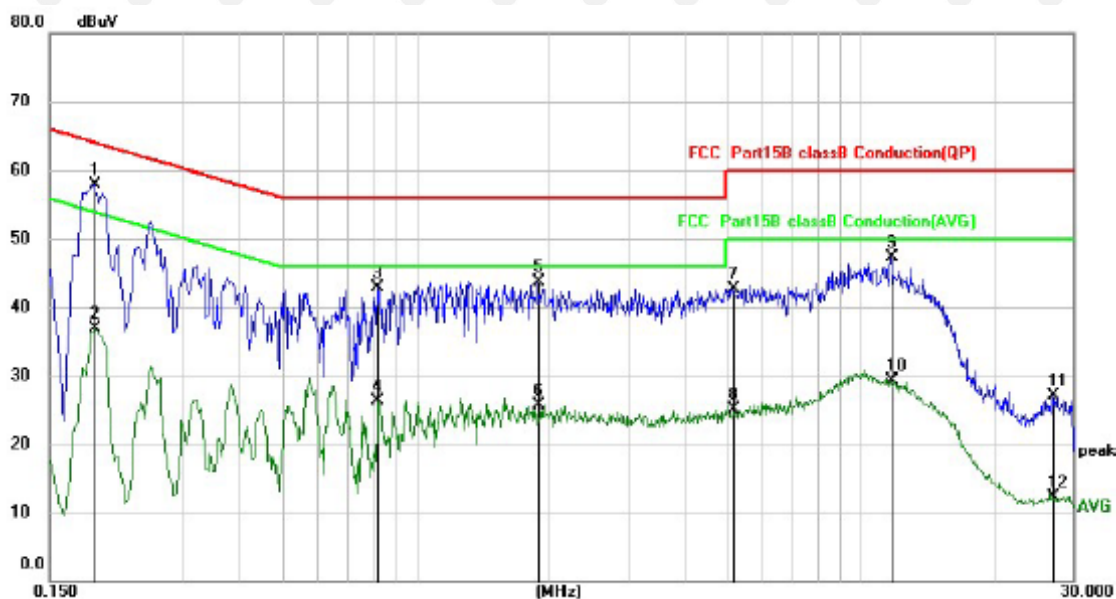

| No. | Mk. | Freq. | Reading | Correct | Measurement | Limit | Over | Detector |
|-----|-----|---------|---------|---------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | |
| 1 | * | 0.1900 | 47.95 | 9.95 | 57.90 | 64.04 | -6.14 | QP |
| 2 | | 0.1900 | 26.92 | 9.95 | 36.87 | 54.04 | -17.17 | AVG |
| 3 | | 0.8180 | 32.87 | 10.02 | 42.89 | 56.00 | -13.11 | QP |
| 4 | | 0.8180 | 16.31 | 10.02 | 26.33 | 46.00 | -19.67 | AVG |
| 5 | | 1.8820 | 33.67 | 10.08 | 43.75 | 56.00 | -12.25 | QP |
| 6 | | 1.8820 | 15.53 | 10.08 | 25.61 | 46.00 | -20.39 | AVG |
| 7 | | 5.1579 | 32.35 | 10.39 | 42.74 | 60.00 | -17.26 | QP |
| 8 | | 5.1579 | 14.70 | 10.39 | 25.09 | 50.00 | -24.91 | AVG |
| 9 | | 11.7299 | 36.63 | 10.63 | 47.26 | 60.00 | -12.74 | QP |
| 10 | | 11.7299 | 18.71 | 10.63 | 29.34 | 50.00 | -20.66 | AVG |
| 11 | | 26.8420 | 15.85 | 11.17 | 27.02 | 60.00 | -32.98 | QP |
| 12 | | 26.8420 | 1.13 | 11.17 | 12.30 | 50.00 | -37.70 | AVG |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement - Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

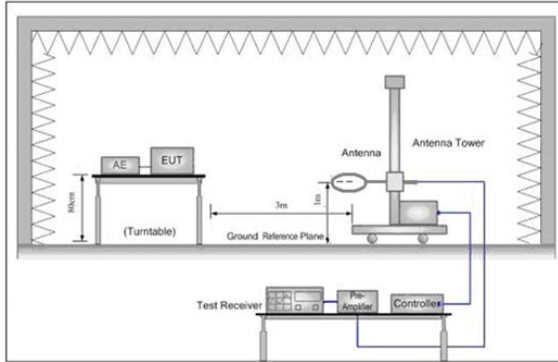


Figure 1. Below 30MHz


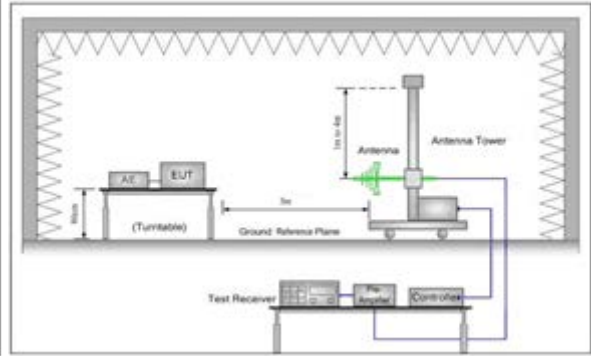


Figure 2. 30MHz to 1GHz

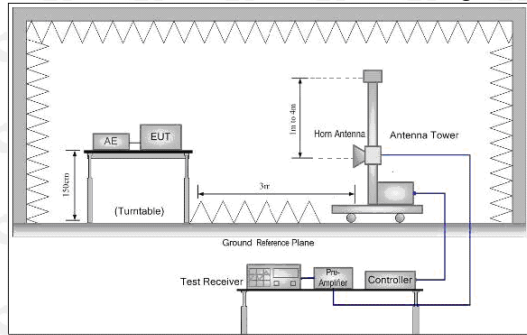

7.2 Limit

Spurious Emissions:

| Frequency | Field strength (microvolt/meter) | Limit (dB μ V/m) | Remark | Measurement distance (m) |
|-------------------|----------------------------------|-----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| 1.705MHz-30MHz | 30 | - | - | 30 |
| 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| Above 1GHz | 500 | 54.0 | Average | 3 |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

| Frequency | Detector | RBW | VBW | Remark |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak | 10kHz | 30KHz | Peak |
| 0.009MHz-0.090MHz | Average | 10kHz | 30KHz | Average |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30KHz | Quasi-peak |
| 0.110MHz-0.490MHz | Peak | 10kHz | 30KHz | Peak |
| 0.110MHz-0.490MHz | Average | 10kHz | 30KHz | Average |
| 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| 30MHz-1GHz | Quasi-peak | 120 kHz | 300KHz | Quasi-peak |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | Peak | 1MHz | 10Hz | Average |

7.4 Test Result


Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dB/m | dB | Detector |
| 1 | * | 120.9108 | 44.98 | -5.22 | 39.76 | 43.50 | -3.74 | QP |
| 2 | ! | 146.6303 | 42.37 | -3.58 | 38.79 | 43.50 | -4.71 | QP |
| 3 | | 173.2050 | 41.13 | -4.74 | 36.39 | 43.50 | -7.11 | QP |
| 4 | | 221.3920 | 35.73 | -7.23 | 28.50 | 46.00 | -17.50 | QP |
| 5 | | 256.9712 | 44.96 | -6.60 | 38.36 | 46.00 | -7.64 | QP |
| 6 | | 374.6225 | 31.99 | -2.81 | 29.18 | 46.00 | -16.82 | QP |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V
Worst case-GFSK(low channel)

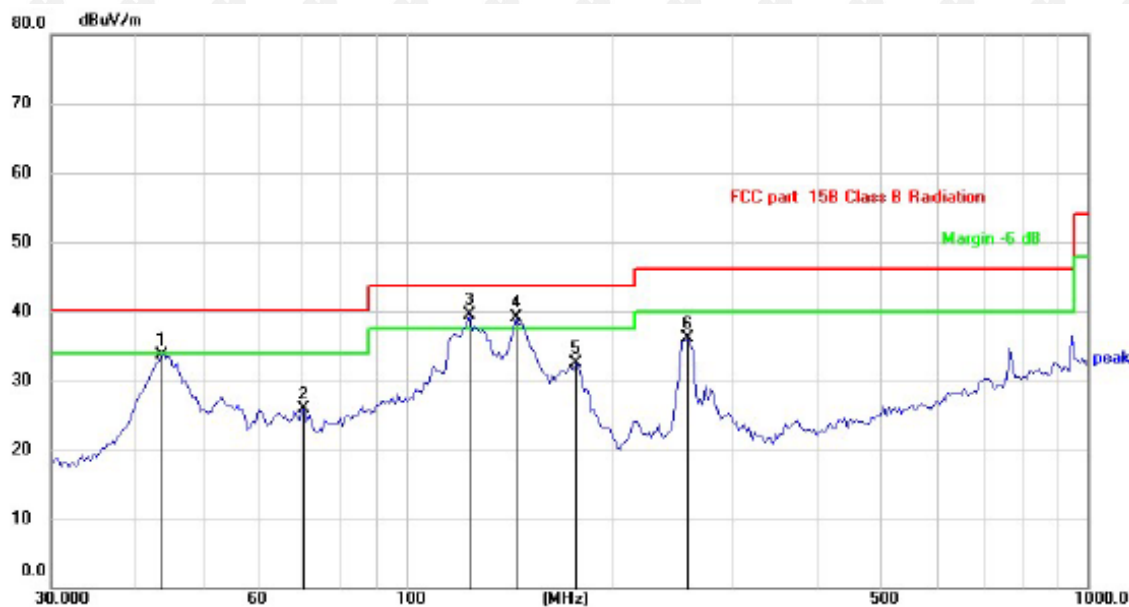

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dB/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1 | | 43.7351 | 39.13 | -5.47 | 33.66 | 40.00 | -6.34 | QP |
| 2 | | 70.8315 | 33.95 | -8.14 | 25.81 | 40.00 | -14.19 | QP |
| 3 | * | 124.1329 | 44.50 | -5.08 | 39.42 | 43.50 | -4.08 | QP |
| 4 | ! | 145.3505 | 42.89 | -3.74 | 39.15 | 43.50 | -4.35 | QP |
| 5 | | 177.8206 | 37.79 | -5.23 | 32.56 | 43.50 | -10.94 | QP |
| 6 | | 259.2338 | 42.52 | -6.50 | 36.02 | 46.00 | -9.98 | QP |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2402 | 110.58 | -5.84 | 104.74 | N/A | N/A | peak |
| 2402 | 92.13 | -5.84 | 86.29 | N/A | N/A | AVG |
| 4804 | 58.65 | -3.64 | 55.01 | 74 | -18.99 | peak |
| 4804 | 50.02 | -3.64 | 46.38 | 54 | -7.62 | AVG |
| 7206 | 60.40 | -0.95 | 59.45 | 74 | -14.55 | peak |
| 7206 | 48.22 | -0.95 | 47.27 | 54 | -6.73 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2402 | 108.72 | -5.84 | 102.88 | N/A | N/A | peak |
| 2402 | 94.22 | -5.84 | 88.38 | N/A | N/A | AVG |
| 4804 | 58.13 | -3.64 | 54.49 | 74 | -19.51 | peak |
| 4804 | 49.14 | -3.64 | 45.50 | 54 | -8.50 | AVG |
| 7206 | 58.39 | -0.95 | 57.44 | 74 | -16.56 | peak |
| 7206 | 49.92 | -0.95 | 48.97 | 54 | -5.03 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2440MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2440 | 107.78 | -5.71 | 102.07 | N/A | N/A | peak |
| 2440 | 92.42 | -5.71 | 86.71 | N/A | N/A | AVG |
| 4880 | 54.45 | -3.51 | 50.94 | 74 | -23.06 | peak |
| 4880 | 45.31 | -3.51 | 41.80 | 54 | -12.20 | AVG |
| 7320 | 56.41 | -0.82 | 55.59 | 74 | -18.41 | peak |
| 7320 | 47.16 | -0.82 | 46.34 | 54 | -7.66 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2440 | 106.41 | -5.71 | 100.70 | N/A | N/A | peak |
| 2440 | 92.51 | -5.71 | 86.80 | N/A | N/A | AVG |
| 4880 | 55.15 | -3.51 | 51.64 | 74 | -22.36 | peak |
| 4880 | 46.67 | -3.51 | 43.16 | 54 | -10.84 | AVG |
| 7320 | 57.98 | -0.82 | 57.16 | 74 | -16.84 | peak |
| 7320 | 46.06 | -0.82 | 45.24 | 54 | -8.76 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2480 | 106.43 | -5.65 | 100.78 | N/A | N/A | peak |
| 2480 | 91.48 | -5.65 | 85.83 | N/A | N/A | AVG |
| 4960 | 56.01 | -3.43 | 52.58 | 74 | -21.42 | peak |
| 4960 | 46.48 | -3.43 | 43.05 | 54 | -10.95 | AVG |
| 7440 | 57.21 | -0.75 | 56.46 | 74 | -17.54 | peak |
| 7440 | 46.52 | -0.75 | 45.77 | 54 | -8.23 | AVG |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2480 | 107.32 | -5.65 | 101.67 | N/A | N/A | peak |
| 2480 | 91.41 | -5.65 | 85.76 | N/A | N/A | AVG |
| 4960 | 54.55 | -3.43 | 51.12 | 74 | -22.88 | peak |
| 4960 | 45.92 | -3.43 | 42.49 | 54 | -11.51 | AVG |
| 7440 | 56.29 | -0.75 | 55.54 | 74 | -18.46 | peak |
| 7440 | 45.92 | -0.75 | 45.17 | 54 | -8.83 | AVG |

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case)

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 2310 | 53.75 | -5.81 | 47.94 | 74 | -26.06 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 54.47 | -5.84 | 48.63 | 74 | -25.37 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| 2400 | 54.04 | -5.84 | 48.20 | 74 | -25.80 | peak |
| 2400 | / | -5.84 | / | 54 | / | AVG |

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 2310 | 56.46 | -5.81 | 50.65 | 74 | -23.35 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 55.57 | -5.84 | 49.73 | 74 | -24.27 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| 2400 | 57.20 | -5.84 | 51.36 | 74 | -22.64 | peak |
| 2400 | / | -5.84 | / | 54 | / | AVG |

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|----------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2483.50 | 55.44 | -5.65 | 49.79 | 74 | -24.21 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 54.13 | -5.65 | 48.48 | 74 | -25.52 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|----------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2483.50 | 54.30 | -5.65 | 48.65 | 74 | -25.35 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 56.27 | -5.65 | 50.62 | 74 | -23.38 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

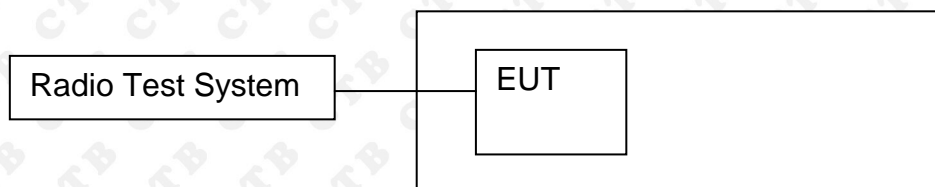


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

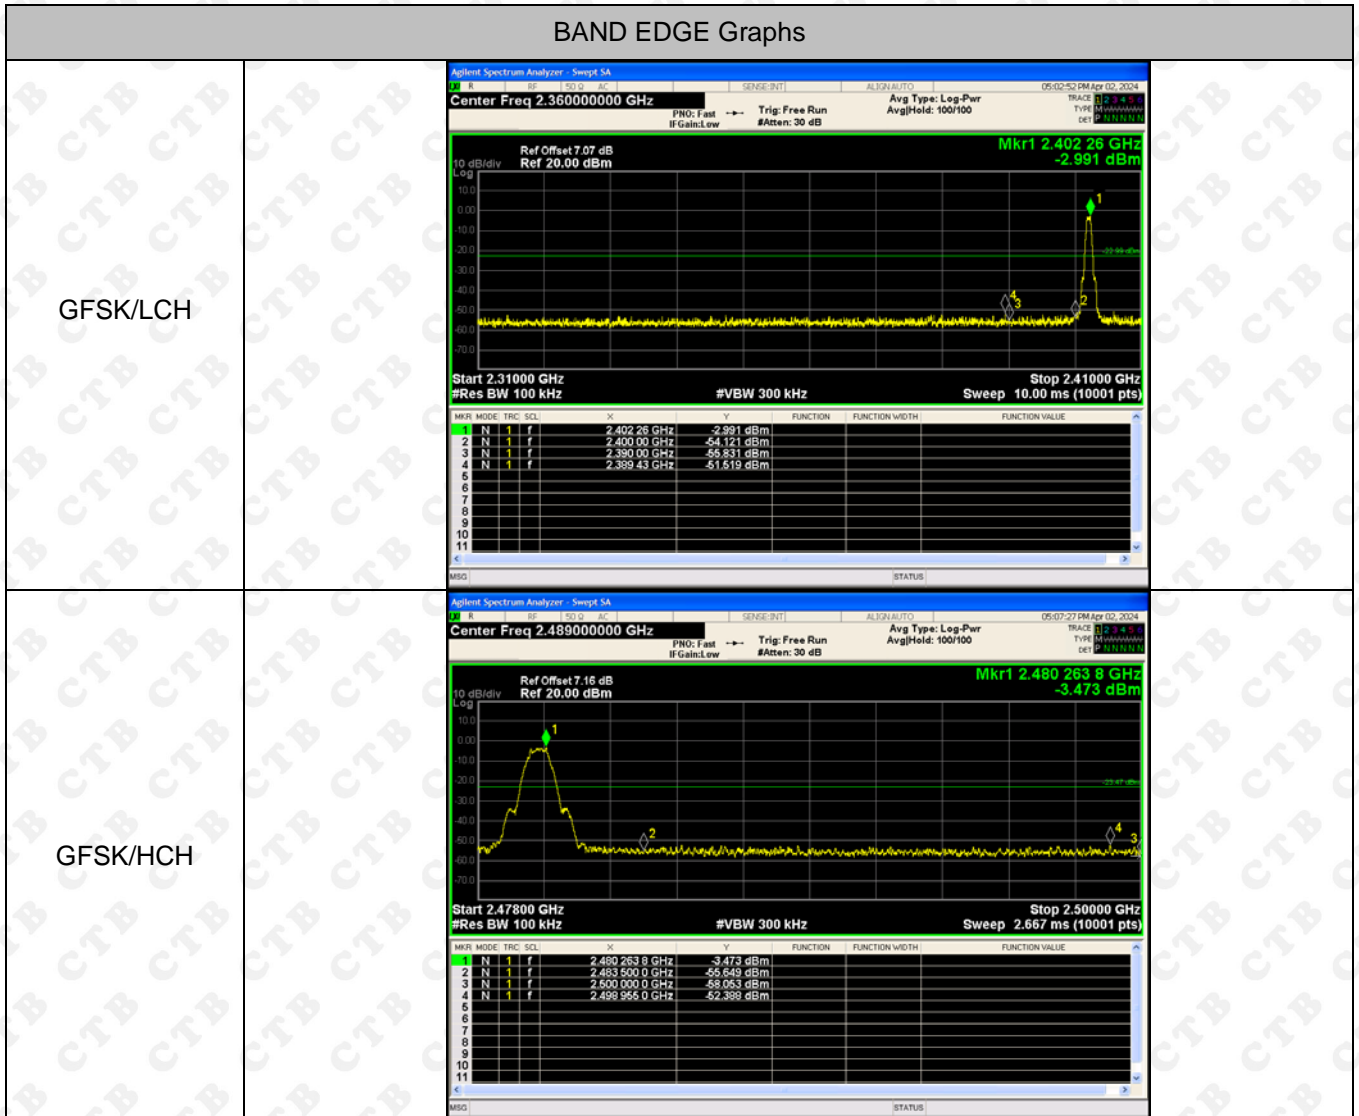


RF Conducted Spurious Emissions Graphs


GFSK/LCH

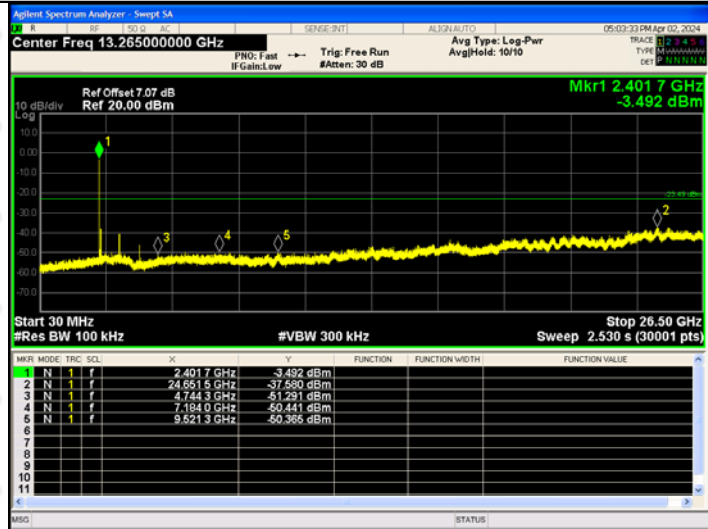

GFSK/MCH

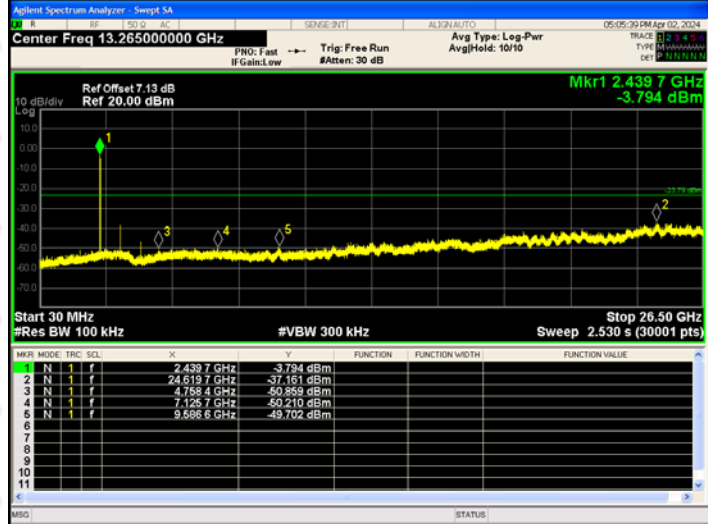


GFSK/HCH

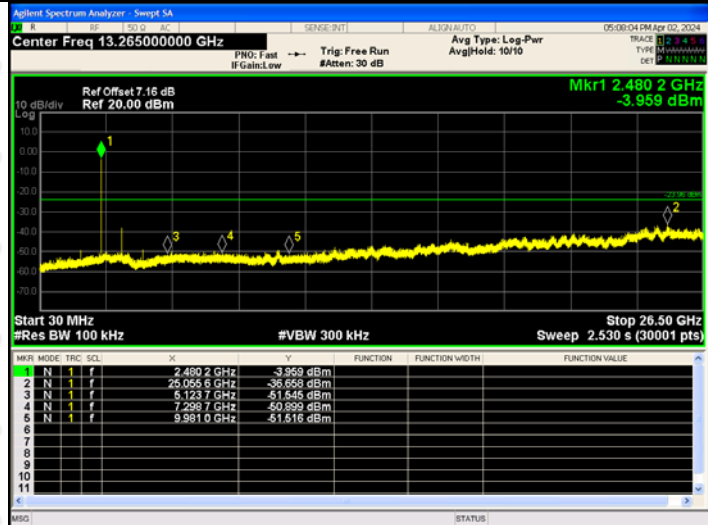

9. CODUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

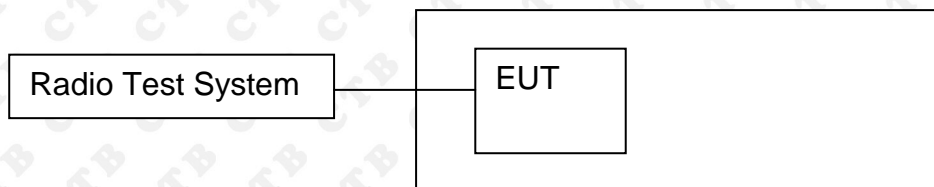

9.2 Limit

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|--------------|-----------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(b)(3) | Output Power | 1 watt or 30dBm | 2400-2483.5 | PASS |

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

| Mode | Channel. | Maximum Output Power [dBm] | Limit[dBm] | Verdict |
|------|----------|----------------------------|------------|---------|
| GFSK | LCH | -1.93 | 30 | PASS |
| | MCH | -2.411 | 30 | PASS |
| | HCH | -2.496 | 30 | PASS |

Duty Cycle


| Mode | Channel. | Duty Cycle(%) | Correction Factor (dB) |
|------|----------|---------------|------------------------|
| GFSK | LCH | 100 | 0 |
| | MCH | 100 | 0 |
| | HCH | 100 | 0 |

Test Graph:

| | | |
|------------------------------|--|--|
| <p>GFSK Low channel</p> | | |
| <p>GFSK Mid channel</p> | | |
| <p>GFSK High channel</p> | | |

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

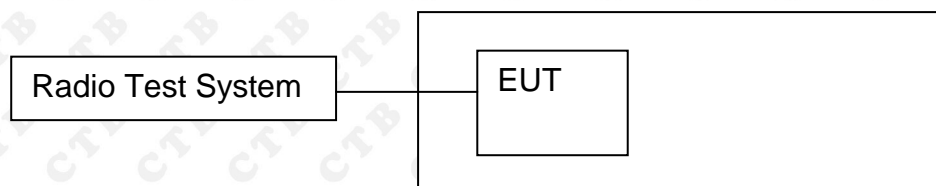

10.2 Limit

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|-----------|---------------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247(a)(2) | Bandwidth | >= 500KHz (6dB bandwidth) | 2400-2483.5 | PASS |

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

| Test Mode | Frequency | 6dB Bandwidth (MHz) | Limit (KHz) | Result |
|-----------|--------------|---------------------|-------------|--------|
| GFSK | Low channel | 0.754 | >= 500 | PASS |
| | Mid channel | 0.732 | >= 500 | PASS |
| | High channel | 0.734 | >= 500 | PASS |


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

| | |
|------------------------------|--|
| <p>GFSK Low channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Attenu: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.07 dB</p> <p>Ref: 27.07 dBm</p> <p>Mkr3 2.402385 GHz</p> <p>-9.5600 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0642 MHz</p> <p>Total Power 3.93 dBm</p> <p>Transmit Freq Error 8.381 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 753.9 kHz</p> <p>x dB -6.00 dB</p> |
| <p>GFSK Mid channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.44000000 GHz</p> <p>Trig: Free Run</p> <p>#Attenu: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.15 dB</p> <p>Ref: 27.13 dBm</p> <p>Mkr3 2.440376 GHz</p> <p>-8.9646 dBm</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0543 MHz</p> <p>Total Power 3.60 dBm</p> <p>Transmit Freq Error 10.346 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 731.9 kHz</p> <p>x dB -6.00 dB</p> |
| <p>GFSK High channel</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>#Attenu: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.16 dB</p> <p>Ref: 27.16 dBm</p> <p>Mkr3 2.480374 GHz</p> <p>-9.3152 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 3 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 1.0566 MHz</p> <p>Total Power 3.33 dBm</p> <p>Transmit Freq Error 7.529 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 733.8 kHz</p> <p>x dB -6.00 dB</p> |

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

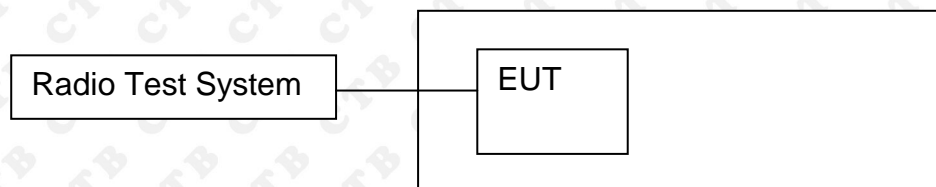

11.2 Limit

| FCC Part15 (15.247) , Subpart C | | | | |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section | Test Item | Limit | Frequency Range (MHz) | Result |
| 15.247 | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5 | PASS |

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

| Mode | Channel. | Power Spectral Density (dBm/3KHz) | Limit(dBm/3KHz) | Verdict |
|------|----------|-----------------------------------|-----------------|---------|
| GFSK | LCH | -15.554 | 8 | PASS |
| GFSK | MCH | -16.946 | 8 | PASS |
| GFSK | HCH | -16.943 | 8 | PASS |

Test Graph

| Graphs | |
|----------|--|
| GFSK/LCH | <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402006 GHz -15.554 dBm Center 2.402000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p> |
| GFSK/MCH | <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.440006 GHz -16.946 dBm Center 2.440000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p> |
| GFSK/HCH | <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480006 GHz -16.943 dBm Center 2.480000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p> |

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The EUT antenna is PCB antenna. The best case gain of the antenna is -0.93dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions


Below 1G



Above 1G



Conducted emission

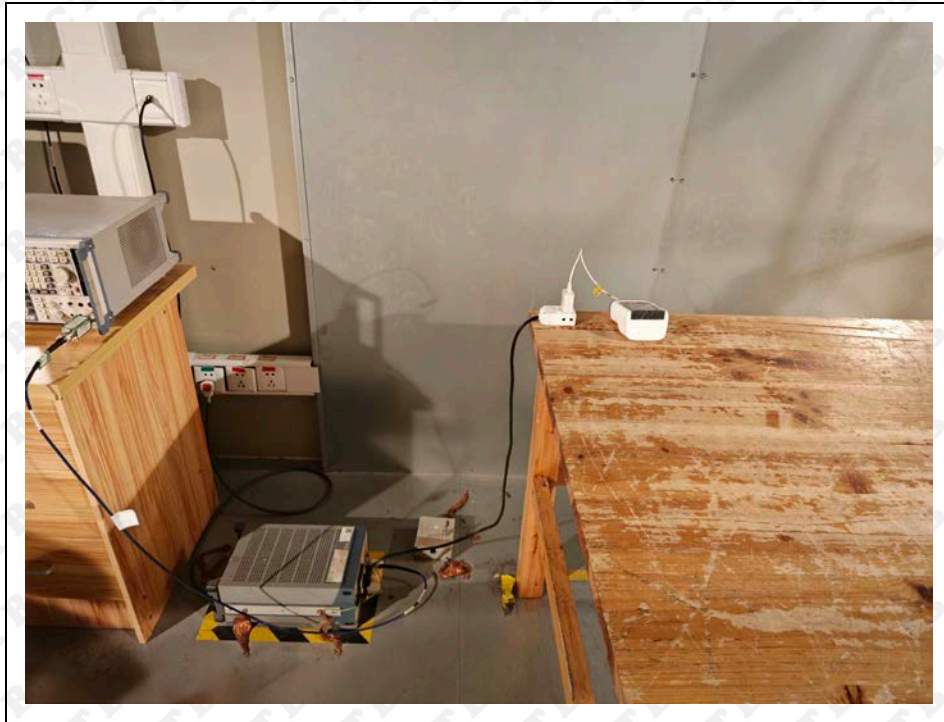

***** END OF REPORT *****