


Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

80 dBuV/m

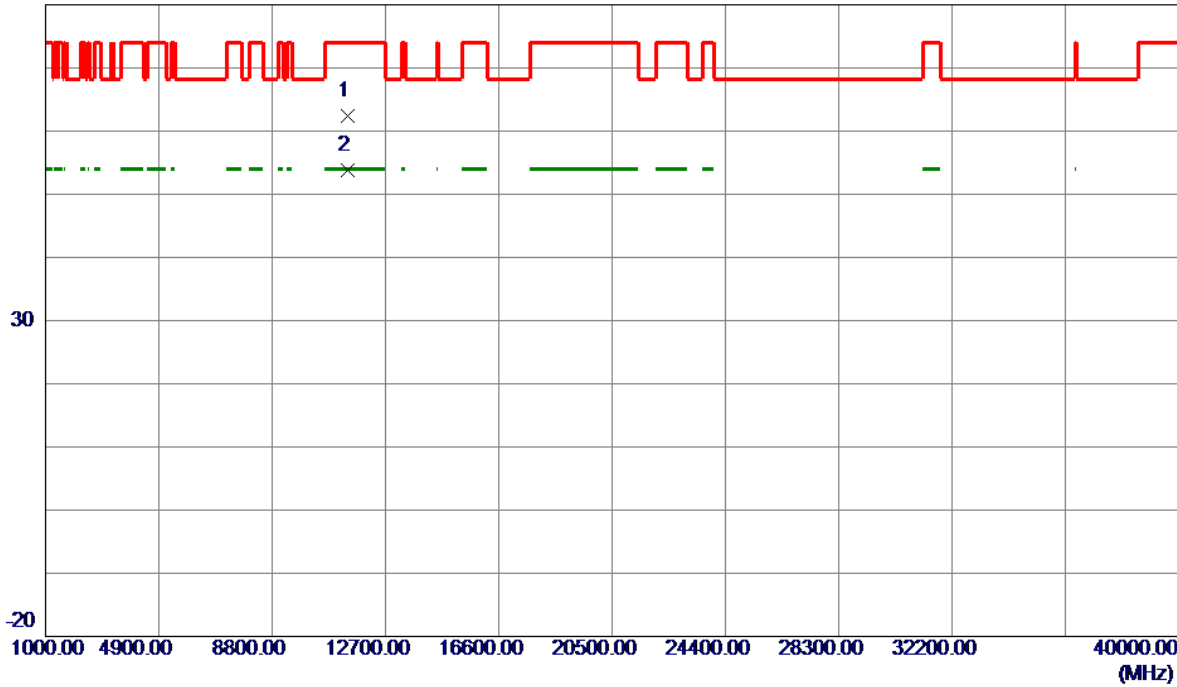


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11394.7000	55.72	6.66	62.38	74.00	-11.62	Peak	
2 *	11400.2000	47.18	6.66	53.84	54.00	-0.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

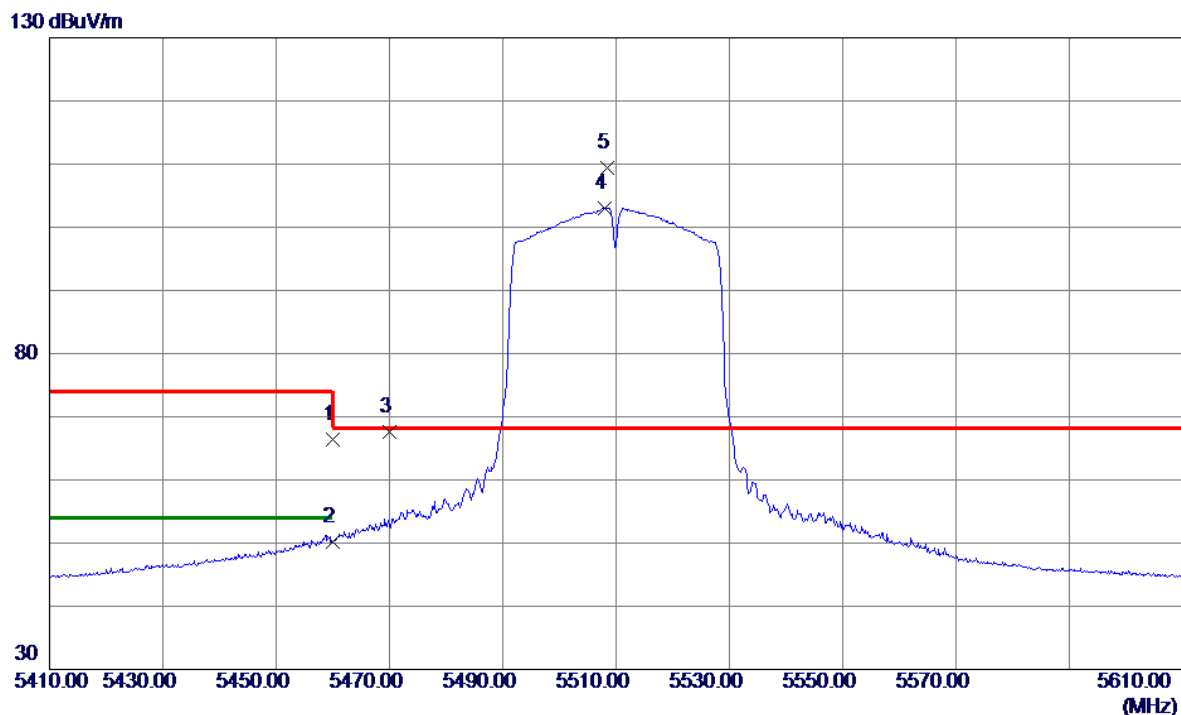


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	54.01	12.46	66.47	74.00	-7.53	Peak	
2	5460.0000	37.82	12.46	50.28	54.00	-3.72	AVG	
3	5470.0000	55.11	12.49	67.60	68.20	-0.60	Peak	
4	5507.9000	90.50	12.58	103.08	999.00	-895.92	AVG	No Limit
5 *	5508.5000	96.73	12.58	109.31	68.20	41.11	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

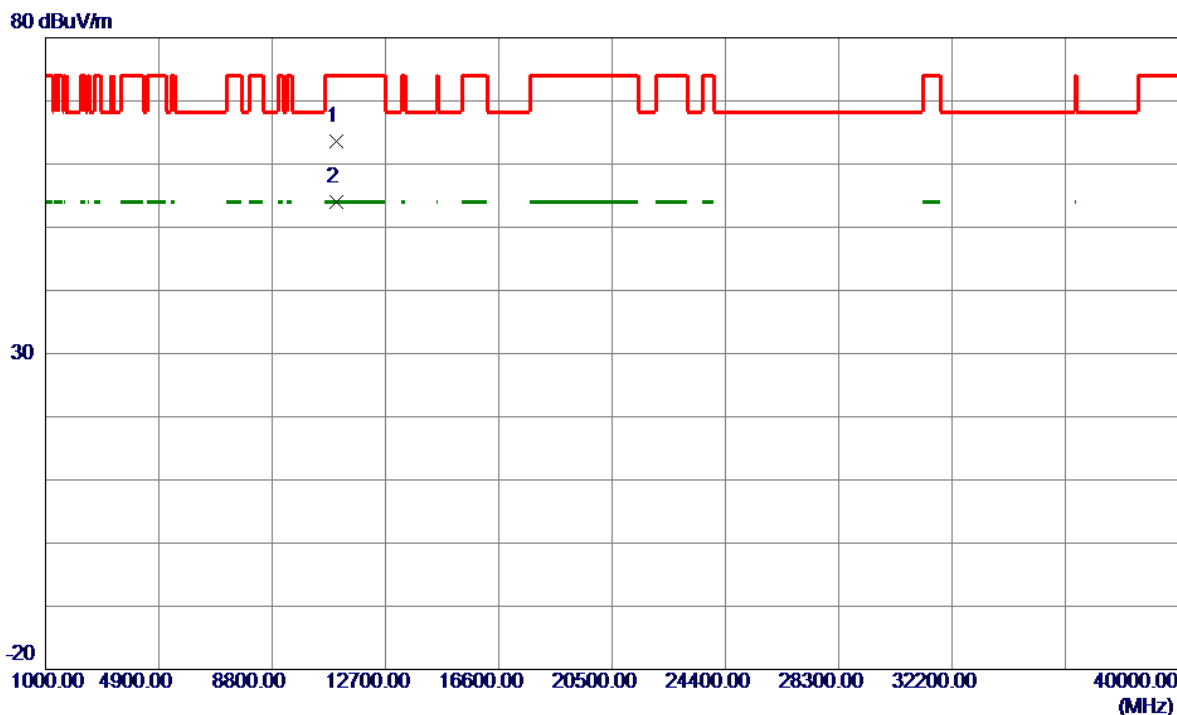


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11020.2000	57.34	6.32	63.66	74.00	-10.34	Peak	
2 *	11020.2000	47.66	6.32	53.98	54.00	-0.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

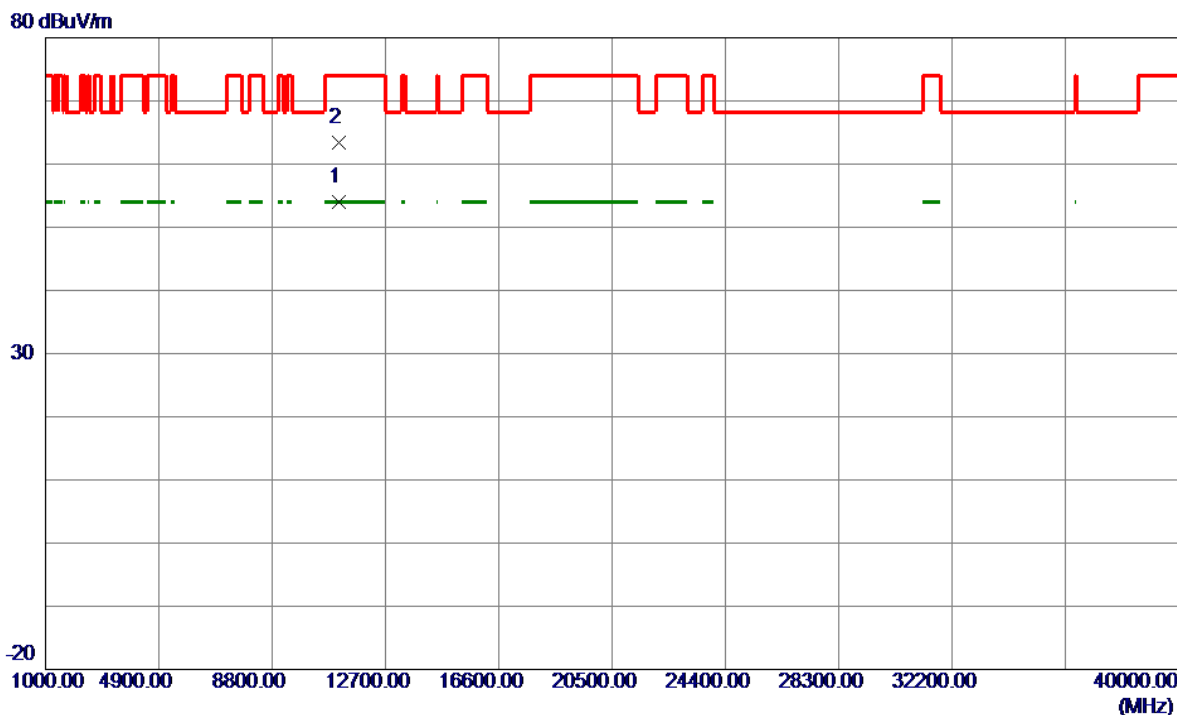


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11095.4000	47.55	6.39	53.94	54.00	-0.06	AVG	
2	11097.2000	57.10	6.39	63.49	74.00	-10.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

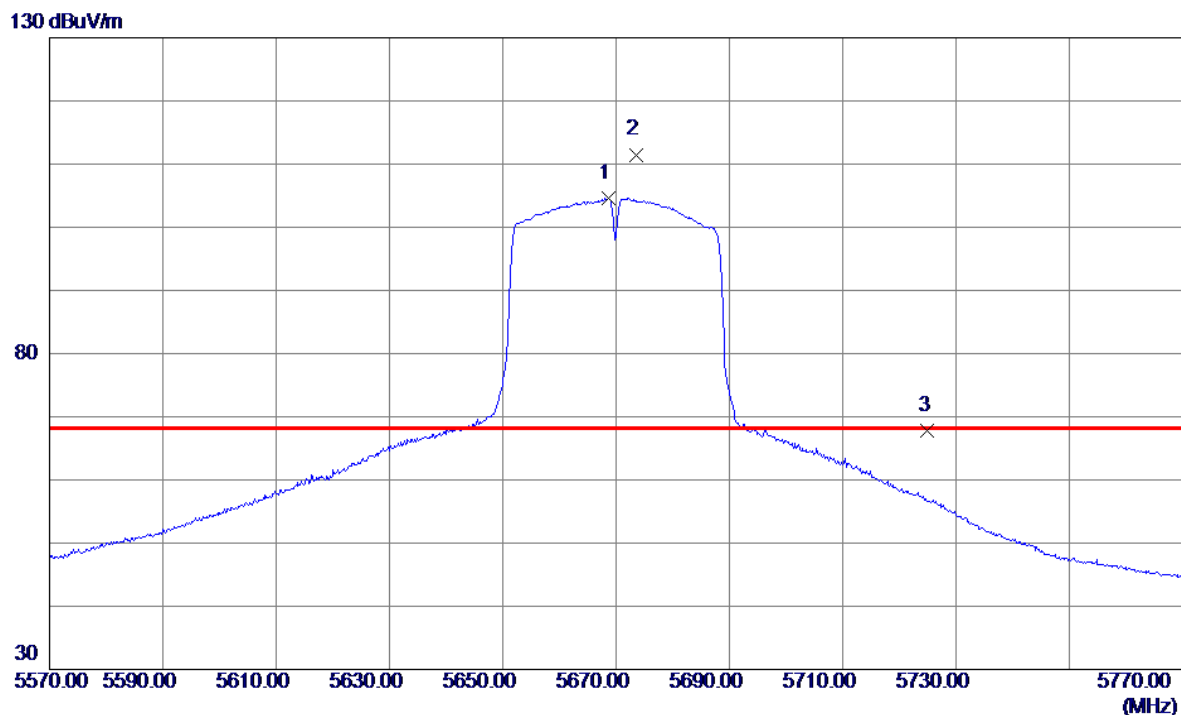


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5668.6000	91.52	13.07	104.59	999.00	-894.41	AVG	No Limit
2 *	5673.5000	98.42	13.08	111.50	68.20	43.30	Peak	No Limit
3	5725.0000	54.57	13.24	67.81	68.20	-0.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

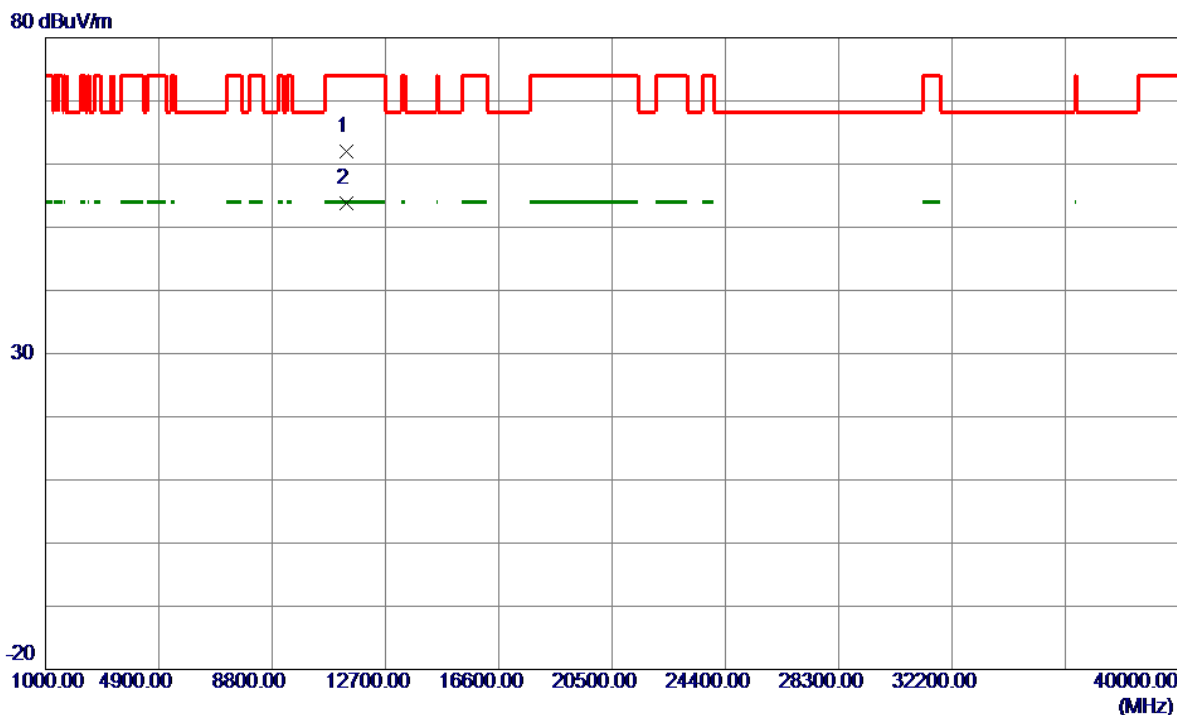


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.0000	55.36	6.61	61.97	74.00	-12.03	Peak	
2 *	11340.2000	47.23	6.61	53.84	54.00	-0.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

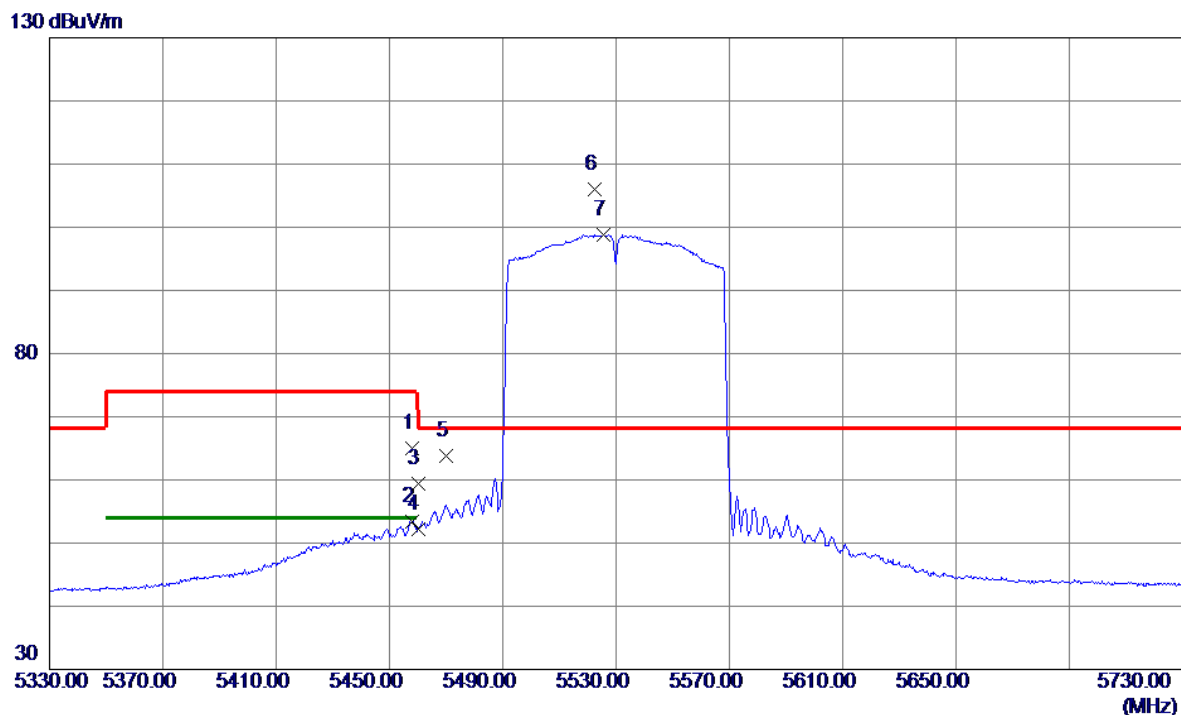


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.8000	52.48	12.46	64.94	74.00	-9.06	Peak	
2	5457.8000	40.98	12.46	53.44	54.00	-0.56	AVG	
3	5460.0000	46.94	12.46	59.40	74.00	-14.60	Peak	
4	5460.0000	39.77	12.46	52.23	54.00	-1.77	AVG	
5	5470.0000	51.31	12.49	63.80	68.20	-4.40	Peak	
6 *	5522.4000	93.41	12.62	106.03	68.20	37.83	Peak	No Limit
7	5525.6000	86.11	12.63	98.74	999.00	-900.26	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

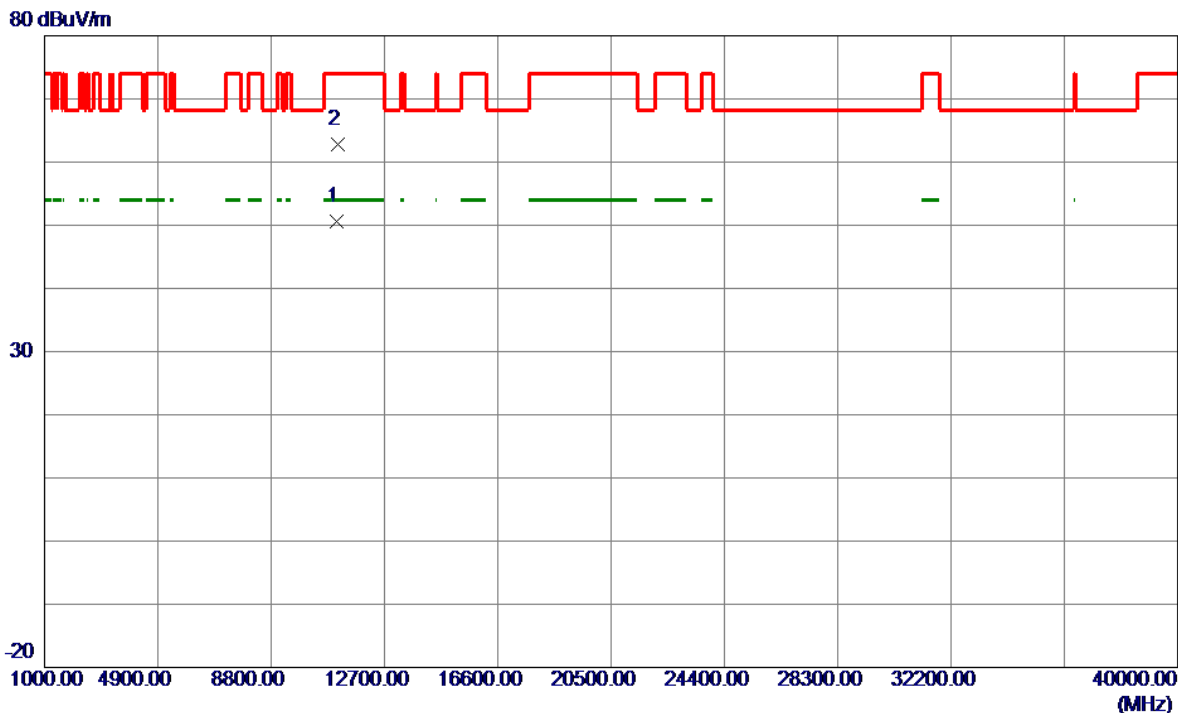


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11053.0000	44.21	6.35	50.56	54.00	-3.44	AVG	
2	11079.2000	56.51	6.37	62.88	74.00	-11.12	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

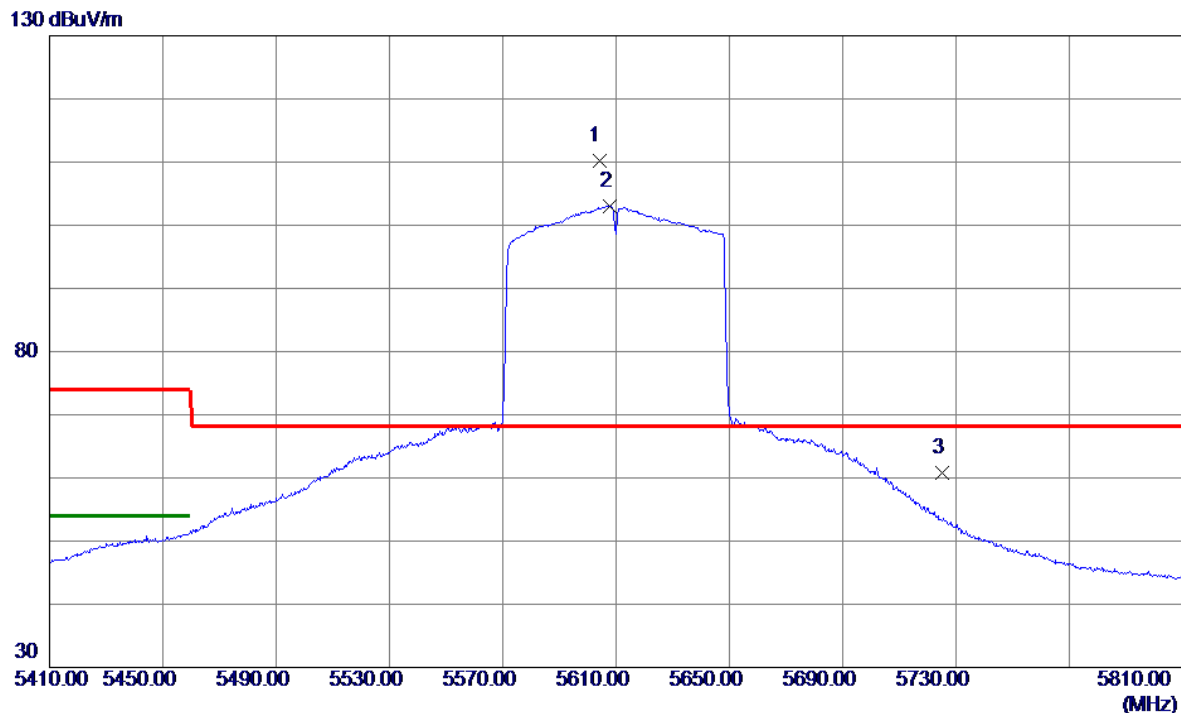


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5604.0000	97.28	12.87	110.15	68.20	41.95	Peak	No Limit
2	5607.6000	90.18	12.88	103.06	999.00	-895.94	AVG	No Limit
3	5725.0000	47.64	13.24	60.88	68.20	-7.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

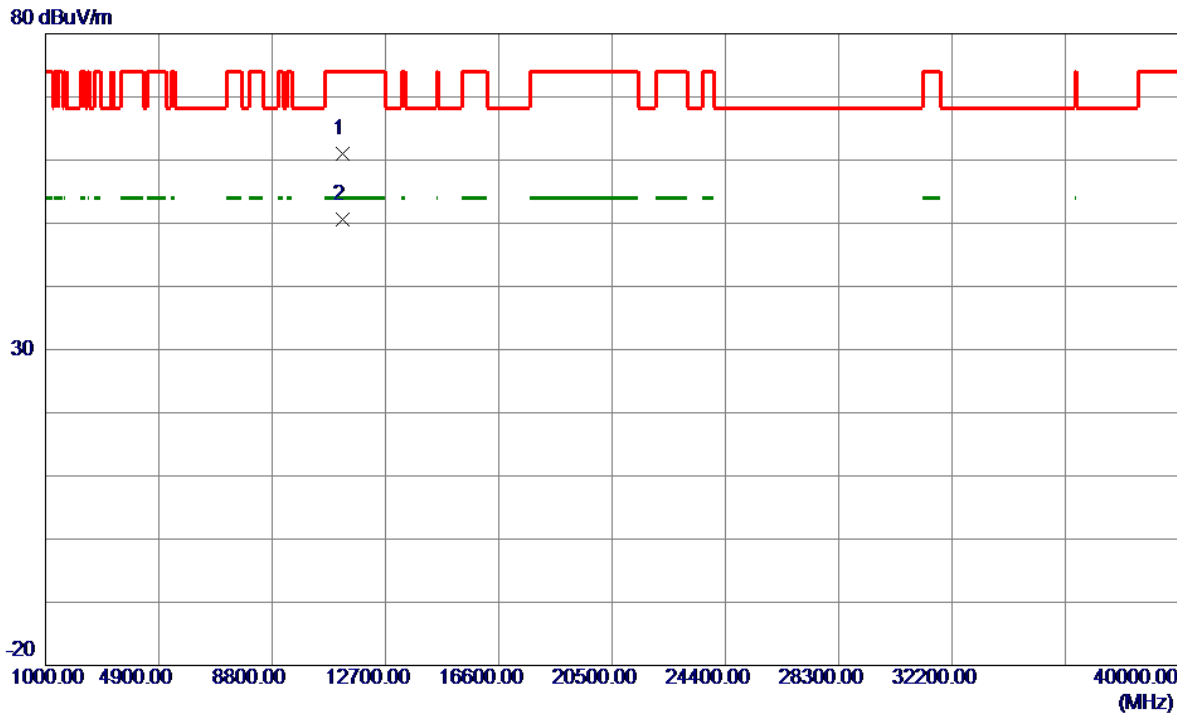


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11205.7000	54.49	6.49	60.98	74.00	-13.02	Peak	
2 *	11219.9000	44.01	6.50	50.51	54.00	-3.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

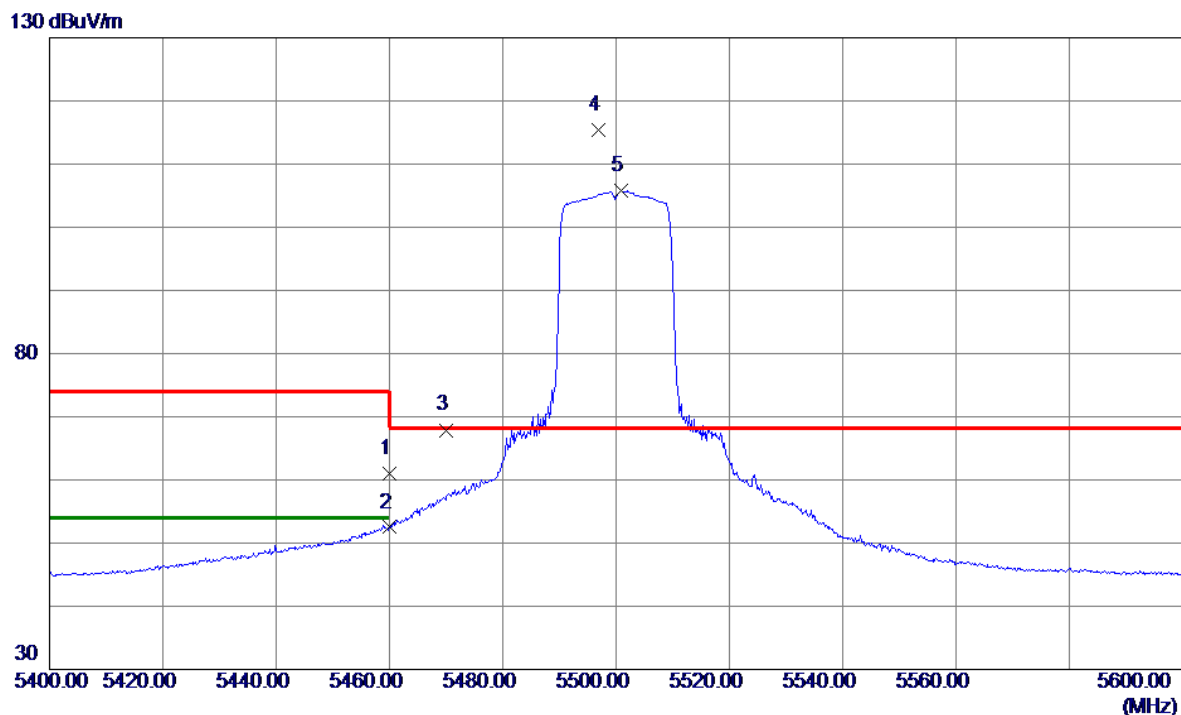


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	48.49	12.46	60.95	74.00	-13.05	Peak	
2	5460.0000	40.04	12.46	52.50	54.00	-1.50	AVG	
3	5470.0000	55.41	12.49	67.90	68.20	-0.30	Peak	
4 *	5496.9000	102.87	12.55	115.42	68.20	47.22	Peak	No Limit
5	5500.8000	93.15	12.56	105.71	999.00	-893.29	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

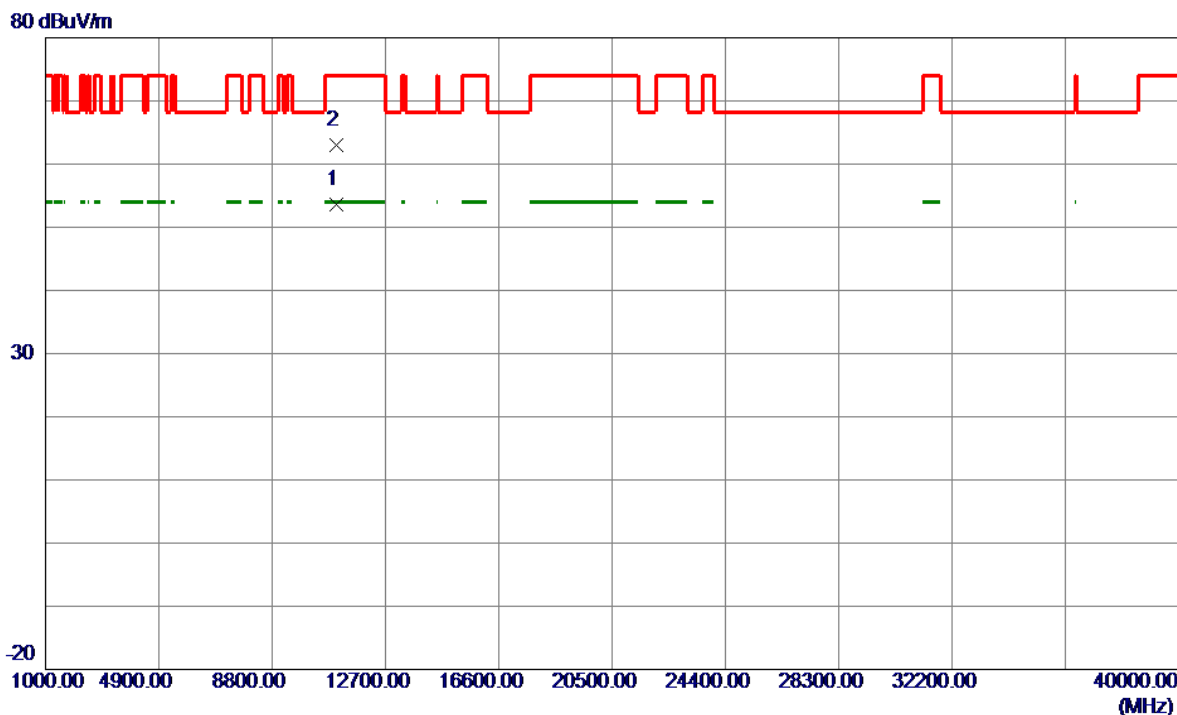


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.8000	47.37	6.30	53.67	54.00	-0.33	AVG	
2	11001.3000	56.77	6.30	63.07	74.00	-10.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

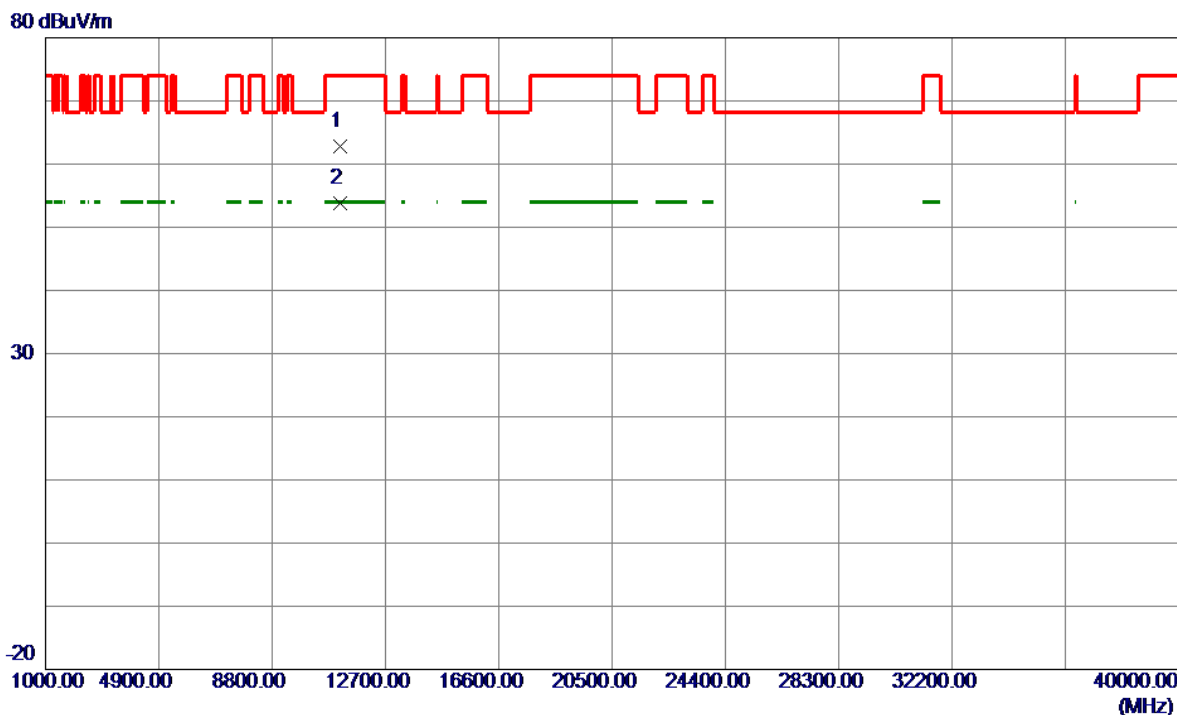


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11157.9000	56.34	6.44	62.78	74.00	-11.22	Peak	
2 *	11158.4000	47.44	6.44	53.88	54.00	-0.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

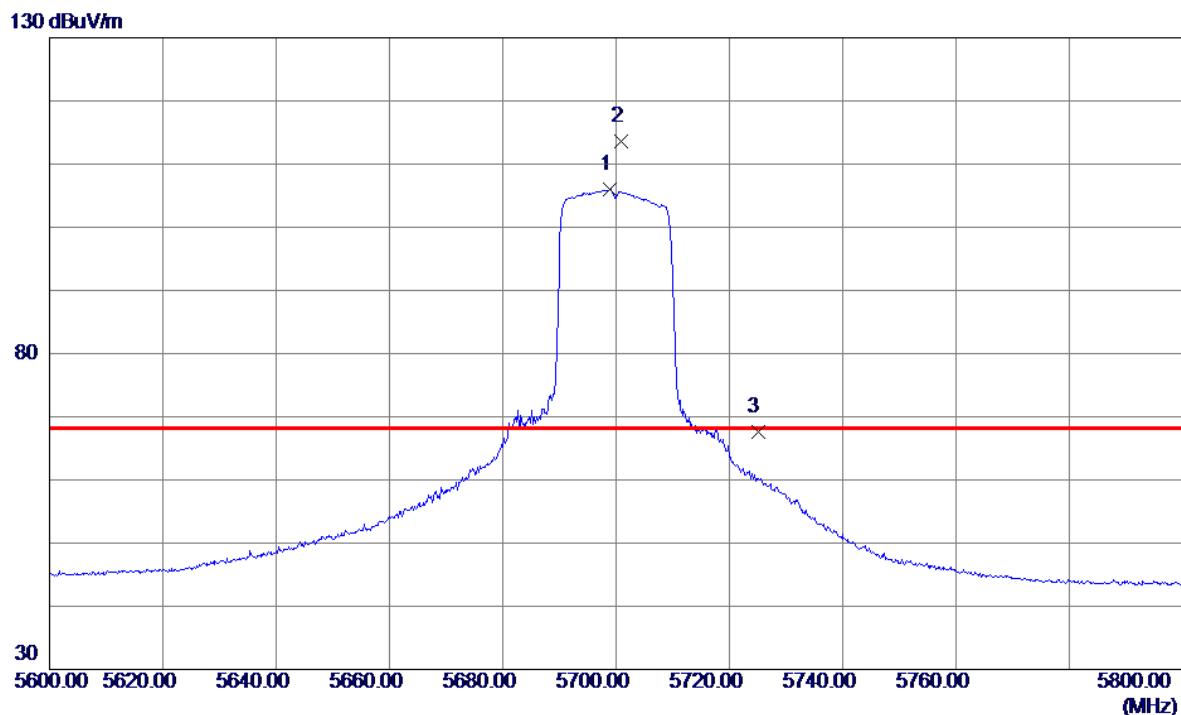


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5698.9000	92.77	13.16	105.93	999.00	-893.07	AVG	No Limit
2 *	5700.9000	100.52	13.16	113.68	68.20	45.48	Peak	No Limit
3	5725.0000	54.41	13.24	67.65	68.20	-0.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

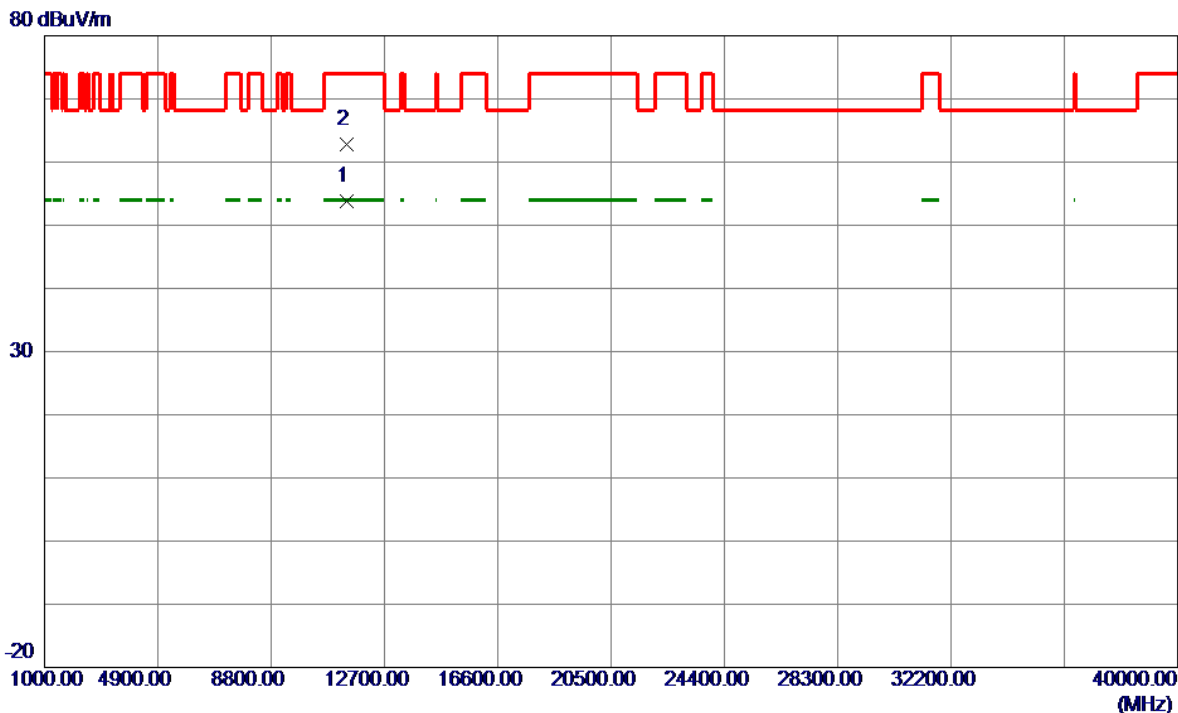


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11397.5000	47.05	6.66	53.71	54.00	-0.29	AVG	
2	11400.0000	56.13	6.66	62.79	74.00	-11.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

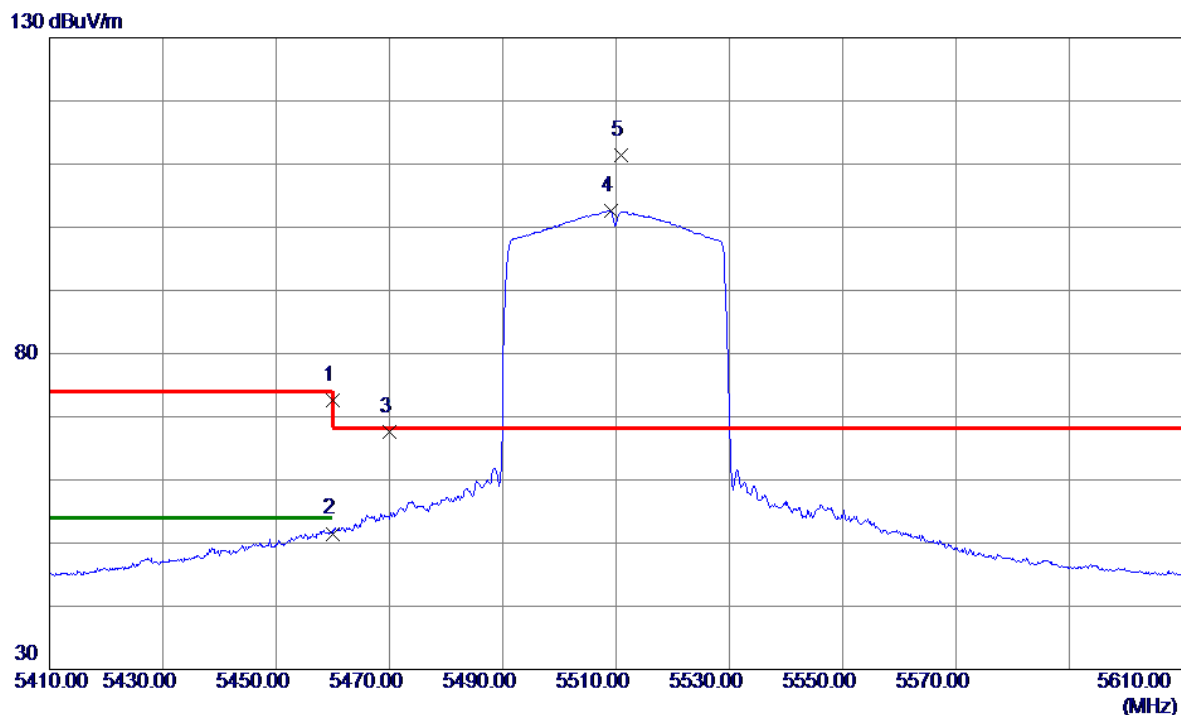


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	60.09	12.46	72.55	74.00	-1.45	Peak	
2	5460.0000	39.04	12.46	51.50	54.00	-2.50	AVG	
3	5470.0000	55.13	12.49	67.62	68.20	-0.58	Peak	
4	5509.2000	90.06	12.58	102.64	999.00	-896.36	AVG	No Limit
5 *	5510.8000	98.83	12.59	111.42	68.20	43.22	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

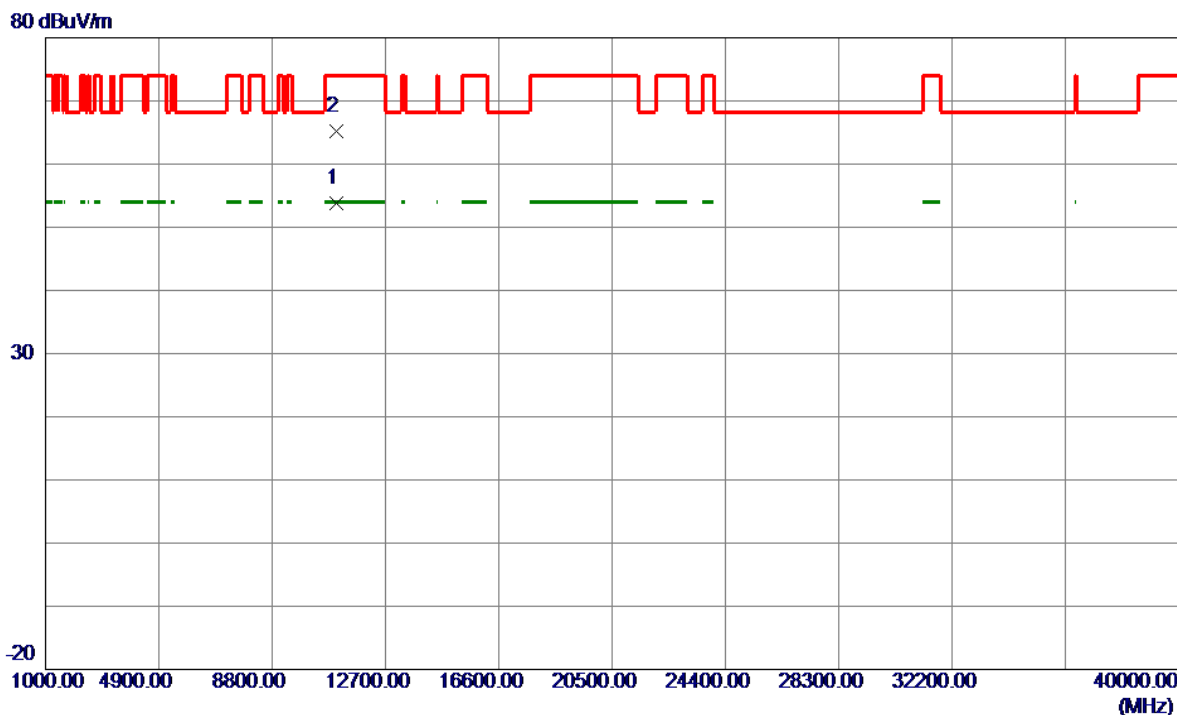


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.6000	47.48	6.32	53.80	54.00	-0.20	AVG	
2	11026.2000	58.79	6.32	65.11	74.00	-8.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

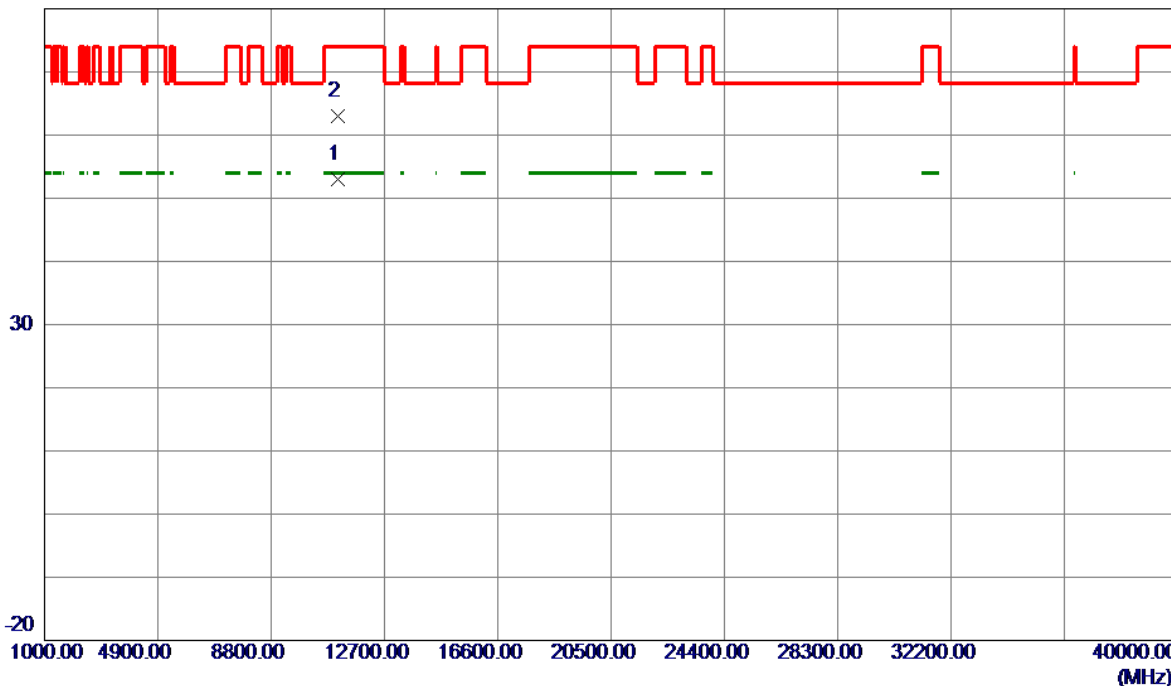


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11095.0000	46.64	6.39	53.03	54.00	-0.97	AVG	
2	11096.1000	56.59	6.39	62.98	74.00	-11.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

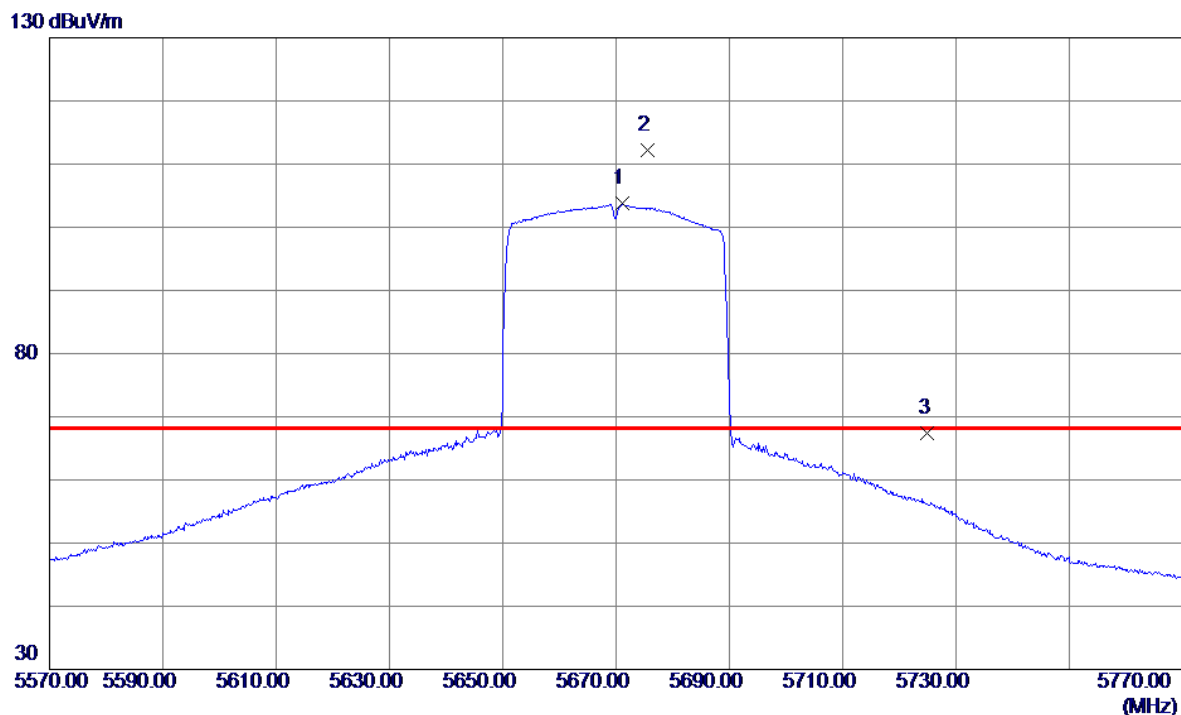


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5671.2000	90.75	13.07	103.82	999.00	-895.18	AVG	No Limit
2 *	5675.5000	99.16	13.09	112.25	68.20	44.05	Peak	No Limit
3	5725.0000	54.12	13.24	67.36	68.20	-0.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

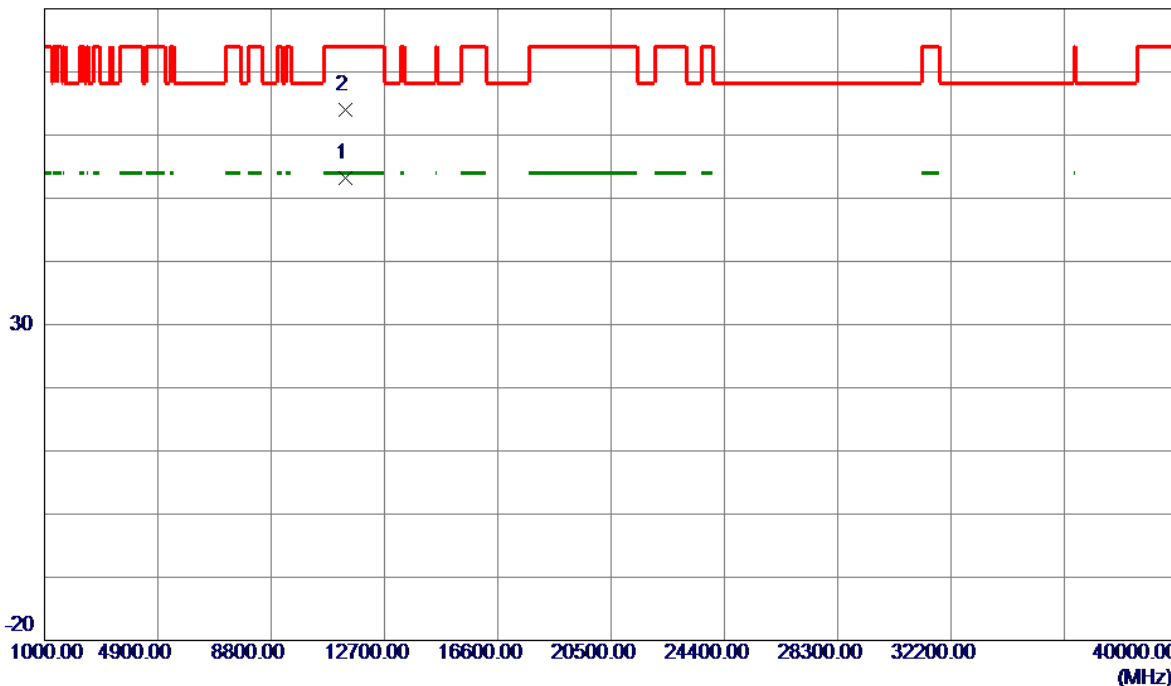


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11337.5000	46.50	6.61	53.11	54.00	-0.89	AVG	
2	11345.7000	57.35	6.61	63.96	74.00	-10.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

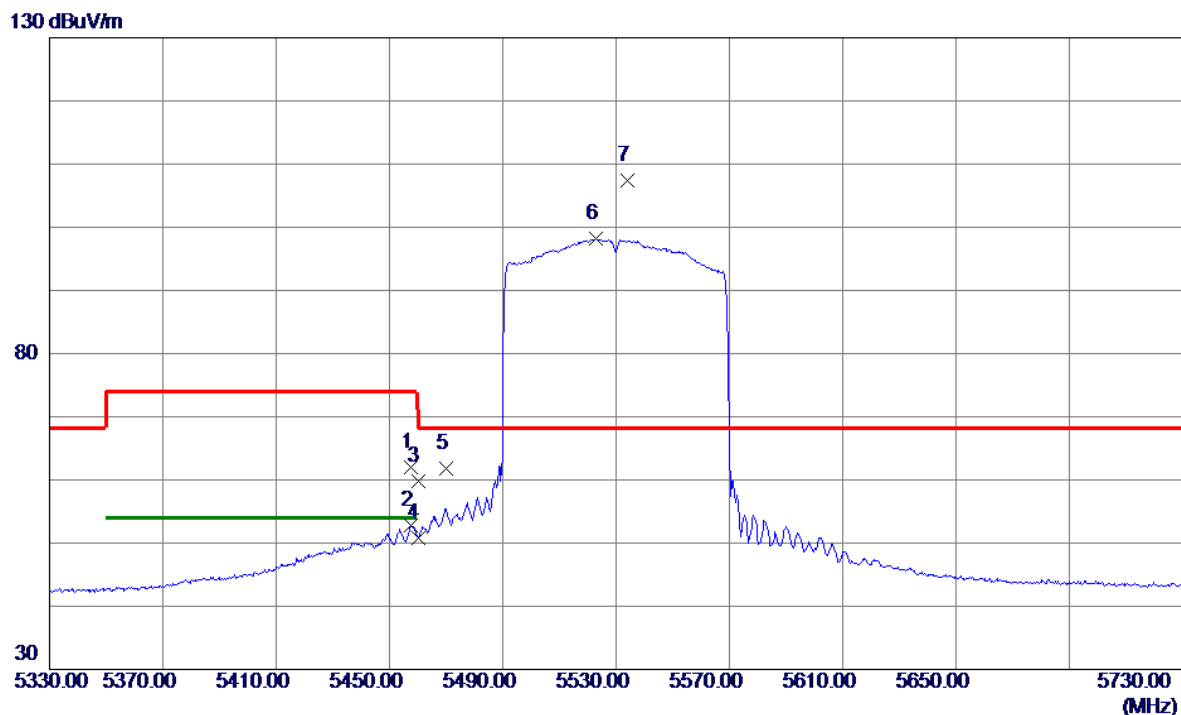


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.6000	49.57	12.46	62.03	74.00	-11.97	Peak	
2	5457.6000	40.25	12.46	52.71	54.00	-1.29	AVG	
3	5460.0000	47.41	12.46	59.87	74.00	-14.13	Peak	
4	5460.0000	38.37	12.46	50.83	54.00	-3.17	AVG	
5	5470.0000	49.35	12.49	61.84	68.20	-6.36	Peak	
6	5523.0000	85.50	12.62	98.12	999.00	-900.88	AVG	No Limit
7 *	5534.0000	94.81	12.66	107.47	68.20	39.27	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

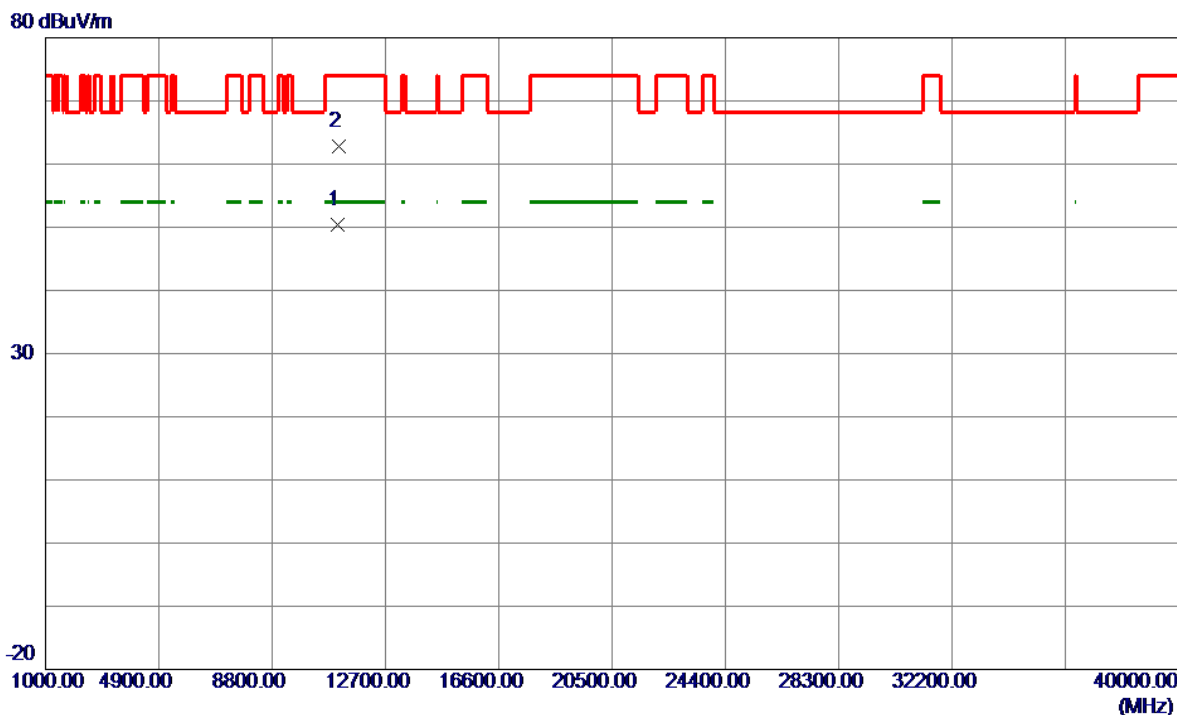


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11067.8000	44.00	6.36	50.36	54.00	-3.64	AVG	
2	11078.8000	56.41	6.37	62.78	74.00	-11.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

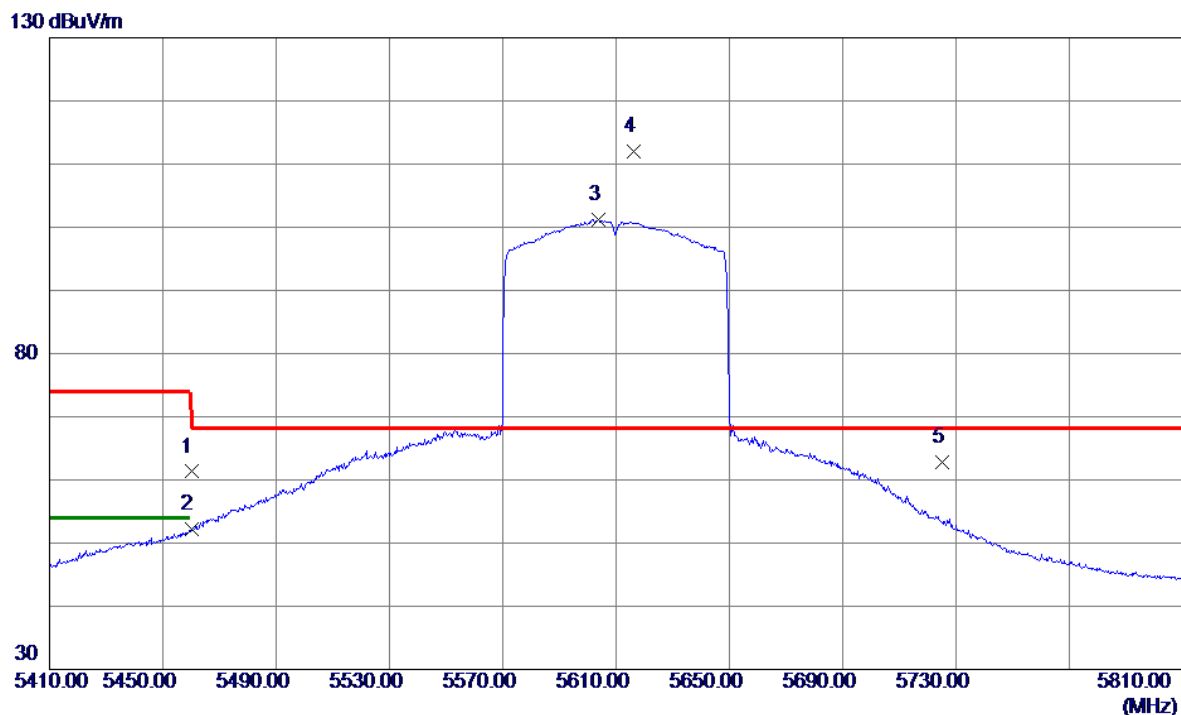


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	48.84	12.46	61.30	74.00	-12.70	Peak	
2	5460.0000	39.83	12.46	52.29	54.00	-1.71	AVG	
3	5603.8000	88.32	12.87	101.19	999.00	-897.81	AVG	No Limit
4 *	5616.2000	99.02	12.91	111.93	68.20	43.73	Peak	No Limit
5	5725.0000	49.59	13.24	62.83	68.20	-5.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

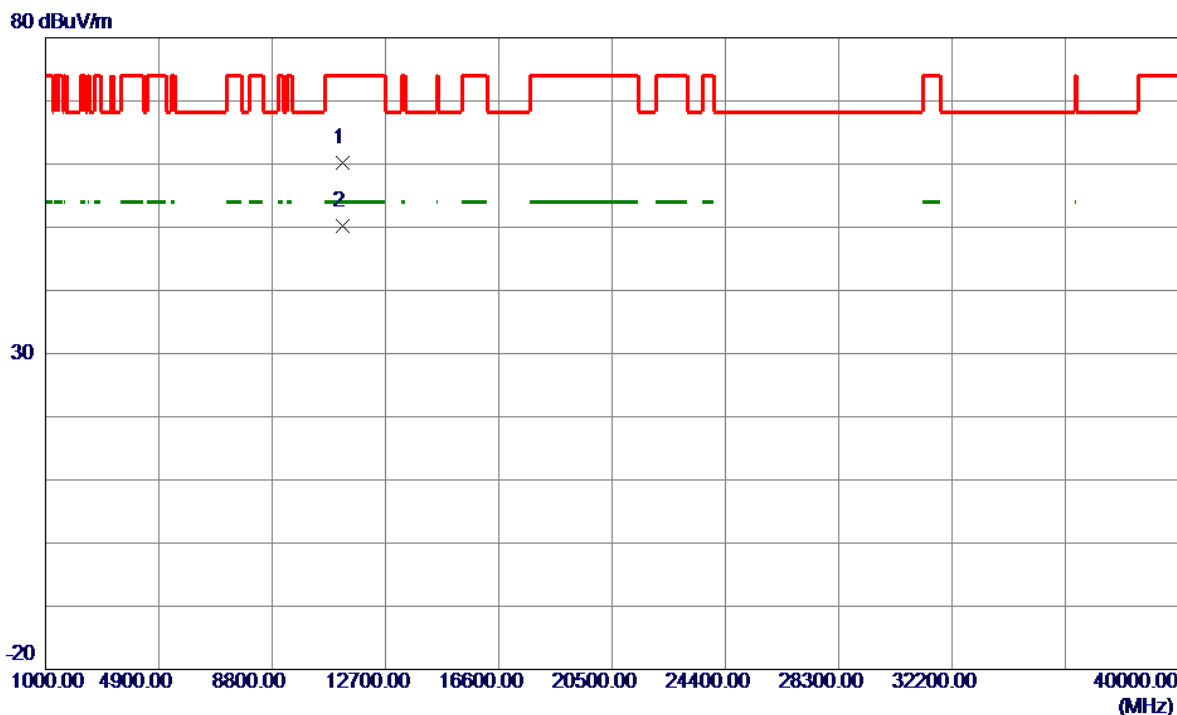


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11218.3000	53.73	6.50	60.23	74.00	-13.77	Peak	
2 *	11220.0000	43.70	6.50	50.20	54.00	-3.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

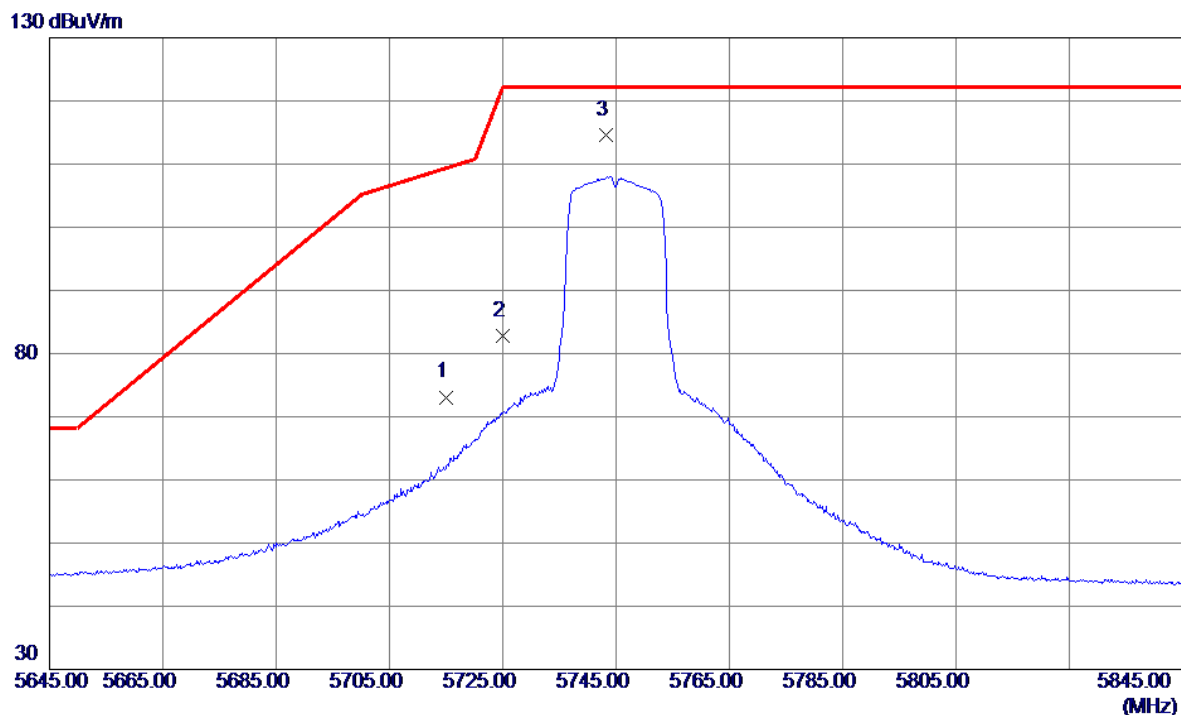


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	59.89	13.21	73.10	109.40	-36.30	Peak	
2	5725.0000	69.59	13.24	82.83	122.20	-39.37	Peak	
3 *	5743.3000	101.39	13.29	114.68	122.20	-7.52	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

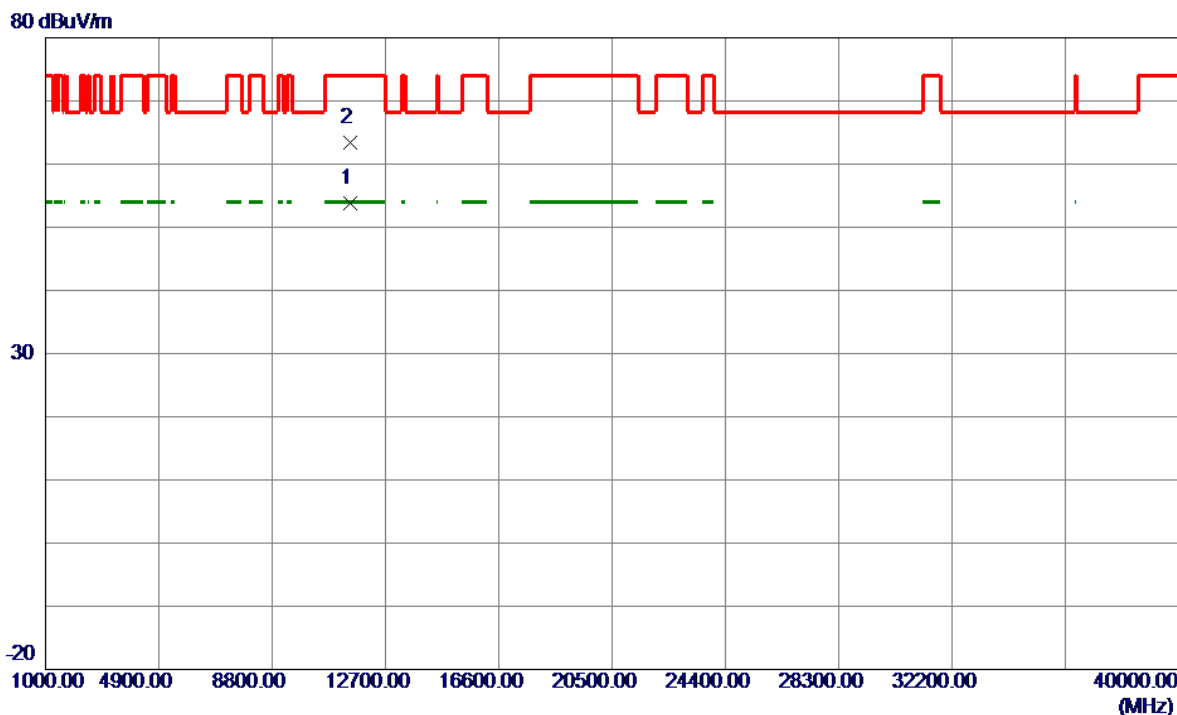


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.5000	47.11	6.75	53.86	54.00	-0.14	AVG	
2	11490.0000	56.66	6.75	63.41	74.00	-10.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

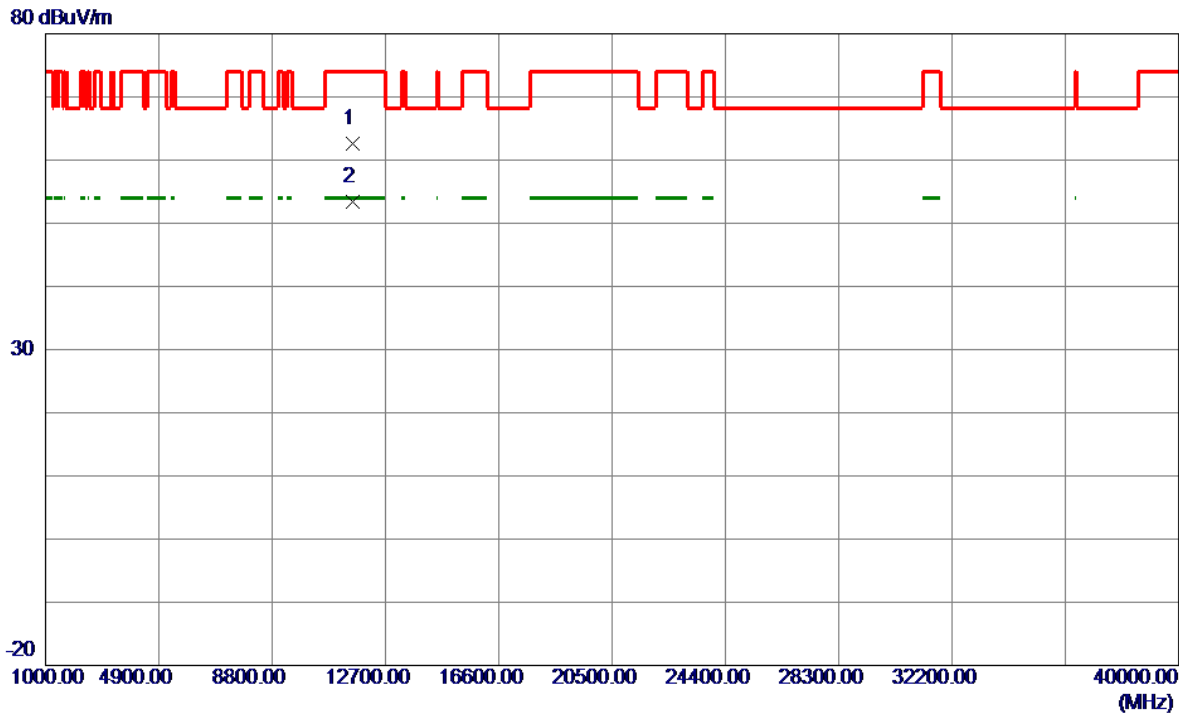


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11564.1000	55.89	6.74	62.63	74.00	-11.37	Peak	
2 *	11573.9000	46.71	6.73	53.44	54.00	-0.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

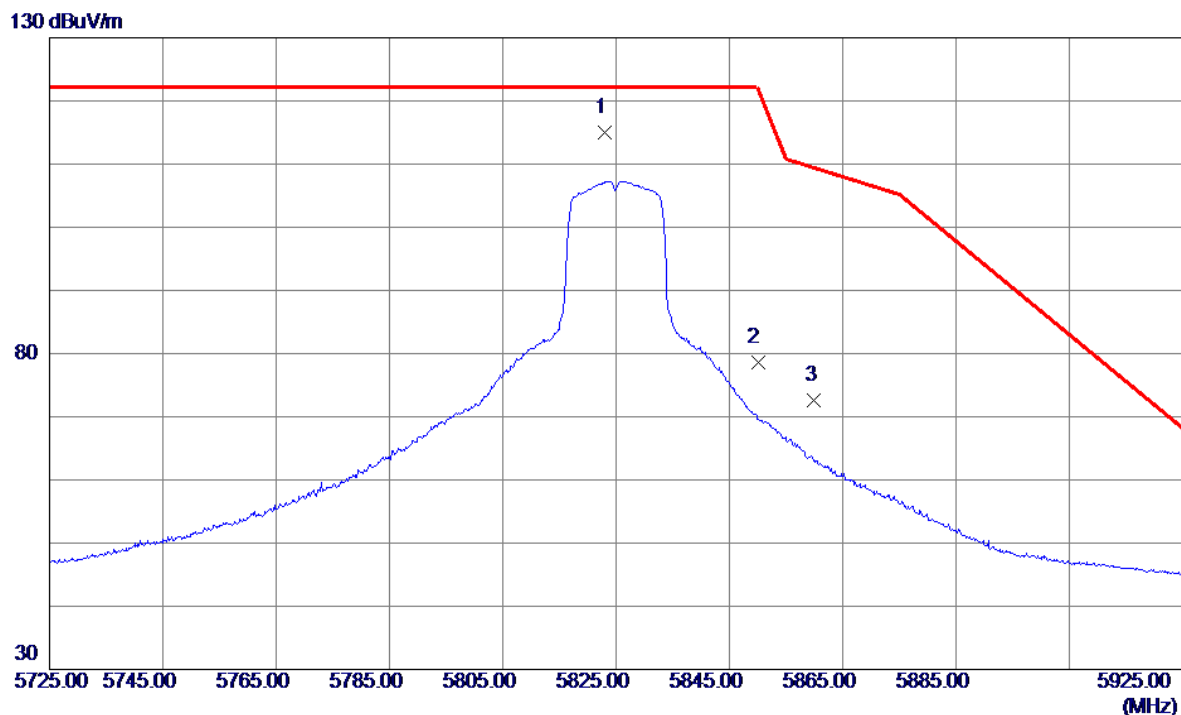


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5822.9000	101.48	13.53	115.01	122.20	-7.19	Peak	No Limit
2	5850.0000	64.90	13.62	78.52	122.20	-43.68	Peak	
3	5860.0000	58.94	13.65	72.59	109.40	-36.81	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

80 dBuV/m

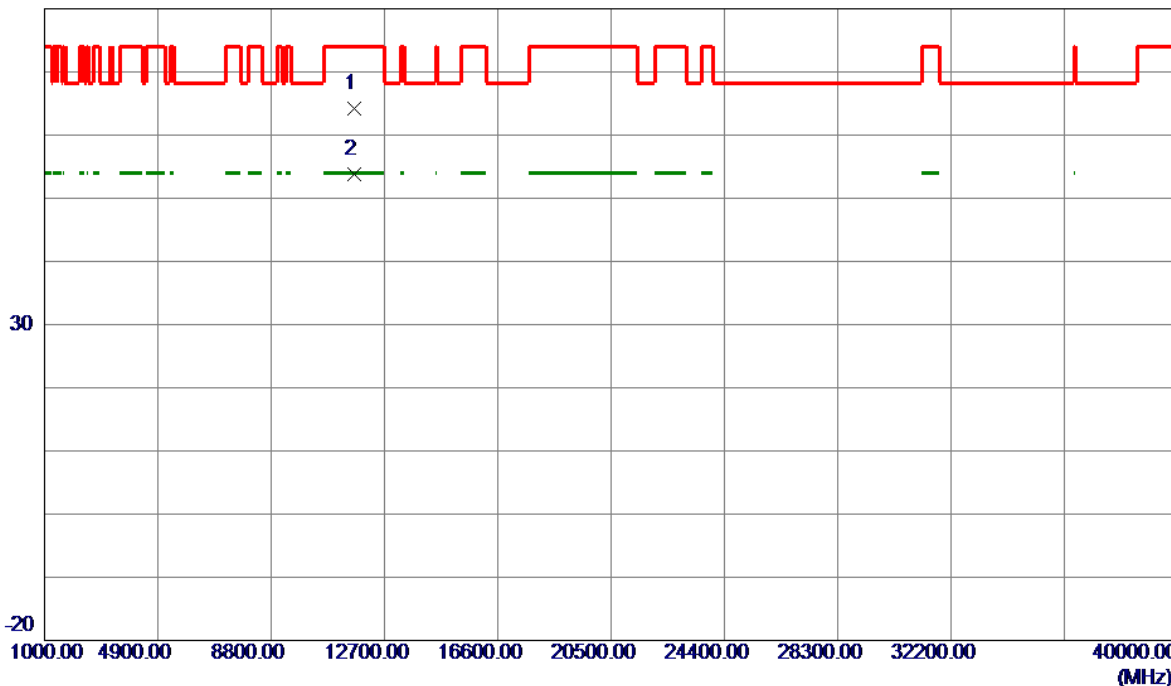


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.1000	57.46	6.71	64.17	74.00	-9.83	Peak	
2 *	11652.9000	47.05	6.71	53.76	54.00	-0.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

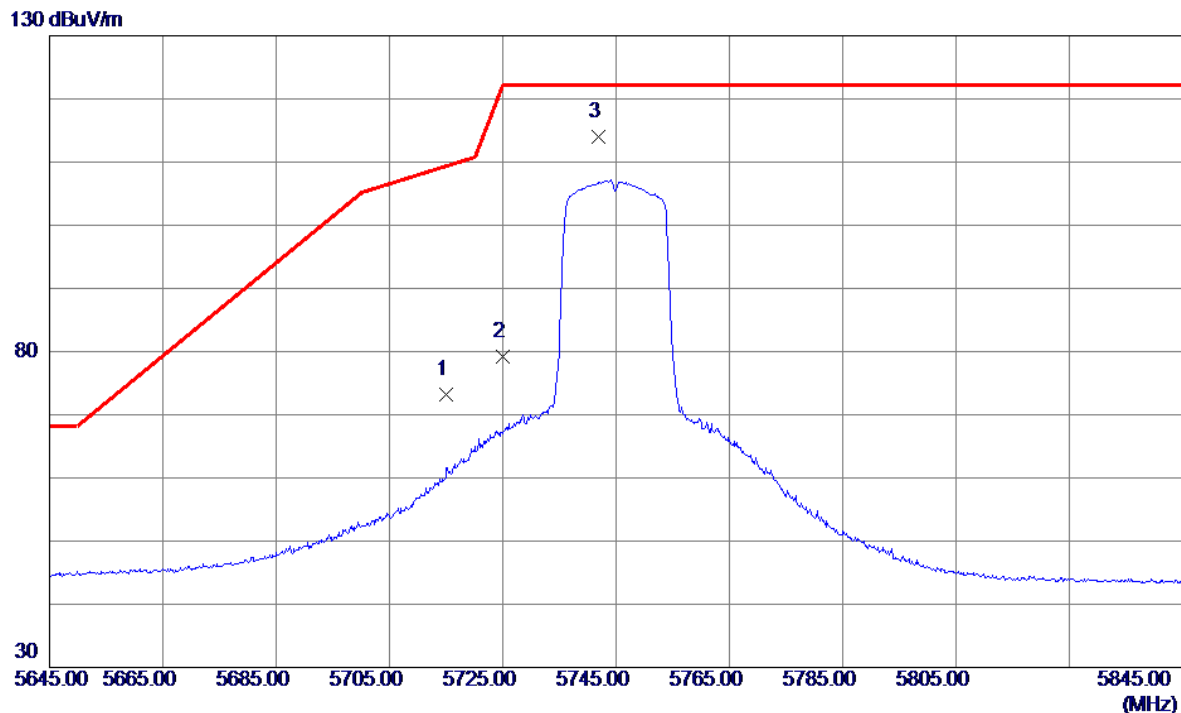


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	59.99	13.21	73.20	109.40	-36.20	Peak	
2	5725.0000	65.89	13.24	79.13	122.20	-43.07	Peak	
3 *	5741.8000	100.74	13.29	114.03	122.20	-8.17	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

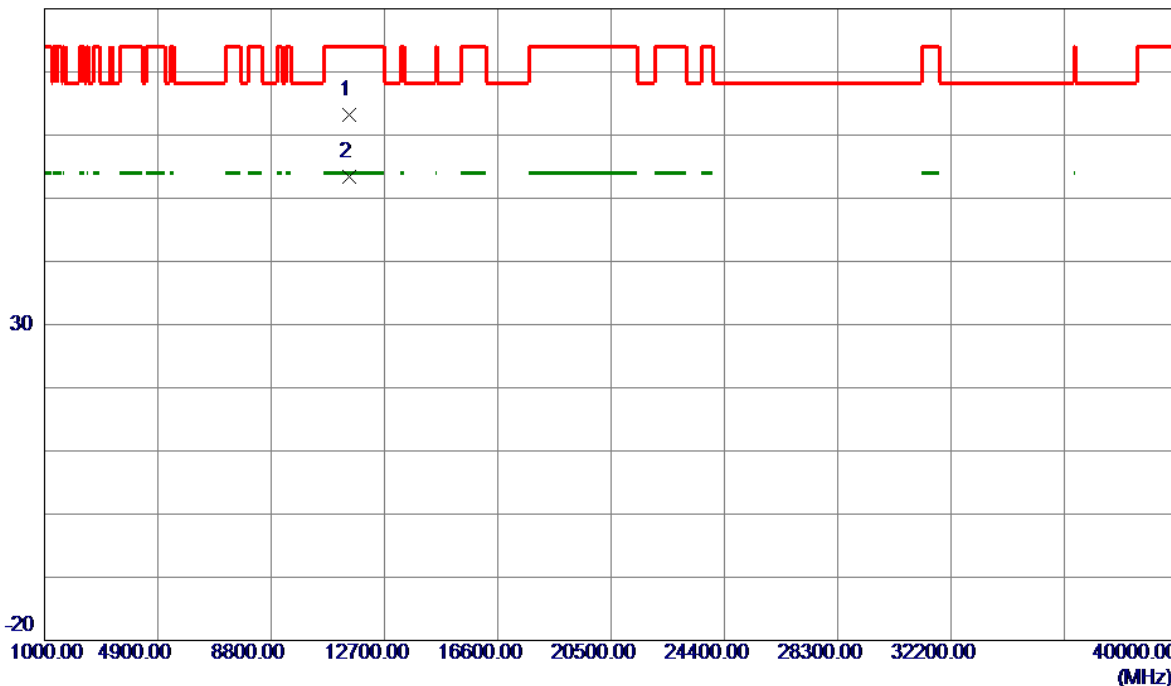


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.1000	56.51	6.75	63.26	74.00	-10.74	Peak	
2 *	11492.0000	46.67	6.75	53.42	54.00	-0.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

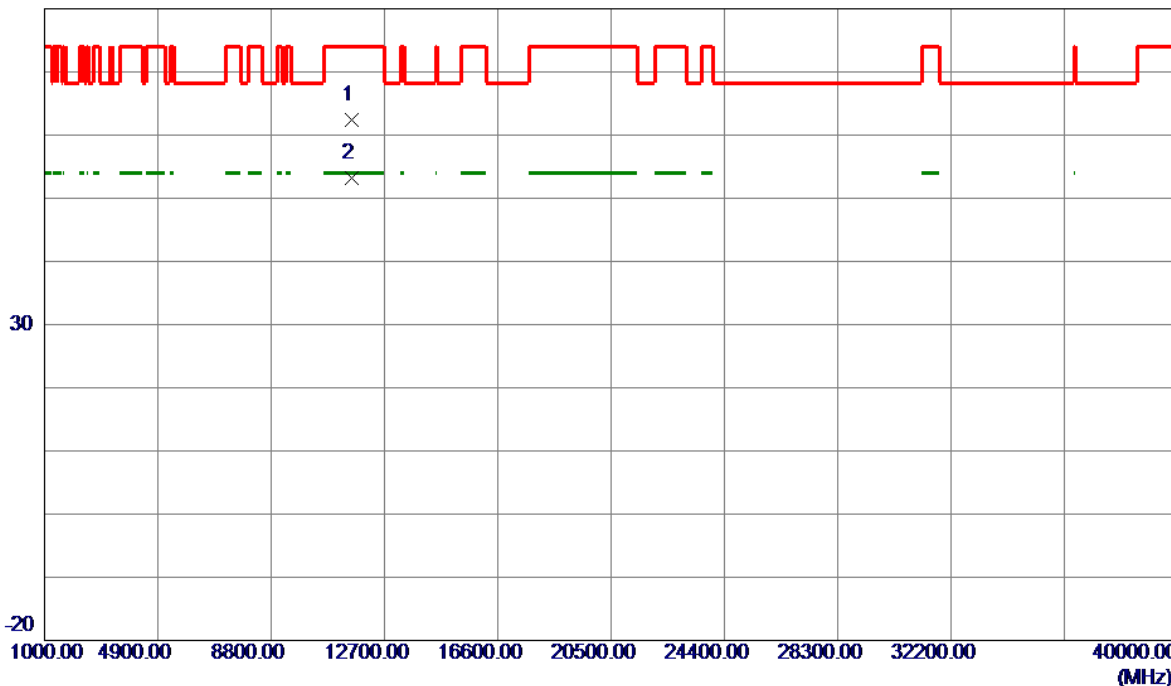


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.3000	55.64	6.74	62.38	74.00	-11.62	Peak	
2 *	11571.8000	46.47	6.74	53.21	54.00	-0.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

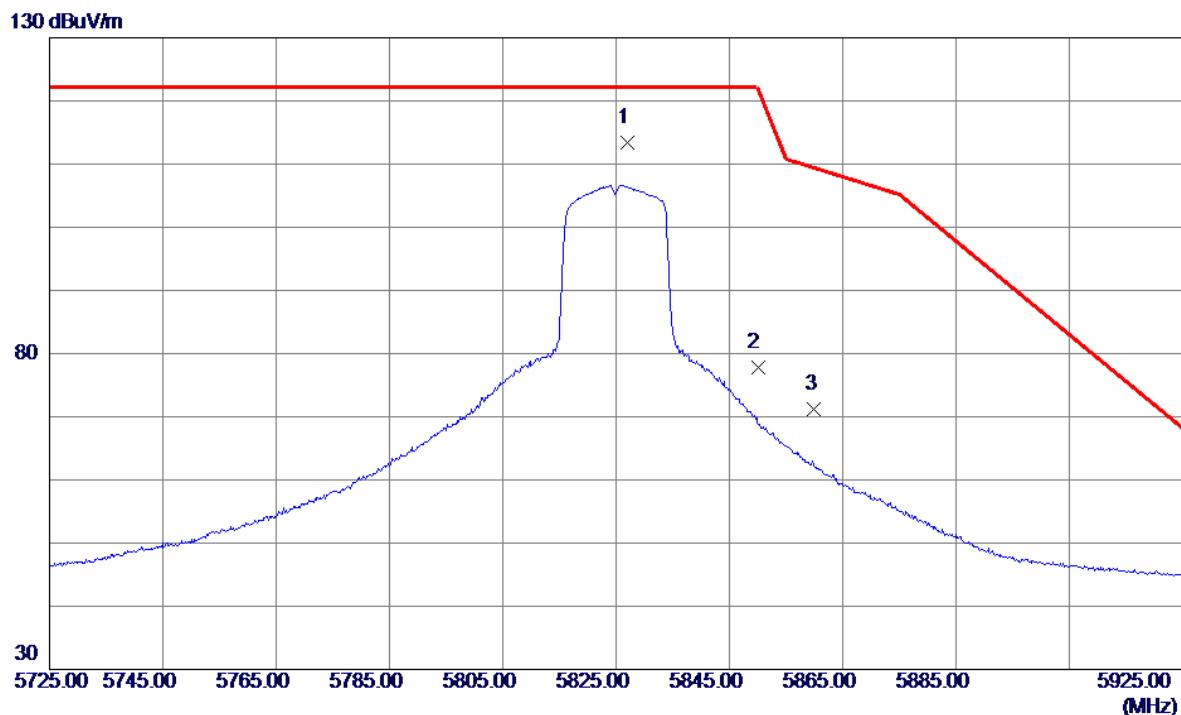


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.9000	99.85	13.55	113.40	122.20	-8.80	Peak	No Limit
2	5850.0000	64.18	13.62	77.80	122.20	-44.40	Peak	
3	5860.0000	57.47	13.65	71.12	109.40	-38.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

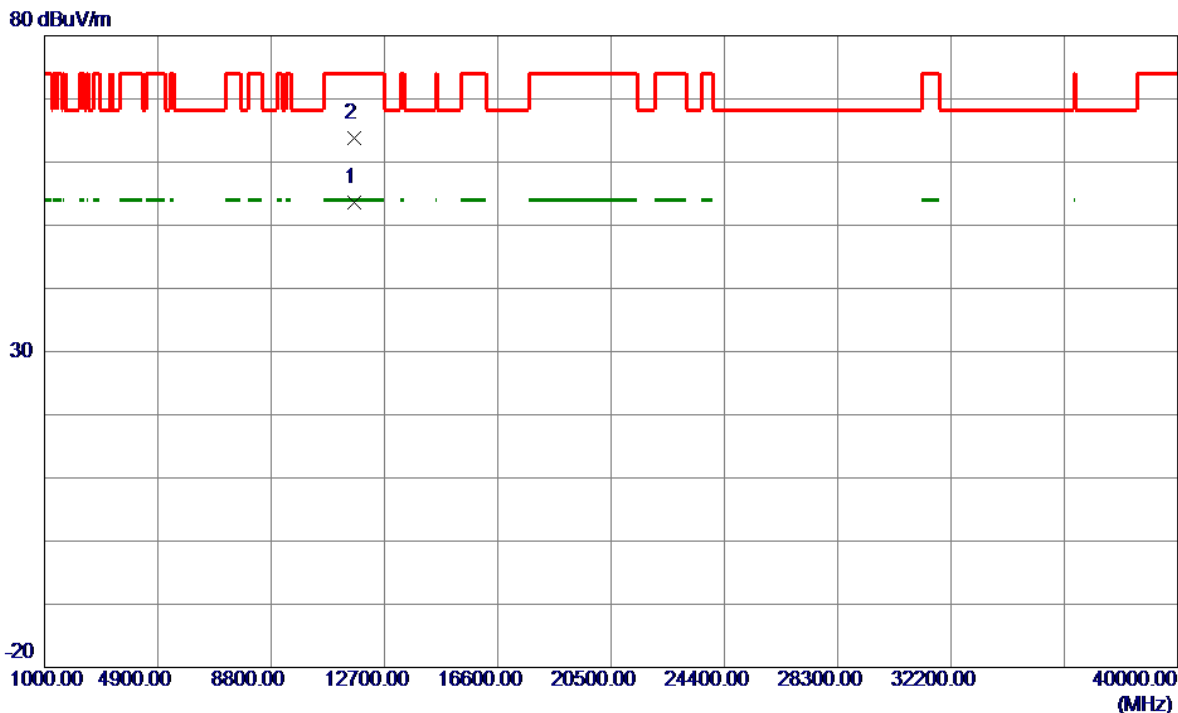


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.6000	46.80	6.71	53.51	54.00	-0.49	AVG	
2	11654.0000	57.10	6.71	63.81	74.00	-10.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

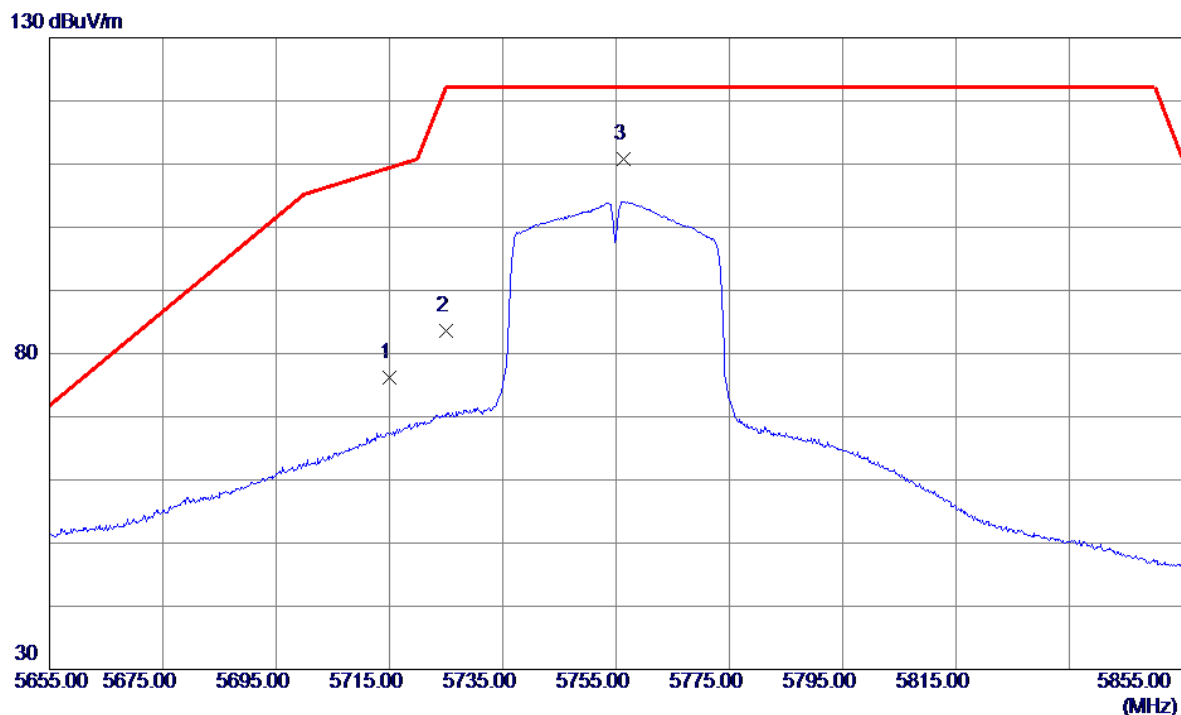


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	62.91	13.21	76.12	109.40	-33.28	Peak	
2	5725.0000	70.43	13.24	83.67	122.20	-38.53	Peak	
3 *	5756.4000	97.52	13.33	110.85	122.20	-11.35	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

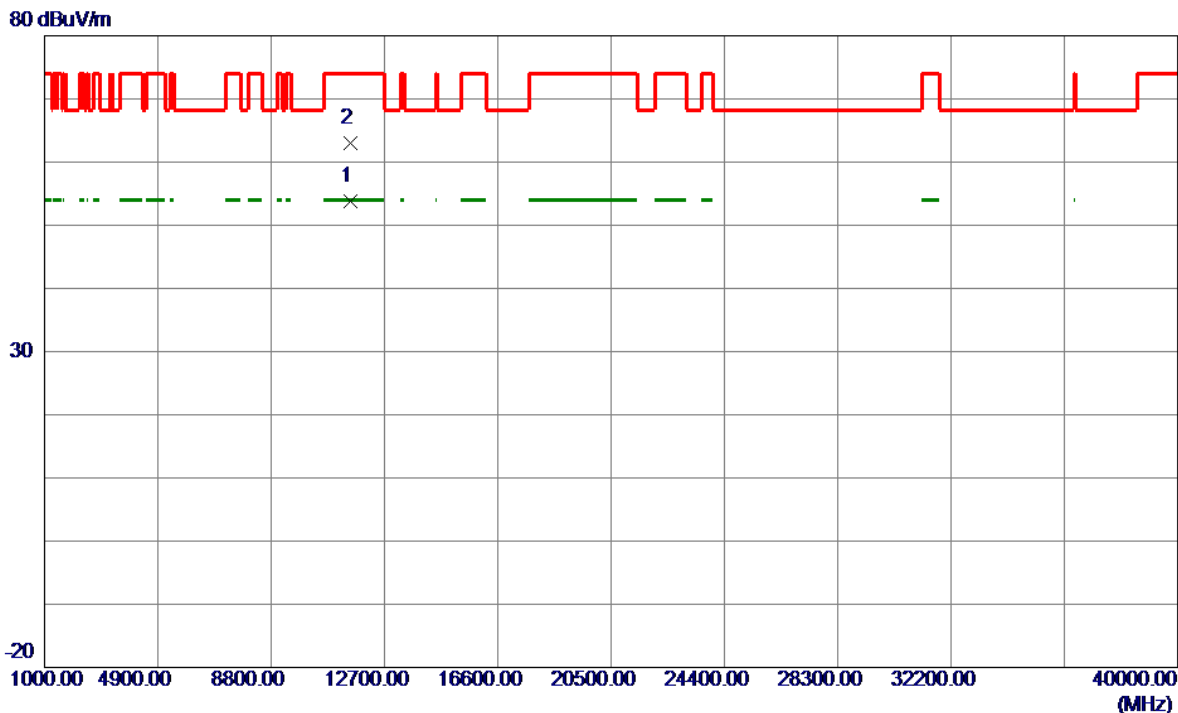


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.2000	47.05	6.75	53.80	54.00	-0.20	AVG	
2	11509.5000	56.33	6.75	63.08	74.00	-10.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

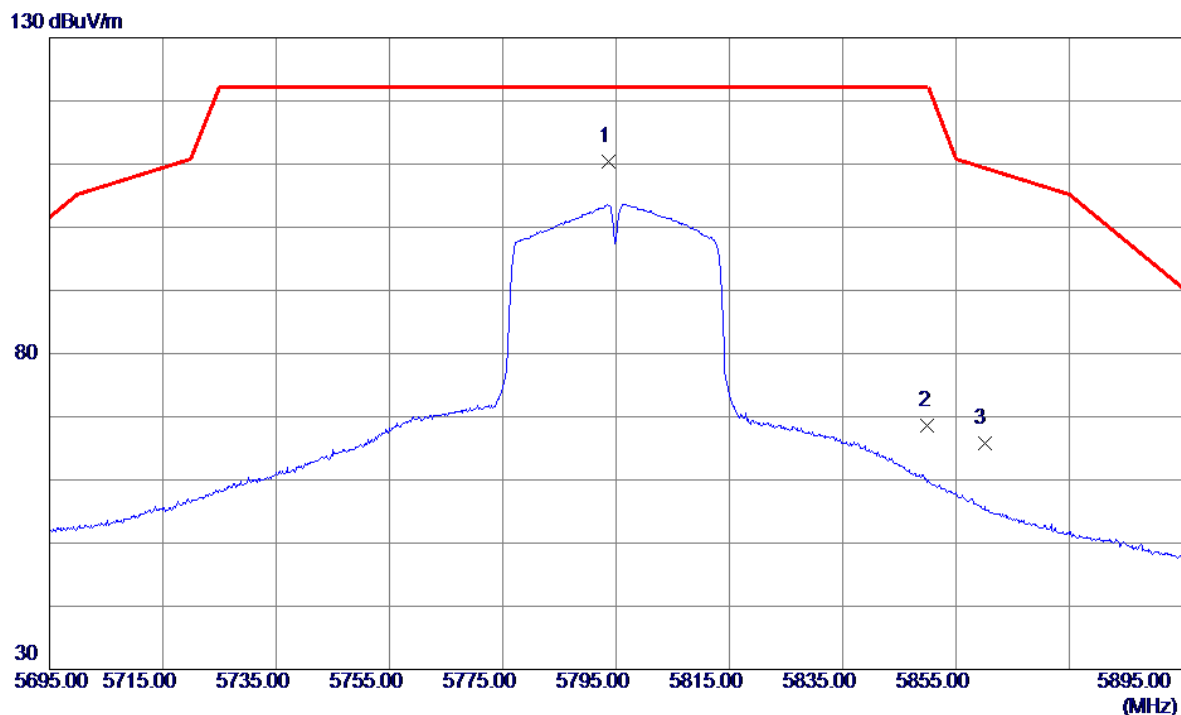


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5793.7000	97.01	13.44	110.45	122.20	-11.75	Peak	No Limit
2	5850.0000	54.96	13.62	68.58	122.20	-53.62	Peak	
3	5860.0000	52.07	13.65	65.72	109.40	-43.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

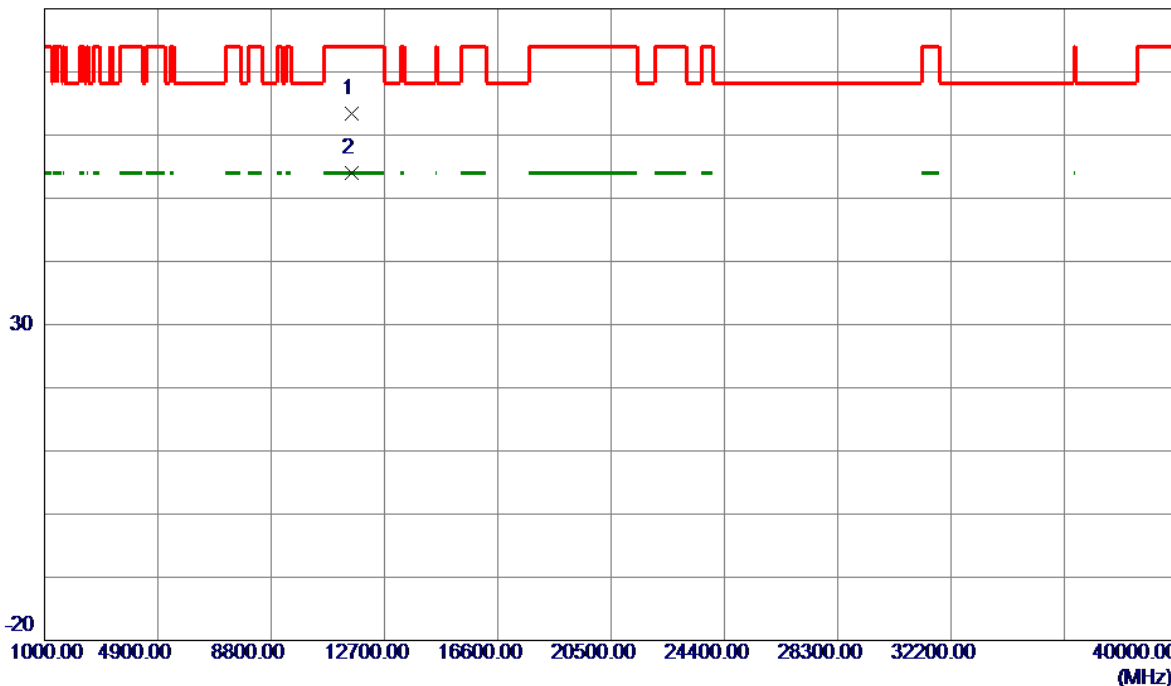


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.4000	56.75	6.73	63.48	74.00	-10.52	Peak	
2 *	11589.5000	47.18	6.73	53.91	54.00	-0.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

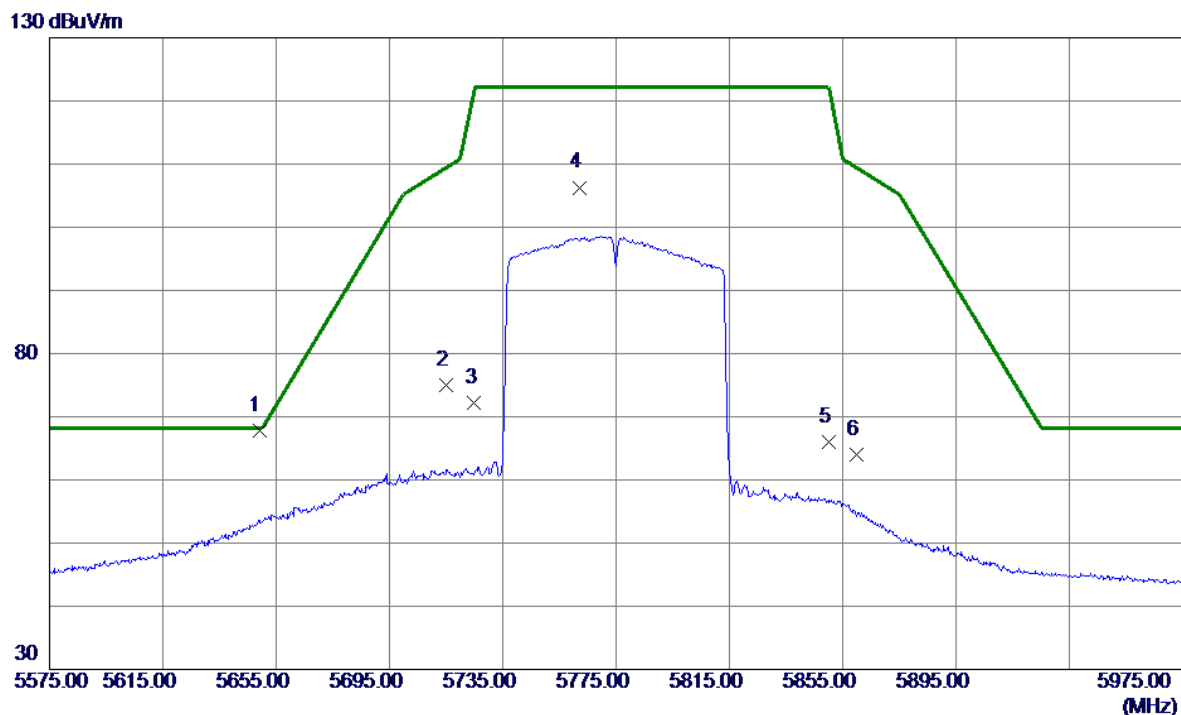


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5649.0000	54.72	13.01	67.73	68.20	-0.47	Peak	
2	5715.0000	61.77	13.21	74.98	109.40	-34.42	Peak	
3	5725.0000	58.90	13.24	72.14	122.20	-50.06	Peak	
4	5762.0000	92.95	13.35	106.30	122.20	-15.90	Peak	No Limit
5	5850.0000	52.46	13.62	66.08	122.20	-56.12	Peak	
6	5860.0000	50.44	13.65	64.09	109.40	-45.31	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

80 dBuV/m

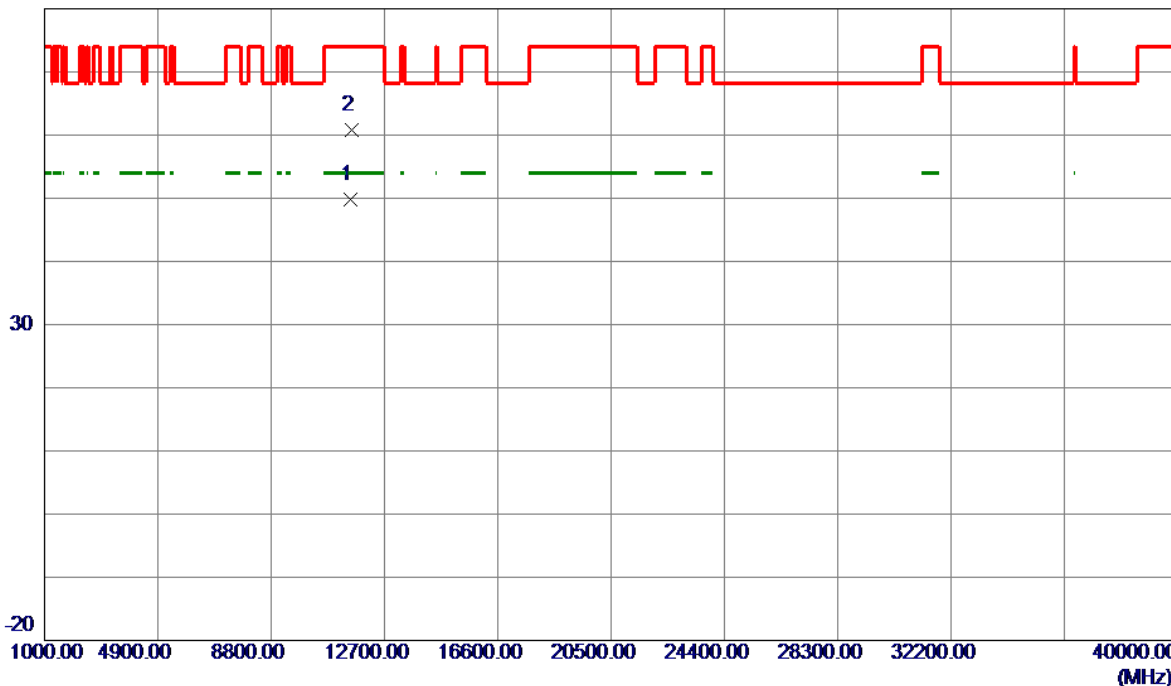


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11544.4000	43.03	6.74	49.77	54.00	-4.23	AVG	
2	11566.3000	54.05	6.74	60.79	74.00	-13.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

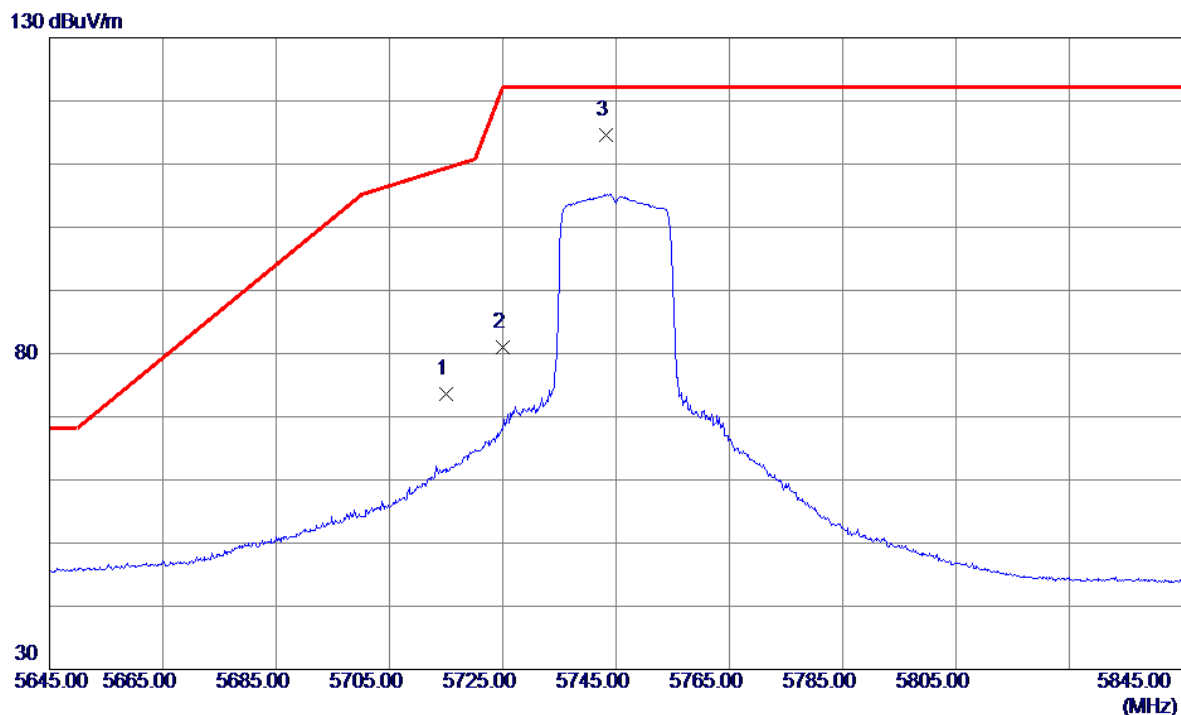


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	60.46	13.21	73.67	109.40	-35.73	Peak	
2	5725.0000	67.85	13.24	81.09	122.20	-41.11	Peak	
3 *	5743.3000	101.27	13.29	114.56	122.20	-7.64	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

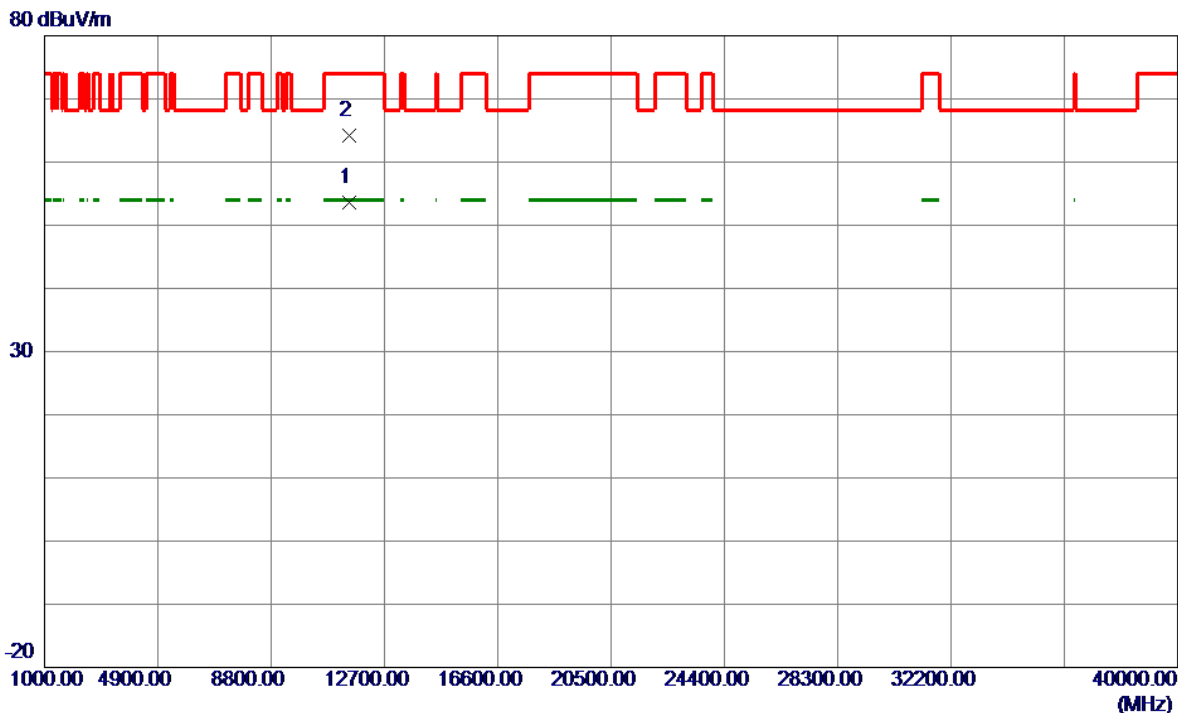


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11487.2000	46.91	6.74	53.65	54.00	-0.35	AVG	
2	11489.5000	57.36	6.75	64.11	74.00	-9.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

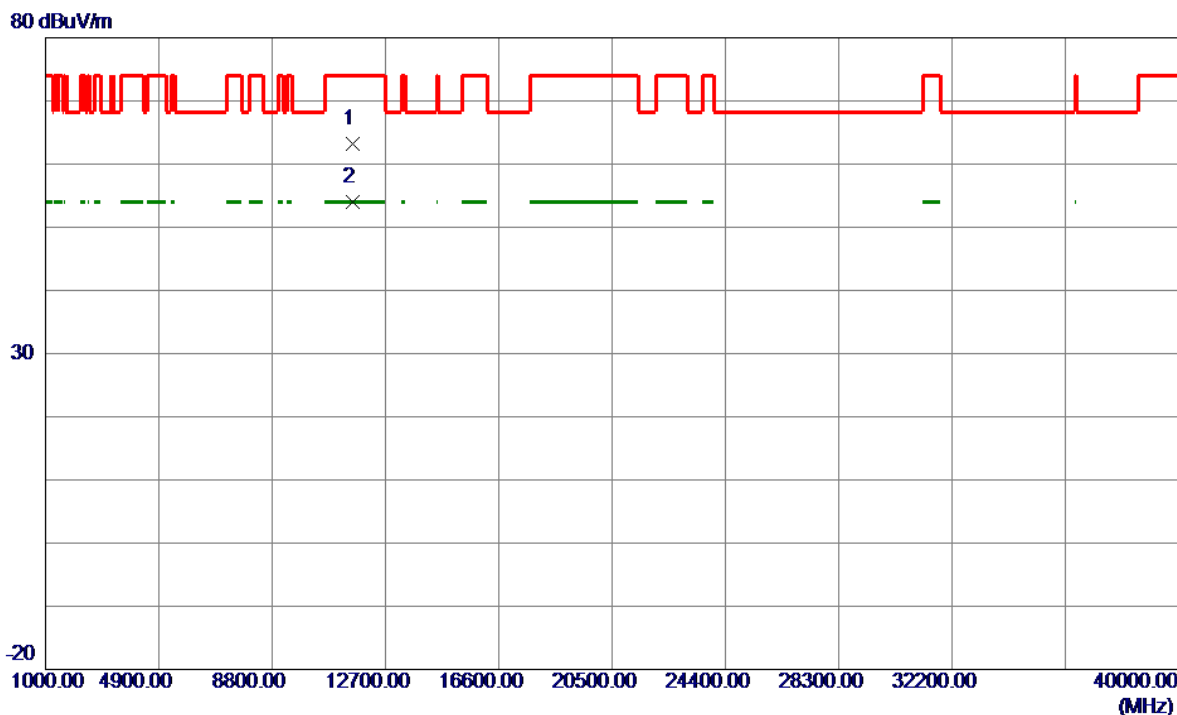


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11567.5000	56.52	6.74	63.26	74.00	-10.74	Peak	
2 *	11571.7000	47.21	6.74	53.95	54.00	-0.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

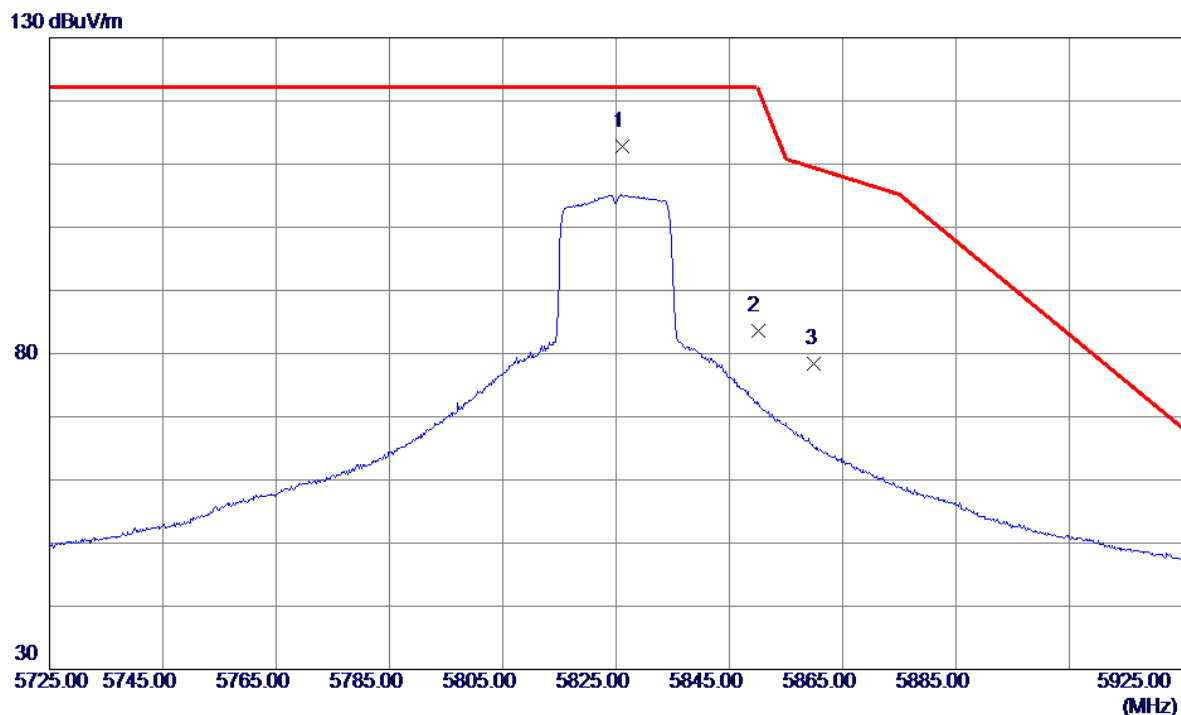


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5826.2000	99.17	13.54	112.71	122.20	-9.49	Peak	No Limit
2	5850.0000	69.89	13.62	83.51	122.20	-38.69	Peak	
3	5860.0000	64.66	13.65	78.31	109.40	-31.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

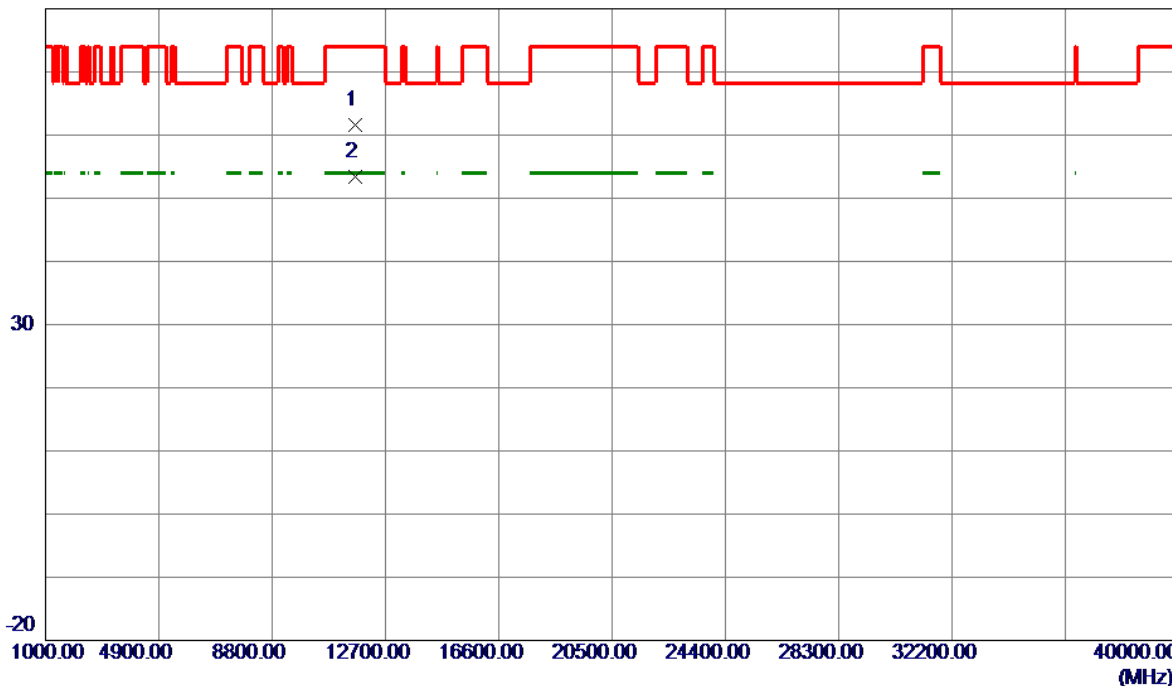


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.4000	54.88	6.71	61.59	74.00	-12.41	Peak	
2 *	11651.6000	46.65	6.71	53.36	54.00	-0.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

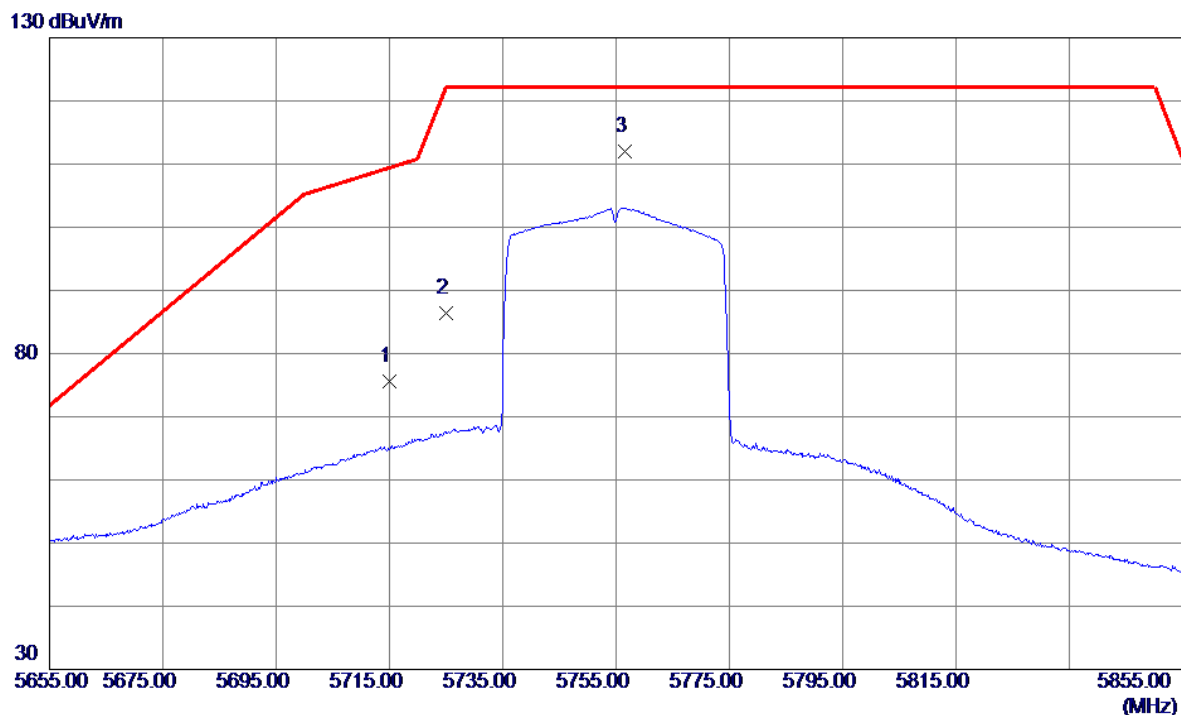


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	62.45	13.21	75.66	109.40	-33.74	Peak	
2	5725.0000	73.11	13.24	86.35	122.20	-35.85	Peak	
3 *	5756.6000	98.67	13.33	112.00	122.20	-10.20	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

80 dBuV/m

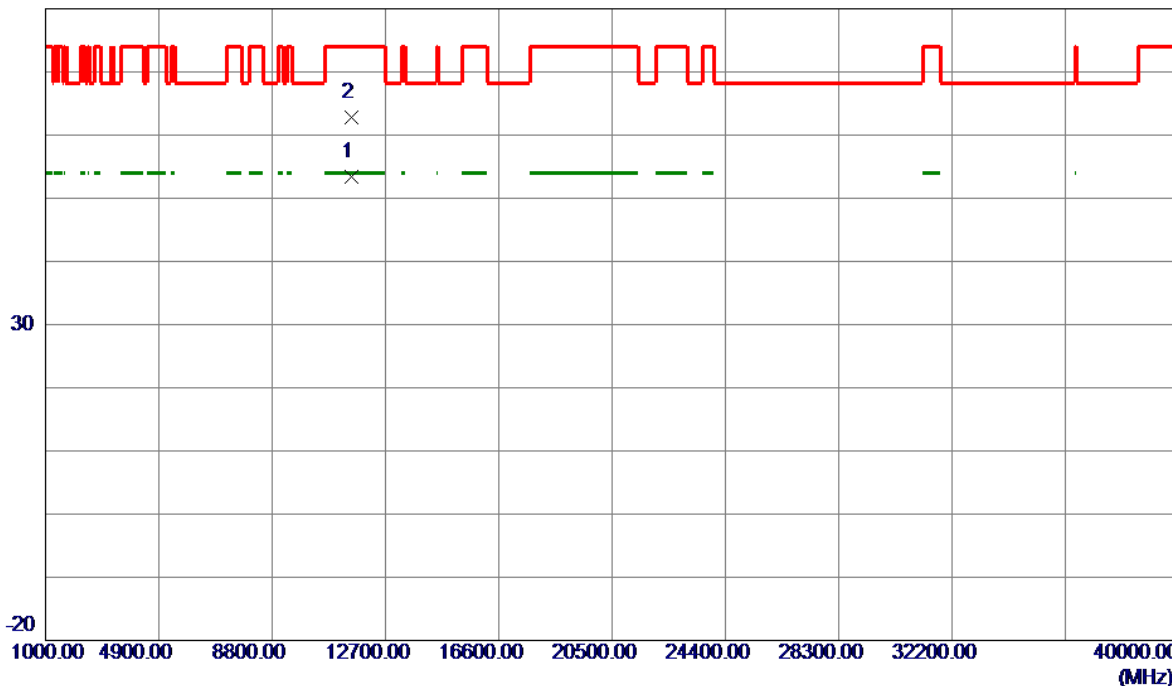


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.3000	46.58	6.75	53.33	54.00	-0.67	AVG	
2	11521.9000	55.96	6.75	62.71	74.00	-11.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

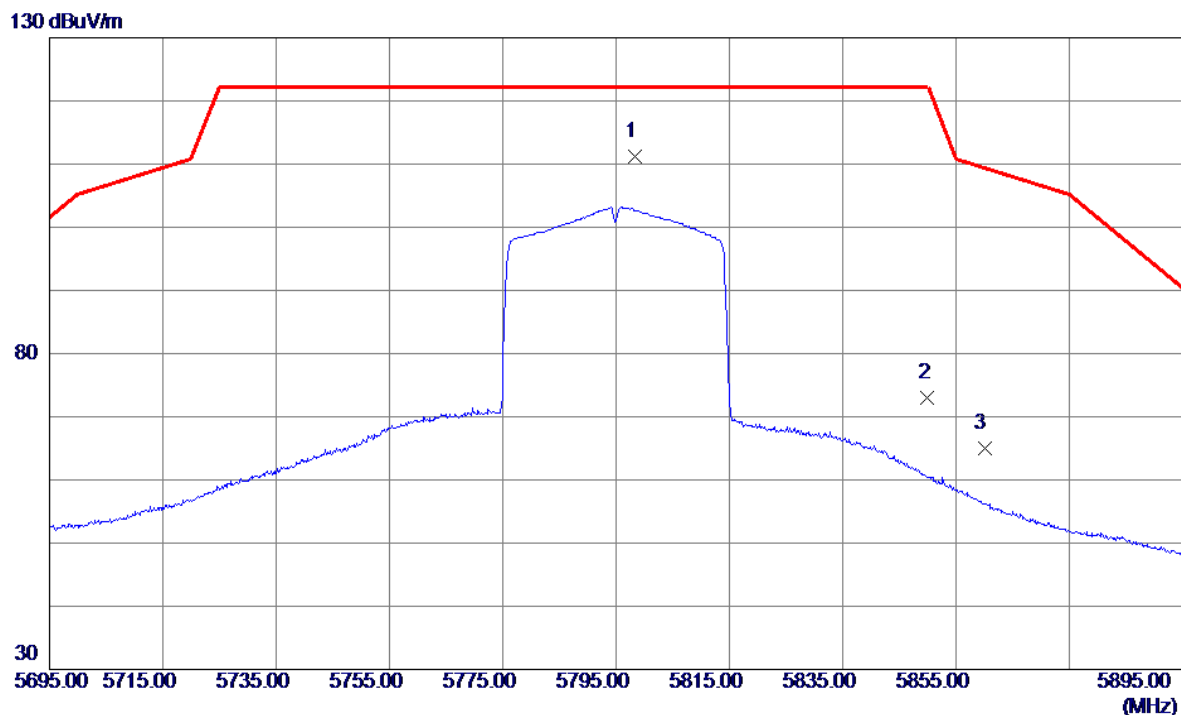


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5798.3000	97.72	13.46	111.18	122.20	-11.02	Peak	No Limit
2	5850.0000	59.45	13.62	73.07	122.20	-49.13	Peak	
3	5860.0000	51.38	13.65	65.03	109.40	-44.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

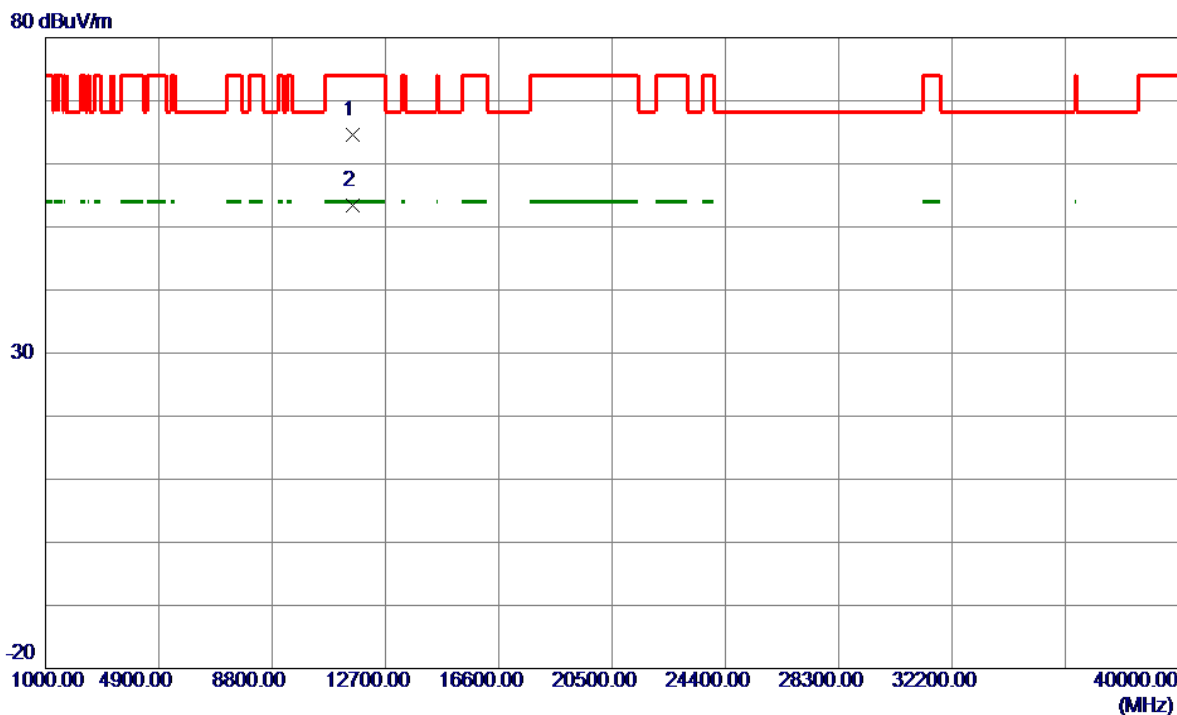


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11583.7000	57.85	6.73	64.58	74.00	-9.42	Peak	
2 *	11594.2000	46.59	6.73	53.32	54.00	-0.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

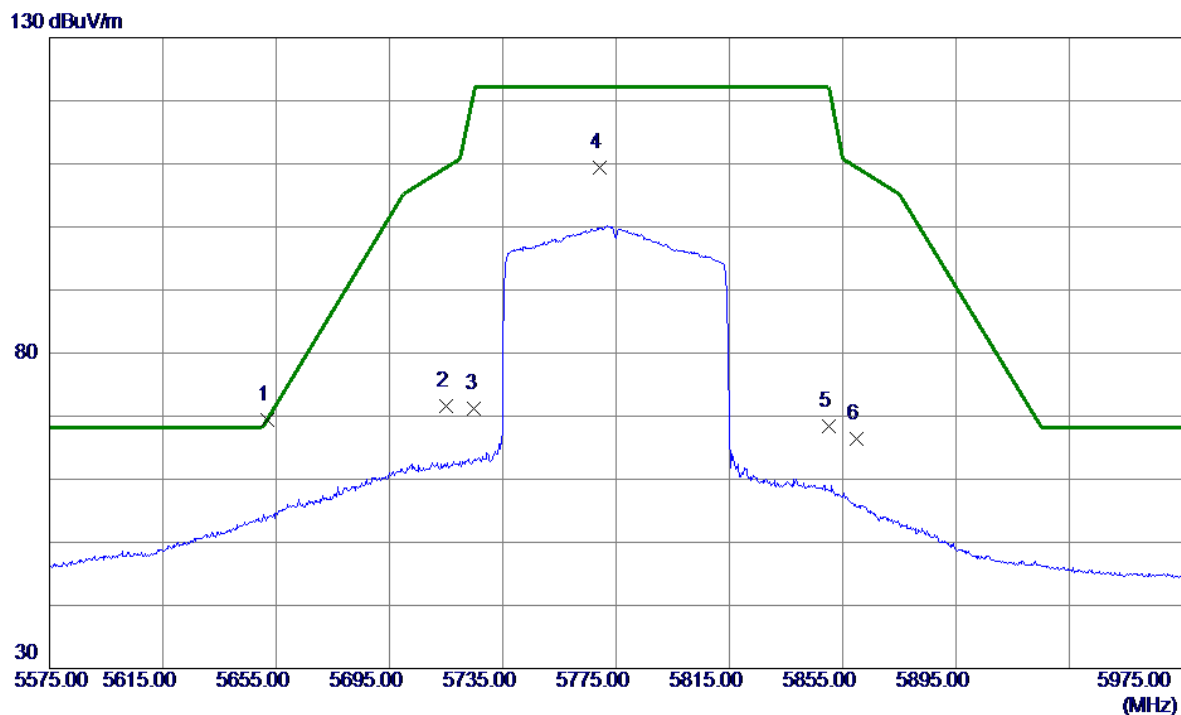


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.0000	56.41	13.02	69.43	69.68	-0.25	Peak	
2	5715.0000	58.47	13.21	71.68	109.40	-37.72	Peak	
3	5725.0000	57.88	13.24	71.12	122.20	-51.08	Peak	
4	5769.2000	95.95	13.37	109.32	122.20	-12.88	Peak	No Limit
5	5850.0000	54.79	13.62	68.41	122.20	-53.79	Peak	
6	5860.0000	52.77	13.65	66.42	109.40	-42.98	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

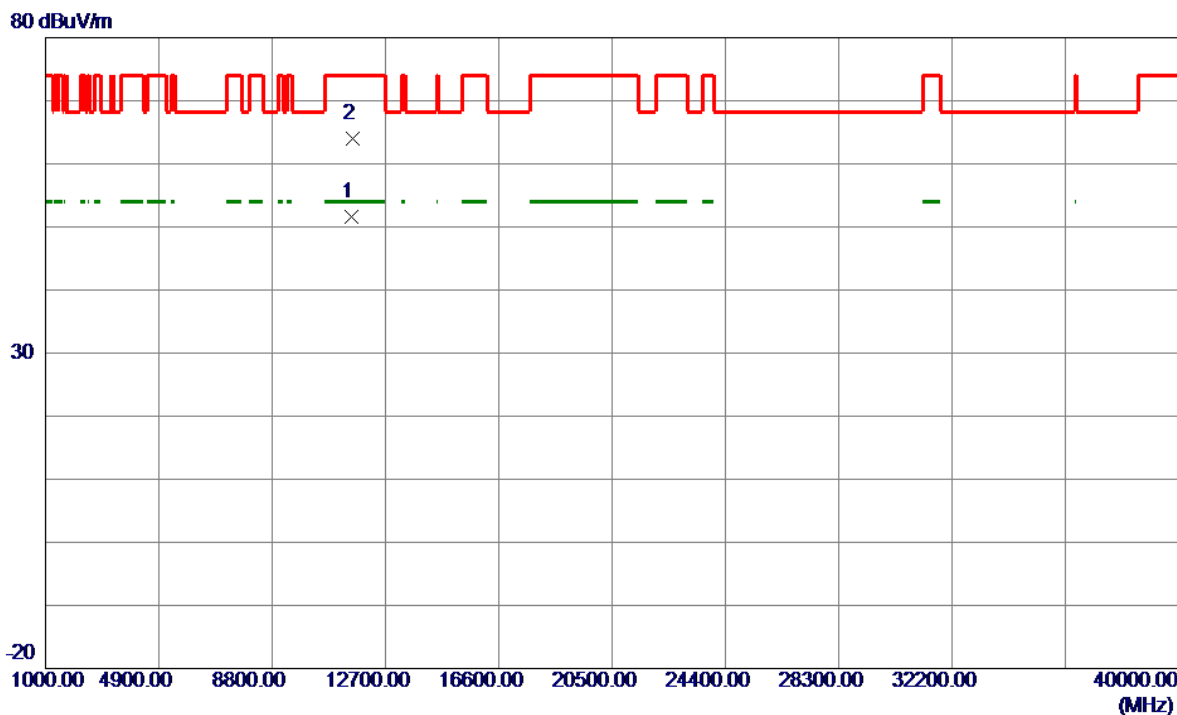

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11544.4000	44.84	6.74	51.58	54.00	-2.42	AVG	
2	11568.5000	57.24	6.74	63.98	74.00	-10.02	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.500	16.900
40	5200	20.250	17.000
48	5240	20.359	16.900

CH36

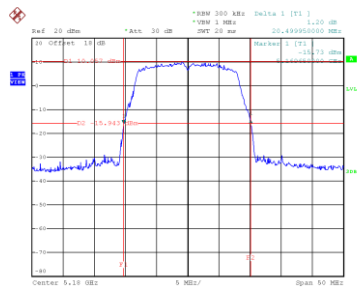


Date: 8.DEC.2023 15:33:58

CH40
26 dB Bandwidth

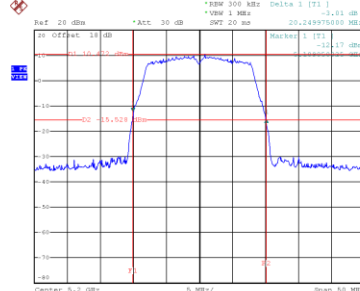


Date: 8.DEC.2023 15:35:03

CH48

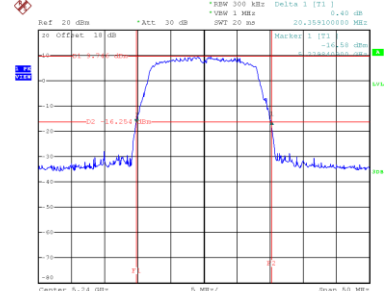


Date: 8.DEC.2023 15:36:06


99 % Occupied Bandwidth

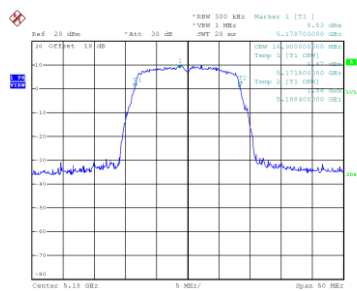

Date: 8.DEC.2023 15:33:31

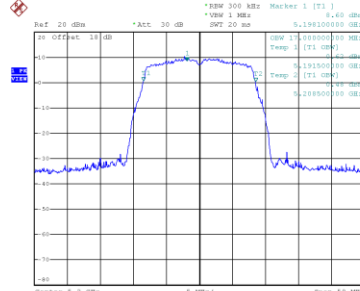

Date: 8.DEC.2023 15:34:36

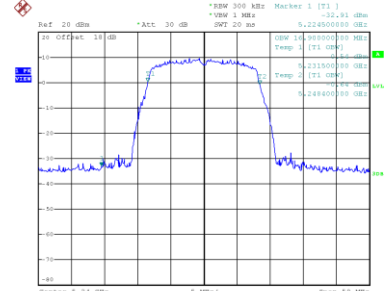


Date: 8.DEC.2023 15:35:39

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.790	17.900
40	5200	20.609	17.900
48	5240	20.750	17.900

CH36

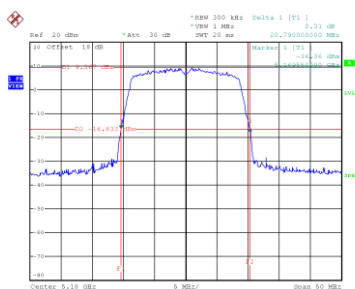


Date: 8.DEC.2023 15:56:52

CH40
26 dB Bandwidth

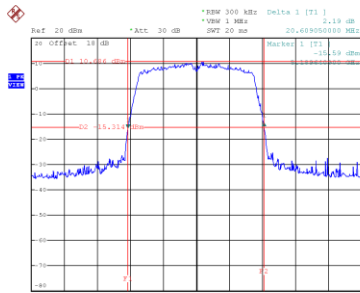


Date: 8.DEC.2023 15:58:25

CH48

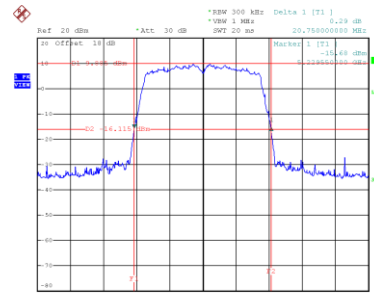


Date: 8.DEC.2023 15:59:26


99 % Occupied Bandwidth

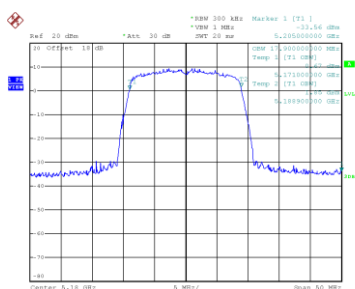

Date: 8.DEC.2023 15:56:26

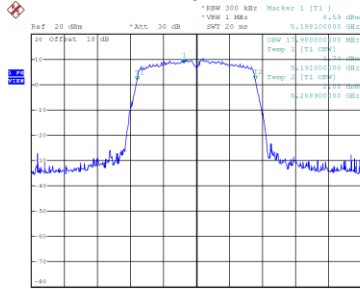

Date: 8.DEC.2023 15:57:59

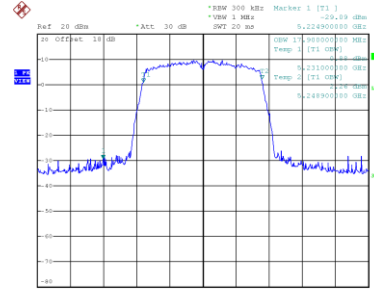


Date: 8.DEC.2023 15:59:00

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	131.400	76.000

CH42 26 dB Bandwidth

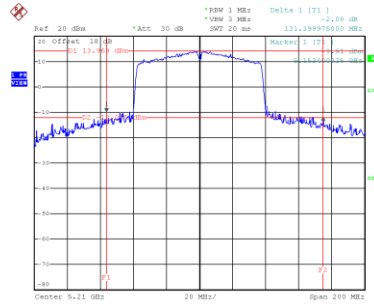

Date: 8.DEC.2023 16:32:41

99 % Occupied Bandwidth

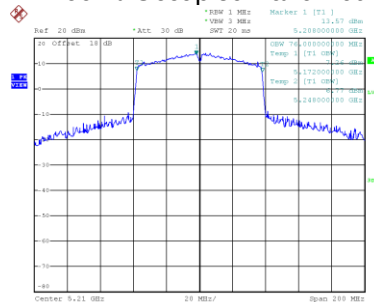


Date: 8.DEC.2023 16:31:52

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	29.748	19.300
40	5200	27.999	19.300
48	5240	20.250	18.900

CH36

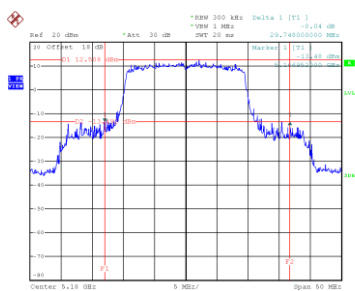


Date: 8.DEC.2023 16:42:45

CH40
26 dB Bandwidth

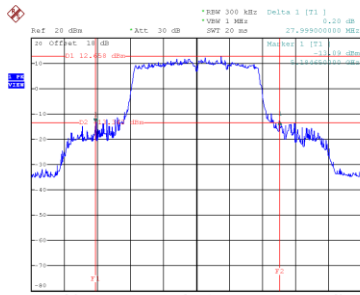


Date: 8.DEC.2023 16:44:00

CH48

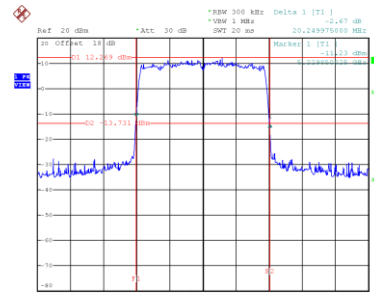


Date: 8.DEC.2023 16:45:06


99 % Occupied Bandwidth

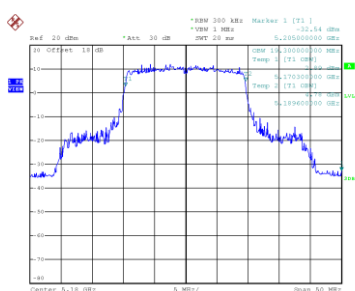

Date: 8.DEC.2023 16:42:13

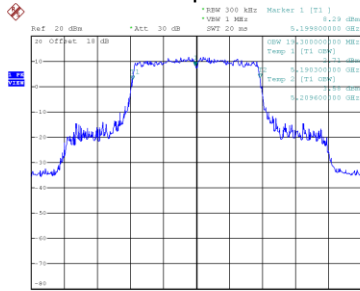

Date: 8.DEC.2023 16:43:32

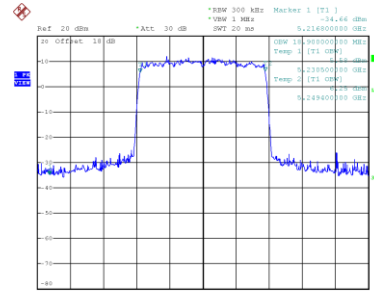


Date: 8.DEC.2023 16:44:39

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.300	38.000
46	5230	39.700	38.000

CH38

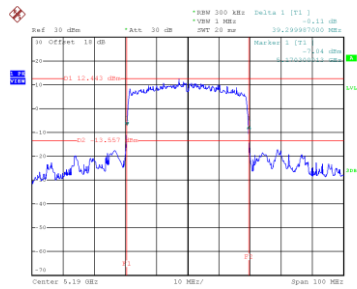


Date: 8.DEC.2023 16:57:32

CH46
26 dB Bandwidth

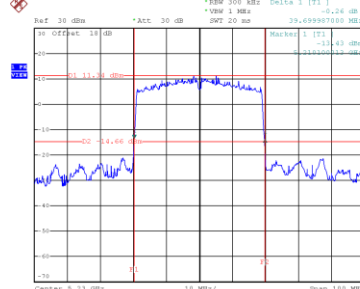


Date: 8.DEC.2023 16:58:45

99 % Occupied Bandwidth

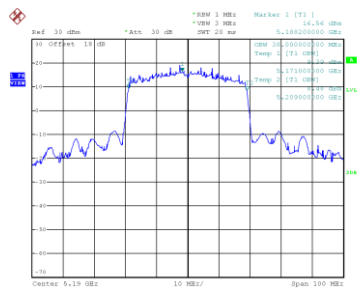

Date: 8.DEC.2023 16:56:55

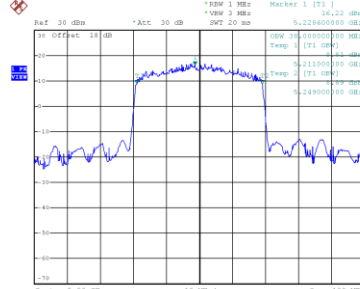


Date: 8.DEC.2023 16:58:19

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	96.390	77.600

CH42 26 dB Bandwidth

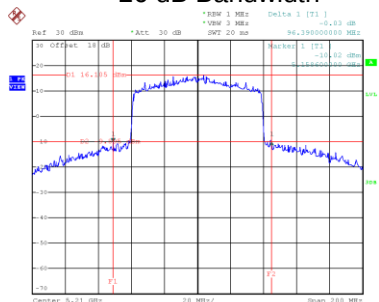

Date: 8.DEC.2023 17:18:09

99 % Occupied Bandwidth

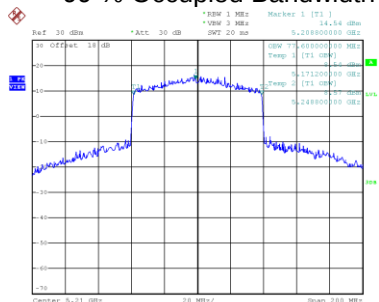


Date: 8.DEC.2023 17:17:37

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.550	17.000
60	5300	20.389	16.900
64	5320	20.500	17.000

CH52

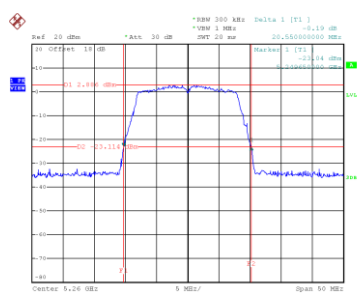


Date: 8.DEC.2023 15:39:19

CH60
26 dB Bandwidth

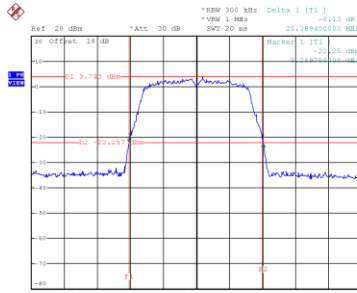


Date: 8.DEC.2023 15:40:27

CH64

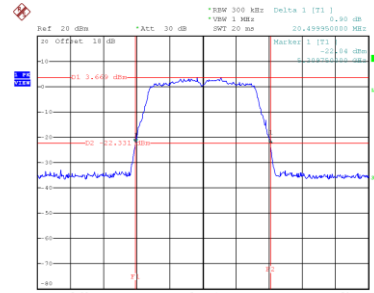


Date: 8.DEC.2023 15:41:33


99 % Occupied Bandwidth

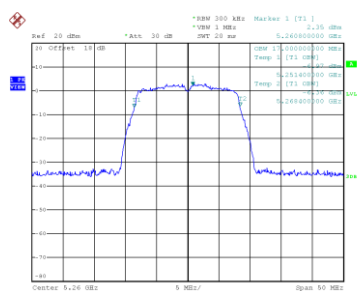

Date: 8.DEC.2023 15:39:19

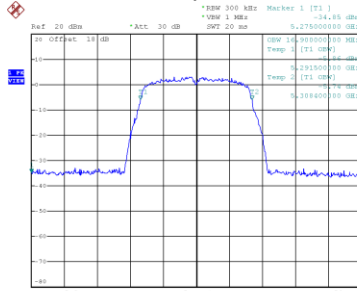

Date: 8.DEC.2023 15:40:27

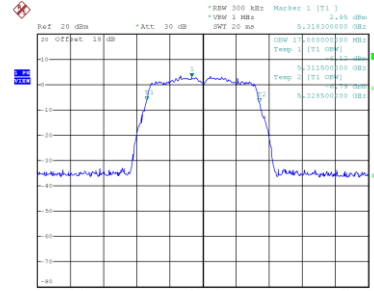


Date: 8.DEC.2023 15:41:06

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.789	17.900
60	5300	20.950	18.000
64	5320	20.850	18.000

CH52

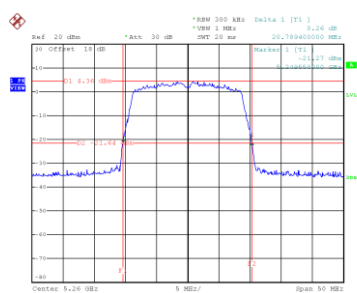


Date: 8.DEC.2023 16:00:43

CH60
26 dB Bandwidth

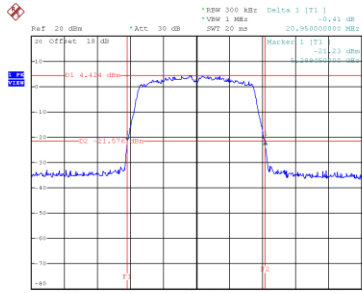


Date: 8.DEC.2023 16:01:48

CH64

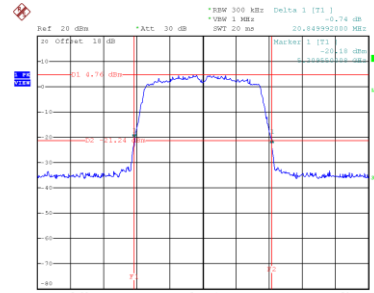


Date: 8.DEC.2023 16:02:49


99 % Occupied Bandwidth

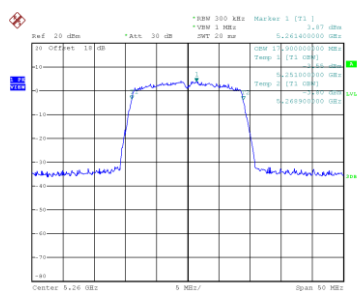

Date: 8.DEC.2023 16:00:17

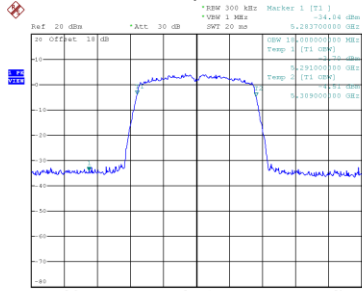

Date: 8.DEC.2023 16:01:21

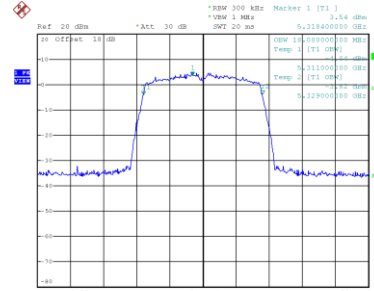


Date: 8.DEC.2023 16:02:22

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	80.800	75.200

CH58 26 dB Bandwidth

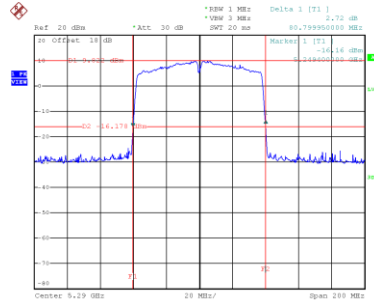

Date: 8.DEC.2023 16:34:26

99 % Occupied Bandwidth

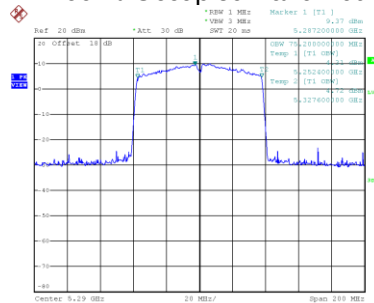


Date: 8.DEC.2023 16:33:52

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	30.650	19.300
60	5300	31.490	19.300
64	5320	25.599	19.300

CH52

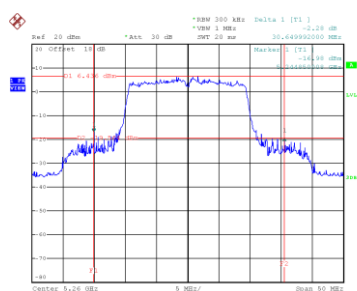


Date: 8.DEC.2023 16:46:21

CH60
26 dB Bandwidth

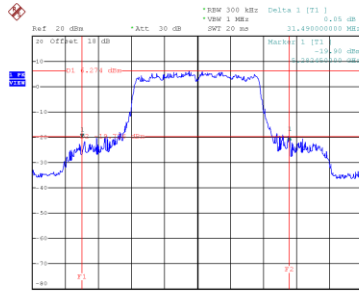


Date: 8.DEC.2023 16:47:22

CH64

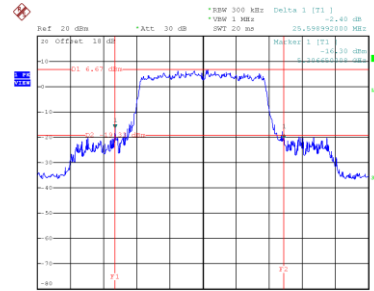


Date: 8.DEC.2023 16:48:33


99 % Occupied Bandwidth

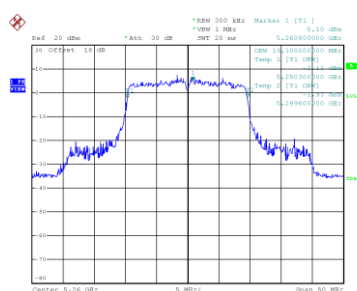

Date: 8.DEC.2023 16:46:01

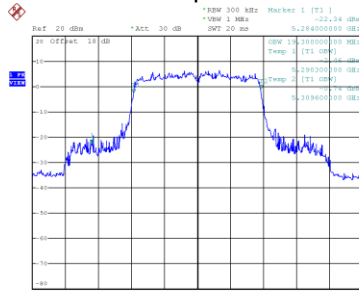

Date: 8.DEC.2023 16:47:56

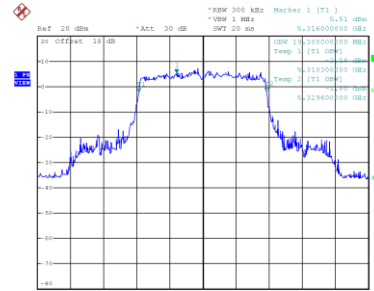


Date: 8.DEC.2023 16:47:57

Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	81.600	76.800

CH58 26 dB Bandwidth

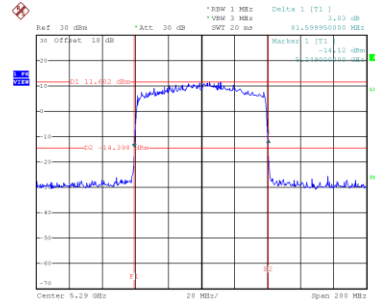

Date: 8.DEC.2023 17:19:37

99 % Occupied Bandwidth

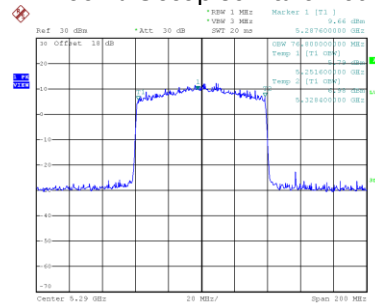


Date: 8.DEC.2023 17:19:04

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.450	16.900
116	5580	20.550	17.000
140	5700	20.450	16.800

CH100

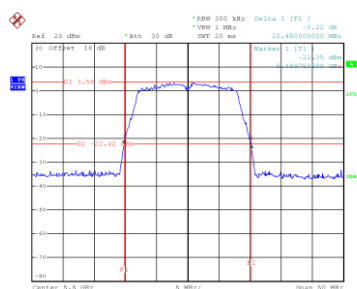


Date: 8.DEC.2023 15:47:12

CH116
26 dB Bandwidth

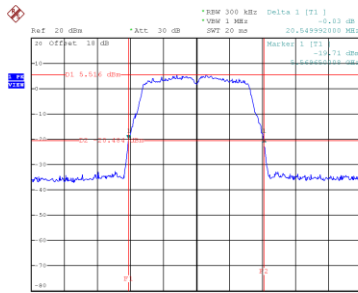


Date: 8.DEC.2023 15:48:19

CH140

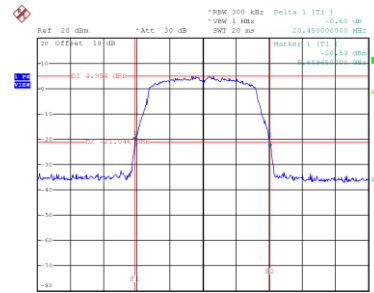


Date: 8.DEC.2023 15:50:18


99 % Occupied Bandwidth

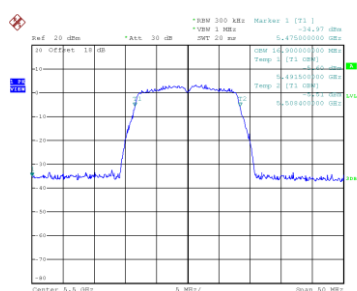

Date: 8.DEC.2023 15:46:46

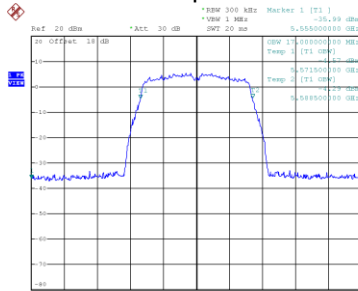

Date: 8.DEC.2023 15:47:52

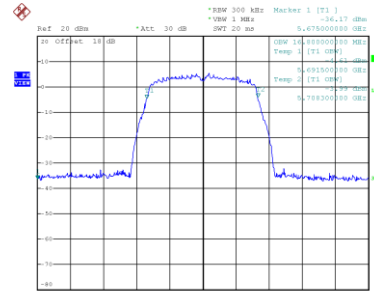


Date: 8.DEC.2023 15:49:51

Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	20.599	17.900
116	5580	20.700	17.900
140	5700	20.750	17.900

CH100

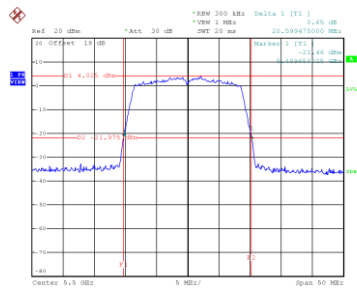


Date: 8.DEC.2023 16:04:01

CH116
26 dB Bandwidth

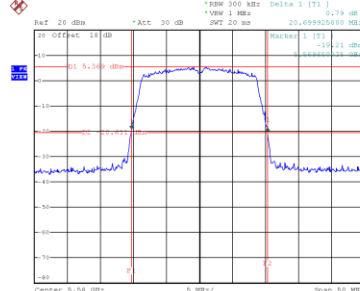


Date: 8.DEC.2023 16:05:15

CH140

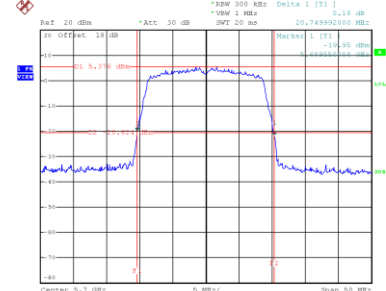


Date: 8.DEC.2023 16:07:20


99 % Occupied Bandwidth

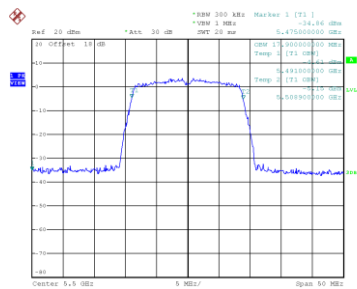

Date: 8.DEC.2023 16:03:34

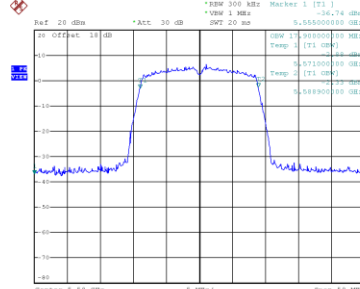

Date: 8.DEC.2023 16:04:48

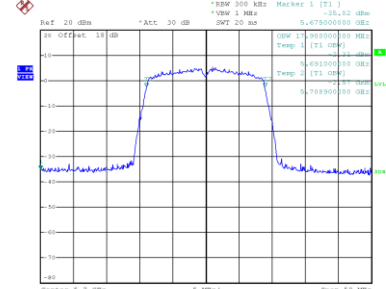


Date: 8.DEC.2023 16:06:54

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	39.900	36.400
110	5550	40.008	36.200
134	5670	40.200	36.400

CH102

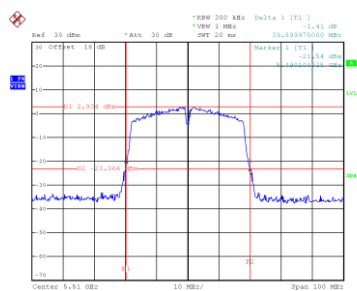


Date: 8.DEC.2023 16:21:29

CH110
26 dB Bandwidth

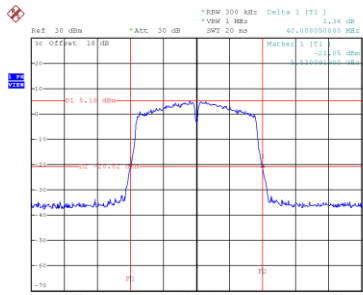


Date: 8.DEC.2023 16:23:43

CH134

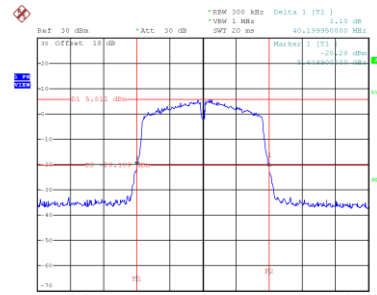


Date: 8.DEC.2023 16:25:42


99 % Occupied Bandwidth

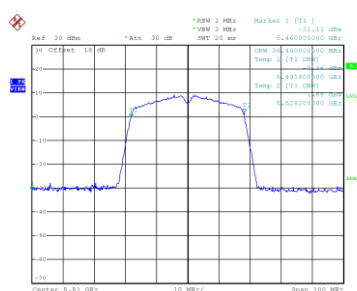

Date: 8.DEC.2023 16:20:50

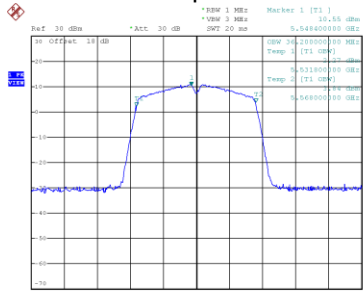

Date: 8.DEC.2023 16:23:04

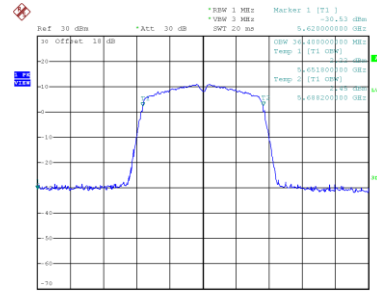


Date: 8.DEC.2023 16:25:05

Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	80.800	75.200
122	5610	80.600	75.200

CH106

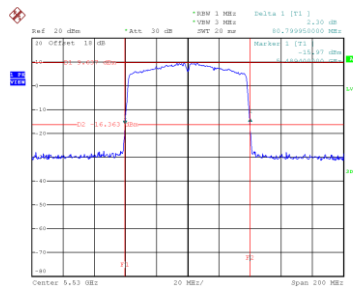


Date: 8.DEC.2023 16:36:40

CH122
26 dB Bandwidth

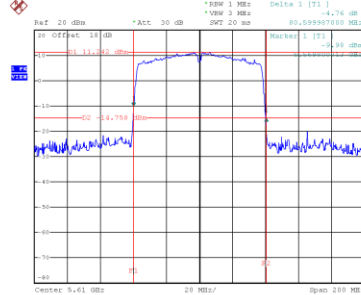


Date: 8.DEC.2023 16:38:10

99 % Occupied Bandwidth

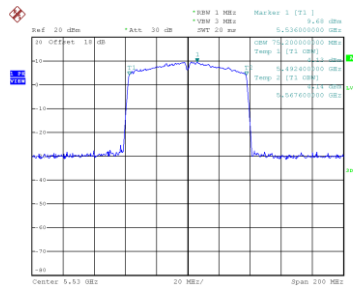

Date: 8.DEC.2023 16:36:06

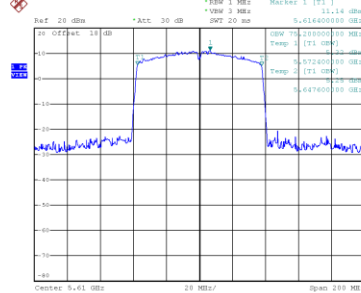


Date: 8.DEC.2023 16:37:36

Test Mode	UNII-2C_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	31.500	19.200
116	5580	24.550	19.300
140	5700	28.288	19.300

CH100

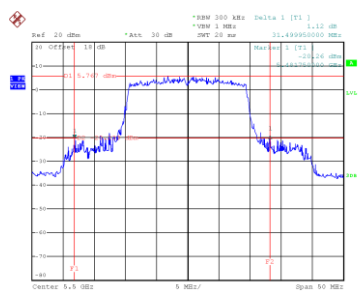


Date: 8.DEC.2023 16:49:33

CH116
26 dB Bandwidth

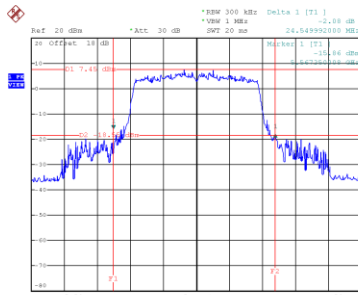


Date: 8.DEC.2023 16:50:41

CH140

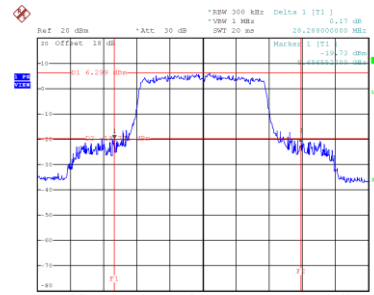


Date: 8.DEC.2023 16:51:53


99 % Occupied Bandwidth

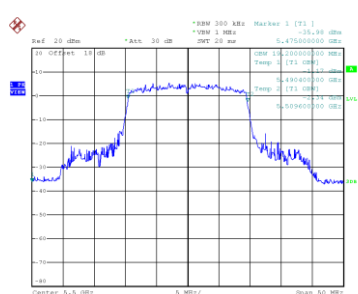

Date: 8.DEC.2023 16:49:10

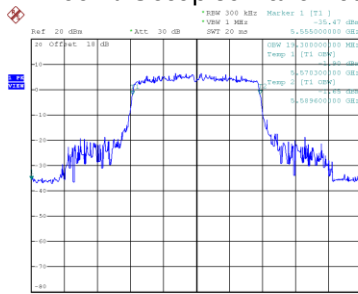

Date: 8.DEC.2023 16:50:17

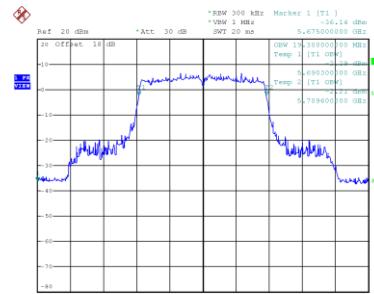


Date: 8.DEC.2023 16:51:23

Test Mode	UNII-2C_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	80.808	76.800
122	5610	81.000	76.800

CH106

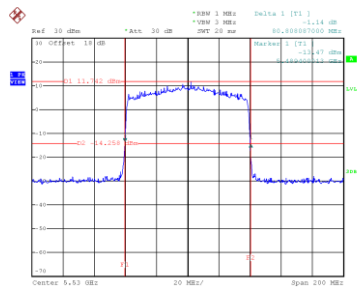


Date: 8.DEC.2023 17:21:11

CH122
26 dB Bandwidth

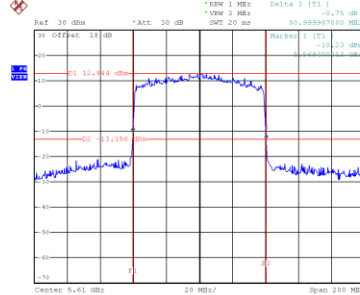


Date: 8.DEC.2023 17:23:49

99 % Occupied Bandwidth

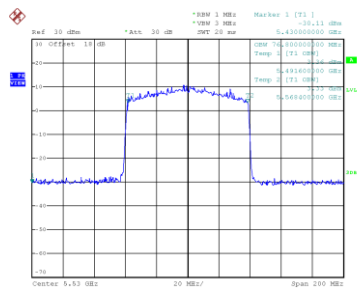

Date: 8.DEC.2023 17:20:36

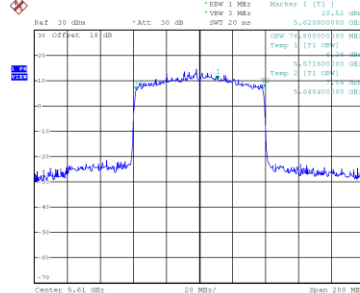


Date: 8.DEC.2023 17:23:14

Test Mode	UNII-3_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	15.698	17.400	0.5	Complies
157	5785	16.149	17.500	0.5	Complies
165	5825	15.800	19.400	0.5	Complies

CH149

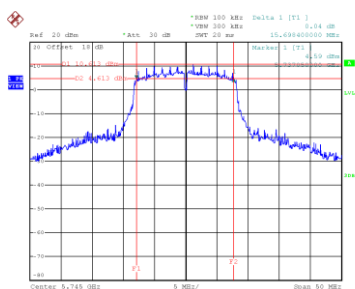


Date: 8.DEC.2023 15:52:05

CH157
6 dB Bandwidth

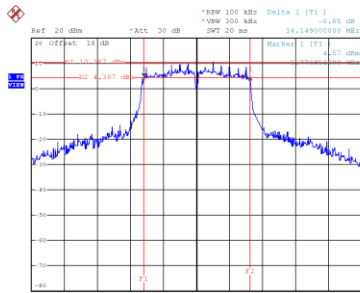


Date: 8.DEC.2023 15:53:08

CH165

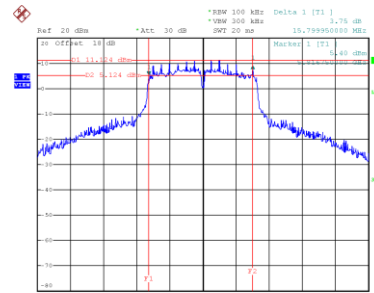


Date: 8.DEC.2023 15:54:28


99 % Occupied Bandwidth

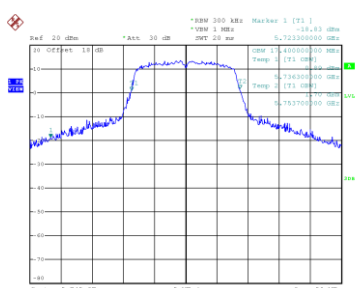

Date: 8.DEC.2023 15:51:36

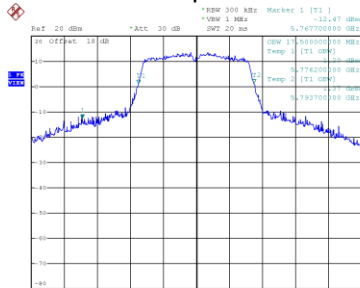

Date: 8.DEC.2023 15:52:40

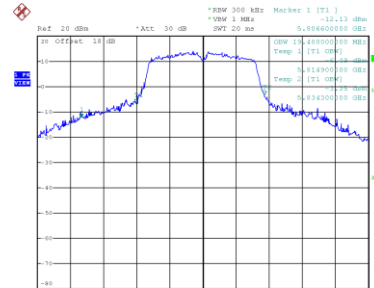


Date: 8.DEC.2023 15:53:58

Test Mode	UNII-3_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.550	18.100	0.5	Complies
157	5785	15.190	18.300	0.5	Complies
165	5825	16.000	18.900	0.5	Complies

CH149

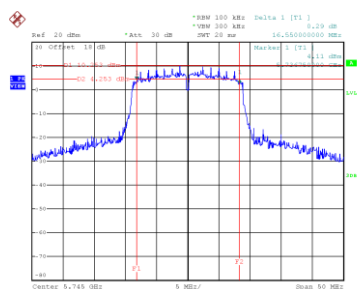


Date: 8.DEC.2023 16:09:02

CH157
6 dB Bandwidth

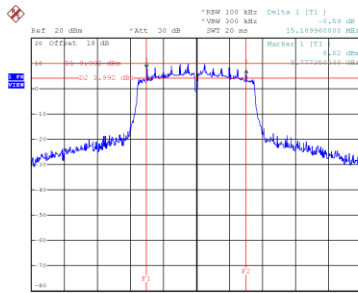


Date: 8.DEC.2023 16:10:16

CH165

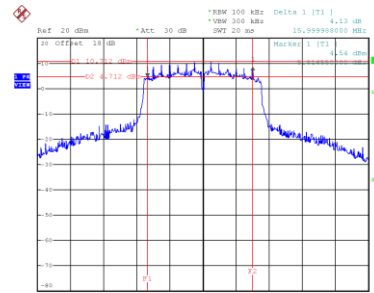


Date: 8.DEC.2023 16:11:25


99 % Occupied Bandwidth

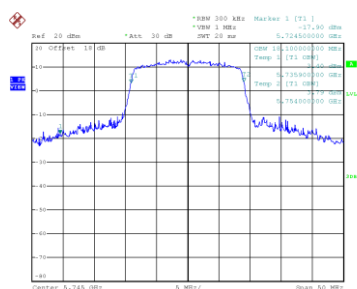

Date: 8.DEC.2023 16:09:33

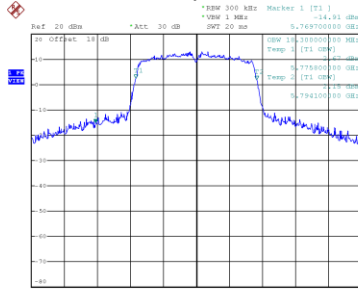

Date: 8.DEC.2023 16:09:41

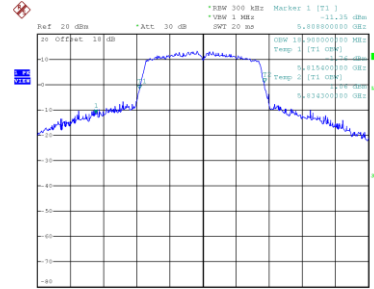


Date: 8.DEC.2023 16:10:56

Test Mode	UNII-3_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
151	5755	35.300	37.000	0.5	Complies
159	5795	33.900	37.400	0.5	Complies

CH151

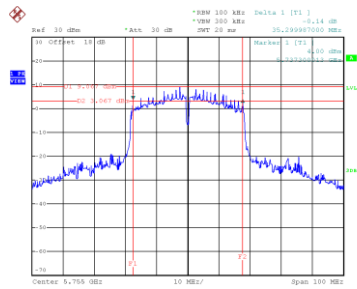


Date: 8.DEC.2023 16:20:22

CH159 6 dB Bandwidth

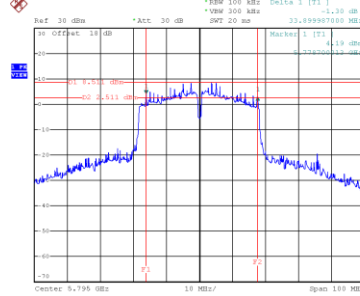


Date: 8.DEC.2023 16:29:41

99 % Occupied Bandwidth

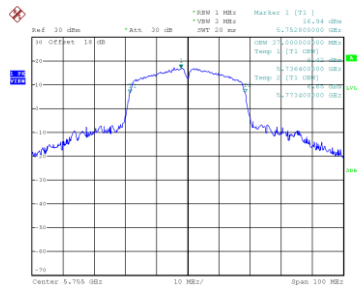

Date: 8.DEC.2023 16:27:44

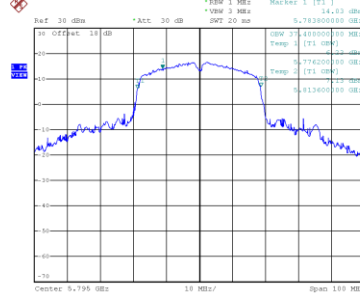

Date: 8.DEC.2023 16:29:01