

## RF Test Report

Applicant : KRONOZ  
Product Type : Smart Watch  
Trade Name : MYKRONOZ  
Model Number : ZeRound<sup>3</sup>  
Test Specification : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013  
Receive Date : Dec. 03, 2018  
Test Period : Jan. 07~Mar. 05, 2019  
Issue Date : Mar. 25, 2019

### Issue by

A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Test Firm MRA designation number: TW0010

**Note:** This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



### Revision History

Rev.	Issue Date	Revisions	Revised By
00	Mar. 14, 2019	Initial Issue	Janet Chao
01	Mar. 25, 2019	Page 3 and Page 45~64 revised test voltage.	Janet Chao

## Verification of Compliance

Issued Date: Mar. 14, 2019

Applicant : KRONOZ  
Product Type : Smart Watch  
Trade Name : MYKRONOZ  
Model Number : ZeRound<sup>3</sup>  
FCC ID : 2AA7D-ZERD3  
EUT Rated Voltage : DC 5 V, 0.5 A  
Test Voltage : 120 Vac / 60 Hz, DC 3.8 V  
Applicable Standard : FCC 47 CFR PART 15 SUBPART C  
ANSI C63.10:2013  
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 33465, Taiwan (R.O.C)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330  
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Jet Lu Reviewed By : Eric Ou Yang  
(Manager) (Jet Lu) (Testing Engineer) (Eric Ou Yang)



## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
	1.1. Summary of Test Result.....	5
	1.2. Measurement Uncertainty.....	6
<b>2</b>	<b>EUT Description .....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>8</b>
	3.1. Mode of Operation.....	8
	3.2. EUT Test Step.....	9
	3.3. Configuration of Test System Details .....	9
	3.4. Test Instruments .....	11
	3.5. Test Site Environment.....	12
<b>4</b>	<b>Measurement Procedure.....</b>	<b>13</b>
	4.1. Maximum Conducted Output Power Measurement.....	13
	4.2. AC Power Line Conducted Emission Measurement.....	14
	4.3. Radiated Emission Measurement .....	16
	4.4. 20 dB RF Bandwidth Measurement .....	19
	4.5. Carrier Frequency Separation Measurement .....	20
	4.6. Number of Hopping Measurement.....	21
	4.7. Time of Occupancy (Dwell Time) Measurement.....	22
	4.8. Out of Band Conducted Emissions Measurement.....	23
	4.9. Antenna Measurement .....	23
<b>5</b>	<b>Test Results.....</b>	<b>24</b>
	Annex A. Conducted Emission .....	24
	Annex B. Conducted Test Results .....	26
	Annex C. Radiated Emission Measurement .....	44



# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20 dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems



## 1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9 kHz ~ 150 kHz	2.7
	150 kHz ~ 30 MHz	2.7
Radiated Emission	9 kHz ~ 30 MHz	1.7
	30 MHz ~ 1000 MHz	5.7
	1000 MHz ~ 18000 MHz	5.5
	18000 MHz ~ 26500 MHz	4.8
	26500 MHz ~ 40000 MHz	4.8
Conducted Output Power	+0.27 dB / -0.28 dB	
RF Bandwidth	4.96 %	
Power Spectral Density	+0.71 dB / -0.77 dB	



## 2 EUT Description

Applicant	KRONOZ ROUTE DE VALAVRAN 96, GENTHOD, 1294, Switzerland	
Manufacturer	KRONOZ ROUTE DE VALAVRAN 96, GENTHOD, 1294, Switzerland	
Product	Smart Watch	
Trade Name	MYKRONOZ	
Model Number	ZeRound <sup>3</sup>	
FCC ID	2AA7D-ZERD3	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK for 1 Mbps	
	$\pi/4$ -DQPSK for 2 Mbps	
	8DPSK for 3 Mbps	
Operate Temp. Range	-10 ~ +60 °C	
Antenna information	Type	Max. Gain (dBi)
	FPC Antenna	-1.12
RF Output Power (Conducted)	GFSK for 1 Mbps	0.00124 W
	$\pi/4$ -DQPSK for 2 Mbps	0.00132 W
	8DPSK for 3 Mbps	0.00146 W

### 3 Test Methodology

#### 3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

#### Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.

#### Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA




### 3.2. EUT Test Step

1	Setup the EUT shown on “Configuration of Test System Details.”
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

### 3.3. Configuration of Test System Details


Conducted Emission

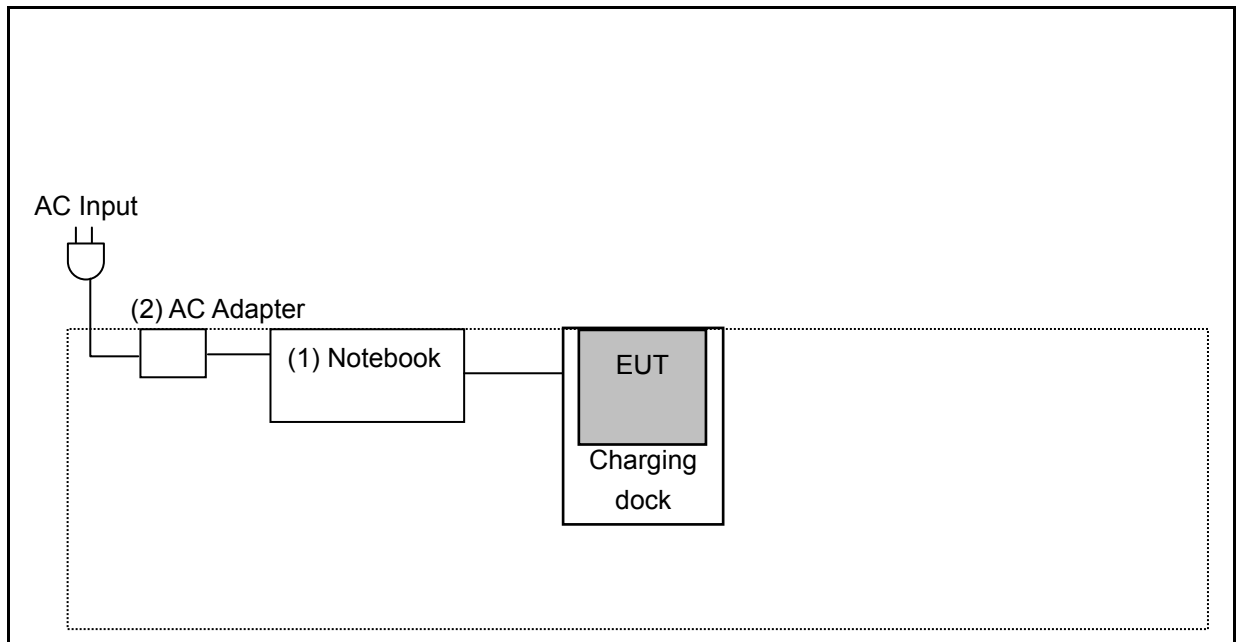

Radiated Emissions\_ Below 1 GHz

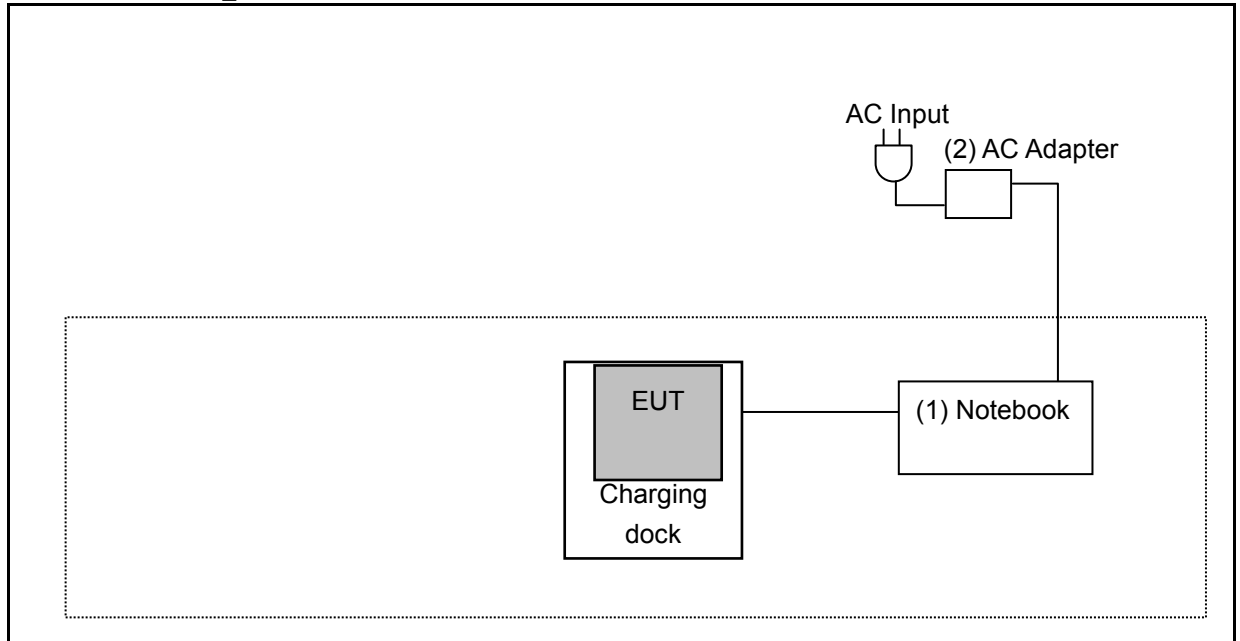

Radiated Emissions\_ Above 1 GHz

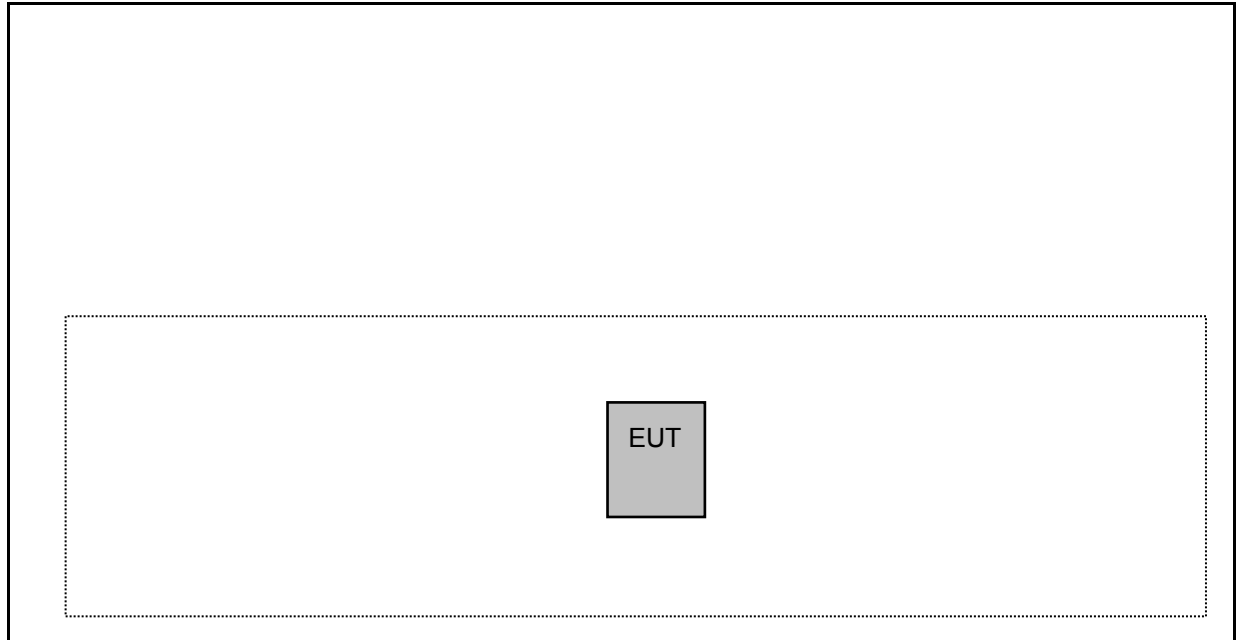

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E5440	BRTQXY1	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-shielded, 0.8m



### 3.4. Test Instruments

For Conducted Emission

Test Period: Mar. 05, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2018	1 year
LISN	R&S	ENV216	101040	04/11/2018	1 year
LISN	R&S	ENV216	101041	03/23/2018	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/17/2018	1 year

For Radiated Emissions

Test Period: Jan. 08, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/15/2018	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/10/2018	1 year
Pre Amplifier (26.5~40 GHz)	EMCI	EMC2654045	980028	08/23/2018	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/19/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Horn Antenna (18~40 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	08/07/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/13/2018	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2018	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2018	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Test Period: Jan. 07, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Anritsu	MA2411B	1126022	08/29/2018	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2018	1 year
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/15/2018	1 year
Microwave Cable	EMCI	EMC102-SM-SM15 00	001	11/21/2018	1 year
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	04/16/2018	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

### 3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	990


## 4 Measurement Procedure

### 4.1. Maximum Conducted Output Power Measurement

#### ■ Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

#### ■ Test Setup

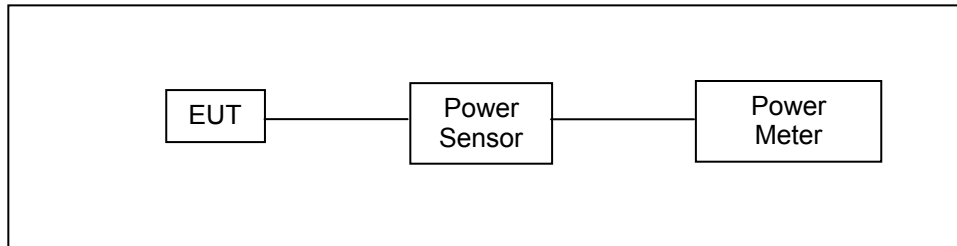

#### ■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.


Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

## 4.2. AC Power Line Conducted Emission Measurement

### ■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

### ■ Test Setup

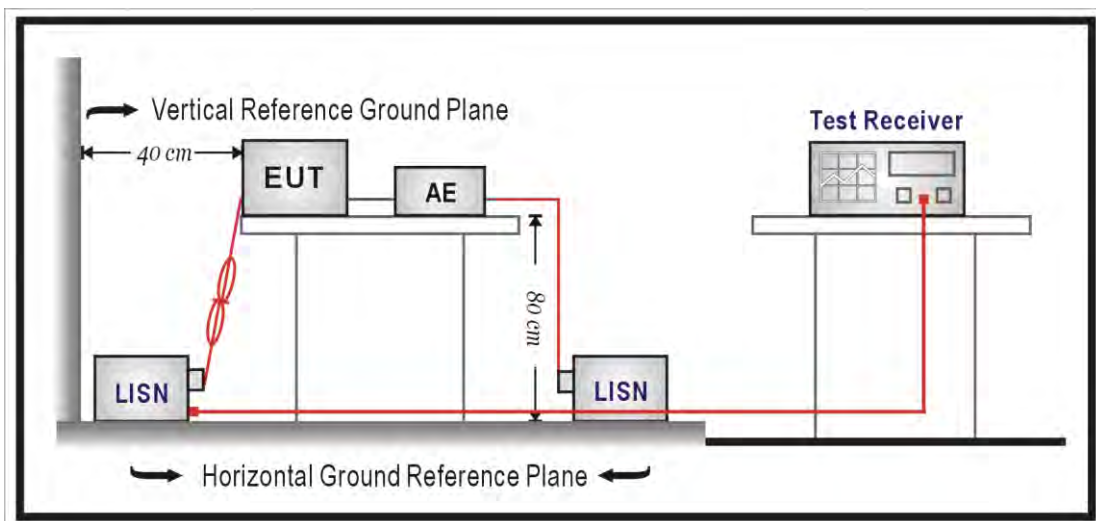

### ■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50 \Omega // 50 \mu\text{H}$  coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All  $50 \Omega$  ports of the LISN shall be resistively terminated into  $50 \Omega$  loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

### 4.3. Radiated Emission Measurement

■ **Limit**


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


■ **Setup**

9 kHz ~ 30 MHz

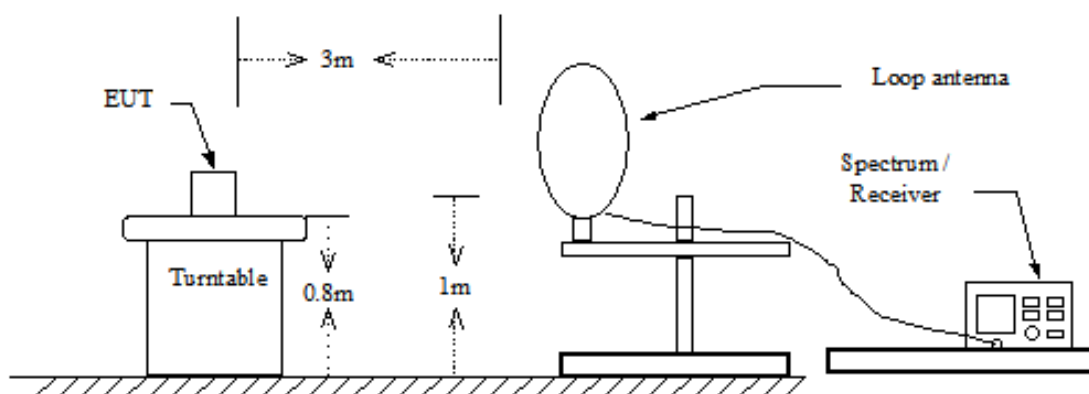




Below 1 GHz

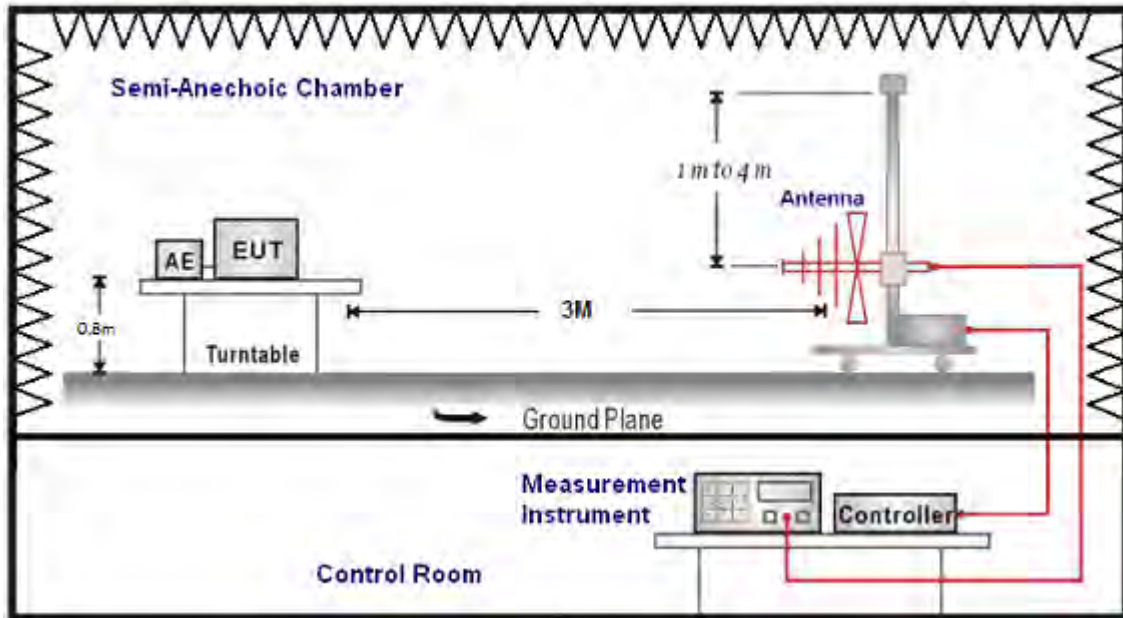

Above 1 GHz

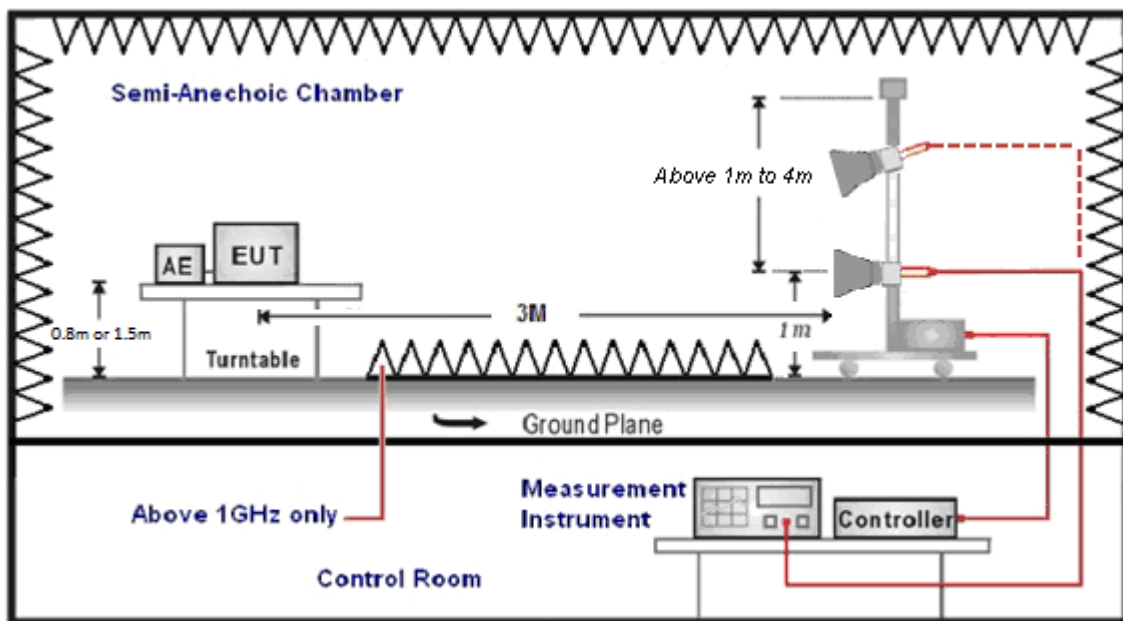

## ■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98 % / 1/T for average measurements when Duty cycle <98 %. A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

#### 4.4. 20 dB RF Bandwidth Measurement

■ **Limit**

N/A

■ **Test Setup**

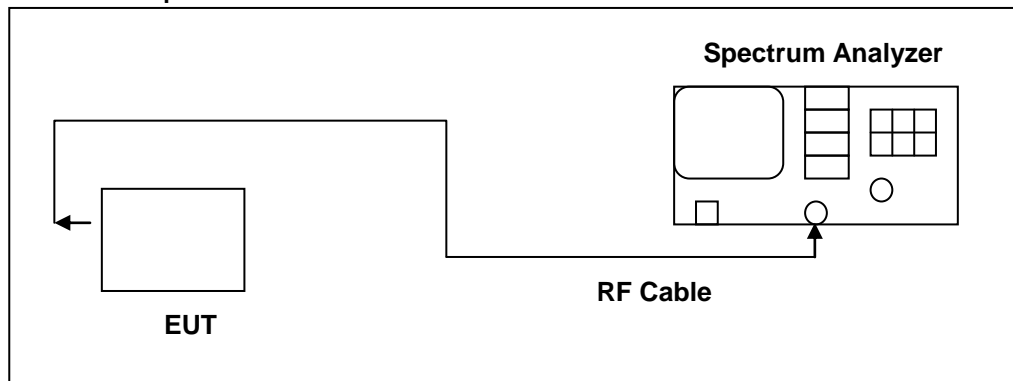

■ **Test Procedure**

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20 dB bandwidth, centered on a hopping frequency
2. RBW  $\geq$  1 % of the 20 dB span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20 dB bandwidth of the emission.

## 4.5. Carrier Frequency Separation Measurement

### ■ Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

### ■ Test Setup

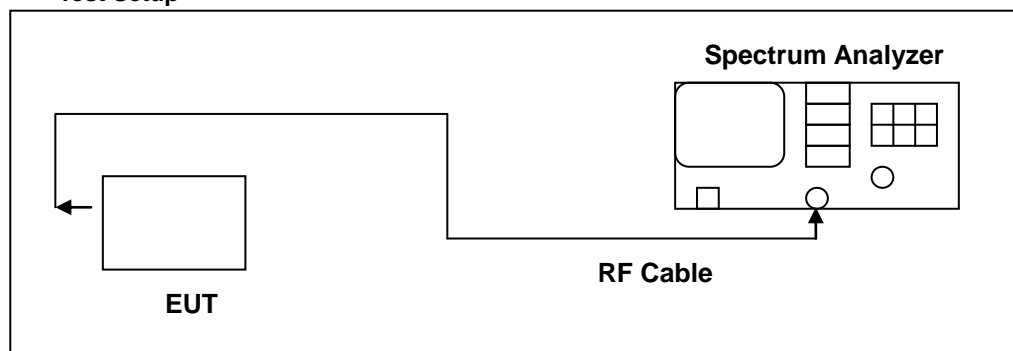

### ■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
3. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

## 4.6. Number of Hopping Measurement

### ■ Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### ■ Test Setup

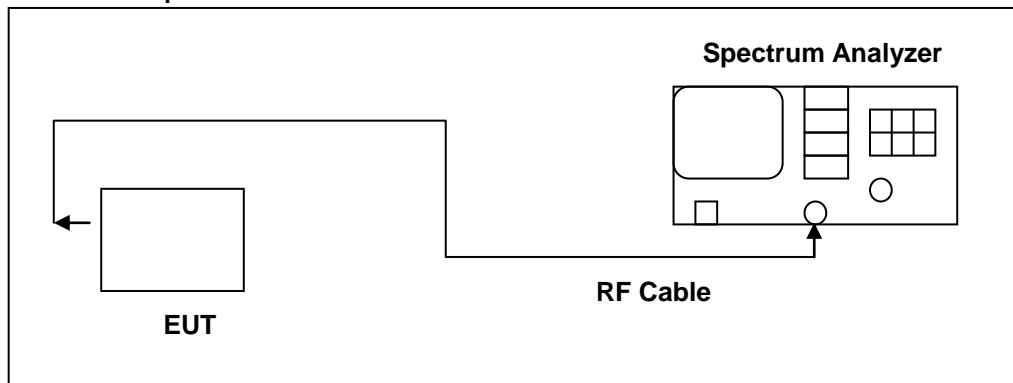

### ■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW  $\geq$  1 % of the span
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

#### 4.7. Time of Occupancy (Dwell Time) Measurement

##### ■ Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### ■ Test Setup

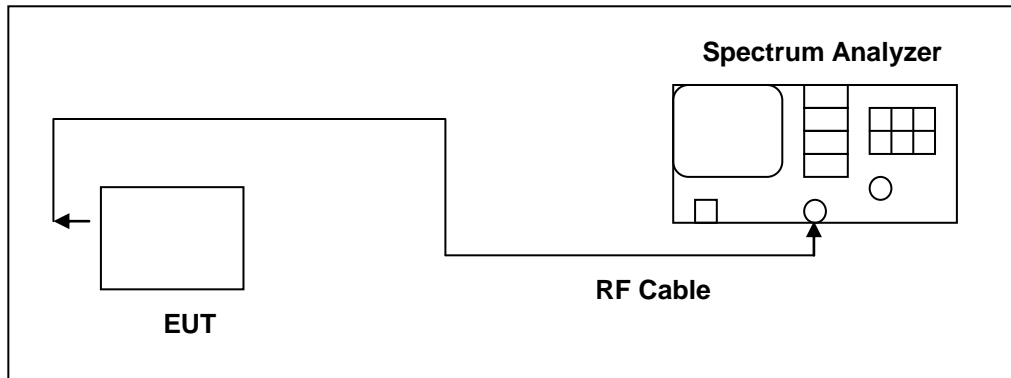

##### ■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW  $\geq$  RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.

## 4.8. Out of Band Conducted Emissions Measurement

### ■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### ■ Test Setup

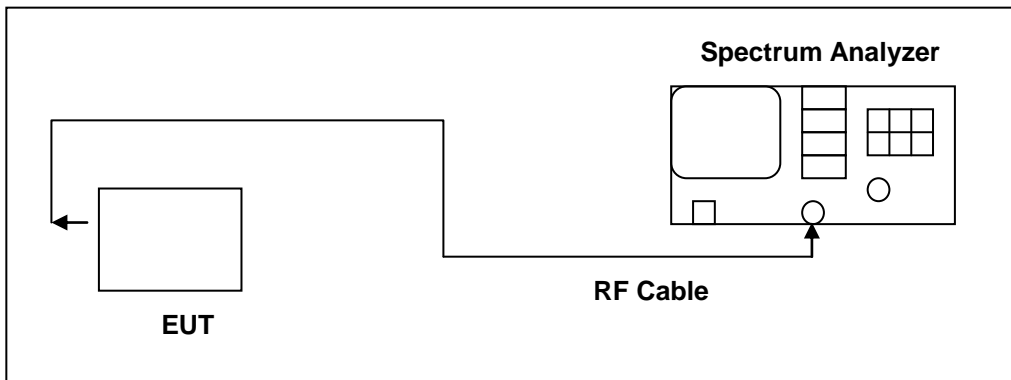

### ■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

## 4.9. Antenna Measurement

### ■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ■ Antenna Connector Construction


See section 2 – antenna information.



## 5 Test Results

### Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

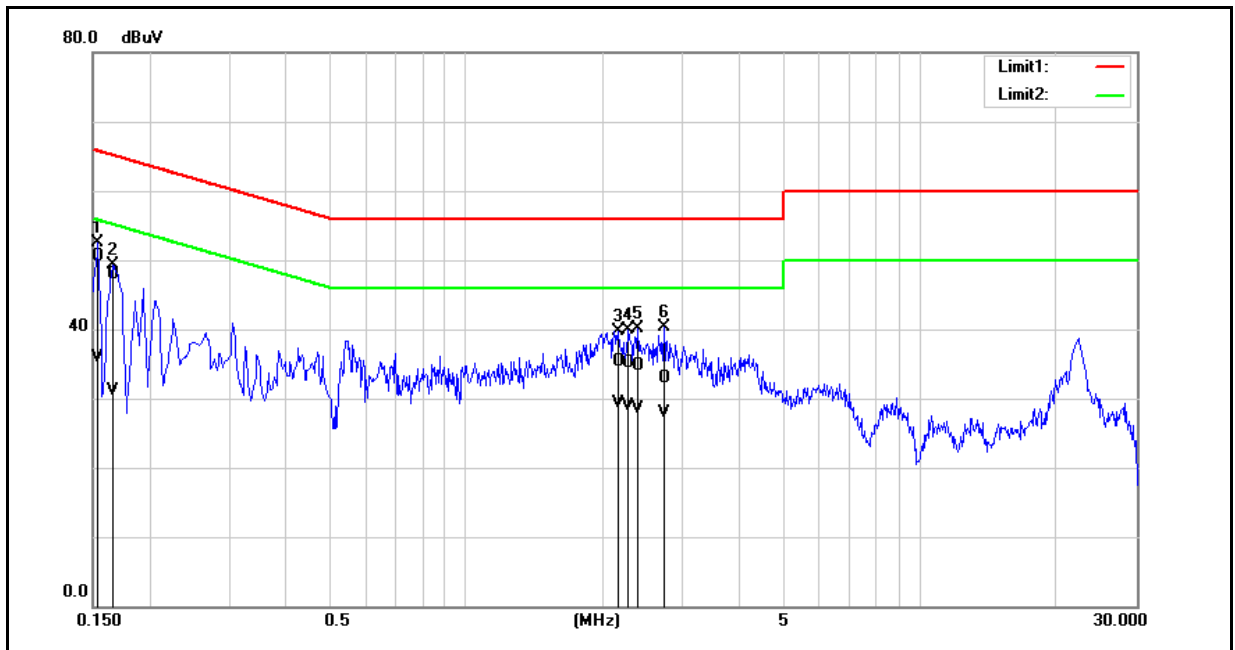

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	40.80	26.21	9.66	50.46	35.87	65.78	55.78	-15.32	-19.91	Pass
2	0.1660	38.18	21.43	9.65	47.83	31.08	65.16	55.16	-17.33	-24.08	Pass
3	2.1580	25.62	19.47	9.75	35.37	29.22	56.00	46.00	-20.63	-16.78	Pass
4	2.2740	25.32	19.09	9.77	35.09	28.86	56.00	46.00	-20.91	-17.14	Pass
5	2.3860	24.86	18.81	9.77	34.63	28.58	56.00	46.00	-21.37	-17.42	Pass
6	2.7260	23.20	18.18	9.78	32.98	27.96	56.00	46.00	-23.02	-18.04	Pass


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).





Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

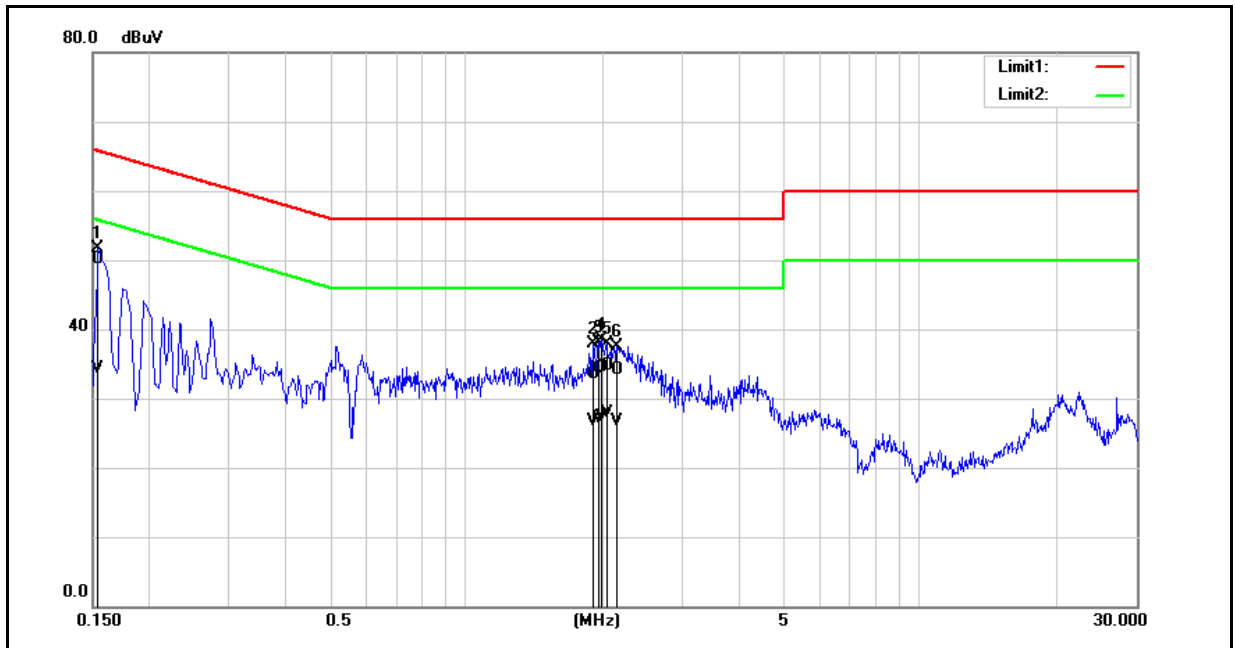

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	40.53	24.54	9.67	50.20	34.21	65.78	55.78	-15.58	-21.57	Pass
2	1.9060	23.57	16.80	9.84	33.41	26.64	56.00	46.00	-22.59	-19.36	Pass
3	1.9500	24.39	17.17	9.84	34.23	27.01	56.00	46.00	-21.77	-18.99	Pass
4	1.9900	24.67	17.48	9.84	34.51	27.32	56.00	46.00	-21.49	-18.68	Pass
5	2.0340	24.90	18.04	9.84	34.74	27.88	56.00	46.00	-21.26	-18.12	Pass
6	2.1460	24.33	16.80	9.84	34.17	26.64	56.00	46.00	-21.83	-19.36	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

## Annex B. Conducted Test Results

### Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH1	-0.47	0.00090	0.87	0.00122	≤ 0.125
		DH3	-0.45	0.00090	0.90	0.00123	≤ 0.125
		DH5	-0.42	0.00091	<b>0.92</b>	<b>0.00124</b>	≤ 0.125
	2441	DH1	-0.80	0.00083	0.57	0.00114	≤ 0.125
		DH3	-0.77	0.00084	0.60	0.00115	≤ 0.125
		DH5	-0.75	0.00084	0.62	0.00115	≤ 0.125
	2480	DH1	-1.43	0.00072	-0.02	0.00100	≤ 0.125
		DH3	-1.40	0.00072	0.01	0.00100	≤ 0.125
		DH5	-1.37	0.00073	0.03	0.00101	≤ 0.125
Mode 3	2402	2DH1	-2.33	0.00058	1.17	0.00131	≤ 0.125
		2DH3	-2.30	0.00059	1.20	0.00132	≤ 0.125
		2DH5	-2.27	0.00059	<b>1.22</b>	<b>0.00132</b>	≤ 0.125
	2441	2DH1	-2.66	0.00054	0.87	0.00122	≤ 0.125
		2DH3	-2.63	0.00055	0.90	0.00123	≤ 0.125
		2DH5	-2.60	0.00055	0.92	0.00124	≤ 0.125
	2480	2DH1	-3.47	0.00045	0.07	0.00102	≤ 0.125
		2DH3	-3.45	0.00045	0.09	0.00102	≤ 0.125
		2DH5	-3.42	0.00045	0.11	0.00103	≤ 0.125
Mode 4	2402	3DH1	-2.00	0.00063	1.58	0.00144	≤ 0.125
		3DH3	-1.98	0.00063	1.60	0.00145	≤ 0.125
		3DH5	-1.96	0.00064	<b>1.63</b>	<b>0.00146</b>	≤ 0.125
	2441	3DH1	-2.63	0.00055	0.95	0.00124	≤ 0.125
		3DH3	-2.61	0.00055	0.97	0.00125	≤ 0.125
		3DH5	-2.59	0.00055	0.99	0.00126	≤ 0.125
	2480	3DH1	-3.27	0.00047	0.30	0.00107	≤ 0.125
		3DH3	-3.24	0.00047	0.33	0.00108	≤ 0.125
		3DH5	-3.21	0.00048	0.36	0.00109	≤ 0.125

Note: The relevant measured result has the offset with cable loss already.



**20 dB RF Bandwidth Measurement**

Test Mode	Frequency (MHz)	Measurement Results (MHz)
Mode 2	2402	0.961
	2441	0.965
	2480	0.960
Mode 4	2402	1.282
	2441	1.278
	2480	1.278



■ Test Graphs

Mode 2: GFSK Continuous TX mode	
2402 MHz	<p>Center Freq 2.402000000 GHz</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref 10.00 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 889.39 kHz</p> <p>Total Power 8.32 dBm</p> <p>Transmit Freq Error 114.82 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 961.4 kHz</p> <p>x dB -20.00 dB</p>
2441 MHz	<p>Center Freq 2.441000000 GHz</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref 10.00 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 897.24 kHz</p> <p>Total Power 7.78 dBm</p> <p>Transmit Freq Error 117.85 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 964.7 kHz</p> <p>x dB -20.00 dB</p>
2480 MHz	<p>Center Freq 2.480000000 GHz</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref 10.00 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 895.82 kHz</p> <p>Total Power 7.54 dBm</p> <p>Transmit Freq Error 119.98 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 959.7 kHz</p> <p>x dB -20.00 dB</p>



Mode 4: 8DPSK Continuous TX mode	
2402 MHz	<p>Center Freq 2.40200000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Gain: Low #Atten: 20 dB Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 10.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p><b>Occupied Bandwidth 1.1654 MHz</b> Total Power 6.11 dBm</p> <p>Transmit Freq Error 115.90 kHz % of OBW Power 99.00 % x dB Bandwidth 1.282 MHz x dB -20.00 dB</p>
2441 MHz	<p>Center Freq 2.44100000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Gain: Low #Atten: 20 dB Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 10.00 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p><b>Occupied Bandwidth 1.1664 MHz</b> Total Power 5.72 dBm</p> <p>Transmit Freq Error 117.84 kHz % of OBW Power 99.00 % x dB Bandwidth 1.278 MHz x dB -20.00 dB</p>
2480 MHz	<p>Center Freq 2.48000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #Gain: Low #Atten: 20 dB Avg/Hold: &gt;10/10 Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 10.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p><b>Occupied Bandwidth 1.1644 MHz</b> Total Power 5.51 dBm</p> <p>Transmit Freq Error 119.66 kHz % of OBW Power 99.00 % x dB Bandwidth 1.278 MHz x dB -20.00 dB</p>




**Carrier Frequency Separation Measurement**

Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	$\geq 0.641$
	2441	1.000	$\geq 0.643$
	2480	1.000	$\geq 0.640$
Mode 4	2402	1.000	$\geq 0.855$
	2441	1.000	$\geq 0.852$
	2480	1.000	$\geq 0.852$



■ Test Graphs

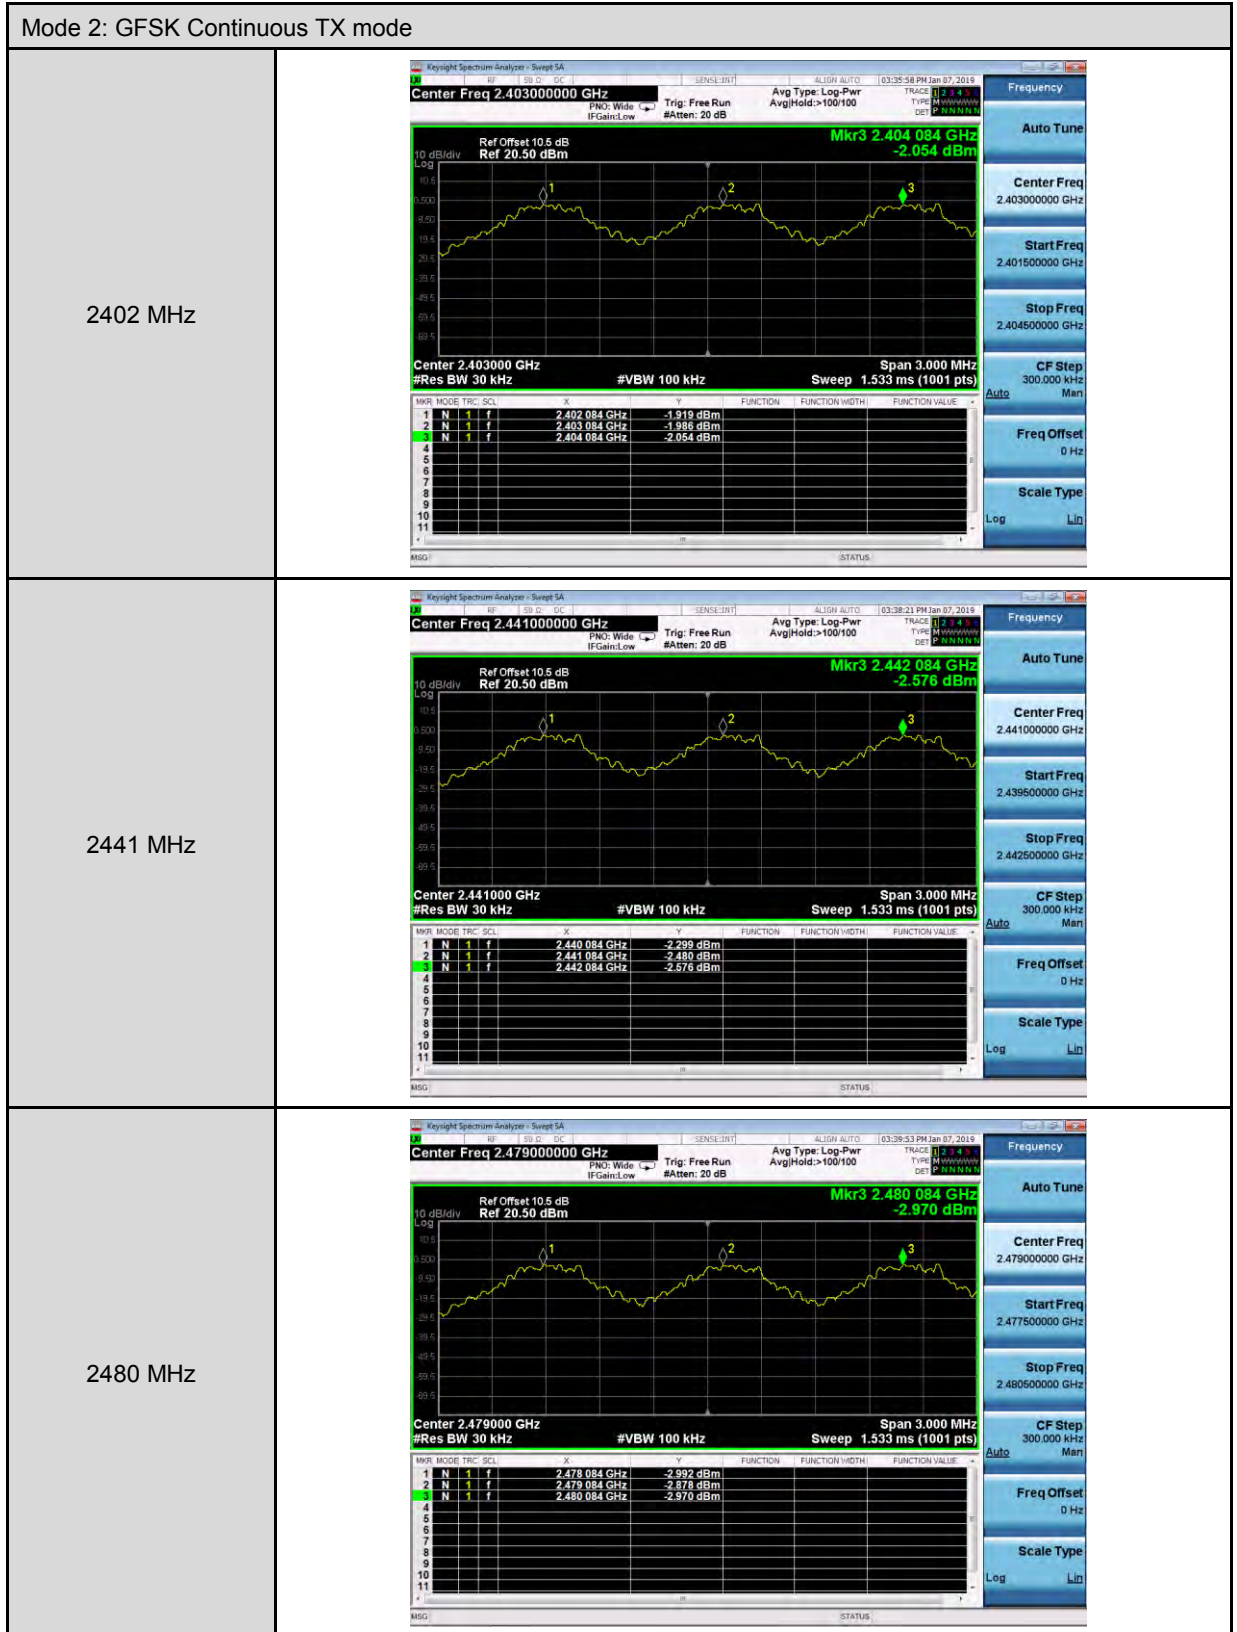



Mode 4: 8DPSK Continuous TX mode																																					
2402 MHz	<p>Center Freq 2.4030000 GHz</p> <p>Mkr3 2.404 005 GHz 0.728 dBm</p> <p>Center 2.403000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 1.533 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 005 GHz</td> <td>-0.558 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.403 005 GHz</td> <td>-2.523 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.404 005 GHz</td> <td>0.728 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 005 GHz	-0.558 dBm				2	N	1	f	2.403 005 GHz	-2.523 dBm				3	N	1	f	2.404 005 GHz	0.728 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.402 005 GHz	-0.558 dBm																																
2	N	1	f	2.403 005 GHz	-2.523 dBm																																
3	N	1	f	2.404 005 GHz	0.728 dBm																																
2441 MHz	<p>Center Freq 2.4410000 GHz</p> <p>Mkr3 2.442 005 GHz 2.112 dBm</p> <p>Center 2.441000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 1.533 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 005 GHz</td> <td>1.924 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 005 GHz</td> <td>1.852 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.442 005 GHz</td> <td>2.112 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 005 GHz	1.924 dBm				2	N	1	f	2.441 005 GHz	1.852 dBm				3	N	1	f	2.442 005 GHz	2.112 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.440 005 GHz	1.924 dBm																																
2	N	1	f	2.441 005 GHz	1.852 dBm																																
3	N	1	f	2.442 005 GHz	2.112 dBm																																
2480 MHz	<p>Center Freq 2.4790000 GHz</p> <p>Mkr3 2.480 005 GHz 1.346 dBm</p> <p>Center 2.479000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3.000 MHz Sweep 1.533 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.478 005 GHz</td> <td>0.941 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 005 GHz</td> <td>1.159 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 005 GHz</td> <td>1.346 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.478 005 GHz	0.941 dBm				2	N	1	f	2.479 005 GHz	1.159 dBm				3	N	1	f	2.480 005 GHz	1.346 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	f	2.478 005 GHz	0.941 dBm																																
2	N	1	f	2.479 005 GHz	1.159 dBm																																
3	N	1	f	2.480 005 GHz	1.346 dBm																																







**Number of Hopping Measurement**

Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	≥ 15
Mode 3	2402 - 2480	79	≥ 15
Mode 4	2402 - 2480	79	≥ 15

■ Test Graphs

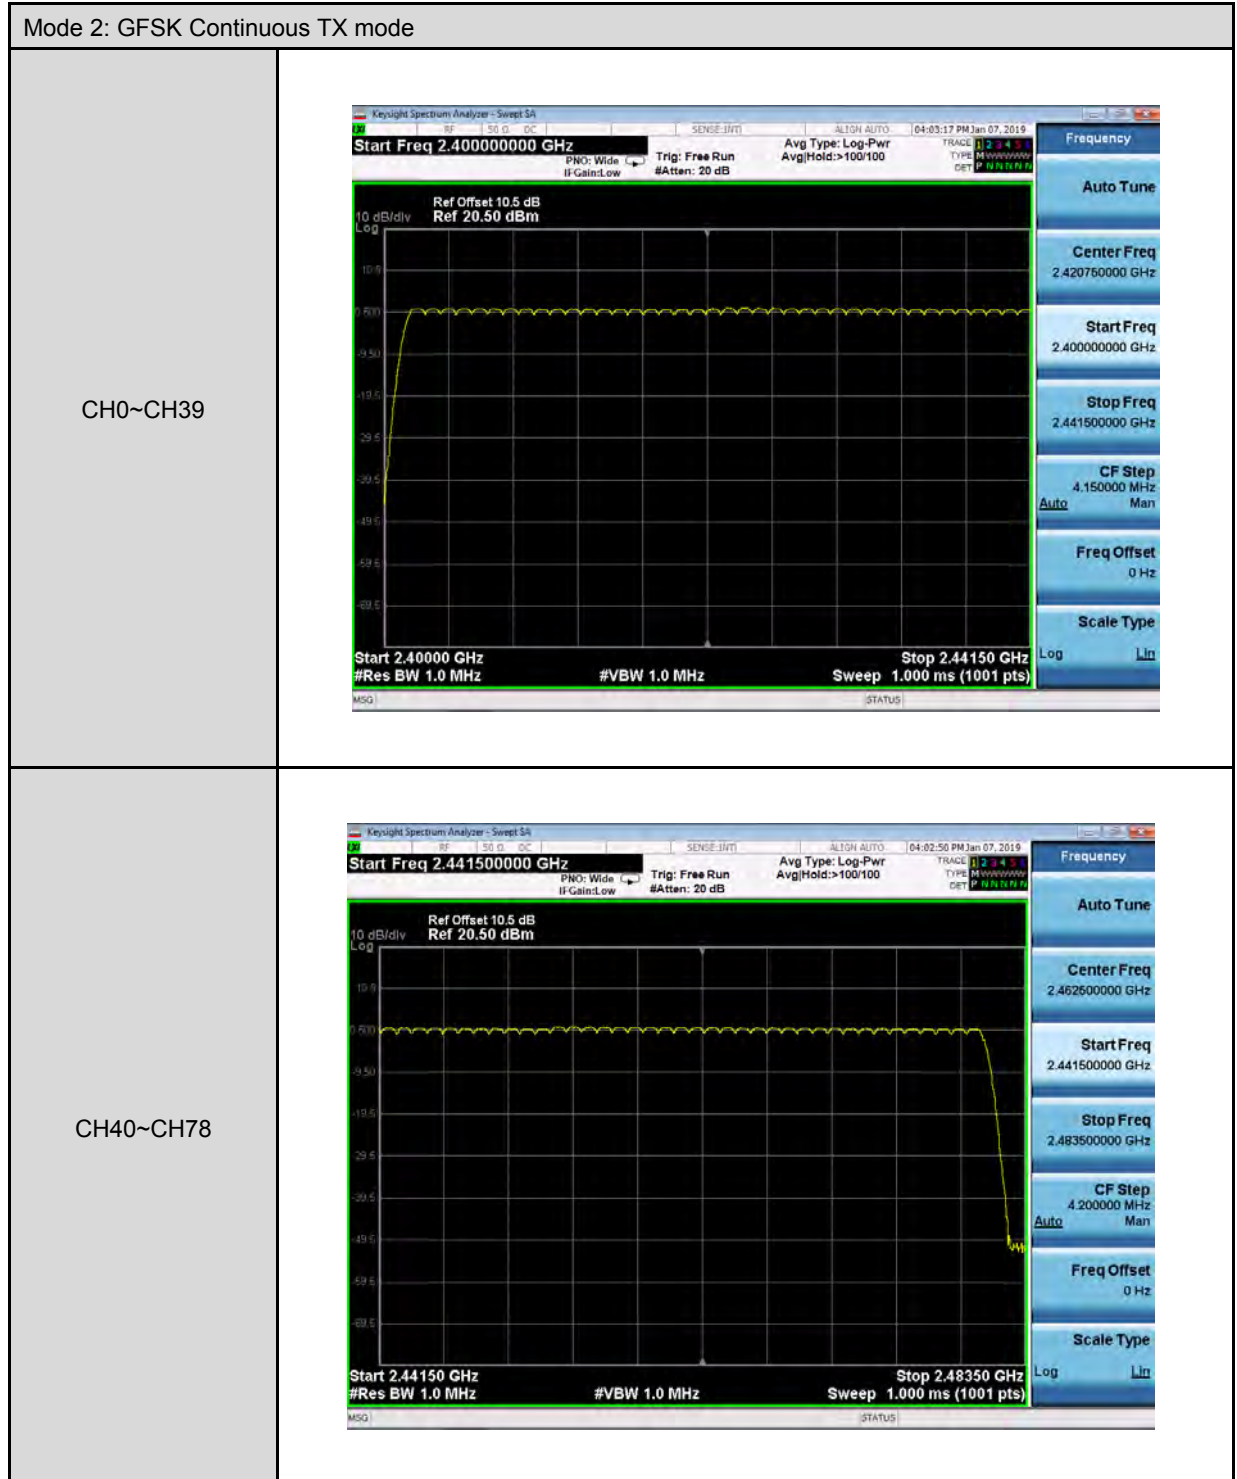

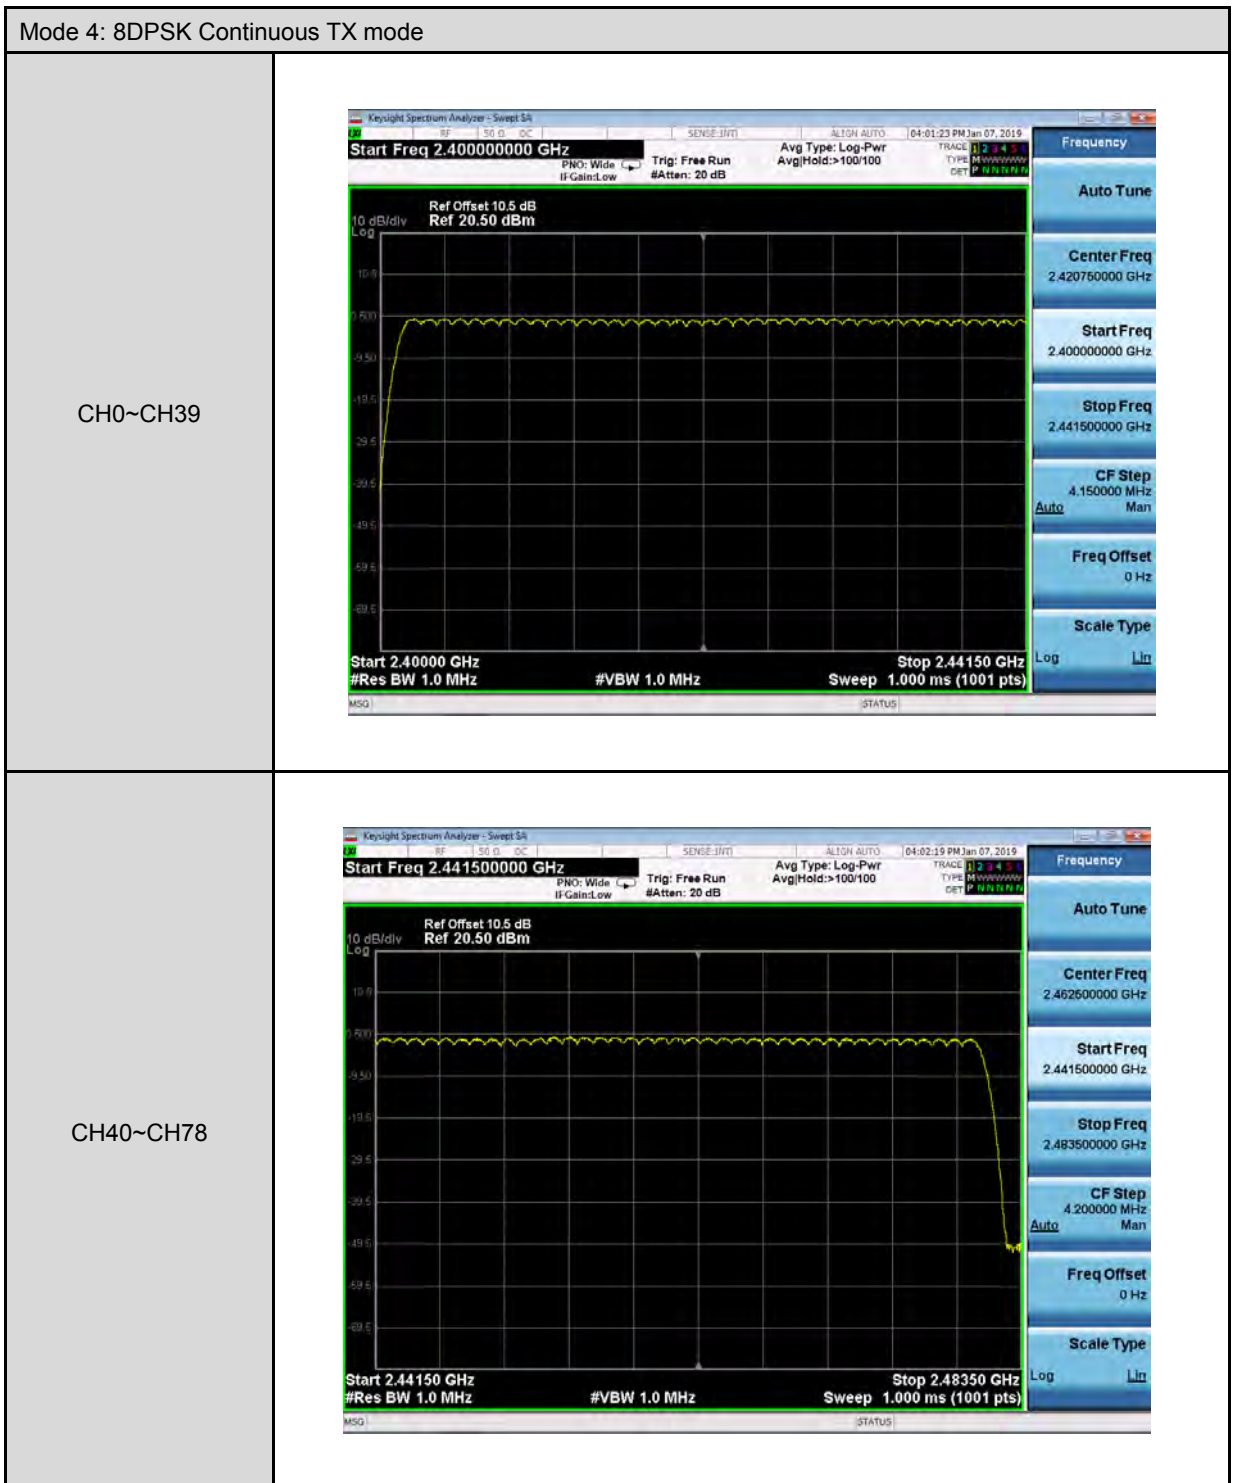



**Time of Occupancy (Dwell Time) Measurement**

Mode 2: GFSK Continuous TX mode	
DH1	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.420 ms (sec)
Dwell Times on Cycle (1) * (2)	134.445 ms (sec)
LIMIT(msec)	$< = 400$
DH3	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.670 ms (sec)
Dwell Times on Cycle (1) * (2)	267.026 ms (sec)
LIMIT(msec)	$< = 400$
DH5	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	2.970 ms (sec)
Dwell Times on Cycle (1) * (2)	317.220 ms (sec)
LIMIT(msec)	$< = 400$



Mode 4: 8DPSK Continuous TX mode	
<b>3DH1</b>	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108(\text{times})$
Each Channel Dwell Times (2)	0.420 ms (sec)
Dwell Times on Cycle (1) * (2)	134.445 ms (sec)
LIMIT(msec)	$< = 400$
<b>3DH3</b>	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16(\text{times})$
Each Channel Dwell Times (2)	1.670 ms (sec)
Dwell Times on Cycle (1) * (2)	267.026 ms (sec)
LIMIT(msec)	$< = 400$
<b>3DH5</b>	
Cycle Calculate	$79CH * 0.4 = 31.6 \text{ (sec)}$
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37(\text{times/sec})$
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492(\text{times})$
Each Channel Dwell Times (2)	2.970 ms (sec)
Dwell Times on Cycle (1) * (2)	317.220 ms (sec)
LIMIT(msec)	$< = 400$



■ Test Graphs

Mode 2: GFSK Continuous TX mode	
DH1	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm Trig: Free Run Avg Type: Log-Pwr TYPE: GFSK DET: P 11:20:29 AM Jan 07, 2019</p> <p>10 dB/div 1.25</p> <p>ΔMkr1 420.0 us -0.09 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz</p> <p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
DH3	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm Trig: Free Run Avg Type: Log-Pwr TYPE: GFSK DET: P 11:22:37 AM Jan 07, 2019</p> <p>10 dB/div 1.00</p> <p>ΔMkr1 1.670 ms 0.02 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz</p> <p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>
DH5	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm Trig: Free Run Avg Type: Log-Pwr TYPE: GFSK DET: P 11:24:24 AM Jan 07, 2019</p> <p>10 dB/div 1.00</p> <p>ΔMkr1 2.970 ms 2.07 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts) Span 0 Hz</p> <p>Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Auto Man Freq Offset 0 Hz Scale Type Log Lin</p>



Mode 4: 8DPSK Continuous TX mode	
3DH1	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm <math>\Delta</math>Mkr1 420.0 <math>\mu</math>s -1.68 dBm Center 2.402000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p>
3DH3	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm <math>\Delta</math>Mkr1 1.670 ms -1.63 dBm Center 2.402000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p>
3DH5	<p>KeySight Spectrum Analyzer - Sweet SA Center Freq 2.402000000 GHz Ref Offset 10.5 dB Ref 20.50 dBm <math>\Delta</math>Mkr1 2.970 ms -1.95 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p>



### Out of Band Conducted Emissions Measurement

#### ■ Test Graphs

Mode 2: GFSK Continuous TX mode																			
2402 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 0 GHz</td> <td>0.769 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 0 GHz	0.769 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.402 0 GHz	0.769 dBm														
2441 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 0 GHz</td> <td>0.894 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 0 GHz	0.894 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.441 0 GHz	0.894 dBm														
2480 MHz	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 0 GHz</td> <td>0.001 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 0 GHz	0.001 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE											
1	N	1	f	2.480 0 GHz	0.001 dBm														






Mode 4: 8DPSK Continuous TX mode	
2402 MHz	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Start Freq: 30.000000 MHz</li> <li>Center Freq: 13.265000000 GHz</li> <li>Mkr1: 2.402 0 GHz, -1.658 dBm</li> <li>Res BW: 100 kHz</li> <li>VBW: 300 kHz</li> <li>Sweep: 88.00 ms (40001 pts)</li> </ul>
2441 MHz	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Start Freq: 30.000000 MHz</li> <li>Center Freq: 13.265000000 GHz</li> <li>Mkr1: 2.441 0 GHz, -0.892 dBm</li> <li>Res BW: 100 kHz</li> <li>VBW: 300 kHz</li> <li>Sweep: 88.00 ms (40001 pts)</li> </ul>
2480 MHz	<p>Key Screenshot Data:</p> <ul style="list-style-type: none"> <li>Start Freq: 30.000000 MHz</li> <li>Center Freq: 13.265000000 GHz</li> <li>Mkr1: 2.480 0 GHz, -1.817 dBm</li> <li>Res BW: 100 kHz</li> <li>VBW: 300 kHz</li> <li>Sweep: 88.00 ms (40001 pts)</li> </ul>




Mode 2: GFSK Continuous TX mode \_ Un-hopping

2402 MHz

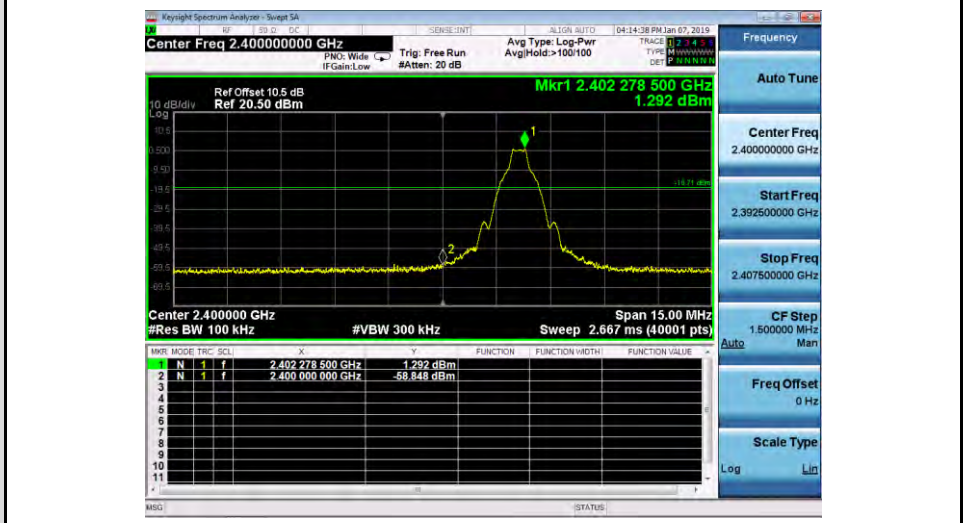


2480 MHz


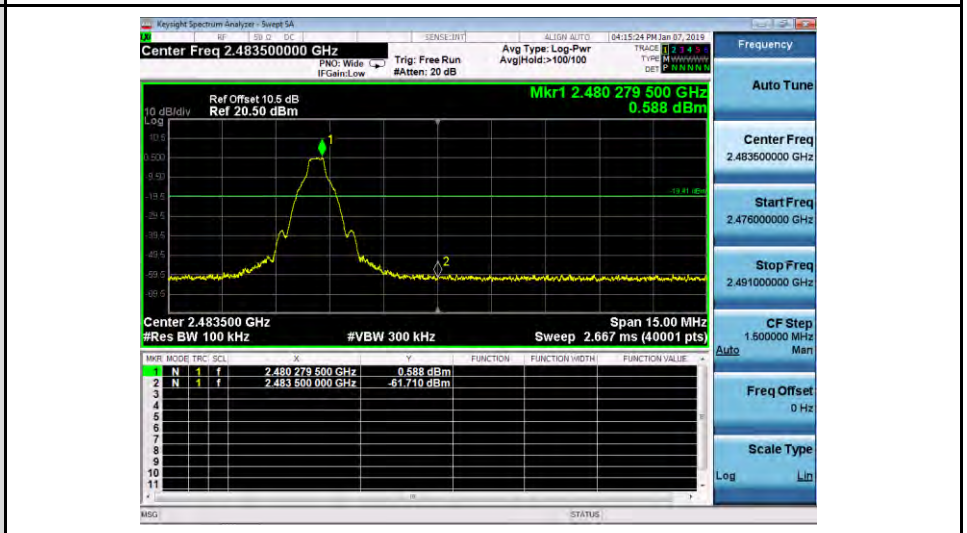


Mode 2: GFSK Continuous TX mode \_ Hopping


2402 ~ 2480 MHz

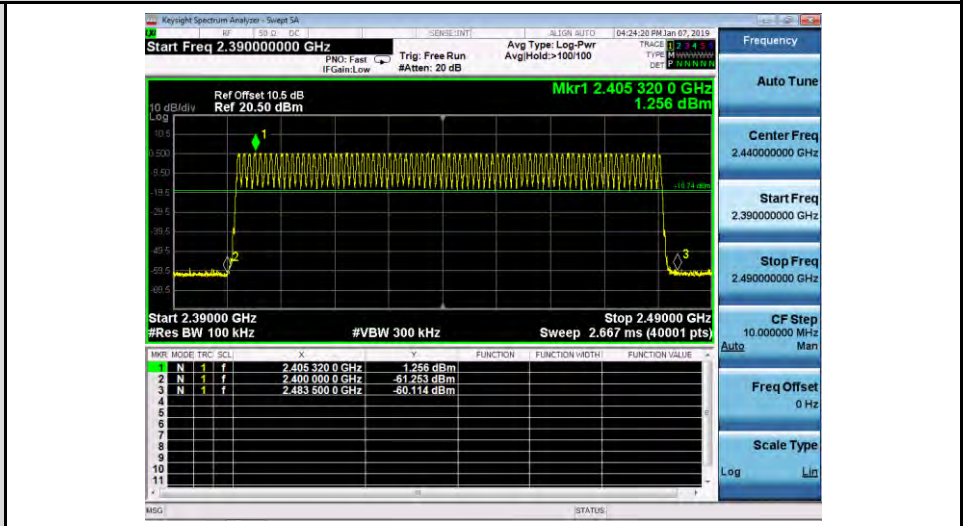

Mode 4: 8DPSK Continuous TX mode \_ Un-hopping

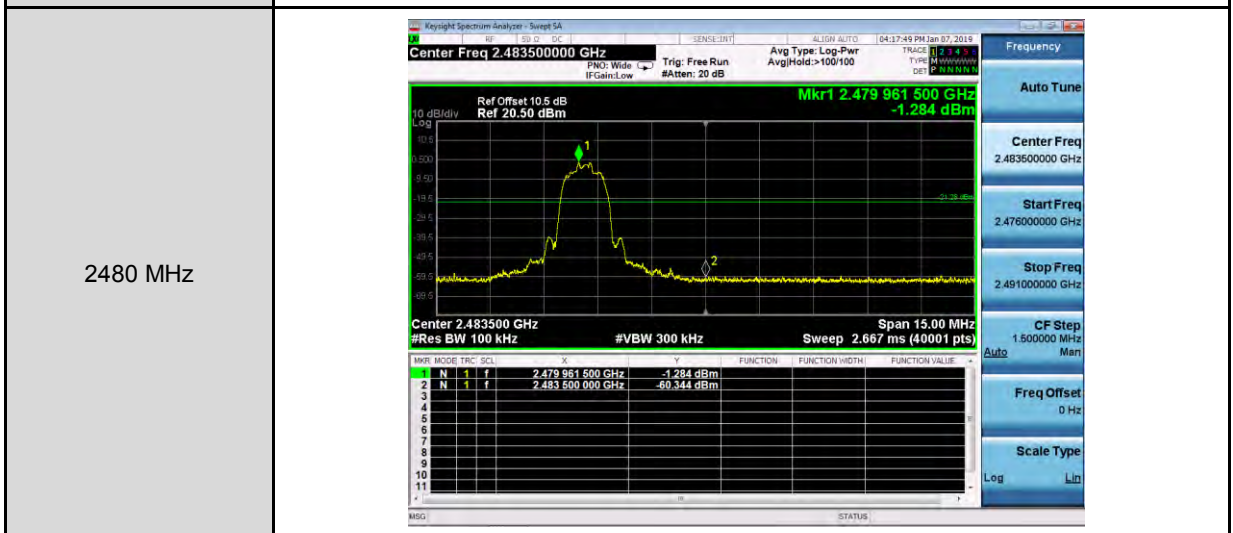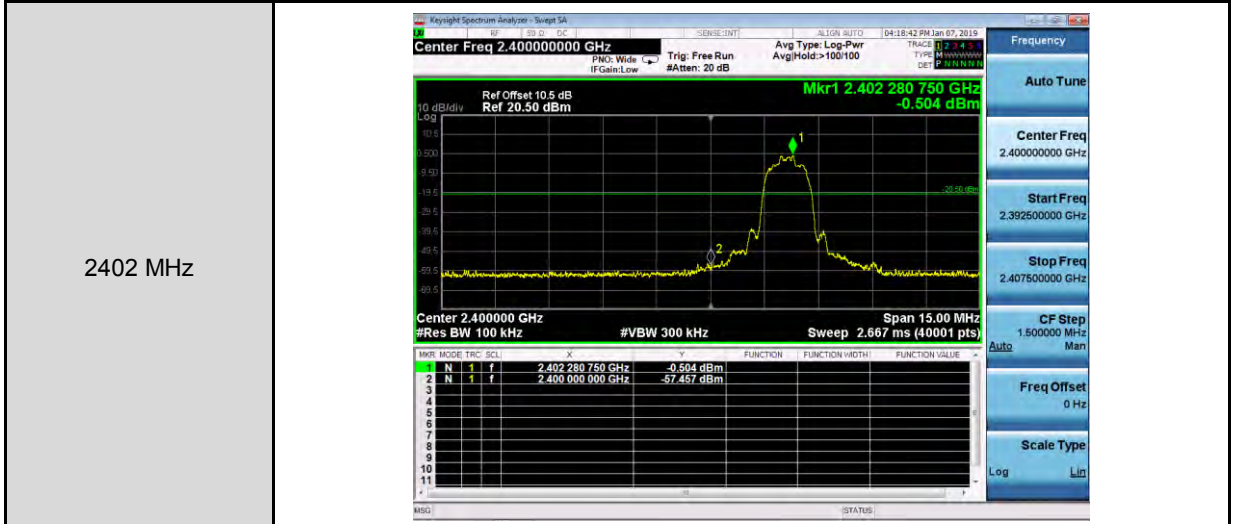

Mode 4: 8DPSK Continuous TX mode \_ Un-hopping

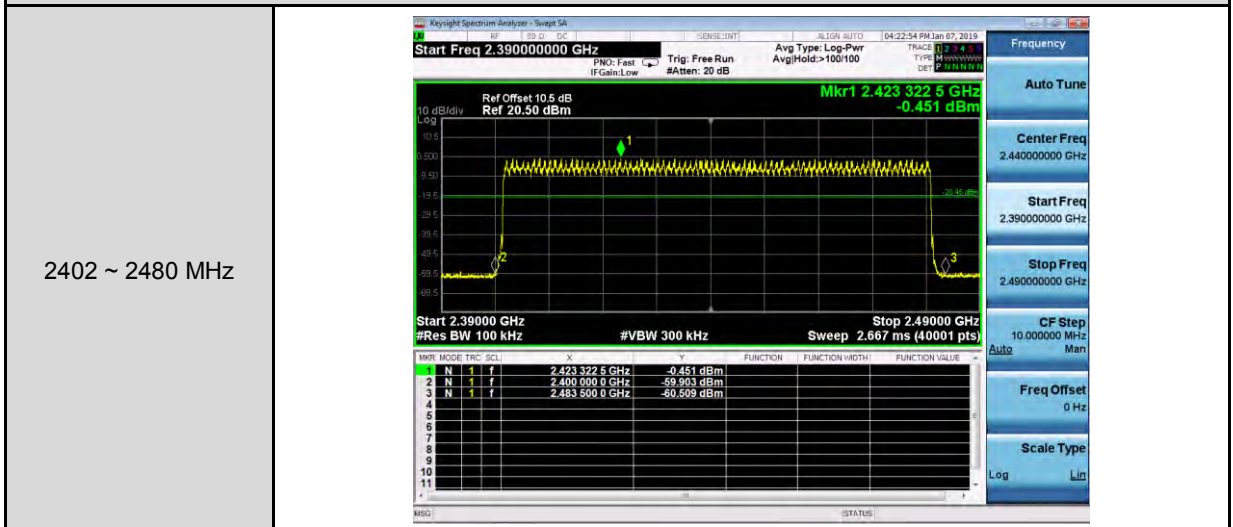



## Annex C. Radiated Emission Measurement

### Harmonic

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m				
Test item:	Harmonic	Power:	AC 120 V/60 Hz				
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH				
Test Mode:	Mode 2						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
157.0700	34.36	-11.29	23.07	43.50	-20.43	QP	H
220.1200	46.75	-14.93	31.82	46.00	-14.18	QP	H
302.5700	37.09	-10.72	26.37	46.00	-19.63	QP	H
372.4100	36.82	-9.15	27.67	46.00	-18.33	QP	H
402.4800	37.21	-8.42	28.79	46.00	-17.21	QP	H
816.6700	29.44	-0.57	28.87	46.00	-17.13	QP	H
86.2600	39.87	-16.93	22.94	40.00	-17.06	QP	V
154.1600	35.30	-11.37	23.93	43.50	-19.57	QP	V
216.2400	43.38	-14.88	28.50	46.00	-17.50	QP	V
402.4800	38.47	-8.42	30.05	46.00	-15.95	QP	V
604.2400	33.74	-3.71	30.03	46.00	-15.97	QP	V
741.0100	30.36	-1.77	28.59	46.00	-17.41	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 23.07= -11.29+34.36


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

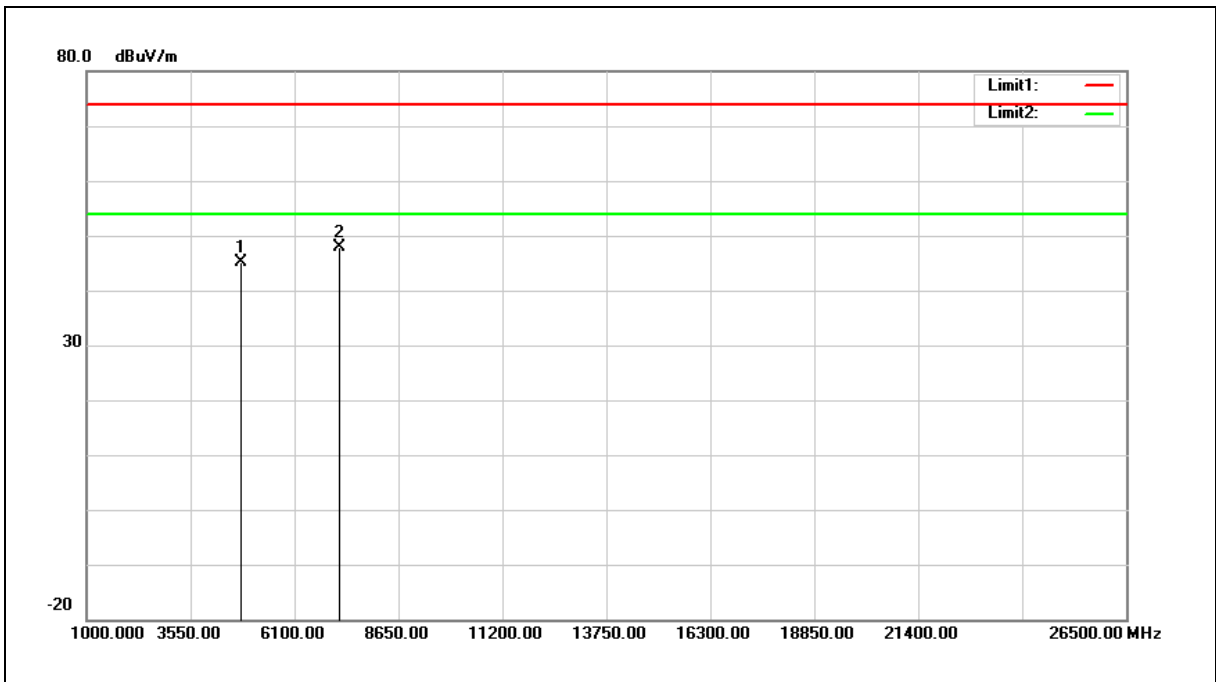

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	50.12	-5.03	45.09	74.00	-28.91	peak
2	7206.000	48.75	-0.97	47.78	74.00	-26.22	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 45.09= -5.03+50.12

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

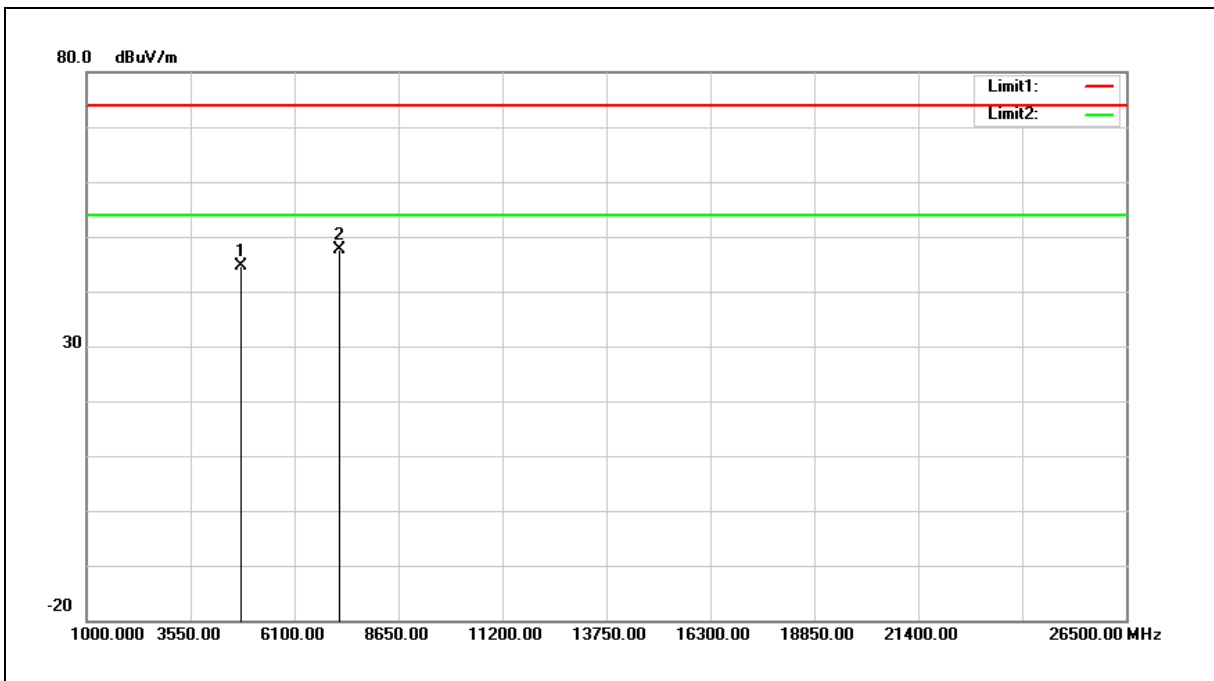

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	49.56	-5.03	44.53	74.00	-29.47	peak
2	7206.000	48.50	-0.97	47.53	74.00	-26.47	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 44.53= -5.03+49.56

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

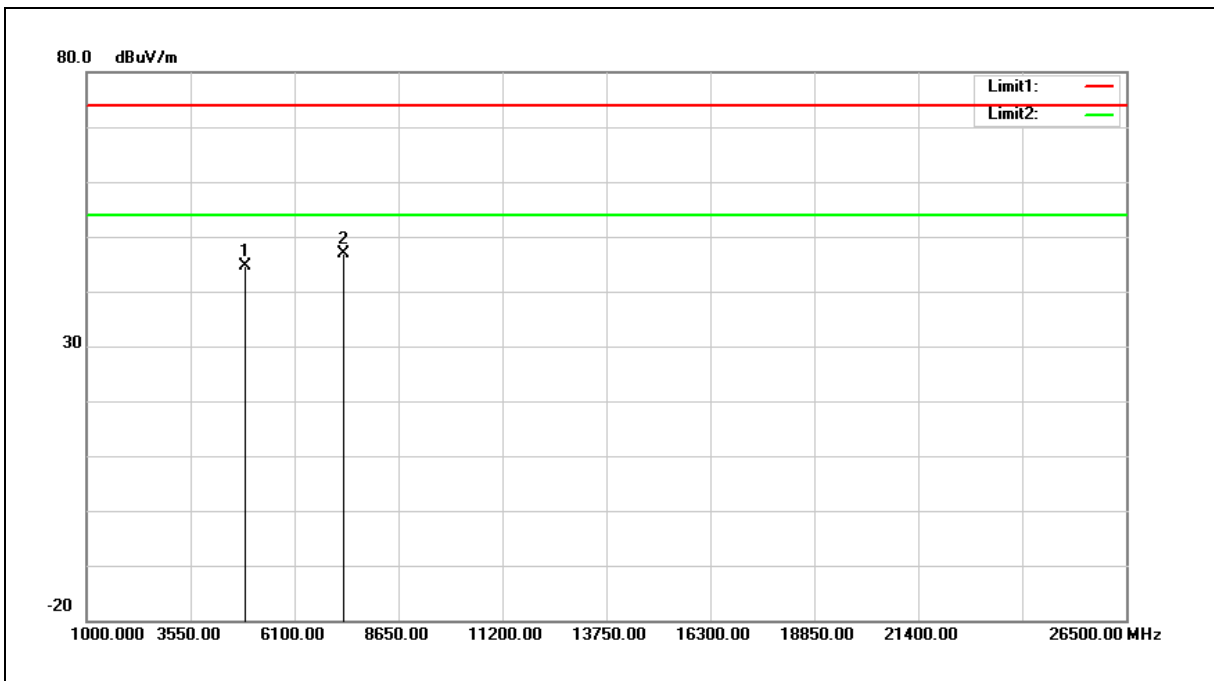


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	49.73	-5.10	44.63	74.00	-29.37	peak
2	7323.000	47.61	-0.63	46.98	74.00	-27.02	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

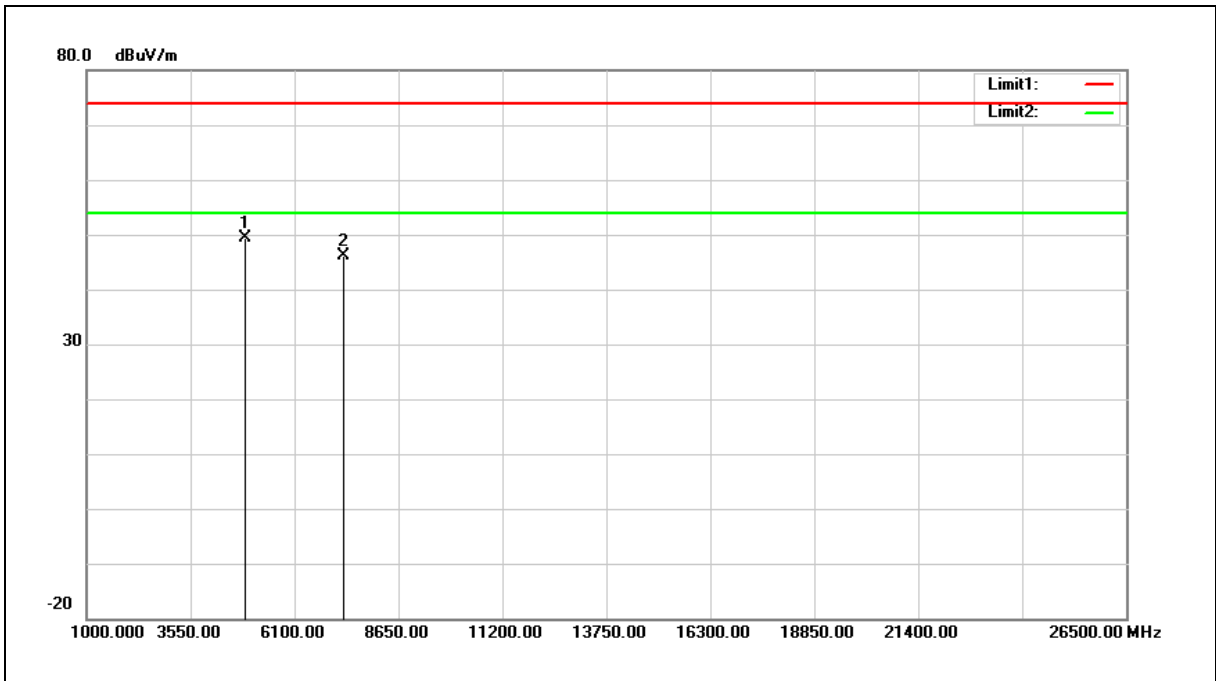

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	54.59	-5.10	49.49	74.00	-24.51	peak
2	7323.000	46.80	-0.63	46.17	74.00	-27.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.





Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

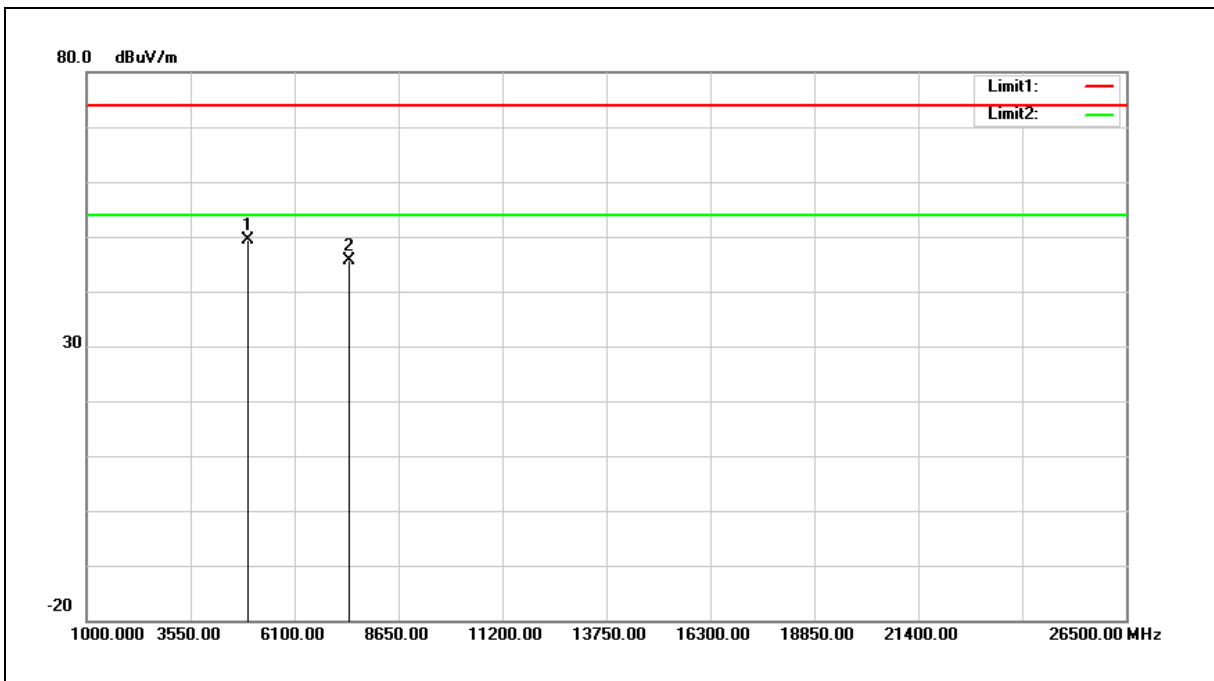


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	54.64	-5.17	49.47	74.00	-24.53	peak
2	7440.000	46.09	-0.35	45.74	74.00	-28.26	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

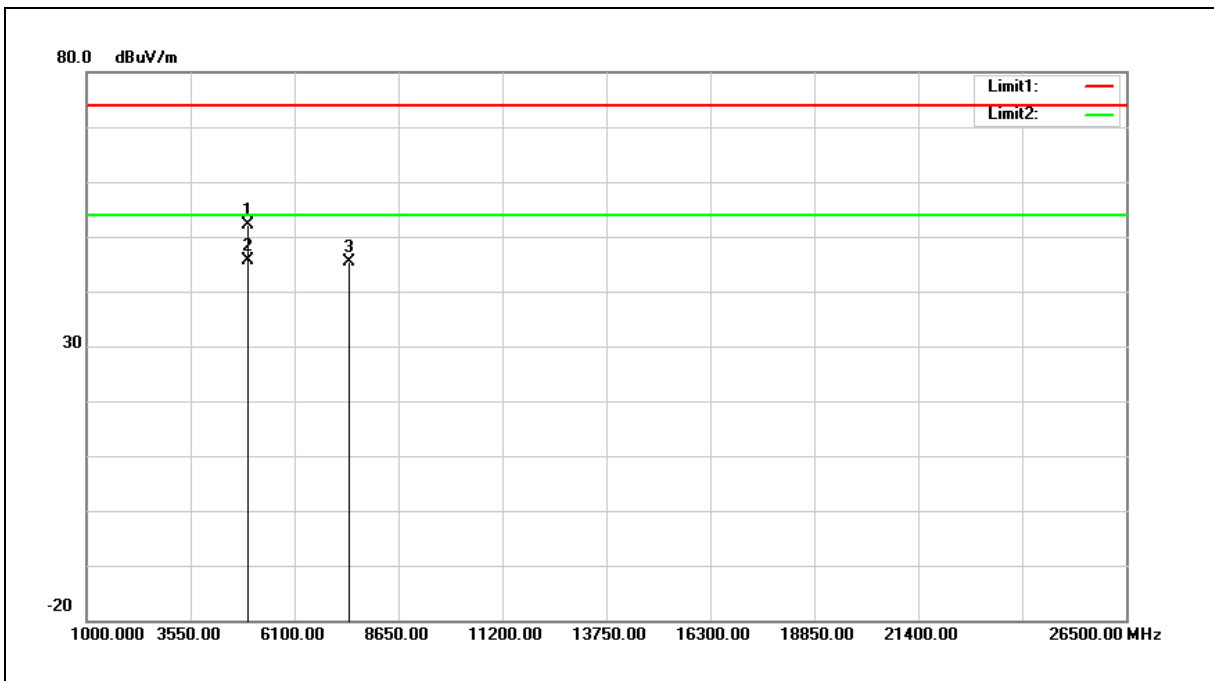

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	57.23	-5.17	52.06	74.00	-21.94	peak
2	4960.000	50.92	-5.17	45.75	54.00	-8.25	AVG
3	7440.000	45.62	-0.35	45.27	74.00	-28.73	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

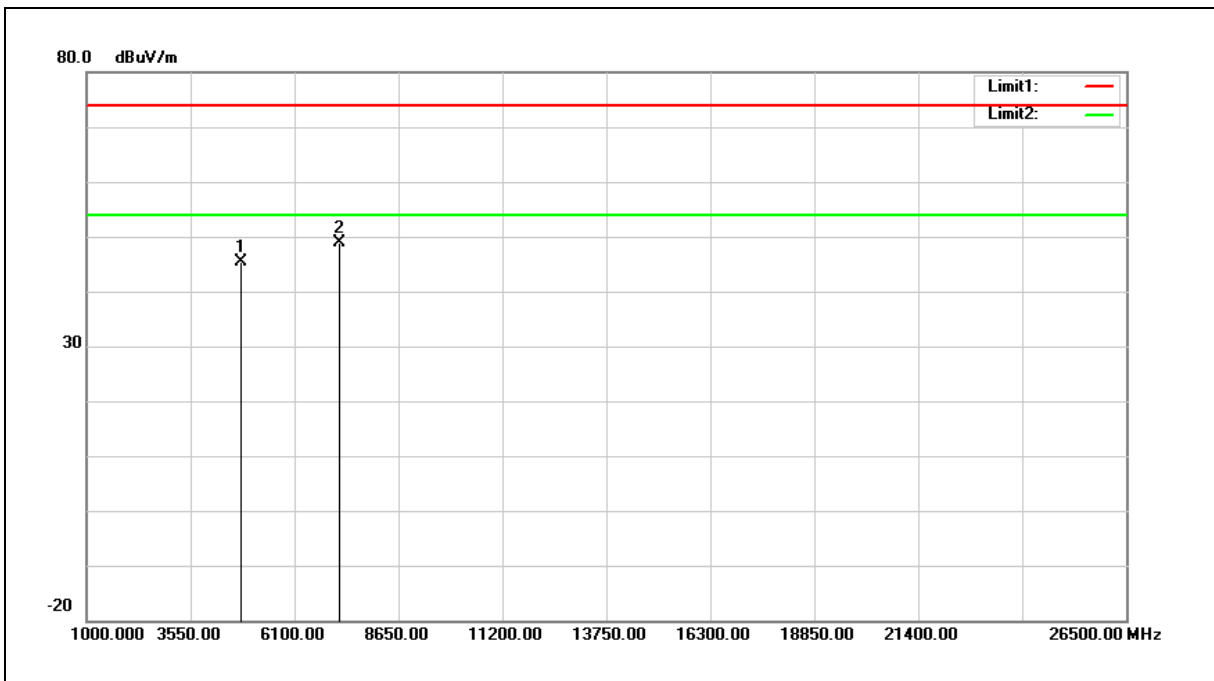


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	50.39	-5.03	45.36	74.00	-28.64	peak
2	7206.000	49.92	-0.97	48.95	74.00	-25.05	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

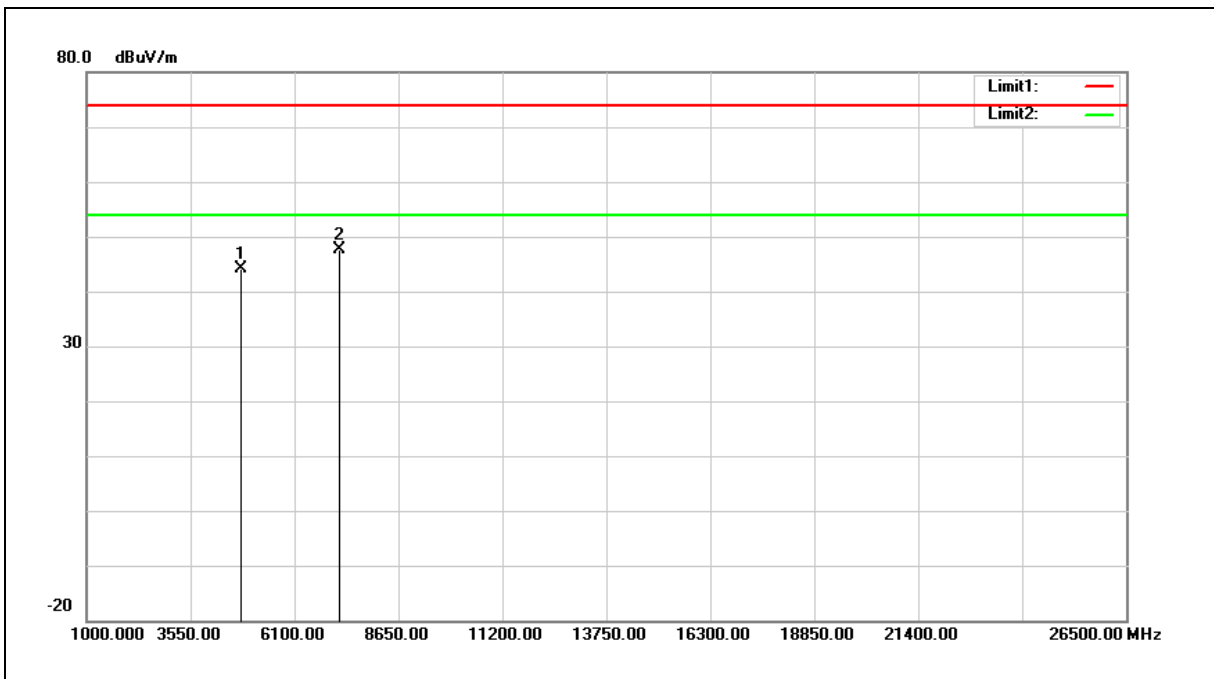


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	49.23	-5.03	44.20	74.00	-29.80	peak
2	7206.000	48.49	-0.97	47.52	74.00	-26.48	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

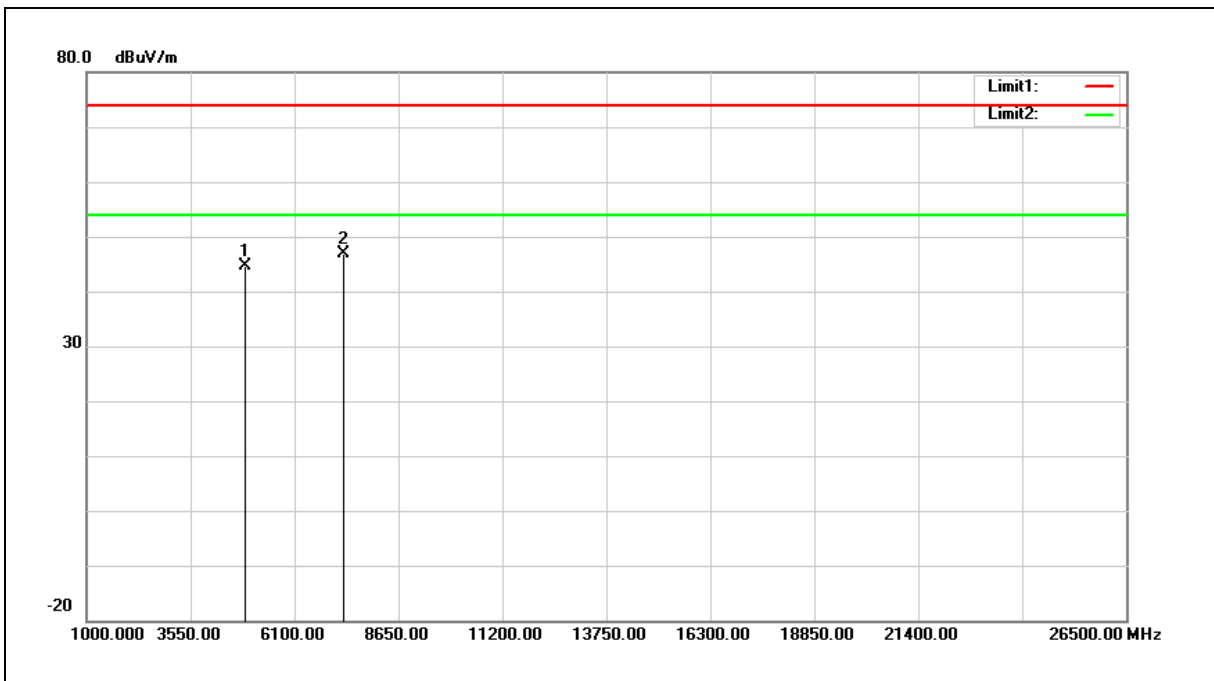


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	49.62	-5.10	44.52	74.00	-29.48	peak
2	7323.000	47.41	-0.63	46.78	74.00	-27.22	peak

- Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

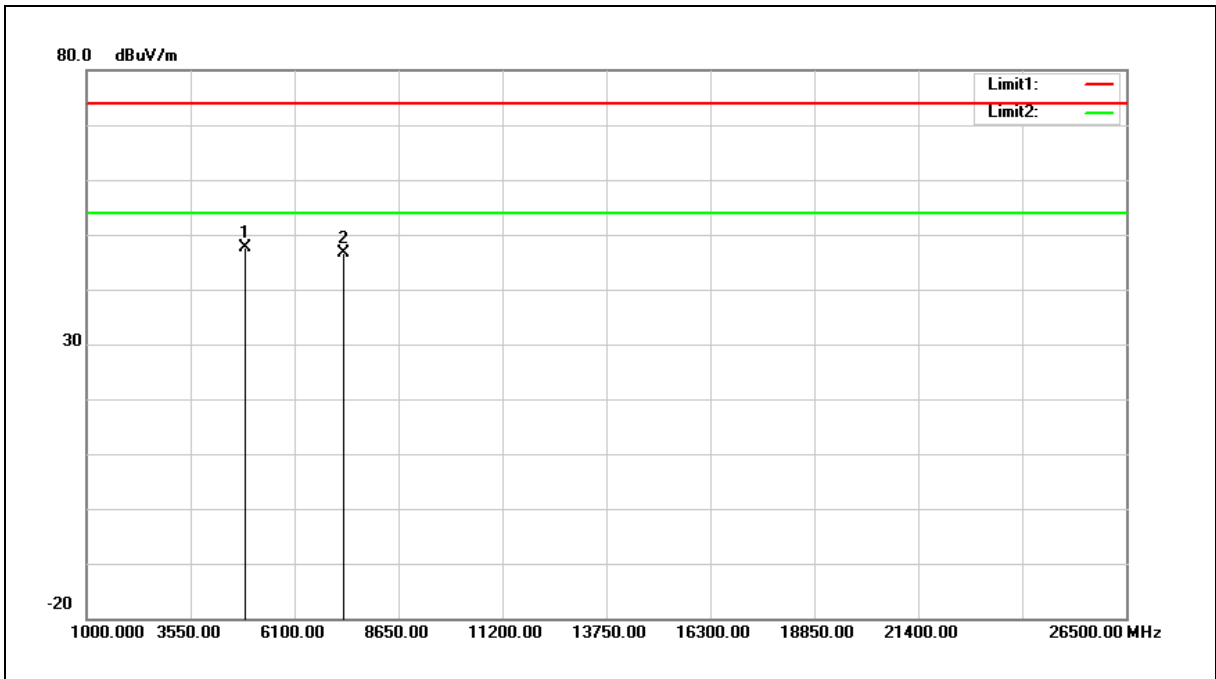


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	52.66	-5.10	47.56	74.00	-26.44	peak
2	7323.000	47.16	-0.63	46.53	74.00	-27.47	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

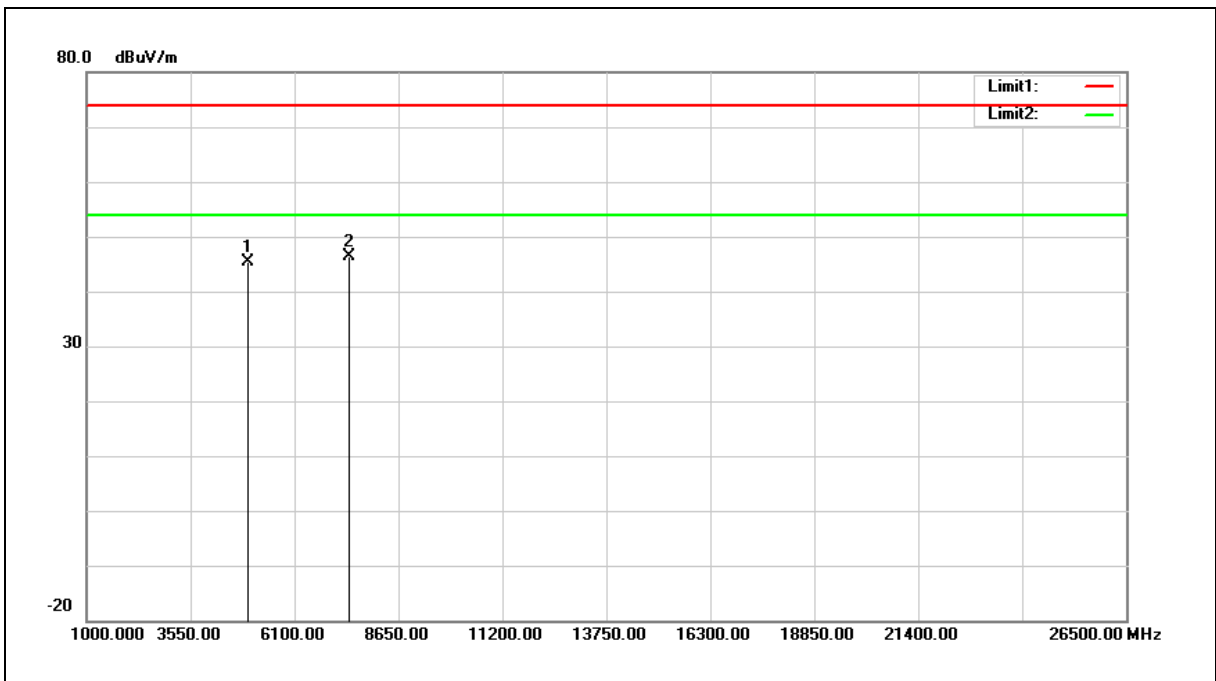

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	50.45	-5.17	45.28	74.00	-28.72	peak
2	7440.000	46.72	-0.35	46.37	74.00	-27.63	peak


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

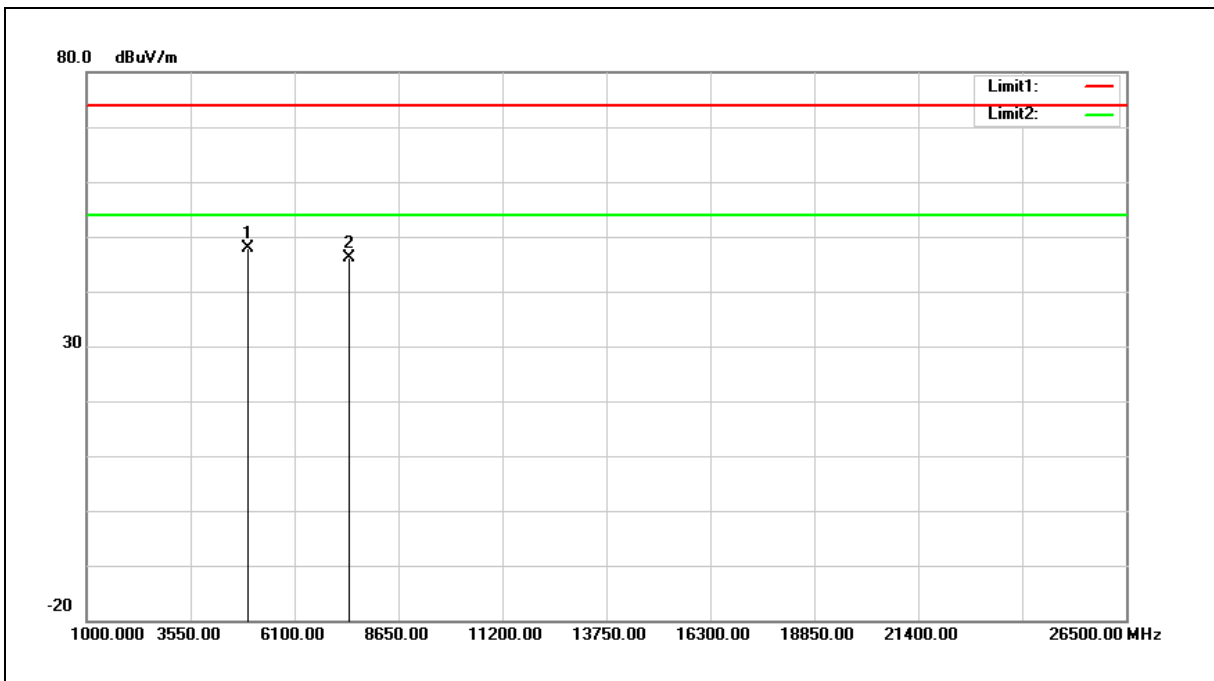

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	53.14	-5.17	47.97	74.00	-26.03	peak
2	7440.000	46.50	-0.35	46.15	74.00	-27.85	peak


- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3. When the peak results are less than average limit, so not need to evaluate the average.





### Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

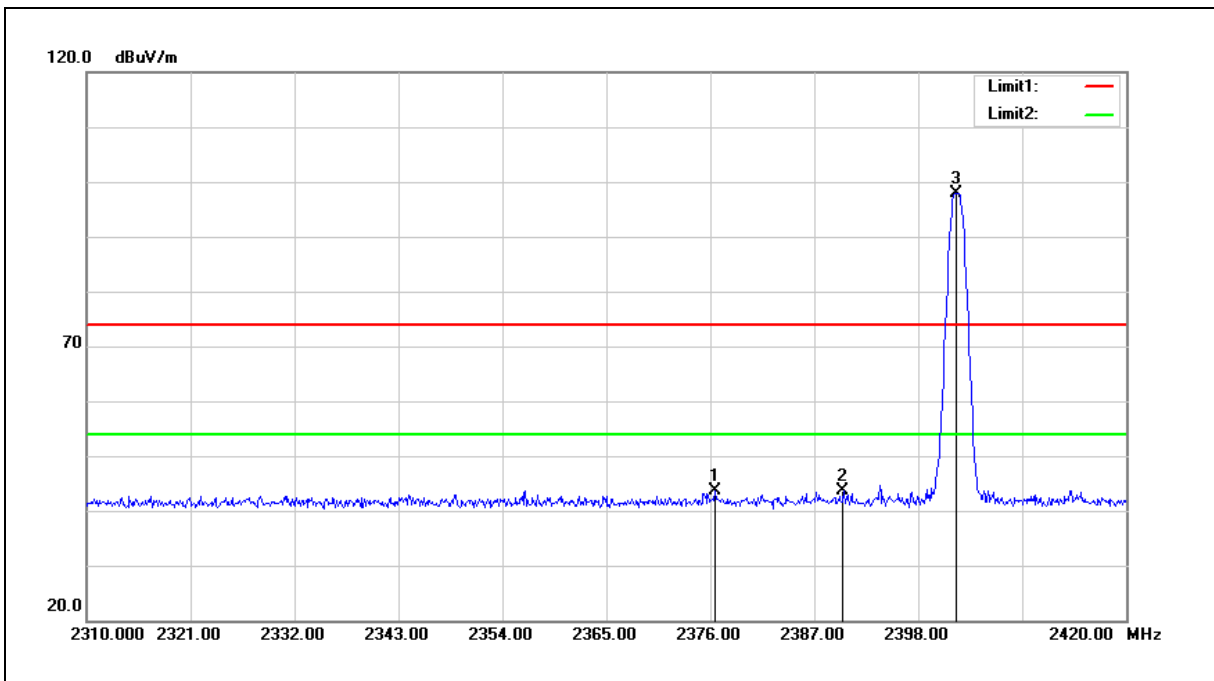

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.550	53.42	-9.83	43.59	74.00	-30.41	peak
2	2390.000	53.38	-9.78	43.60	74.00	-30.40	peak
3	2402.000	107.58	-9.75	97.83	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

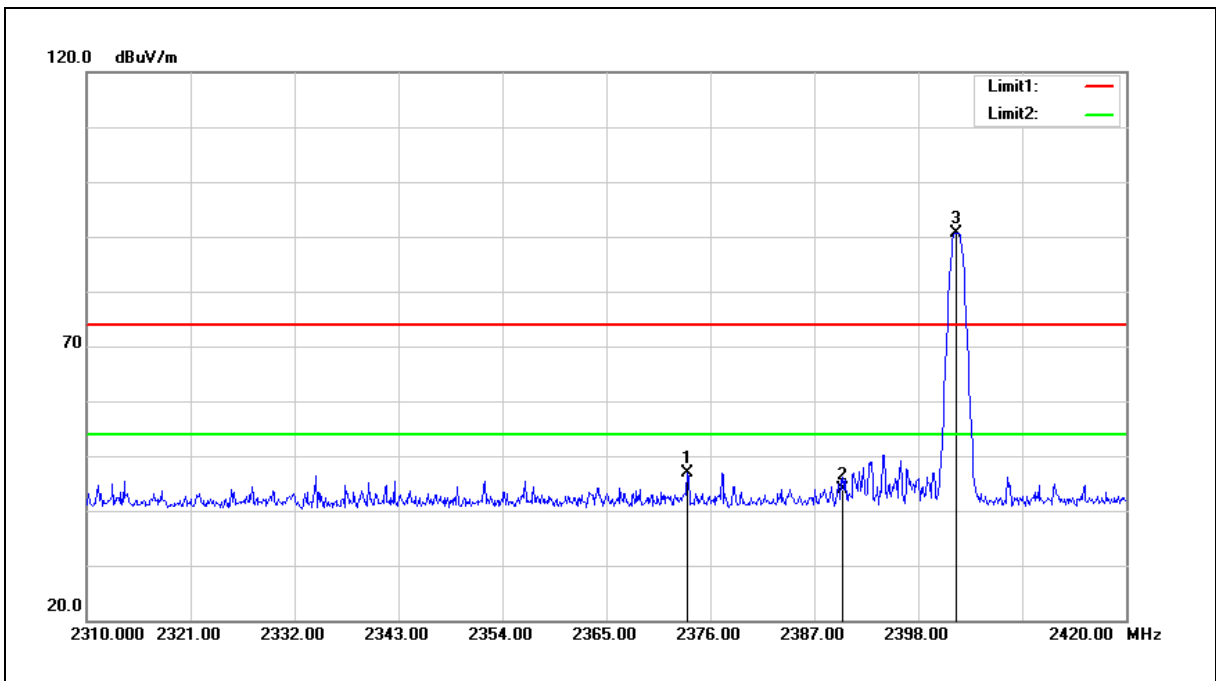


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2373.580	56.78	-9.83	46.95	74.00	-27.05	peak
2	2390.000	53.64	-9.78	43.86	74.00	-30.14	peak
3	2402.000	100.39	-9.75	90.64	---	---	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

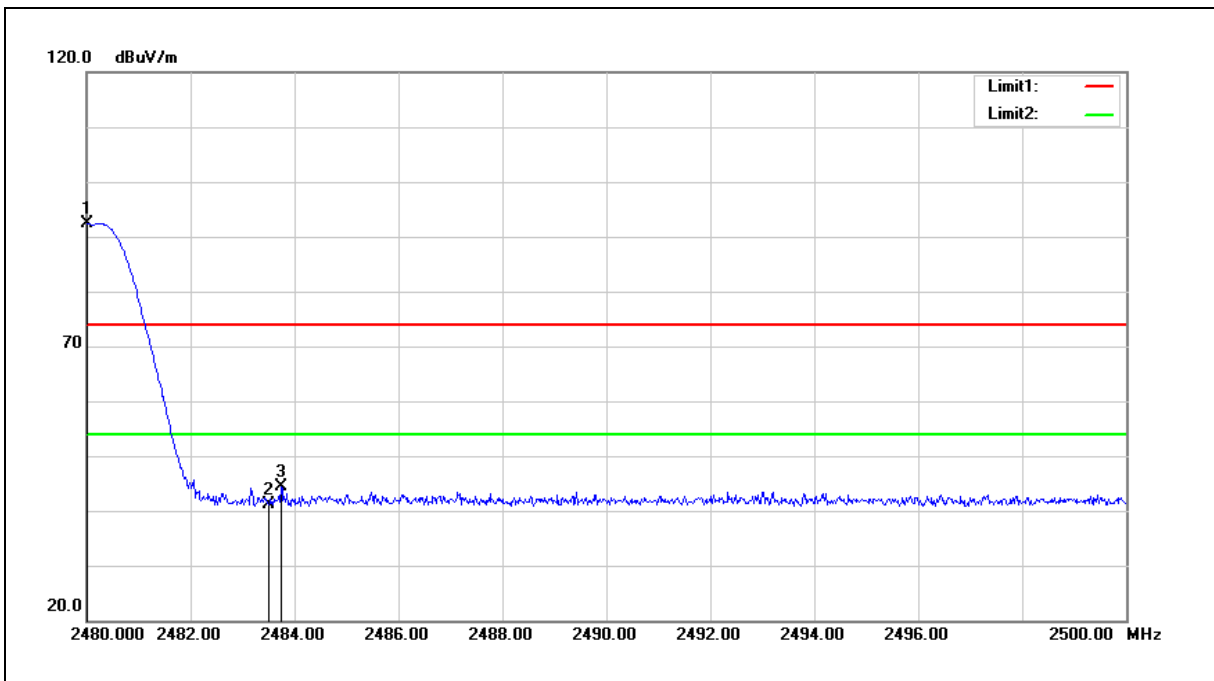


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.93	-9.58	92.35	---	---	peak
2	2483.500	50.77	-9.56	41.21	74.00	-32.79	peak
3	2483.740	53.92	-9.56	44.36	74.00	-29.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).  
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).  
 3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

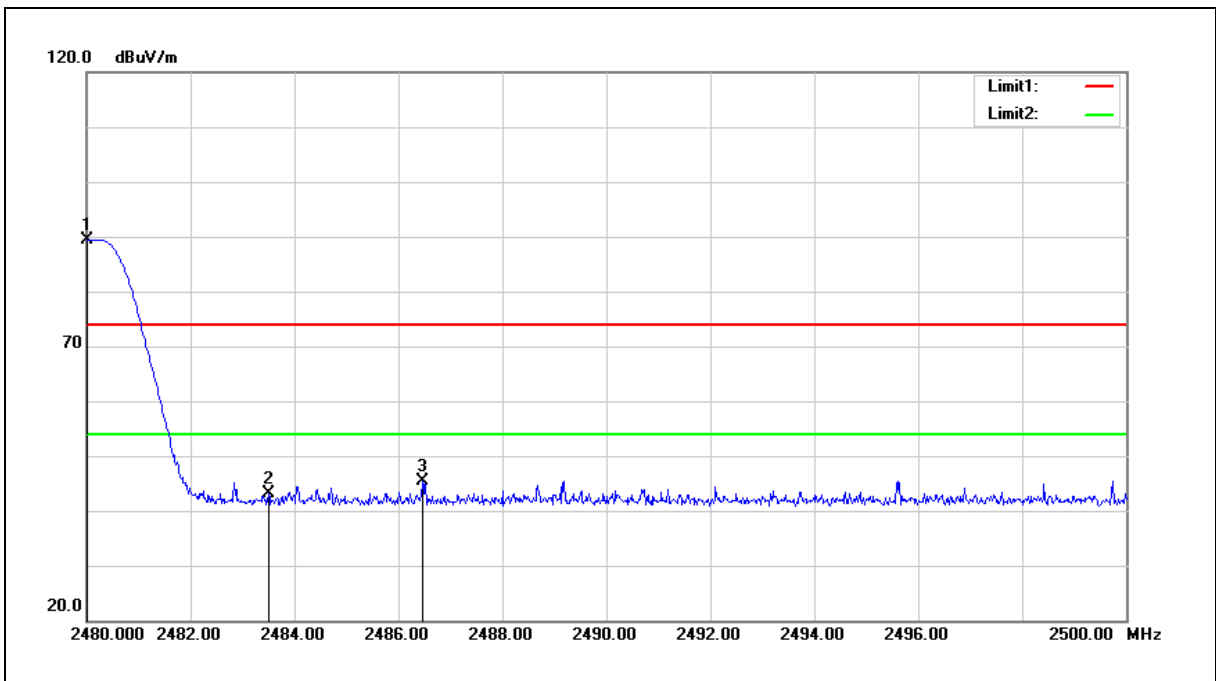

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	98.97	-9.58	89.39	---	---	peak
2	2483.500	52.69	-9.56	43.13	74.00	-30.87	peak
3	2486.460	55.05	-9.56	45.49	74.00	-28.51	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

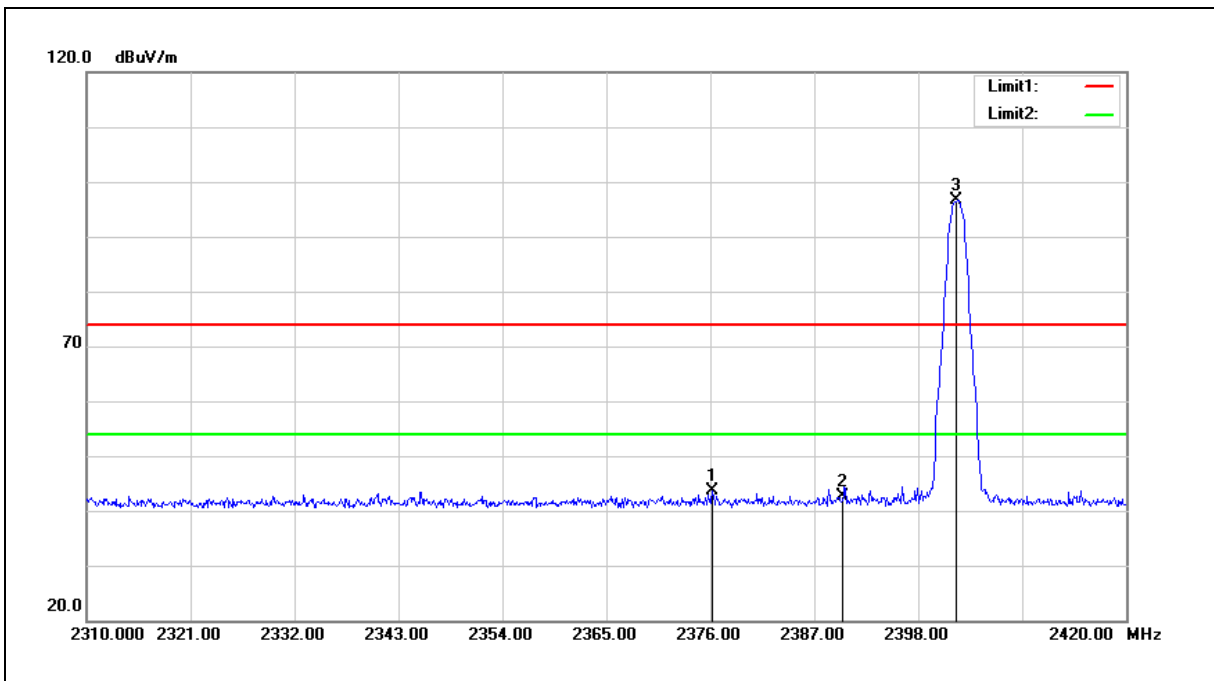

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.220	53.49	-9.83	43.66	74.00	-30.34	peak
2	2390.000	52.32	-9.78	42.54	74.00	-31.46	peak
3	2402.000	106.28	-9.75	96.53	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

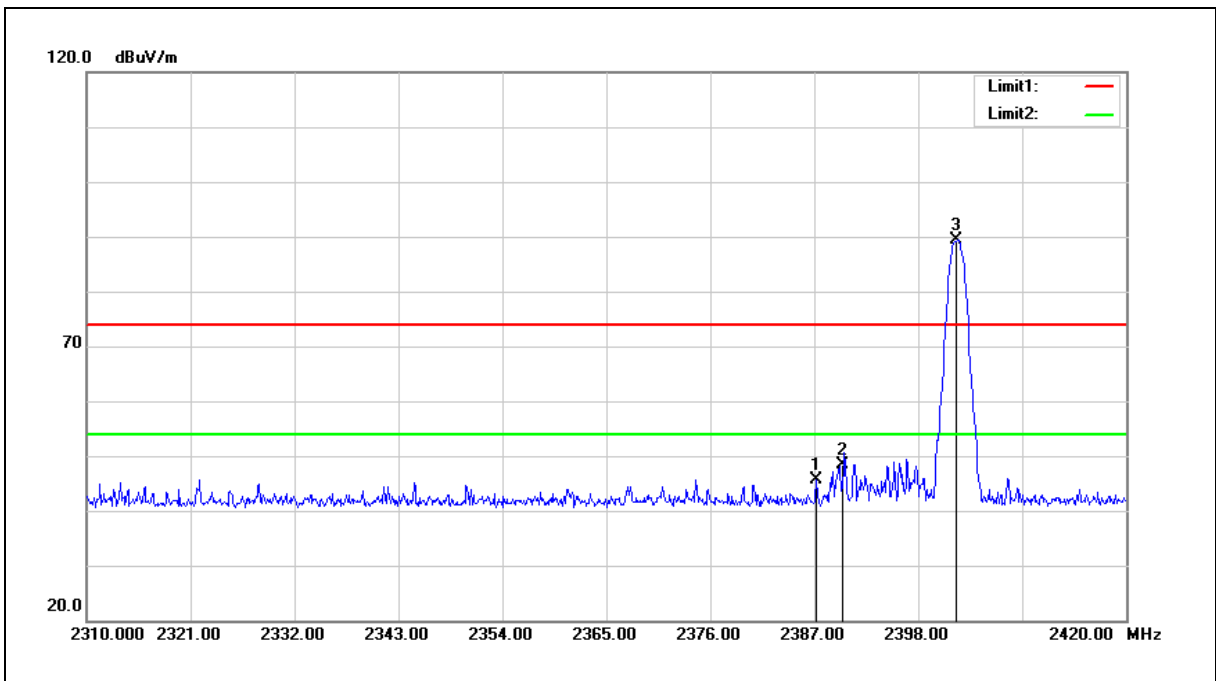

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.220	55.53	-9.79	45.74	74.00	-28.26	peak
2	2390.000	58.13	-9.78	48.35	74.00	-25.65	peak
3	2402.000	99.07	-9.75	89.32	---	---	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

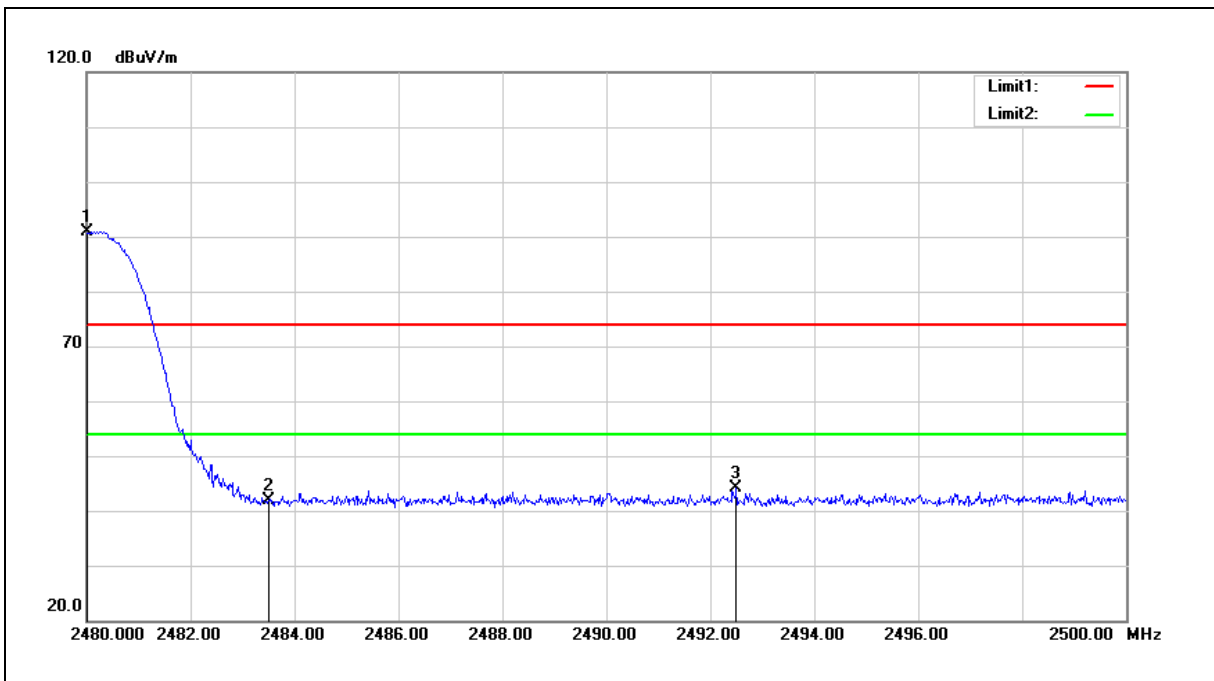

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	100.41	-9.58	90.83	---	---	peak
2	2483.500	51.55	-9.56	41.99	74.00	-32.01	peak
3	2492.500	53.76	-9.55	44.21	74.00	-29.79	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	DC 3.8 V
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

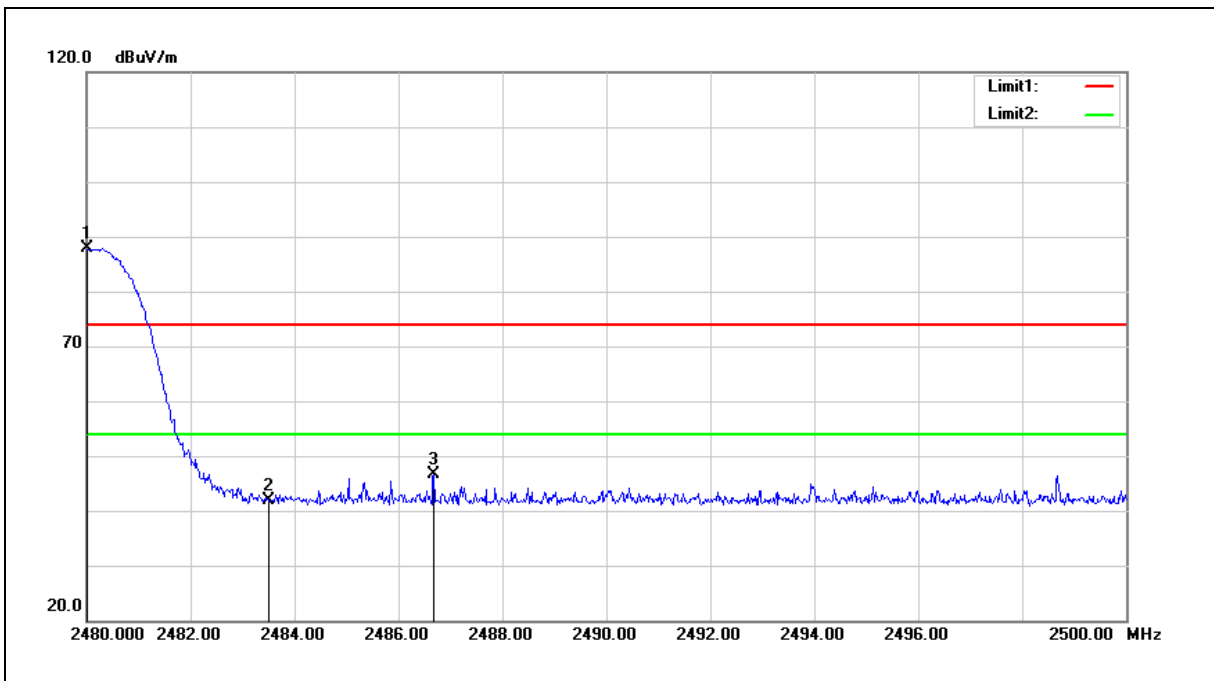

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	97.37	-9.58	87.79	---	---	peak
2	2483.500	51.33	-9.56	41.77	74.00	-32.23	peak
3	2486.680	56.09	-9.56	46.53	74.00	-27.47	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.