

MY ~~X~~ KRONOZ 
Smart Watch DESIGNED IN SWITZERLAND



ZeTime

- USER GUIDE -



ZeTime

THE FIRST SMARTWATCH WITH NO COMPROMISES

Thanks for choosing MyKronoz ZeTime, you're now part of the global family of ZeTime owners who have decided together with us to break the rules of traditional smartwatches to deliver a companion device with no compromises. ZeTime was born in Switzerland, home country of the traditional watch industry and this is why it has been thought and developed with a lot of care and passion with only the final owner in mind. ZeTime is assembled with some high quality materials and technologies to make it not only an amazing smartwatch but certainly a beautiful piece of jewelry you'll be proud of wearing every day.

Stainless Steel Watch Case: ZeTime comes in 6 different colors of high grade stainless steel to suit your style, your tastes but more importantly guarantee you the best durability over time.

Natural Sapphire Glass: In order to provide the best watch possible, it was mandatory for us not to make any sacrifices on the type of glass we were using on ZeTime. That's why we selected a special sapphire glass that works perfectly with our customized touch panel.

Customized TFT Screen & Smart Movement: To be a revolutionary smartwatch we had to achieve something that nobody did before! Delivering a watch with a full round TFT display combined together with a smart mechanical movement controlled by the watch CPU. The result is mind-blowing and offers an absolutely unique user experience.

5 ATM Certification: Because our watches accompany us pretty much everywhere we go, we have built ZeTime to offer the best performance in all kinds of environments and especially when in contact with water.

Up to 30 days battery life: Thanks to our proprietary operating system we're not only able to offer perfect compatibility with both Android and iOS devices but also to deliver unprecedented battery life for a smartwatch. 3 days in fully operational smart mode and an additional 30 days once the screen is off, guaranteeing that you'll never be out of juice for keeping track of the daily time.

TABLE OF CONTENTS

1.	Charging	- 08 -
2.	Battery life	- 09 -
3.	Set up	- 10 -
4.	Calibration	- 11 -
5.	System requirements	- 12 -
6.	Incoming calls	- 13 -
7.	Missed calls	- 14 -
8.	SMS	- 15 -
9.	Notifications	- 16 -
10.	Reminders	- 17 -
11.	Activity	- 18 -
12.	Inactivity alerts	- 22 -
13.	Heart rate	- 23 -
14.	Sleep	- 24 -
15.	Alarm	- 25 -
16.	Camera remote	- 26 -
17.	Music control	- 27 -
18.	Anti-lost function	- 28 -
19.	Weather forecast	- 28 -
20.	Stopwatch	- 29 -
21.	Timer	- 31 -
22.	Find my phone	- 31 -
23.	Customize your watch	- 32 -
24.	Home time zone	- 32 -
25.	Wrist flick	- 33 -
26.	Left hand mode	- 33 -
27.	Night mode	- 34 -
28.	Settings	- 35 -
29.	Firmware update	- 36 -
30.	Watch band	- 37 -
31.	Accessories	- 38 -
32.	Tech. specs	- 39 -



OVERVIEW



I UPPER BUTTON

Press to light up the screen, return to home page from any menu or put the device in standby mode.

I LOWER BUTTON

- Press to light up the screen, go one step back in the menu structure, exit a menu or have access to your calendar events from your home page.
- Press & Hold to Power ON/OFF.

I UPPER + LOWER BUTTON

Press & Hold the upper button and the lower button for 10 seconds to reset the device.


Warning: all data stored into the device will be lost.

I SMART CROWN

- Turn the crown to navigate through the main menu.
- Press the crown to select an app.
- Double press to manually move the hands to 9:15
- Single press to enable night mode (from standby screen).

BASIC TOUCHSCREEN OPERATIONS

I FROM THE WATCH FACE

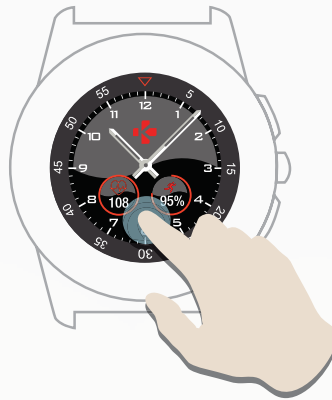

Long press
to change your
watch face.

Swipe right
to access
activity
menu.



Swipe left
to access
main
menu.



Swipe down
to display
shortcuts
menu.



Swipe up
to display
notification
center.



I FROM ANY SCREEN

Single tap
To select an item
or open
a menu.



Double tap
To return to
previous
page.



SMART CROWN OPERATIONS

ZeTime is equipped with a smart crown to enhance the navigation experience in the watch menus. It can be used from many different screens to select, navigate or adjust some settings. Pressing the crown will validate your selection.



Turn the crown
to navigate through the main menus.

Press the crown
to select an app.

Double press
manually move the hands to 9:15 from any screen.

Single press
to enable night mode
from standby screen.

SHORTCUTS

Swipe down from the main watch face to access ZeTime shortcuts.

Heart rate

Keep track of your heart rate.
Control it.

Weather

Instantly access the local weather conditions and next 3 days forecast.

Brightness

Set screen brightness for better visibility.



Flight mode and Bluetooth status

Flight mode is disabled.
Bluetooth is not connected.



Flight mode is enabled.



Flight mode is disabled.
Bluetooth is connected.



Vibration Buzzer



Turn on vibration (default).



Turn on vibration & buzzer.
(Also enable customized setting from the mobile app).



Turn on buzzer.



Mute all notifications.

Find my phone

Helps you find your phone around as long it is in range with your ZeTime.

Battery level



Shows the remaining battery level of your watch.

1. CHARGING YOUR ZeTime


We recommend you to initially charge your ZeTime for about 90 minutes before using it for the first time.



ZeTime



CHARGER



CABLE

1. Position the back of your ZeTime on the charging dock.
2. Plug the USB cable into the charger.
3. Plug the large end of the USB cable into a USB power source.
4. A battery indicator will fill in to indicate charging is in progress and turn to solid green when it's fully charged.
5. Unplug the cable after ZeTime is charged.





ZeTime will operate for up to 3 days in smartwatch mode and an additional 30 days in traditional mode.



When the battery level gets low, a low battery indicator will appear on the watch screen.

2. BATTERY LIFE

Your ZeTime operates with a single battery, which powers both the digital screen and analog movement in the most energy efficient manner in order to offer up to 30 days battery life on a single charge.

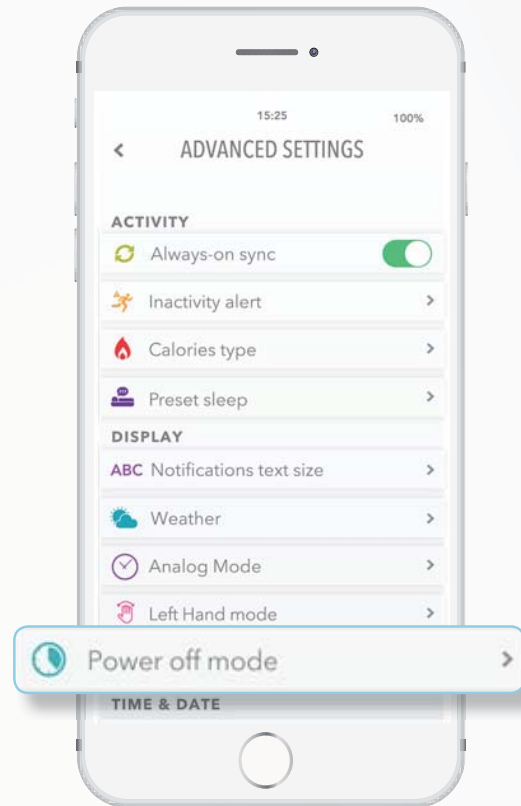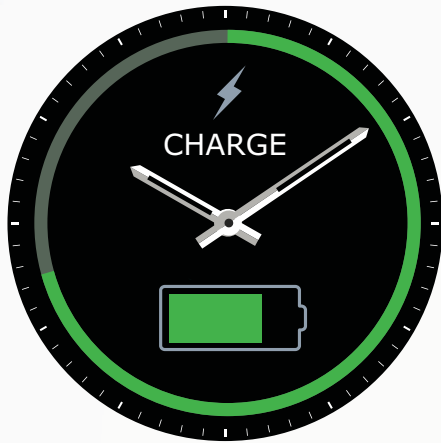

When fully charged, ZeTime will deliver about 3 days battery life in its fully operational smartwatch mode, tracking your activity and alerting you of incoming notifications or calls.

Once a certain minimum battery level will be reached, ZeTime will automatically turn off the smartwatch functions to continue providing an additional 30 days battery life to power the smart movement.

During this 30 days period, hands will only indicate the local time, no additional functions will be available.


You have the freedom to enable activity tracking together with analog mode but this will affect the overall battery life. This operation can be performed in the mobile app advanced settings (power off mode > Hands running + Activity tracking).



The 3 days smartwatch function is an estimate based on the anticipated average use of the device. Many features and functions - such as the HR tracker and the touchscreen - consume more energy, so your actual battery life may vary.

3. SET UP

When turning ON your ZeTime for the first time, you'll be prompted to download the ZeTime mobile app on your smartphone in order to proceed to its initial set up.

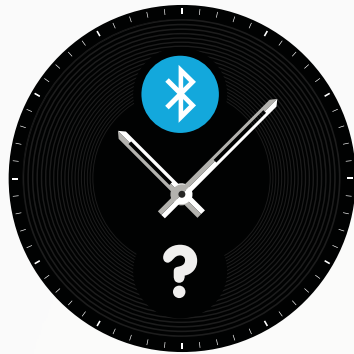

HOW TO SET UP YOUR ZETIME

1. Ensure the Bluetooth is enabled on your mobile smartphone.
2. Download the Zetime mobile app from the app store or the Google Play Store.
3. Open ZeTime mobile App on your smartphone. Sign up if you are a new member or Log in with your existing account. After entering your personal information, follow the on-screen instructions.
4. Make sure ZeTime is nearby and select it in the list of devices.
5. A pairing request will appear on your smartphone. Press pair to accept it.
6. Then, you will receive a pairing request on your ZeTime display. Tap on the screen to accept the pairing.
7. When ZeTime is successfully paired, you will be notified on both devices.

At the end of the setup process, you might be prompted to install a new version of the watch firmware. We strongly advise you to do it before you start using ZeTime. This will ensure that you have the most up to date software on your device and benefit from all the latest features. Before the update make sure to have more than 30% battery on your smartphone.




After the initial pairing, ZeTime will automatically connect to your phone as long as it is turned on and within range. If you want to pair your ZeTime with another account or smartphone, you first need to unpair from the current one. On the mobile app, go to Settings > click on Unpair ZeTime. Then, repeat the pairing procedure described above.


4. CALIBRATION

During the set up process, you'll be prompted to proceed to hands calibration. This is a mandatory step to ensure your watch is perfectly time-synched with your smartphone.

To calibrate your watch, move hands by slowly swiping your finger around the virtual dial on the smartphone screen. You can fine-tune the position of the hands by using the « + / - » on the phone screen.

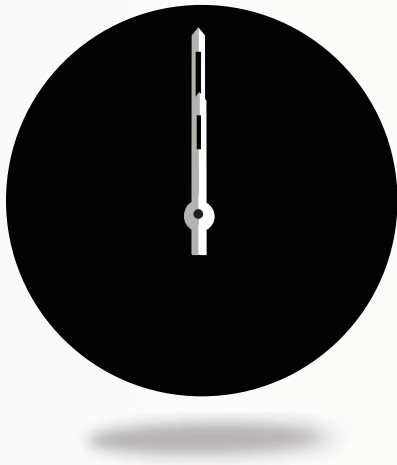

Align the hour hand with the red dot at the top of the screen, and align the minute hand with the hour hand, then press NEXT to synch your ZeTime with your smartphone.

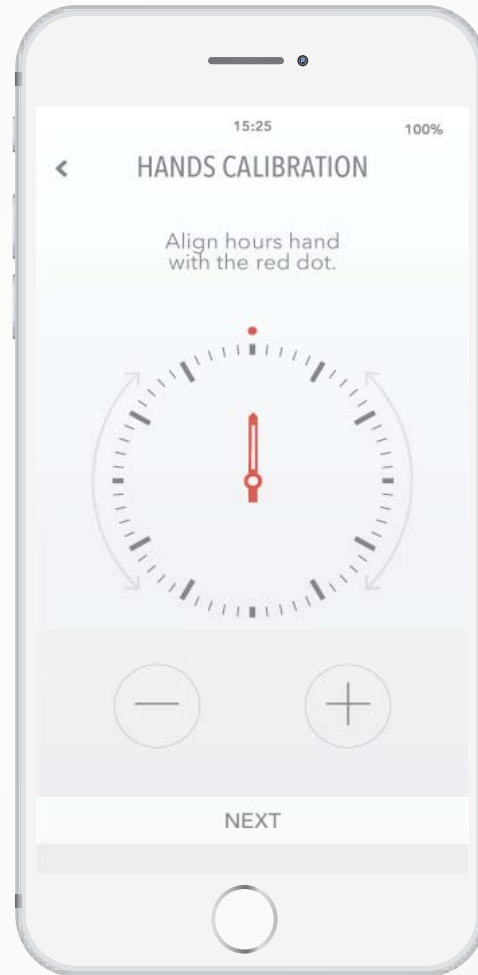

Calibration can be done after the set up process directly on the watch in the settings or from the mobile app by following the steps below:

- Open your app.
- Click on Settings and then on Advanced Settings.
- Then, click on Calibration and follow the on-screen instructions.



When travelling in another time zone, do not forget to synchronize your watch with the mobile app in order to make it automatically adjust to local time.

5. SYSTEM REQUIREMENTS

It is required to install ZeTime mobile app on your smartphone to properly set up and use your watch.



– iOS –

iOS 8+ devices with Bluetooth 4.0 BLE

iPhone 4s, 5, 5c, 5s, 6, 6s, 6s plus, 7, 7 plus, 8, 8 plus & X
iPad (3rd, 4th and 5th generation), iPad Mini,
iPod touch (5th generation)



– ANDROID –

**Selected Android 5.0+ devices that support
Bluetooth 4.0 BLE**

Visit www.mykronoz.com to get the latest compatibility list.



ZeTime will sync the notifications of SMS, emails, social media, calendar events, and personal life reminders once the ZeTime app has been successfully installed on your smartphone .

6. INCOMING CALLS



When receiving a call, a notification will appear on your ZeTime. You can accept or reject it straight from your wrist. The phone call will occur on your smartphone, not on your watch.



Android users can also reply to an incoming call by sending a short preset text message or an emoji directly from their watch (not available for iOS users).

7. MISSED CALLS



Missed calls are visible in the notification center as well as in the dedicated missed call app in the watch.




To delete all your missed calls, long press the screen.

8. SMS



With ZeTime you can receive and read your SMS straight from your wrist. Thanks to its proprietary smart movement, ZeTime detects the information that is displayed on the screen and moves the hands horizontally to maximize visibility, allowing the text to be seen clearly.

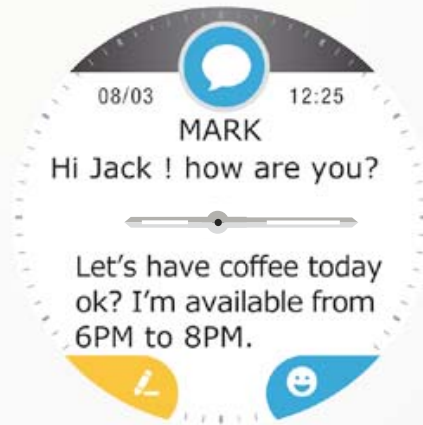

Quick reply (Android only): ZeTime allows you to reply using emojis or preset short answers directly from your watch. You can also create your own preset answers using the mobile app.



To delete all your SMS notifications, go on the SMS list and long press the screen. To erase a specific SMS, select the message and slide it to the left with your finger.


9. NOTIFICATIONS



ZeTime is able to receive virtually all notifications received by your phone.




Each notifications will appear over your selected watch face with its dedicated icon to identify the service. Some notifications may be identified with a blue generic icon.

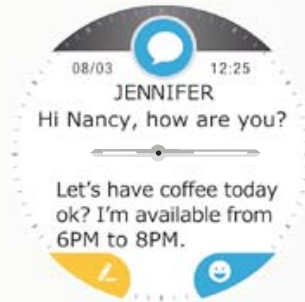


To read your notification, simply touch the screen on the notification area and it will open instantly.

Hands will automatically move away from the text to facilitate your reading.

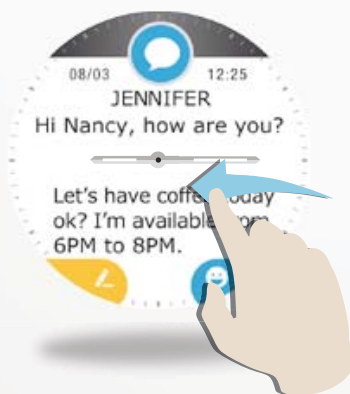

Swipe left to delete the notification.

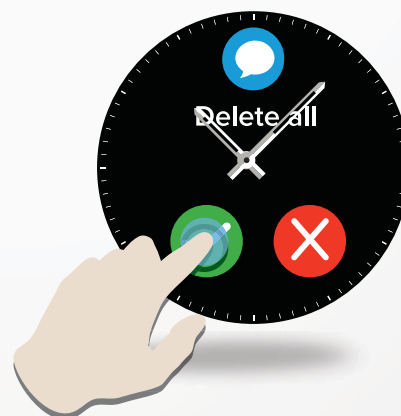


Long press on your notifications list to delete them all.




Calendar events: ZeTime synchronizes your events from your calendar. You can see your next upcoming 16 events in your ZeTime. Your smartwatch will notify you of upcoming events. You can slide to discard this event.

NOTIFICATIONS SETTINGS:

When you open your ZeTime mobile app and select Notifications in the settings menu, the following screen will appear:

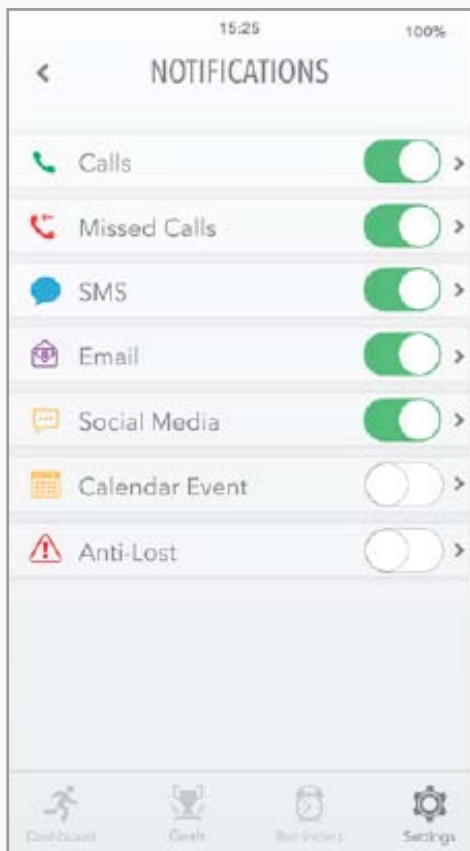


Press on the green button to activate or disable the notifications.

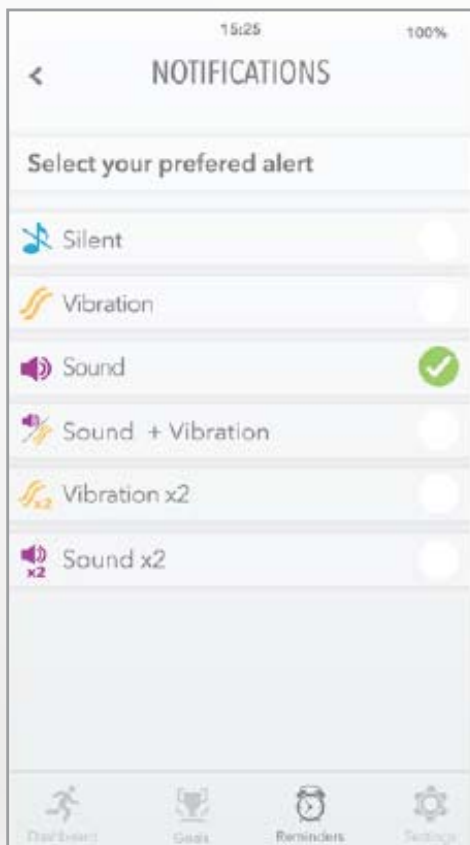

For each type of notification you can select the type of alert you want based on ring, vibrate or silent. To set it up, simply expand the option menu by tapping on the notification type.

10. REMINDERS




You can set and manage reminders directly with ZeTime mobile app. You can create up to 10 reminders and select the type, time and schedule for them. For each reminder you can decide the type of alert you want to receive (ringtone, vibration or both). A single tap on your ZeTime helps dismisses the reminder. If not dismissed, the same alert will repeat after two minutes.

I TO SET UP A REMINDER

- Open the ZeTime mobile app.
- Click on the reminder tab.
- Set up your preferred reminder type.
- Choose the date and time of the reminder.
- Select the type of alert.

I REMINDER ICON

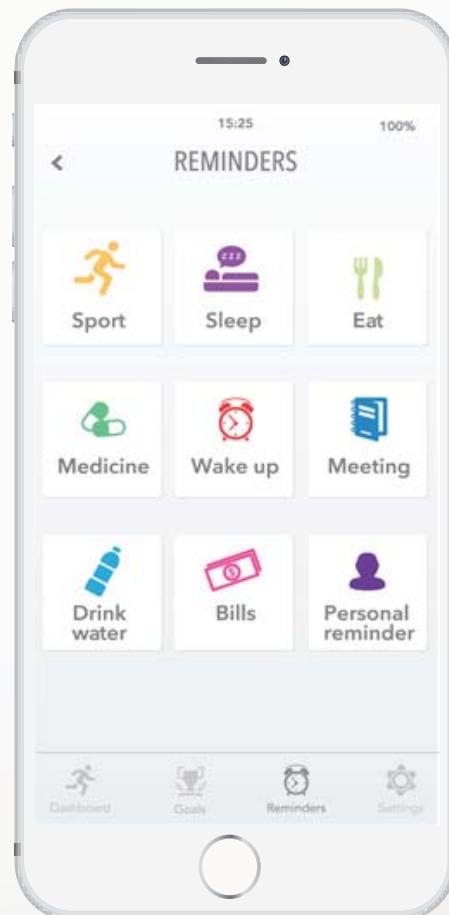

After setting your reminders, you can find them in the corresponding menu on your ZeTime.

11. ACTIVITY



ZeTime automatically tracks your activity throughout the day. On the main application screen, you can view your daily activity in real-time over your set goals and get a detailed report in the mobile app.

Your watch has a built-in 3-axis accelerometer that allows you to track your daily activity based on your movements. This, together with your profile information, allows your watch to calculate your steps, walking distance, minutes of activity and calories burned. In order to get the most accurate results we recommend you to wear your watch on your left wrist if you're a right handed and to your right one if you are a left handed.



Overall activity



Steps



Distance



Calories burned



Minutes of activity

I FROM YOUR ZETIME

FOLLOW YOUR ACTIVITY:

- You can access the activity home screen simply by swiping to the right from the watch face or selecting the corresponding menu from the first page of the applications menu.
- Swipe down to see your number of steps, distance, calories and active minutes. You can also use the smart crown to navigate inside this menu.




The activity tracker resets at midnight and ZeTime has the ability to store up to 10 days of your activity data. Then, you will have to synchronize your ZeTime with your mobile app in order to avoid loss of data.


I FROM ZETIME MOBILE APP

CUSTOMIZE YOUR ACTIVITY DASHBOARD:

When you have set up your watch with your mobile app, you will be able to customize your Activity page at your convenience.

In order to do so, you just have to long press on one of your activity bars for 3 seconds. Then you must hold this icon  and make the entire section slide down or up.



Long press on any of your activity bars for 3 seconds to save your modification.

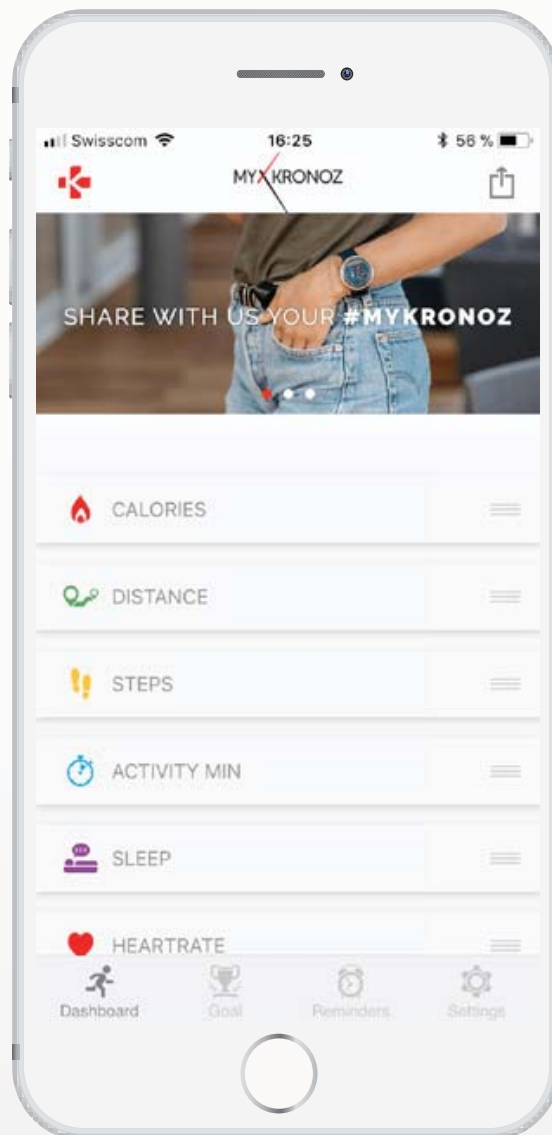

SET UP ACTIVITY GOALS:

You can set your daily goals from the mobile app or in the activity section of the watch settings.


We recommend you to set ambitious but realistic goals in order to keep a healthy daily activity. You can obviously raise your goals over time to increase your performance. On average it is recommended to have at least 30 minutes of physical activity per day.

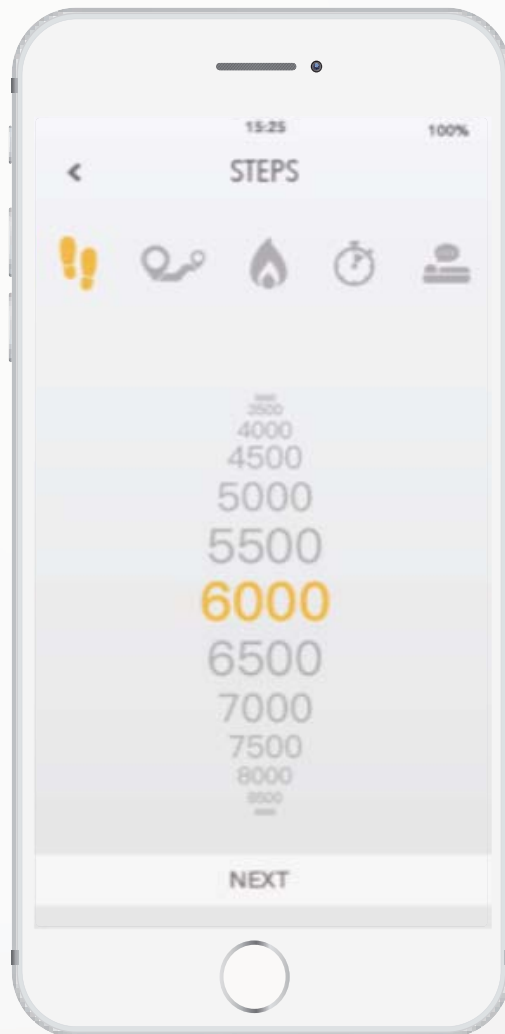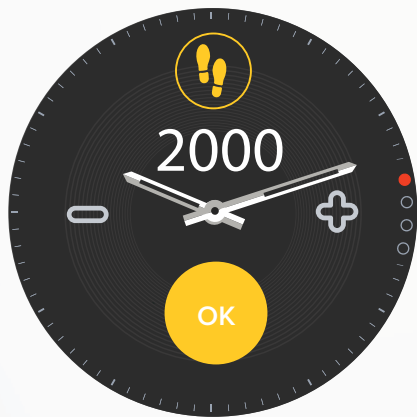

Your ZeTime tracks your progress towards a daily goal of your choice. Some of the watch show a goal progress ring or bar to keep you motivated. When you reach your goal, ZeTime vibrates and displays a Goal achieved notification.

SHARE YOUR ACTIVITY:

Use the sharing function to publish your daily activity or special workouts on your preferred social networks.

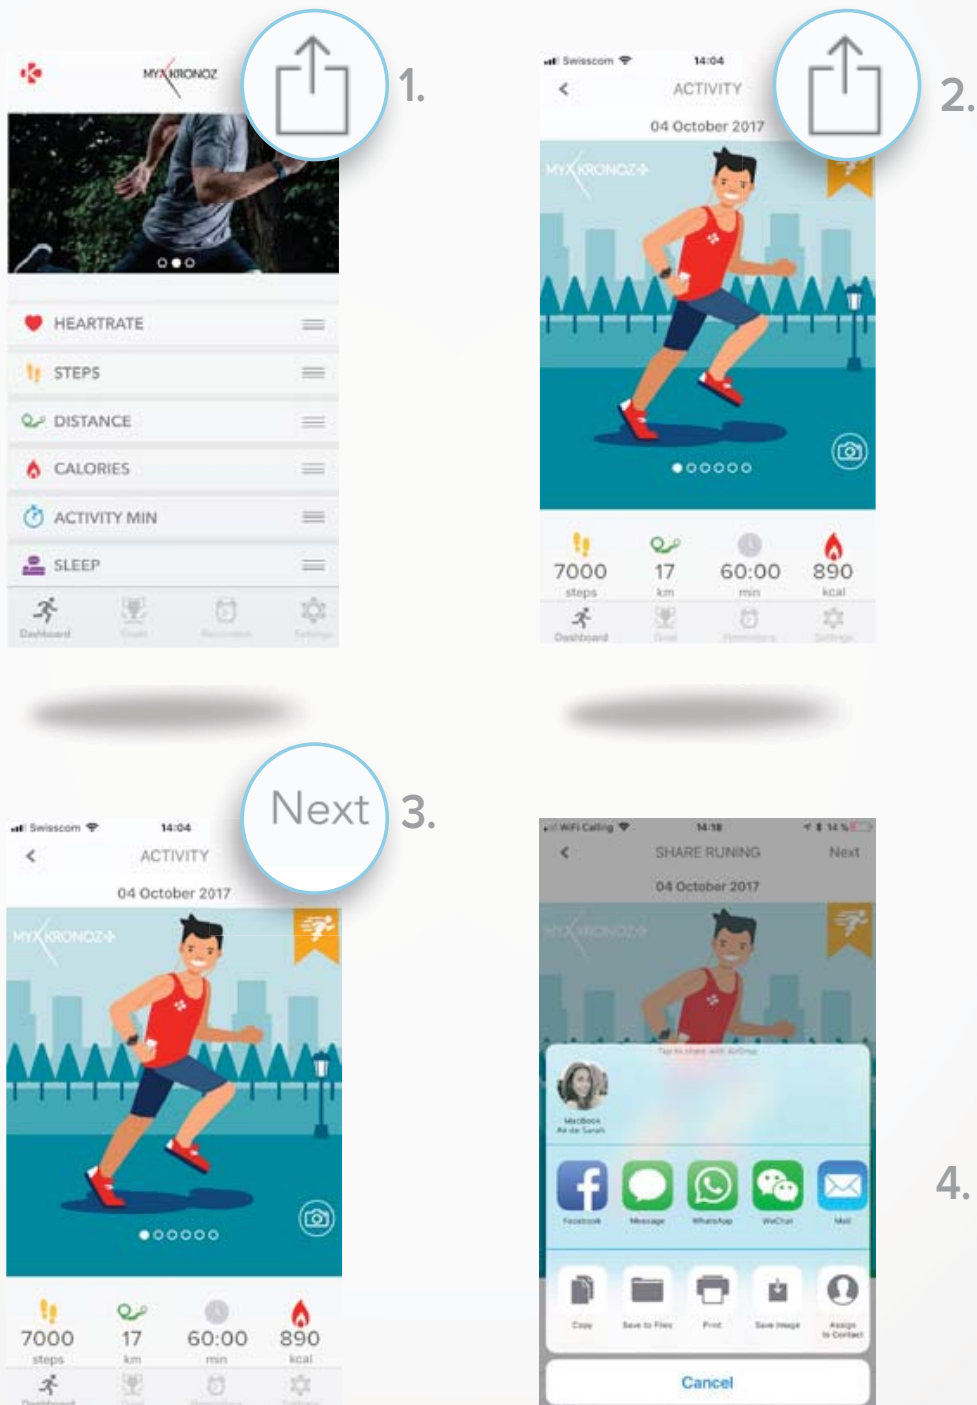

12. INACTIVITY ALERT



Thanks to these particular alerts, you'll always make sure to have the right amount of activity throughout the day. You can set up when and how frequently you want to your ZeTime to alert you.



HOW TO ENABLE THE INACTIVITY ALERT

- Go to the Settings menu of ZeTime mobile app.
- Click on Advanced settings and select Inactivity alert.
- Simply customize your inactivity alert pattern and click on Save to enable it.

To dismiss an incoming inactivity alert, simply touch the screen or press any button on the watch.

13. HEART RATE



Equipped with an optical heart rate sensor, ZeTime measures manually or automatically your heart rate frequency throughout the day.

HOW TO MEASURE YOUR HEART RATE


- Securely attach your ZeTime around your wrist.
- Go to the heart rate menu of your watch.
- Touch the screen or press the crown to start measuring your heart rate.

It will take about 10 seconds to get the results displayed on your watch screen. It is possible to set automated measurements from the mobile app. Simply enable this function in the setting menu of the app and decide on the frequency between each measurement.



HOW TO SET YOUR HEART RATE ALERT

ZeTime can also alert you when your heart rate is going above or below preset limits. You can customize those limits in the mobile app settings.

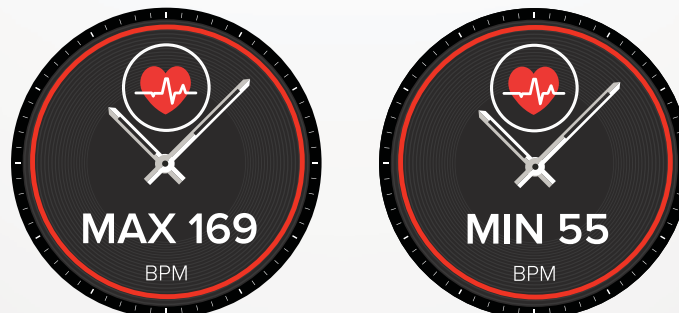

Warning: Setting automatic HR on a very regular basis will impact the battery life.

14. SLEEP



With ZeTime you can monitor both the length and the quality of your sleep. Detailed reports are available both in the mobile app as well in the watch interface.



I START/EXIT SLEEP MODE MANUALLY FROM YOUR WATCH

- Press the sleep app icon of ZeTime main menu.
- Press on Start to enable sleep monitoring.
- Press on End to stop sleep monitoring.

I SLEEP GOALS FROM YOUR WATCH

- Sleep Goal is 8 hours by default.
- Slide to the right to set up your daily sleep goals to your most suitable length.

I START/EXIT THE PRESET SLEEP MODE FROM ZETIME APP

- Go to the Advanced settings of the mobile app.
- Click on Preset sleep.
- Enable and adjust bed and awake time.

Don't forget to save your settings before exiting.




If you forgot to enable Sleep mode on your watch, you can manually add your sleep data from the mobile app. Open ZeTime App, select Sleep, click on + at the bottom > Add sleep.

15. ALARM



To wake you up in the morning, or alert you at a certain time of the day, you can set up alarms that gently vibrate and ring at the chosen time.

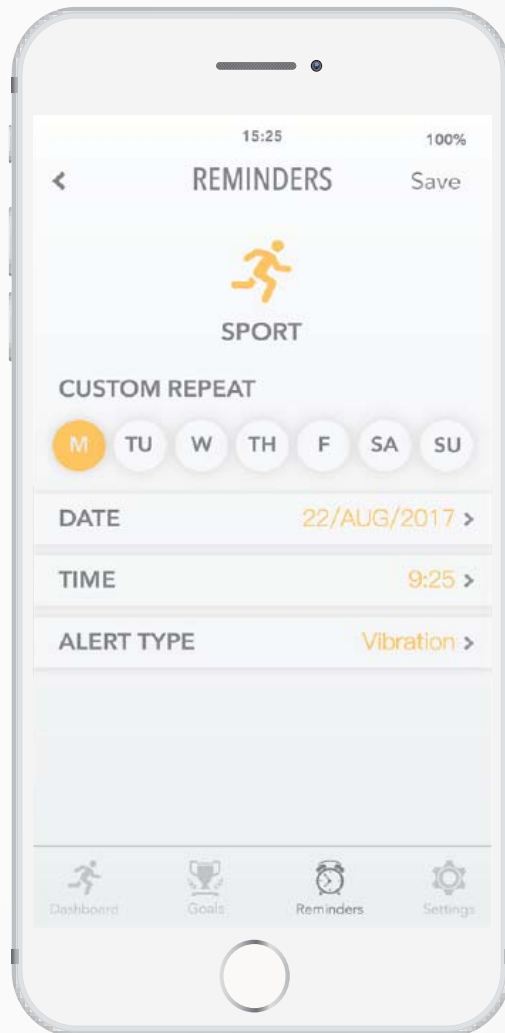

HOW TO SET AN ALARM FROM ZETIME APP

- Go to the Reminders Tab.
- Select Wake-up reminder.
- Set the alarm and click on Save.



For each alarm, ZeTime will vibrate and ring continuously for 1 minute. You can snooze wake up alarms several times. Snooze length can be set in the advanced settings from the mobile app or in the watch settings.

16. CAMERA REMOTE



ZeTime can be used as a remote control to take pictures from your smartphone. This feature is useful when you want to take a group photo or when you want to take a selfie.



HOW TO USE ZeTime AS A CAMERA REMOTE

- Go to the Settings tab of your ZeTime mobile app and click on Camera.
- Click on the Camera app icon on your watch.
- You can then, press the screen to start the countdown and take photos.



Each picture taken from your ZeTime will appear on the image gallery of your smartphone.

17. MUSIC CONTROL



With ZeTime you can take control of your favorite music player on your Smartphone. If you're using third party players like Spotify or Deezer you'll first need to connect your account with the ZeTime mobile App in the Music settings menu.

HOW TO CONTROL MUSIC

- First start the player on your phone.
- Go into the Music app on your ZeTime.
- Play, pause, skip tracks and adjust volume straight from your wrist.

Volume can also be adjusted using the digital crown.



From your IOS device



From your Android device



On your ZeTime, you can see information about the track currently playing, like artist and track name. If the app you're using does not broadcast track information, it won't appear on your ZeTime (iOS only).

18. ANTI-LOST FUNCTION



This alert notifies you with a vibration or a sound (depending on your watch settings) when your ZeTime is going out of range (BT range 10m) from your phone. Note that you can turn this function off by disabling the Anti-lost alert in your application's notification menu (Anti-lost alert is OFF by default).

19. WEATHER FORECAST



You can check the weather forecast of your desired location on your ZeTime, once you have set it up with the mobile app. You can access the weather forecasts from shortcuts or the main menu page.



HOW TO SET THE WEATHER FORECAST

- Go to the Advanced Settings of the mobile app.
- Tap on Weather.
- Select Automatic mode to get weather forecasts based on your GPS position.
- Select Manual mode for choosing your preferred location.

Following this procedure, your ZeTime will display the weather forecast of your select location. ZeTime will display the weather forecasts of the present day and upcoming 3 days on a second page.



To change the temperature unit, go to the weather section and select °C or F°.



HOW TO USE THE STOPWATCH:

- Open the stopwatch app in the watch menu. Start counting by pressing the green play icon. You can track individual lap performance by pressing the round green button while measuring is on.
- To stop counting, press the red button.
- You can see the full lap-by-lap report by pressing the lap counter at the top of the screen.

21. TIMER



TO USE THE TIMER:

- Open the timer app in the watch menu.
- Adjust the countdown length by using the digital crown and start counting by pressing the green button.
- At the end of countdown, your watch will alert you with sound and vibration.

22. FIND MY PHONE



If you misplace your phone, the Find my phone function will make your phone ring or vibrate so you can easily find it. To use this feature, ensure your phone and watch are within range of each other (10m).

TO ENABLE THIS FUNCTION

Press the find my phone app icon in the watch shortcuts or in the main menu page, and click on the screen to enable it.



I TO CHANGE THE WATCH FACE FROM YOUR ZETIME

- Long press on the current watch face.
- Swipe left or right to go through the different watch faces available (you can also use the crown).
- Tap on the one you want to select and use.

HOW TO CHANGE THE WATCH FACE FROM THE APP

- Go to the Settings tab of the mobile app.
- Click on Watch faces.
- Click on select your watch face.

HOW TO CREATE YOUR OWN WATCH FACE

- Go to the Settings tab of the mobile app.
- Click on Watch faces.
- Select Create your watch face.

You can create your own watch faces and store up to 4 of them inside the watch memory

1. Select one of our selected wallpapers, or use a photo from your library or straight from your camera.
2. You can add up to 4 widgets on the watch face and a dial around the screen.
3. Once finished, simply save your creation and push it to the watch.

You can create up to 10 watch faces in the mobile app but only 4 will be stored inside the watch.



1.



2.



3.

24. HOME TIME ZONE



ZeTime allows you to display two different time zones on the same screen. With selected watch faces, analog hands will provide the local time while a digital clock will provide corresponding home time zone. This function is particularly useful for people traveling regularly between time zones.



HOW TO ADJUST HOME TIME ZONE

- Go to the Advanced settings in the mobile app.
- Tap on Home Time Zone.
- Select your Time Zone city and save your setting.

25. WRIST FLICK



The wrist flick mode will enable you to light-up your screen by simply lifting your wrist towards your face. By default this feature is disabled in order to save battery life. You can enable it from the watch setting menu in the display section.

26. LEFT HAND MODE



ZeTime is the only smartwatch to provide a full left-hand user mode by rotating both on screen information and the analog mechanism at 180° when worn on the right wrist.

HOW TO SET IT UP

- Open the Advanced settings of the mobile app.
- Select Left Hand mode and enable it.

This function is also available in the watch settings.

27. NIGHT MODE




A single press on the crown activates a 10 seconds eye-pleasing light to allow you to see the time at night.



HOW TO SELECT YOUR NIGHT MODE WATCH FACE

- Open the setting menu of the mobile app.
- In the Advanced settings select Night mode.
- Then choose the watch face you want.



GENERAL



Language:
set your language.



Unit:
choose between metric or imperial.



Bluetooth:
enable or disable it.



Regulatory:
watch certification.



Watch Information:
view the firmware version & serial number of the device.



TIME



Time format:
change date and time formats.



Home time zone:
set your local time zone.



Calibration:
set time of analog watch hands.



ACTIVITY



Heart rate
set your minimum and maximum heart rate frequency.



Goals:
set your goals.



VIBRATION & SOUNDS



Vibration:
set your vibration mode.



Sounds:
set your sound mode.



Do not disturb :
set a time frame when you don't want to be disturbed.



Snooze:
adjust the snooze time.



DISPLAY



Watch face:
set your watch face.



Wrist flick:
enable or disable it.



Brightness:
change the screen brightness.



Left mode :
enable it to wear your watch on your right wrist.



Screen time out:
set the standby mode.



Night mode:
enable it and customize the watch face.




RESET

Reset your watch to its default settings.

29. FIRMWARE UPDATE



MyKronoz will provide regular firmware updates which you will need to install in order to access our latest upgrades and features for your watch. With Zetime, all these updates need to be done by OTA (Over The Air) and through the mobile app. Updates are performed over the air using the mobile app. Before updating, make sure your phone and your watch have more than 30% battery.

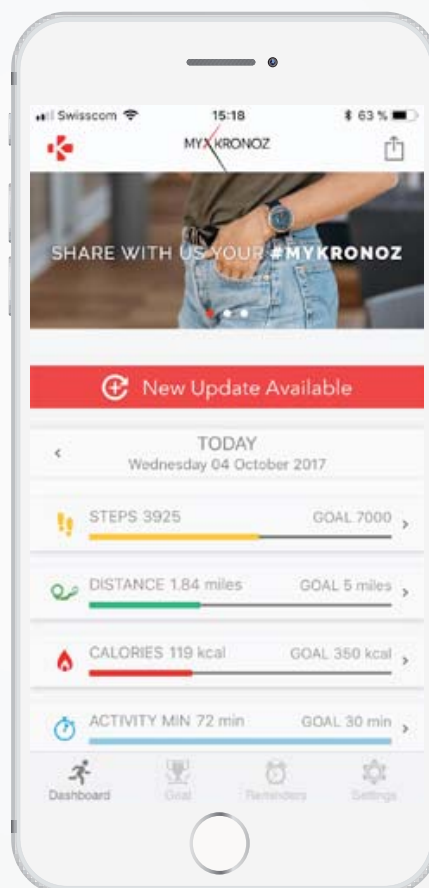

IN ORDER TO UPDATE YOUR WATCH:

- Connect your ZeTime to the mobile app.
- If a new update is available you will be prompted from the home screen.
- You must accept it in order to start the updating process.



During all the update process you must keep your watch near your smartphone and your application must be open. Avoid using your phone during the update process.

30. WATCH BAND



ZeTime uses standard 22mm (Regular) or 18mm (Petite) interchangeable wrist bands, in order to make it easy for you to perfectly match your watch and your style.




REGULAR
44mm
WATCH BAND
22mm

PETITE
39mm
WATCH BAND
18mm

1. Push the spring bar inward to release the strap from the watch case.
2. Push the spring bar inward while aligning it with the holes on either side of the watch case.
3. Release the spring bar to secure the strap.
4. Verify that the strap is correctly fastened by gently tugging on the strap.

31. ACCESSORIES

2-IN-1 CHARGER



I HOW TO USE THE 2-IN-1 CHARGER

The charging stand has a built-in 400 mAh battery, allowing you to charge your ZeTime when you are on the go with no power plug available. You can fully charge your ZeTime up to 2 times with this built-in battery.


First of all you need to push the button at the back to put it in its operating position. When connected to USB power source the Charging Stand will operate as such:

- Without the watch on the charger, the LED will display in red as the built-in battery is being charged. When fully charged LED will turn to solid blue.
- With the watch on the charger, the LED display in red for 10 seconds. Once fully charged, the LED will display in green for 10 seconds.

When not connected to USB power source:

- Without the watch on the charger, the LED display in blue all the time. (We highly recommend you to switch off the charger with the back button located on the back of the charger).
- With the watch on the charger, the LED will display in red for 10 seconds. Once fully charged, the LED will display in green for 10 seconds.

CHARGING STAND



Available as an optional charging solution, the Standing Charger is an elegant bedside or desk charger made of aluminum to perfectly match the modern design of your ZeTime.

STANDARD CHARGER



The perfect companion charger for your ZeTime. Its thin and sleek design will help you take it with you everywhere you go to ensure your watch is never runs out of juice.

33. TECH SPECS

Dimensions:	Regular: 44 X 12.8 mm Petite: 39 X 12.6 mm
Weight:	Regular: 90g Petite: 80g
Material:	Stainless steel watch case available in silver, black, titanium, pink gold & yellow gold
Watch band size:	Regular: 22 mm Petite: 18 mm
Connectivity	Bluetooth BLE 4.2
Battery type:	Regular: Li-iOn 200 mAh Petite: Li-iOn 180 mAh
Battery life:	Up to 30 days (watch mode) Up to 3 days (smartwatch mode)
Mechanical hands	
Vibrator & Buzzer	
Charging time:	90 minutes
Memory :	10 days
Display type:	TFT Color touchscreen with hole
Display size and resolution:	Regular: TFT 1.22 inches / 240*240 pixels Petite: TFT 1.05 inches / 240*240 pixels
Sensors:	3-axis accelerometer & optical heart rate sensor
Operating temperature	-10°C to + 55°C
Water resistance:	5 ATM*
International warranty:	1 year

What's in the box: Charger dock, ZeTime, Get started guide.



* ZeTime is water resistant up to 50 meters. ZeTime is resistant to water splashes, rain, submersion and showering. ZeTime can be used for shallow water activities like swimming but should not be exposed to water at high pressure, such as ocean waves or a waterfall. ZeTime should not be used for scuba diving and water skiing. Do not expose your ZeTime to soapy water, perfume, detergents, lotions, sunscreen, and high velocity water. Please note that all bands are not appropriate for water use. For example, leather band.

WARNING

■ Connecting the charging cable improperly may cause serious damage to the device. Any damage caused by misuse is not covered by the warranty. Unplug the cable after ZeTime is fully charged.

■ ZeTime unit and charging dock contain strong magnets that may interfere with pacemakers, credit cards, watches and other magnet-sensitive objects. If you use a pacemaker or any other electronic medical device, please consult your physician before wearing or handling ZeTime.

■ This product is not a medical device and should not be used to diagnose or treat any medical condition.

■ ZeTime is water resistant up to 50 meters. ZeTime is resistant to water splashes, rain, submersion and showering. ZeTime can be used for shallow water activities like swimming but should not be exposed to water at high pressure, such as ocean waves or a waterfall. ZeTime should not be used for scuba diving and water skiing. Do not expose your ZeTime to soapy water, perfume, detergents, lotions, sunscreen, and high velocity water. Please note that all bands are not appropriate for water use. For example, leather band

ABOUT THIS MANUAL

The features of **ZeTime** and the contents of the user manual are subject to change. To get the latest instructions on how to use this product, please refer to the online user manual available on www.mykronoz.com

MyKronoz is not responsible for any watch faces created by end user. MyKronoz is not responsible for any content published online by users. MyKronoz is only responsible for the content of pages it publishes.

SUPPORT

If you have any question or require assistance regarding our product, please visit www.mykronoz.com/support/ or email us at support@mykronoz.com

SAFETY INSTRUCTIONS

Before using the device, read these instructions carefully.

BATTERY

- ZeTime has built-in batteries. Do not disassemble the battery on your own. KRONOZ LLC is not responsible for any damage or personal injury caused by the removal of the battery or any component.
- Do not expose your product to extremely high or low temperatures. Excessive temperature during charging could cause heat, smoke, fire or deformation of the battery or even explosion. Do not expose the battery in the sun, excessive smoke or dust. Charge the battery in a cool, ventilated room.
- Do not open, crush, bend, deform, puncture or shred secondary cells or batteries. In the event of a battery break or leak, prevent battery liquid contact with skin or eyes. If this happens, immediately flush the areas with water (do not rub the eye) or seek medical help.
- Do not short-circuit. Short-circuiting can occur when a metallic object, such as coins, causes direct connection of positive and negative terminals of the battery. Short-circuiting may damage the battery.
- Do not use batteries that have been damaged or have been exhausted.
- Keep the batteries out of children's reach and in a safe place to prevent danger.
- Do not place the batteries in the water. Do not expose your product to water at high pressure, such as ocean waves or waterfall. Do not use your product in a sauna or steam room.
- Do not dispose of batteries in fire as they may cause explosion. Dispose of used batteries in accordance with your local regulations (such as recycling). Do not dispose as household waste.
- Use only the USB cable supplied to charge this battery. Do not charge for more than 24 hours.
- Do not attempt to repair or maintain the watch by yourself, service and maintenance should be performed by authorized technicians.

CAUTION

- This device has a recording function. Please be sure to comply with the relevant laws and regulations on the use of these features. In accordance with relevant regulations, without permissions any personal characteristic sound recording being copied and disseminated may be seen as an invasion of privacy. Inappropriate use of photography, video and photo, audio recording function records could violate the copyright owner's right. For this, the user must assume full responsibility. KRONOZ LLC is not responsible for any damage caused by improper use of the device.
- This device is not waterproof. Do not immerse the device in water or any other liquids.

REGULARY NOTICE

FCC ID: 2AA7D-ZET1



USA

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Notice:

Any changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

FCC NOTICE

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not

installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

CANADA

INDUSTRY CANADA (IC) STATEMENT

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme à la norme CNR d'Industrie Canada applicable aux appareils radio exempts de licence. Son utilisation est soumise aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC RF Radiation Exposure Statement

This device complies with the ISED RSS-102 RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual.

Déclaration d'exposition aux radiations Cet appareil est conforme aux limites d'exposition aux rayonnements Canada établies au pour un environnement non contrôlé et ne présente pas de risque dans le cadre d'une utilisation conforme à celle décrite dans ce manuel.

RF exposure statements

This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.



DISPOSAL AND RECYCLING INFORMATION

After the implementation of the European Directive 2002/96/EU in the national legal system, the following applies : electrical and electronic devices may not be disposed of with domestic waste. Consumers are obliged by law to return electrical and electronic device at the end of their service lives to the public collecting points set up for this purpose or point of sale. Details to this are defined by the national law of the respective country. This symbol on the product, the instruction manual or the package indicates that a product is subject to these regulations. By recycling, reusing the materials or other forms of utilizing old devices, you are making an important contribution to protecting our environment.

ACCESS TO THE REQUIRED INFORMATION ON THE E-LABEL

Users can access the E-Label screen on ZeTime by going to Settings > General > Regulatory. No special access codes or permissions are required to go through the above steps beyond entering a user-defined password to protect against unauthorized access to the device. Additional regulatory information are in « Regulatory notices » of this document. The information is stored on the device, no special accessories or supplemental plug-ins (e.g., a SIM/USIM card) are required to access the information.

©2017 Kronoz LLC, all rights reserved. Kronoz LLC,
Avenue Louis-Casai 18 - 1209 Geneva - Switzerland
All brands or product names are or may be trademarks of their respective owners. Pictures and specifications are not contractual. Les marques citées sont des marques déposées par leur fabricant respectif. Photos et caractéristiques non contractuelles.
Designed in Switzerland - Made in China

MYX KRONOZ

Smart Watch

DESIGNED IN SWITZERLAND

MORE THAN TIME

JOIN US @ MYKRONOZ



www.mykronoz.com