

## FCC Test Report (PART 24)

**Report No.:** RFBCKS-WTW-P21010667-1

**FCC ID:** 2AAAS-CC06

**Test Model:** EG91-NAX

**Received Date:** Jan. 27, 2021

**Test Date:** Feb. 04 to 05, 2021

**Issued Date:** Feb. 20, 2021

**Applicant:** Vivint, Inc.

**Address:** 4931 N. 300 W. Provo, UT 84604 USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty .....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information</b> .....	<b>8</b>
3.1 General Description of EUT .....	8
3.2 Configuration of System under Test .....	10
3.2.1 Description of Support Units .....	11
3.3 Test Mode Applicability and Tested Channel Detail .....	12
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards and references .....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Output Power Measurement .....	14
4.1.1 Limits of Output Power Measurement .....	14
4.1.2 Test Procedures .....	14
4.1.3 Test Setup .....	14
4.1.4 Test Results .....	15
4.2 Radiated Emission Measurement .....	20
4.2.1 Limits of Radiated Emission Measurement .....	20
4.2.2 Test Procedure .....	20
4.2.3 Deviation from Test Standard .....	20
4.2.4 Test Setup .....	21
4.2.5 Test Results .....	22
<b>5 Pictures of Test Arrangements</b> .....	<b>64</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>65</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P21010667-1	Original release.	Feb. 20, 2021

## 1 Certificate of Conformity

**Product:** LTE Module  
**Brand:** Vivint, Inc.  
**Test Model:** EG91-NAX  
**Sample Status:** Engineering sample  
**Applicant:** Vivint, Inc.  
**Test Date:** Feb. 04 to 05, 2021  
**Standards:** FCC Part 24 Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Vivian Huang , **Date:** Feb. 20, 2021  
Vivian Huang / Specialist

**Approved by :** Clark Lin , **Date:** Feb. 20, 2021  
Clark Lin / Technical Manager

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent Isotropically Radiated Power	PASS	Meet the requirement of limit.
2.1046 24.232(d)	Peak To Average Ratio	N/A	Refer to Note 2 below
2.1047	Modulation characteristics	N/A	Refer to Note 2 below
2.1055 24.235	Frequency Stability	N/A	Refer to Note 2 below
2.1049 24.238(b)	Occupied Bandwidth	N/A	Refer to Note 2 below
24.238(b)	Band Edge Measurements	N/A	Refer to Note 2 below
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note 2 below
2.1053 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -47.96 dB at 8460 MHz.

### Note:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. Equivalent Isotropically Radiated Power and Radiated Spurious Emissions were performed for this addendum. The others testing data refer to original test report.
3. N/A: Not Applicable.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.4 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.3 dB

## 2.2 Test Site and Instruments

### For radiated spurious emissions test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 06, 2020	July 05, 2021
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	5D-FB	LOOPCAB-001	Jan. 07, 2021	Jan. 06, 2022
RF Cable	5D-FB	LOOPCAB-002	Jan. 07, 2021	Jan. 06, 2022
Pre-Amplifier Mini-Circuits	ZFL-1000VH2	QA0838008	Oct. 20, 2020	Oct. 19, 2021
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 05, 2020	Nov. 04, 2021
RF Cable	8D	966-3-1	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-2	Mar. 17, 2020	Mar. 16, 2021
RF Cable	8D	966-3-3	Mar. 17, 2020	Mar. 16, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 24, 2020	Sep. 23, 2021
Horn_Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 22, 2020	Nov. 21, 2021
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC104-SM-SM-1500	180504	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-2000	180601	June 09, 2020	June 08, 2021
RF Cable	EMC104-SM-SM-6000	180602	June 09, 2020	June 08, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 11, 2021	Jan. 10, 2022
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 22, 2020	Nov. 21, 2021
RF Cable	EMC102-KM-KM-1200	160924	Jan. 11, 2021	Jan. 10, 2022
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

#### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. Tested Date: Feb. 04, 2021

**For other test items:**

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Spectrum Analyzer Keysight	N9030A	MY54490679	July 13, 2020	July 12, 2021
Power meter Anritsu	ML2495A	1529002	July 22, 2020	July 21, 2021
Power sensor Anritsu	MA2411B	1339443	July 22, 2020	July 21, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
AC Power Source Extech Electronics	6905S	1991551	NA	NA
DC Power Supply Topward	6603D	795558	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 14, 2021	Jan. 13, 2022
True RMS Clamp Meter FLUKE	325	31130711WS	June 06, 2020	June 05, 2021
Mech Switch Absorptive Mini-Circuits	MSP4TA-18+	0140	Feb. 10, 2020	Feb. 09, 2021
FXD ATTEN Mini-Circuits	BW-S3W2+	MN71981	Feb. 10, 2020	Feb. 09, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- Note:**
1. The test was performed in Oven room 2.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. Tested Date: Feb. 05, 2021

### 3 General Information

#### 3.1 General Description of EUT

Product	LTE Module	
Brand	Vivint, Inc.	
Test Model	EG91-NAX	
Status of EUT	Engineering sample	
Power Supply Rating	DC 3.8V from host equipment	
Modulation Type	WCDMA, HSDPA, HSUPA	BPSK
	LTE Band 2	QPSK, 16QAM
Operating Frequency	WCDMA, HSDPA, HSUPA	1852.4 MHz ~ 1907.6 MHz
	LTE Band 2	1850.7 MHz ~ 1909.3 MHz
Max. EIRP Power	WCDMA B2	24.67 dBm
	LTE Band 2 (Channel Bandwidth 1.4MHz)	25.52 dBm
	LTE Band 2 (Channel Bandwidth 3MHz)	25.80 dBm
	LTE Band 2 (Channel Bandwidth 5MHz)	25.68 dBm
	LTE Band 2 (Channel Bandwidth 10MHz)	25.70 dBm
	LTE Band 2 (Channel Bandwidth 15MHz)	25.61 dBm
	LTE Band 2 (Channel Bandwidth 20MHz)	25.58 dBm
Antenna Type	Refer to Note	
Antenna Connector	Refer to Note	
Accessory Device	NA	
Data Cable Supplied	NA	

Note:

1. This report is prepared for FCC class II change. The difference compared with the original application as the following:

- ◆ Antenna change and remove B25, B26.
- ◆ Adding new host, the testing has been tested with the final host device enclosure (cannot be disassembled). The host device is as following table:

Product Name	Brand	Model
Smart Hub Lite	VIVINT	CP05

2. According to above conditions, therefore only Radiated Emissions Measurement need to be performed, and all data was verified to meet the requirements.




3. The antennas provided to the EUT, please refer to the following table:

For WWAN						
Antenna No.	Band	Model	Freq. Range (MHz)	Antenna Net Gain (dBi)	Antenna Type	Connector Type
1	WNC	48XKAB13	Band 2 (1850-1910 MHz)	1.38	PIFA	none (like spring)
			Band 4 (1710-1755 MHz)	1.57		
			Band 5 (824-849 MHz)	0.26		
			Band 12 (699-716 MHz)	0.14		
			Band 13 (777-787 MHz)	0.57		

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

5. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

### 3.2 Configuration of System under Test

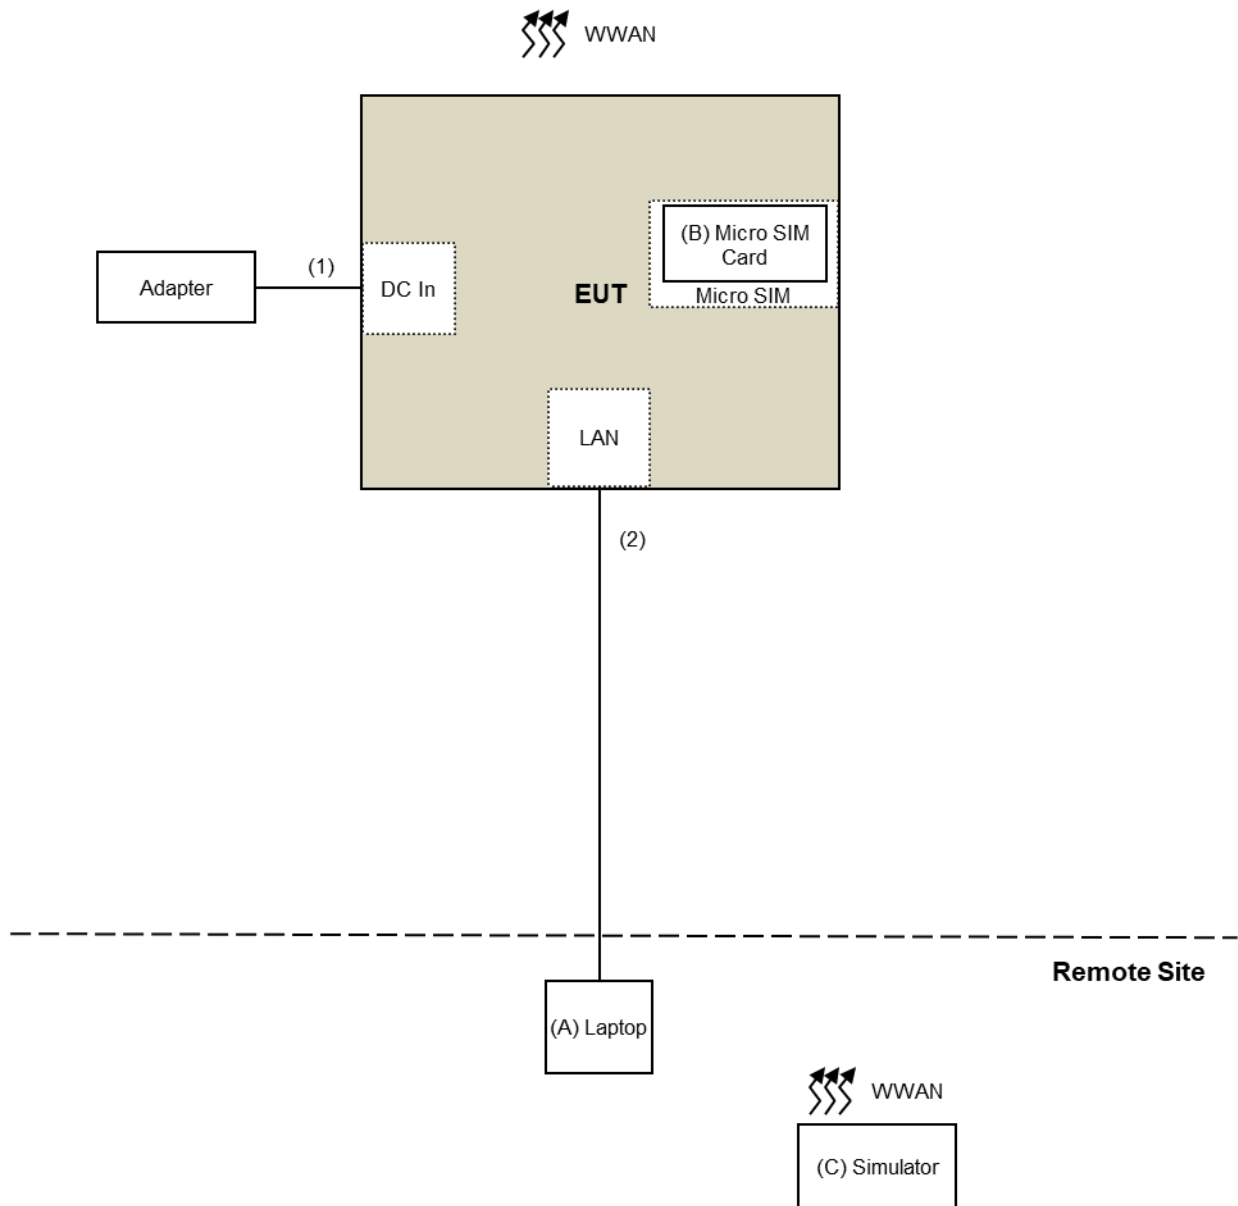

### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the t

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	Micro SIM Card	R&S	CRT-Z3	NA	NA	Provided by Lab
C.	Simulator	R&S	CMU200	121040	NA	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.5	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab

### 3.3 Test Mode Applicability and Tested Channel Detail

#### WCDMA B2

Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK/16QAM	1RB / 0 RB offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK/16QAM	1RB / 0 RB offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK/16QAM	1RB / 0 RB offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK/16QAM	1RB / 0 RB offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK/16QAM	1RB / 0 RB offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK/16QAM	1RB / 0 RB offset
Radiated Emission	18607 to 19193	18607, 18900 19193	1.4MHz	QPSK	1 RB / 0 RB Offset
	18615 to 19185	18615, 18900, 19185	3MHz	QPSK	1 RB / 0 RB Offset
	18625 to 19175	18625, 18900, 19175	5MHz	QPSK	1 RB / 0 RB Offset
	18650 to 19150	18650, 18900, 19150	10MHz	QPSK	1 RB / 0 RB Offset
	18675 to 19125	18675, 18900, 19125	15MHz	QPSK	1 RB / 0 RB Offset
	18700 to 19100	18700, 18900, 19100	20MHz	QPSK	1 RB / 0 RB Offset

#### NOTE:

All supported modulation types were evaluated. The Worst case of QPSK was selected. Therefore, the Radiated Emission was presented under QPSK mode only.

#### Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	25deg. C, 60%RH	120Vac, 60Hz	Weiwei Lo
Radiated Emission	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du

### 3.4 EUT Operating Conditions

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards and references**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test standard:**

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24 Subpart E**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures


##### Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA/LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and difference RB size/ RB offset for difference bandwidth record the power level shown on power meter.

##### EIRP Measurement:

- a.  $EIRP = \text{Conducted Output power level} + \text{Antenna gain}$ .

#### 4.1.3 Test Setup

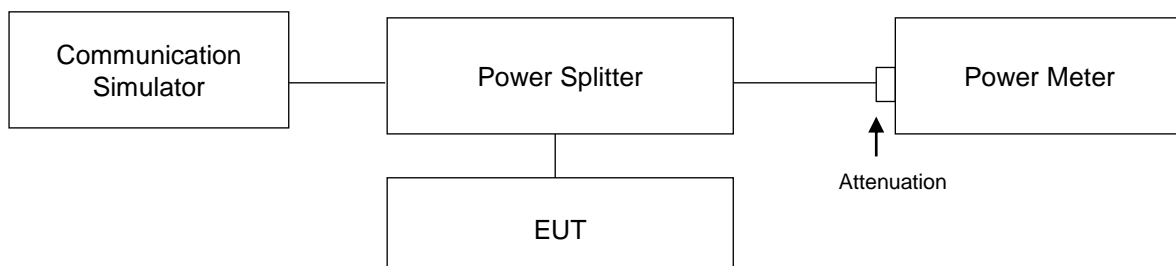

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.4 Test Results

### CONDUCTED OUTPUT POWER (dBm)

#### WCDMA B2

Band	WCDMA B2		
	Channel	9262	9400
Frequency (MHz)	1852.4	1880.0	1907.6
RMC	23.29	23.06	22.84
HSDPA Subtest-1	23.28	22.02	22.19
HSDPA Subtest-2	21.99	21.90	22.14
HSDPA Subtest-3	21.46	21.58	21.48
HSDPA Subtest-4	21.48	21.67	21.48
HSUPA Subtest-1	21.99	22.25	21.83
HSUPA Subtest-2	21.70	21.64	21.39
HSUPA Subtest-3	22.32	22.28	21.96
HSUPA Subtest-4	22.20	22.04	22.01
HSUPA Subtest-5	21.98	22.15	22.17

### LTE Band 2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18607	18900	19193		18607	18900	19193	
			1850.7	1880	1909.3		1850.7	1880	1909.3	
			MHz	MHz	MHz	MHz	MHz	MHz		
2 / 1.4M	1	0	23.54	23.36	23.12	0	22.77	22.37	22.73	1
	1	2	23.75	23.57	23.25	0	22.62	22.83	22.95	1
	1	5	24.14	23.88	23.47	0	22.82	22.76	22.64	1
	3	0	23.82	23.80	23.34	0	-	-	-	1
	3	1	23.53	23.41	23.47	0	-	-	-	1
	3	3	23.66	23.68	23.31	0	-	-	-	1
	6	0	22.63	22.58	22.71	1	-	-	-	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18615	18900	19185		18615	18900	19185	
			1851.5	1880	1908.5		1851.5	1880	1908.5	
			MHz	MHz	MHz	MHz	MHz	MHz		
2 / 3M	1	0	23.59	23.61	23.32	0	22.75	22.50	23.04	1
	1	7	23.87	23.63	24.42	0	23.49	22.55	23.73	1
	1	14	23.73	23.23	23.24	0	22.72	22.46	23.10	1
	8	0	22.71	22.83	22.26	1	-	-	-	2
	8	3	22.71	22.82	22.46	1	-	-	-	2
	8	7	22.68	22.63	22.56	1	-	-	-	2
	15	0	22.49	22.61	22.81	1	-	-	-	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18625	18900	19175		18625	18900	19175	
			1852.5	1880	1907.5		1852.5	1880	1907.5	
			MHz	MHz	MHz	MHz	MHz	MHz		
2 / 5M	1	0	23.89	23.64	23.55	0	22.76	22.66	23.15	1
	1	12	23.91	23.72	24.30	0	23.66	22.61	24.10	1
	1	24	23.70	23.34	23.07	0	22.83	22.45	22.88	1
	12	0	23.70	22.60	22.51	1	-	-	-	2
	12	6	22.40	22.51	22.87	1	-	-	-	2
	12	13	22.77	22.63	22.55	1	-	-	-	2
	25	0	22.77	22.64	22.71	1	-	-	-	2



Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		18650	18900	19150	
			1855	1880	1905		1855	1880	1905	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 10M	1	0	23.48	23.42	23.57	0	22.93	22.50	23.30	1
	1	24	23.73	23.83	24.32	0	23.64	22.55	24.03	1
	1	49	23.63	23.47	23.13	0	22.78	22.90	22.98	1
	25	0	22.47	22.52	22.57	1	-	-	-	2
	25	12	22.75	22.67	22.44	1	-	-	-	2
	25	25	22.69	22.83	22.54	1	-	-	-	2
	50	0	22.40	22.75	22.56	1	-	-	-	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	23.56	23.25	23.18	0	22.95	22.50	23.02	1
	1	37	24.10	23.69	24.23	0	23.59	22.51	23.98	1
	1	74	23.57	23.51	23.24	0	22.91	22.75	23.20	1
	36	0	22.65	22.58	22.49	1	-	-	-	2
	36	19	22.86	22.45	22.54	1	-	-	-	2
	36	39	22.84	22.45	22.83	1	-	-	-	2
	75	0	22.77	22.59	22.79	1	-	-	-	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	23.75	23.56	23.36	0	23.05	23.43	22.96	1
	1	50	23.74	23.51	24.20	0	23.46	22.41	23.65	1
	1	99	23.33	23.39	23.25	0	22.57	22.66	23.14	1
	50	0	22.60	22.59	22.25	1	-	-	-	2
	50	25	22.45	22.63	22.42	1	-	-	-	2
	50	50	22.61	22.62	22.56	1	-	-	-	2
	100	0	22.73	22.35	22.52	1	-	-	-	2

**EIRP POWER**
**WCDMA B2**

Band	WCDMA B2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880	1907.6
RMC 12.2K	23.29	23.06	22.84
Gain (dBi)	1.38	1.38	1.38
Max EIRP Power (dBm)	24.67	24.44	24.22

**LTE Band 2**

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18607	18900	19193		18607	18900	19193	
			1850.7	1880	1909.3		1850.7	1880	1909.3	
	MHz	MHz	MHz	MHz	MHz	MHz				
2 / 1.4M	1	0	24.14	23.88	23.47	0	22.82	22.83	22.95	1
Gain (dBi)		1.38	1.38	1.38	0	1.38	1.38	1.38		
Max EIRP Power (dBm)		25.52	25.26	24.85	0	24.20	24.21	24.33		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18615	18900	19185		18615	18900	19185	
			1851.5	1880	1908.5		1851.5	1880	1908.5	
	MHz	MHz	MHz	MHz	MHz	MHz				
2 / 3M	1	0	23.87	23.63	24.42	0	23.49	22.55	23.73	1
Gain (dBi)		1.38	1.38	1.38	0	1.38	1.38	1.38		
Max EIRP Power (dBm)		25.25	25.01	25.80	0	24.87	23.93	25.11		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18625	18900	19175		18625	18900	19175	
			1852.5	1880	1907.5		1852.5	1880	1907.5	
	MHz	MHz	MHz	MHz	MHz	MHz				
2 / 5M	1	0	23.91	23.72	24.30	0	23.66	22.66	24.10	1
Gain (dBi)		1.38	1.38	1.38	0	1.38	1.38	1.38		
Max EIRP Power (dBm)		25.29	25.10	25.68	0	25.04	24.04	25.48		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18650	18900	19150		20000	20175	20350	
			1855	1880	1905		1715	1732.5	1750	
	MHz	MHz	MHz	MHz	MHz	MHz				
2 / 10M	1	0	23.73	23.83	24.32	0	23.64	22.90	24.03	1
Gain (dBi)		1.38	1.38	1.38	0	1.38	1.38	1.38		
Max EIRP Power (dBm)		25.11	25.21	25.70	0	25.02	24.28	25.41		

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18675	18900	19125		18675	18900	19125	
			1857.5	1880	1902.5		1857.5	1880	1902.5	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 15M	1	0	24.10	23.69	24.23	0	23.59	22.75	23.98	1
Gain (dBi)			1.38	1.38	1.38		1.38	1.38	1.38	
Max EIRP Power (dBm)			25.48	25.07	25.61		24.97	24.13	25.36	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low CH	Mid CH	High CH		Low CH	Mid CH	High CH	
			18700	18900	19100		18700	18900	19100	
			1860	1880	1900		1860	1880	1900	
			MHz	MHz	MHz		MHz	MHz	MHz	
2 / 20M	1	0	23.75	23.56	24.20	0	23.46	23.43	23.65	1
Gain (dBi)			1.38	1.38	1.38		1.38	1.38	1.38	
Max EIRP Power (dBm)			25.13	24.94	25.58		24.84	24.81	25.03	

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 4.2.2 Test Procedure


- a. The field strength was measured with Spectrum Analyzer.
- b. Measurement in the semi-anechoic chamber, EUT placed on the 0.8m/1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor.
- c. Perform a field strength measurement and then mathematically convert the measured field strength level to EIRP level.
- d. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = Read Value (dB $\mu$ V/m) - Correction Factor @ 3m
- e. Correction Factor (dB) @ 3m =  $20\log(D) - 104.8$ ; where D is the measurement distance @3m =  $-95.26\text{dB}$

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


### 4.2.3 Deviation from Test Standard

No deviation.

**4.2.4 Test Setup  
For Below 1GHz**

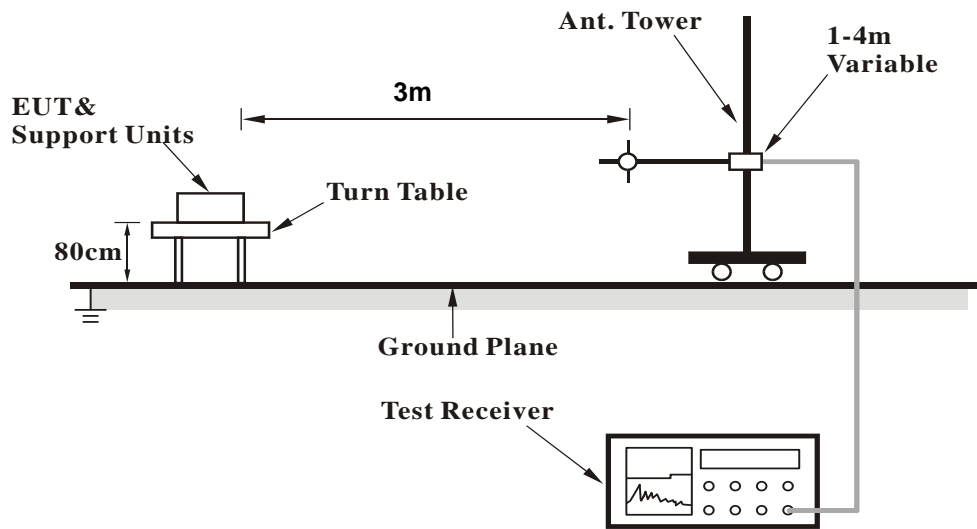

**For Above 1GHz:**

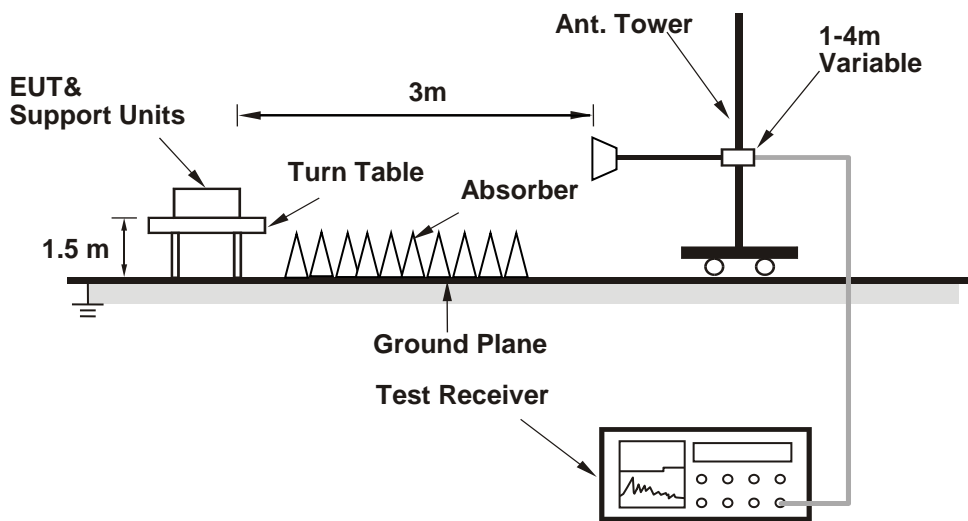

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.5 Test Results

##### Below 1GHz

##### WCDMA B2:

Mode	TX channel 9262	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

##### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.95	28.32	-95.26	-66.94	-13	-53.94
2	108.46	22.21	-95.26	-73.05	-13	-60.05
3	148.87	23.15	-95.26	-72.11	-13	-59.11
4	196.68	27.37	-95.26	-67.89	-13	-54.89
5	309.52	23.96	-95.26	-71.30	-13	-58.30
6	486.79	27.33	-95.26	-67.93	-13	-54.93

##### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.82	31.82	-95.26	-63.44	-13	-50.44
2	47.89	29.12	-95.26	-66.14	-13	-53.14
3	106.15	25.1	-95.26	-70.16	-13	-57.16
4	158.78	26.02	-95.26	-69.24	-13	-56.24
5	197.45	23.39	-95.26	-71.87	-13	-58.87
6	381.25	26.69	-95.26	-68.57	-13	-55.57

##### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.16	28.58	-95.26	-66.68	-13	-53.68
2	108.65	24.06	-95.26	-71.20	-13	-58.20
3	148.94	23.4	-95.26	-71.86	-13	-58.86
4	196.81	26.04	-95.26	-69.22	-13	-56.22
5	309.11	24.01	-95.26	-71.25	-13	-58.25
6	486.77	27.61	-95.26	-67.65	-13	-54.65

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.86	32.95	-95.26	-62.31	-13	-49.31
2	47.45	29.54	-95.26	-65.72	-13	-52.72
3	105.86	23.92	-95.26	-71.34	-13	-58.34
4	158.45	25.62	-95.26	-69.64	-13	-56.64
5	197.16	22.36	-95.26	-72.90	-13	-59.90
6	381.62	26.75	-95.26	-68.51	-13	-55.51

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9538	Frequency Range	Below 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.15	28.76	-95.26	-66.50	-13	-53.50
2	108.72	22.78	-95.26	-72.48	-13	-59.48
3	148.78	23.48	-95.26	-71.78	-13	-58.78
4	197.18	27.06	-95.26	-68.20	-13	-55.20
5	309.8	22.68	-95.26	-72.58	-13	-59.58
6	486.9	28.4	-95.26	-66.86	-13	-53.86

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.94	31.1	-95.26	-64.16	-13	-51.16
2	47.54	30.3	-95.26	-64.96	-13	-51.96
3	106.28	23.7	-95.26	-71.56	-13	-58.56
4	158.38	25.76	-95.26	-69.50	-13	-56.50
5	197.34	21.88	-95.26	-73.38	-13	-60.38
6	380.84	25.97	-95.26	-69.29	-13	-56.29

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



### LTE Band 2: 1.4 MHz

Mode	TX channel 18607	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.17	28.74	-95.26	-66.52	-13	-53.52
2	108.75	22.59	-95.26	-72.67	-13	-59.67
3	148.38	23.14	-95.26	-72.12	-13	-59.12
4	196.58	27.86	-95.26	-67.40	-13	-54.40
5	309.19	23.9	-95.26	-71.36	-13	-58.36
6	486.52	27.11	-95.26	-68.15	-13	-55.15

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.96	31.42	-95.26	-63.84	-13	-50.84
2	47.78	29.39	-95.26	-65.87	-13	-52.87
3	106.27	24.64	-95.26	-70.62	-13	-57.62
4	159.05	25.98	-95.26	-69.28	-13	-56.28
5	197.45	23.83	-95.26	-71.43	-13	-58.43
6	381.73	26.34	-95.26	-68.92	-13	-55.92

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.01	28.11	-95.26	-67.15	-13	-54.15
2	108.94	23.61	-95.26	-71.65	-13	-58.65
3	148.64	23.74	-95.26	-71.52	-13	-58.52
4	196.98	26.11	-95.26	-69.15	-13	-56.15
5	309.59	24.28	-95.26	-70.98	-13	-57.98
6	486.61	28.04	-95.26	-67.22	-13	-54.22

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.85	33.42	-95.26	-61.84	-13	-48.84
2	47.44	29.12	-95.26	-66.14	-13	-53.14
3	105.99	23.81	-95.26	-71.45	-13	-58.45
4	158.39	25.47	-95.26	-69.79	-13	-56.79
5	197.59	21.89	-95.26	-73.37	-13	-60.37
6	381.2	27.24	-95.26	-68.02	-13	-55.02

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19193	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.12	29.16	-95.26	-66.10	-13	-53.10
2	108.8	22.48	-95.26	-72.78	-13	-59.78
3	148.7	23.75	-95.26	-71.51	-13	-58.51
4	196.56	27.55	-95.26	-67.71	-13	-54.71
5	309.68	22.76	-95.26	-72.50	-13	-59.50
6	486.58	28.77	-95.26	-66.49	-13	-53.49

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.89	31.53	-95.26	-63.73	-13	-50.73
2	47.43	30.3	-95.26	-64.96	-13	-51.96
3	105.8	23.32	-95.26	-71.94	-13	-58.94
4	159.15	25.89	-95.26	-69.37	-13	-56.37
5	197.63	21.99	-95.26	-73.27	-13	-60.27
6	381.75	26.01	-95.26	-69.25	-13	-56.25

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 3 MHz**

Mode	TX channel 18615	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.1	28.21	-95.26	-67.05	-13	-54.05
2	108.79	21.93	-95.26	-73.33	-13	-60.33
3	148.86	23.06	-95.26	-72.20	-13	-59.20
4	196.5	27.31	-95.26	-67.95	-13	-54.95
5	309.99	24.21	-95.26	-71.05	-13	-58.05
6	486.96	27.1	-95.26	-68.16	-13	-55.16

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.05	31.87	-95.26	-63.39	-13	-50.39
2	47.61	29.25	-95.26	-66.01	-13	-53.01
3	106.33	24.76	-95.26	-70.50	-13	-57.50
4	159.03	25.53	-95.26	-69.73	-13	-56.73
5	197.88	23.22	-95.26	-72.04	-13	-59.04
6	381.55	26.77	-95.26	-68.49	-13	-55.49

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.08	28.69	-95.26	-66.57	-13	-53.57
2	108.95	23.6	-95.26	-71.66	-13	-58.66
3	148.46	23.87	-95.26	-71.39	-13	-58.39
4	196.78	26.45	-95.26	-68.81	-13	-55.81
5	309.54	23.53	-95.26	-71.73	-13	-58.73
6	487.05	27.4	-95.26	-67.86	-13	-54.86

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.82	32.53	-95.26	-62.73	-13	-49.73
2	47.49	29.86	-95.26	-65.40	-13	-52.40
3	106.03	24.29	-95.26	-70.97	-13	-57.97
4	158.57	25.39	-95.26	-69.87	-13	-56.87
5	197.58	22.63	-95.26	-72.63	-13	-59.63
6	380.99	26.55	-95.26	-68.71	-13	-55.71

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.2	28.83	-95.26	-66.43	-13	-53.43
2	108.96	22.39	-95.26	-72.87	-13	-59.87
3	148.66	23.75	-95.26	-71.51	-13	-58.51
4	197.1	27.21	-95.26	-68.05	-13	-55.05
5	309.13	22.65	-95.26	-72.61	-13	-59.61
6	486.8	28.55	-95.26	-66.71	-13	-53.71

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.01	30.71	-95.26	-64.55	-13	-51.55
2	47.41	30.68	-95.26	-64.58	-13	-51.58
3	106.45	23.62	-95.26	-71.64	-13	-58.64
4	158.46	25.8	-95.26	-69.46	-13	-56.46
5	197.69	21.45	-95.26	-73.81	-13	-60.81
6	380.8	26.2	-95.26	-69.06	-13	-56.06

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 5 MHz

Mode	TX channel 18625	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.12	27.88	-95.26	-67.38	-13	-54.38
2	108.53	22.3	-95.26	-72.96	-13	-59.96
3	148.76	23.4	-95.26	-71.86	-13	-58.86
4	196.55	27	-95.26	-68.26	-13	-55.26
5	309.73	24.05	-95.26	-71.21	-13	-58.21
6	486.85	27.4	-95.26	-67.86	-13	-54.86

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.83	31.48	-95.26	-63.78	-13	-50.78
2	47.46	29.03	-95.26	-66.23	-13	-53.23
3	105.78	24.92	-95.26	-70.34	-13	-57.34
4	158.34	25.56	-95.26	-69.70	-13	-56.70
5	197.81	23.7	-95.26	-71.56	-13	-58.56
6	381.63	26.72	-95.26	-68.54	-13	-55.54

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.03	28.84	-95.26	-66.42	-13	-53.42
2	107.98	23.84	-95.26	-71.42	-13	-58.42
3	149.09	23.64	-95.26	-71.62	-13	-58.62
4	196.31	26.47	-95.26	-68.79	-13	-55.79
5	309.59	24.21	-95.26	-71.05	-13	-58.05
6	487.16	27.24	-95.26	-68.02	-13	-55.02

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.98	33.3	-95.26	-61.96	-13	-48.96
2	47.56	29.57	-95.26	-65.69	-13	-52.69
3	106.31	24.35	-95.26	-70.91	-13	-57.91
4	159.11	25.77	-95.26	-69.49	-13	-56.49
5	197.9	21.89	-95.26	-73.37	-13	-60.37
6	381.46	26.33	-95.26	-68.93	-13	-55.93

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



Mode	TX channel 19175	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.06	28.52	-95.26	-66.74	-13	-53.74
2	108.95	22.44	-95.26	-72.82	-13	-59.82
3	148.97	23.27	-95.26	-71.99	-13	-58.99
4	197	27.1	-95.26	-68.16	-13	-55.16
5	309.08	22.45	-95.26	-72.81	-13	-59.81
6	486.43	28.8	-95.26	-66.46	-13	-53.46

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.02	31.05	-95.26	-64.21	-13	-51.21
2	47.65	30	-95.26	-65.26	-13	-52.26
3	106.34	23.71	-95.26	-71.55	-13	-58.55
4	158.42	25.73	-95.26	-69.53	-13	-56.53
5	197.02	21.75	-95.26	-73.51	-13	-60.51
6	380.88	25.89	-95.26	-69.37	-13	-56.37

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 10 MHz**

Mode	TX channel 18650	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.1	28.31	-95.26	-66.95	-13	-53.95
2	108.64	21.94	-95.26	-73.32	-13	-60.32
3	149.23	23.09	-95.26	-72.17	-13	-59.17
4	196.84	26.9	-95.26	-68.36	-13	-55.36
5	309.09	23.47	-95.26	-71.79	-13	-58.79
6	486.43	26.96	-95.26	-68.30	-13	-55.30

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.83	31.76	-95.26	-63.50	-13	-50.50
2	47.79	28.67	-95.26	-66.59	-13	-53.59
3	106.59	25.15	-95.26	-70.11	-13	-57.11
4	158.59	25.88	-95.26	-69.38	-13	-56.38
5	197.92	23.62	-95.26	-71.64	-13	-58.64
6	381.54	26.54	-95.26	-68.72	-13	-55.72

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.05	28.97	-95.26	-66.29	-13	-53.29
2	108.54	24.25	-95.26	-71.01	-13	-58.01
3	149.14	23.16	-95.26	-72.10	-13	-59.10
4	196.49	25.88	-95.26	-69.38	-13	-56.38
5	309.49	24.06	-95.26	-71.20	-13	-58.20
6	487.1	27.93	-95.26	-67.33	-13	-54.33

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.05	32.49	-95.26	-62.77	-13	-49.77
2	47.55	29.96	-95.26	-65.30	-13	-52.30
3	105.7	24.13	-95.26	-71.13	-13	-58.13
4	158.91	25.61	-95.26	-69.65	-13	-56.65
5	197.81	22.6	-95.26	-72.66	-13	-59.66
6	381.19	27.06	-95.26	-68.20	-13	-55.20

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19150	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.04	28.98	-95.26	-66.28	-13	-53.28
2	108.41	22.97	-95.26	-72.29	-13	-59.29
3	148.49	23.67	-95.26	-71.59	-13	-58.59
4	196.51	26.93	-95.26	-68.33	-13	-55.33
5	309.77	22.48	-95.26	-72.78	-13	-59.78
6	487.25	28.68	-95.26	-66.58	-13	-53.58

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.88	31.15	-95.26	-64.11	-13	-51.11
2	47.82	30.29	-95.26	-64.97	-13	-51.97
3	106.6	23.86	-95.26	-71.40	-13	-58.40
4	158.78	26.2	-95.26	-69.06	-13	-56.06
5	197.26	21.71	-95.26	-73.55	-13	-60.55
6	380.96	25.89	-95.26	-69.37	-13	-56.37

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 15 MHz

Mode	TX channel 18675	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.19	28.73	-95.26	-66.53	-13	-53.53
2	108.05	22.47	-95.26	-72.79	-13	-59.79
3	148.65	23.48	-95.26	-71.78	-13	-58.78
4	196.31	27.32	-95.26	-67.94	-13	-54.94
5	309.32	24.06	-95.26	-71.20	-13	-58.20
6	486.58	27.02	-95.26	-68.24	-13	-55.24

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.03	31.54	-95.26	-63.72	-13	-50.72
2	47.69	29.54	-95.26	-65.72	-13	-52.72
3	106.62	24.62	-95.26	-70.64	-13	-57.64
4	158.83	25.92	-95.26	-69.34	-13	-56.34
5	196.96	23.82	-95.26	-71.44	-13	-58.44
6	381.14	26.55	-95.26	-68.71	-13	-55.71

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.03	28.49	-95.26	-66.77	-13	-53.77
2	108.58	23.64	-95.26	-71.62	-13	-58.62
3	149.25	23.48	-95.26	-71.78	-13	-58.78
4	196.64	25.75	-95.26	-69.51	-13	-56.51
5	309.08	23.91	-95.26	-71.35	-13	-58.35
6	487.09	27.79	-95.26	-67.47	-13	-54.47

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.91	32.86	-95.26	-62.40	-13	-49.40
2	47.61	29.35	-95.26	-65.91	-13	-52.91
3	105.93	23.62	-95.26	-71.64	-13	-58.64
4	158.75	25.83	-95.26	-69.43	-13	-56.43
5	197.57	22.11	-95.26	-73.15	-13	-60.15
6	381.39	26.94	-95.26	-68.32	-13	-55.32

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.13	29.13	-95.26	-66.13	-13	-53.13
2	108.86	22.45	-95.26	-72.81	-13	-59.81
3	148.67	23.66	-95.26	-71.60	-13	-58.60
4	197.13	27.51	-95.26	-67.75	-13	-54.75
5	309.76	22.87	-95.26	-72.39	-13	-59.39
6	486.69	28.57	-95.26	-66.69	-13	-53.69

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.99	31.03	-95.26	-64.23	-13	-51.23
2	47.51	30.8	-95.26	-64.46	-13	-51.46
3	105.77	23.72	-95.26	-71.54	-13	-58.54
4	159.19	26.26	-95.26	-69.00	-13	-56.00
5	197.48	21.49	-95.26	-73.77	-13	-60.77
6	381.05	25.53	-95.26	-69.73	-13	-56.73

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 20 MHz**

Mode	TX channel 18700	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.1	28.4	-95.26	-66.86	-13	-53.86
2	108.4	22.43	-95.26	-72.83	-13	-59.83
3	148.94	23.01	-95.26	-72.25	-13	-59.25
4	196.49	27.44	-95.26	-67.82	-13	-54.82
5	309.03	24.33	-95.26	-70.93	-13	-57.93
6	487.07	27.7	-95.26	-67.56	-13	-54.56

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.96	31.79	-95.26	-63.47	-13	-50.47
2	47.54	29.1	-95.26	-66.16	-13	-53.16
3	106.28	25.19	-95.26	-70.07	-13	-57.07
4	159.21	26.32	-95.26	-68.94	-13	-55.94
5	197.03	23.21	-95.26	-72.05	-13	-59.05
6	381.37	26.88	-95.26	-68.38	-13	-55.38

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.



Mode	TX channel 18900	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.01	28.82	-95.26	-66.44	-13	-53.44
2	108.61	24.35	-95.26	-70.91	-13	-57.91
3	149.2	23.39	-95.26	-71.87	-13	-58.87
4	197.14	25.72	-95.26	-69.54	-13	-56.54
5	309.72	24.04	-95.26	-71.22	-13	-58.22
6	487.03	27.91	-95.26	-67.35	-13	-54.35

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	30.92	32.9	-95.26	-62.36	-13	-49.36
2	47.65	29.53	-95.26	-65.73	-13	-52.73
3	106.36	24.28	-95.26	-70.98	-13	-57.98
4	158.81	25.75	-95.26	-69.51	-13	-56.51
5	197.5	22.18	-95.26	-73.08	-13	-60.08
6	381.54	26.85	-95.26	-68.41	-13	-55.41

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Below 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.07	28.49	-95.26	-66.77	-13	-53.77
2	108.33	23.26	-95.26	-72.00	-13	-59.00
3	148.77	23.26	-95.26	-72.00	-13	-59.00
4	196.9	26.9	-95.26	-68.36	-13	-55.36
5	309.08	22.78	-95.26	-72.48	-13	-59.48
6	486.84	27.98	-95.26	-67.28	-13	-54.28

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	31.02	31.11	-95.26	-64.15	-13	-51.15
2	47.78	30.51	-95.26	-64.75	-13	-51.75
3	106.43	23.39	-95.26	-71.87	-13	-58.87
4	158.42	25.61	-95.26	-69.65	-13	-56.65
5	197.09	22.35	-95.26	-72.91	-13	-59.91
6	381.33	26.06	-95.26	-69.20	-13	-56.20

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**Above 1GHz**
**WCDMA B2:**

Mode	TX channel 9262	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3704.8	31.83	-95.26	-63.43	-13	-50.43
2	4631	32.6	-95.26	-62.66	-13	-49.66
3	5557.2	32.8	-95.26	-62.46	-13	-49.46
4	6483.4	32.65	-95.26	-62.61	-13	-49.61
5	7409.6	32.39	-95.26	-62.87	-13	-49.87
6	8335.8	33.26	-95.26	-62.00	-13	-49.00

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3704.8	31.92	-95.26	-63.34	-13	-50.34
2	4631	32.65	-95.26	-62.61	-13	-49.61
3	5557.2	32.88	-95.26	-62.38	-13	-49.38
4	6483.4	32.46	-95.26	-62.80	-13	-49.80
5	7409.6	32.79	-95.26	-62.47	-13	-49.47
6	8335.8	32.9	-95.26	-62.36	-13	-49.36

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9400	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.93	-95.26	-63.33	-13	-50.33
2	4700	32.77	-95.26	-62.49	-13	-49.49
3	5640	32.57	-95.26	-62.69	-13	-49.69
4	6580	32.55	-95.26	-62.71	-13	-49.71
5	7520	33.06	-95.26	-62.20	-13	-49.20
6	8460	33.71	-95.26	-61.55	-13	-48.55

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.4	-95.26	-63.86	-13	-50.86
2	4700	31.93	-95.26	-63.33	-13	-50.33
3	5640	32.59	-95.26	-62.67	-13	-49.67
4	6580	32.75	-95.26	-62.51	-13	-49.51
5	7520	32.73	-95.26	-62.53	-13	-49.53
6	8460	34.09	-95.26	-61.17	-13	-48.17

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 9538	Frequency Range	Above 1000 MHz
------	-----------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815.2	31.92	-95.26	-63.34	-13	-50.34
2	4769	32.3	-95.26	-62.96	-13	-49.96
3	5722.8	32.08	-95.26	-63.18	-13	-50.18
4	6676.6	32.47	-95.26	-62.79	-13	-49.79
5	7630.4	32.8	-95.26	-62.46	-13	-49.46
6	8584.2	33.05	-95.26	-62.21	-13	-49.21

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815.2	31.82	-95.26	-63.44	-13	-50.44
2	4769	32.4	-95.26	-62.86	-13	-49.86
3	5722.8	32.9	-95.26	-62.36	-13	-49.36
4	6676.6	32.35	-95.26	-62.91	-13	-49.91
5	7630.4	32.98	-95.26	-62.28	-13	-49.28
6	8584.2	33.88	-95.26	-61.38	-13	-48.38

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 1.4 MHz

Mode	TX channel 18607	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	32.05	-95.26	-63.21	-13	-50.21
2	4626.75	32.82	-95.26	-62.44	-13	-49.44
3	5552.1	33.14	-95.26	-62.12	-13	-49.12
4	6477.45	32.86	-95.26	-62.40	-13	-49.40
5	7402.8	32.6	-95.26	-62.66	-13	-49.66
6	8328.15	33.4	-95.26	-61.86	-13	-48.86

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3701.4	31.99	-95.26	-63.27	-13	-50.27
2	4626.75	32.74	-95.26	-62.52	-13	-49.52
3	5552.1	32.99	-95.26	-62.27	-13	-49.27
4	6477.45	32.65	-95.26	-62.61	-13	-49.61
5	7402.8	32.87	-95.26	-62.39	-13	-49.39
6	8328.15	33.1	-95.26	-62.16	-13	-49.16

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.15	-95.26	-63.11	-13	-50.11
2	4700	32.84	-95.26	-62.42	-13	-49.42
3	5640	32.65	-95.26	-62.61	-13	-49.61
4	6580	32.77	-95.26	-62.49	-13	-49.49
5	7520	33.16	-95.26	-62.10	-13	-49.10
6	8460	33.87	-95.26	-61.39	-13	-48.39

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.64	-95.26	-63.62	-13	-50.62
2	4700	32.13	-95.26	-63.13	-13	-50.13
3	5640	32.66	-95.26	-62.60	-13	-49.60
4	6580	32.76	-95.26	-62.50	-13	-49.50
5	7520	32.96	-95.26	-62.30	-13	-49.30
<b>6</b>	<b>8460</b>	<b>34.3</b>	<b>-95.26</b>	<b>-60.96</b>	<b>-13</b>	<b>-47.96</b>

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19193	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	32	-95.26	-63.26	-13	-50.26
2	4773.25	32.45	-95.26	-62.81	-13	-49.81
3	5727.9	32.25	-95.26	-63.01	-13	-50.01
4	6682.55	32.69	-95.26	-62.57	-13	-49.57
5	7637.2	32.98	-95.26	-62.28	-13	-49.28
6	8591.85	33.21	-95.26	-62.05	-13	-49.05

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3818.6	31.86	-95.26	-63.40	-13	-50.40
2	4773.25	32.62	-95.26	-62.64	-13	-49.64
3	5727.9	33.1	-95.26	-62.16	-13	-49.16
4	6682.55	32.52	-95.26	-62.74	-13	-49.74
5	7637.2	32.99	-95.26	-62.27	-13	-49.27
6	8591.85	33.96	-95.26	-61.30	-13	-48.30

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



### LTE Band 2: 3 MHz

Mode	TX channel 18615	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3703	31.95	-95.26	-63.31	-13	-50.31
2	4628.75	32.94	-95.26	-62.32	-13	-49.32
3	5554.5	32.57	-95.26	-62.69	-13	-49.69
4	6480.25	32.82	-95.26	-62.44	-13	-49.44
5	7406	32.8	-95.26	-62.46	-13	-49.46
6	8331.75	33.44	-95.26	-61.82	-13	-48.82

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3703	31.93	-95.26	-63.33	-13	-50.33
2	4628.75	32.82	-95.26	-62.44	-13	-49.44
3	5554.5	32.88	-95.26	-62.38	-13	-49.38
4	6480.25	32.6	-95.26	-62.66	-13	-49.66
5	7406	32.94	-95.26	-62.32	-13	-49.32
6	8331.75	32.96	-95.26	-62.30	-13	-49.30

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.07	-95.26	-63.19	-13	-50.19
2	4700	32.94	-95.26	-62.32	-13	-49.32
3	5640	32.58	-95.26	-62.68	-13	-49.68
4	6580	32.77	-95.26	-62.49	-13	-49.49
5	7520	33.3	-95.26	-61.96	-13	-48.96
6	8460	33.96	-95.26	-61.30	-13	-48.30

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.61	-95.26	-63.65	-13	-50.65
2	4700	32.12	-95.26	-63.14	-13	-50.14
3	5640	32.76	-95.26	-62.50	-13	-49.50
4	6580	32.78	-95.26	-62.48	-13	-49.48
5	7520	32.94	-95.26	-62.32	-13	-49.32
6	8460	34.11	-95.26	-61.15	-13	-48.15

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19185	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3817	32.03	-95.26	-63.23	-13	-50.23
2	4771.25	32.35	-95.26	-62.91	-13	-49.91
3	5725.5	32.15	-95.26	-63.11	-13	-50.11
4	6679.75	32.59	-95.26	-62.67	-13	-49.67
5	7634	32.97	-95.26	-62.29	-13	-49.29
6	8588.25	33.22	-95.26	-62.04	-13	-49.04

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3817	31.89	-95.26	-63.37	-13	-50.37
2	4771.25	32.45	-95.26	-62.81	-13	-49.81
3	5725.5	32.98	-95.26	-62.28	-13	-49.28
4	6679.75	32.54	-95.26	-62.72	-13	-49.72
5	7634	33.01	-95.26	-62.25	-13	-49.25
6	8588.25	33.93	-95.26	-61.33	-13	-48.33

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 5 MHz

Mode	TX channel 18625	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3705	31.86	-95.26	-63.40	-13	-50.40
2	4631.25	32.63	-95.26	-62.63	-13	-49.63
3	5557.5	32.88	-95.26	-62.38	-13	-49.38
4	6483.75	32.72	-95.26	-62.54	-13	-49.54
5	7410	32.67	-95.26	-62.59	-13	-49.59
6	8336.25	33.56	-95.26	-61.70	-13	-48.70

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3705	32.02	-95.26	-63.24	-13	-50.24
2	4631.25	32.76	-95.26	-62.50	-13	-49.50
3	5557.5	33.02	-95.26	-62.24	-13	-49.24
4	6483.75	32.5	-95.26	-62.76	-13	-49.76
5	7410	32.83	-95.26	-62.43	-13	-49.43
6	8336.25	32.98	-95.26	-62.28	-13	-49.28

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.09	-95.26	-63.17	-13	-50.17
2	4700	32.96	-95.26	-62.30	-13	-49.30
3	5640	32.6	-95.26	-62.66	-13	-49.66
4	6580	32.74	-95.26	-62.52	-13	-49.52
5	7520	33.17	-95.26	-62.09	-13	-49.09
6	8460	33.89	-95.26	-61.37	-13	-48.37

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.49	-95.26	-63.77	-13	-50.77
2	4700	32.02	-95.26	-63.24	-13	-50.24
3	5640	32.69	-95.26	-62.57	-13	-49.57
4	6580	32.82	-95.26	-62.44	-13	-49.44
5	7520	32.85	-95.26	-62.41	-13	-49.41
6	8460	34.23	-95.26	-61.03	-13	-48.03

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19175	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815	32.04	-95.26	-63.22	-13	-50.22
2	4768.75	32.54	-95.26	-62.72	-13	-49.72
3	5722.5	32.13	-95.26	-63.13	-13	-50.13
4	6676.25	32.71	-95.26	-62.55	-13	-49.55
5	7630	32.97	-95.26	-62.29	-13	-49.29
6	8583.75	33.27	-95.26	-61.99	-13	-48.99

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3815	31.97	-95.26	-63.29	-13	-50.29
2	4768.75	32.51	-95.26	-62.75	-13	-49.75
3	5722.5	33.1	-95.26	-62.16	-13	-49.16
4	6676.25	32.5	-95.26	-62.76	-13	-49.76
5	7630	33.14	-95.26	-62.12	-13	-49.12
6	8583.75	34.12	-95.26	-61.14	-13	-48.14

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 10 MHz

Mode	TX channel 18650	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3710	31.93	-95.26	-63.33	-13	-50.33
2	4637.5	32.93	-95.26	-62.33	-13	-49.33
3	5565	32.43	-95.26	-62.83	-13	-49.83
4	6492.5	32.33	-95.26	-62.93	-13	-49.93
5	7420	32.65	-95.26	-62.61	-13	-49.61
6	8347.5	33.72	-95.26	-61.54	-13	-48.54

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3710	32.02	-95.26	-63.24	-13	-50.24
2	4637.5	32.75	-95.26	-62.51	-13	-49.51
3	5565	33.04	-95.26	-62.22	-13	-49.22
4	6492.5	32.67	-95.26	-62.59	-13	-49.59
5	7420	32.79	-95.26	-62.47	-13	-49.47
6	8347.5	33.14	-95.26	-62.12	-13	-49.12

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.15	-95.26	-63.11	-13	-50.11
2	4700	32.8	-95.26	-62.46	-13	-49.46
3	5640	32.75	-95.26	-62.51	-13	-49.51
4	6580	32.61	-95.26	-62.65	-13	-49.65
5	7520	33.14	-95.26	-62.12	-13	-49.12
6	8460	33.85	-95.26	-61.41	-13	-48.41

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.62	-95.26	-63.64	-13	-50.64
2	4700	32.16	-95.26	-63.10	-13	-50.10
3	5640	32.72	-95.26	-62.54	-13	-49.54
4	6580	32.77	-95.26	-62.49	-13	-49.49
5	7520	32.97	-95.26	-62.29	-13	-49.29
6	8460	34.27	-95.26	-60.99	-13	-47.99

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.



Mode	TX channel 19150	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3810	32.14	-95.26	-63.12	-13	-50.12
2	4762.5	32.52	-95.26	-62.74	-13	-49.74
3	5715	32.3	-95.26	-62.96	-13	-49.96
4	6667.5	32.47	-95.26	-62.79	-13	-49.79
5	7620	32.8	-95.26	-62.46	-13	-49.46
6	8572.5	33.1	-95.26	-62.16	-13	-49.16

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3810	32.04	-95.26	-63.22	-13	-50.22
2	4762.5	32.56	-95.26	-62.70	-13	-49.70
3	5715	33.01	-95.26	-62.25	-13	-49.25
4	6667.5	32.48	-95.26	-62.78	-13	-49.78
5	7620	33.2	-95.26	-62.06	-13	-49.06
6	8572.5	34.11	-95.26	-61.15	-13	-48.15

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

### LTE Band 2: 15 MHz

Mode	TX channel 18675	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

#### Antenna Polarity & Test Distance: Horizontal at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3715	31.98	-95.26	-63.28	-13	-50.28
2	4643.75	32.8	-95.26	-62.46	-13	-49.46
3	5572.5	33.24	-95.26	-62.02	-13	-49.02
4	6501.25	32.2	-95.26	-63.06	-13	-50.06
5	7430	32.7	-95.26	-62.56	-13	-49.56
6	8358.75	33.46	-95.26	-61.80	-13	-48.80

#### Antenna Polarity & Test Distance: Vertical at 3 M

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3715	32.06	-95.26	-63.20	-13	-50.20
2	4643.75	32.82	-95.26	-62.44	-13	-49.44
3	5572.5	33.07	-95.26	-62.19	-13	-49.19
4	6501.25	32.49	-95.26	-62.77	-13	-49.77
5	7430	32.99	-95.26	-62.27	-13	-49.27
6	8358.75	32.94	-95.26	-62.32	-13	-49.32

#### Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.04	-95.26	-63.22	-13	-50.22
2	4700	32.9	-95.26	-62.36	-13	-49.36
3	5640	32.72	-95.26	-62.54	-13	-49.54
4	6580	32.62	-95.26	-62.64	-13	-49.64
5	7520	33.12	-95.26	-62.14	-13	-49.14
6	8460	33.76	-95.26	-61.50	-13	-48.50

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.63	-95.26	-63.63	-13	-50.63
2	4700	32.1	-95.26	-63.16	-13	-50.16
3	5640	32.71	-95.26	-62.55	-13	-49.55
4	6580	32.78	-95.26	-62.48	-13	-49.48
5	7520	32.74	-95.26	-62.52	-13	-49.52
6	8460	34.26	-95.26	-61.00	-13	-48.00

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19125	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3805	32.04	-95.26	-63.22	-13	-50.22
2	4756.25	32.37	-95.26	-62.89	-13	-49.89
3	5707.5	32.18	-95.26	-63.08	-13	-50.08
4	6658.75	32.55	-95.26	-62.71	-13	-49.71
5	7610	32.94	-95.26	-62.32	-13	-49.32
6	8561.25	33.12	-95.26	-62.14	-13	-49.14

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3805	31.83	-95.26	-63.43	-13	-50.43
2	4756.25	32.61	-95.26	-62.65	-13	-49.65
3	5707.5	33.1	-95.26	-62.16	-13	-49.16
4	6658.75	32.5	-95.26	-62.76	-13	-49.76
5	7610	33.02	-95.26	-62.24	-13	-49.24
6	8561.25	34.05	-95.26	-61.21	-13	-48.21

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

**LTE Band 2: 20 MHz**

Mode	TX channel 18700	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3720	32.07	-95.26	-63.19	-13	-50.19
2	4650	32.55	-95.26	-62.71	-13	-49.71
3	5580	32.46	-95.26	-62.80	-13	-49.80
4	6510	32.35	-95.26	-62.91	-13	-49.91
5	7440	32.07	-95.26	-63.19	-13	-50.19
6	8370	33.55	-95.26	-61.71	-13	-48.71

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3720	31.95	-95.26	-63.31	-13	-50.31
2	4650	32.82	-95.26	-62.44	-13	-49.44
3	5580	33.08	-95.26	-62.18	-13	-49.18
4	6510	32.5	-95.26	-62.76	-13	-49.76
5	7440	33	-95.26	-62.26	-13	-49.26
6	8370	33.01	-95.26	-62.25	-13	-49.25

**Remarks:**

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) – 104.8; where D is the measurement distance @3m.

Mode	TX channel 18900	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	32.06	-95.26	-63.20	-13	-50.20
2	4700	32.85	-95.26	-62.41	-13	-49.41
3	5640	32.63	-95.26	-62.63	-13	-49.63
4	6580	32.78	-95.26	-62.48	-13	-49.48
5	7520	33.22	-95.26	-62.04	-13	-49.04
6	8460	33.87	-95.26	-61.39	-13	-48.39

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3760	31.5	-95.26	-63.76	-13	-50.76
2	4700	32.09	-95.26	-63.17	-13	-50.17
3	5640	32.69	-95.26	-62.57	-13	-49.57
4	6580	32.89	-95.26	-62.37	-13	-49.37
5	7520	32.93	-95.26	-62.33	-13	-49.33
6	8460	34.29	-95.26	-60.97	-13	-47.97

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

Mode	TX channel 19100	Frequency Range	Above 1000 MHz
------	------------------	-----------------	----------------

**Antenna Polarity & Test Distance: Horizontal at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3800	32.09	-95.26	-63.17	-13	-50.17
2	4750	32.52	-95.26	-62.74	-13	-49.74
3	5700	32.21	-95.26	-63.05	-13	-50.05
4	6650	32.5	-95.26	-62.76	-13	-49.76
5	7600	32.88	-95.26	-62.38	-13	-49.38
6	8550	33.2	-95.26	-62.06	-13	-49.06

**Antenna Polarity & Test Distance: Vertical at 3 M**

No.	Freq. (MHz)	Reading (dB $\mu$ V/m)	Correction Factor (dB)	Emission Value (dBm)	Limit (dBm)	Margin (dB)
1	3800	31.94	-95.26	-63.32	-13	-50.32
2	4750	32.46	-95.26	-62.80	-13	-49.80
3	5700	33.14	-95.26	-62.12	-13	-49.12
4	6650	32.54	-95.26	-62.72	-13	-49.72
5	7600	32.98	-95.26	-62.28	-13	-49.28
6	8550	33.96	-95.26	-61.30	-13	-48.30

Remarks:

1. Follow ANSI 63.26 section 5.2.7 d), Emission Value (dBm) = E (dB $\mu$ V/m) - Correction Factor @ 3m.
2. Correction Factor (dB) = 20log(D) - 104.8; where D is the measurement distance @3m.

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---