



**ANKI, INCORPORATED**

Application  
For  
Certification

**FCC ID: 2AAIC00007**

**Cozmo Base Kit(Drive-on/Drive-off Charger)**

**Model: 300-00030**

Report No.: SZHH01076465-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-15]

Prepared and Checked by:

Approved by:

Sign on file

*Terry Tang*  
Engineer

---

*Kidd Yang*  
Senior Project Engineer  
Date: September 13, 2016

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_c

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

---

# INTERTEK TESTING SERVICES

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

ANKI, INCORPORATED

Model: 300-00030

FCC ID: 2AAIC00007

This report concerns (check one)      Original Grant       Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-15 Edition] provision.

Report prepared by:

Terry Tang  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, Block D, Huahan Building, Langshan Road,  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0629  
Fax: (86 755) 8601 6751

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 <u>General Description</u></b> .....	2
1.1 Product Description .....	2
1.2 Related Submittal(s) Grants .....	2
1.3 Test Methodology .....	2
1.4 Test Facility .....	2
<b>2.0 <u>System Test Configuration</u></b> .....	4
2.1 Justification .....	4
2.2 EUT Exercising Software .....	4
2.3 Special Accessories .....	4
2.4 Equipment Modification .....	4
2.5 Measurement Uncertainty .....	5
2.6 Support Equipment List and Description .....	5
<b>3.0 <u>Emission Results</u></b> .....	7
3.1 Radiated Test Results .....	8
3.1.1 Field Strength Calculation .....	8
3.1.2 Radiated Emission Configuration Photograph .....	9
3.1.3 Radiated Emissions .....	9
3.1.4 Transmitter Spurious Emissions .....	11
3.2 Conducted Emission at Mains Terminals .....	15
3.2.1 Conducted Emissions Configuration Photograph .....	15
3.2.2 Conducted Emissions .....	15
<b>4.0 <u>Equipment Photographs</u></b> .....	19
<b>5.0 <u>Product Labelling</u></b> .....	21
<b>6.0 <u>Technical Specifications</u></b> .....	23
<b>7.0 <u>Instruction Manual</u></b> .....	25
<b>8.0 <u>Miscellaneous Information</u></b> .....	27
8.1 Bandedge Plot .....	28
8.2 Discussion of Pulse Desensitization .....	30
8.3 Calculation of Average Factor .....	31
8.4 Emissions Test Procedures .....	32
<b>9.0 <u>Test Equipment List</u></b> .....	35

---

## INTERTEK TESTING SERVICES

---

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

**EXHIBIT 1**

**GENERAL DESCRIPTION**

# INTERTEK TESTING SERVICES

---

## 1.0 General Description

### 1.1 Product Description

The Equipment under Test (EUT) is a transmitter for the Cozmo Base Kit(Drive-on/Drive-off Charger) model: 300-00030 operating at 2.4GHz band. The EUT is powered by DC 5.0V from an AC/DC adaptor with input of AC 120V, 60Hz. For more detail information pls. refer to the user manual.

Antenna type: Integral antenna

Modulation Type: GFSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

### 1.2 Related Submittal(s) Grants

This is an application for certification of a transmitter for Cozmo Base Kit(Drive-on/Drive-off Charger) . And for the other digital function was tested and demonstrated in report SZHH01076465-009.

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

**EXHIBIT 2**  
**SYSTEM TEST CONFIGURATION**



# INTERTEK TESTING SERVICES

---

## 2.0 System Test Configuration

### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC 5.0V from an AC/DC adaptor with input of AC 120V, 60Hz during the test.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit was flushed with the rear of the table with 0.8m height up to 1GHz and 1.5 m height above 1GHz.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

### 2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

### 2.3 Special Accessories

No special accessory attached.

### 2.4 Equipment Modification

Any modifications installed previous to testing by ANKI, INCORPORATED will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

<b>Description</b>	<b>Manufacturer</b>	<b>Model No.</b>
AC /DC Adapter(USB Charger)	ANKI, INCORPORATED	PSA10F-050Q

**EXHIBIT 3**  
**EMISSION RESULTS**

## INTERTEK TESTING SERVICES

---

### 3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

---

## INTERTEK TESTING SERVICES

---

### 3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG$$

Where            FS = Field Strength in dB $\mu$ V/m  
                    RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V  
                    CF = Cable Attenuation Factor in dB  
                    AF = Antenna Factor in dB  
                    AG = Amplifier Gain in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG$$

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The net field strength for comparison to the appropriate emission limit is 42 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
AF = 7.4 dB  
CF = 1.6 dB  
AG = 29.0 dB

$$FS = 62 + 7.4 + 1.6 - 29 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### 3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

### 3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission  
at  
959.995 MHz

Judgement: Passed by 10.7 dB

#### ***TEST PERSONNEL:***

*Sign on file*

Terry Tang, Engineer  
*Typed/Printed Name*

July 30, 2016  
*Date*

---

---

## INTERTEK TESTING SERVICES

---

---

Applicant: ANKI, INCORPORATED  
Date of Test: July 30, 2016  
Model: 300-00030  
Sample: 1/1  
Worst Case Operating Mode: Transmitting (2402MHz)

Table 1

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	30.970	22.7	20.0	19.5	22.2	40.0	-17.8
Horizontal	537.795	26.8	20.0	20.5	27.3	46.0	-18.7
Horizontal	951.985	27.0	20.0	28.1	35.1	46.0	-10.9
Vertical	38.730	24.9	20.0	20.2	25.1	40.0	-14.9
Vertical	43.095	25.8	20.0	20.5	26.3	40.0	-13.7
Vertical	959.995	32.5	20.0	22.8	35.3	46.0	-10.7

- NOTES: 1. Quasi-Peak detector is used except for others stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

## INTERTEK TESTING SERVICES

---

### 3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission  
at  
9608.0 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 14.1 dB

#### ***TEST PERSONNEL:***

*Sign on file*

Terry Tang, Engineer  
*Typed/Printed Name*

July 30, 2016  
*Date*



## INTERTEK TESTING SERVICES

---

Applicant: ANKI, INCORPORATED  
 Date of Test: July 30, 2016  
 Model: 300-00030  
 Sample: 1/1  
 Worst Case Operating Mode: Transmitting

Table 2

### Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2402.000	106.0	36.7	28.1	97.4	114.0	-16.6
Horizontal	4804.000	59.3	36.7	35.5	58.1	74.0	-15.9
Horizontal	7206.000	58.4	36.1	36.5	58.8	74.0	-15.2
Horizontal	9608.000	59.1	36.2	37.0	59.9	74.0	-14.1

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2402.000	106.0	36.7	28.1	31.4	66.0	94.0	-28.0
Horizontal	4804.000	59.3	36.7	35.5	31.4	26.7	54.0	-27.3
Horizontal	7206.000	58.4	36.1	36.5	31.4	27.4	54.0	-26.6
Horizontal	9608.000	59.1	36.2	37.0	31.4	28.5	54.0	-25.5

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Terry Tang

## INTERTEK TESTING SERVICES

---

Applicant: ANKI, INCORPORATED  
 Date of Test: July 30, 2016  
 Model: 300-00030  
 Sample: 1/1  
 Worst Case Operating Mode: Transmitting

Table 3

### Radiated Emissions

(2442MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2442.000	105.4	36.7	28.1	96.8	114.0	-17.2
Horizontal	4884.000	58.0	36.7	35.5	56.8	74.0	-17.2
Horizontal	7326.000	56.5	36.1	37.2	57.6	74.0	-16.4
Horizontal	9768.000	58.3	36.2	37.0	59.1	74.0	-14.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2442.000	105.4	36.7	28.1	31.4	65.4	94.0	-28.6
Horizontal	4884.000	58.0	36.7	35.5	31.4	25.4	54.0	-28.6
Horizontal	7326.000	56.5	36.1	37.2	31.4	26.2	54.0	-27.8
Horizontal	9768.000	58.3	36.2	37.0	31.4	27.7	54.0	-26.3

- Notes: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Terry Tang

# INTERTEK TESTING SERVICES

Applicant: ANKI, INCORPORATED  
Date of Test: July 30, 2016  
Model: 300-00030  
Sample: 1/1  
Worst Case Operating Mode: Transmitting

Table 4

## Radiated Emissions

(2481MHz)

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2481.000	106.2	36.7	28.1	97.6	114.0	-16.4
Horizontal	4962.000	59.8	36.7	35.5	58.6	74.0	-15.4
Horizontal	7443.000	58.1	36.1	37.2	59.2	74.0	-14.8
Horizontal	9924.000	56.8	36.3	38.9	59.4	74.0	-14.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	2481.000	106.2	36.7	28.1	31.4	66.2	94.0	-27.8
Horizontal	4962.000	59.8	36.7	35.5	31.4	27.2	54.0	-26.8
Horizontal	7443.000	58.1	36.1	37.2	31.4	27.8	54.0	-26.2
Horizontal	9924.000	56.8	36.3	38.9	31.4	28.0	54.0	-26.0

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Terry Tang

## INTERTEK TESTING SERVICES

---

### 3.2 Conducted Emission at Mains Terminal

#### 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

#### 3.2.2 Conducted Emissions

Worst Case Live-Conducted Configuration  
At

0.170 MHz

Judgement: Passed by 13.9 dB margin

#### **TEST PERSONNEL:**

*Sign on file*


Terry Tang, Engineer  
*Typed/Printed Name*

July 30, 2016  
*Date*

# INTERTEK TESTING SERVICES

Applicant: ANKI, INCORPORATED  
 Date of Test: July 30, 2016  
 Model: 300-00030  
 Sample: 1/1  
 Worst Case Operating Mode: Transmitting  
 Phase: Live

## Conducted Emission Test – FCC

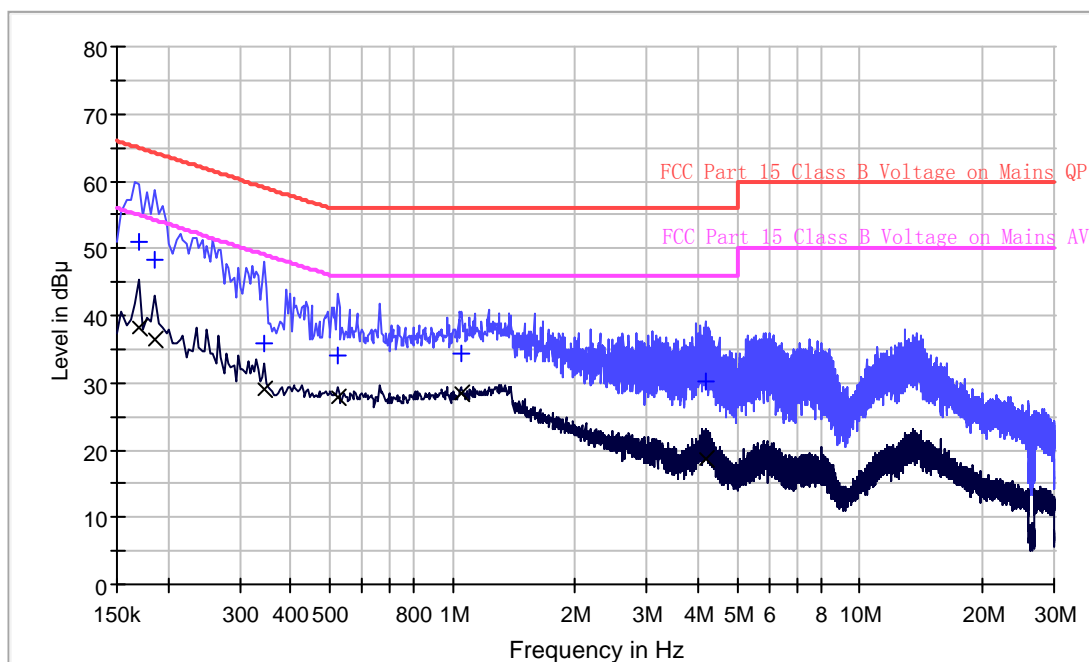

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.170000	51.1	L1	9.5	13.9	65.0
0.186000	48.4	L1	9.5	15.8	64.2
0.346000	35.9	L1	9.6	23.2	59.1
0.522000	34.1	L1	9.6	21.9	56.0
1.054000	34.2	L1	9.6	21.8	56.0
4.202000	30.2	L1	9.6	25.8	56.0

### Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.170000	38.4	L1	9.5	16.6	55.0
0.186000	36.3	L1	9.5	17.9	54.2
0.346000	29.0	L1	9.6	20.1	49.1
0.522000	27.8	L1	9.6	18.2	46.0
1.054000	28.3	L1	9.6	17.7	46.0
4.202000	18.7	L1	9.6	27.3	46.0


TRF No.: FCC 15C\_TX\_c  
 FCC ID: 2AAIC00007

# INTERTEK TESTING SERVICES

Applicant: ANKI, INCORPORATED  
 Date of Test: July 30, 2016  
 Model: 300-00030  
 Sample: 1/1  
 Worst Case Operating Mode: Transmitting  
 Phase: Neutral

## Conducted Emission Test – FCC

Level in dBuV

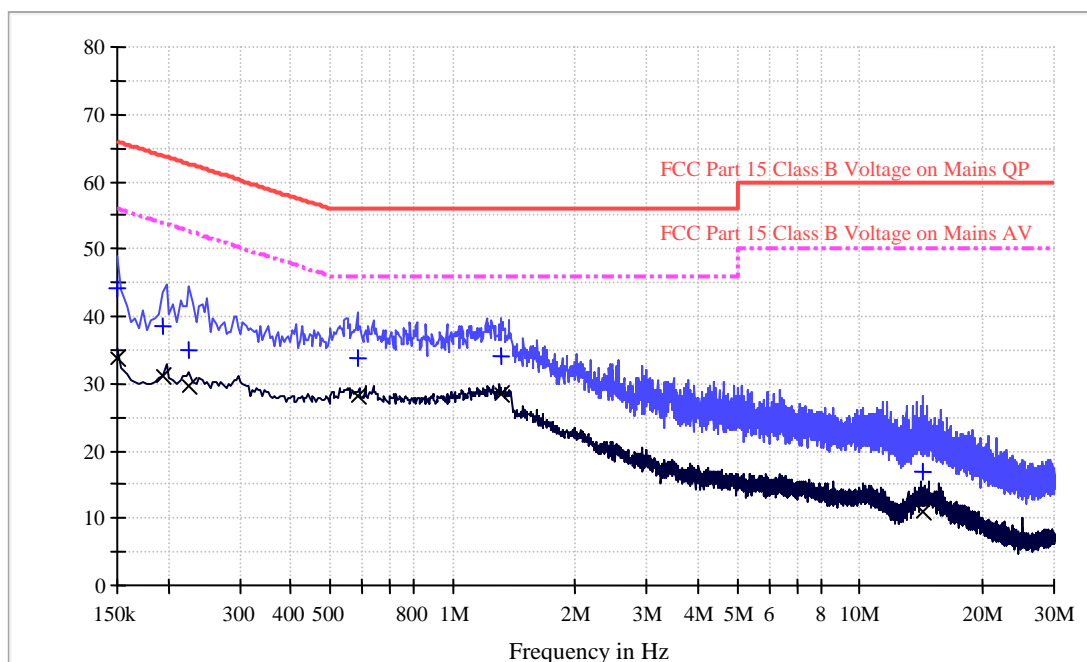

### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	44.1	N	9.6	21.9	66.0
0.194000	38.4	N	9.6	25.5	63.9
0.226000	35.0	N	9.6	27.6	62.6
0.582000	33.8	N	9.6	22.2	56.0
1.314000	34.1	N	9.6	21.9	56.0
14.258000	16.9	N	9.9	43.1	60.0

### Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	33.9	N	9.6	22.1	56.0
0.194000	31.1	N	9.6	22.8	53.9
0.226000	29.5	N	9.6	23.1	52.6
0.582000	28.1	N	9.6	17.9	46.0
1.314000	28.6	N	9.6	17.4	46.0
14.258000	11.1	N	9.9	38.9	50.0

TRF No.: FCC 15C\_TX\_c  
 FCC ID: 2AAIC00007

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 4**  
**EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.



---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 5**  
**PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 5.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 7**  
**INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 8**

**MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

### 8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.



---

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

#### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

#### **(i) Lower channel 2402MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 97.4\text{dB}\mu\text{V}/\text{m}-39.9\text{dB} \\ &= 57.5 \text{ dB}\mu\text{V}/\text{m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 66.0 \text{ dB}\mu\text{V}/\text{m}-39.9\text{dB} \\ &= 26.1 \text{ dB}\mu\text{V}/\text{m} \end{aligned}$$

#### **(ii) Upper channel 2481MHz:**

Peak Resultant field strength = Fundamental emissions (peak value) – delta  
from the bandedge plot

$$\begin{aligned} &= 97.6 \text{ dB}\mu\text{V}/\text{m}-41.5 \text{ dB} \\ &= 56.1 \text{ dB}\mu\text{V}/\text{m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (Average value) –  
delta from the bandedge plot

$$\begin{aligned} &= 66.2 \text{ dB}\mu\text{V}/\text{m}-41.5\text{dB} \\ &= 24.7 \text{ dB}\mu\text{V}/\text{m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB $\mu$ V/m (Peak Limit) and 54dB $\mu$ V/m (Average Limit).

## INTERTEK TESTING SERVICES

---

### 8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

## INTERTEK TESTING SERVICES

---

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{\text{eff}}$ ) is approximately 942.0 $\mu$ s for a digital "1" bit, as shown in the plots of Exhibit 8.3. With a resolution bandwidth (3 dB) of 100 kHz, the pulse desensitivity factor was 0 dB.

---

## INTERTEK TESTING SERVICES

---

### 8.3 Calculation of Average Factor

Averaging factor in dB =  $20 \log (\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.

A plot of the worst-case duty cycle as detected in this manner are saved with filename: af.pdf

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 35.1449ms  
Effective period of the cycle = 942.0 $\mu$ s = 0.942ms

DC =  $0.942\text{ms} / 35.1449\text{ms} = 0.0268$  or 2.68%

Therefore, the averaging factor is found by  $20 \log_{10} 0.0268 = -31.4\text{dB}$

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

## INTERTEK TESTING SERVICES

---

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT9**  
**TEST EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-12	BiConiLog Antenna	ETS	3142E	00166158	15-Sep-2015	15-Sep-2016
SZ185-01	EMI Receiver	R&S	ESCI	100547	23-Jan-2016	23-Jan-2017
SZ061-08	Horn Antenna	ETS	3115	00092346	17-Oct-2015	17-Oct-2016
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-2016	29-Apr-2017
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	28-Jun-2016	28-Jun-2017
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	08-Jul-2016	08-Jul-2017
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	23-Jan-2016	23-Jan-2017
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	16-Apr-2016	16-Apr-2018
SZ062-02	RF Cable	RADIALL	RG 213U	--	28-Jun-2016	28-Jun-2017
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	08-Apr-2016	08-Oct-2016
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	08-Apr-2016	08-Oct-2016
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	20-May-2016	20-May-2017
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	03-Nov-2015	03-Nov-2016
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	03-Nov-2015	03-Nov-2016
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	24-Jun-2016	24-Jun-2017
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-2015	23-Aug-2017