


9.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 12V
Test Mode:	TX Frequency U-NII-1 (5180-5240MHz)		

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)		Verdict
			Ant A	Ant B	
NVNT	a	5180	21.304	20.835	Pass
NVNT	a	5200	21.247	20.497	Pass
NVNT	a	5240	21.142	20.589	Pass
NVNT	n20	5180	21.42	21.302	Pass
NVNT	n20	5200	21.303	21.084	Pass
NVNT	n20	5240	21.005	21.571	Pass
NVNT	n40	5190	42.819	43.03	Pass
NVNT	n40	5230	42.986	43.255	Pass
NVNT	ac20	5180	21.394	21.165	Pass
NVNT	ac20	5200	21.155	21.341	Pass
NVNT	ac20	5240	21.001	21.335	Pass
NVNT	ac40	5190	43.058	42.946	Pass
NVNT	ac40	5230	42.923	43.064	Pass
NVNT	ac80	5210	82.245	83.091	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)	
			Ant A	Ant B
NVNT	a	5180	17.671	16.515
NVNT	a	5200	17.668	16.532
NVNT	a	5240	17.695	16.543
NVNT	n20	5180	17.661	17.666
NVNT	n20	5200	17.671	17.657
NVNT	n20	5240	17.649	17.671
NVNT	n40	5190	36.167	36.131
NVNT	n40	5230	36.158	36.159
NVNT	ac20	5180	17.66	17.692
NVNT	ac20	5200	17.661	17.68
NVNT	ac20	5240	17.668	17.673
NVNT	ac40	5190	36.162	36.175
NVNT	ac40	5230	36.156	36.139
NVNT	ac80	5210	75.665	75.652



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


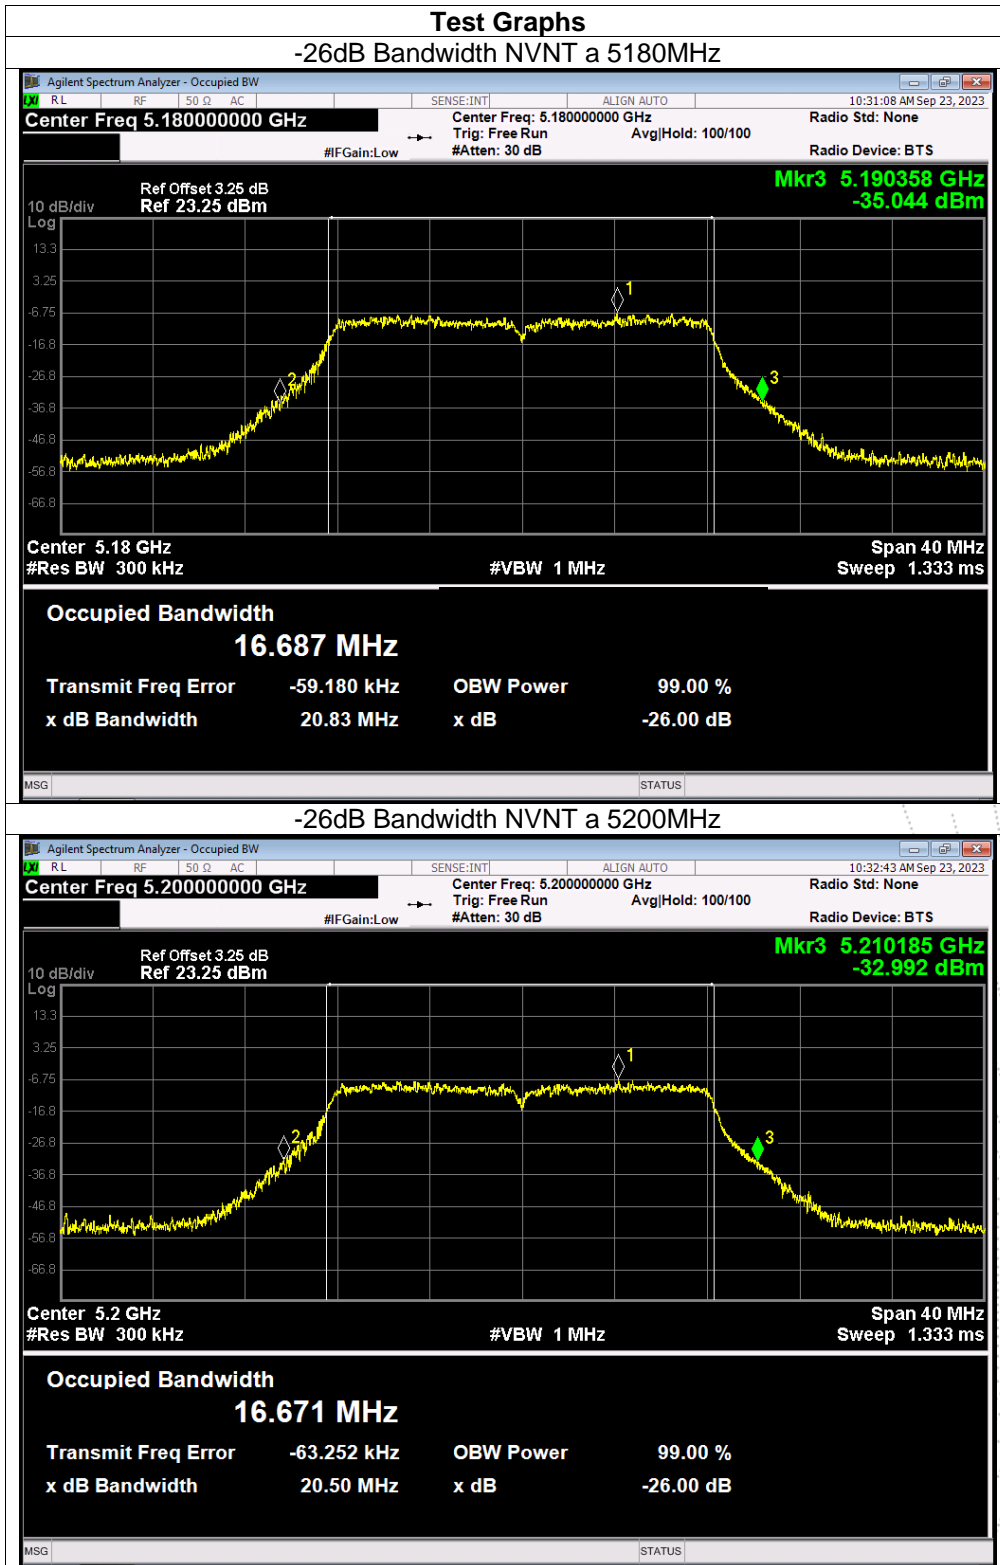


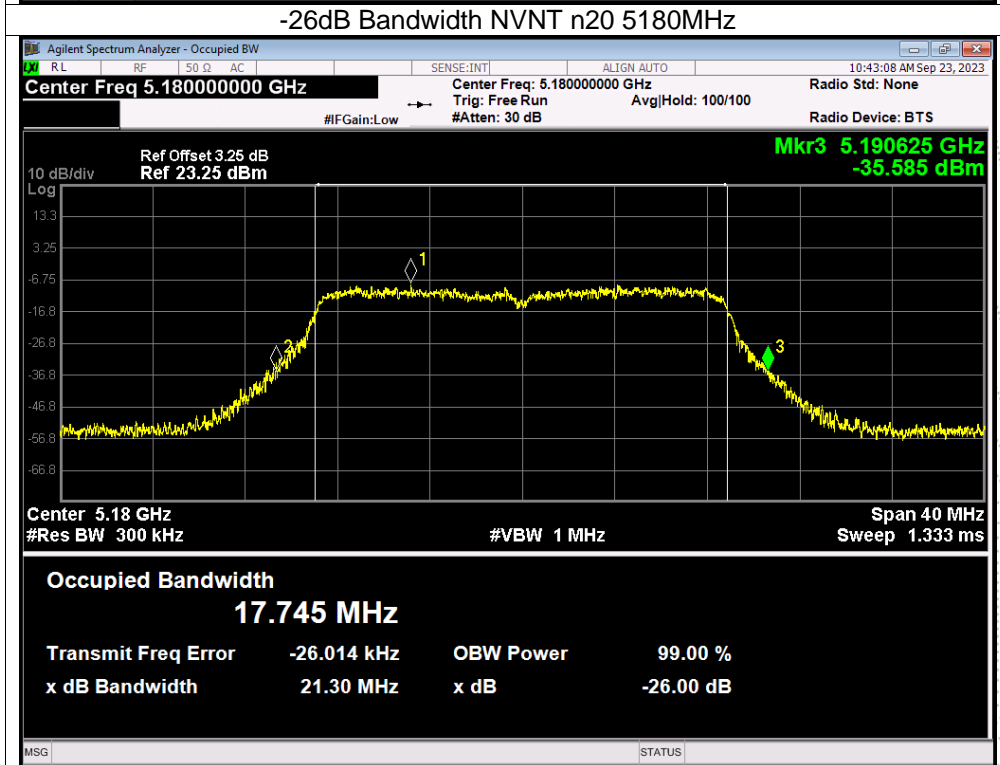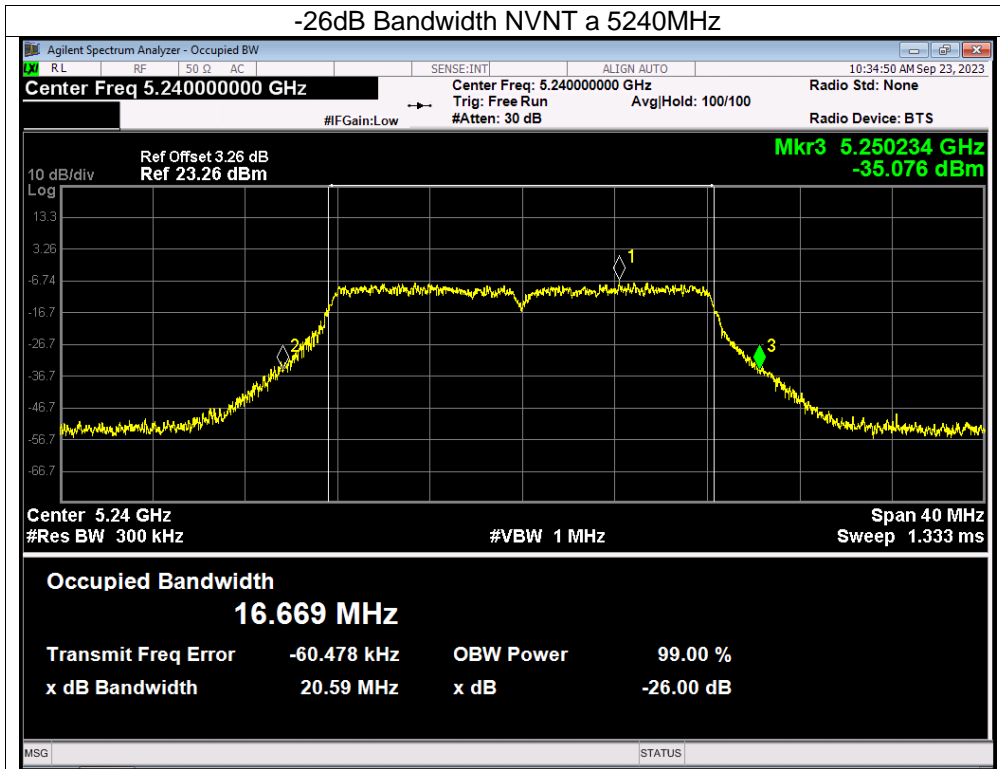



BCTC
 3C
 PPR
 检测

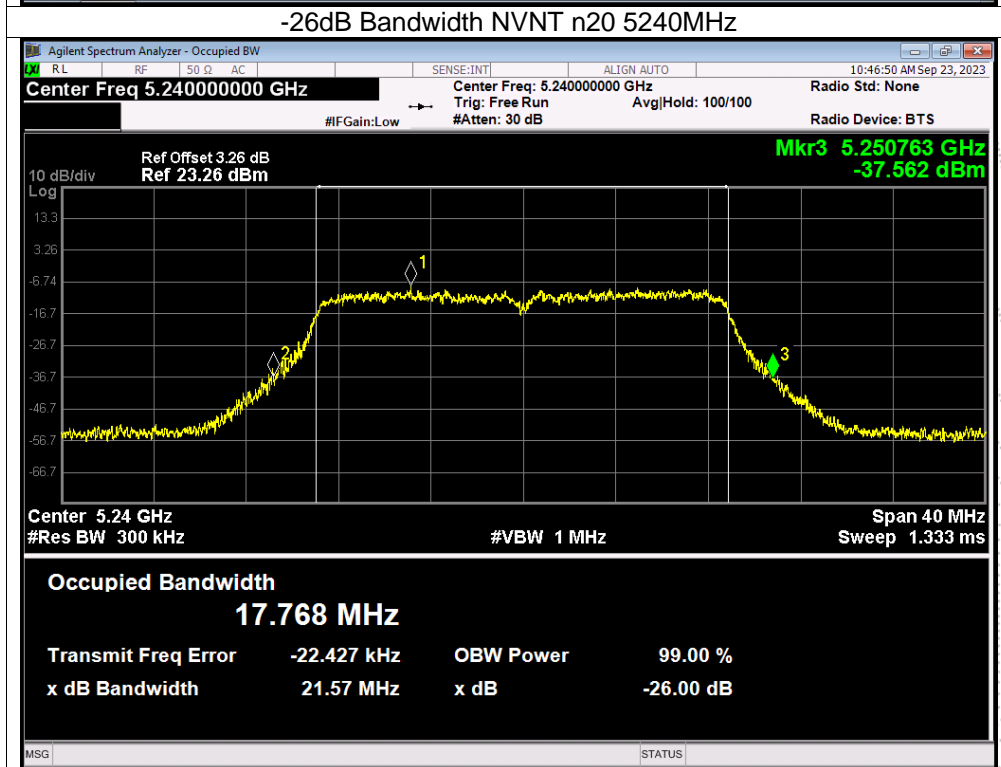
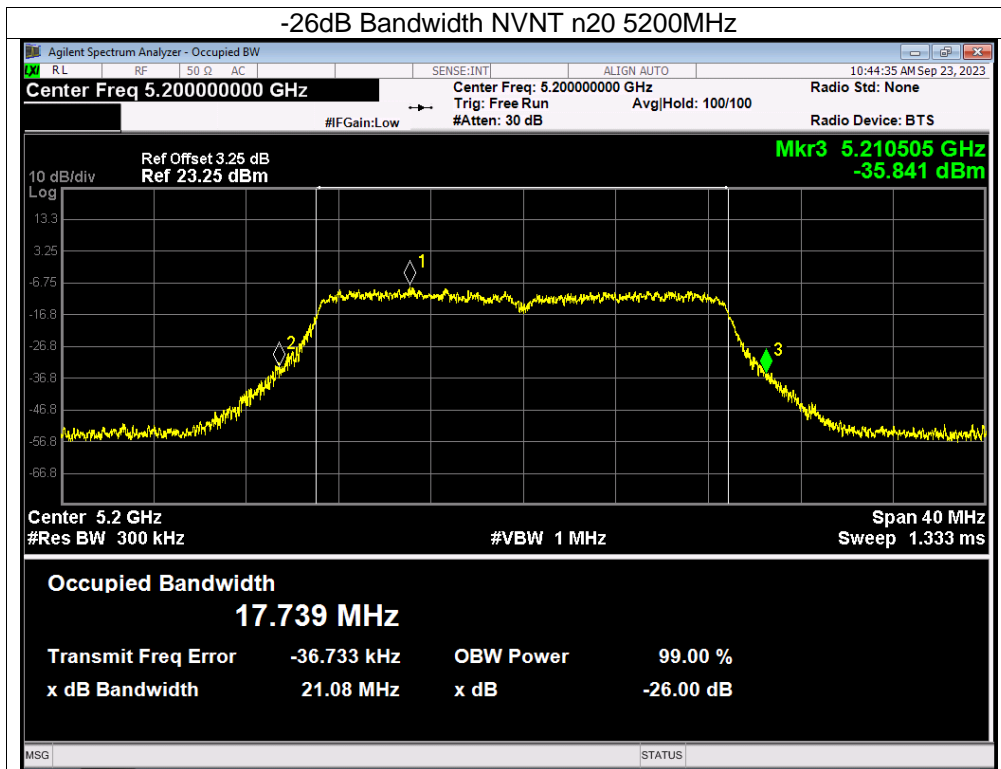


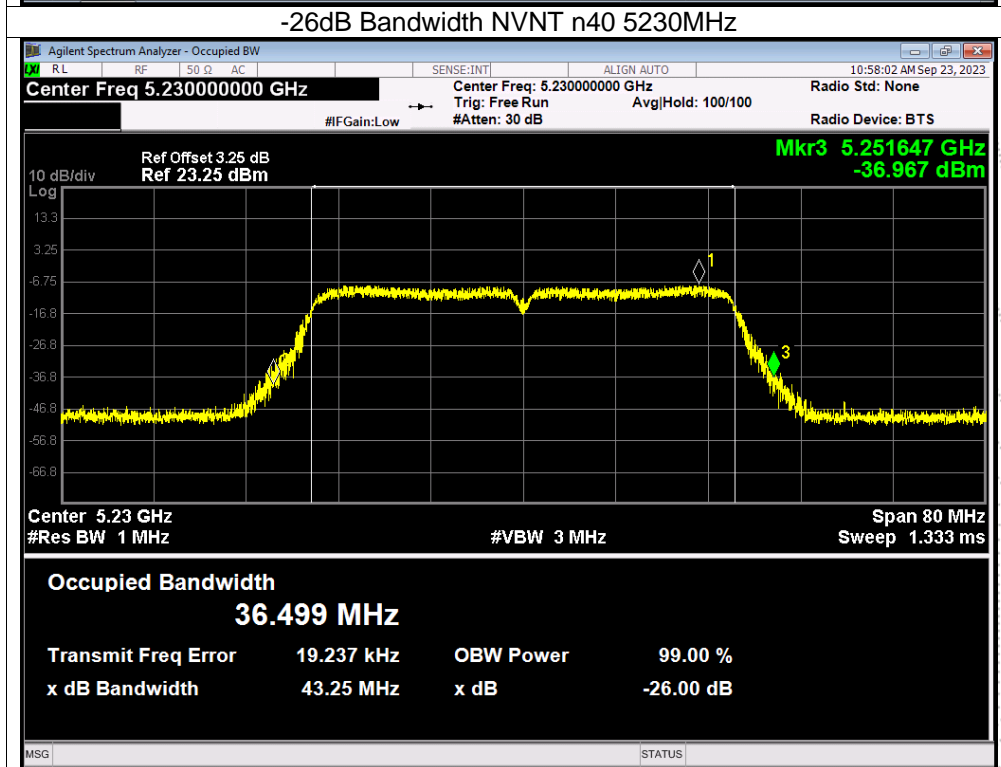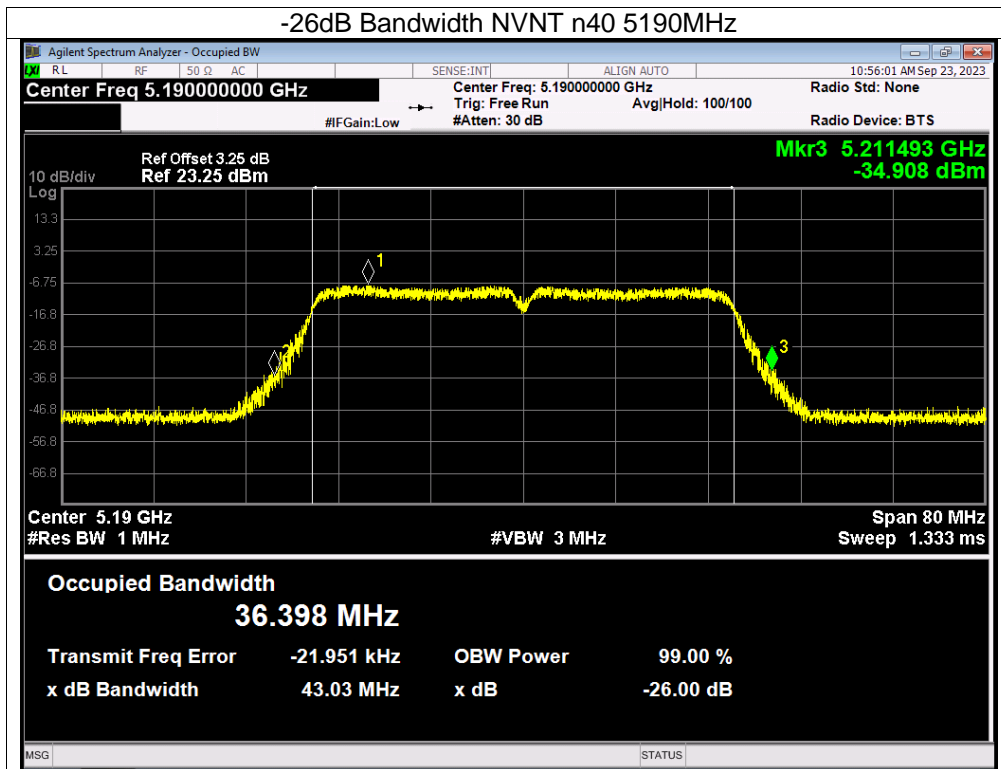

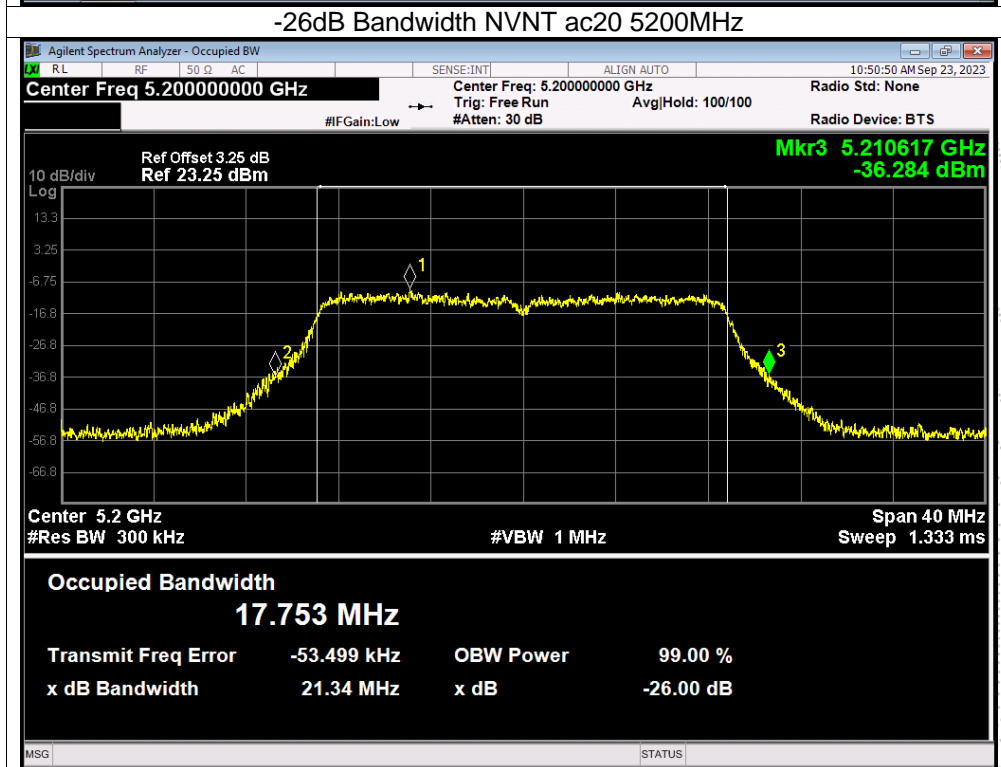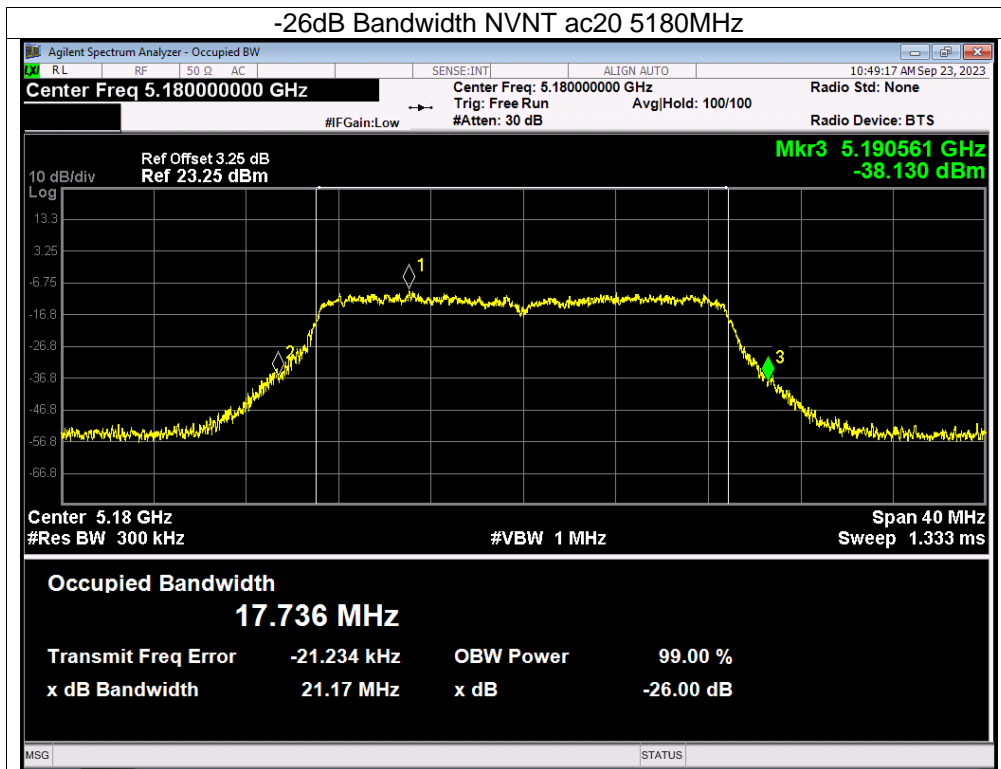




CO. LTD.

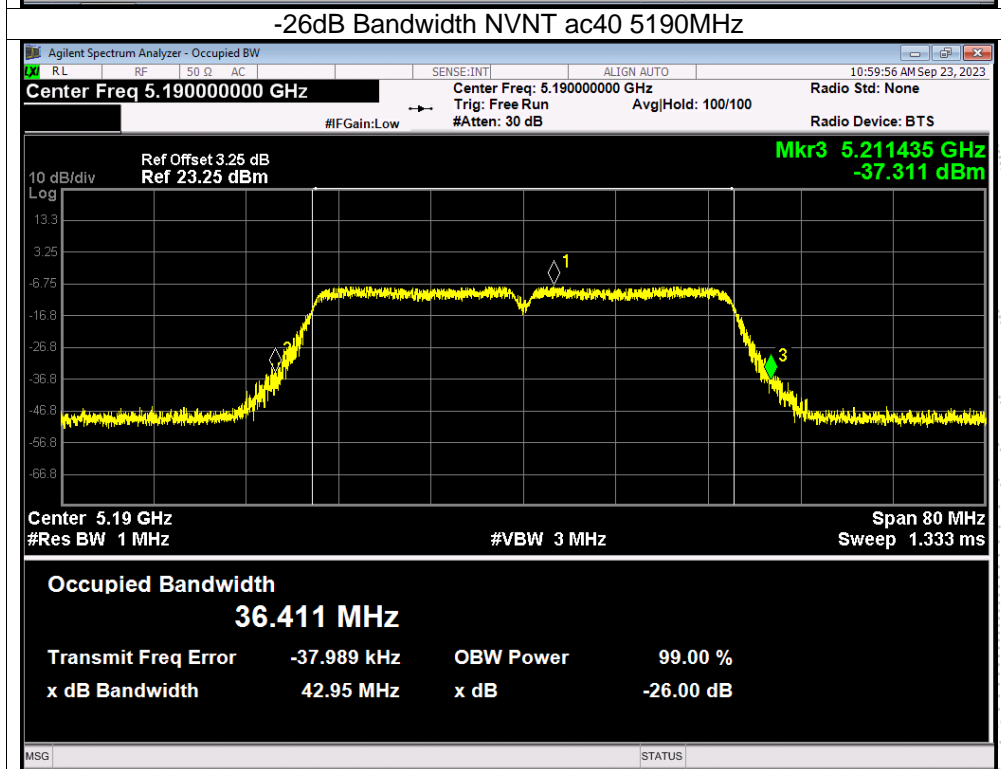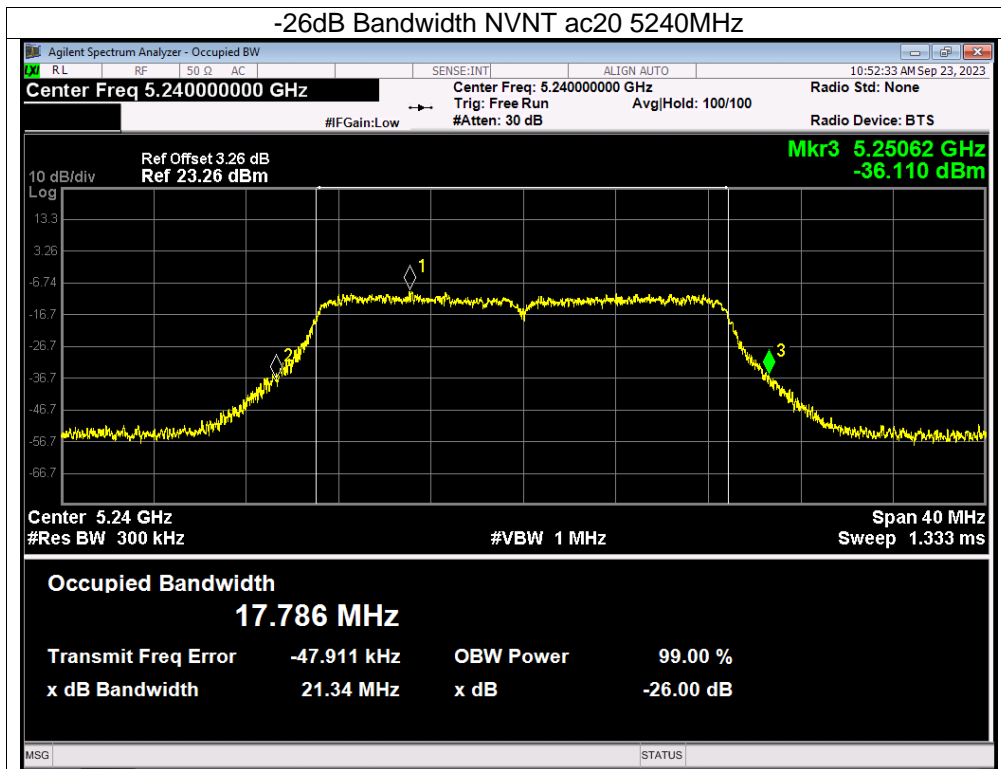

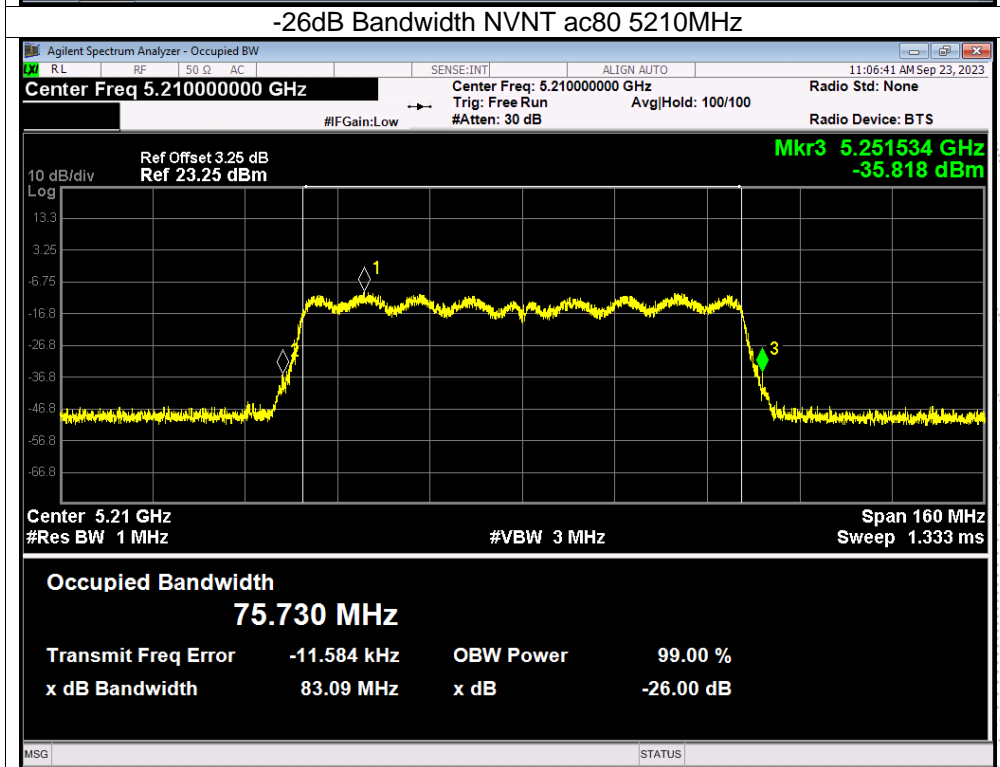
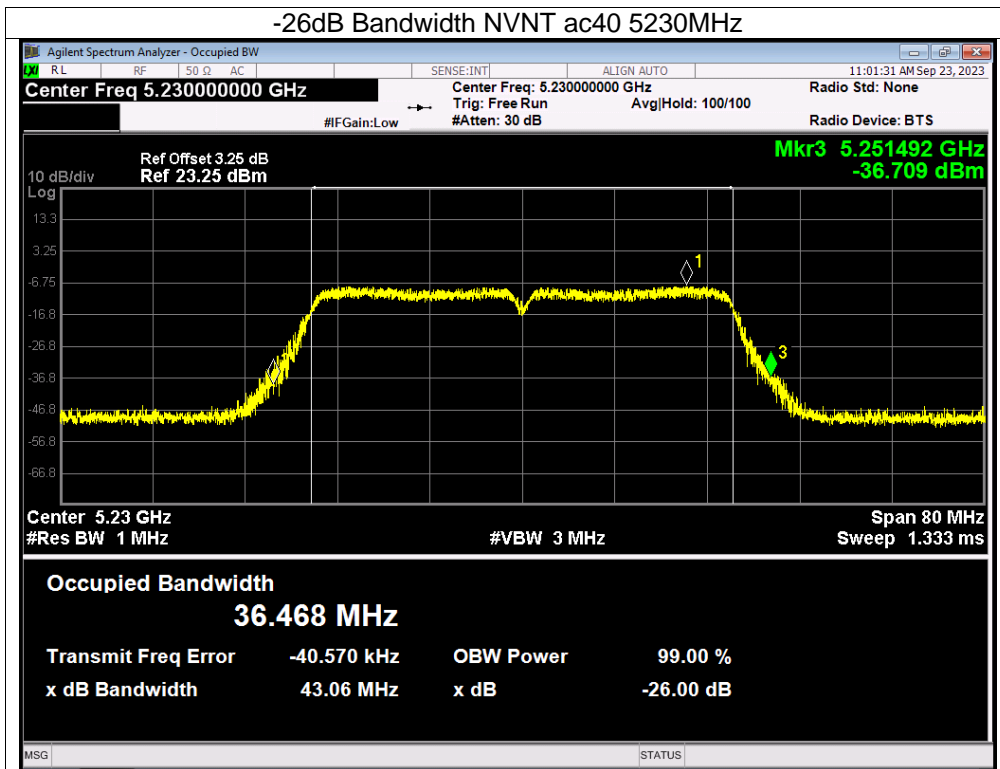




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


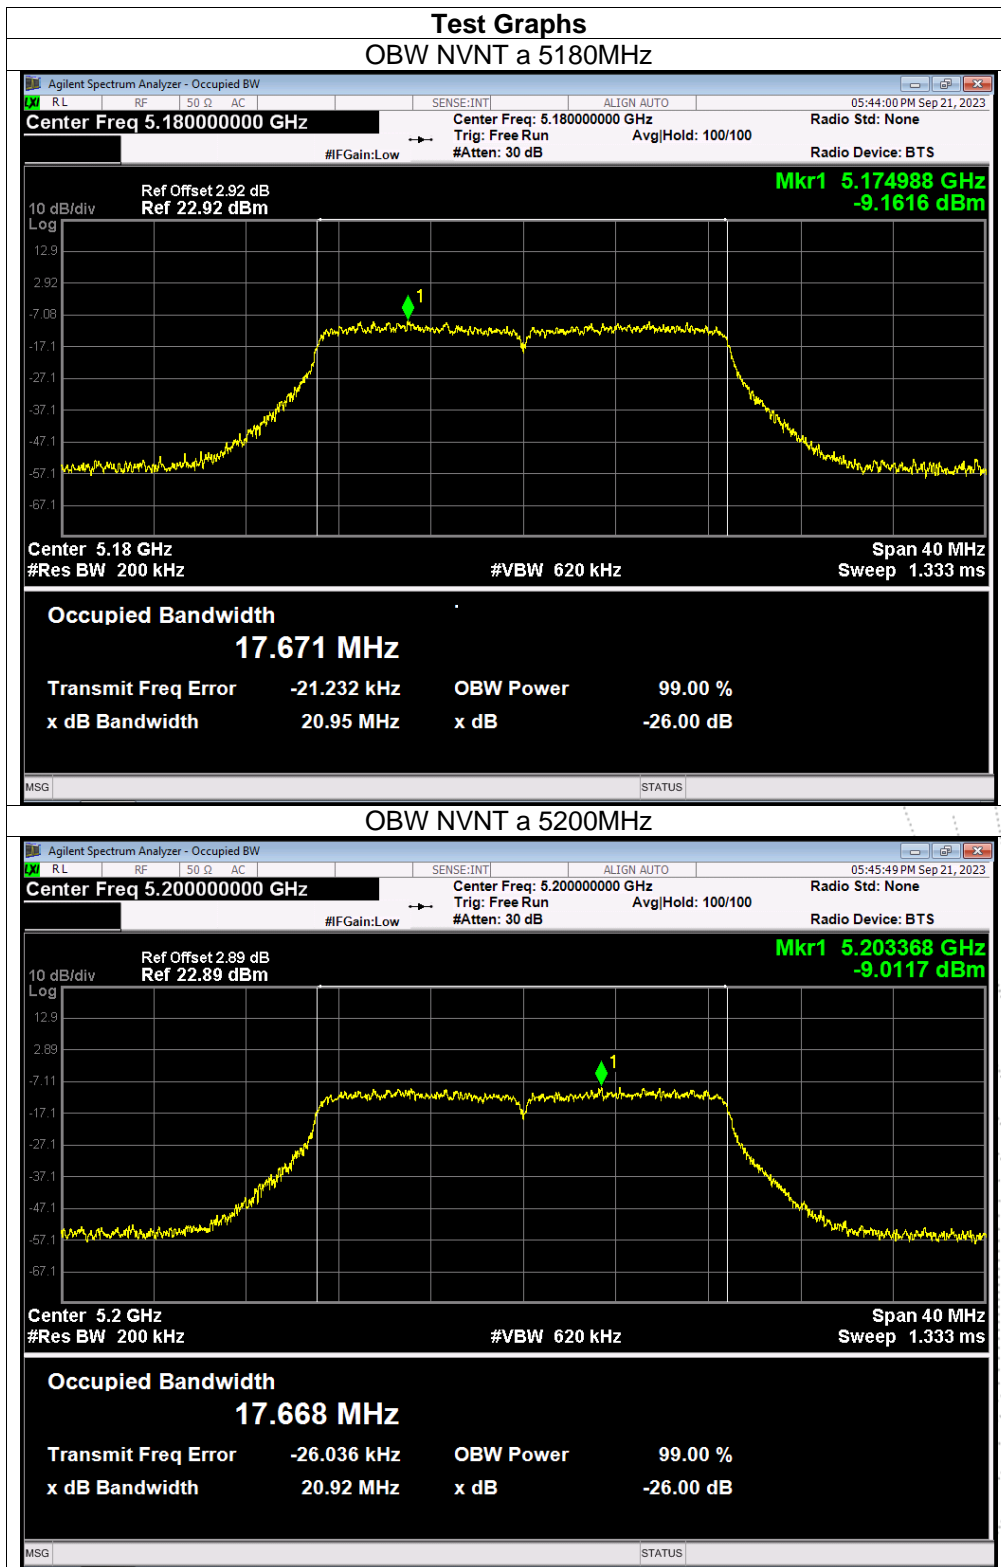


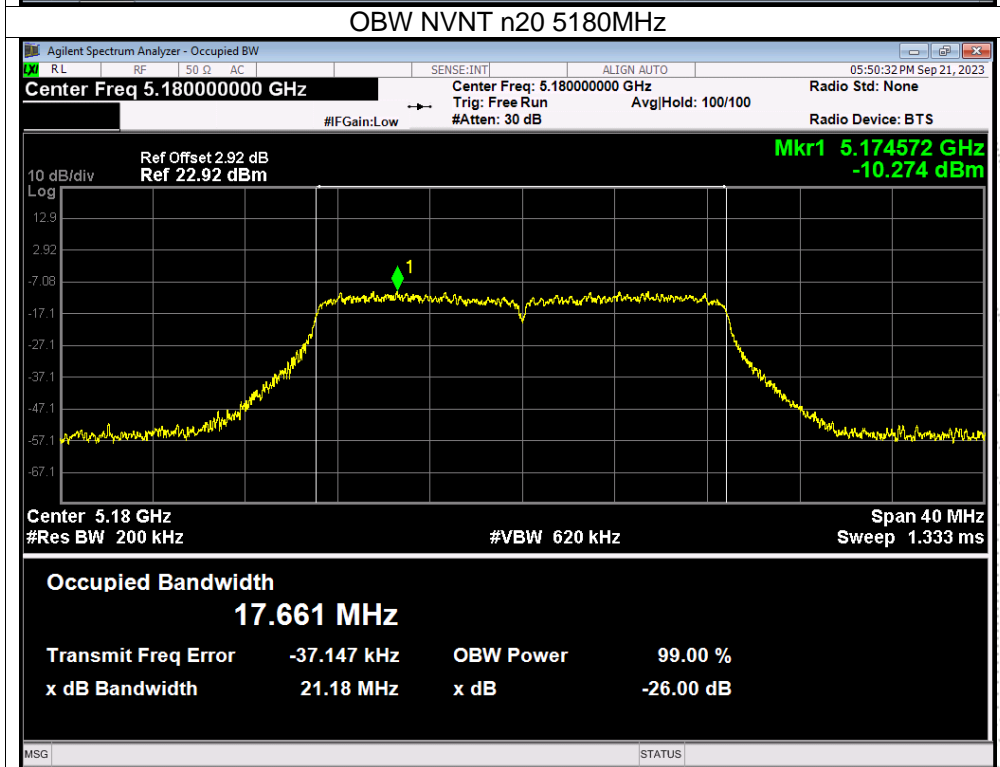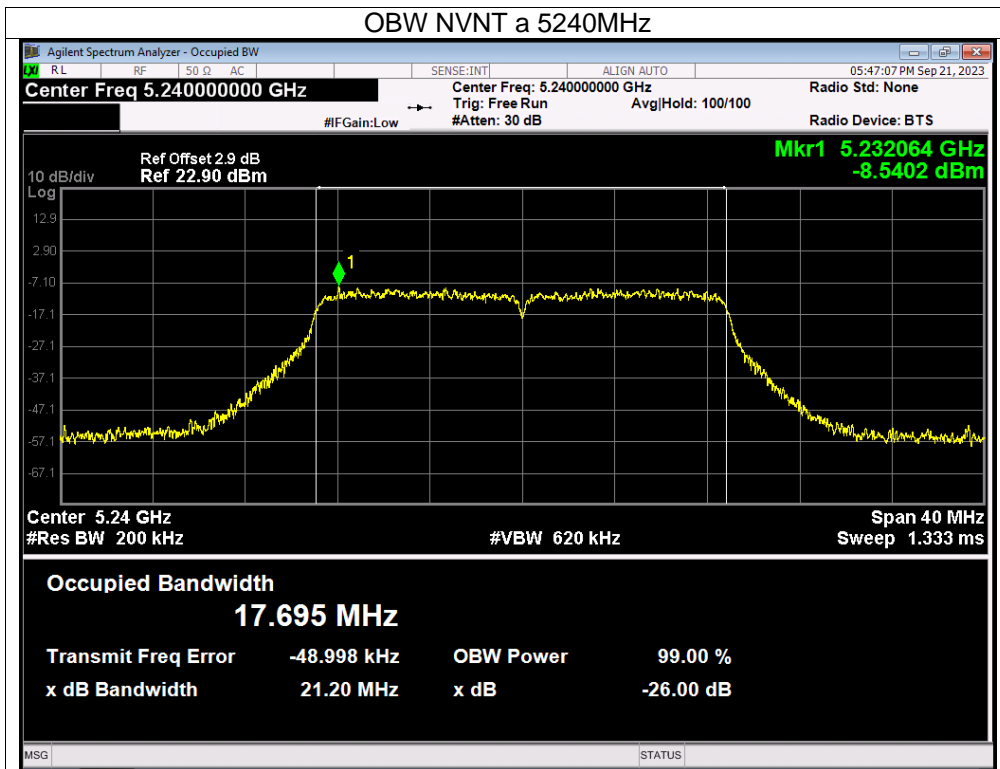



检测
 合格
 日期: 2023.09.21
 地点: 实验室

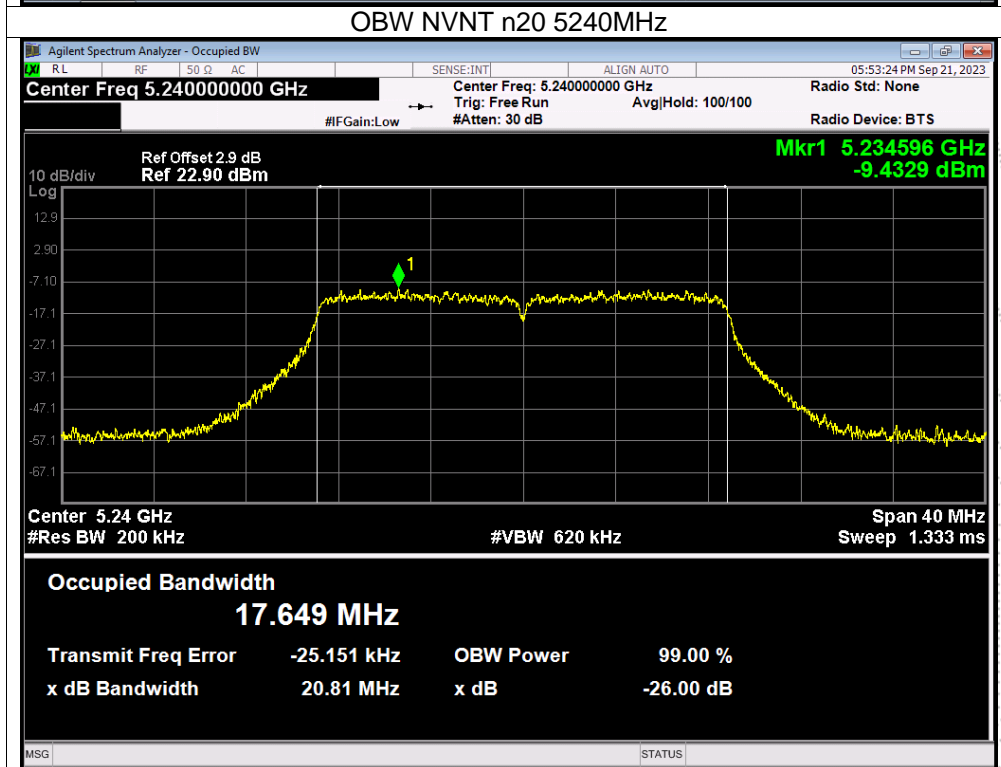
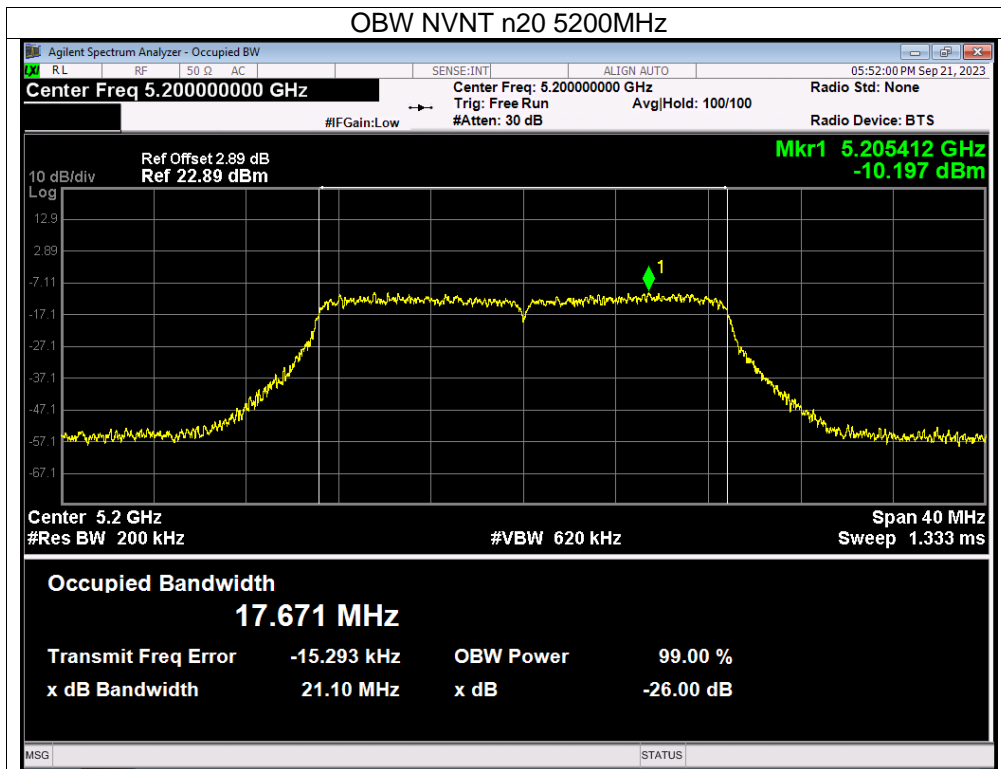


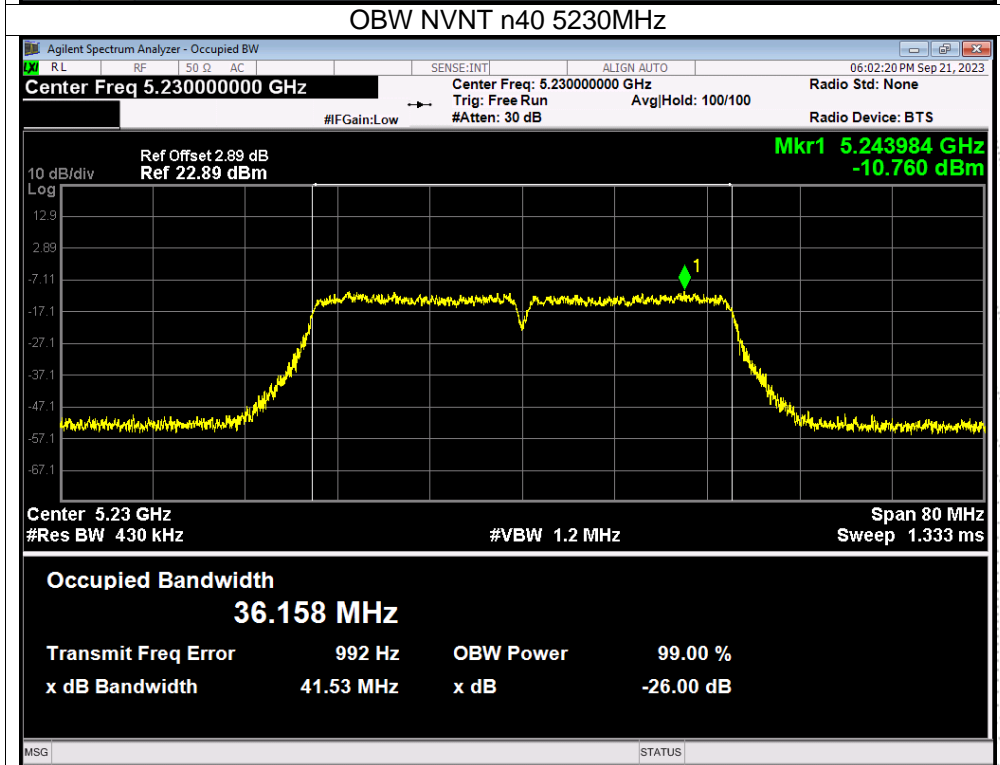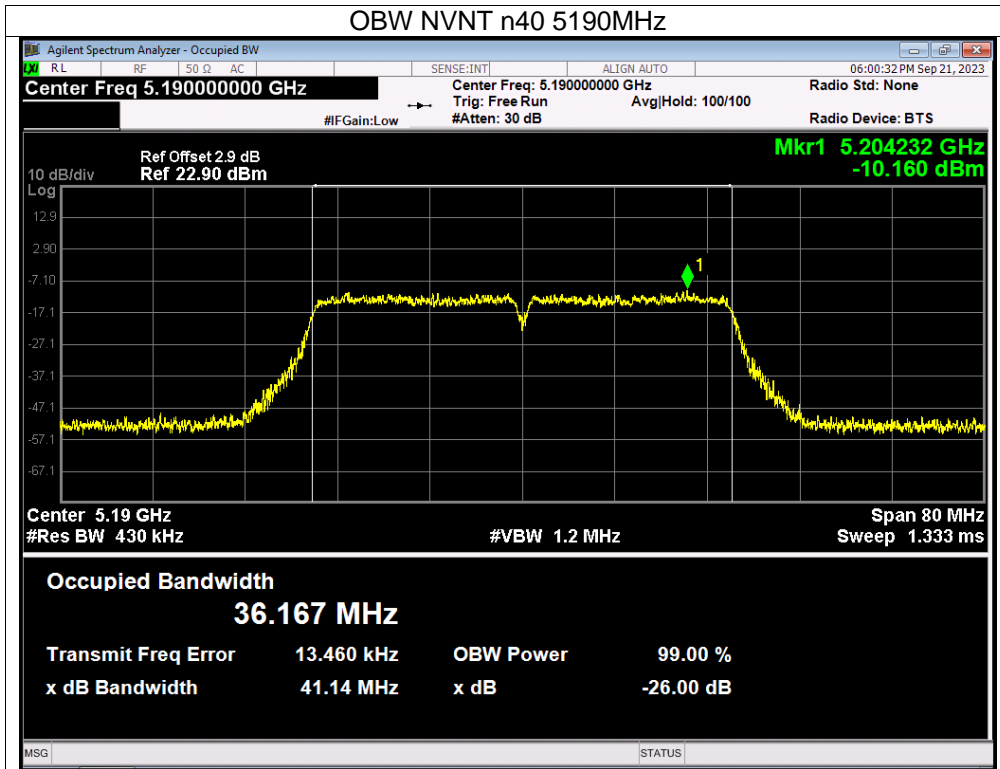

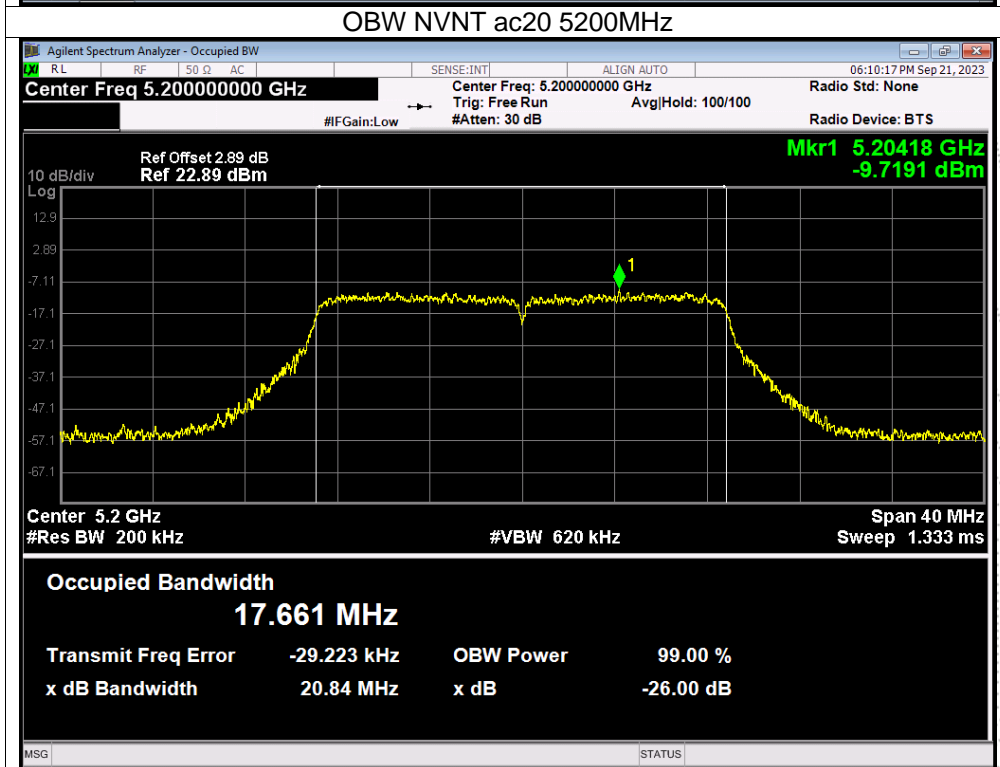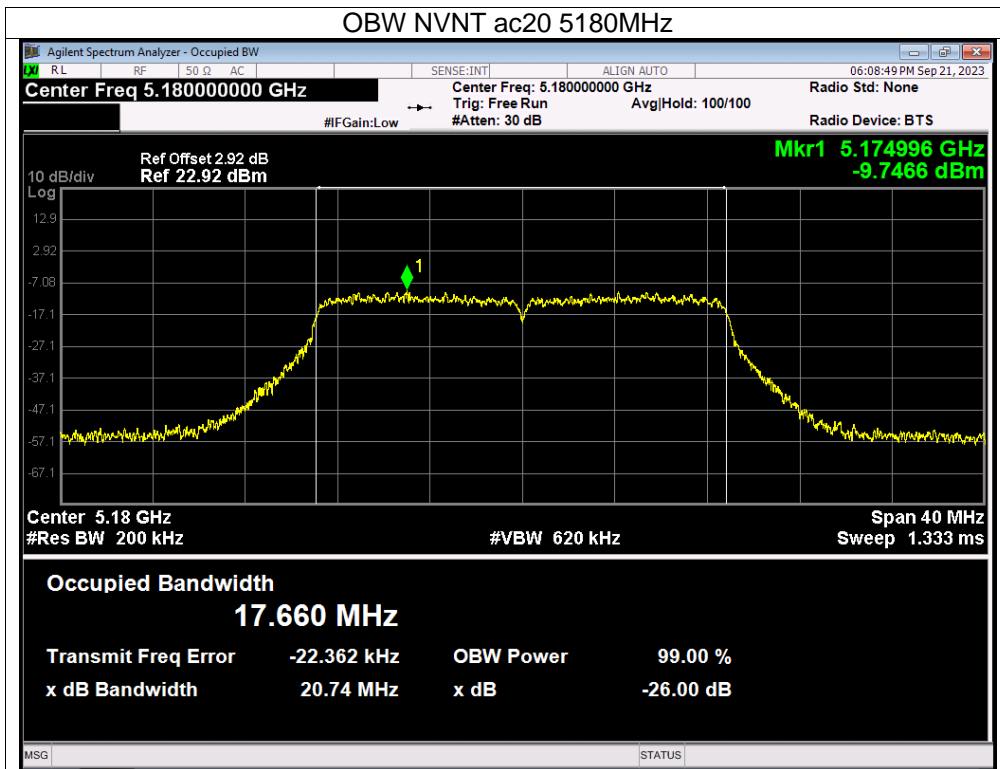

CHENZHEN

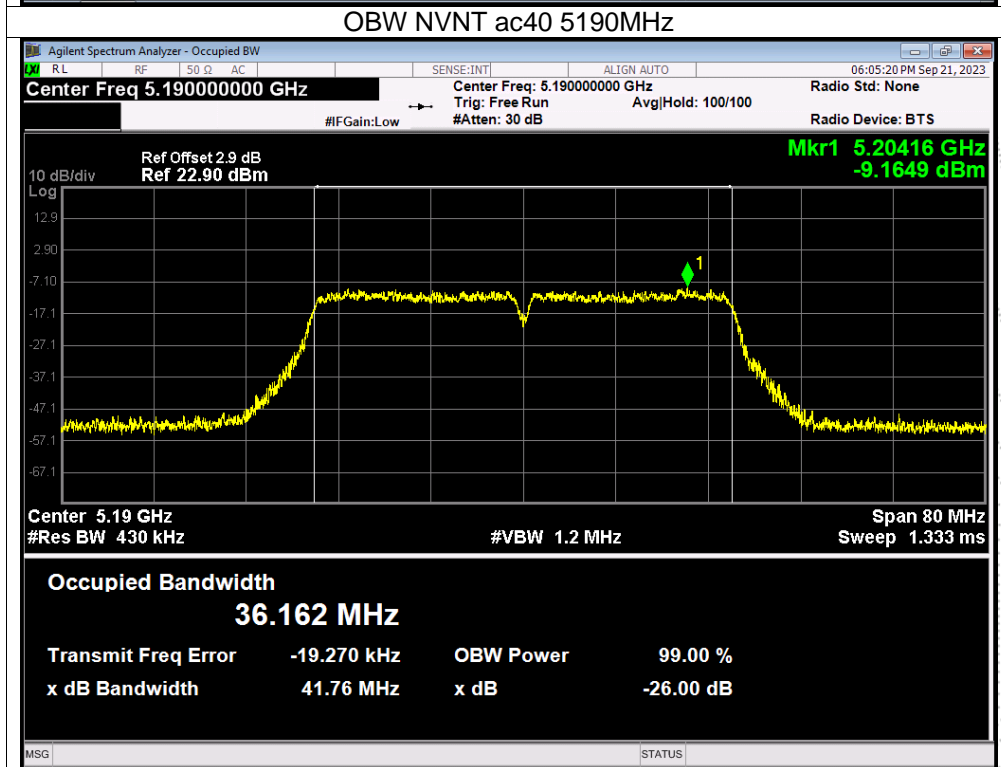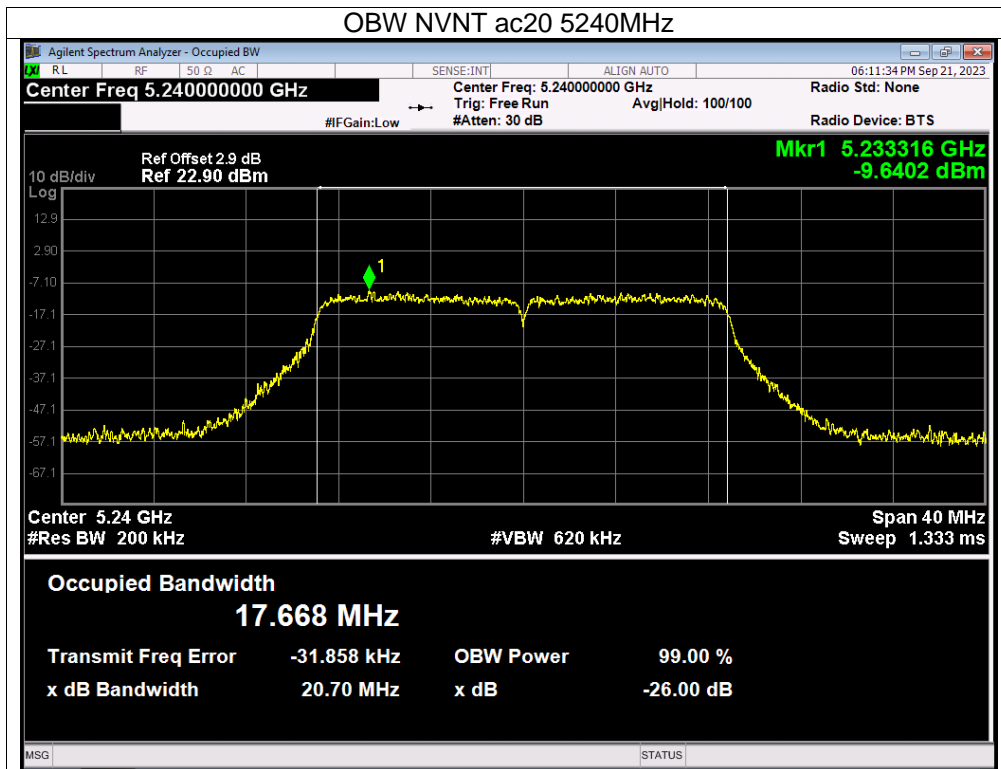

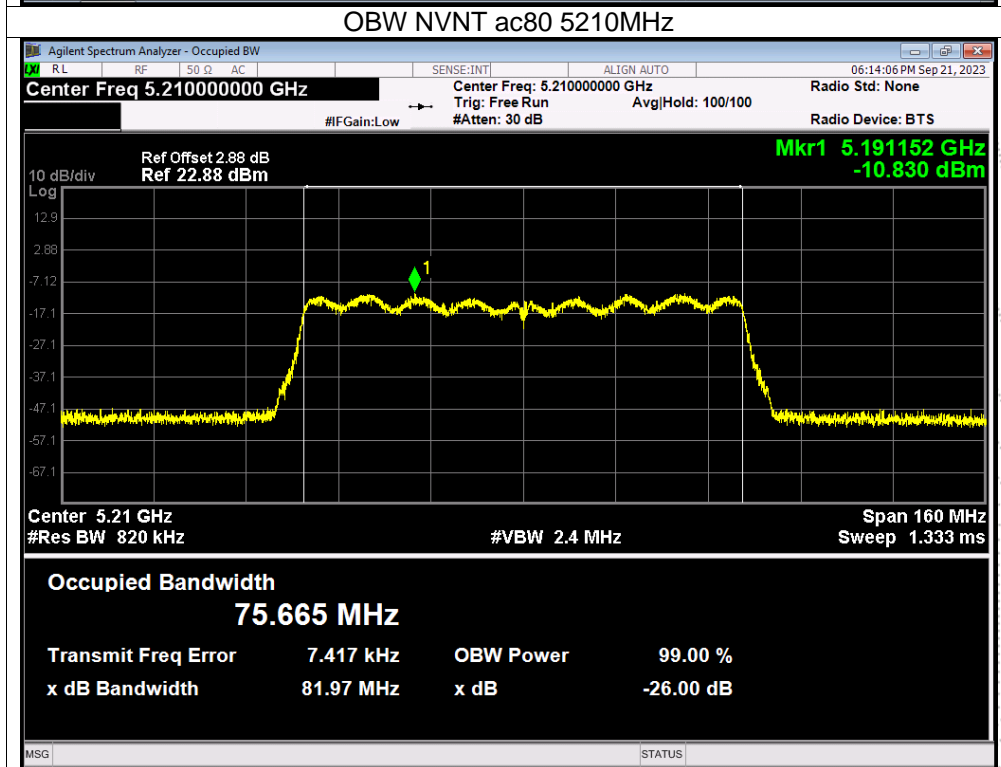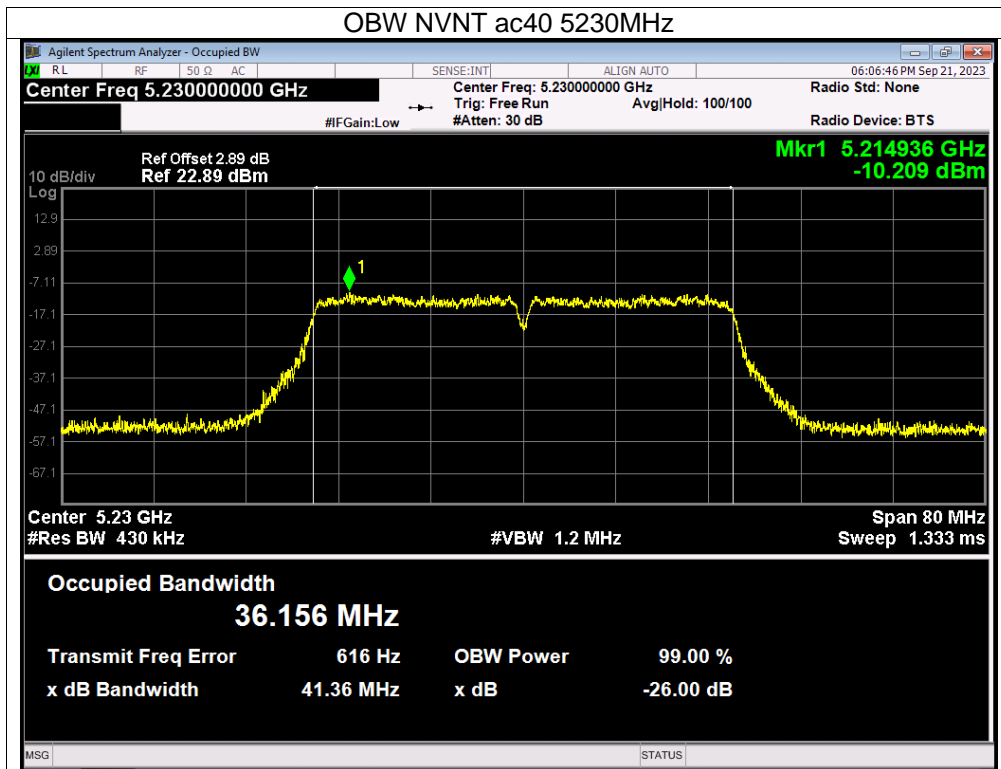

BCTC
 3C
 PPR
 检测


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)		Limit -6 dB Bandwidth (MHz)	Verdict
			Ant A	Ant B		
NVNT	a	5745	16.473	16.532	0.5	Pass
NVNT	a	5785	16.502	16.506	0.5	Pass
NVNT	a	5825	16.536	16.55	0.5	Pass
NVNT	n20	5745	17.617	17.642	0.5	Pass
NVNT	n20	5785	17.623	17.655	0.5	Pass
NVNT	n20	5825	17.771	17.676	0.5	Pass
NVNT	n40	5755	36.431	36.409	0.5	Pass
NVNT	n40	5795	36.408	36.414	0.5	Pass
NVNT	ac20	5745	17.685	17.66	0.5	Pass
NVNT	ac20	5785	17.65	17.622	0.5	Pass
NVNT	ac20	5825	17.685	17.622	0.5	Pass
NVNT	ac40	5755	36.446	36.388	0.5	Pass
NVNT	ac40	5795	36.419	36.411	0.5	Pass
NVNT	ac80	5775	76.355	76.353	0.5	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)	
			Ant A	Ant B
NVNT	a	5745	16.522	16.533
NVNT	a	5785	16.51	16.481
NVNT	a	5825	16.54	16.54
NVNT	n20	5745	17.639	17.639
NVNT	n20	5785	17.662	17.669
NVNT	n20	5825	17.688	17.656
NVNT	n40	5755	36.17	36.18
NVNT	n40	5795	36.15	36.146
NVNT	ac20	5745	17.66	17.662
NVNT	ac20	5785	17.647	17.645
NVNT	ac20	5825	17.695	17.693
NVNT	ac40	5755	36.158	36.166
NVNT	ac40	5795	36.129	36.144
NVNT	ac80	5775	75.553	75.618



TEST
 TO
 OVER
 検査



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.

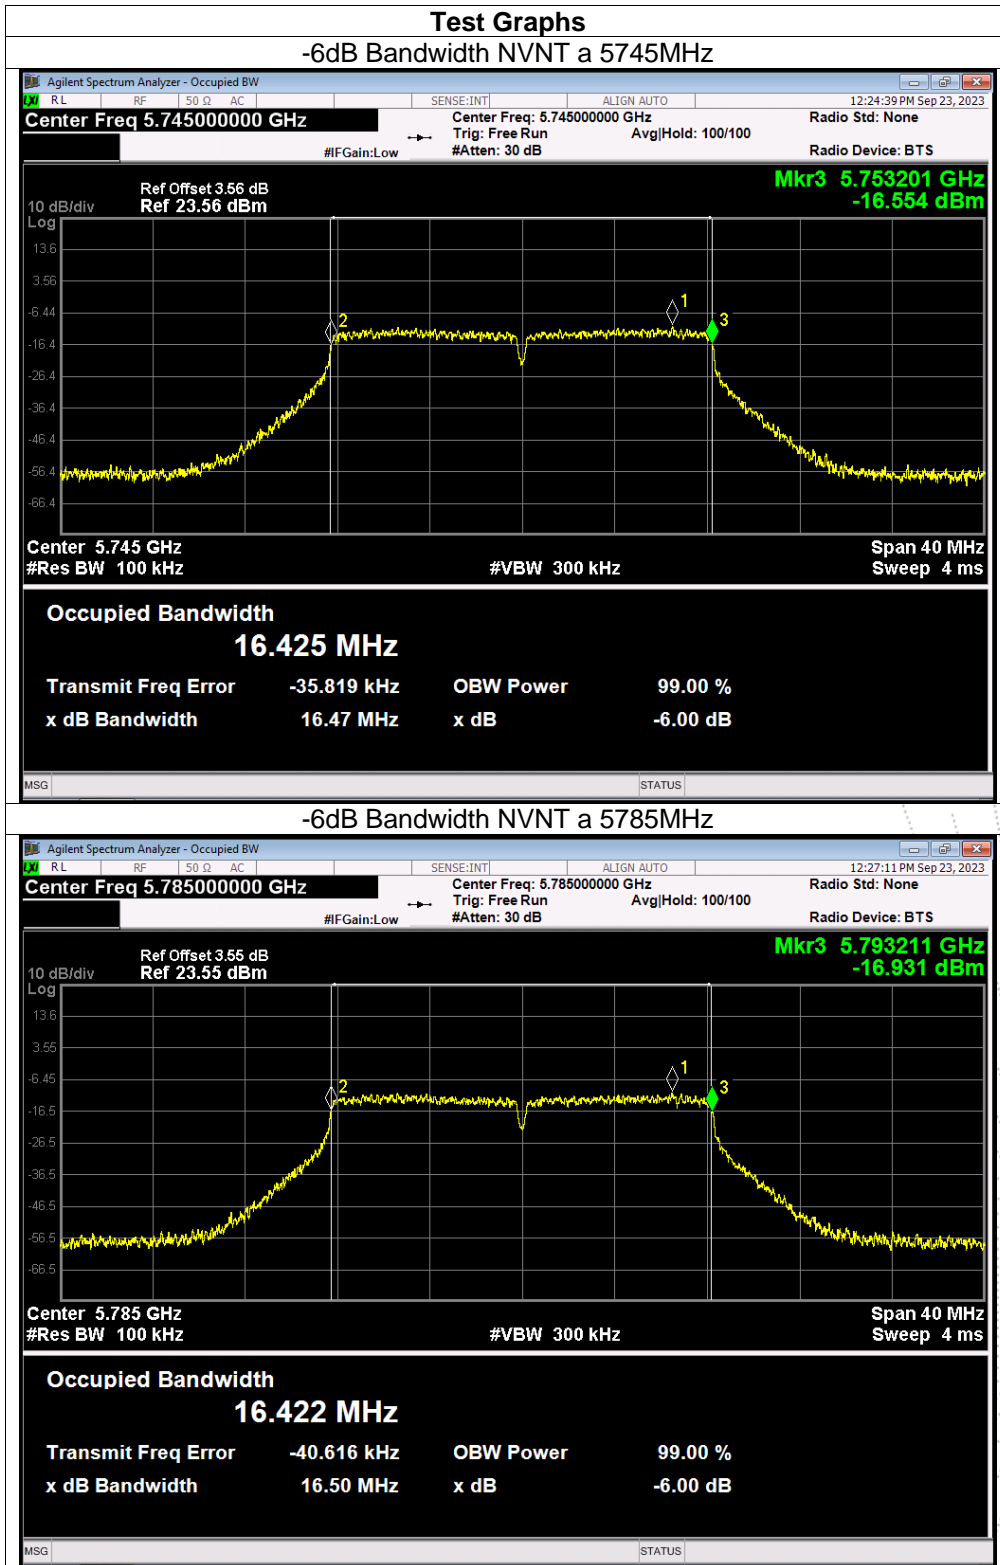

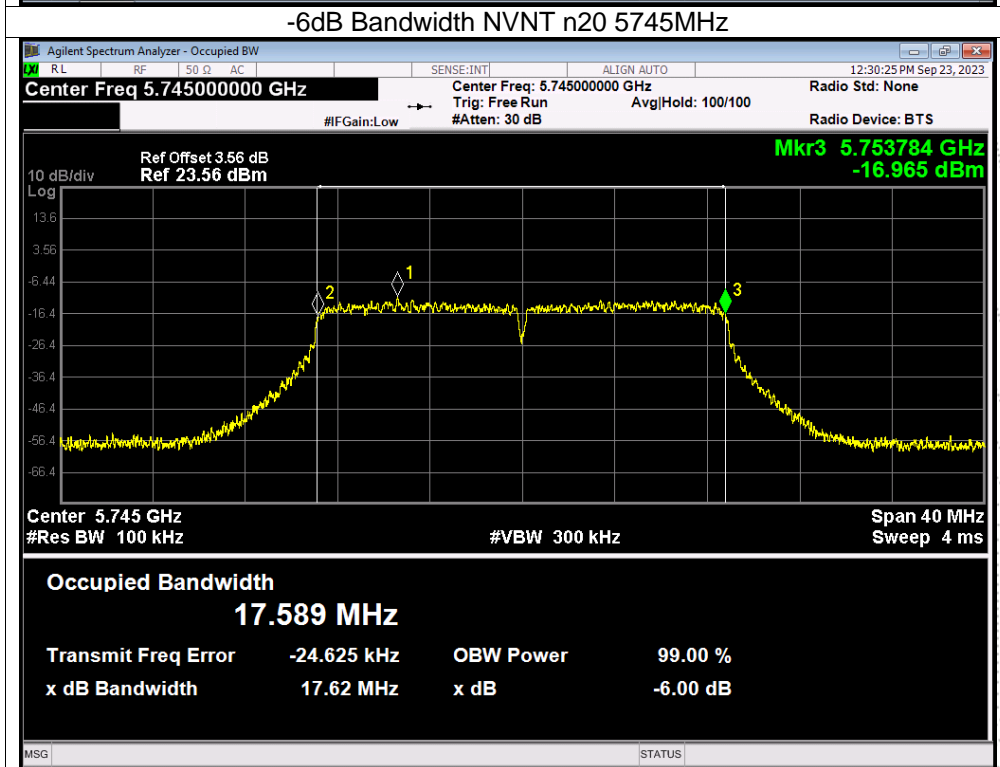
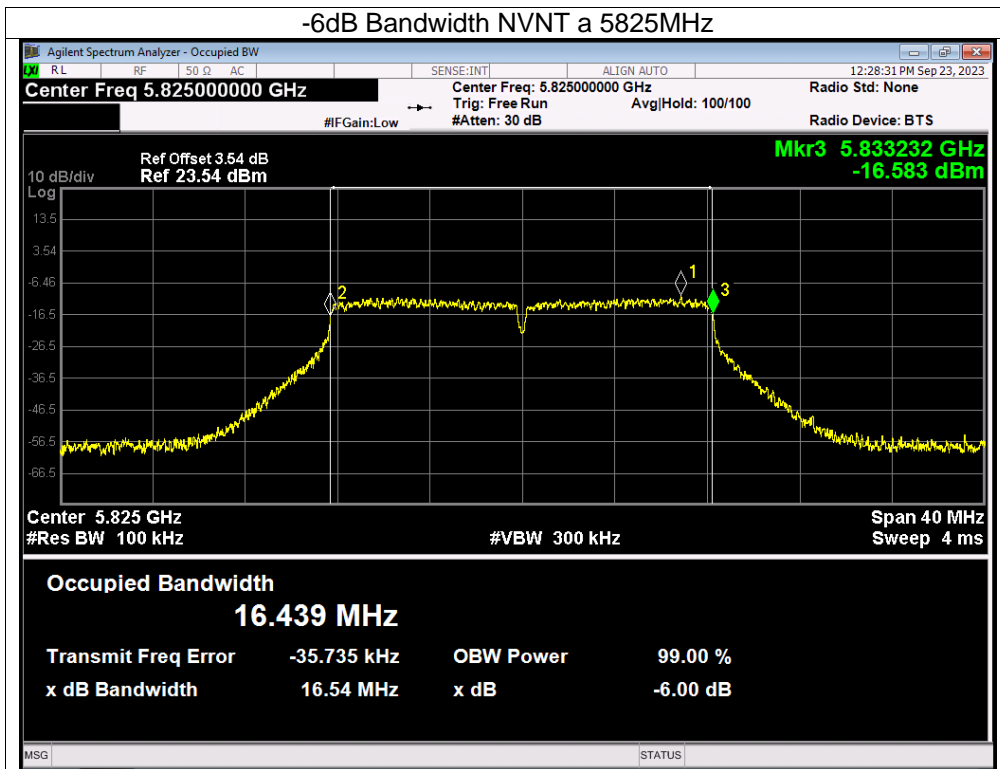


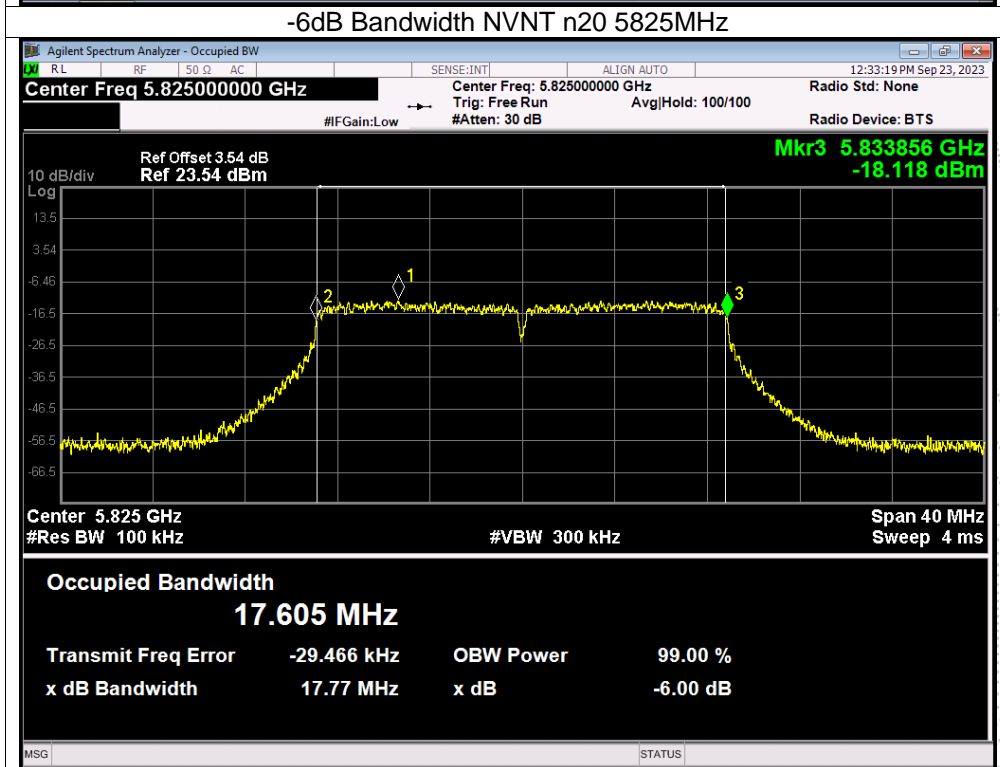
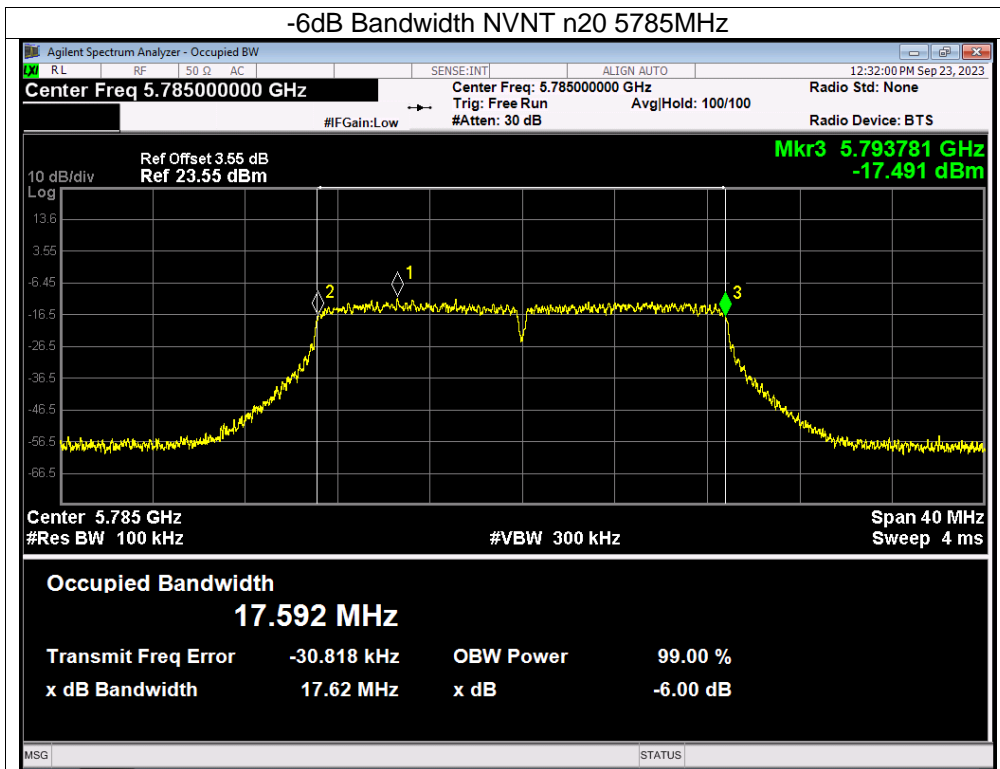


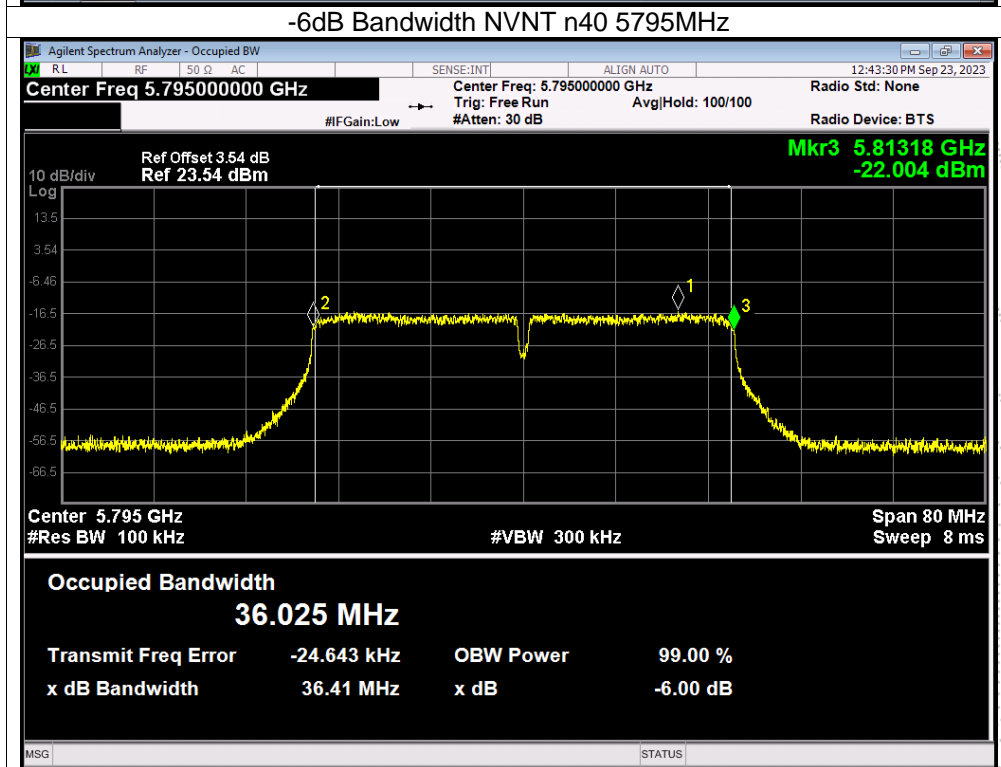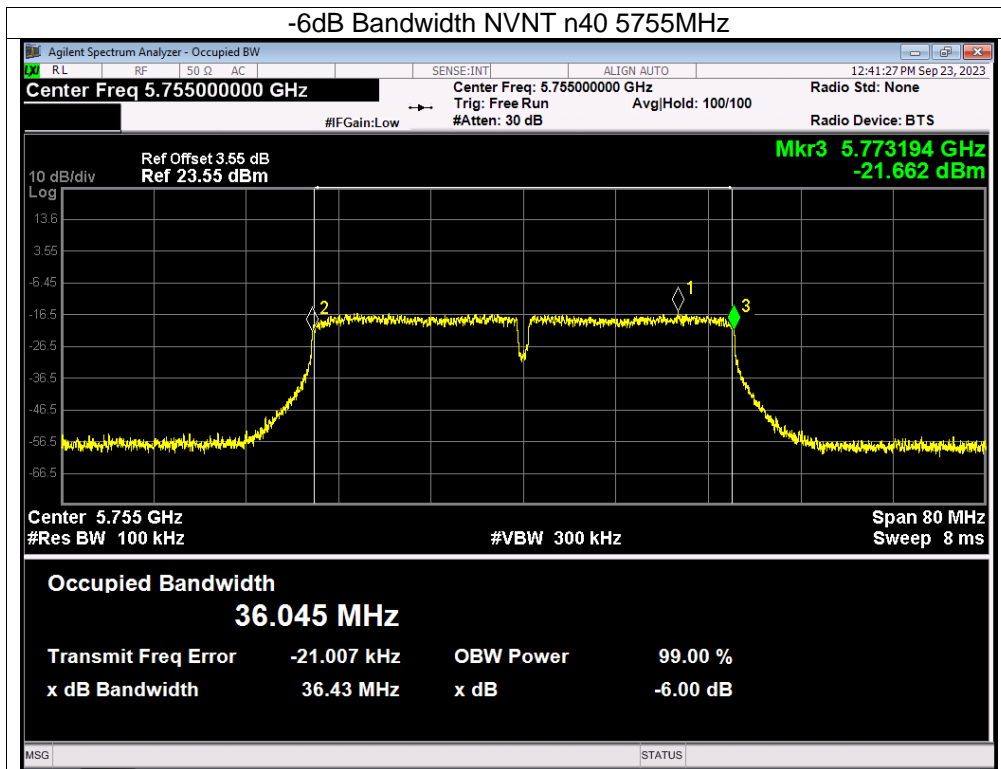

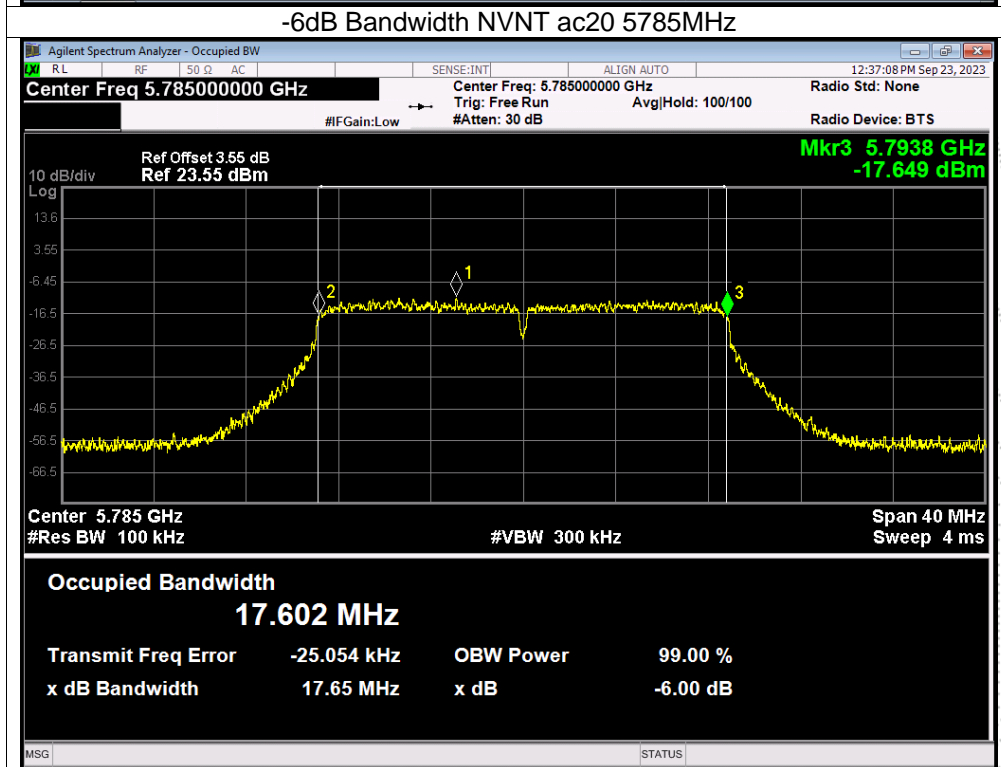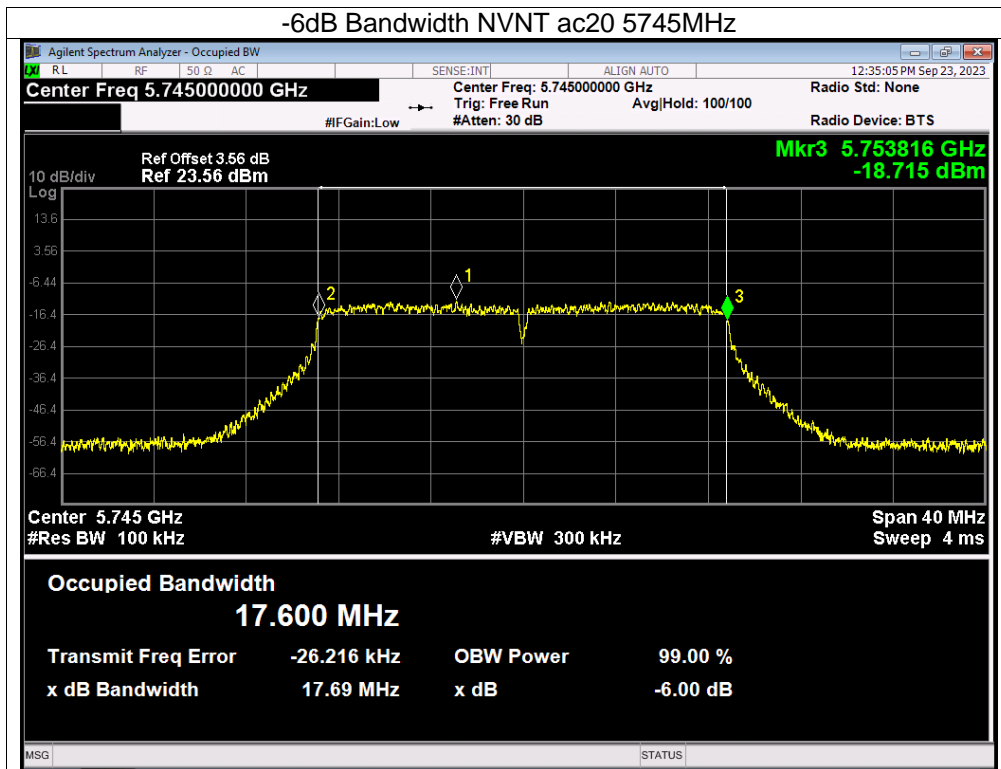




BCTC
 3C
 PPR
 检测

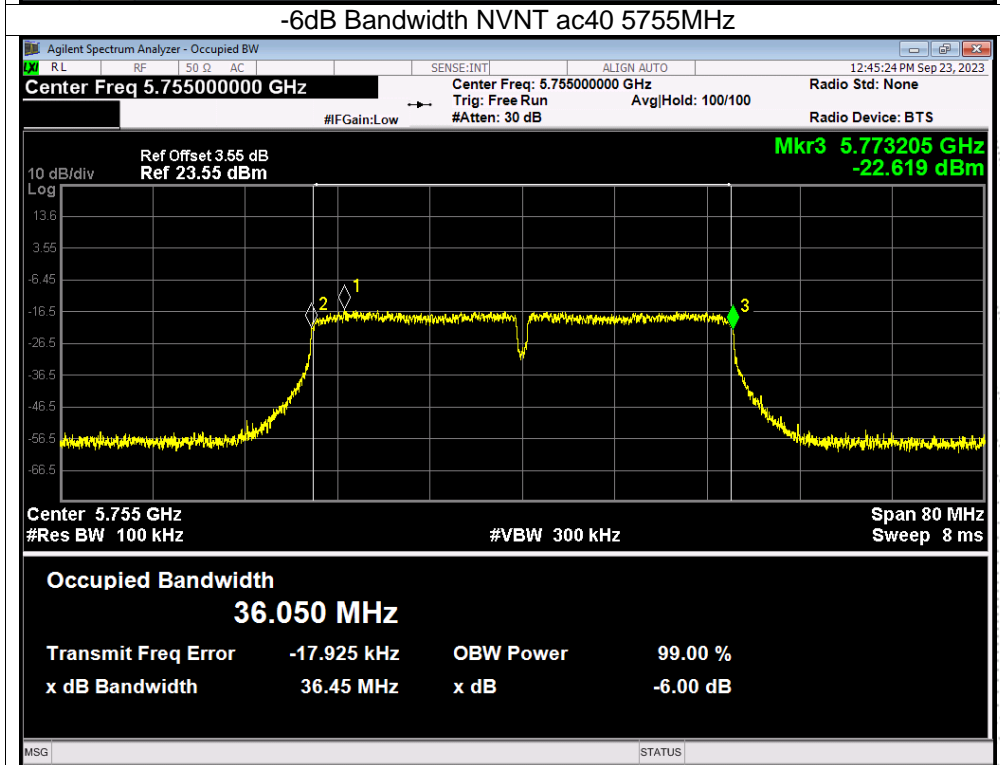
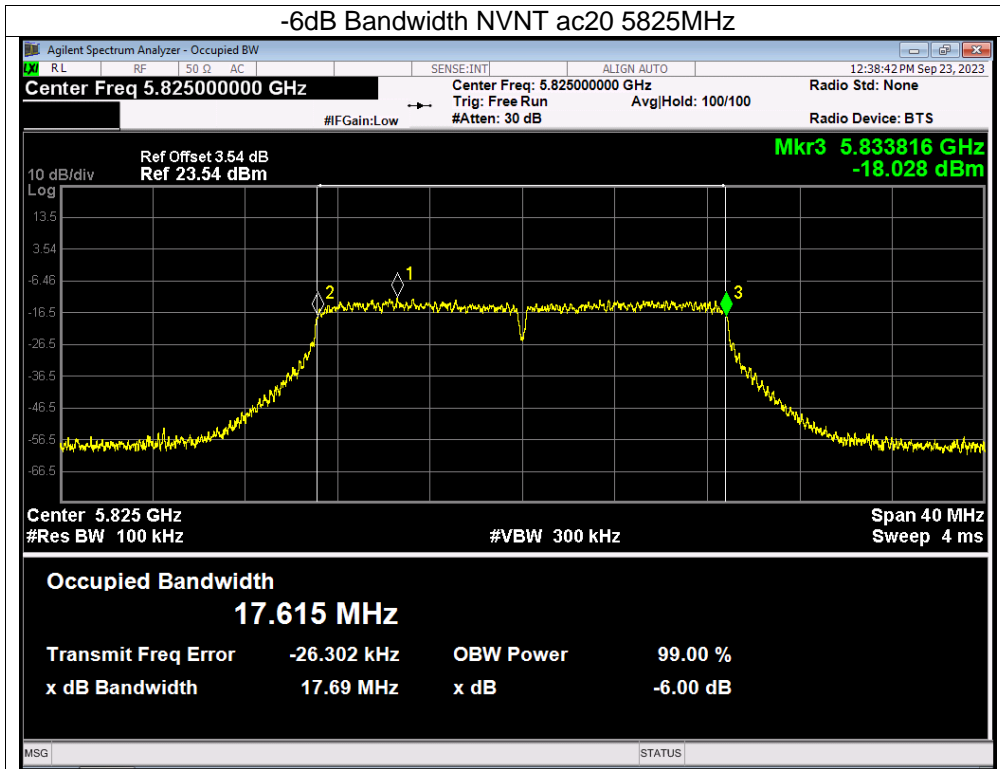


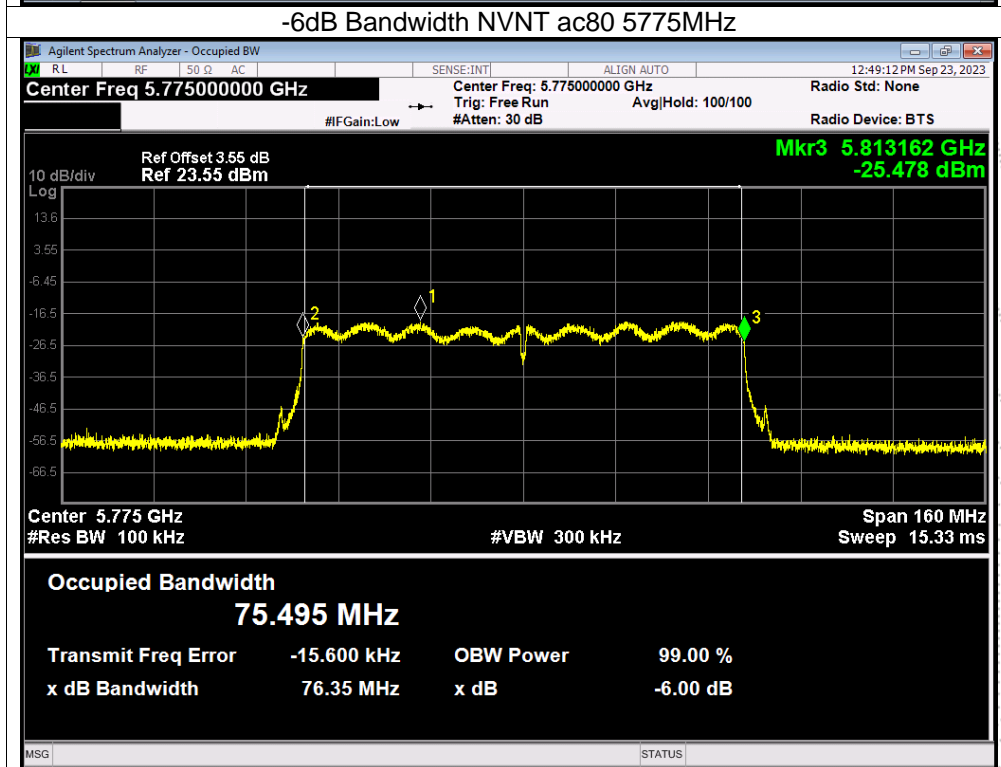
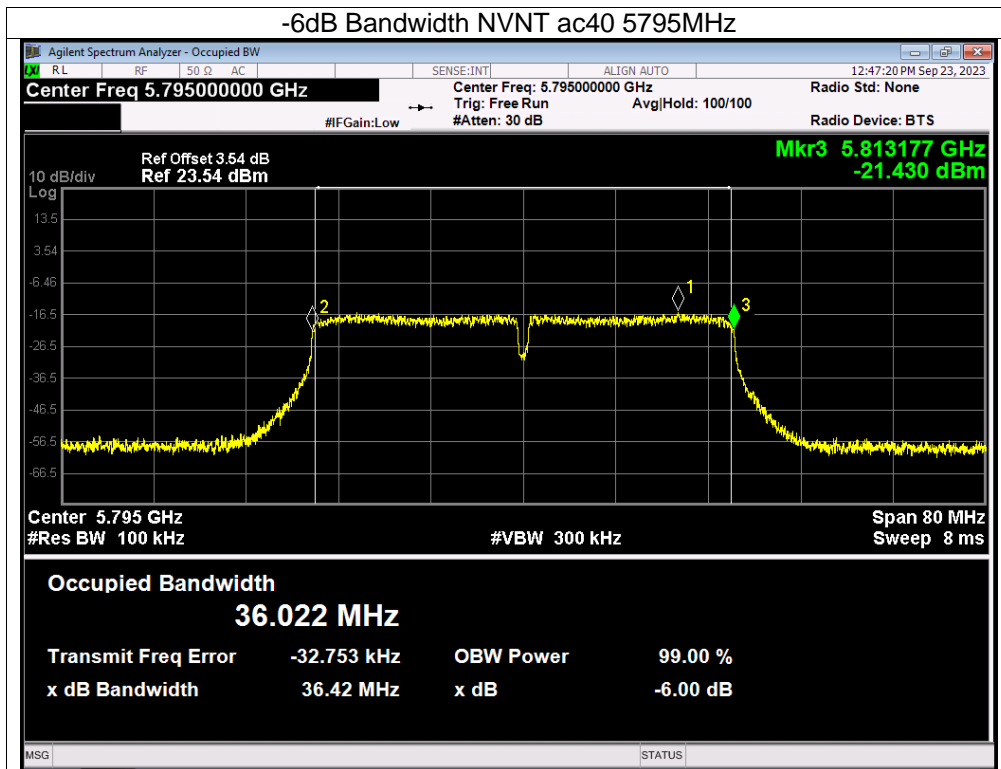




Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.


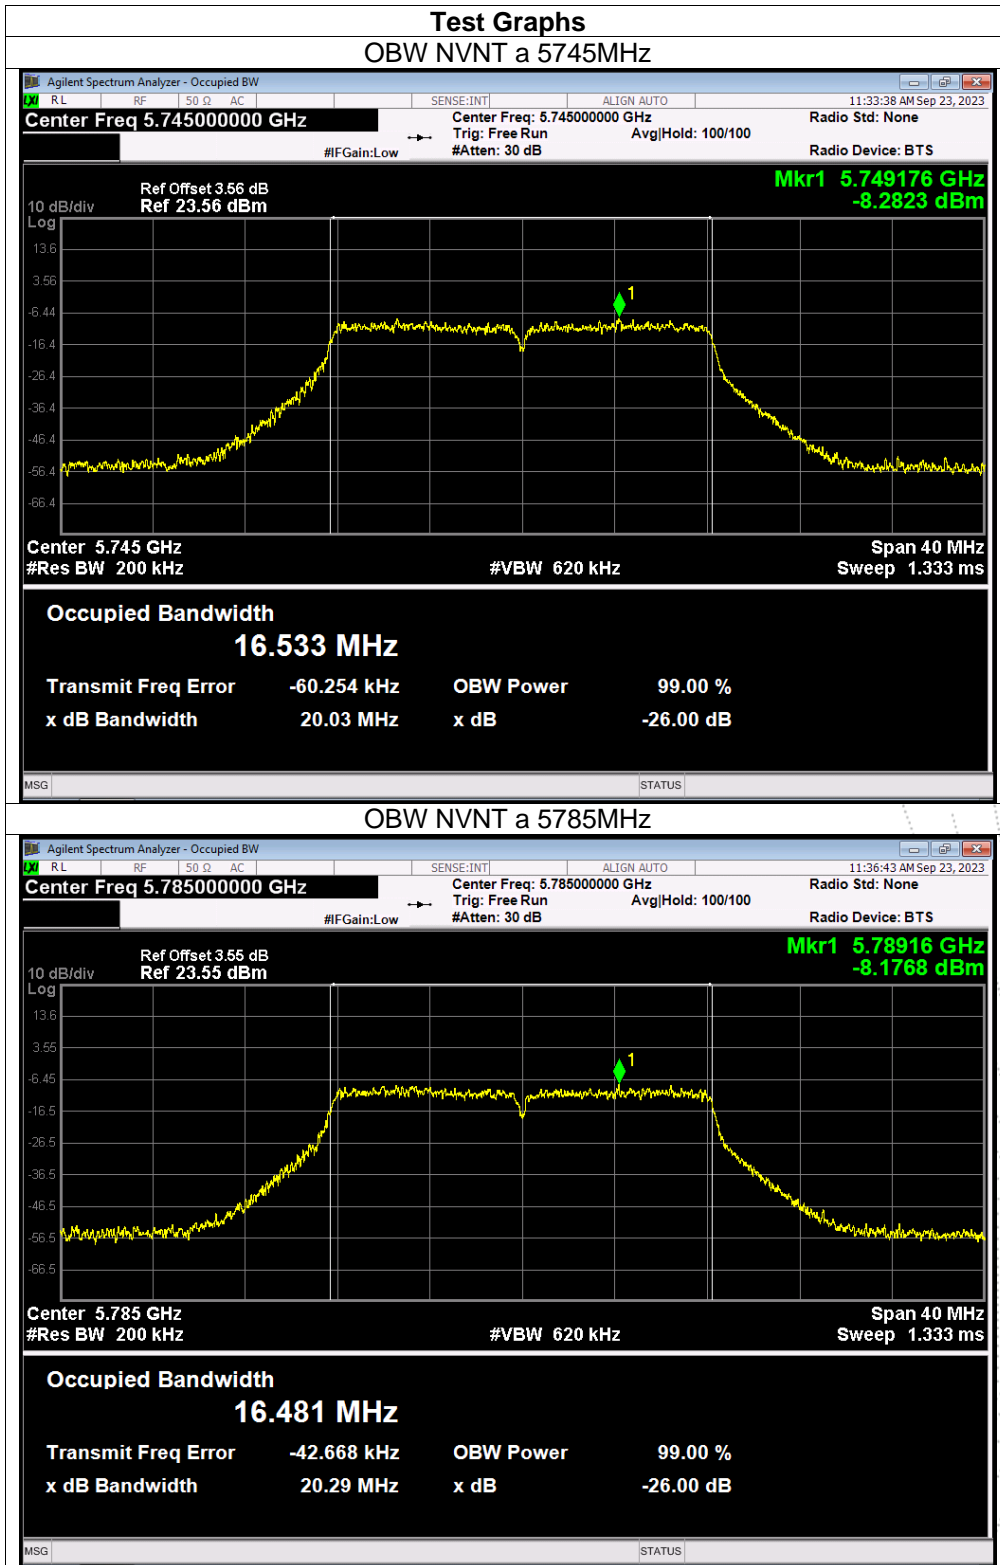


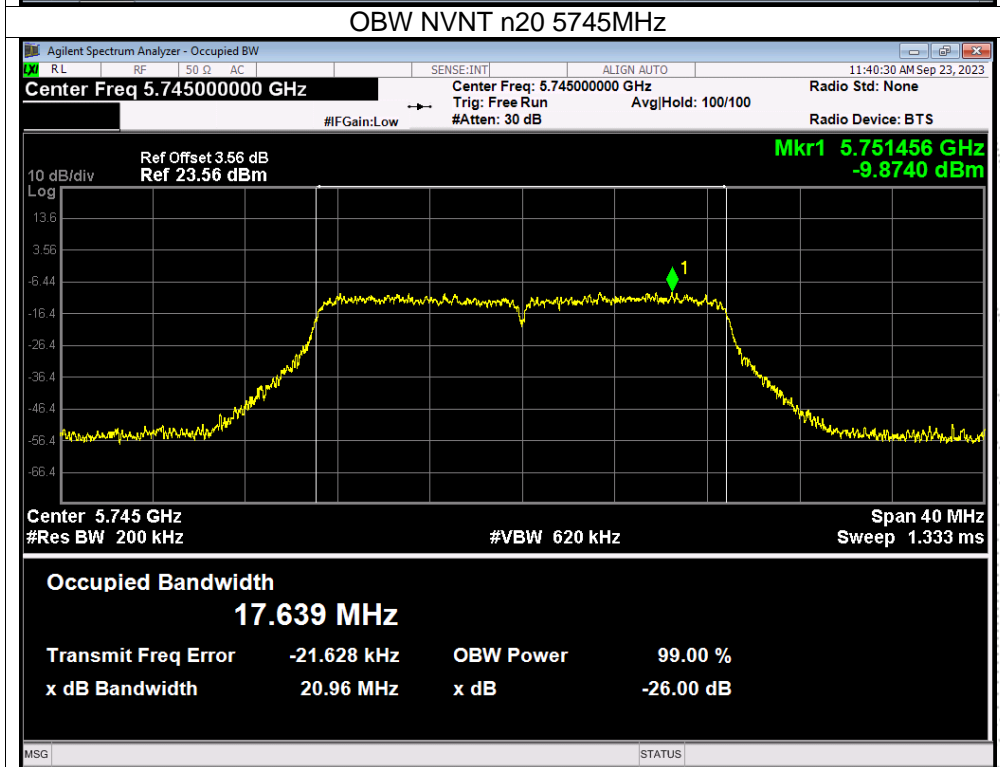
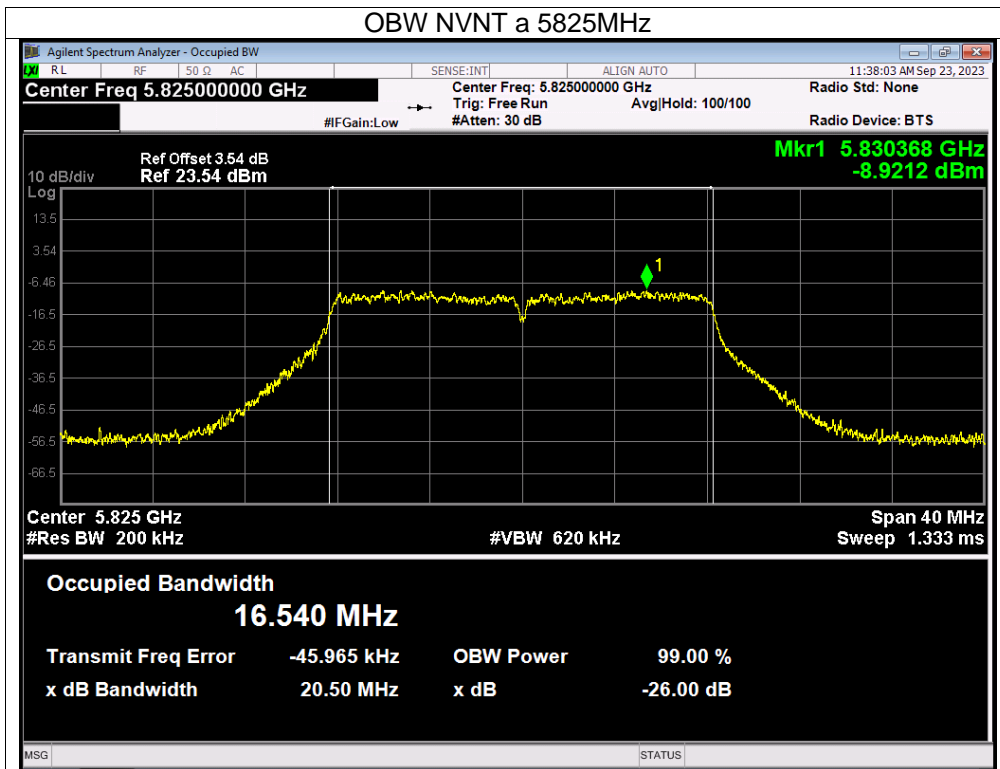


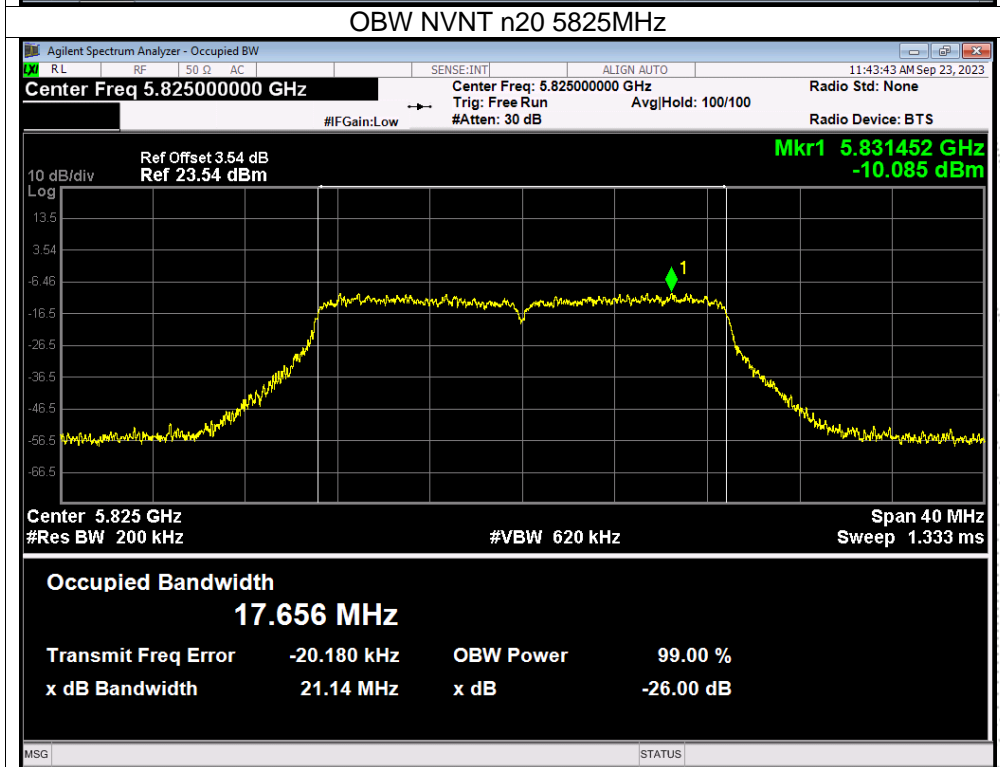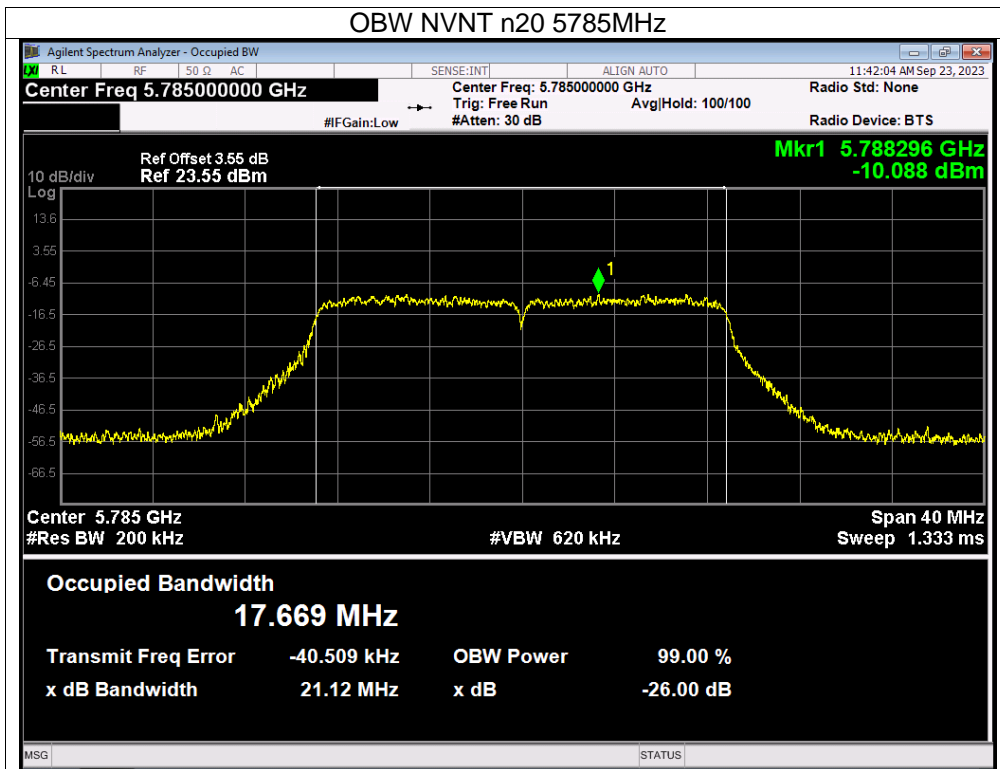

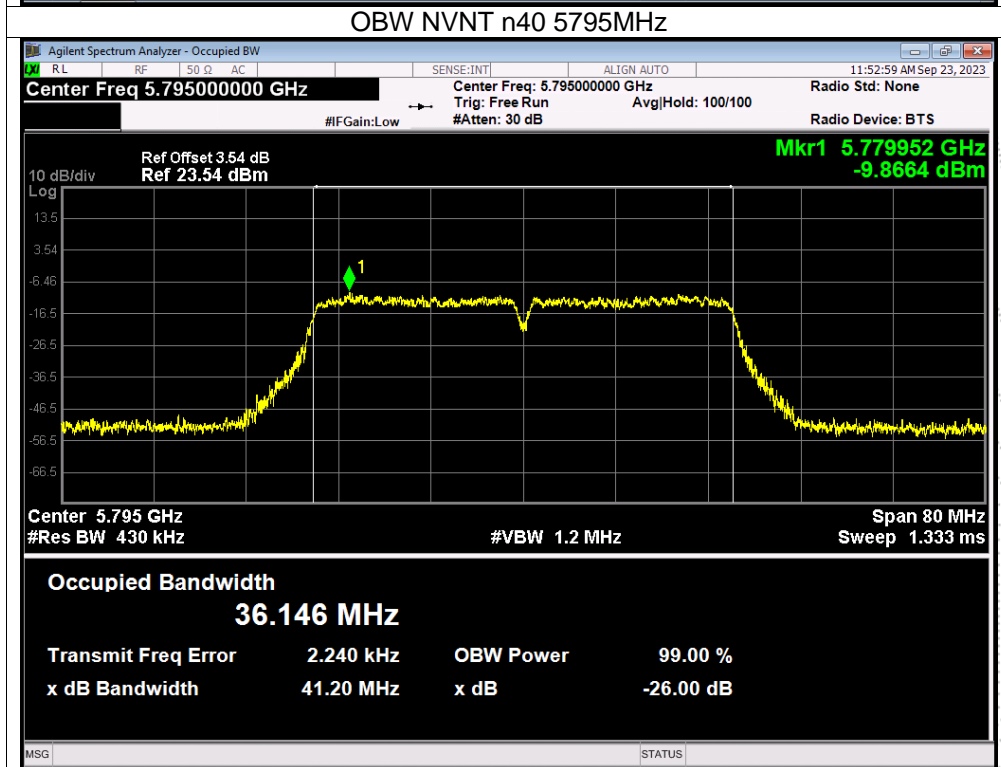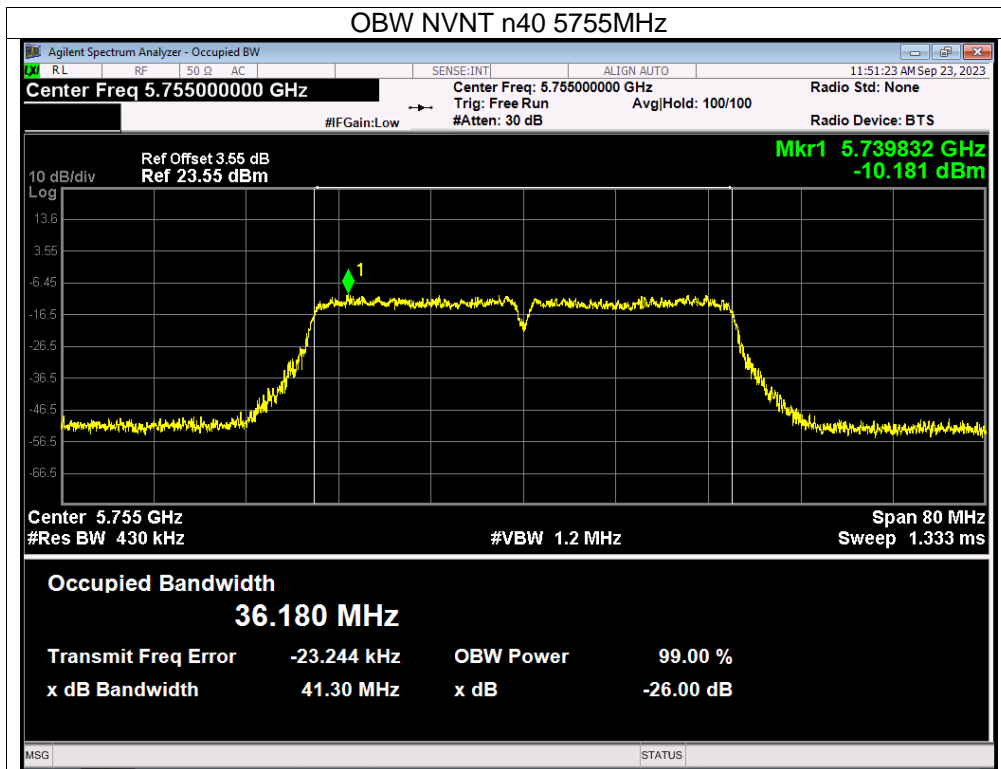

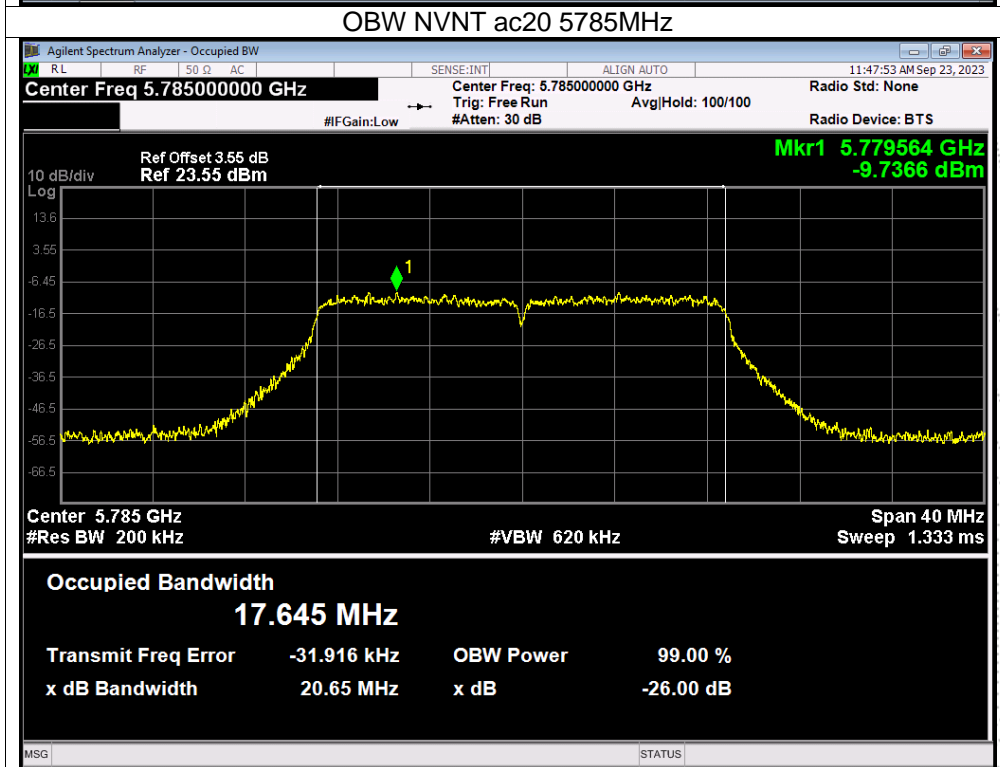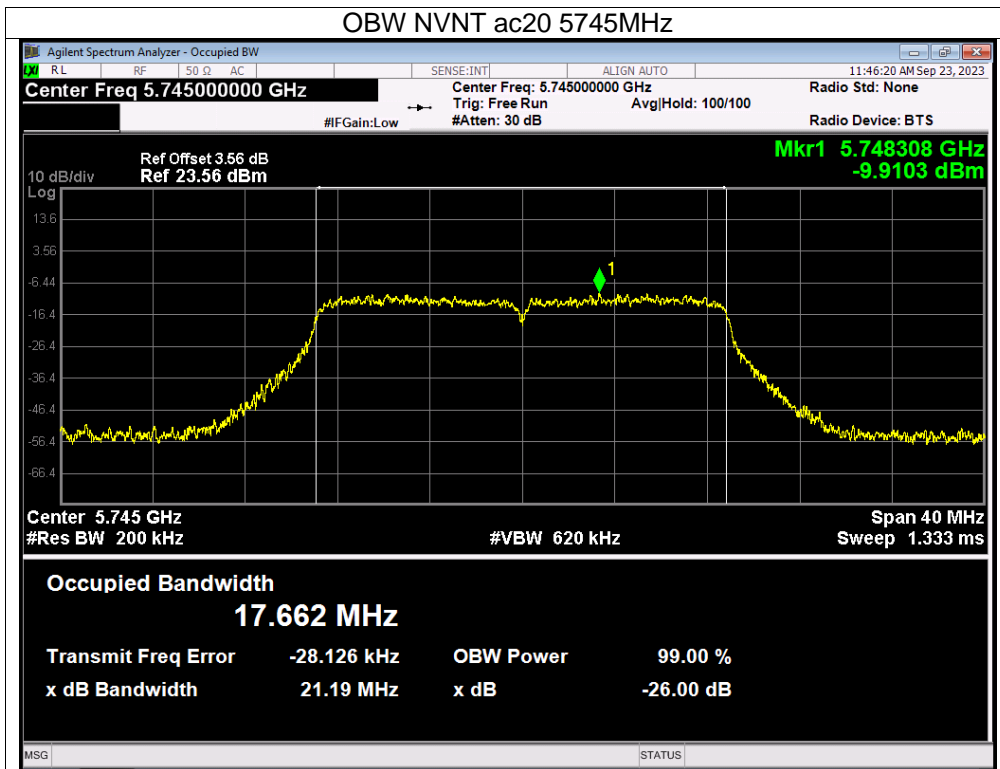


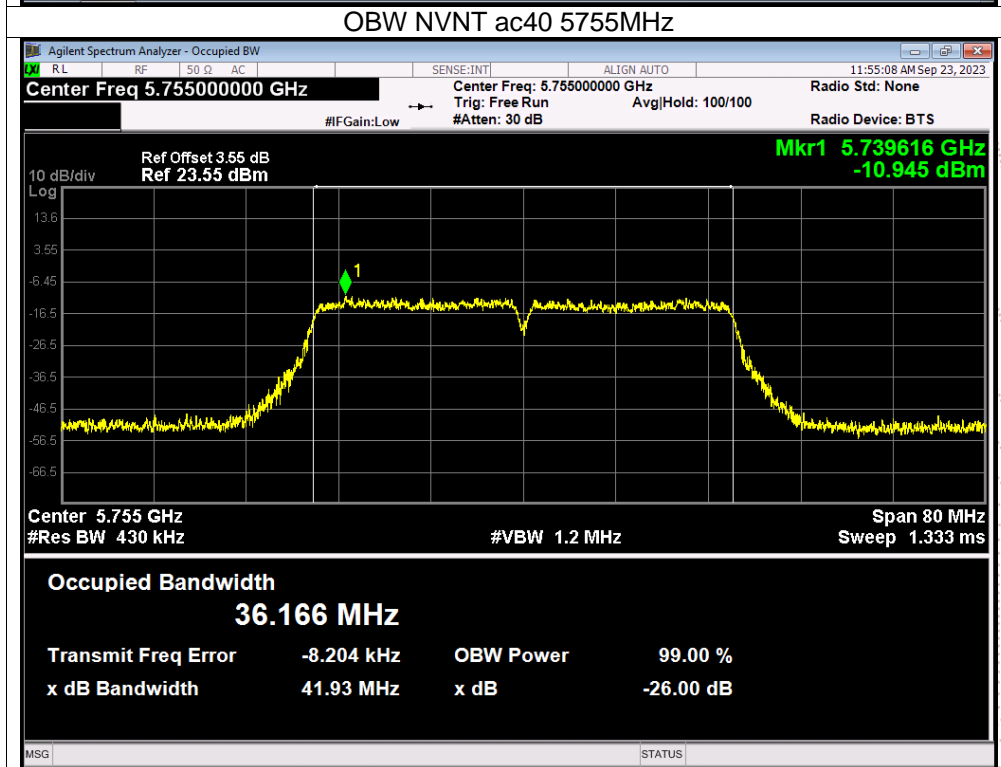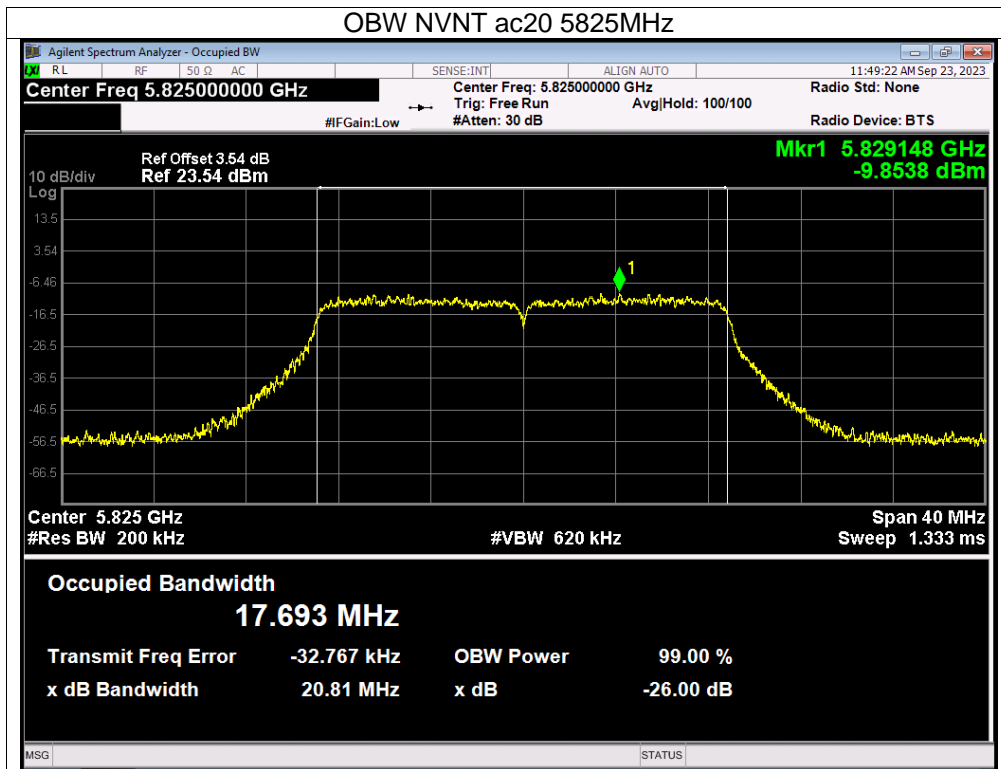

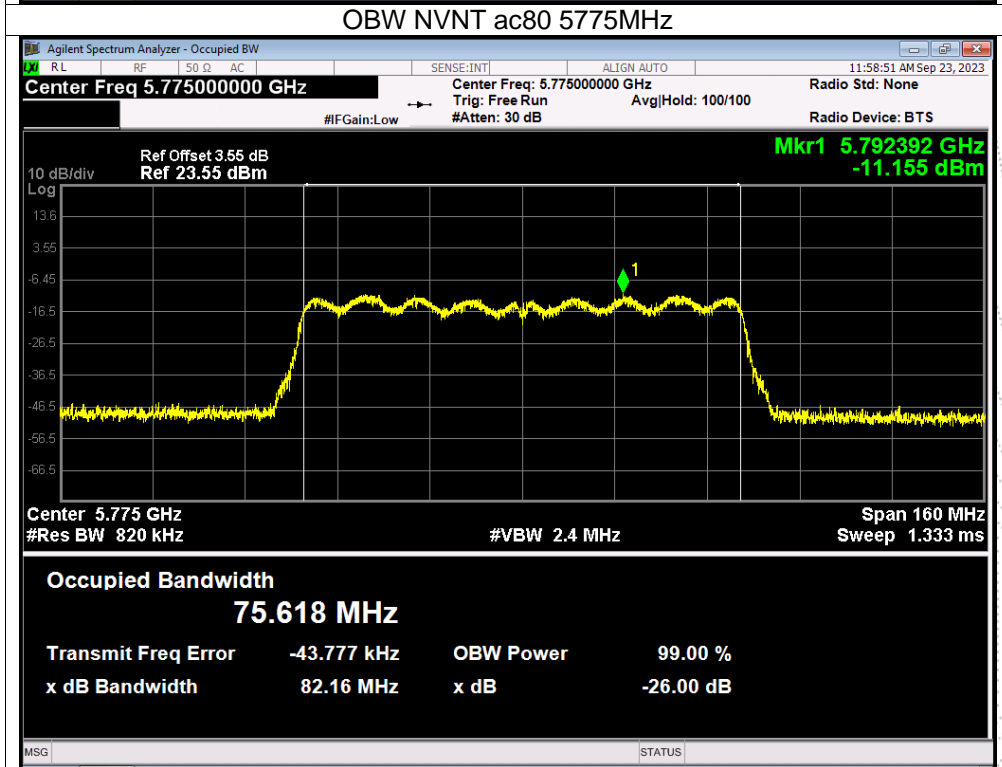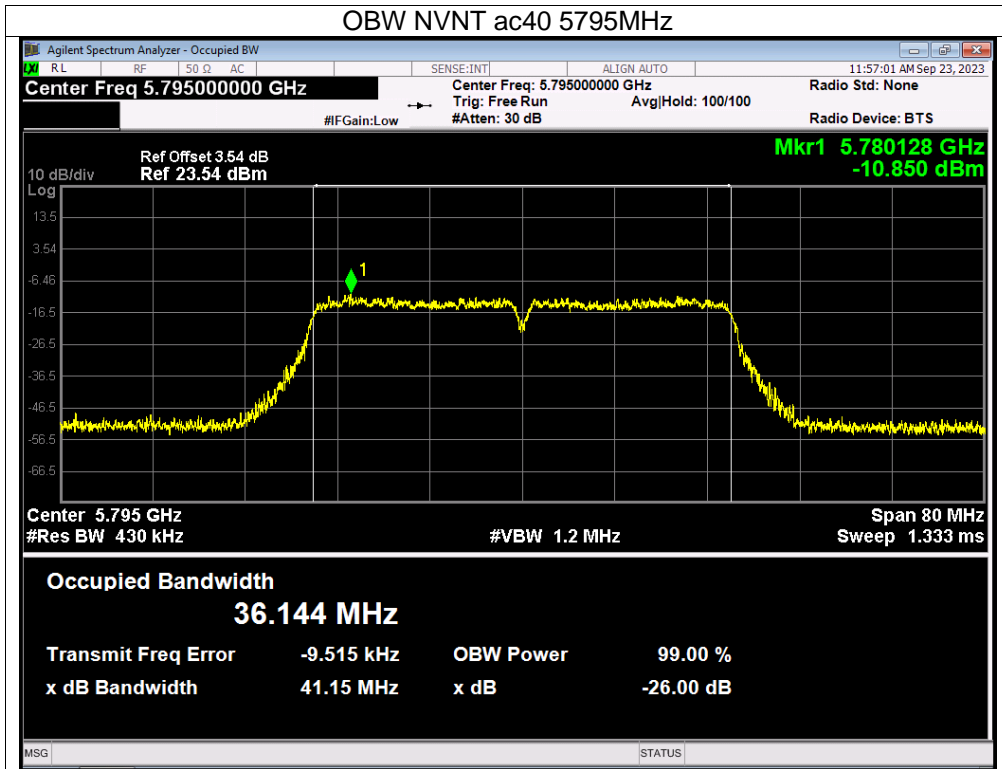

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup

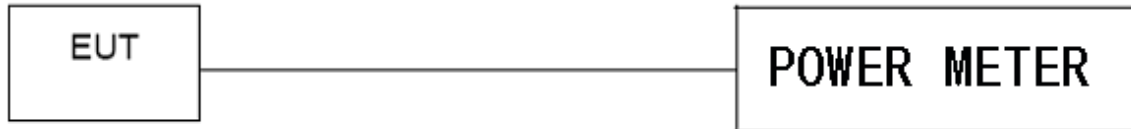

10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).

- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW \geq 3 MHz.

(iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.


(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

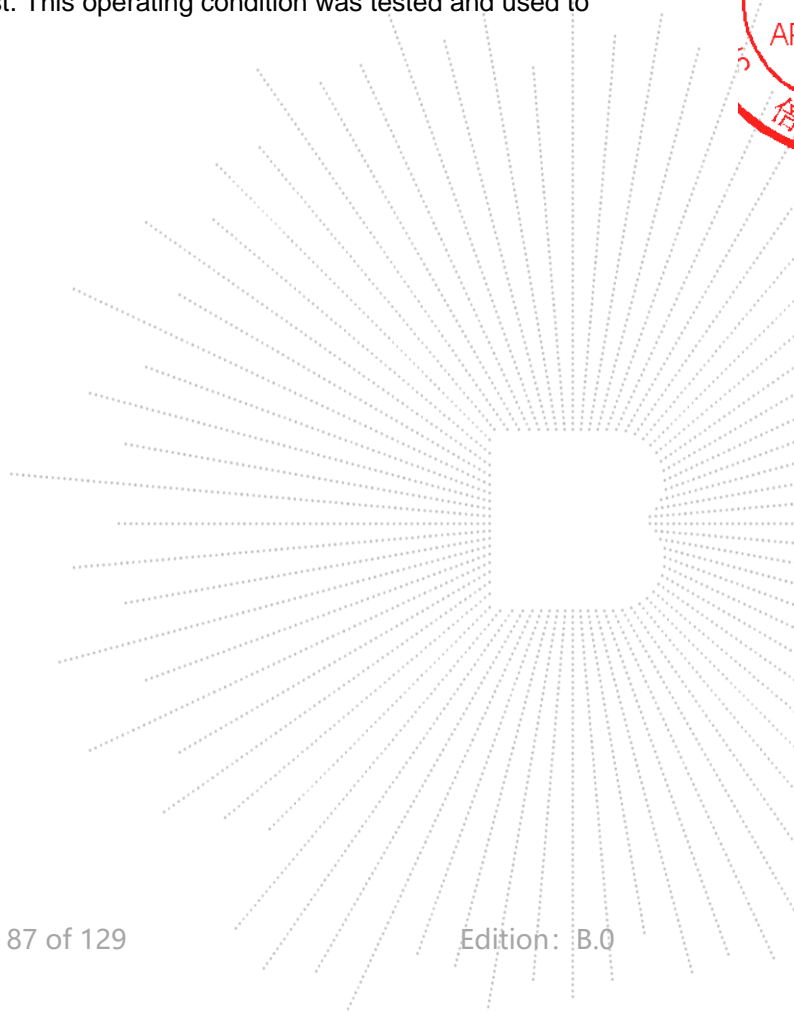


10.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 12V
Test Mode:	TX (5G) Mode Frequency U-NII-1 (5180-5240MHz)		

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)		Total(dBm)	Limit dBm	Verdict
			Ant A	Ant B			
NVNT	a	5180	2.13	2.08	/	24	Pass
NVNT	a	5200	2.28	2.02	/	24	Pass
NVNT	a	5240	3.02	2.02	/	24	Pass
NVNT	n20	5180	1.29	0.89	4.10	24	Pass
NVNT	n20	5200	1.28	0.79	4.05	24	Pass
NVNT	n20	5240	1.57	0.65	4.14	24	Pass
NVNT	n40	5190	0.37	-0.68	2.89	24	Pass
NVNT	n40	5230	-0.09	-1.38	2.32	24	Pass
NVNT	ac20	5180	1.38	-0.22	3.66	24	Pass
NVNT	ac20	5200	1.44	-0.44	3.61	24	Pass
NVNT	ac20	5240	1.41	-0.23	3.68	24	Pass
NVNT	ac40	5190	1.53	-1	3.46	24	Pass
NVNT	ac40	5230	0.13	-1.37	2.45	24	Pass
NVNT	ac80	5210	-0.72	-2.06	1.67	24	Pass


BCTC
 3C
 PPR
 检测

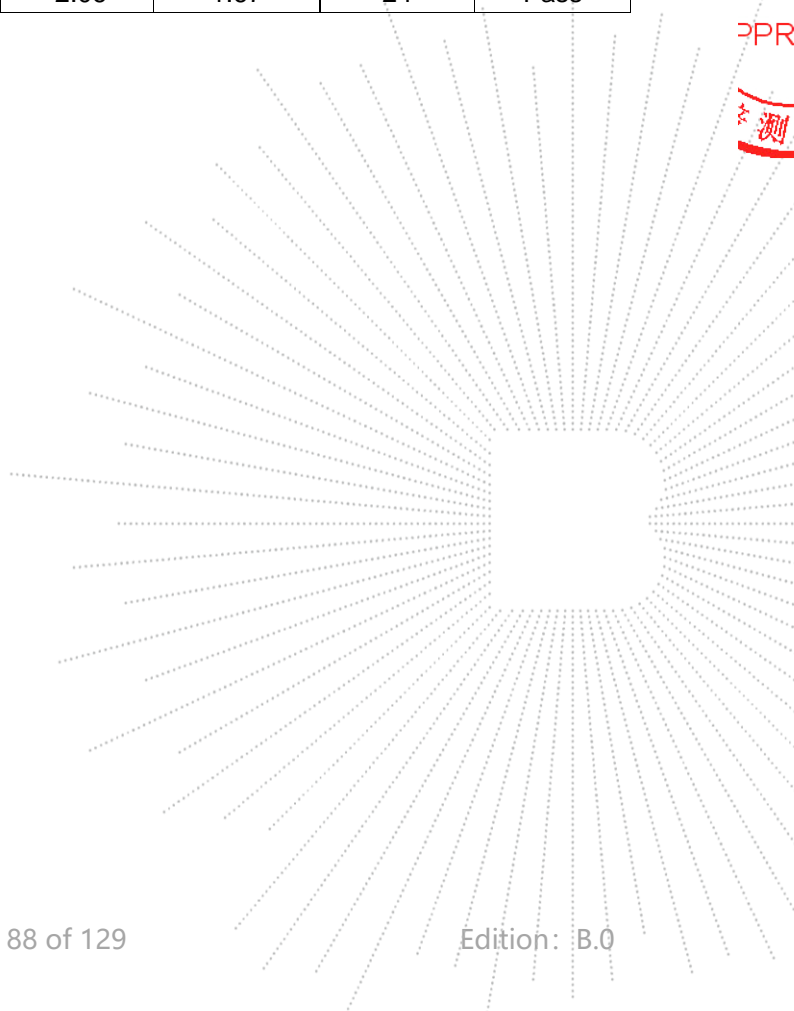

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 12V
Test Mode:	TX (5G) Mode Frequency U-NII-3 (5745-5825MHz)		


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)		Total(dBm)	Limit (dBm)	Verdict
			Ant A	Ant B			
NVNT	a	5745	3.14	2.51	/	30	Pass
NVNT	a	5785	3.37	2.68	/	30	Pass
NVNT	a	5825	3.29	2.44	/	30	Pass
NVNT	n20	5745	2.12	1.54	4.85	30	Pass
NVNT	n20	5785	2.31	1.52	4.94	30	Pass
NVNT	n20	5825	2.16	1.29	4.76	30	Pass
NVNT	n40	5755	1.44	0.69	4.09	30	Pass
NVNT	n40	5795	1.6	0.72	4.19	30	Pass
NVNT	ac20	5745	2.18	1.58	4.90	30	Pass
NVNT	ac20	5785	2.3	1.49	4.92	30	Pass
NVNT	ac20	5825	2.14	1.31	4.76	30	Pass
NVNT	ac40	5755	1.33	-0.4	3.56	30	Pass
NVNT	ac40	5795	1.56	-0.3	3.74	30	Pass
NVNT	ac80	5775	0.74	-1.15	2.91	30	Pass

TEST
 TO
 OVER
 検査

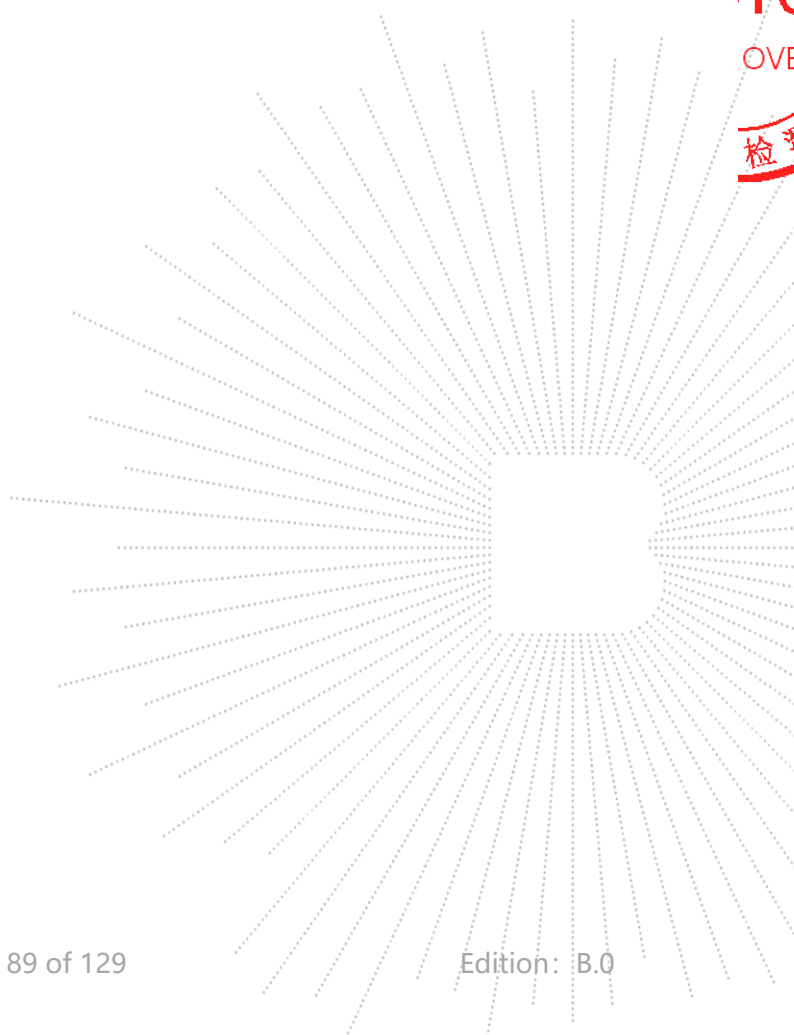

11. Out Of Band Emissions

11.1 Block Diagram Of Test Setup

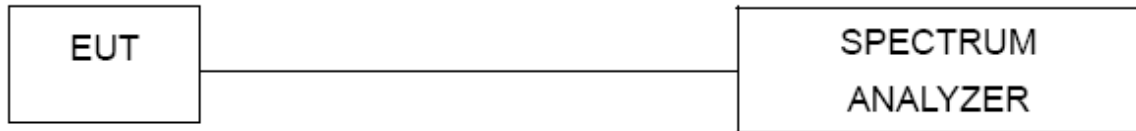

11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data



11.5 Test Result



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 12V



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A .
 Plot. Antenna B: 5180-5240MHz


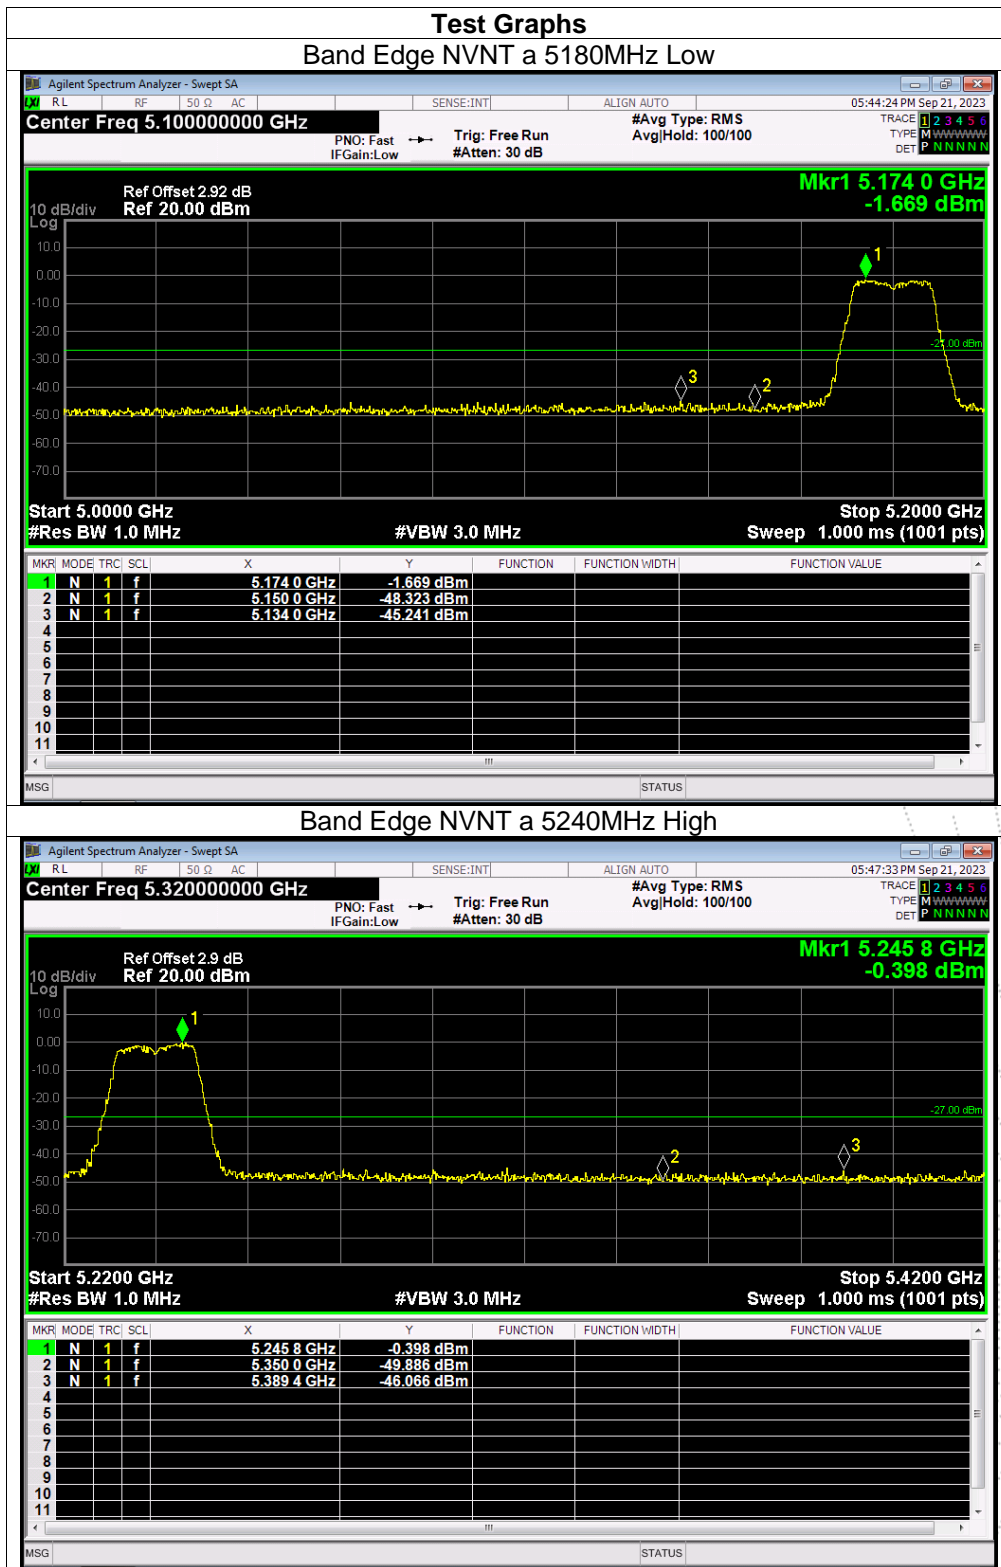




CO., LTD

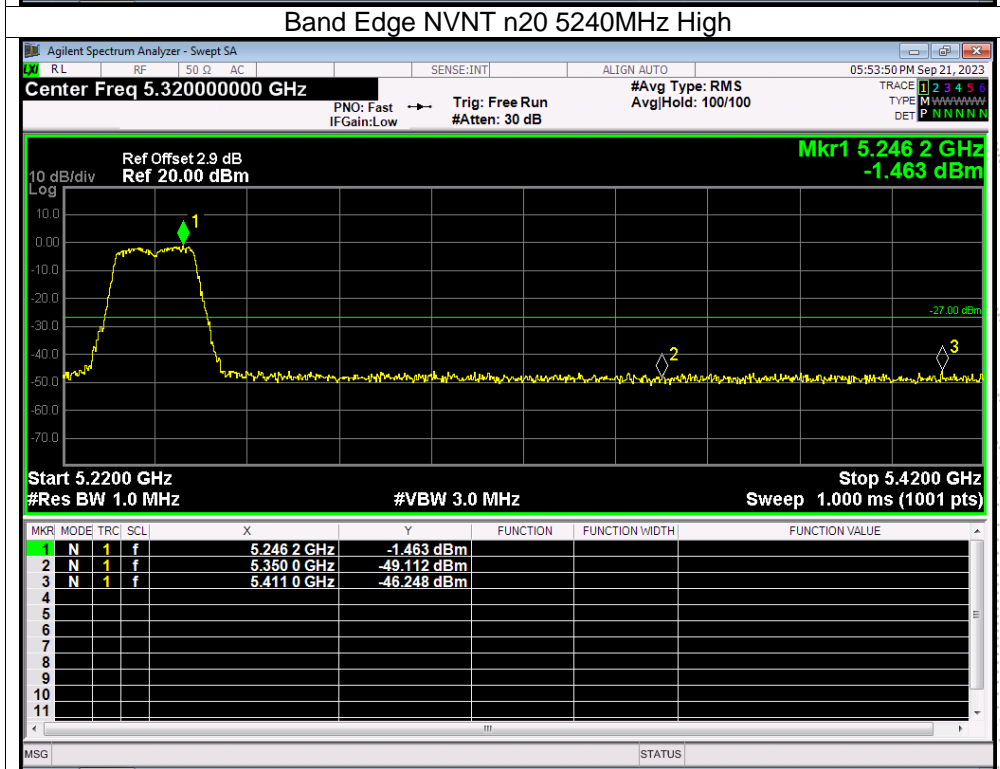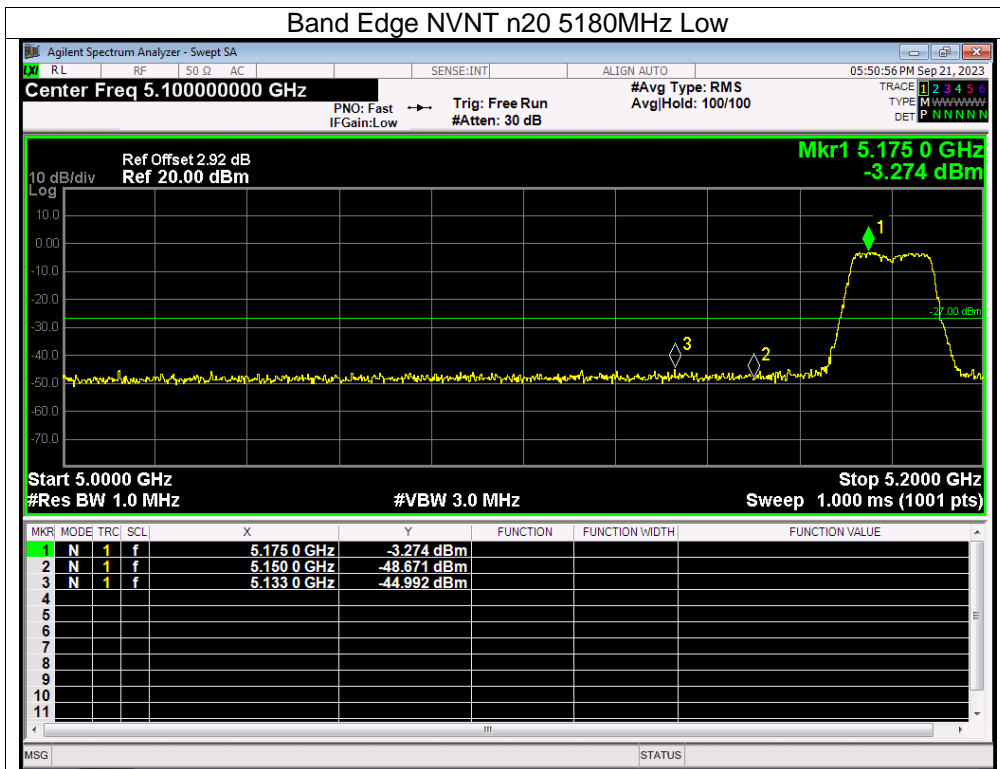

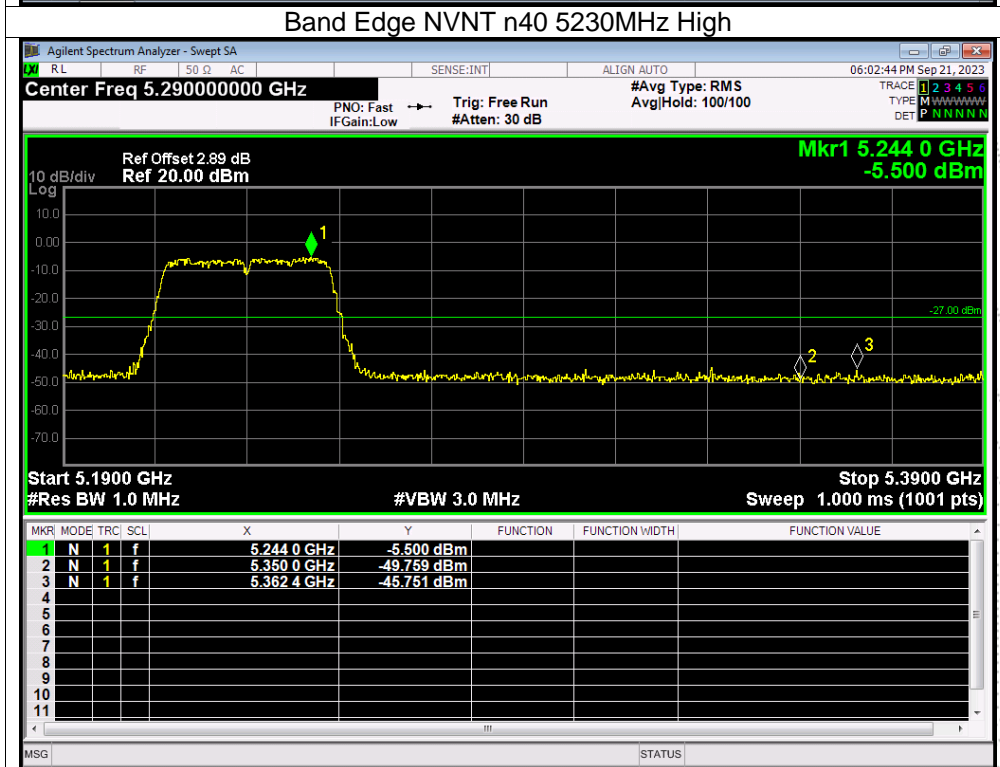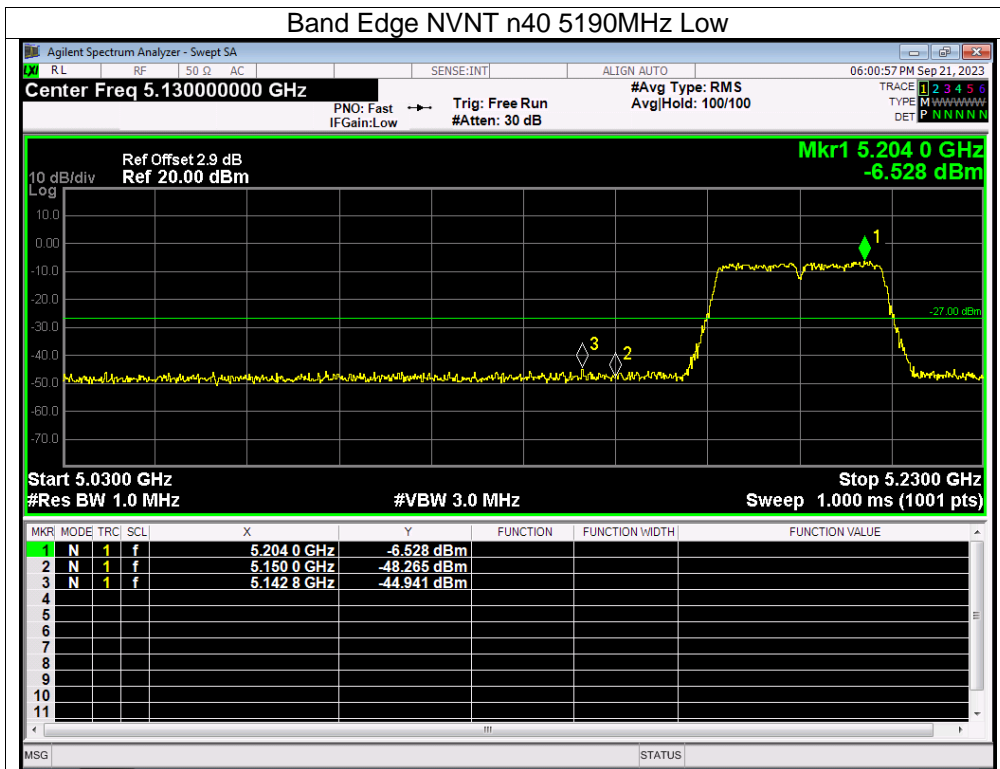


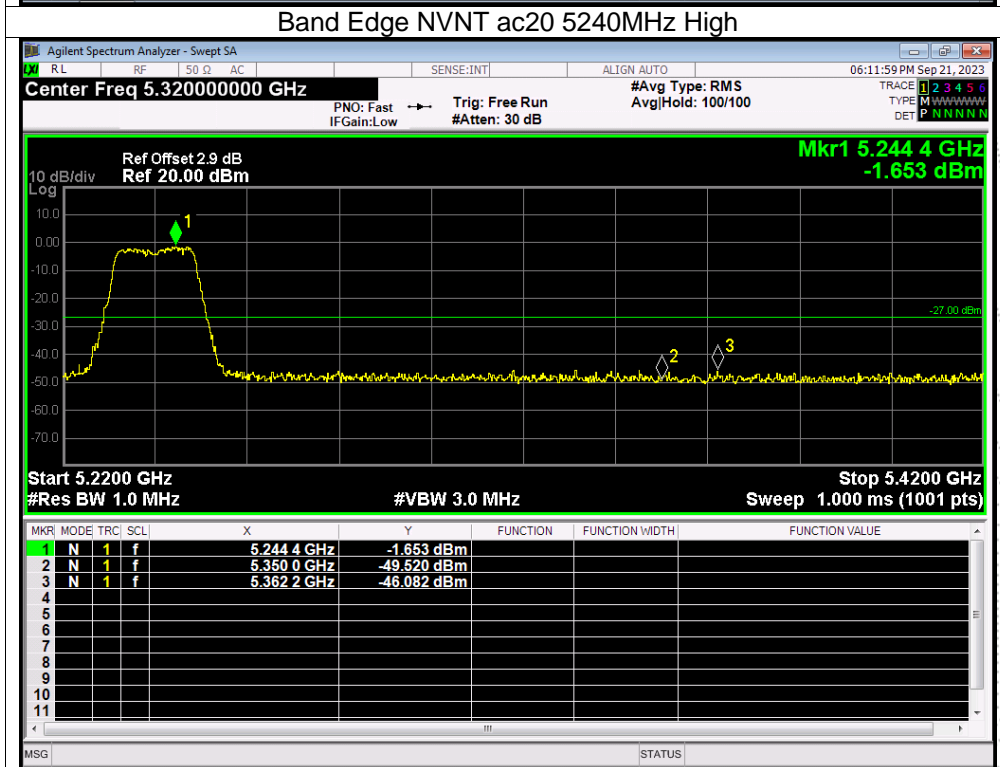
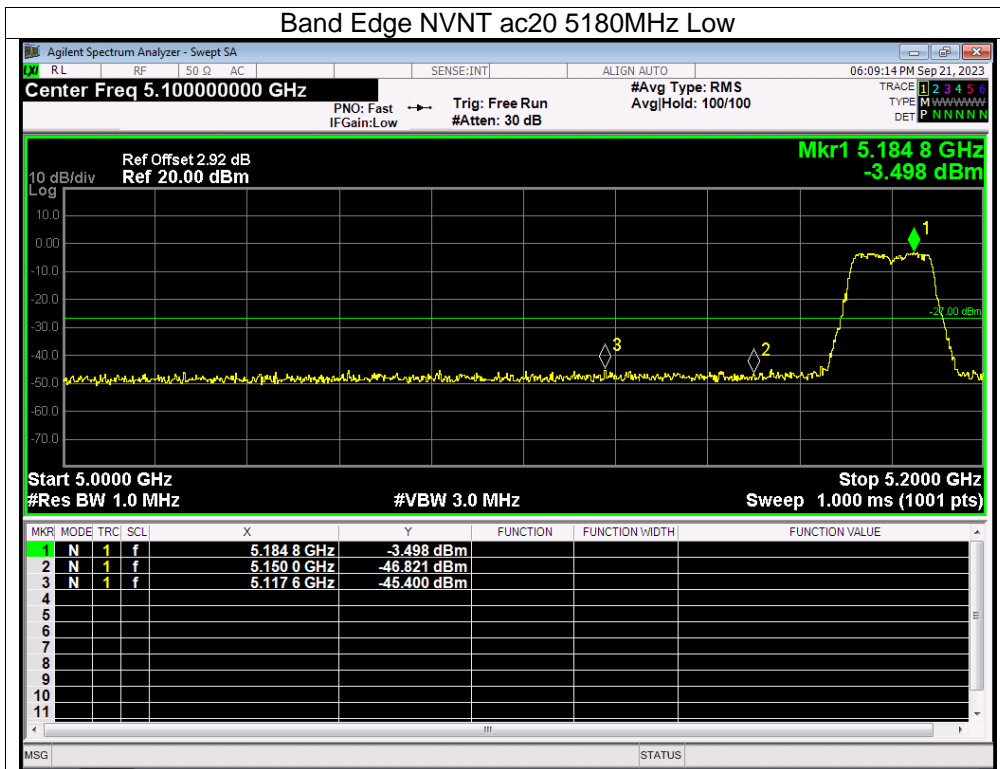


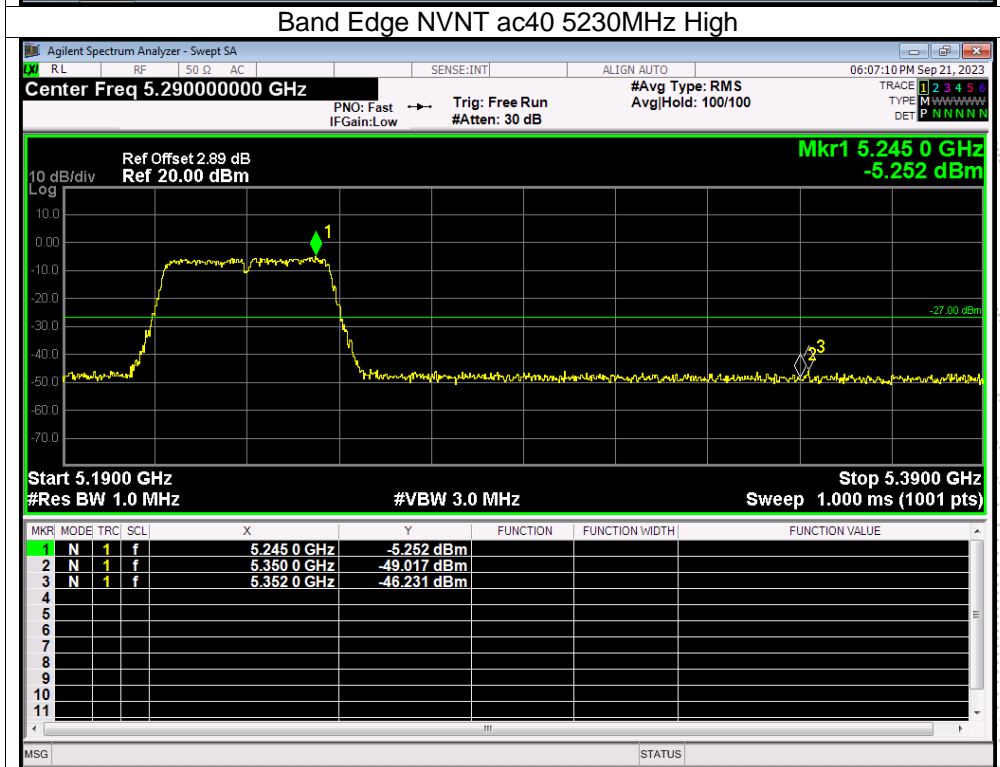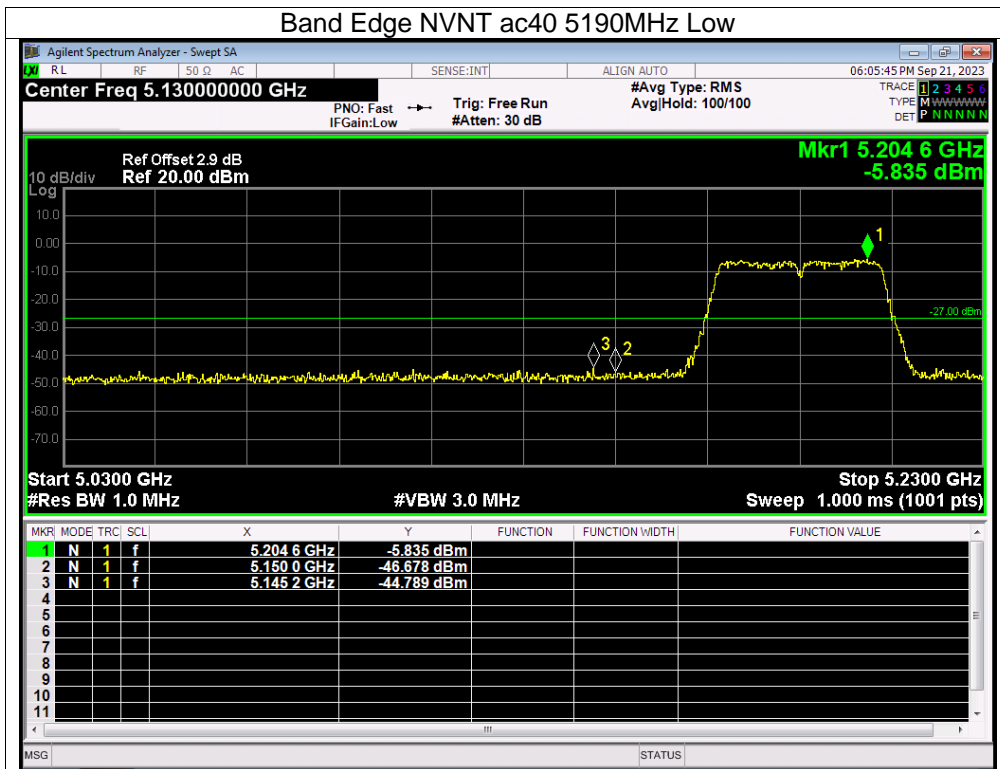

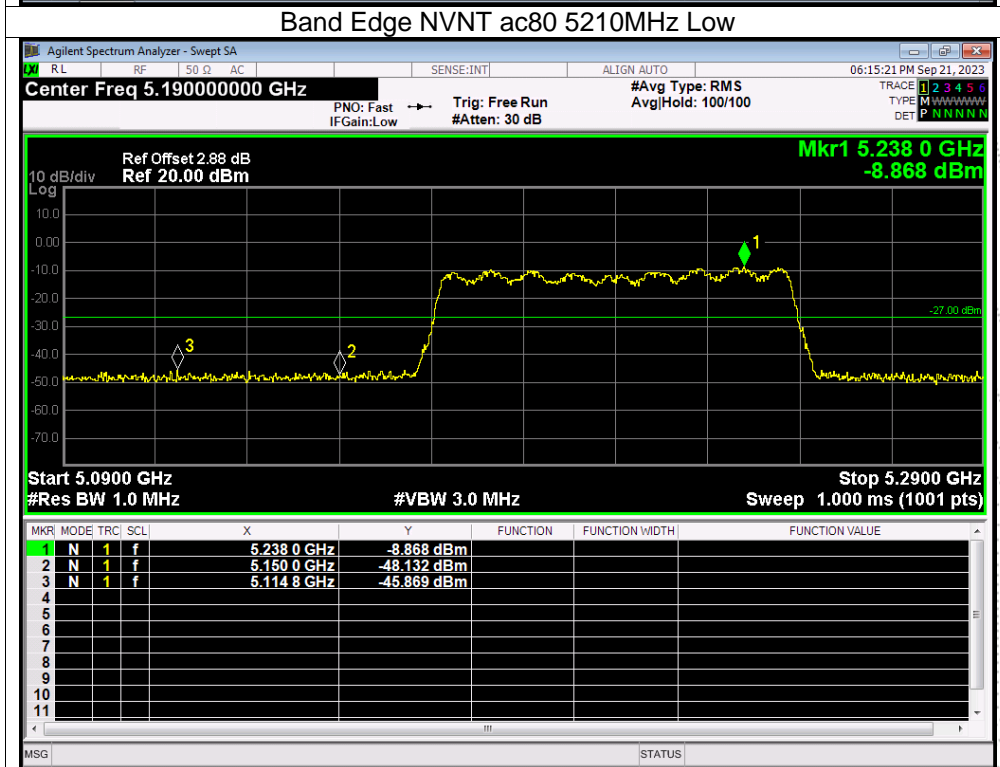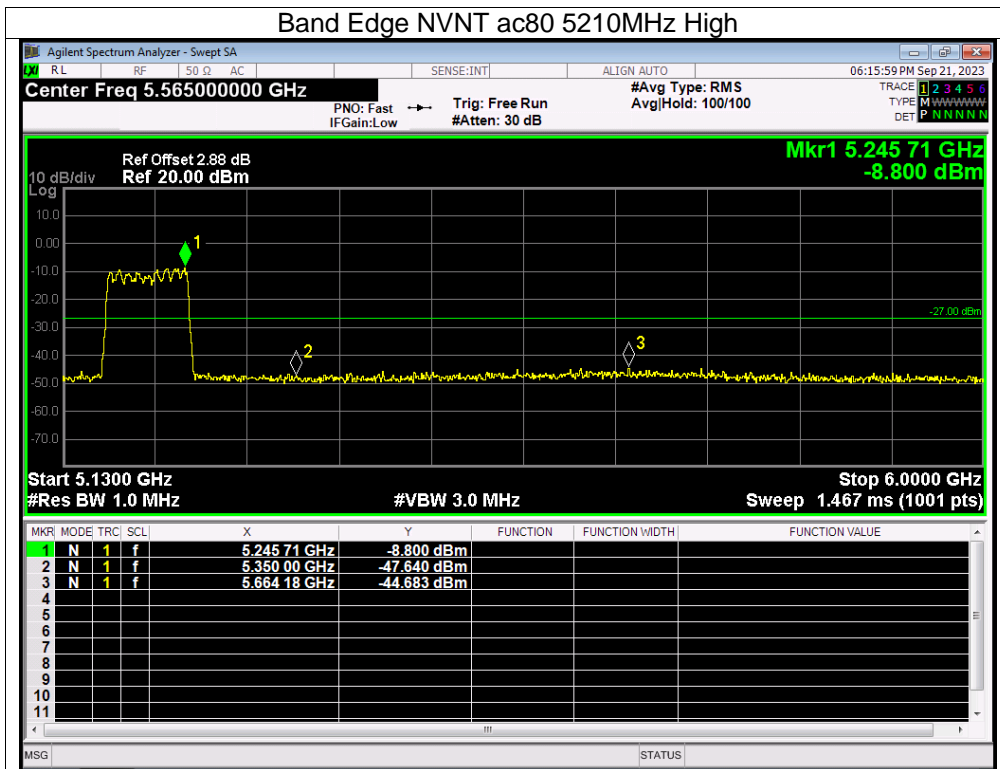

Note: A(B) Represent the value of antenna A and B. The worst data is Antenna B, only shown Antenna B.
 Antenna B: 5745-58250MHz

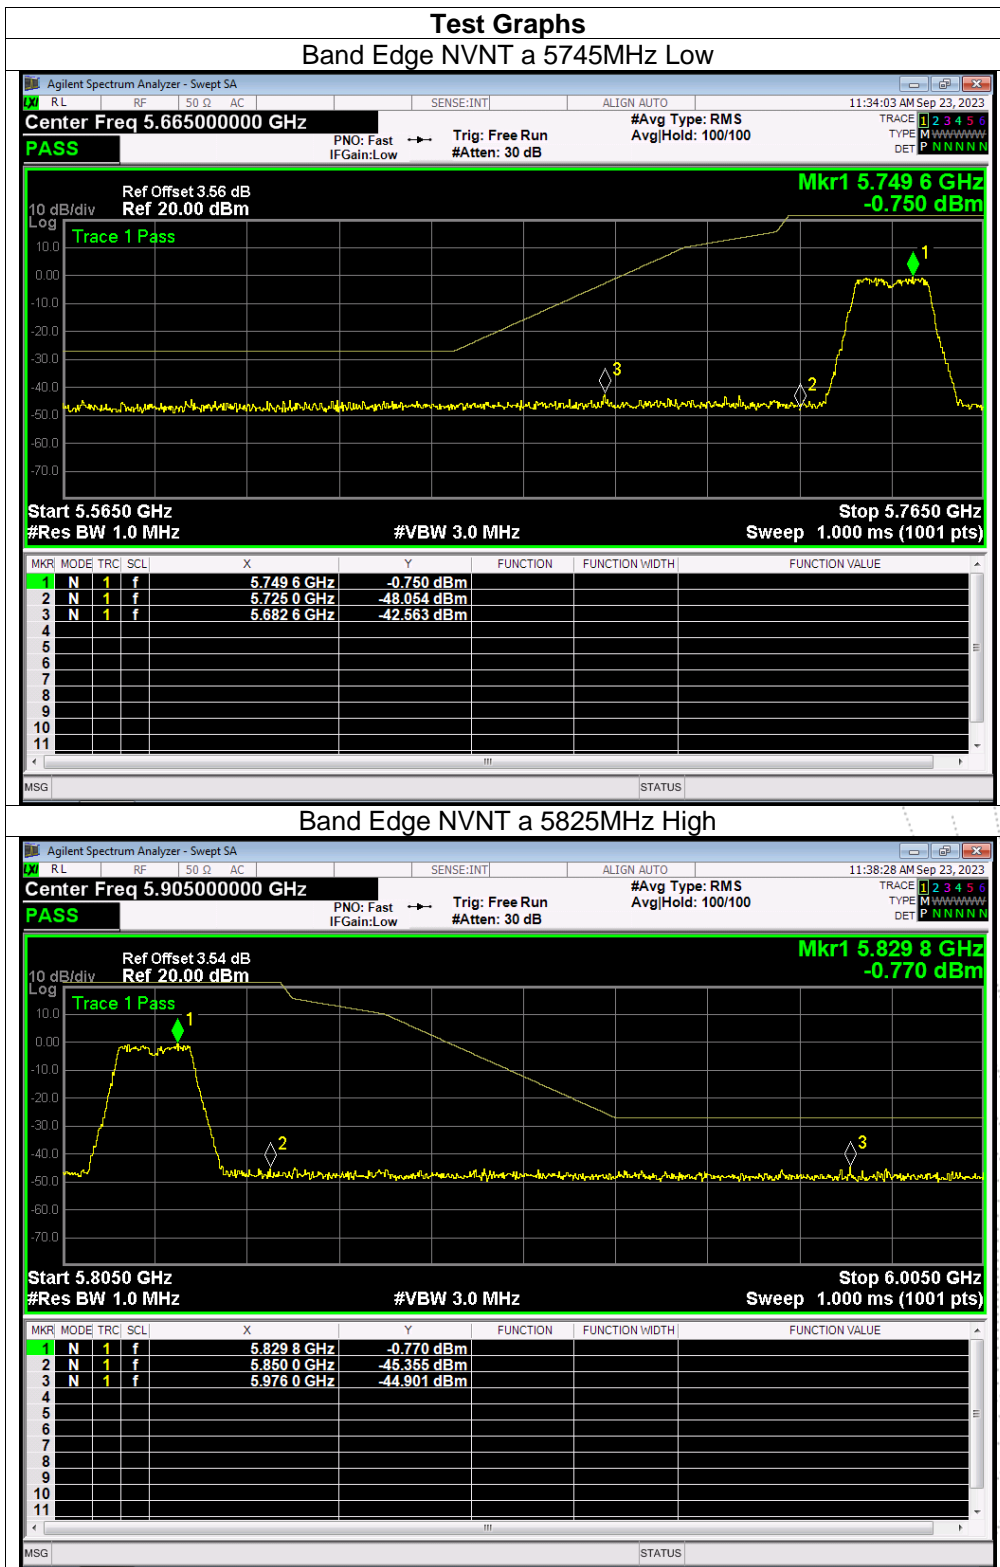

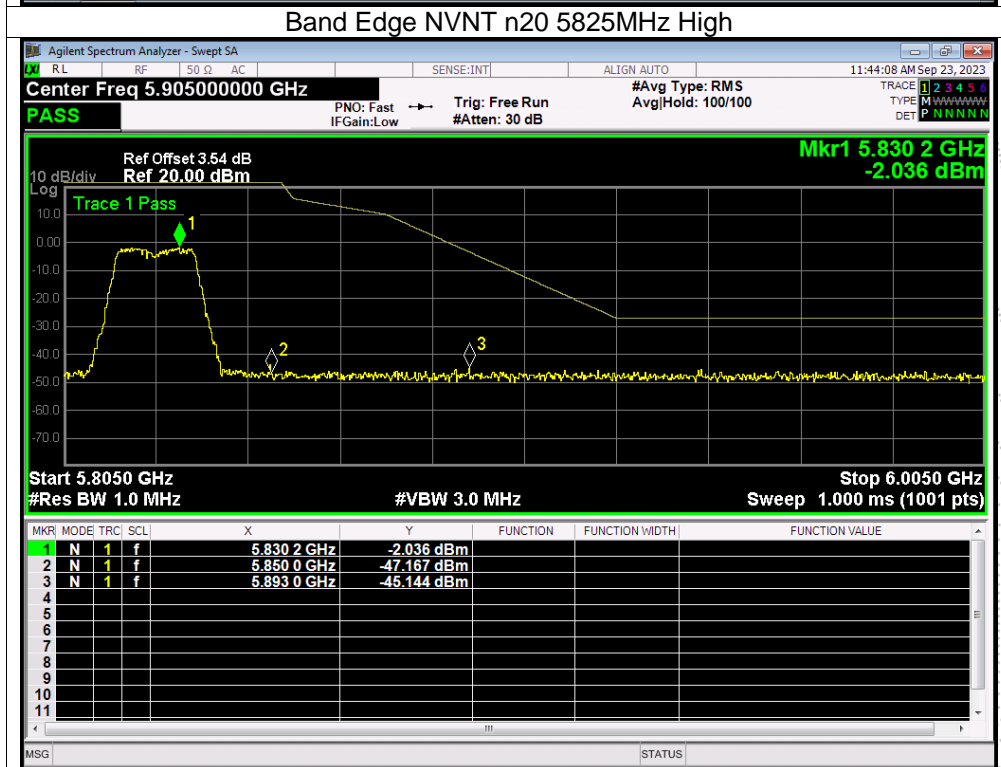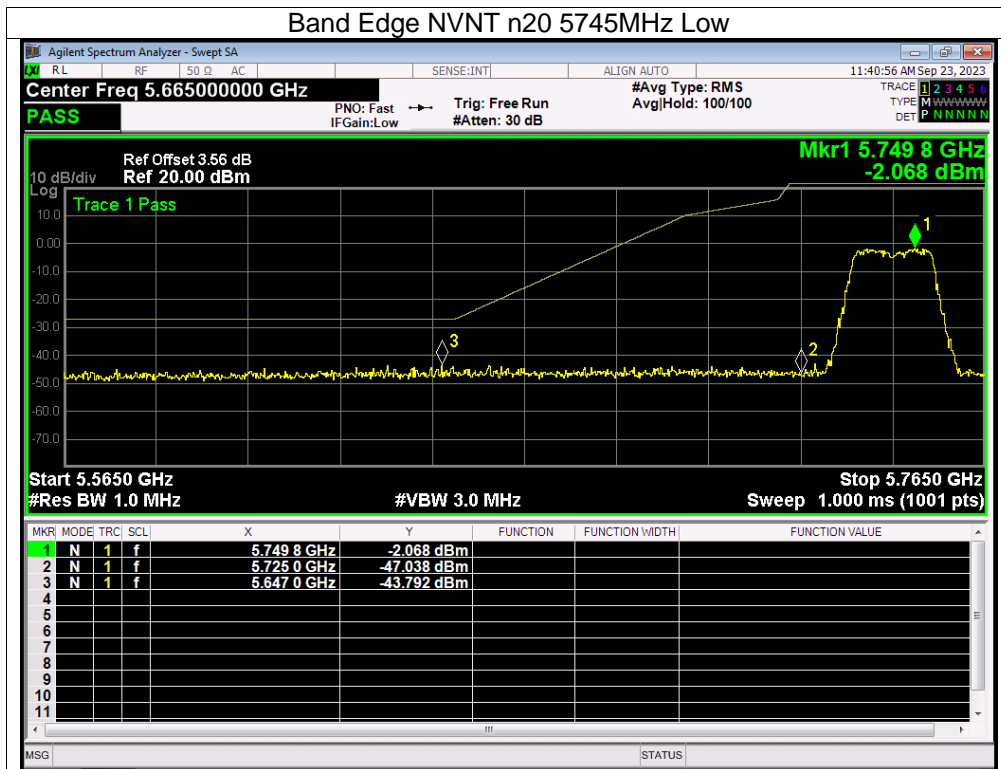

CO.LTD