


## 5.8G WIFI


### 5.1 DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant 1	58.3	2.34	0.74
NVNT	a	5785	Ant 1	57.81	2.38	0.74
NVNT	a	5825	Ant 1	58.24	2.35	0.74
NVNT	a	5745	Ant 2	58.28	2.34	0.74
NVNT	a	5785	Ant 2	57.53	2.4	0.74
NVNT	a	5825	Ant 2	57.81	2.38	0.74
NVNT	ac20	5745	Ant 1	56.36	2.49	0.78
NVNT	ac20	5785	Ant 1	56.22	2.5	0.79
NVNT	ac20	5825	Ant 1	56.59	2.47	0.79
NVNT	ac20	5745	Ant 2	56.31	2.49	0.78
NVNT	ac20	5785	Ant 2	56.26	2.5	0.79
NVNT	ac20	5825	Ant 2	56.47	2.48	0.79
NVNT	ac40	5755	Ant 1	39.48	4.04	1.56
NVNT	ac40	5795	Ant 1	39.42	4.04	1.56
NVNT	ac40	5755	Ant 2	39.47	4.04	1.56
NVNT	ac40	5795	Ant 2	39.43	4.04	1.56
NVNT	ac80	5775	Ant 1	24.7	6.07	3.12
NVNT	ac80	5775	Ant 2	24.77	6.06	3.23
NVNT	n20	5745	Ant 1	56.37	2.49	0.78
NVNT	n20	5785	Ant 1	56.22	2.5	0.79
NVNT	n20	5825	Ant 1	56.46	2.48	0.78
NVNT	n20	5745	Ant 2	56.22	2.5	0.79
NVNT	n20	5785	Ant 2	56.22	2.5	0.79
NVNT	n20	5825	Ant 2	56.29	2.5	0.79
NVNT	n40	5755	Ant 1	39.43	4.04	1.59
NVNT	n40	5795	Ant 1	39.43	4.04	1.59
NVNT	n40	5755	Ant 2	39.26	4.06	1.56
NVNT	n40	5795	Ant 2	39.43	4.04	1.59


Duty Cycle NVNT a 5745MHz Ant 1

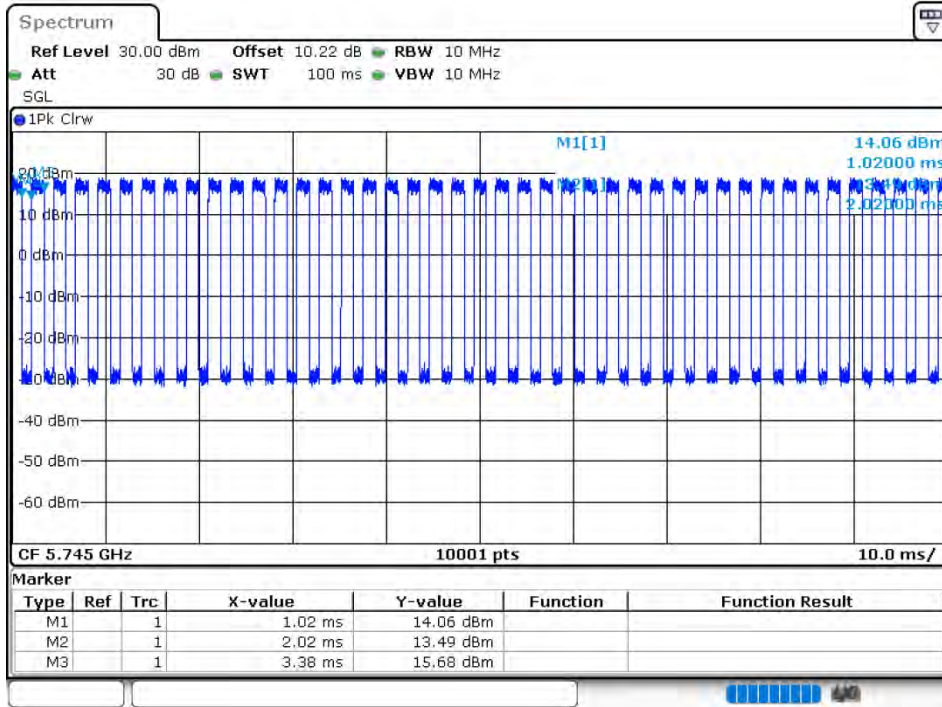


Duty Cycle NVNT a 5785MHz Ant 1

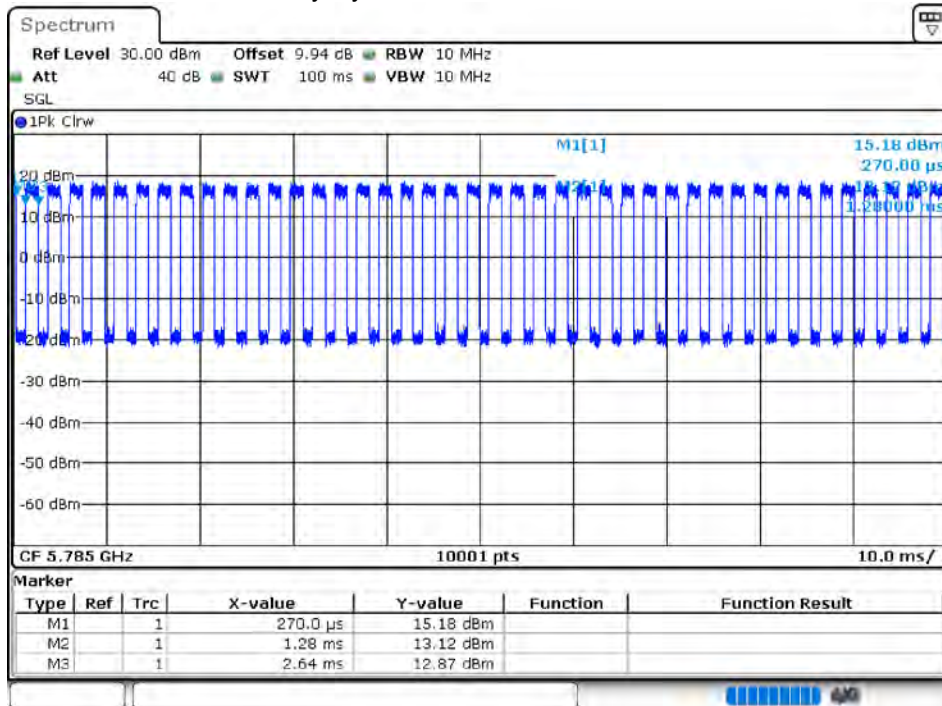

Duty Cycle NVNT a 5825MHz Ant 1

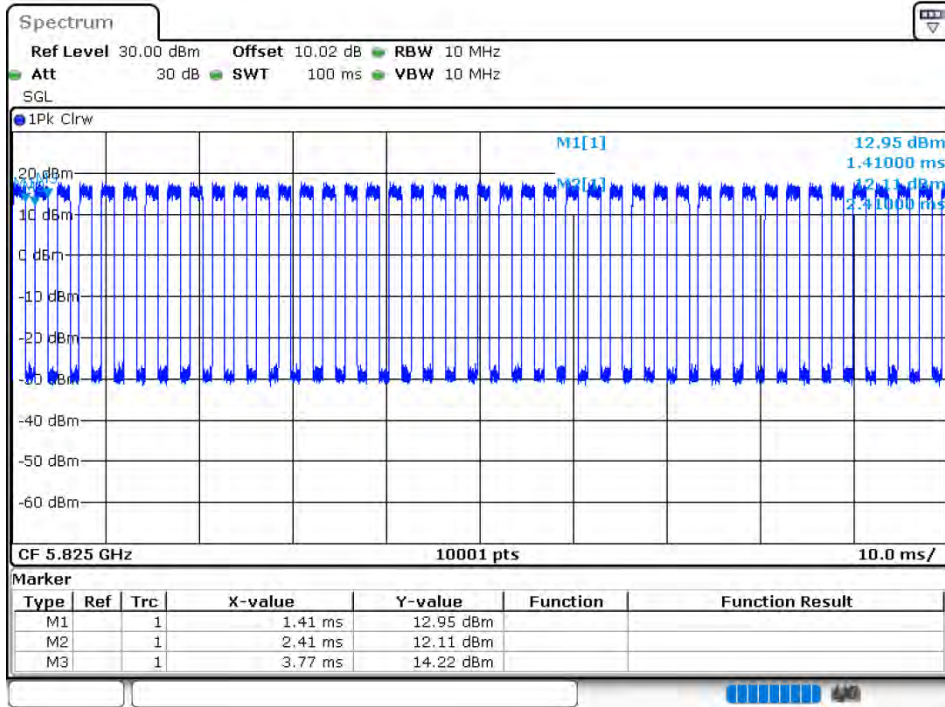


Duty Cycle NVNT a 5745MHz Ant 2

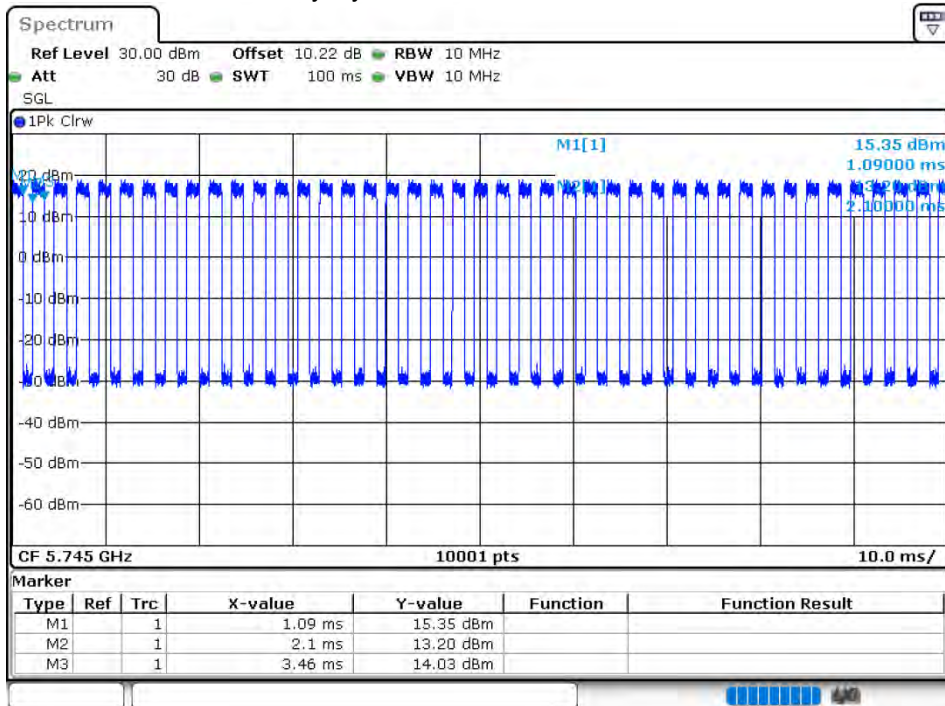





Duty Cycle NVNT a 5785MHz Ant 2

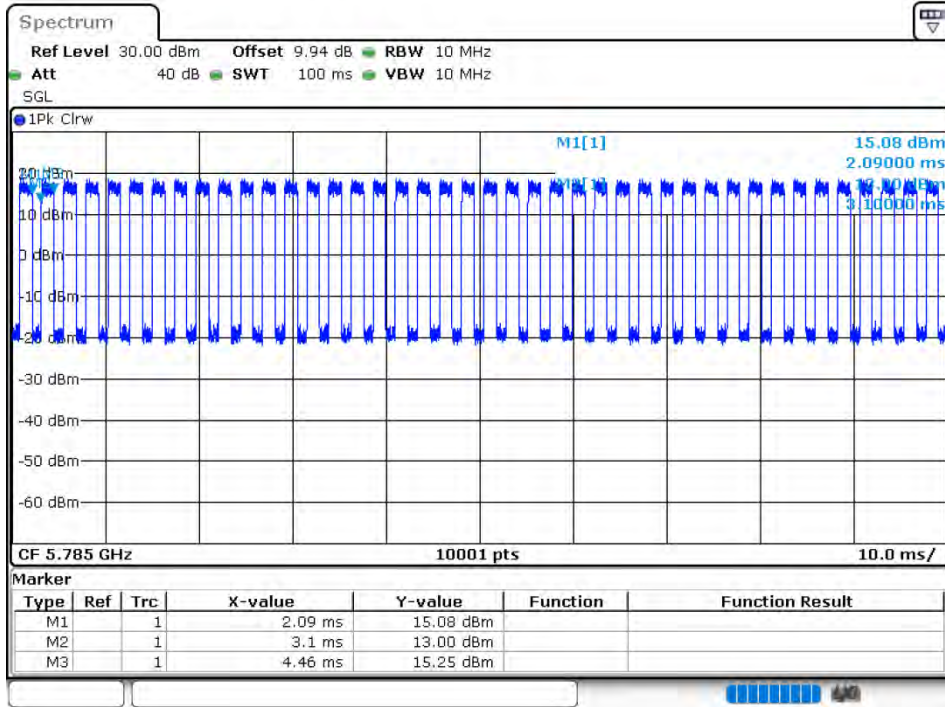

Duty Cycle NVNT a 5825MHz Ant 2

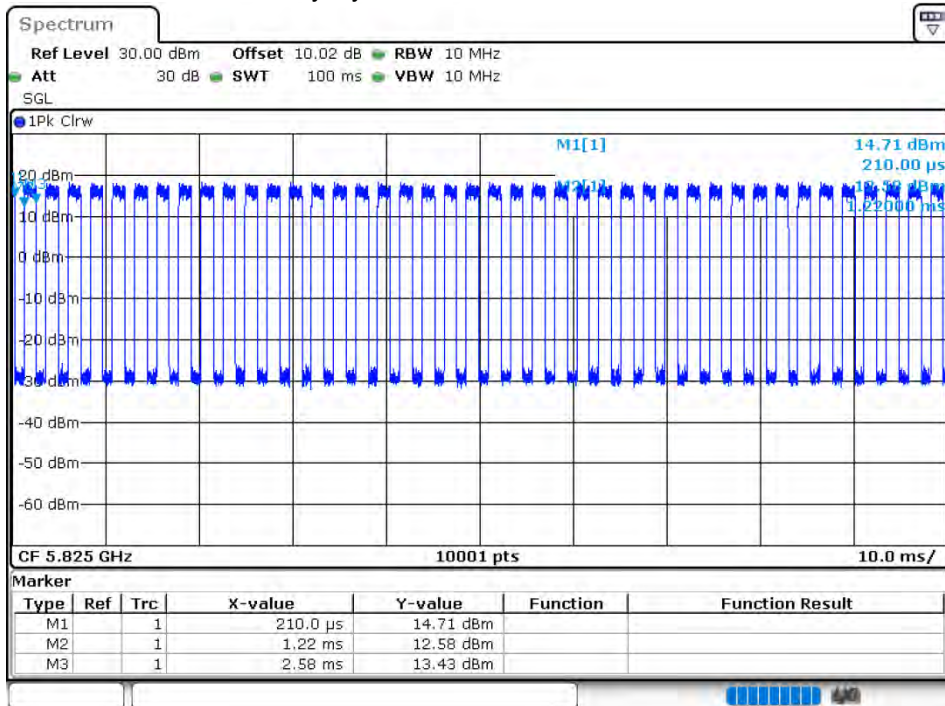


Duty Cycle NVNT ac20 5745MHz Ant 1

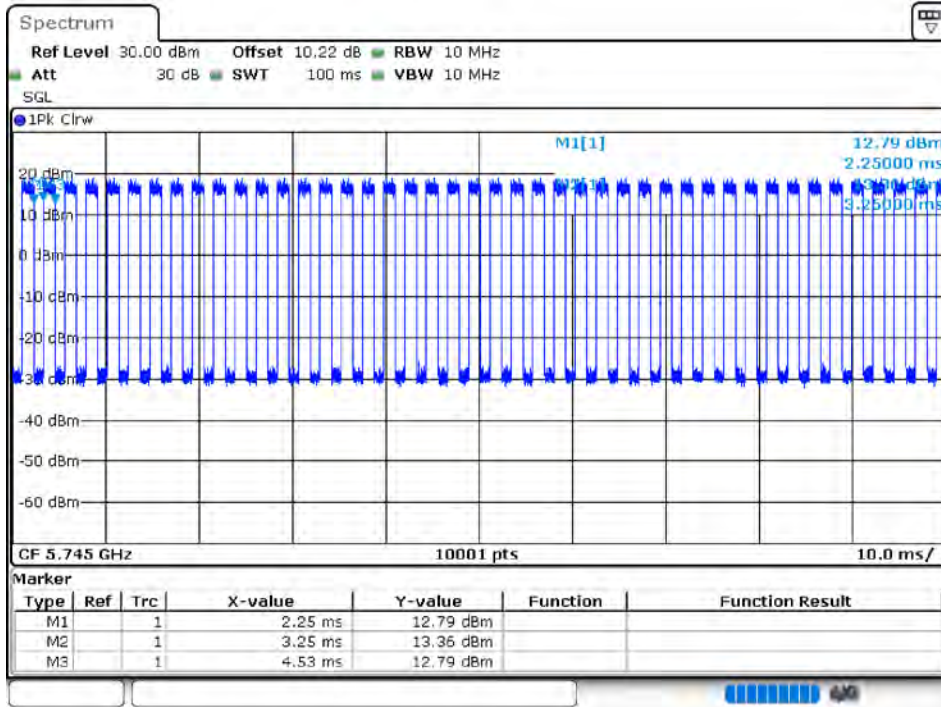


Duty Cycle NVNT ac20 5785MHz Ant 1



Duty Cycle NVNT ac20 5825MHz Ant 1

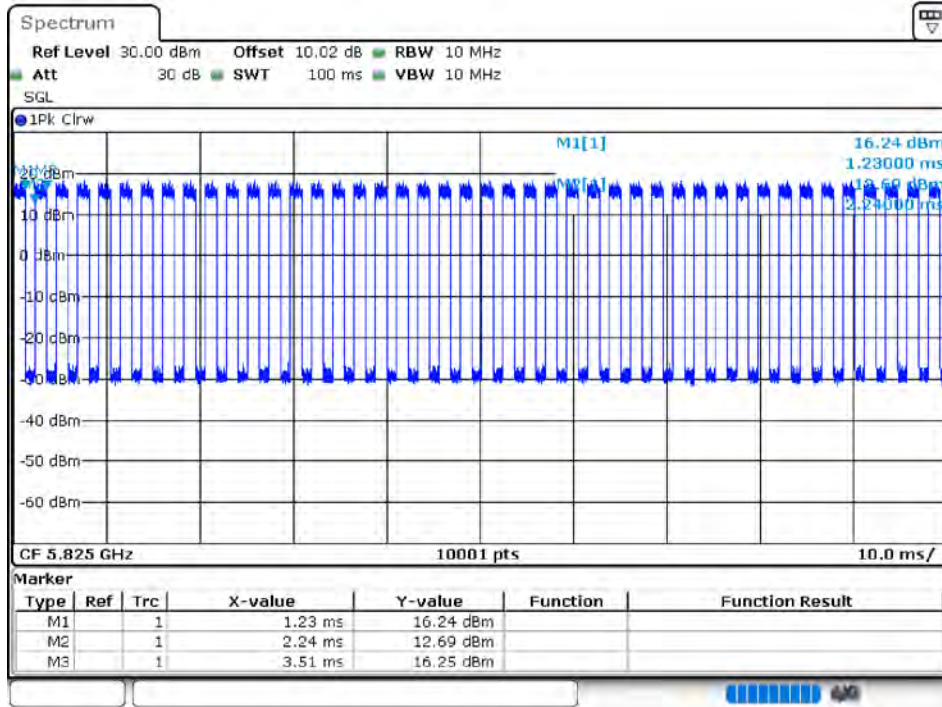


Duty Cycle NVNT ac20 5745MHz Ant 2

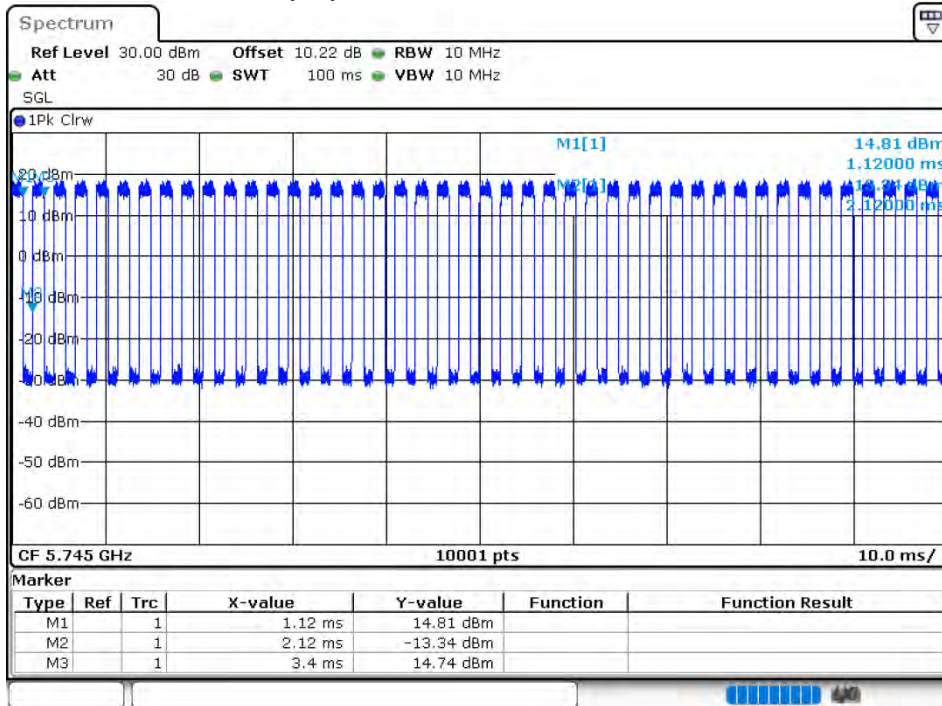





Duty Cycle NVNT ac20 5785MHz Ant 2

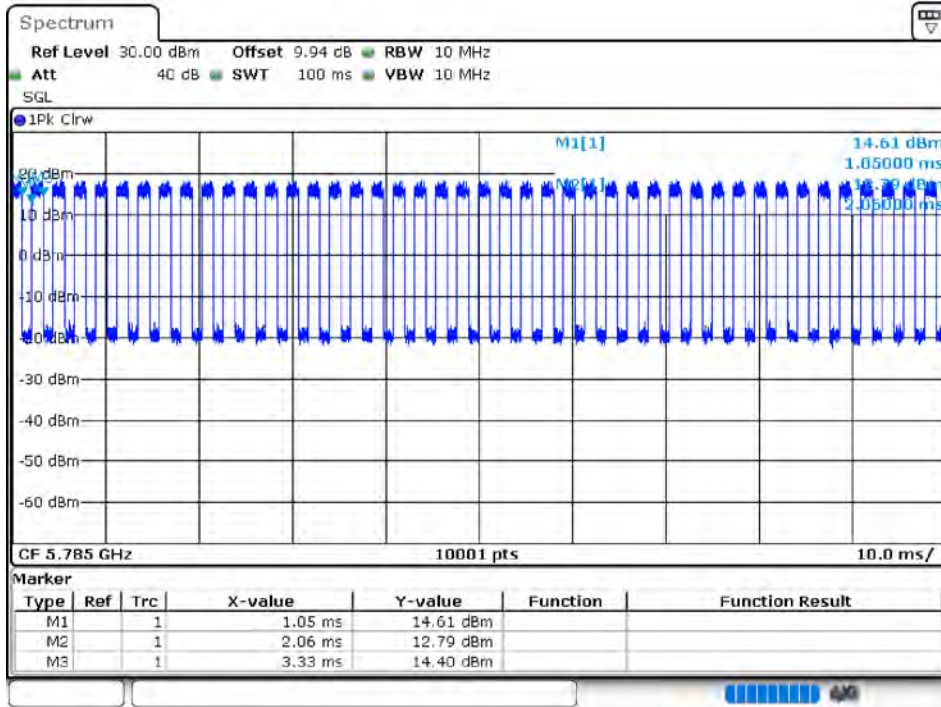


Duty Cycle NVNT ac20 5825MHz Ant 2

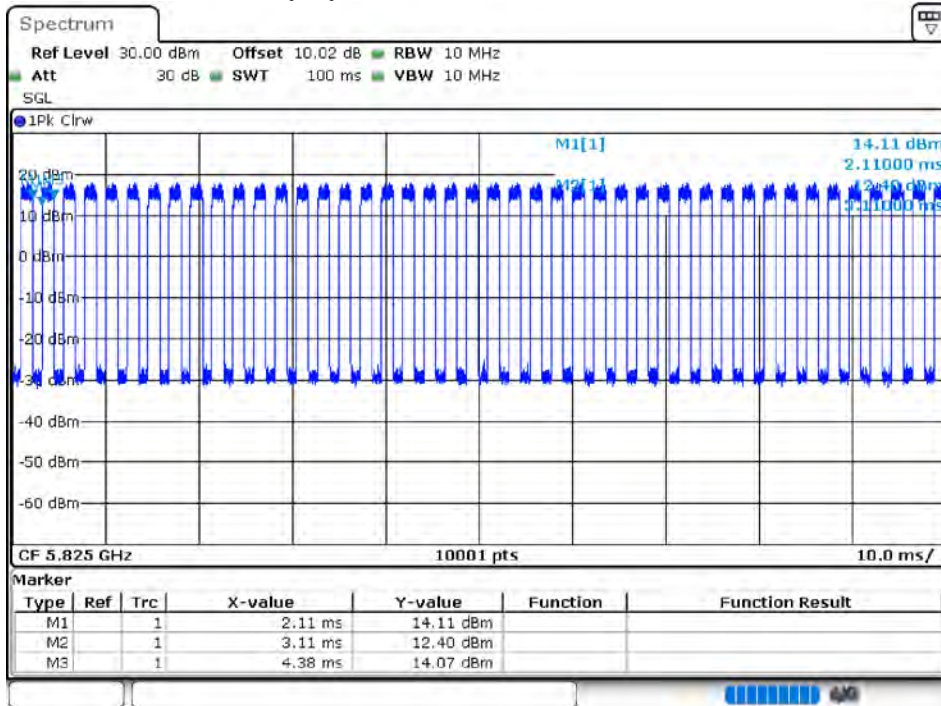

Duty Cycle NVNT ac40 5755MHz Ant 1

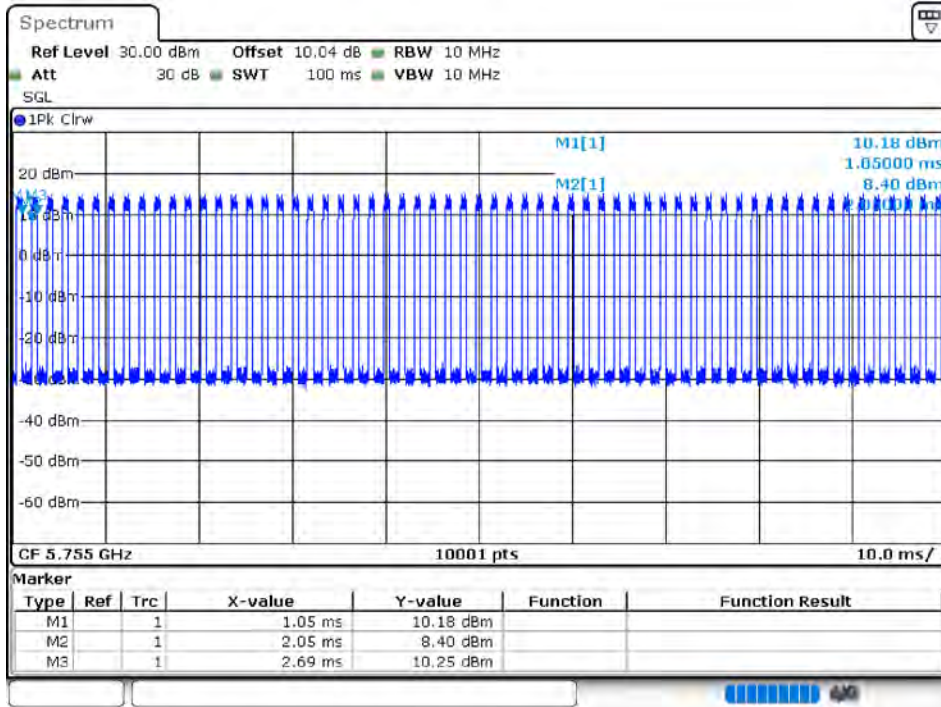


Duty Cycle NVNT ac40 5795MHz Ant 1

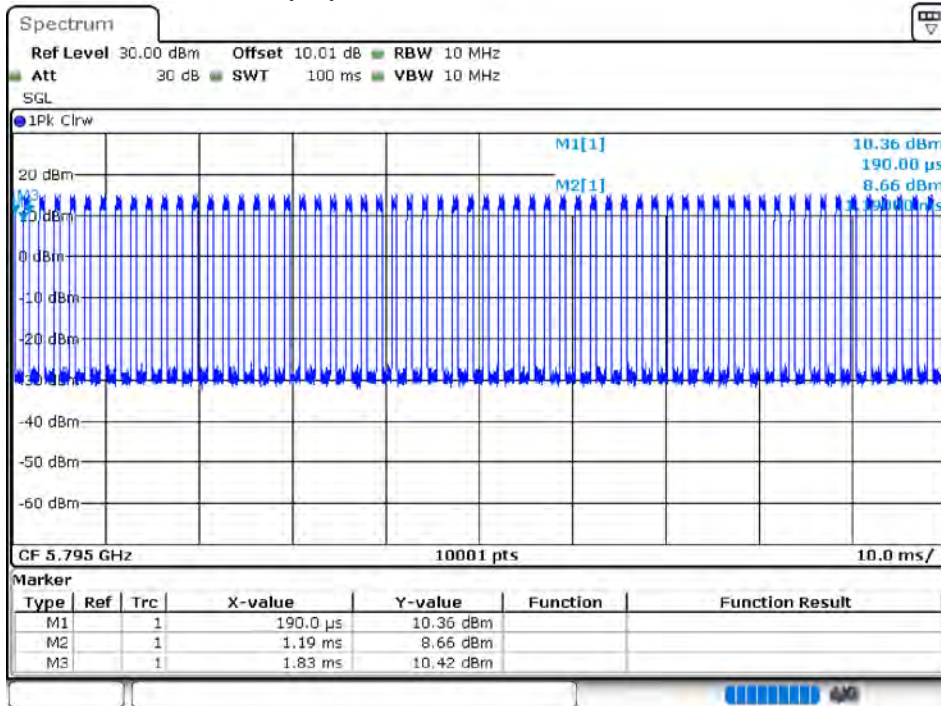





Duty Cycle NVNT ac40 5755MHz Ant 2

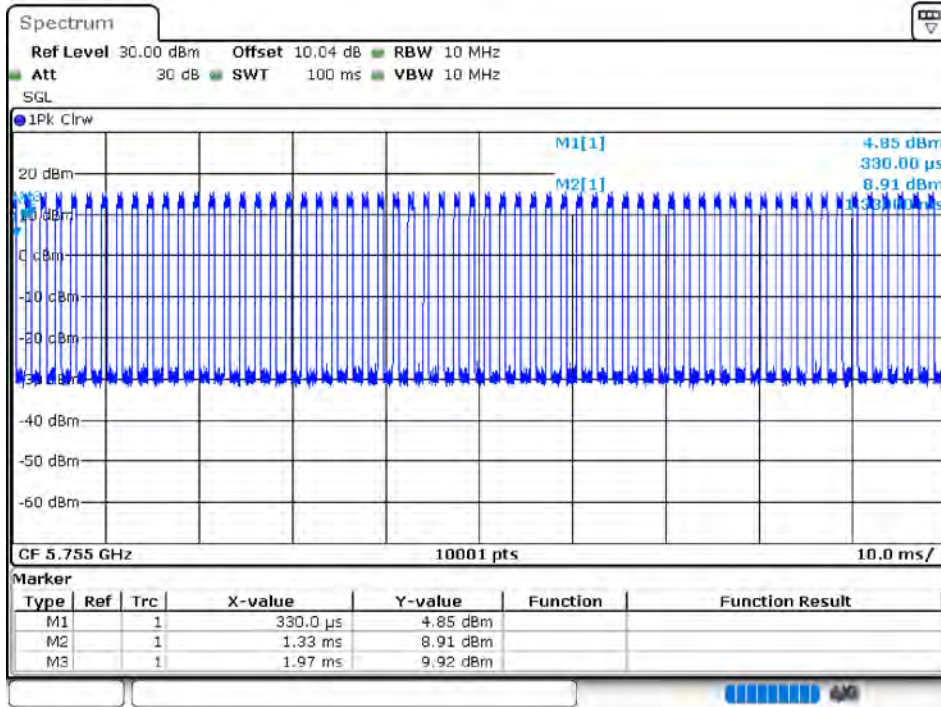


Duty Cycle NVNT ac40 5795MHz Ant 2

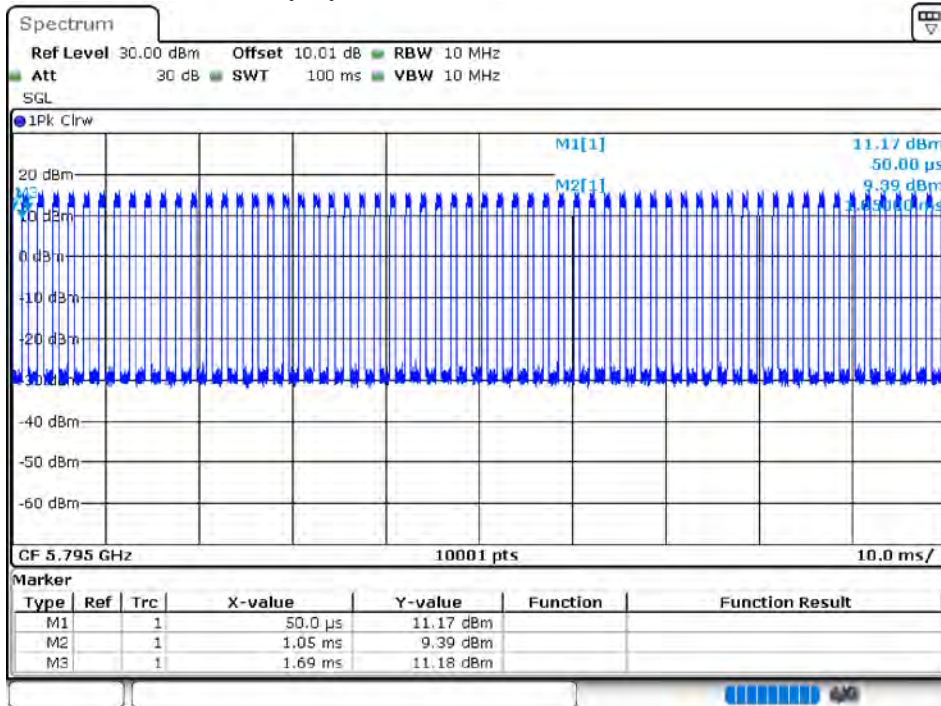


Duty Cycle NVNT ac80 5775MHz Ant 1

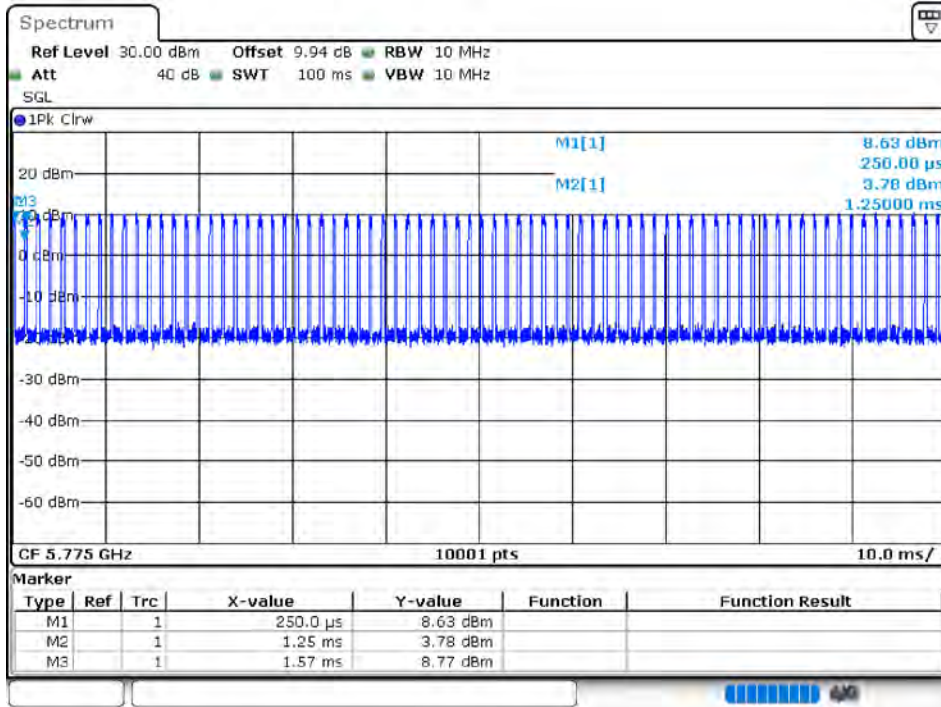


Duty Cycle NVNT ac80 5775MHz Ant 2

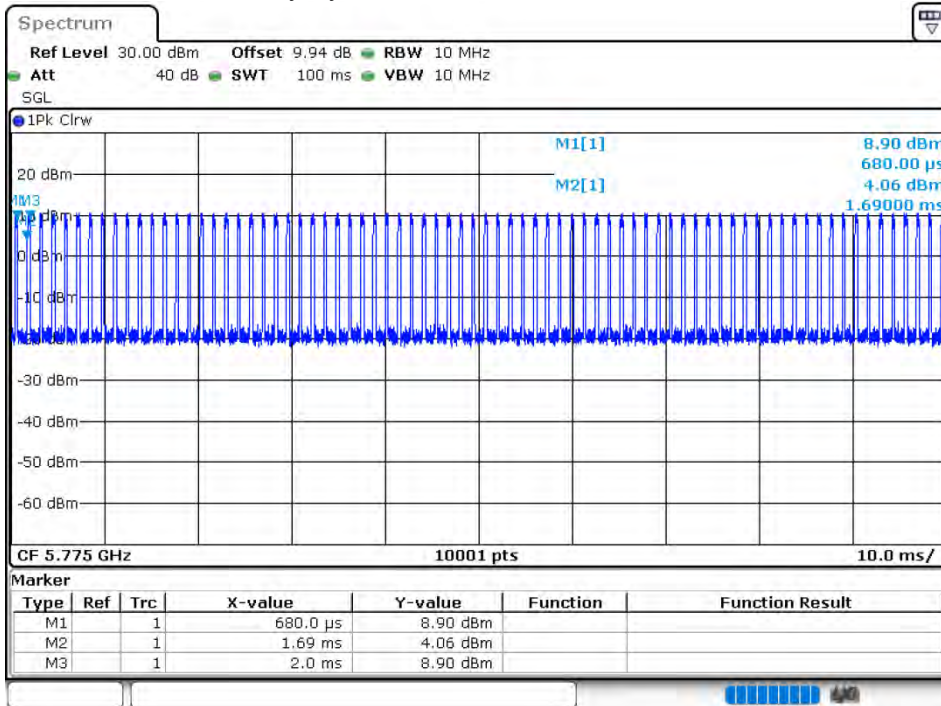

Duty Cycle NVNT n20 5745MHz Ant 1

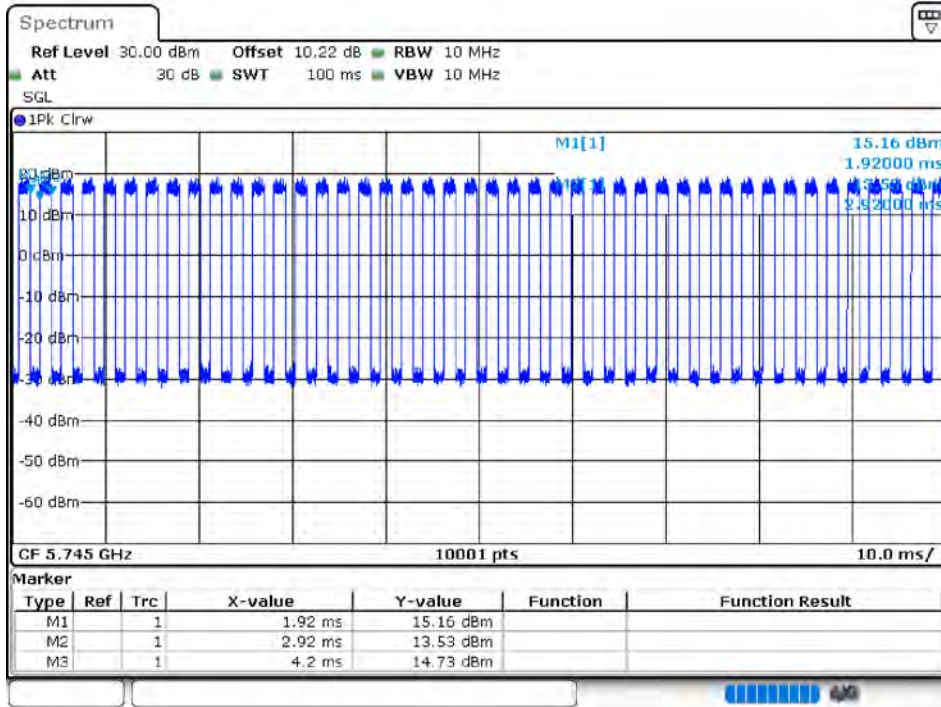


Duty Cycle NVNT n20 5785MHz Ant 1

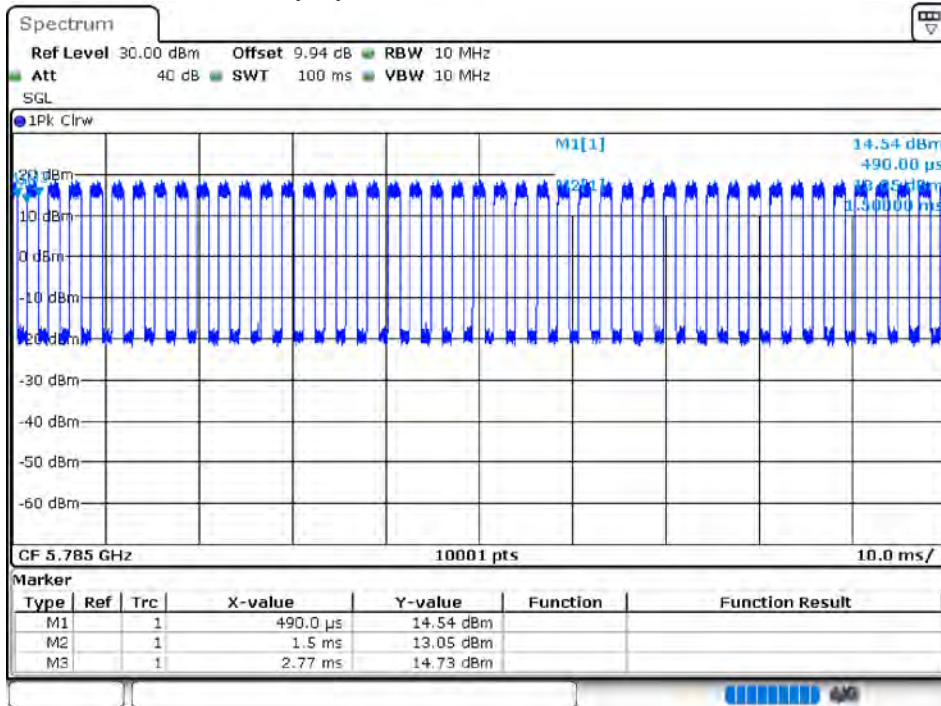





Duty Cycle NVNT n20 5825MHz Ant 1

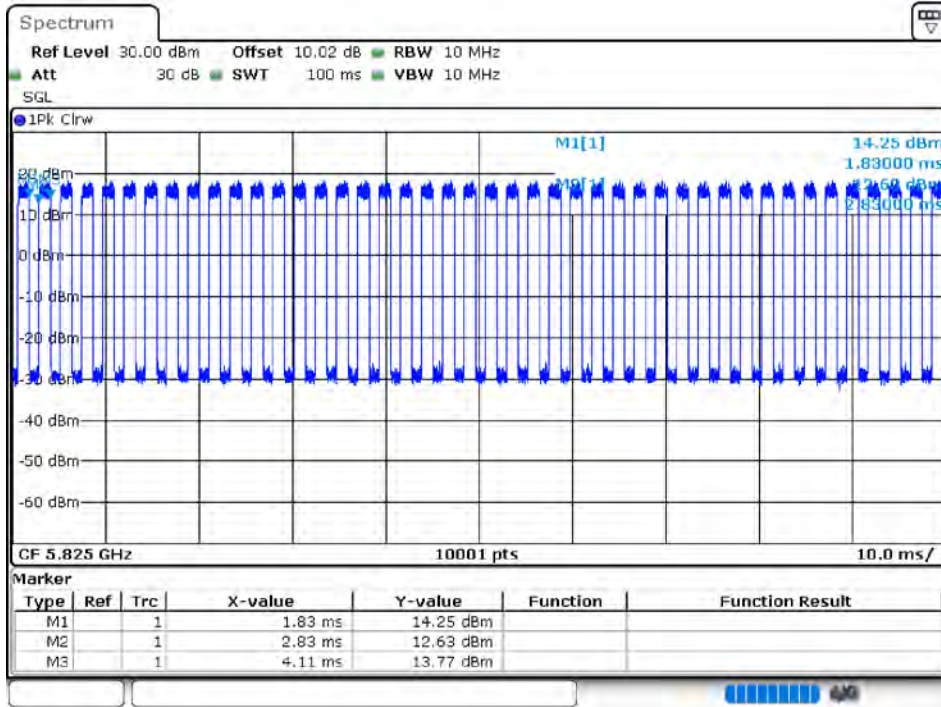


Duty Cycle NVNT n20 5745MHz Ant 2

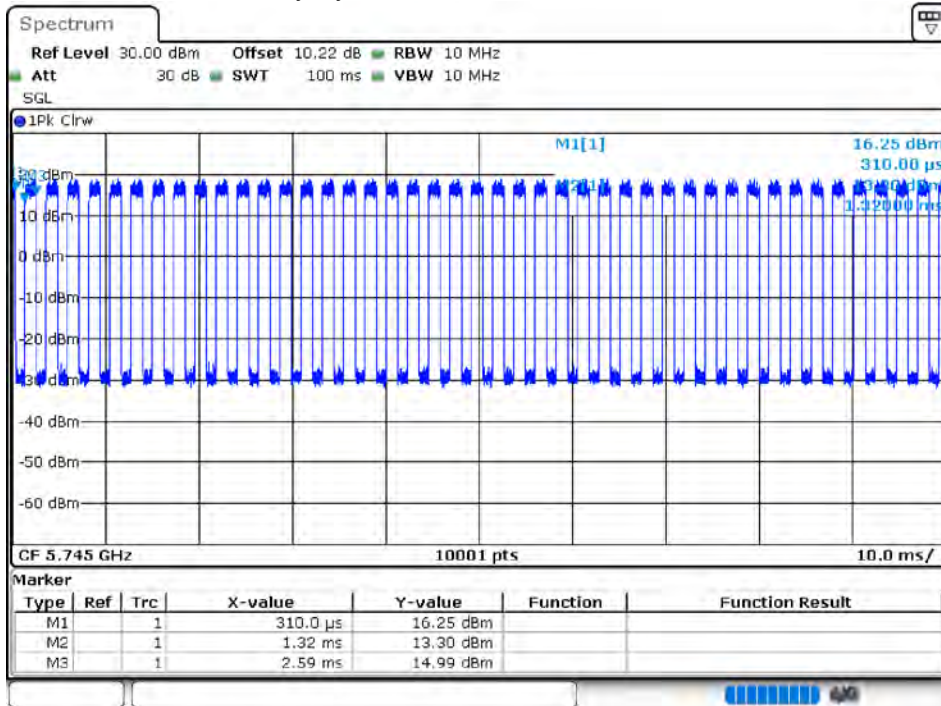


Duty Cycle NVNT n20 5785MHz Ant 2

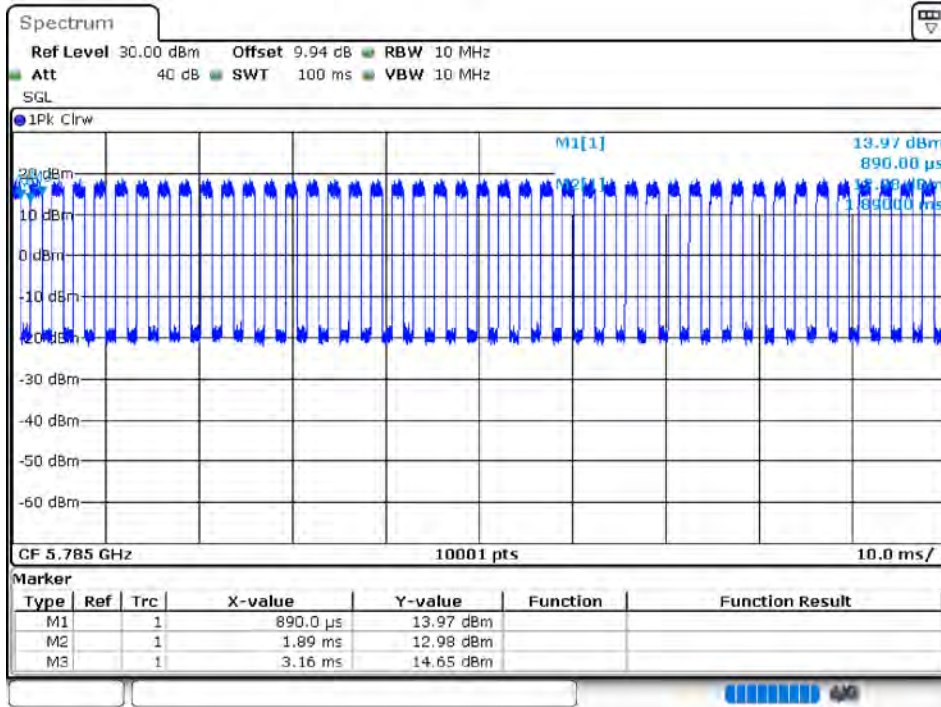

Duty Cycle NVNT n20 5825MHz Ant 2

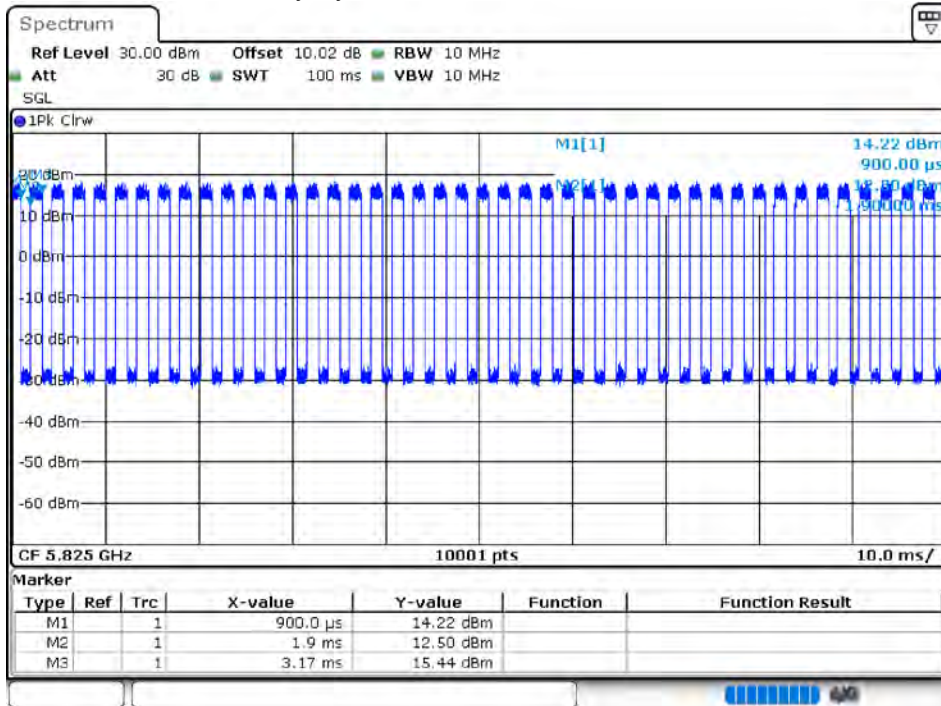

Duty Cycle NVNT n40 5755MHz Ant 1

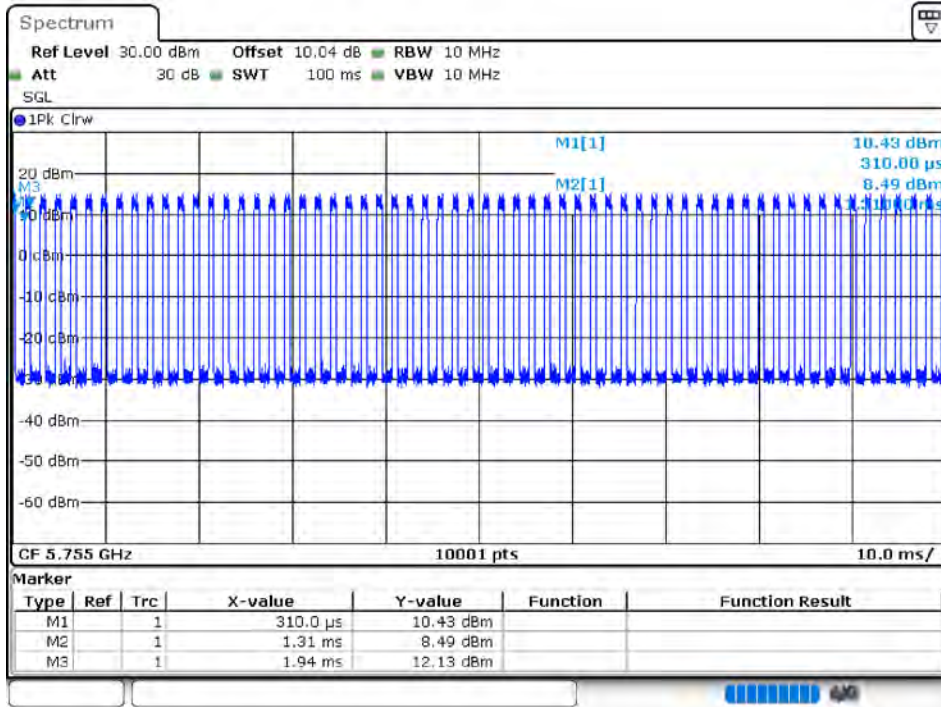


Duty Cycle NVNT n40 5795MHz Ant 1






Duty Cycle NVNT n40 5755MHz Ant 2

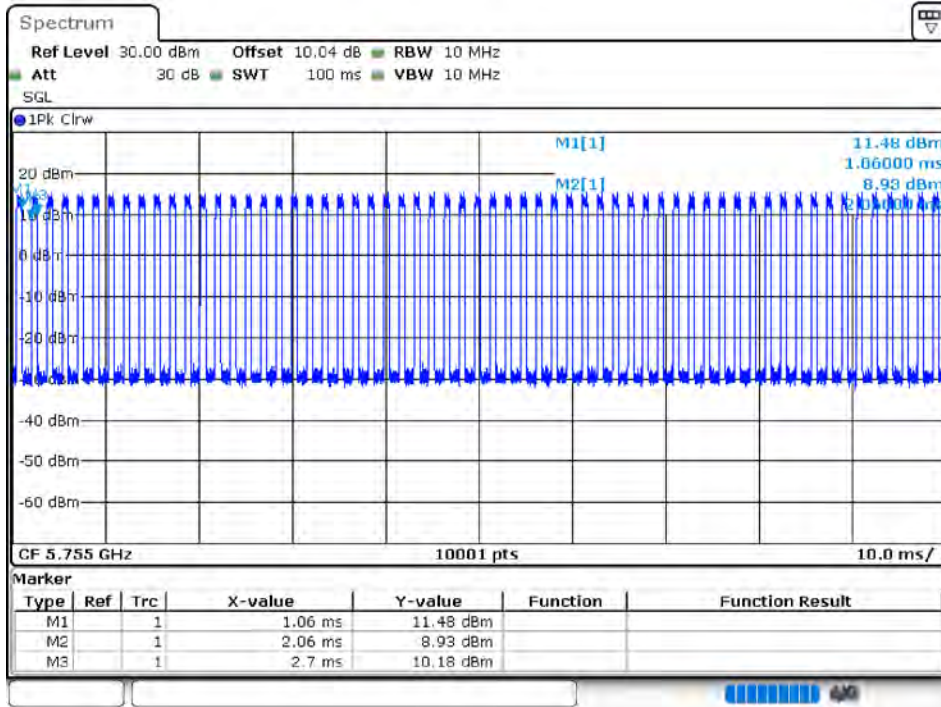

Duty Cycle NVNT n40 5795MHz Ant 2

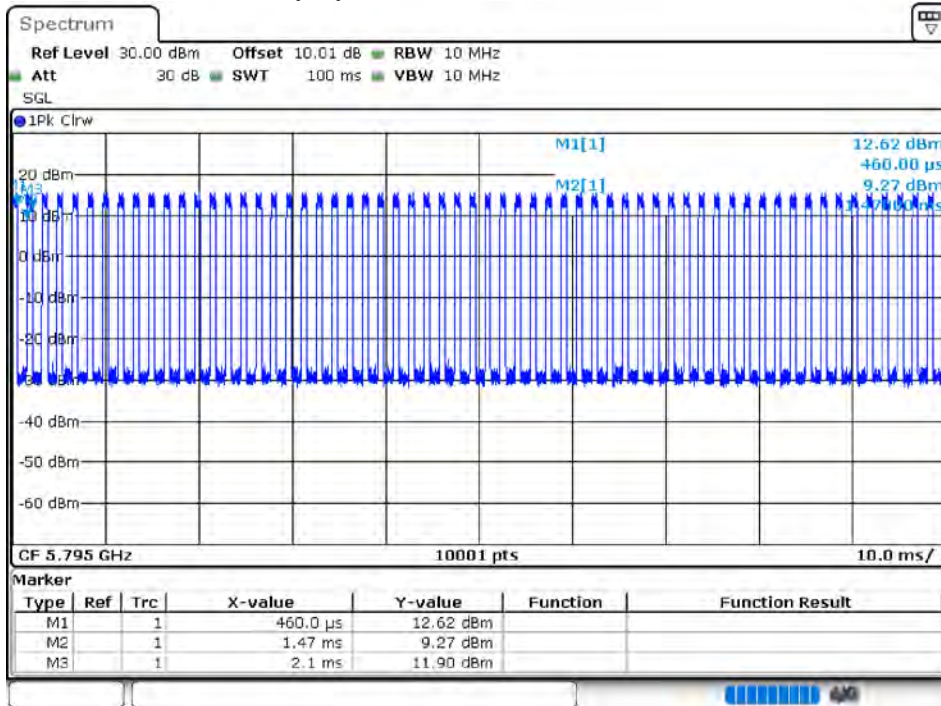


**5.2 MAXIMUM CONDUCTED OUTPUT POWER**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant 1	7.97	2.34	10.31	28.51	Pass
NVNT	a	5785	Ant 1	7.91	2.38	10.29	28.51	Pass
NVNT	a	5825	Ant 1	7.98	2.35	10.33	28.51	Pass
NVNT	a	5745	Ant 2	7.7	2.34	10.04	30	Pass
NVNT	a	5785	Ant 2	7.85	2.4	10.25	30	Pass
NVNT	a	5825	Ant 2	7.82	2.38	10.2	30	Pass
NVNT	ac20	5745	Ant 1	7.62	2.49	10.11	28.51	Pass
NVNT	ac20	5785	Ant 1	7.71	2.5	10.21	28.51	Pass
NVNT	ac20	5825	Ant 1	7.71	2.47	10.18	28.51	Pass
NVNT	ac20	5745	Ant 2	7.32	2.49	9.81	30	Pass
NVNT	ac20	5785	Ant 2	7.48	2.5	9.98	30	Pass
NVNT	ac20	5825	Ant 2	7.49	2.48	9.97	30	Pass
NVNT	ac40	5755	Ant 1	5.89	4.04	9.93	28.51	Pass
NVNT	ac40	5795	Ant 1	5.69	4.04	9.73	28.51	Pass
NVNT	ac40	5755	Ant 2	6.26	4.04	10.3	30	Pass
NVNT	ac40	5795	Ant 2	6.18	4.04	10.22	30	Pass
NVNT	ac80	5775	Ant 1	3.97	6.07	10.04	28.51	Pass
NVNT	ac80	5775	Ant 2	4.03	6.06	10.09	30	Pass
NVNT	n20	5745	Ant 1	7.7	2.49	10.19	28.51	Pass
NVNT	n20	5785	Ant 1	7.71	2.5	10.21	28.51	Pass
NVNT	n20	5825	Ant 1	7.7	2.48	10.18	28.51	Pass
NVNT	n20	5745	Ant 2	7.51	2.5	10.01	30	Pass
NVNT	n20	5785	Ant 2	7.6	2.5	10.1	30	Pass
NVNT	n20	5825	Ant 2	7.59	2.5	10.09	30	Pass
NVNT	n40	5755	Ant 1	5.96	4.04	10	28.51	Pass
NVNT	n40	5795	Ant 1	5.85	4.04	9.89	28.51	Pass
NVNT	n40	5755	Ant 2	6.16	4.06	10.22	30	Pass
NVNT	n40	5795	Ant 2	6.05	4.04	10.09	30	Pass

**5.3 -6DB BANDWIDTH**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant 1	16.428	0.5	Pass
NVNT	a	5785	Ant 1	15.939	0.5	Pass
NVNT	a	5825	Ant 1	16.35	0.5	Pass
NVNT	a	5745	Ant 2	16.512	0.5	Pass
NVNT	a	5785	Ant 2	16.305	0.5	Pass
NVNT	a	5825	Ant 2	16.329	0.5	Pass
NVNT	ac20	5745	Ant 1	17.541	0.5	Pass
NVNT	ac20	5785	Ant 1	17.565	0.5	Pass
NVNT	ac20	5825	Ant 1	17.523	0.5	Pass
NVNT	ac20	5745	Ant 2	17.595	0.5	Pass
NVNT	ac20	5785	Ant 2	17.712	0.5	Pass
NVNT	ac20	5825	Ant 2	17.556	0.5	Pass
NVNT	ac40	5755	Ant 1	34.458	0.5	Pass
NVNT	ac40	5795	Ant 1	35.466	0.5	Pass
NVNT	ac40	5755	Ant 2	36.3	0.5	Pass
NVNT	ac40	5795	Ant 2	34.644	0.5	Pass
NVNT	ac80	5775	Ant 1	74.388	0.5	Pass
NVNT	ac80	5775	Ant 2	75.132	0.5	Pass
NVNT	n20	5745	Ant 1	16.932	0.5	Pass
NVNT	n20	5785	Ant 1	16.935	0.5	Pass
NVNT	n20	5825	Ant 1	17.631	0.5	Pass
NVNT	n20	5745	Ant 2	17.58	0.5	Pass
NVNT	n20	5785	Ant 2	17.592	0.5	Pass
NVNT	n20	5825	Ant 2	16.287	0.5	Pass
NVNT	n40	5755	Ant 1	34.428	0.5	Pass
NVNT	n40	5795	Ant 1	35.532	0.5	Pass
NVNT	n40	5755	Ant 2	35.652	0.5	Pass
NVNT	n40	5795	Ant 2	34.452	0.5	Pass

-6dB Bandwidth NVNT a 5745MHz Ant 1

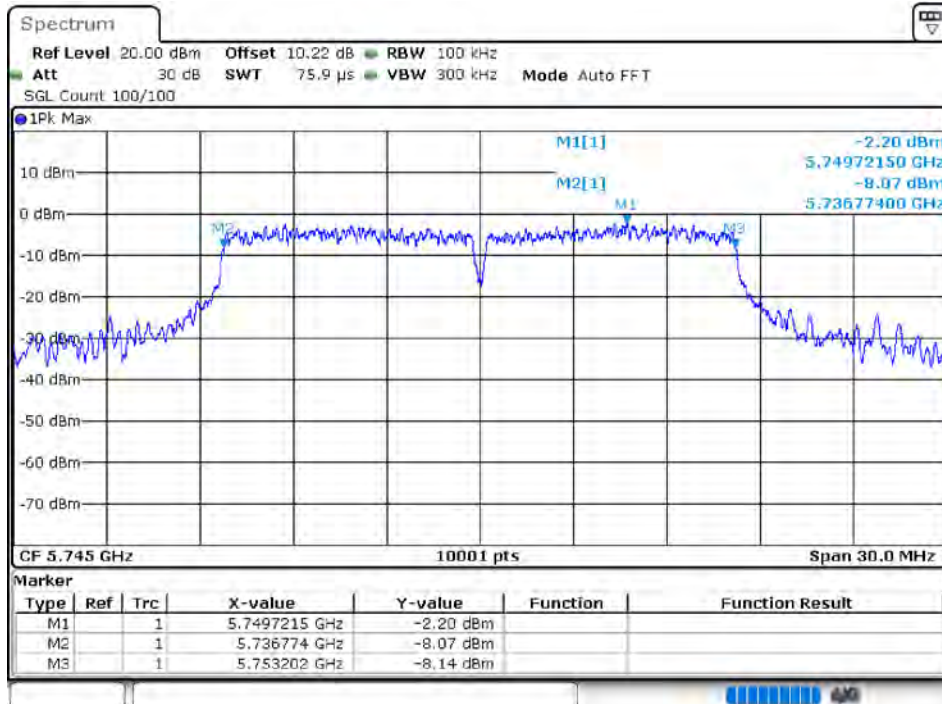





-6dB Bandwidth NVNT a 5785MHz Ant 1

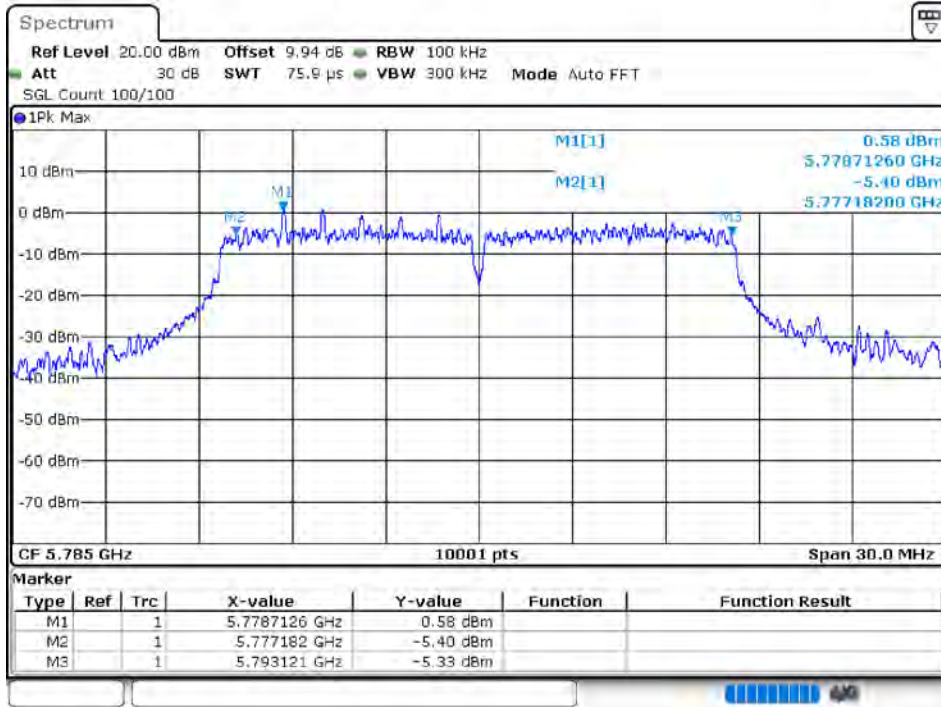


-6dB Bandwidth NVNT a 5825MHz Ant 1

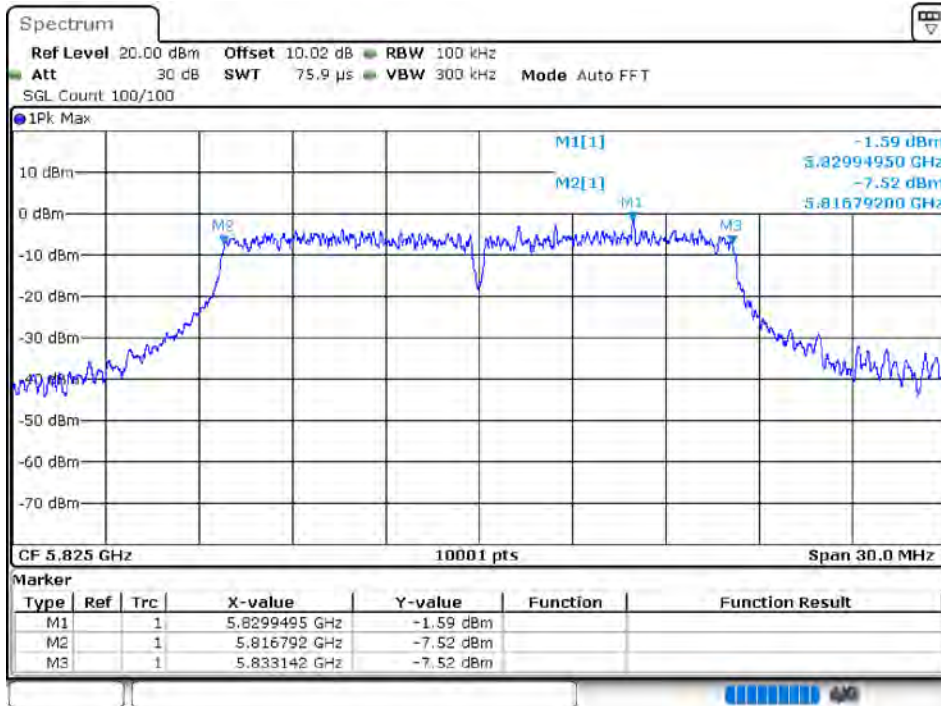


-6dB Bandwidth NVNT a 5745MHz Ant 2

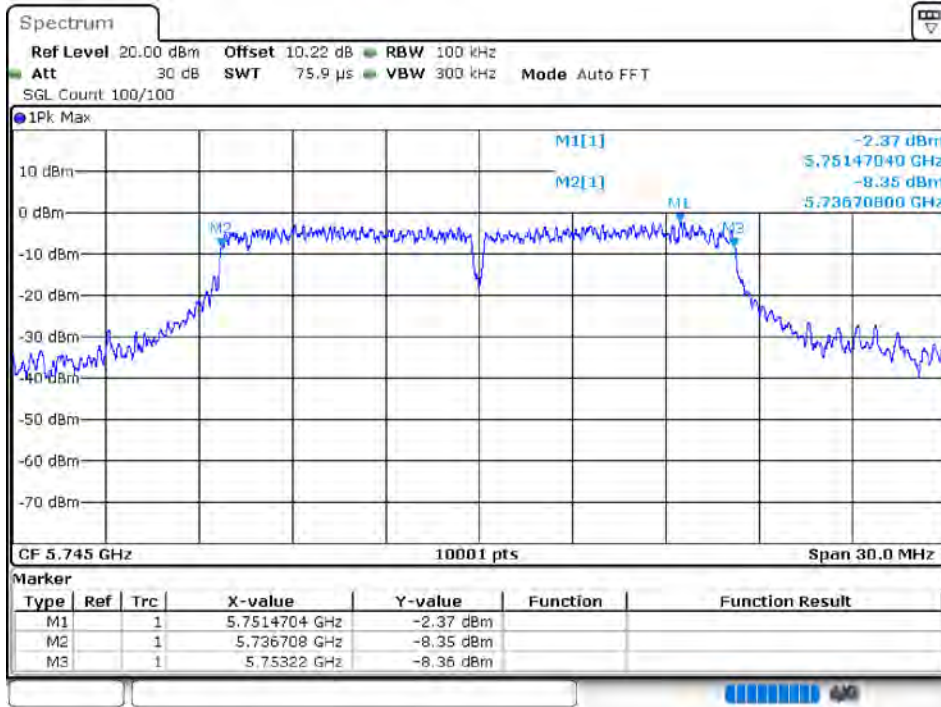


-6dB Bandwidth NVNT a 5785MHz Ant 2

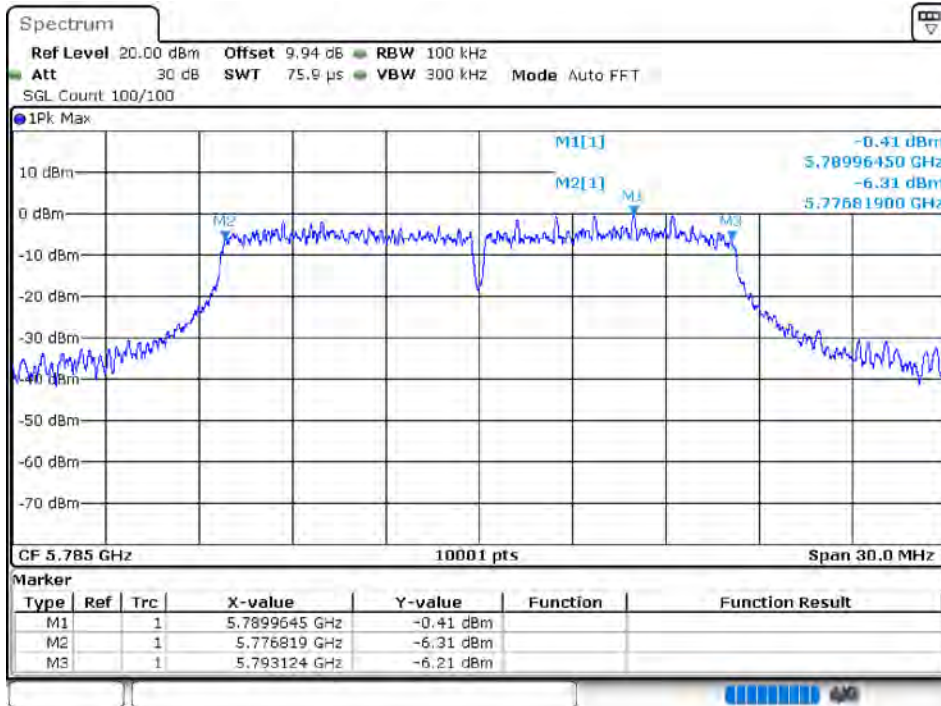

-6dB Bandwidth NVNT a 5825MHz Ant 2

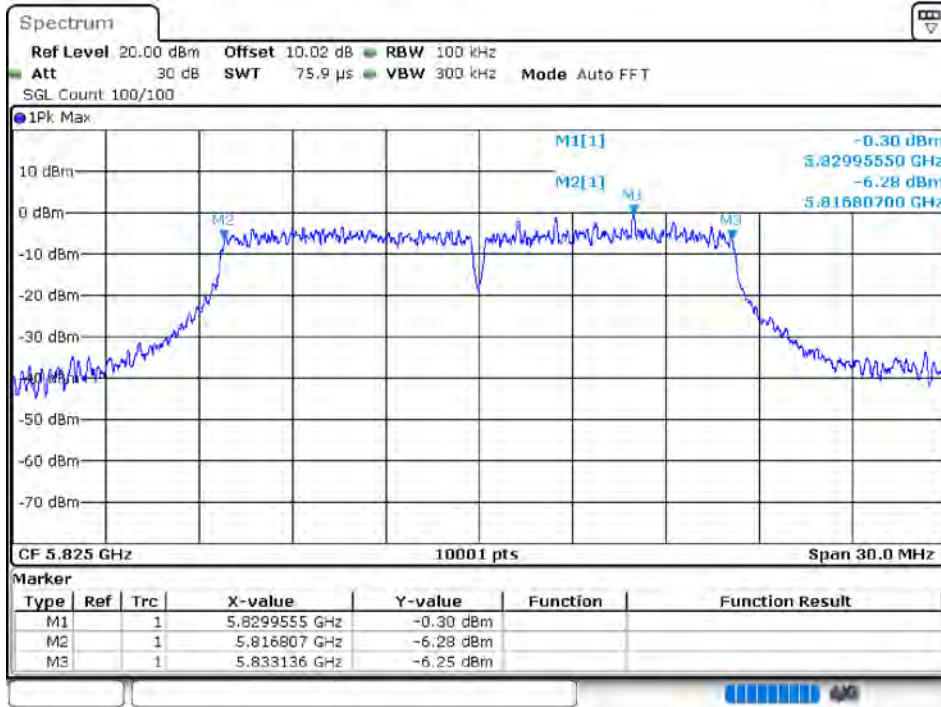


-6dB Bandwidth NVNT ac20 5745MHz Ant 1

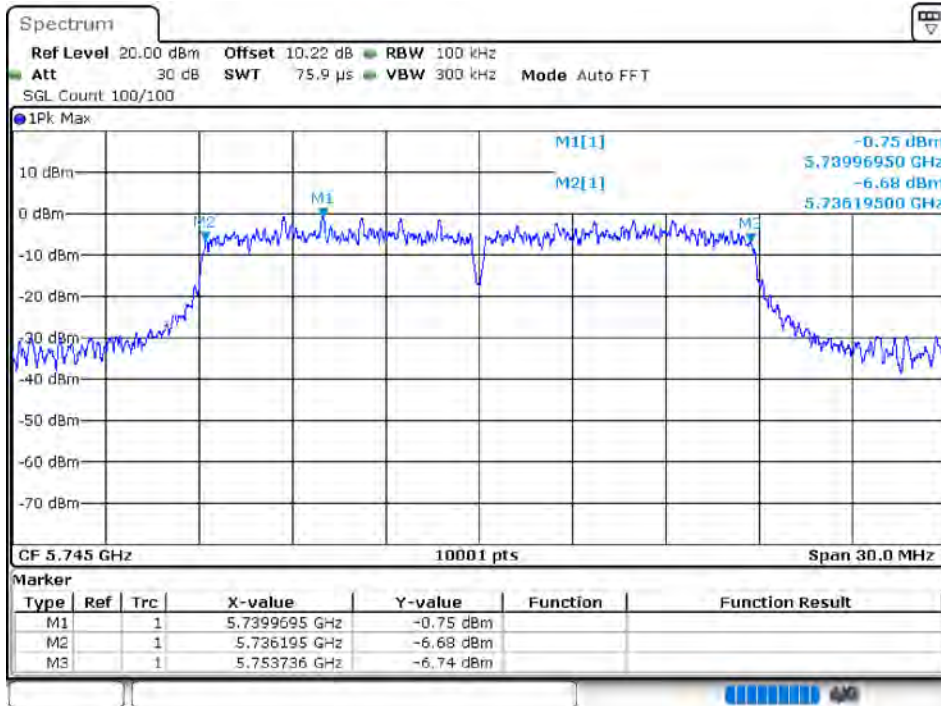





-6dB Bandwidth NVNT ac20 5785MHz Ant 1

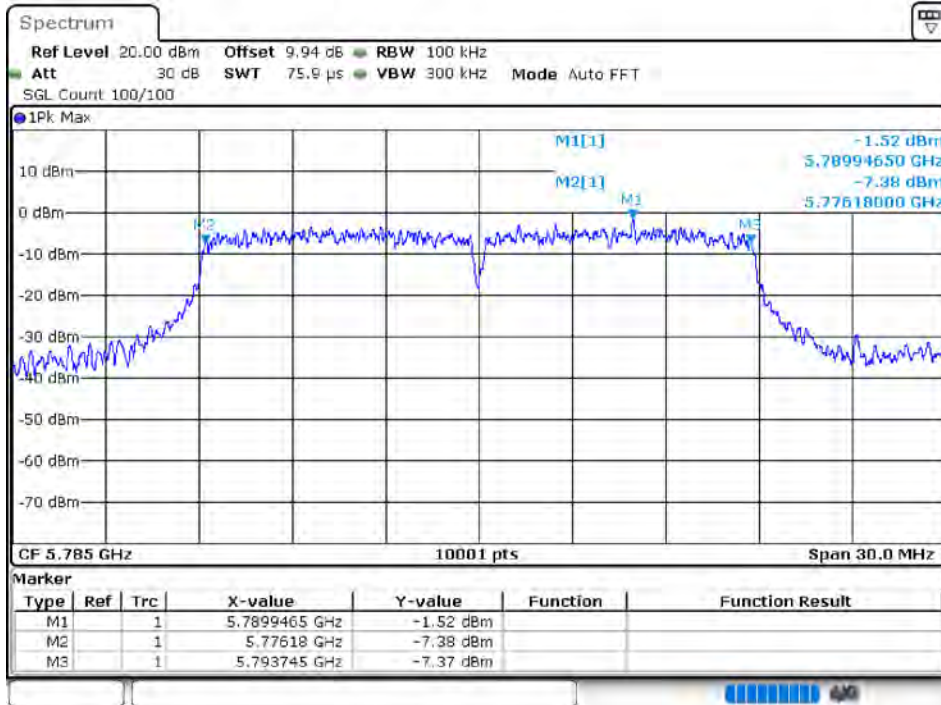


-6dB Bandwidth NVNT ac20 5825MHz Ant 1

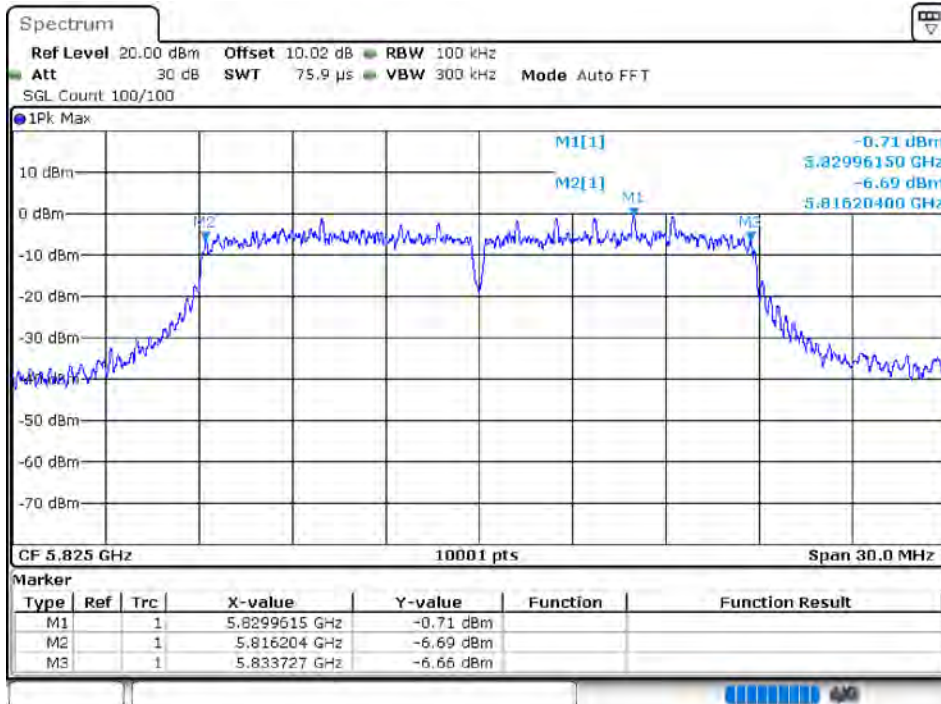


-6dB Bandwidth NVNT ac20 5745MHz Ant 2

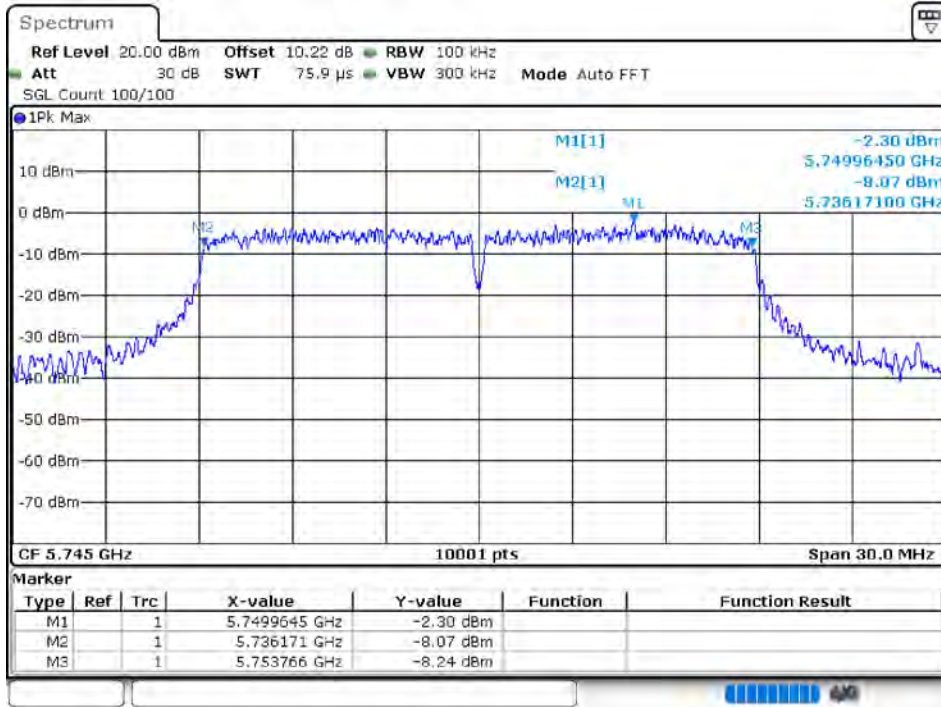


-6dB Bandwidth NVNT ac20 5785MHz Ant 2

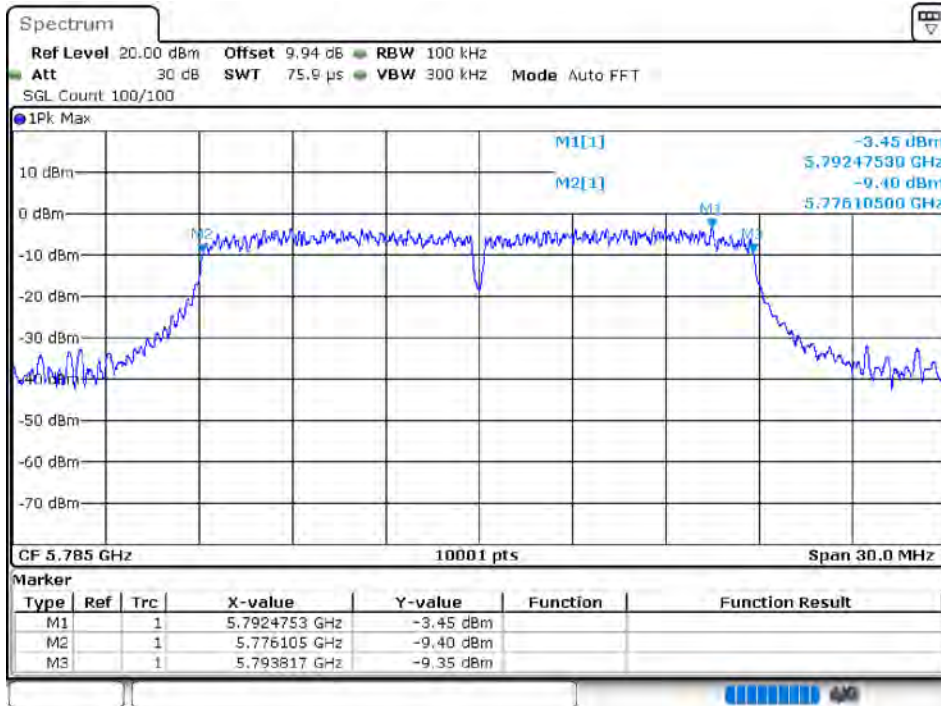

-6dB Bandwidth NVNT ac20 5825MHz Ant 2

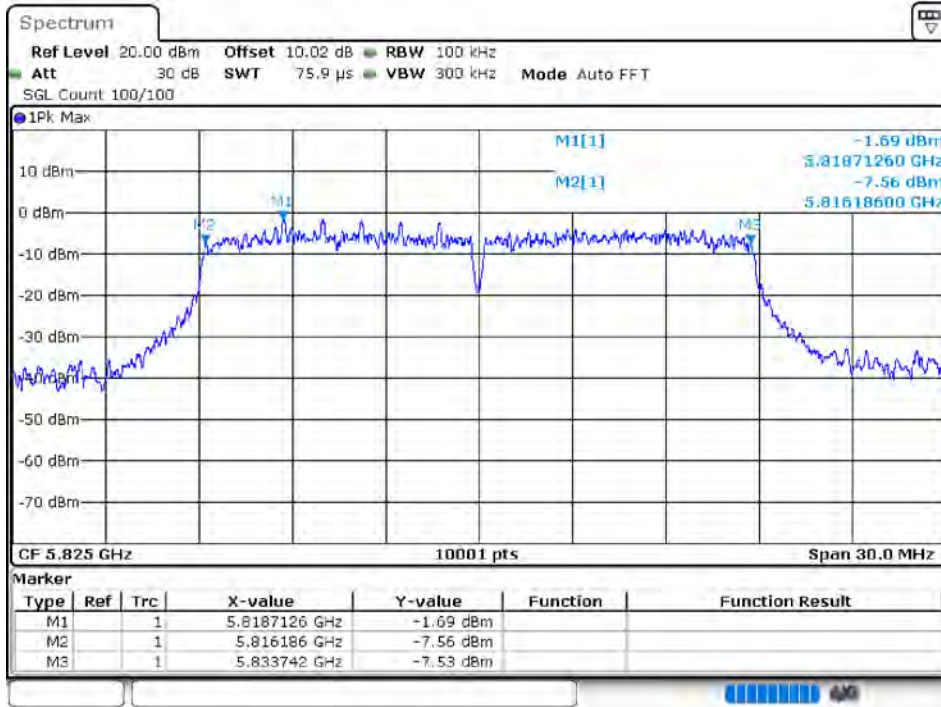


-6dB Bandwidth NVNT ac40 5755MHz Ant 1

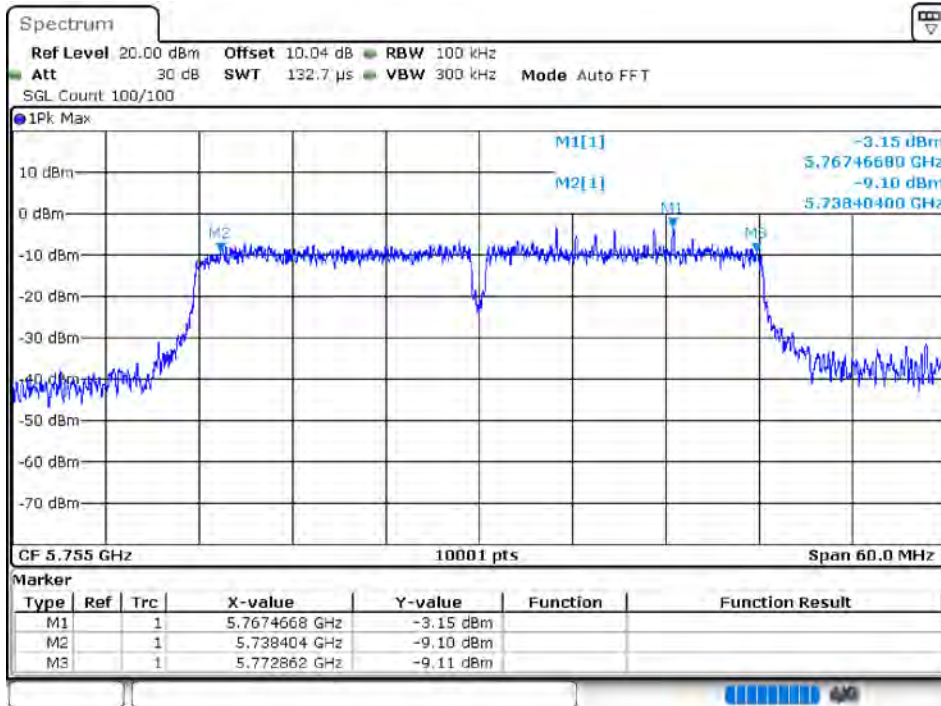





-6dB Bandwidth NVNT ac40 5795MHz Ant 1

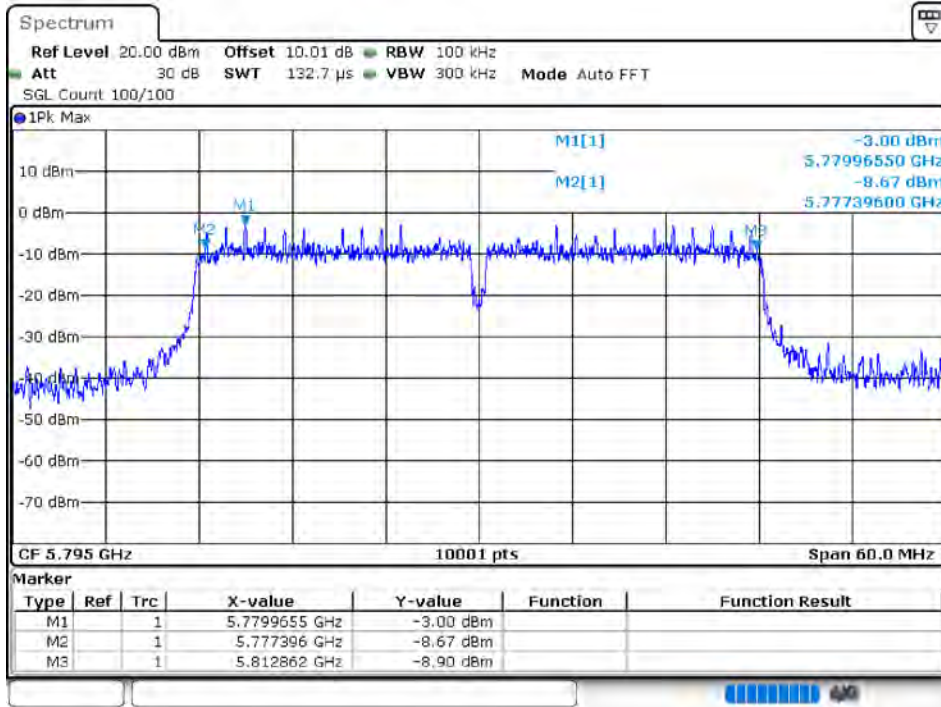


-6dB Bandwidth NVNT ac40 5755MHz Ant 2

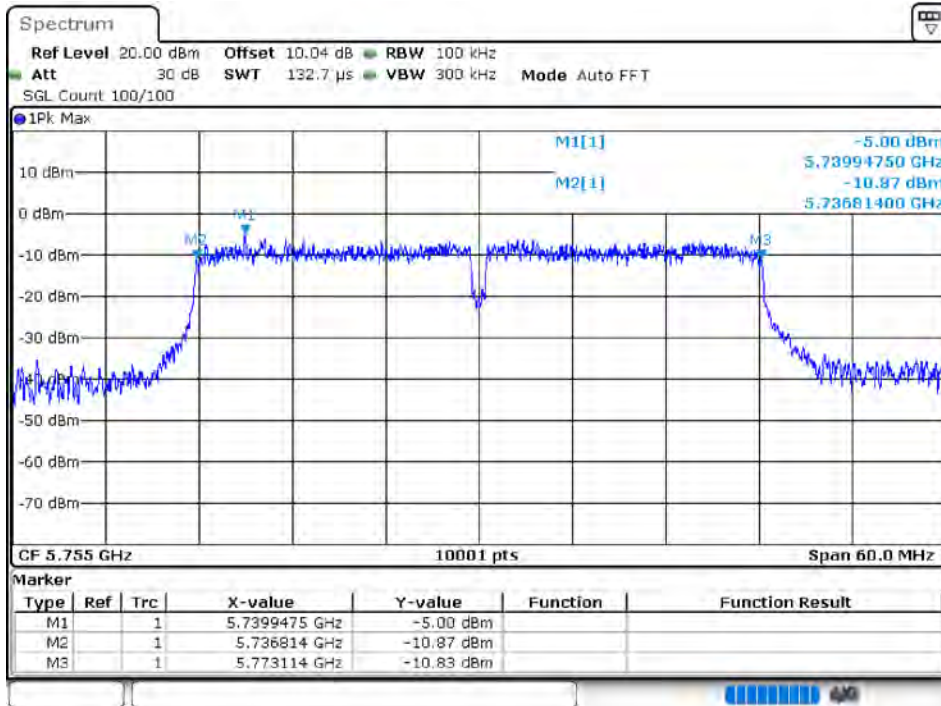


-6dB Bandwidth NVNT ac40 5795MHz Ant 2

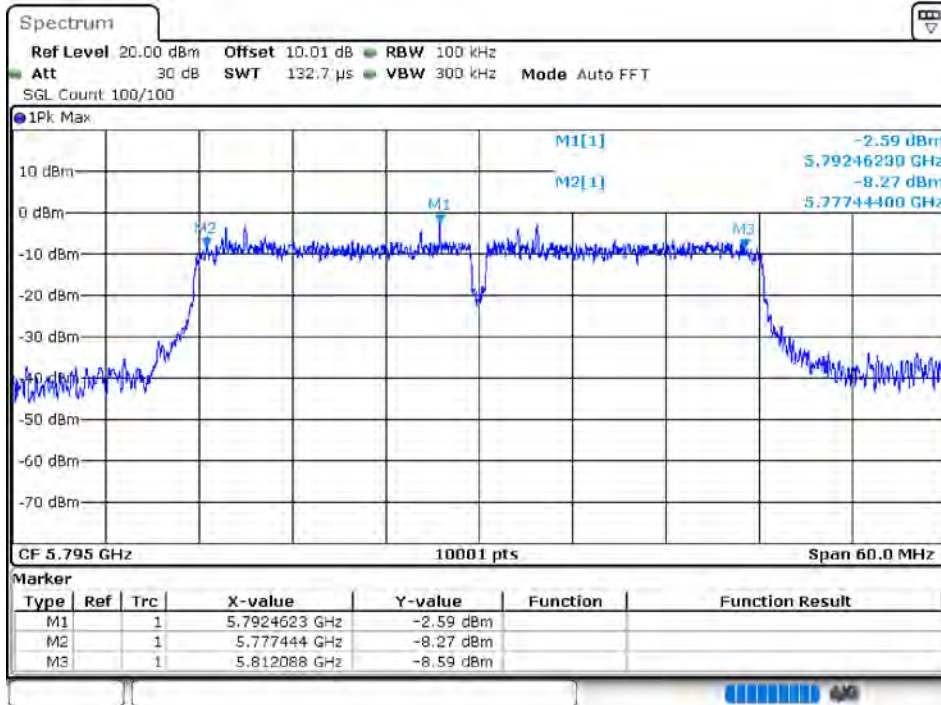


-6dB Bandwidth NVNT ac80 5775MHz Ant 1

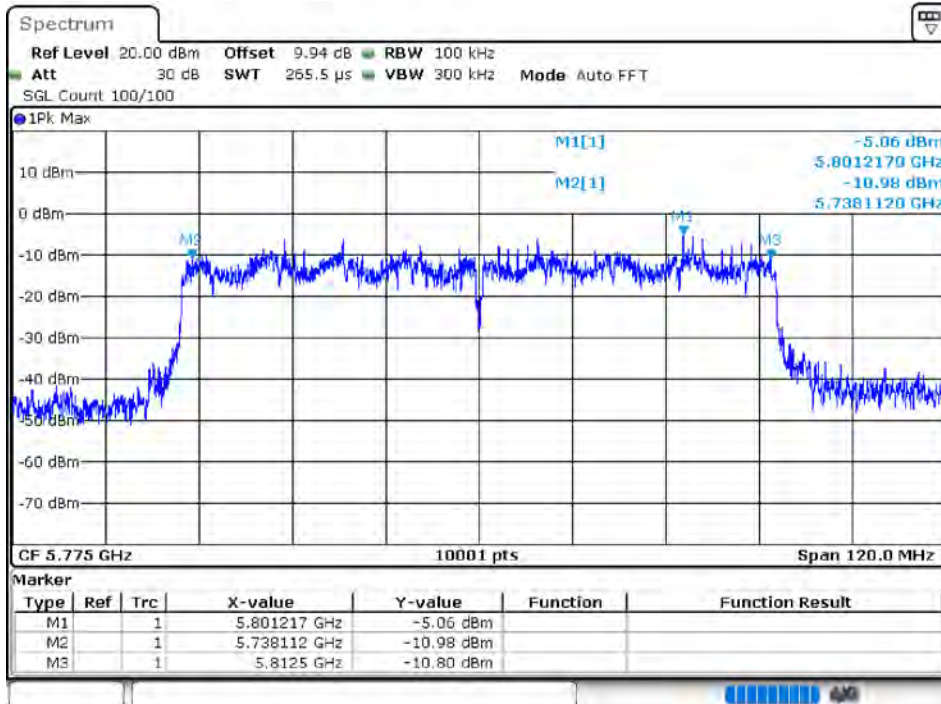

-6dB Bandwidth NVNT ac80 5775MHz Ant 2

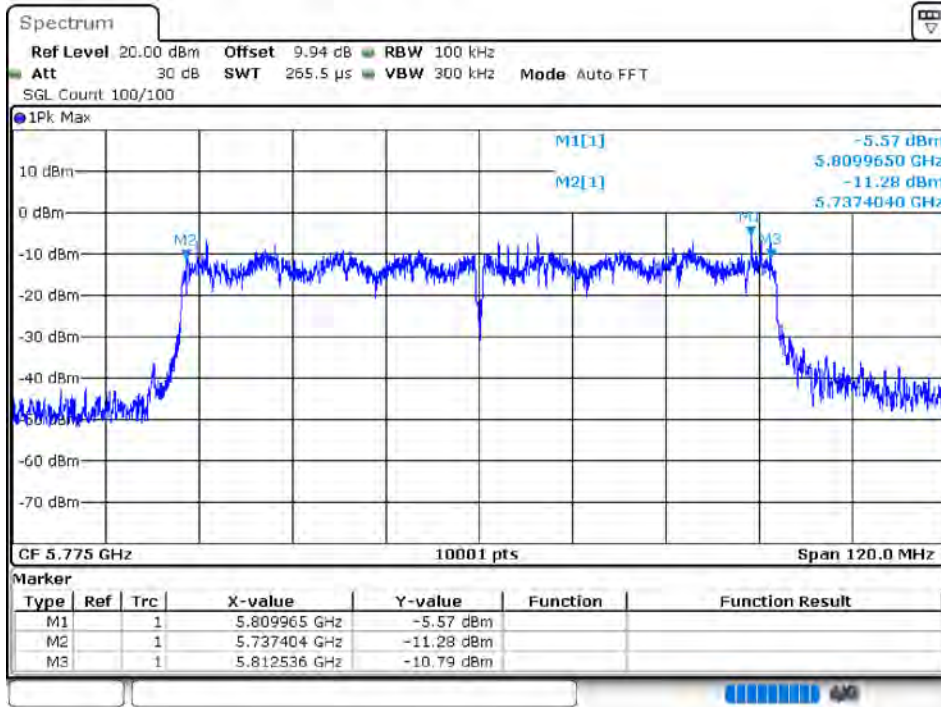


-6dB Bandwidth NVNT n20 5745MHz Ant 1

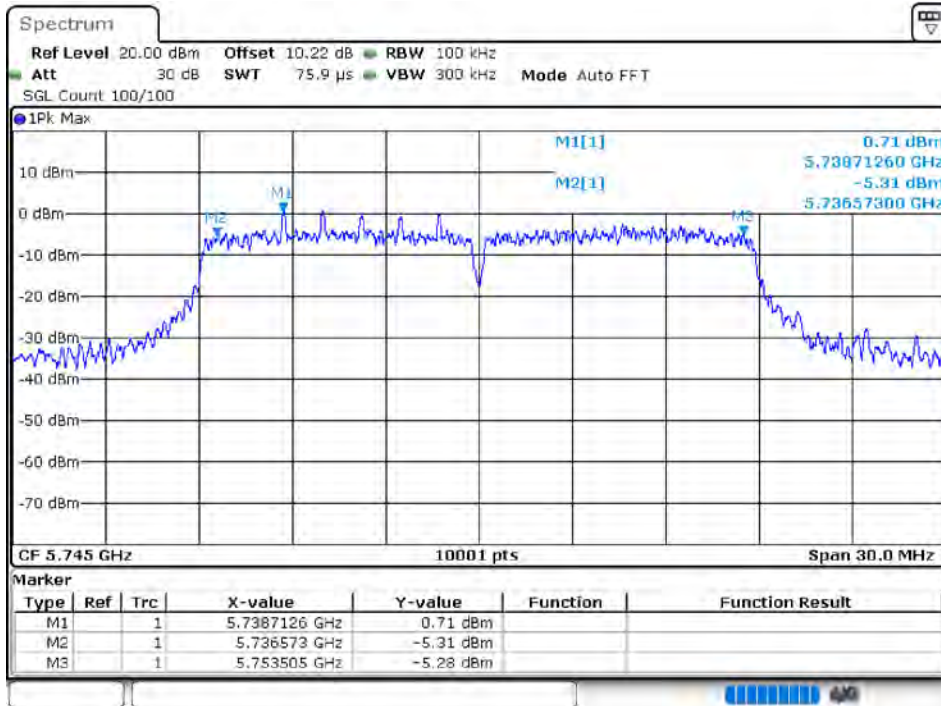





-6dB Bandwidth NVNT n20 5785MHz Ant 1

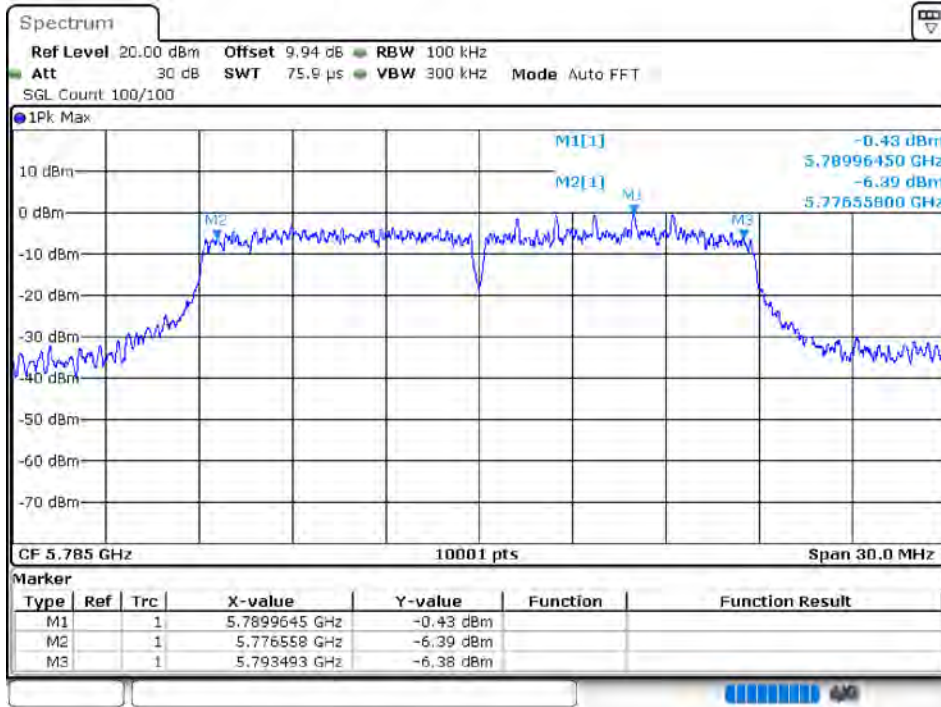


-6dB Bandwidth NVNT n20 5825MHz Ant 1

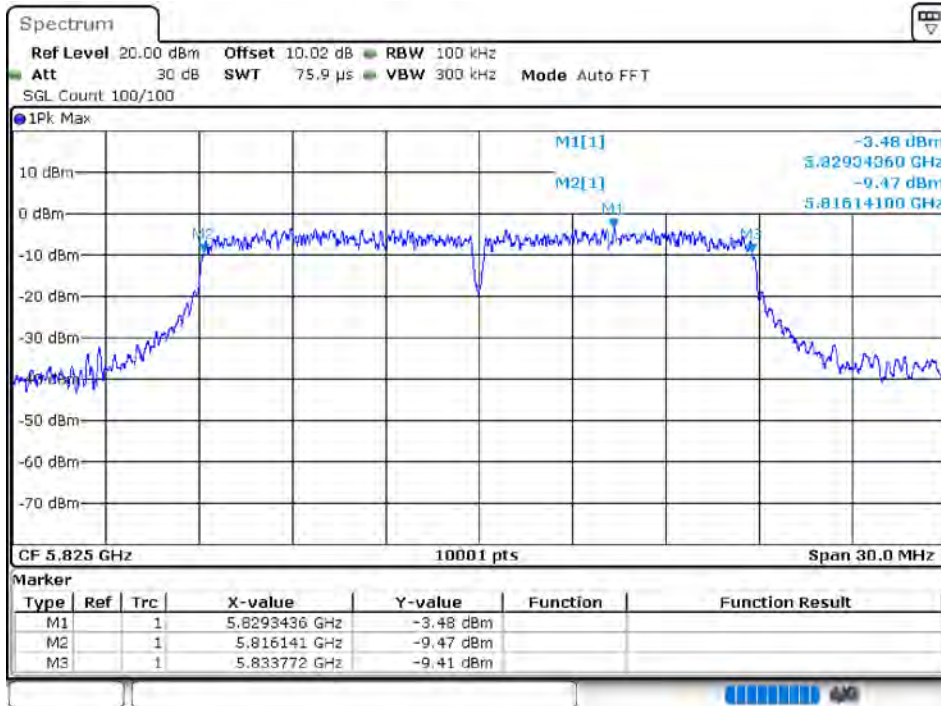


-6dB Bandwidth NVNT n20 5745MHz Ant 2

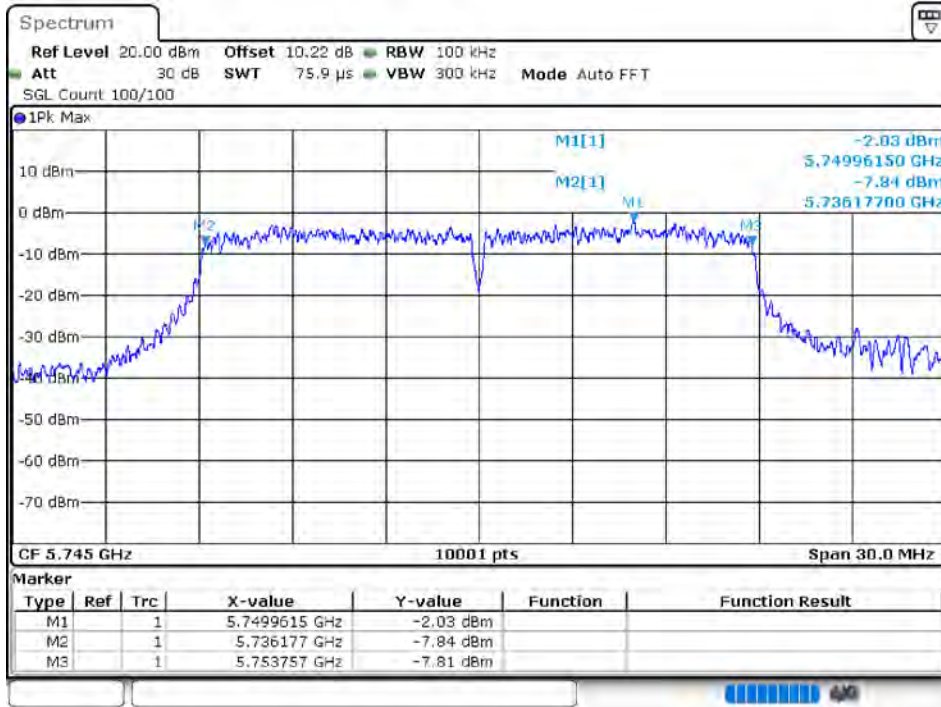


-6dB Bandwidth NVNT n20 5785MHz Ant 2

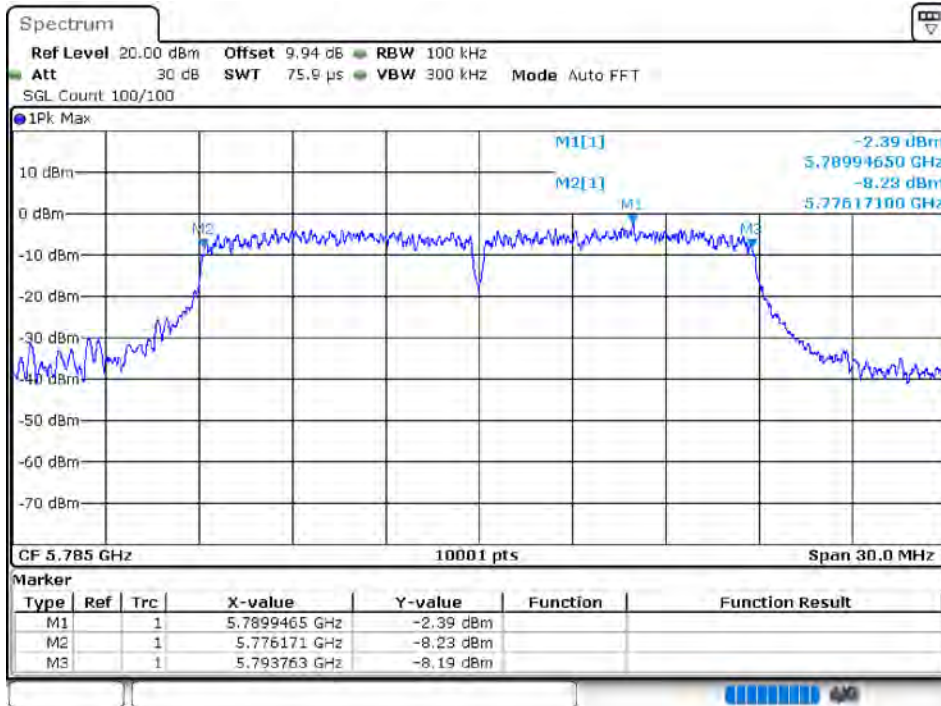

-6dB Bandwidth NVNT n20 5825MHz Ant 2

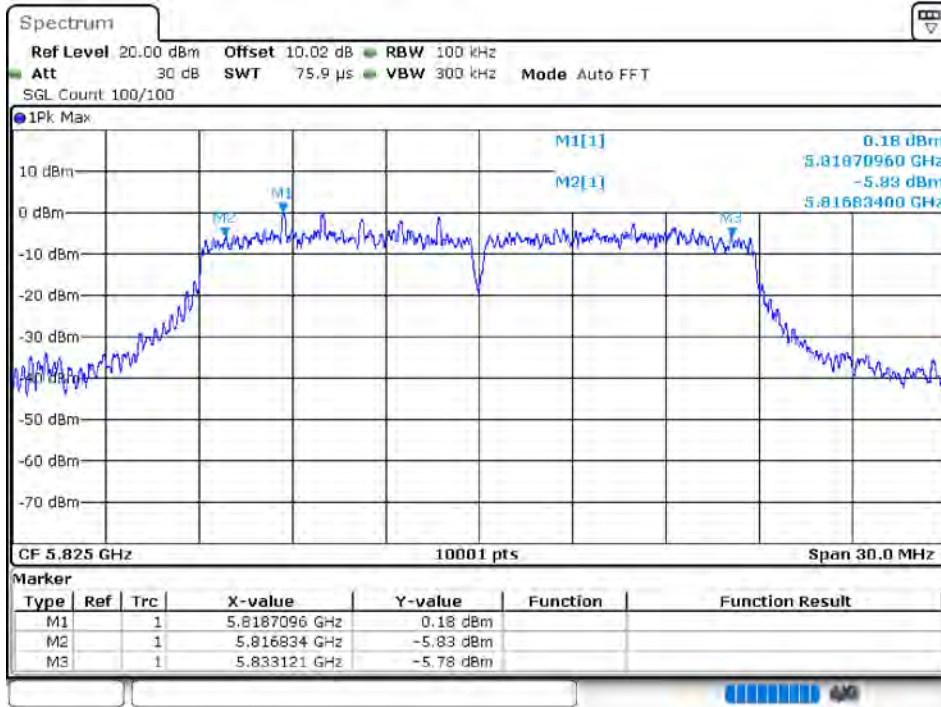


-6dB Bandwidth NVNT n40 5755MHz Ant 1

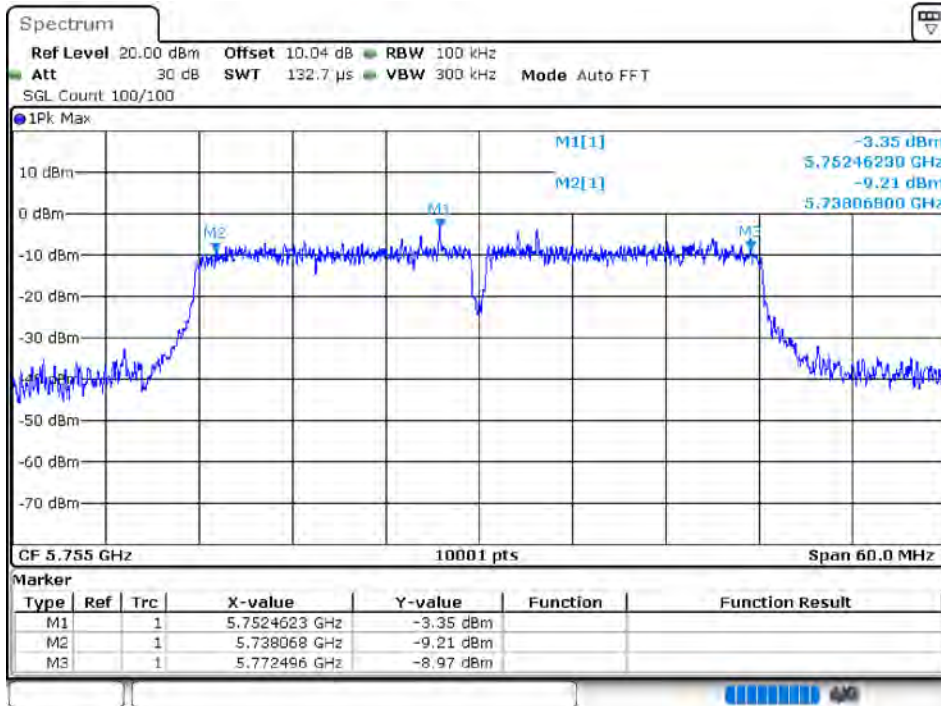





-6dB Bandwidth NVNT n40 5795MHz Ant 1

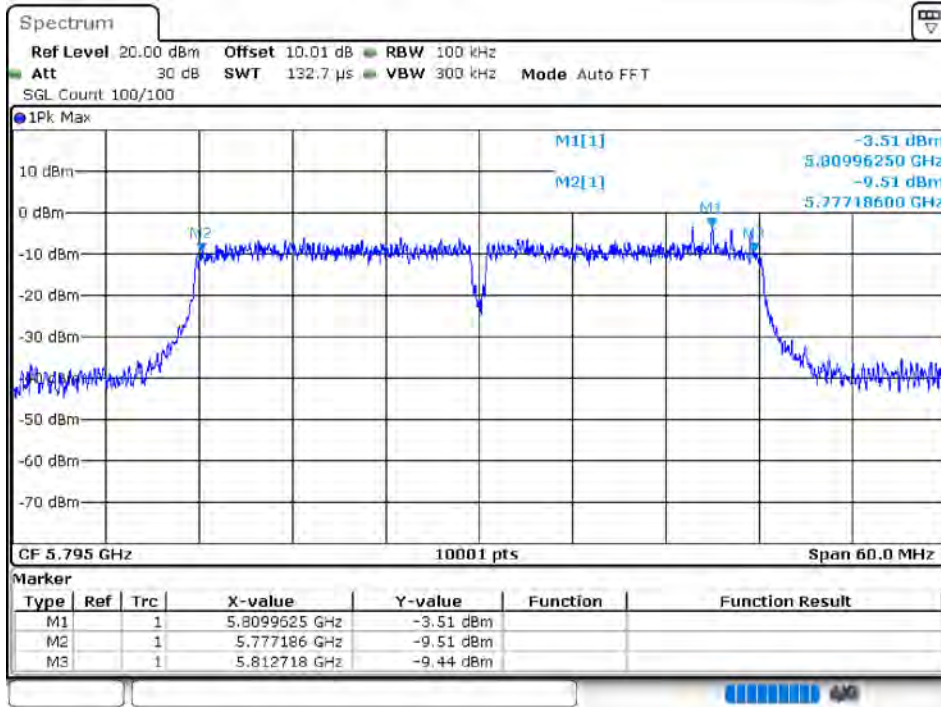

-6dB Bandwidth NVNT n40 5755MHz Ant 2

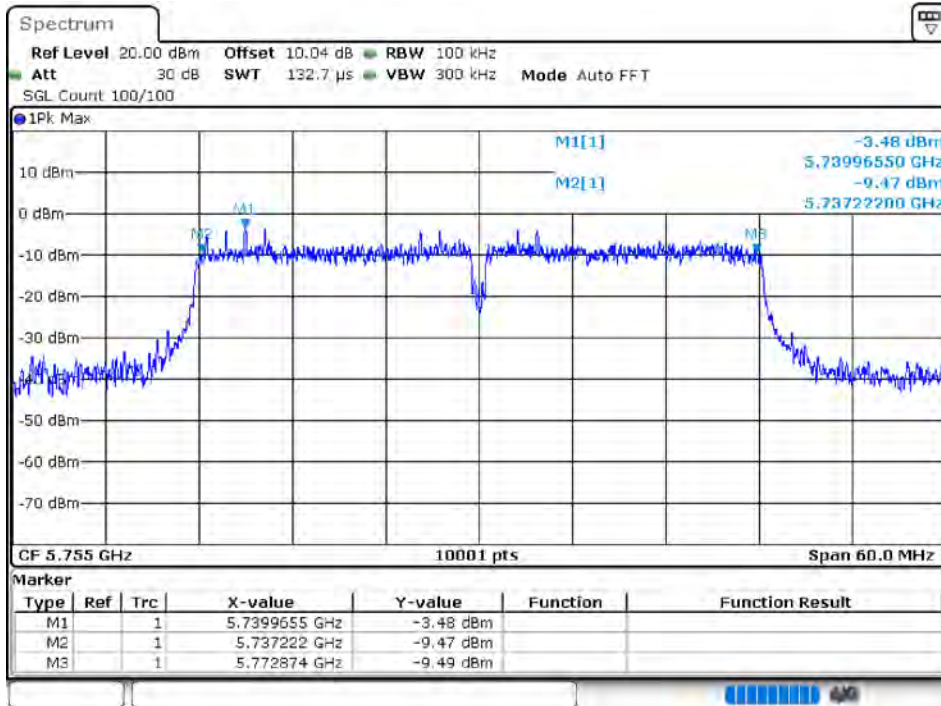


-6dB Bandwidth NVNT n40 5795MHz Ant 2

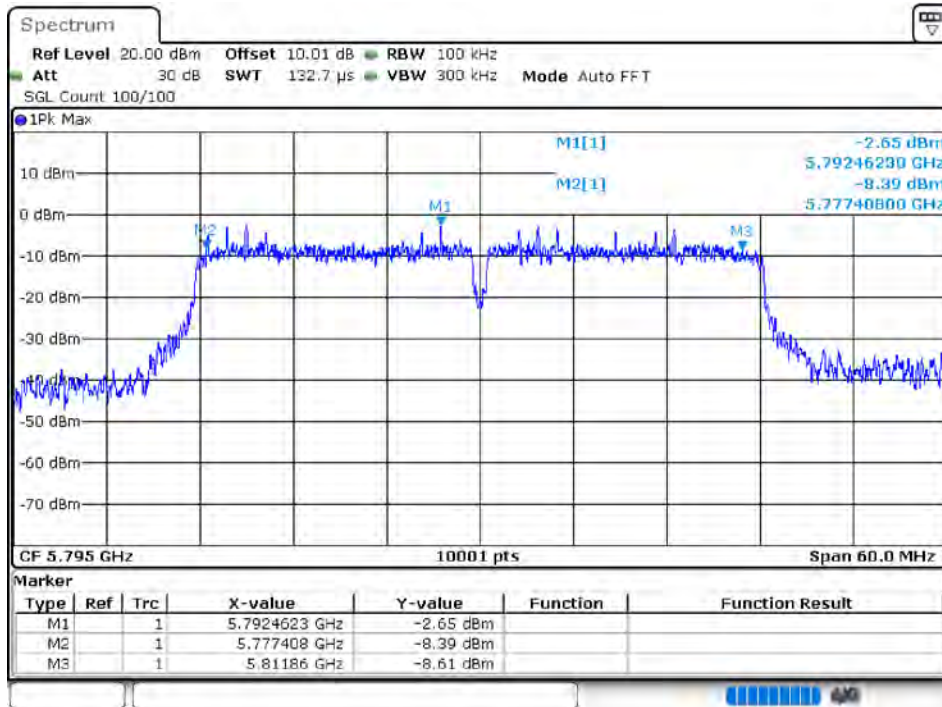

### 5.4 OCCUPIED CHANNEL BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant 1	16.615
NVNT	a	5785	Ant 1	16.576
NVNT	a	5825	Ant 1	16.507
NVNT	a	5745	Ant 2	16.567
NVNT	a	5785	Ant 2	16.504
NVNT	a	5825	Ant 2	16.525
NVNT	ac20	5745	Ant 1	17.689
NVNT	ac20	5785	Ant 1	17.665
NVNT	ac20	5825	Ant 1	17.608
NVNT	ac20	5745	Ant 2	17.698
NVNT	ac20	5785	Ant 2	17.647
NVNT	ac20	5825	Ant 2	17.557
NVNT	ac40	5755	Ant 1	36.236
NVNT	ac40	5795	Ant 1	36.206
NVNT	ac40	5755	Ant 2	36.218
NVNT	ac40	5795	Ant 2	36.242
NVNT	ac80	5775	Ant 1	75.484
NVNT	ac80	5775	Ant 2	75.424
NVNT	n20	5745	Ant 1	17.695
NVNT	n20	5785	Ant 1	17.713
NVNT	n20	5825	Ant 1	17.665
NVNT	n20	5745	Ant 2	17.578
NVNT	n20	5785	Ant 2	17.689
NVNT	n20	5825	Ant 2	17.566
NVNT	n40	5755	Ant 1	36.248
NVNT	n40	5795	Ant 1	36.212
NVNT	n40	5755	Ant 2	36.26
NVNT	n40	5795	Ant 2	36.23

OBW NVNT a 5745MHz Ant 1

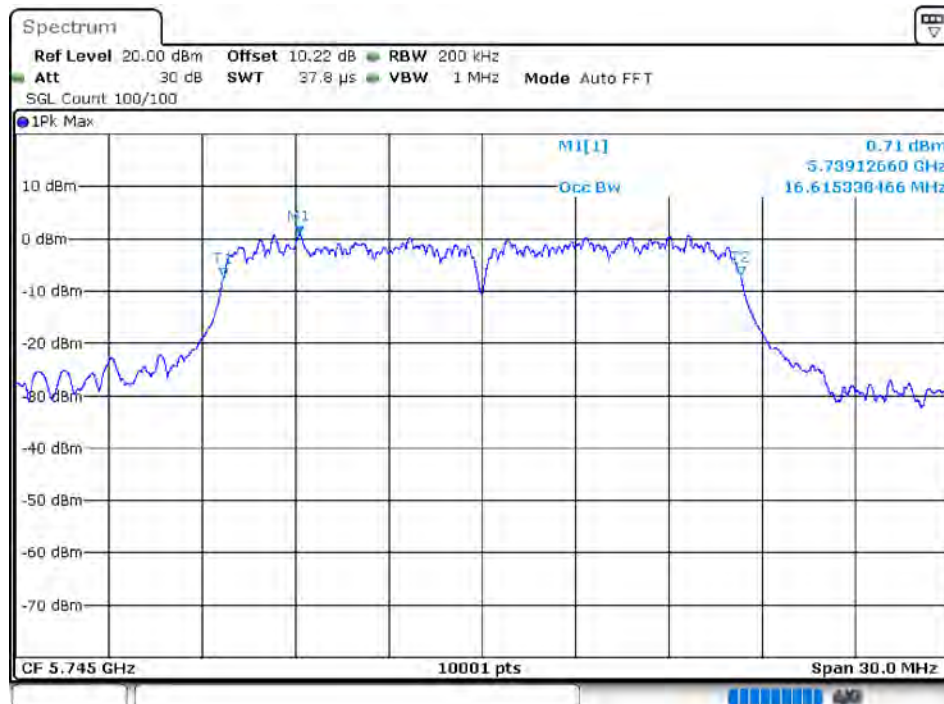





OBW NVNT a 5785MHz Ant 1

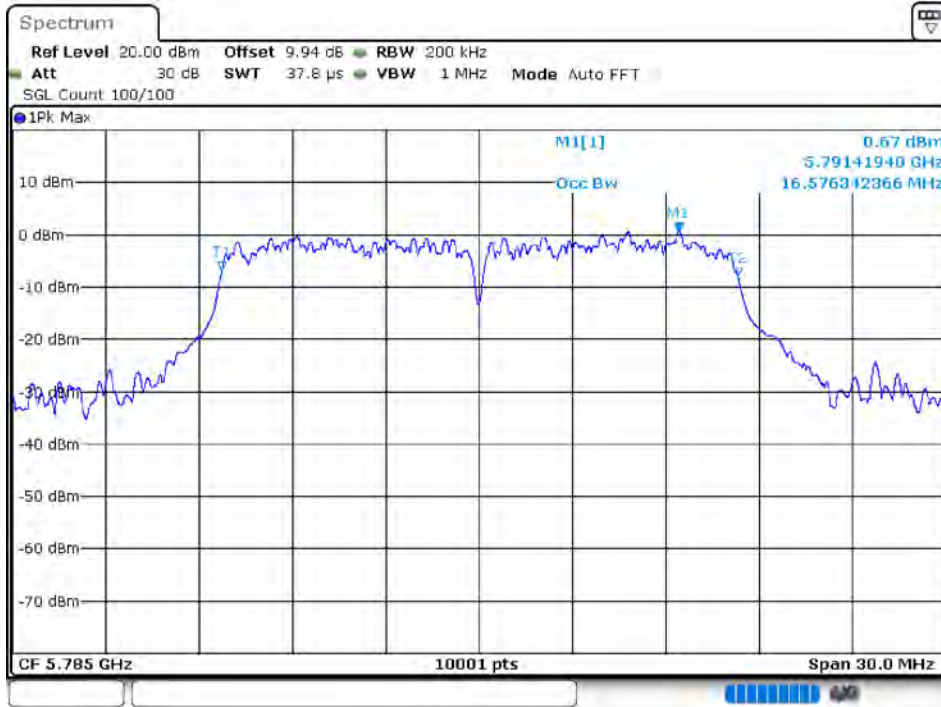


OBW NVNT a 5825MHz Ant 1

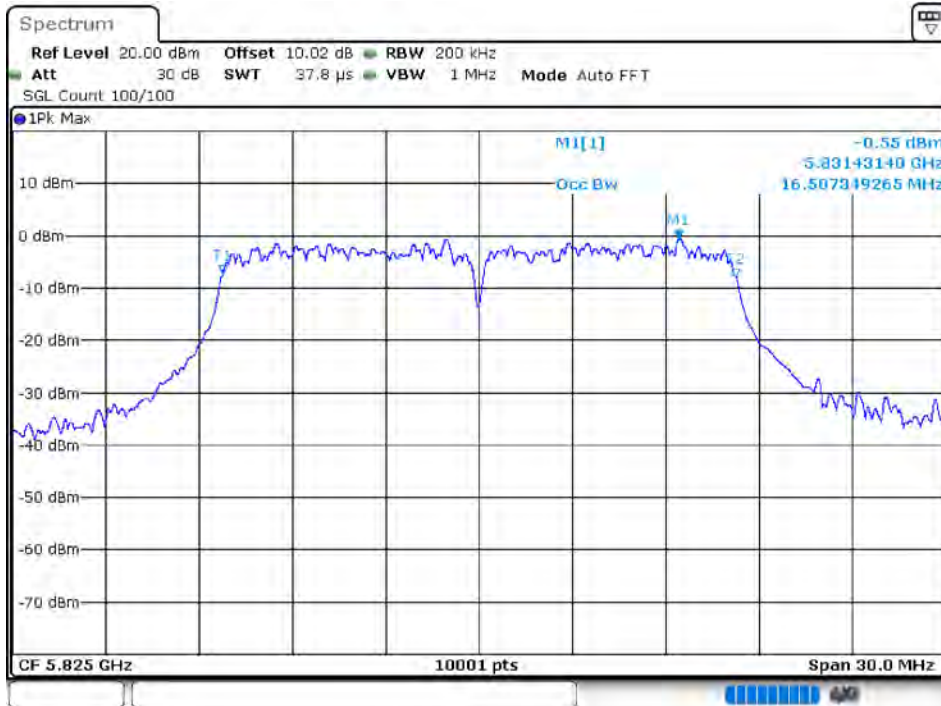


OBW NVNT a 5745MHz Ant 2

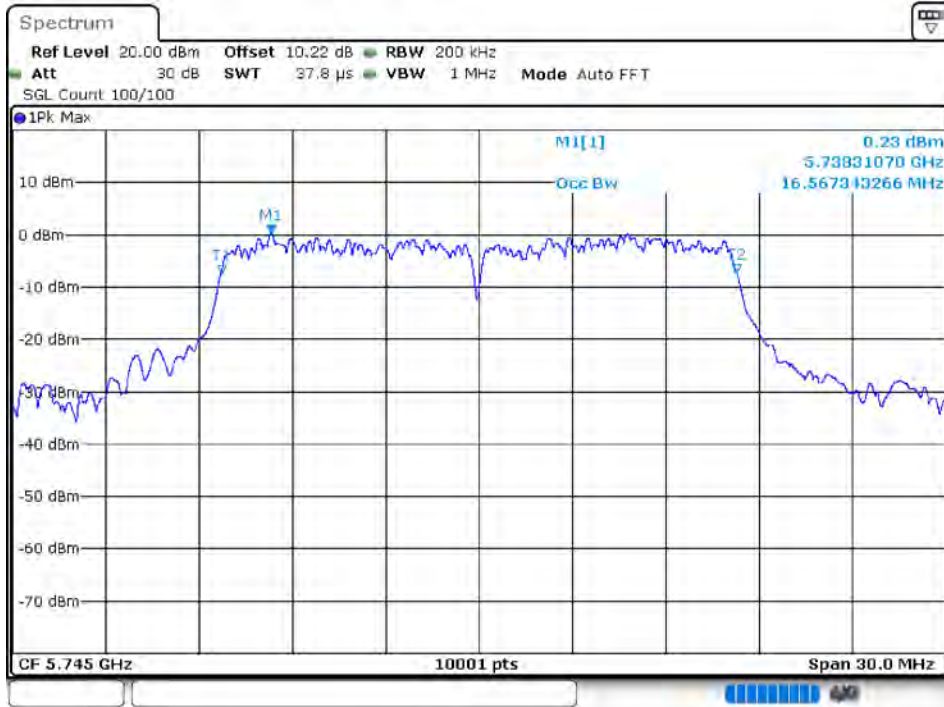


OBW NVNT a 5785MHz Ant 2

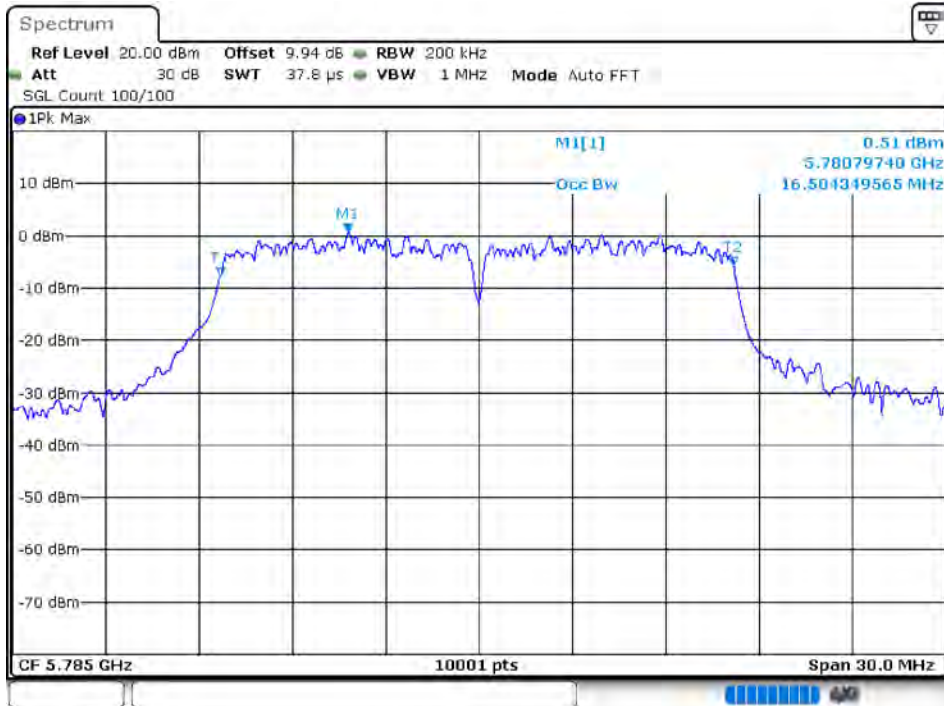

OBW NVNT a 5825MHz Ant 2

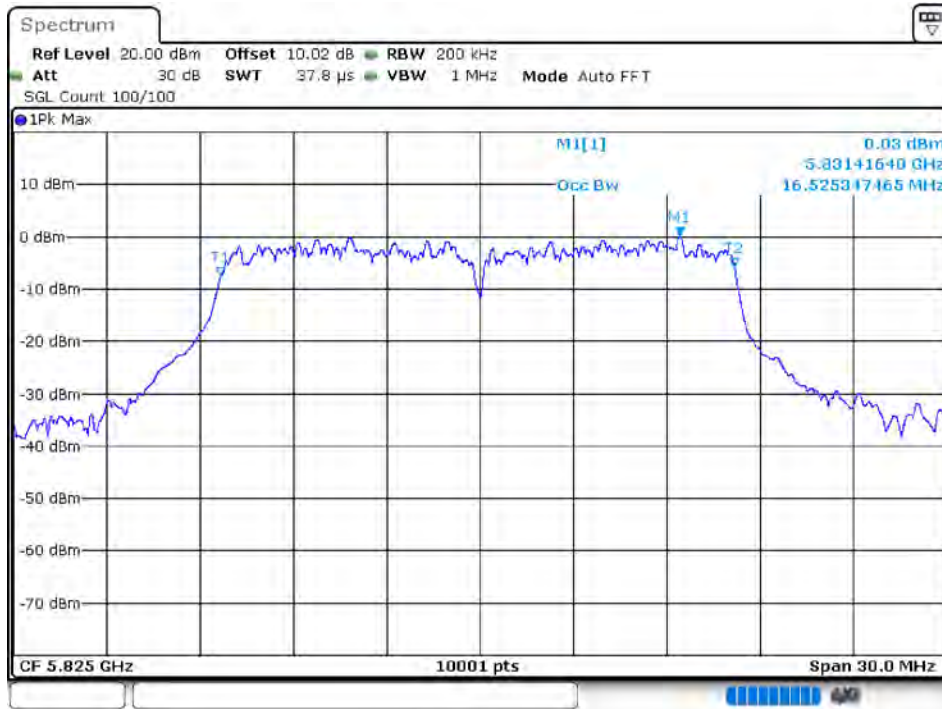


OBW NVNT ac20 5745MHz Ant 1

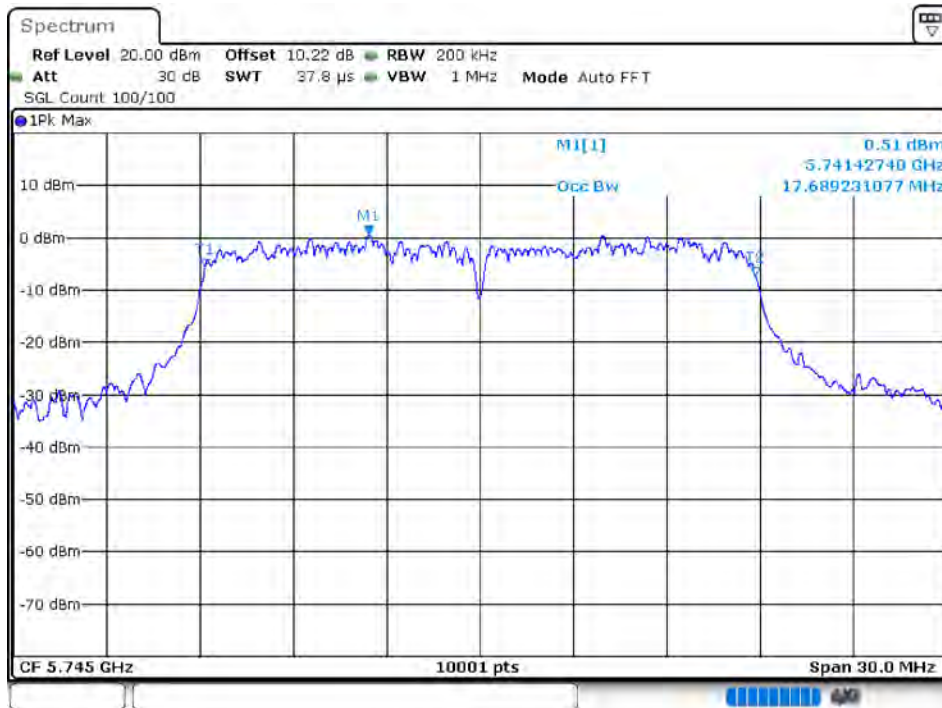





OBW NVNT ac20 5785MHz Ant 1

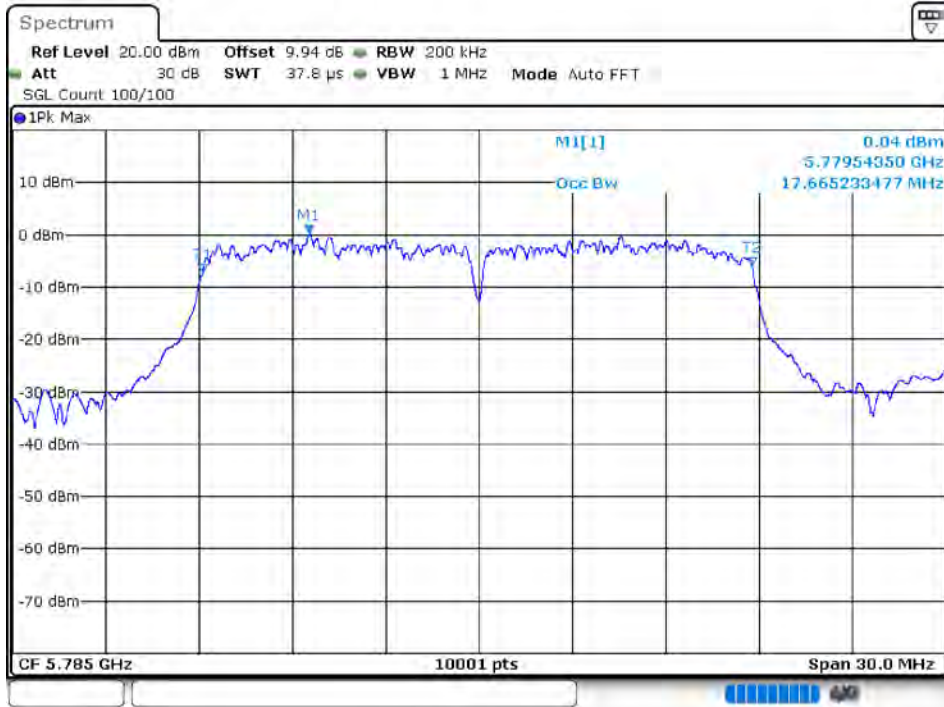


OBW NVNT ac20 5825MHz Ant 1

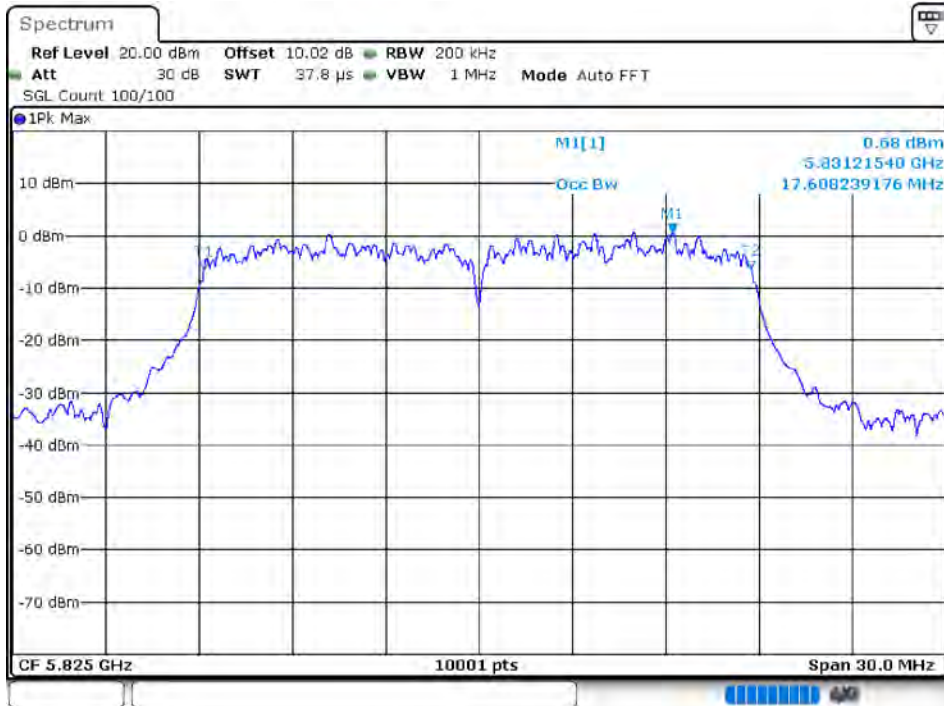


OBW NVNT ac20 5745MHz Ant 2

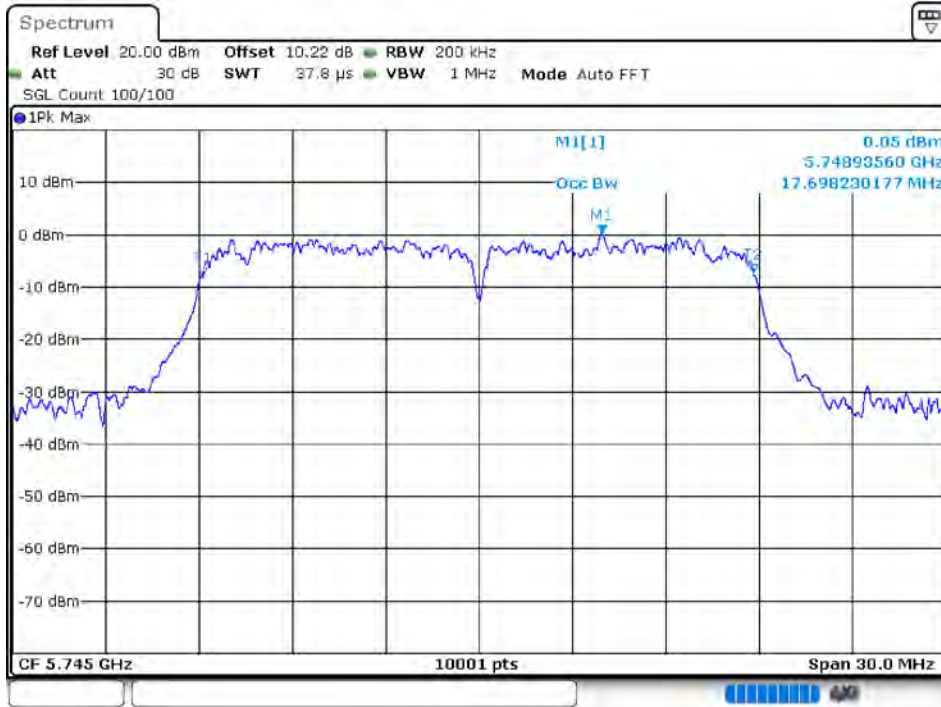


OBW NVNT ac20 5785MHz Ant 2

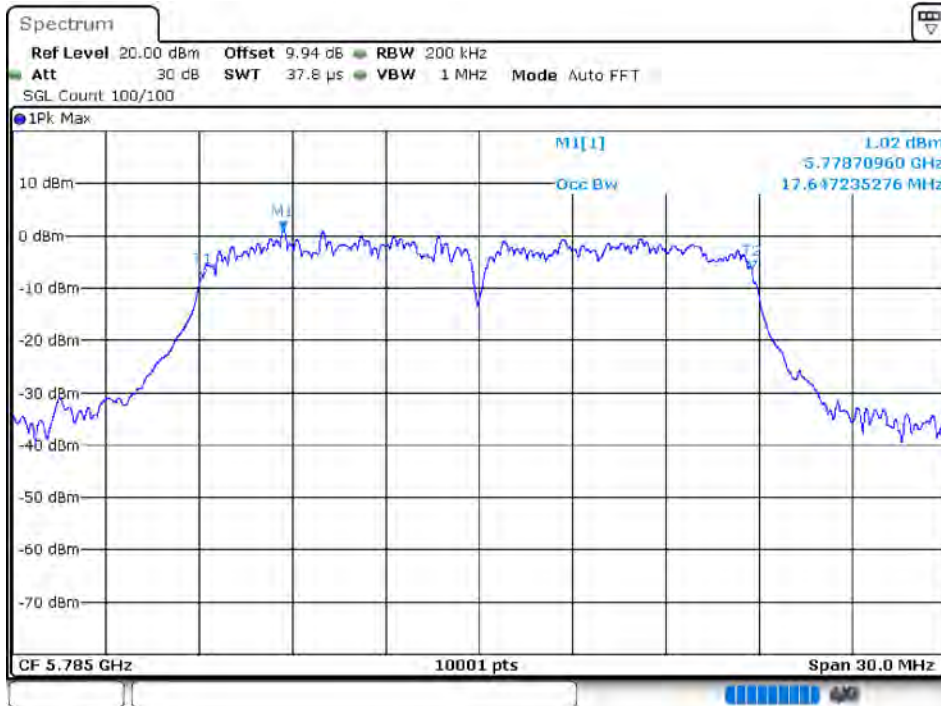

OBW NVNT ac20 5825MHz Ant 2

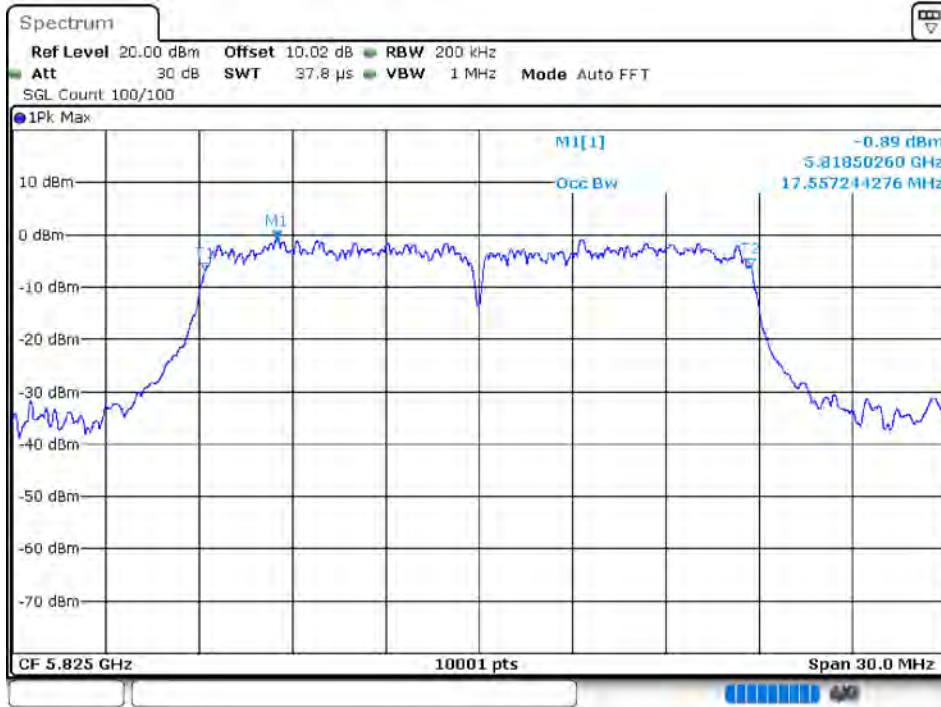


OBW NVNT ac40 5755MHz Ant 1

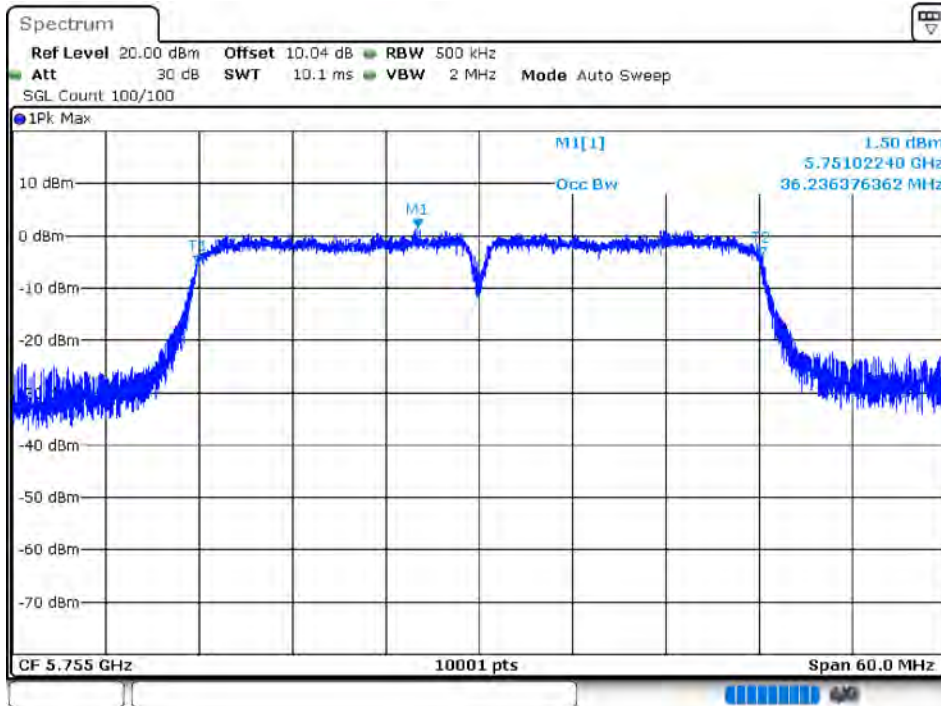





OBW NVNT ac40 5795MHz Ant 1

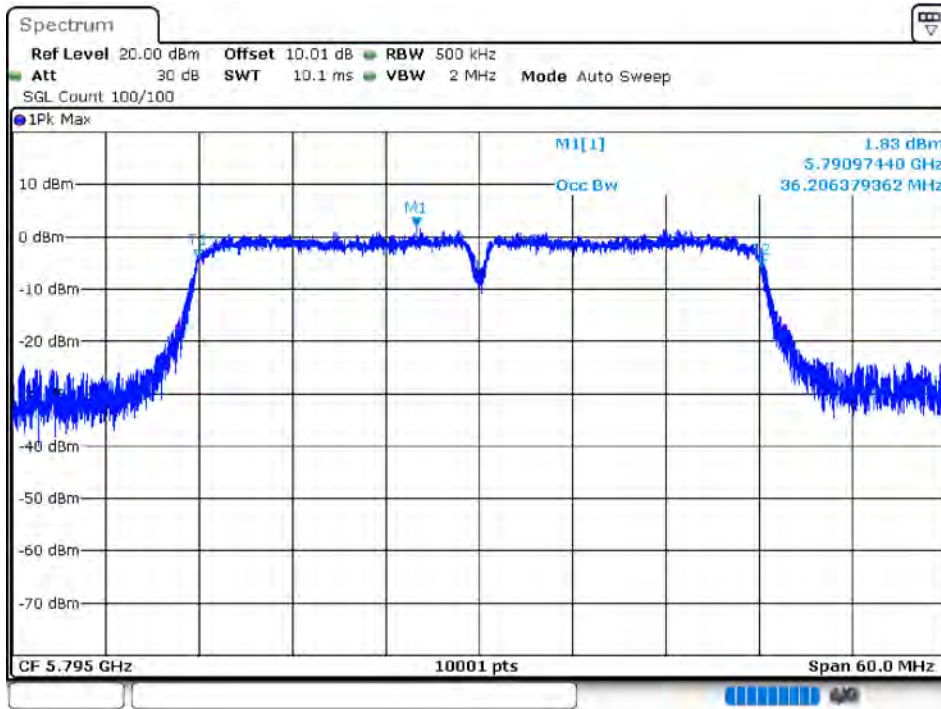


OBW NVNT ac40 5755MHz Ant 2

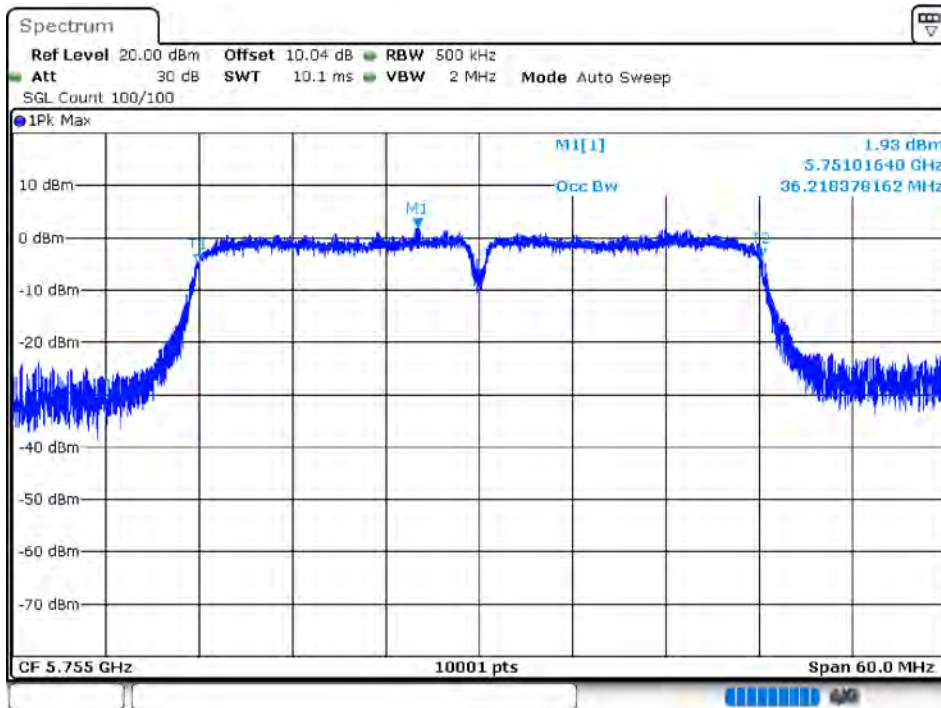


OBW NVNT ac40 5795MHz Ant 2

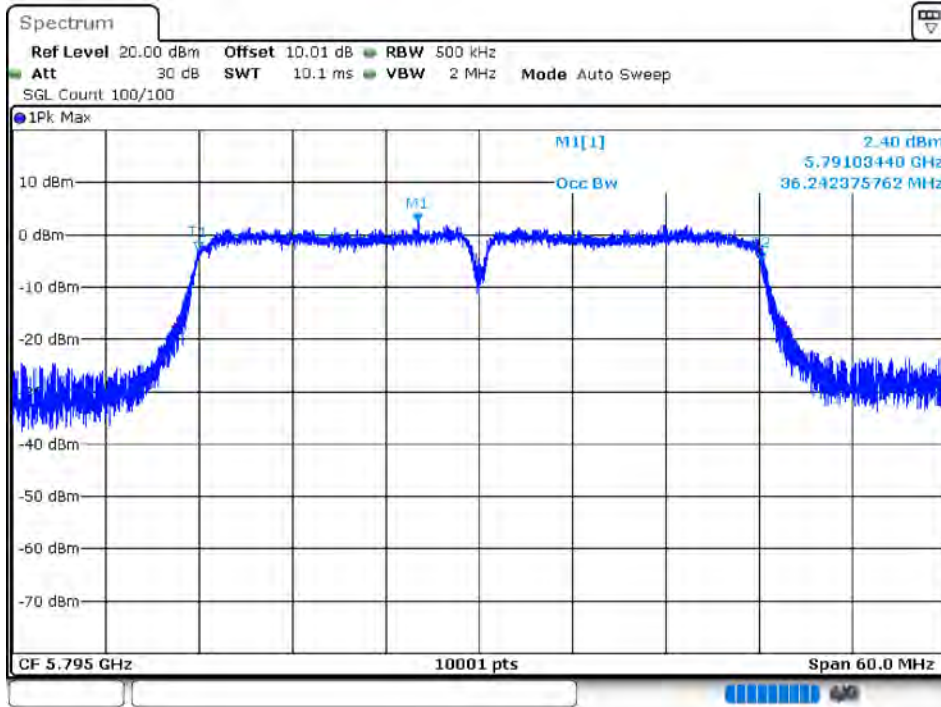


OBW NVNT ac80 5775MHz Ant 1

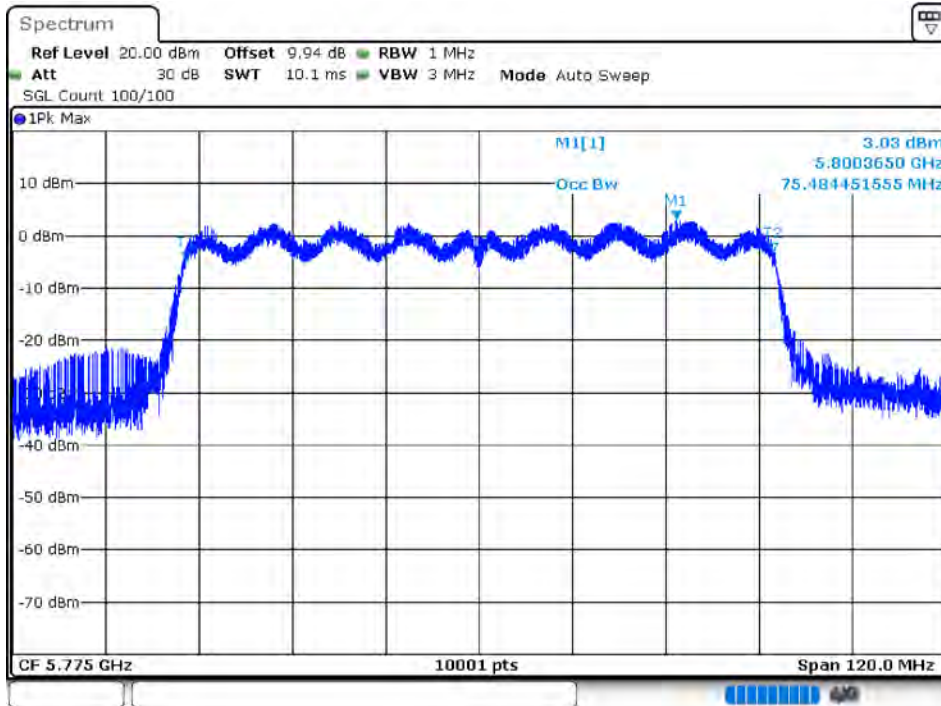

OBW NVNT ac80 5775MHz Ant 2

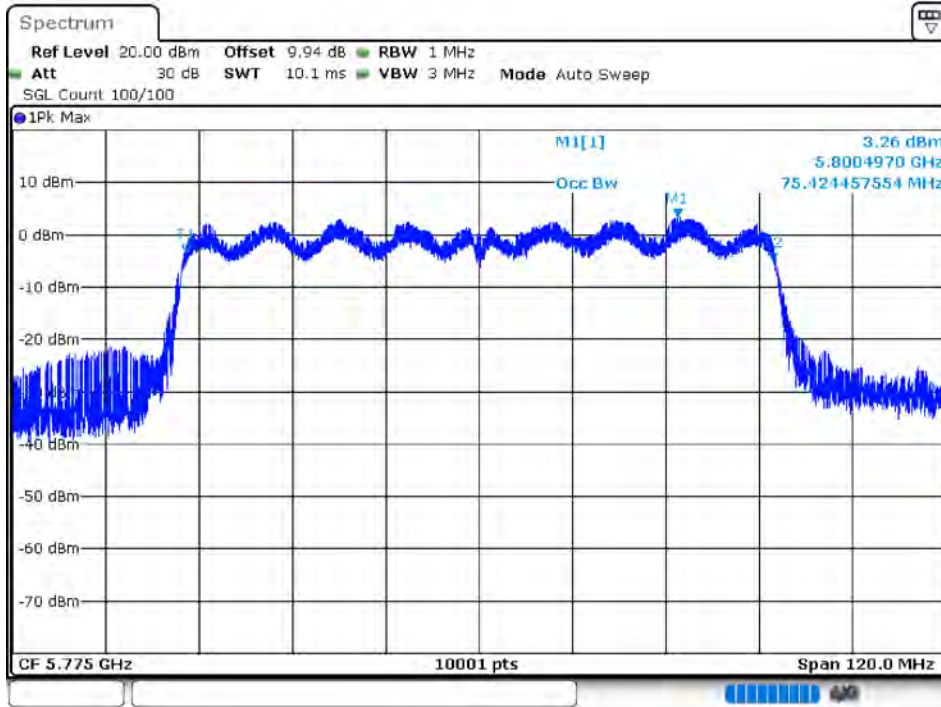


OBW NVNT n20 5745MHz Ant 1

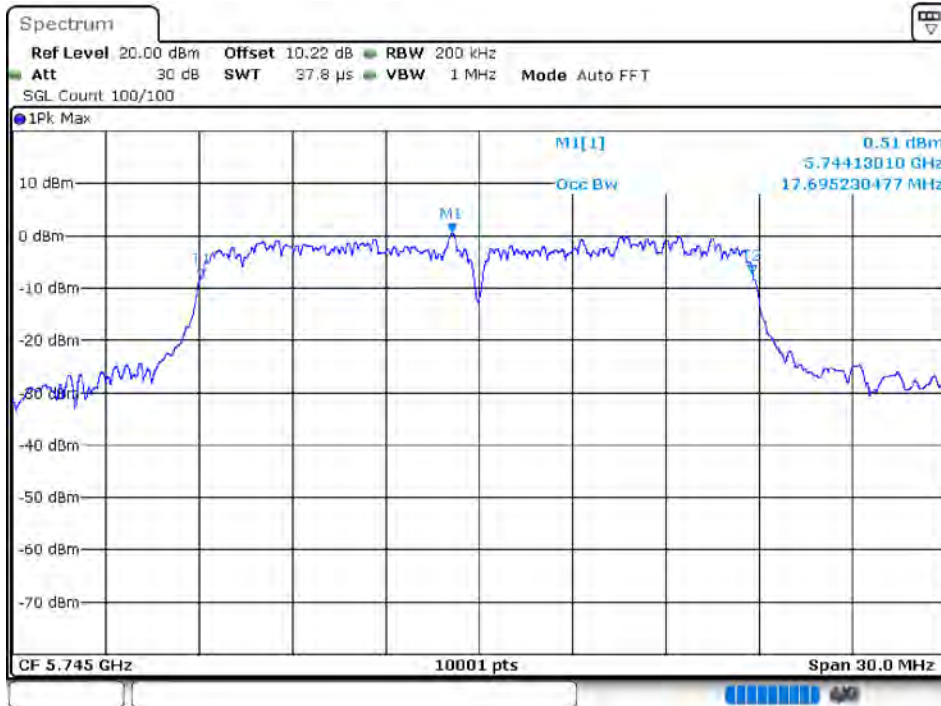





OBW NVNT n20 5785MHz Ant 1

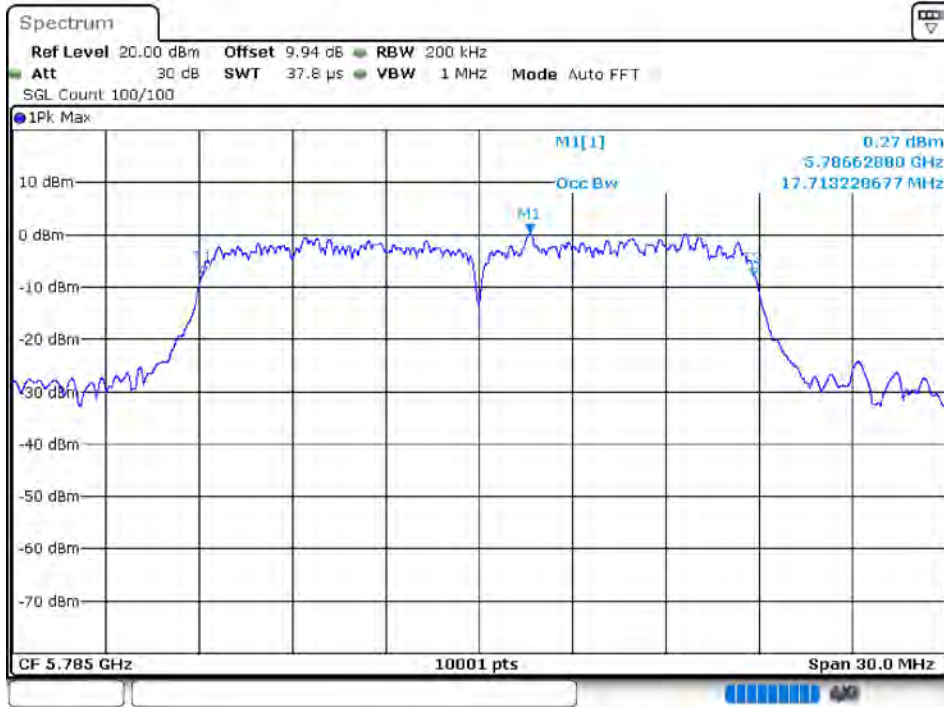


OBW NVNT n20 5825MHz Ant 1

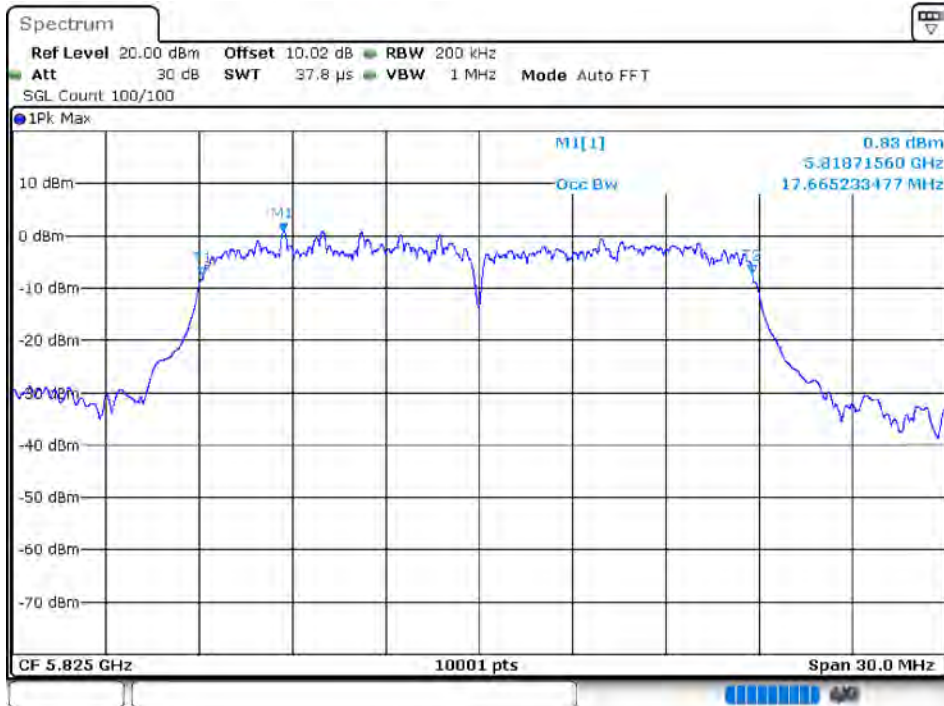


OBW NVNT n20 5745MHz Ant 2

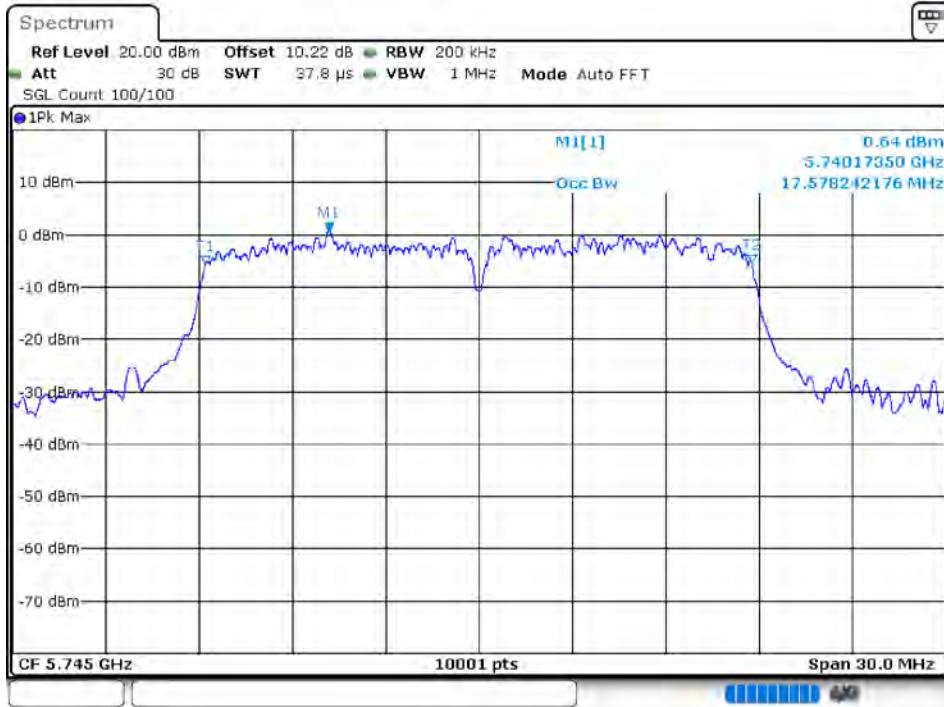


OBW NVNT n20 5785MHz Ant 2

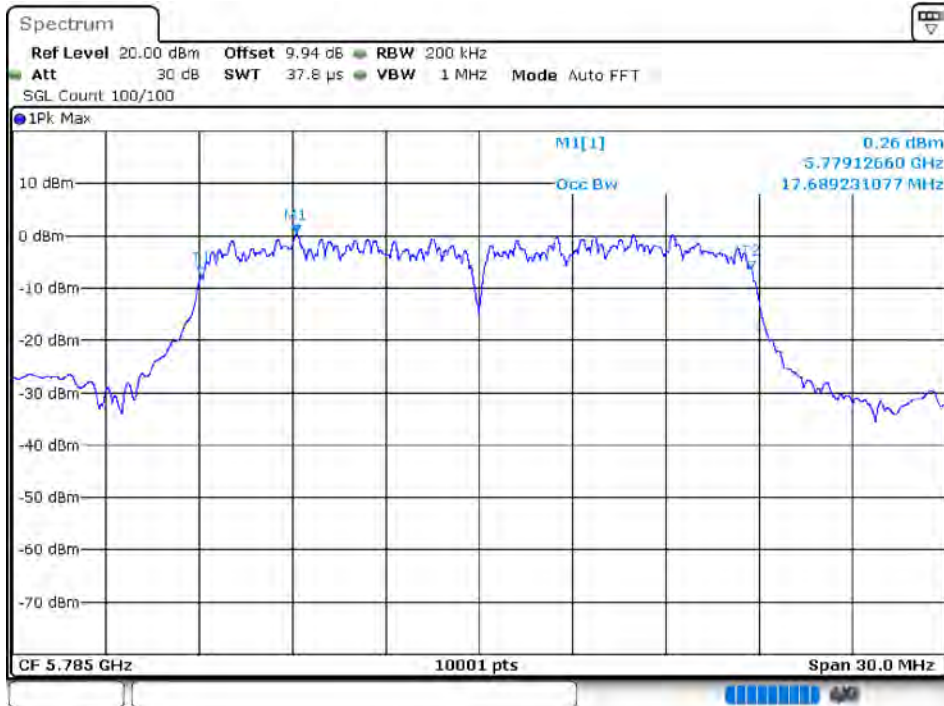

OBW NVNT n20 5825MHz Ant 2

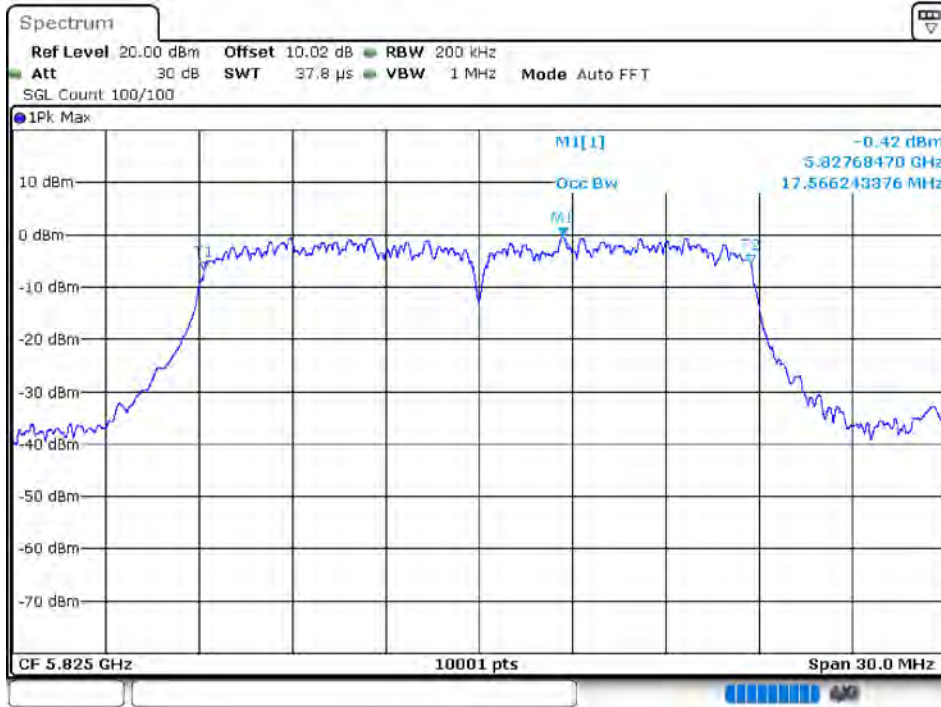


OBW NVNT n40 5755MHz Ant 1

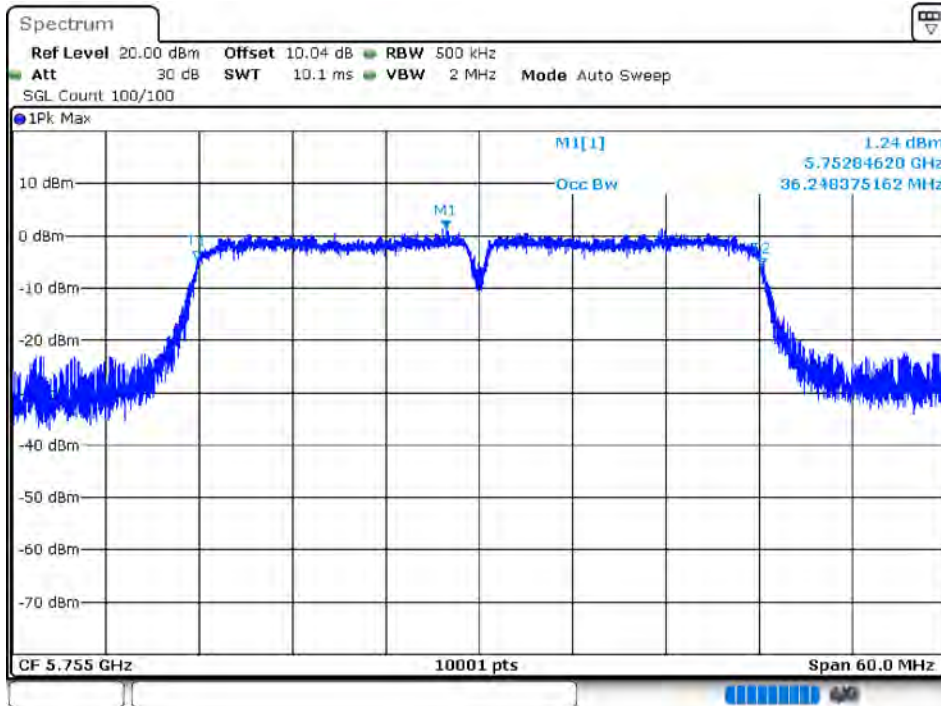





OBW NVNT n40 5795MHz Ant 1

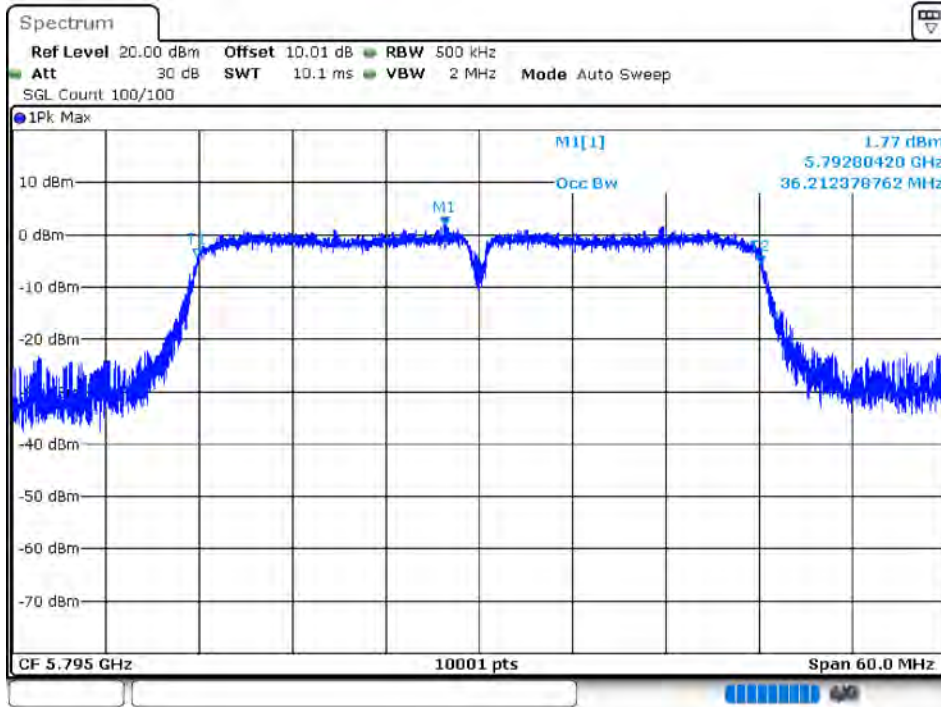

OBW NVNT n40 5755MHz Ant 2

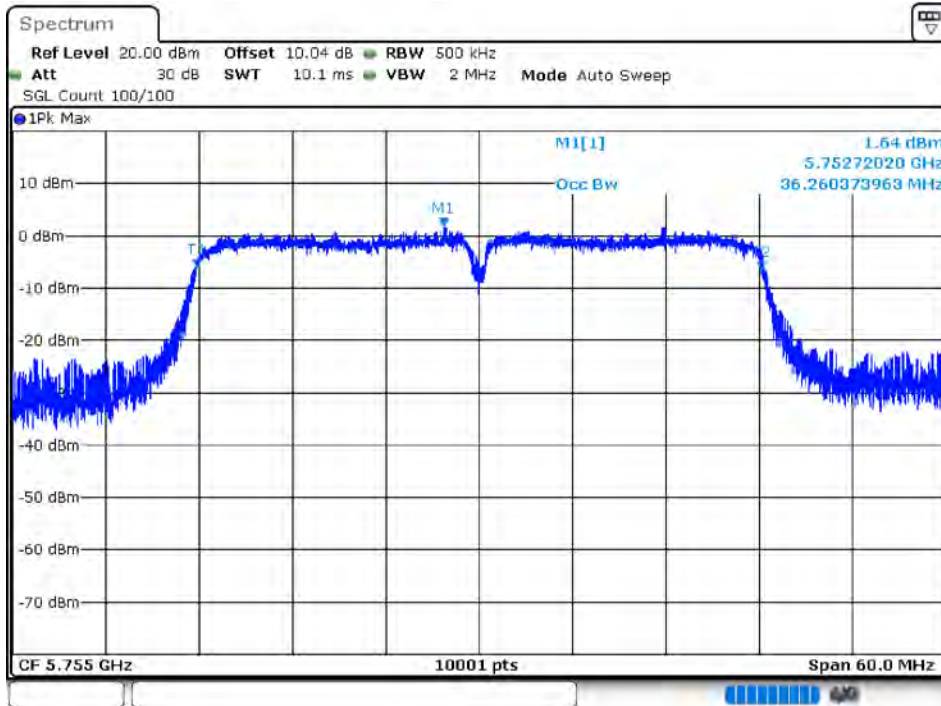

OBW NVNT n40 5795MHz Ant 2

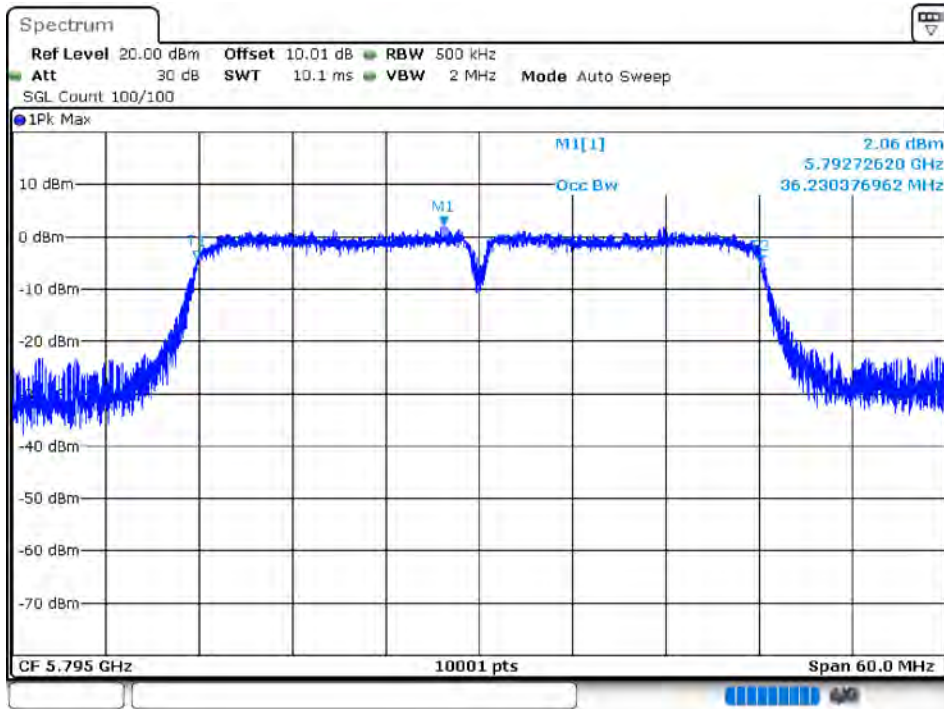


**5.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL**


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant 1	-4.52	2.34	-2.18	28.51	Pass
NVNT	a	5785	Ant 1	-3.89	2.38	-1.51	28.51	Pass
NVNT	a	5825	Ant 1	-4.56	2.35	-2.21	28.51	Pass
NVNT	a	5745	Ant 2	-4.06	2.34	-1.72	30	Pass
NVNT	a	5785	Ant 2	-3.66	2.4	-1.26	30	Pass
NVNT	a	5825	Ant 2	-4.59	2.38	-2.21	30	Pass
NVNT	ac20	5745	Ant 1	-4.93	2.49	-2.44	28.51	Pass
NVNT	ac20	5785	Ant 1	-4.22	2.5	-1.72	28.51	Pass
NVNT	ac20	5825	Ant 1	-3.9	2.47	-1.43	28.51	Pass
NVNT	ac20	5745	Ant 2	-5.02	2.49	-2.53	30	Pass
NVNT	ac20	5785	Ant 2	-4.75	2.5	-2.25	30	Pass
NVNT	ac20	5825	Ant 2	-4.71	2.48	-2.23	30	Pass
NVNT	ac40	5755	Ant 1	-8.86	4.04	-4.82	28.51	Pass
NVNT	ac40	5795	Ant 1	-8.09	4.04	-4.05	28.51	Pass
NVNT	ac40	5755	Ant 2	-8.53	4.04	-4.49	30	Pass
NVNT	ac40	5795	Ant 2	-8.3	4.04	-4.26	30	Pass
NVNT	ac80	5775	Ant 1	-11.21	6.07	-5.14	28.51	Pass
NVNT	ac80	5775	Ant 2	-11.12	6.06	-5.06	30	Pass
NVNT	n20	5745	Ant 1	-4.71	2.49	-2.22	28.51	Pass
NVNT	n20	5785	Ant 1	-4.08	2.5	-1.58	28.51	Pass
NVNT	n20	5825	Ant 1	-3.83	2.48	-1.35	28.51	Pass
NVNT	n20	5745	Ant 2	-4.9	2.5	-2.4	30	Pass
NVNT	n20	5785	Ant 2	-3.86	2.5	-1.36	30	Pass
NVNT	n20	5825	Ant 2	-3.72	2.5	-1.22	30	Pass
NVNT	n40	5755	Ant 1	-8.32	4.04	-4.28	28.51	Pass
NVNT	n40	5795	Ant 1	-7.83	4.04	-3.79	28.51	Pass
NVNT	n40	5755	Ant 2	-8.46	4.06	-4.4	30	Pass
NVNT	n40	5795	Ant 2	-7.98	4.04	-3.94	30	Pass




PSD NVNT a 5745MHz Ant 1

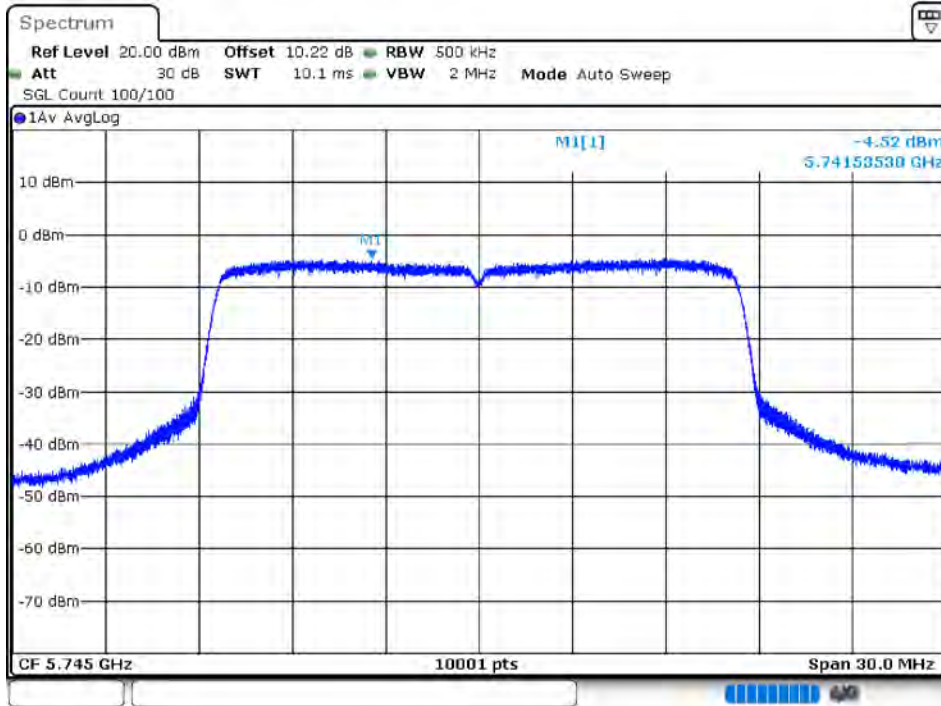


PSD NVNT a 5785MHz Ant 1

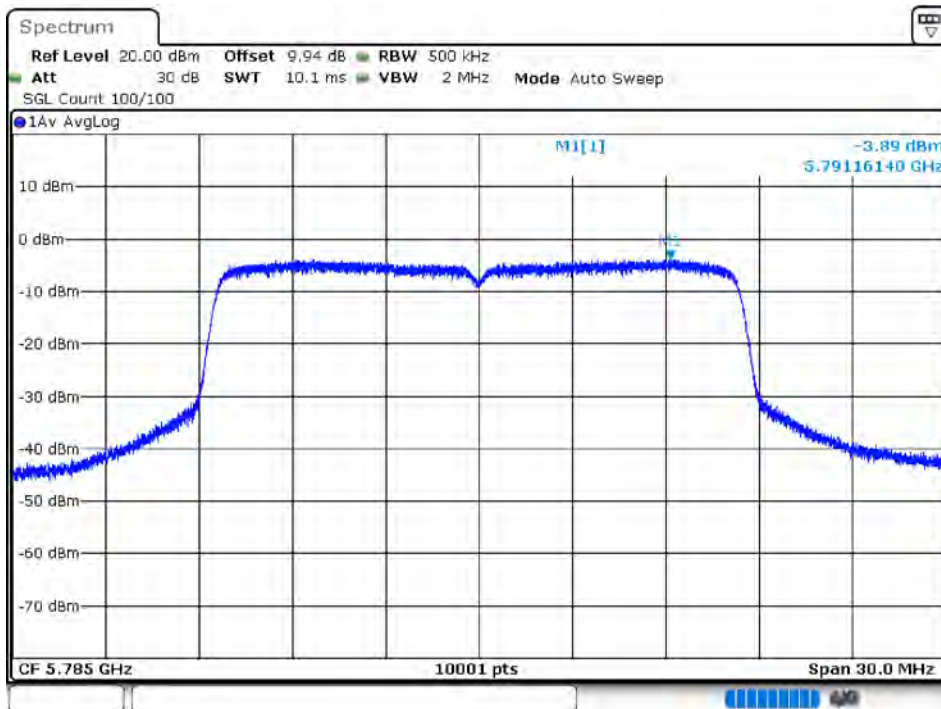


PSD NVNT a 5825MHz Ant 1

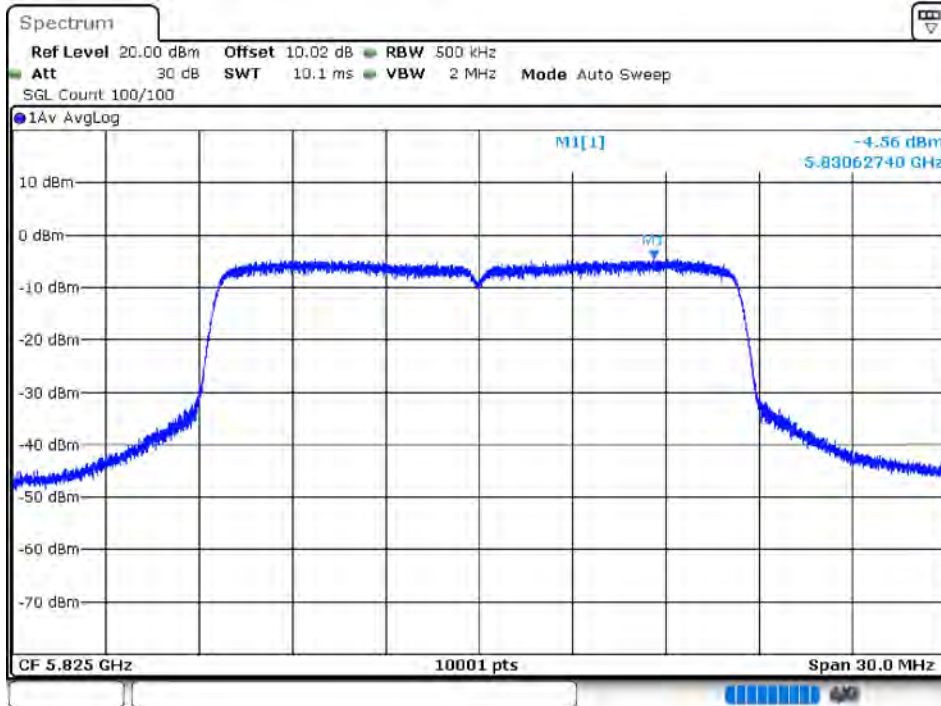


PSD NVNT a 5745MHz Ant 2

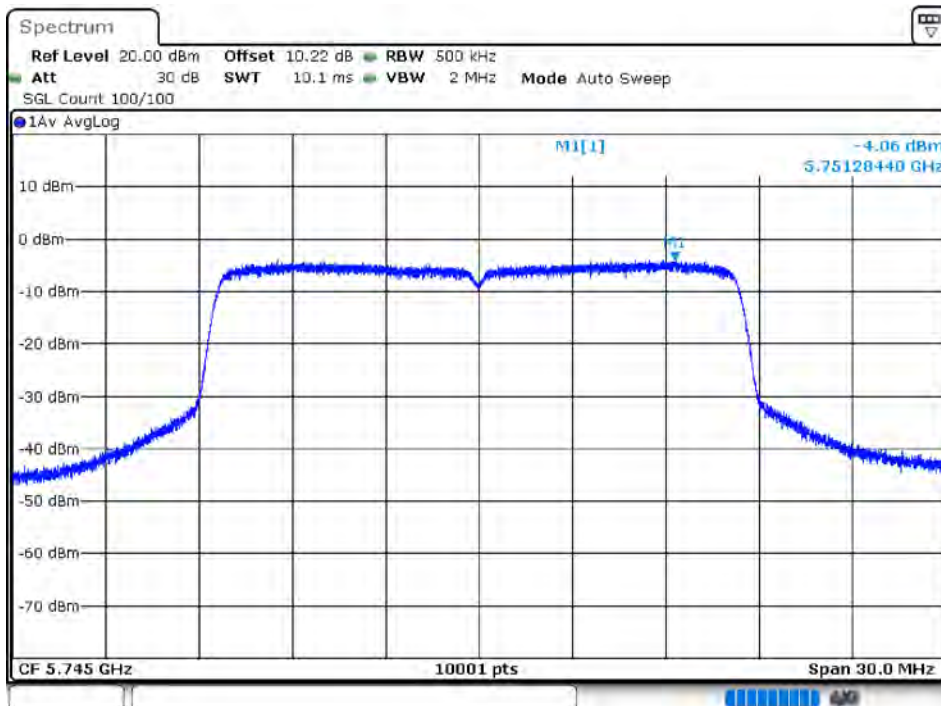

PSD NVNT a 5785MHz Ant 2

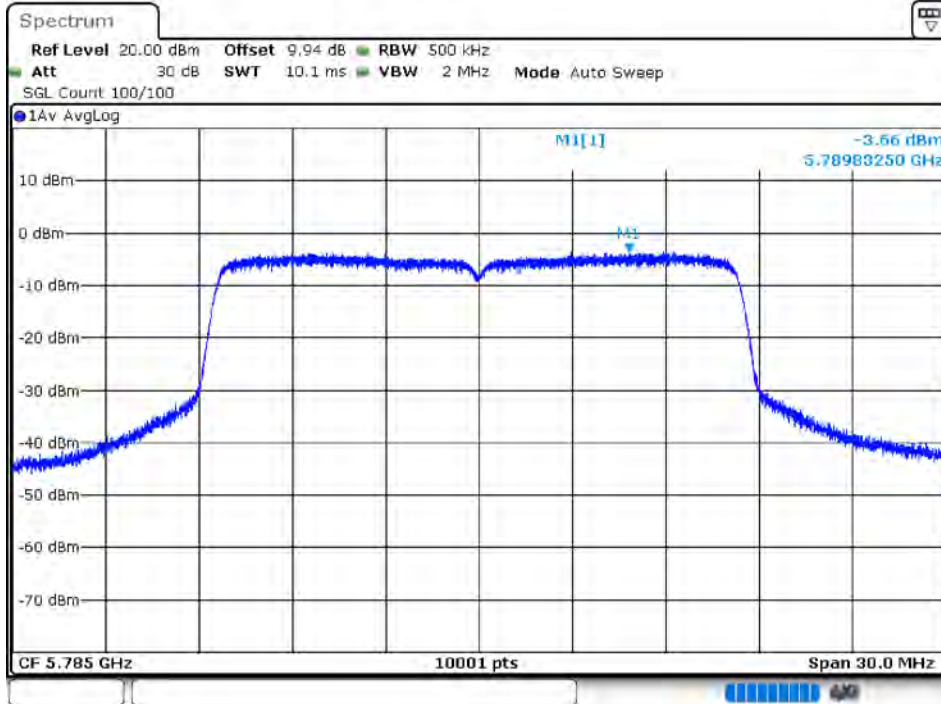


PSD NVNT a 5825MHz Ant 2

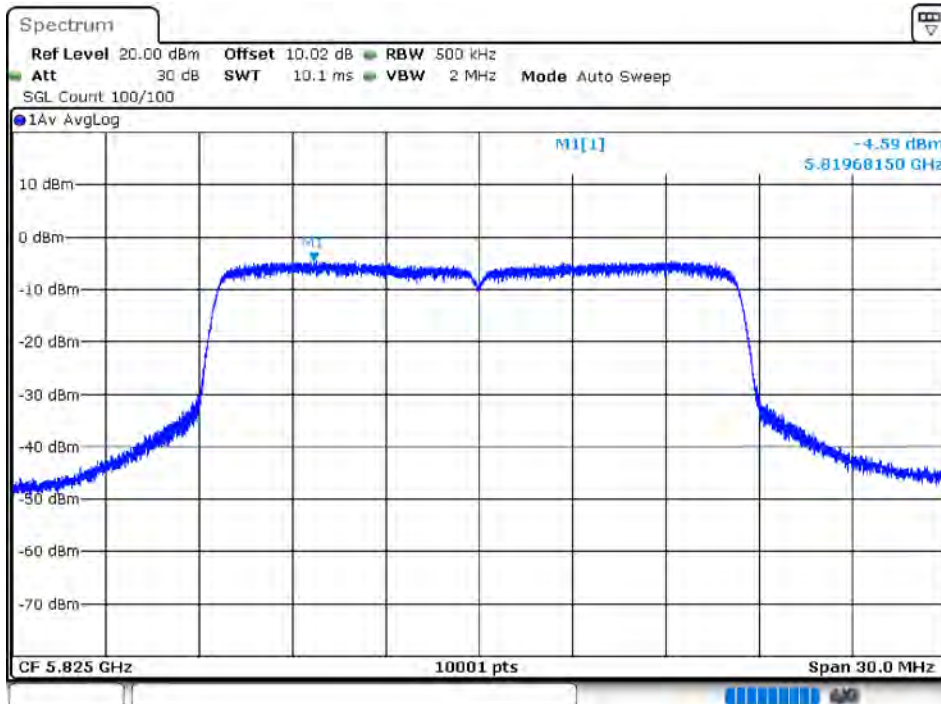


PSD NVNT ac20 5745MHz Ant 1




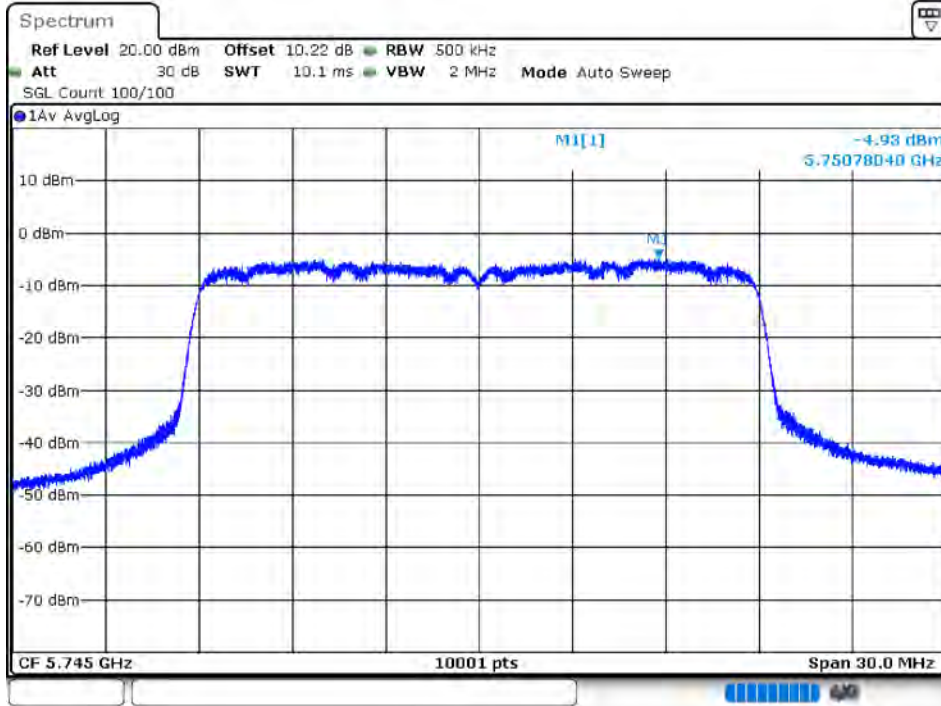


PSD NVNT ac20 5785MHz Ant 1

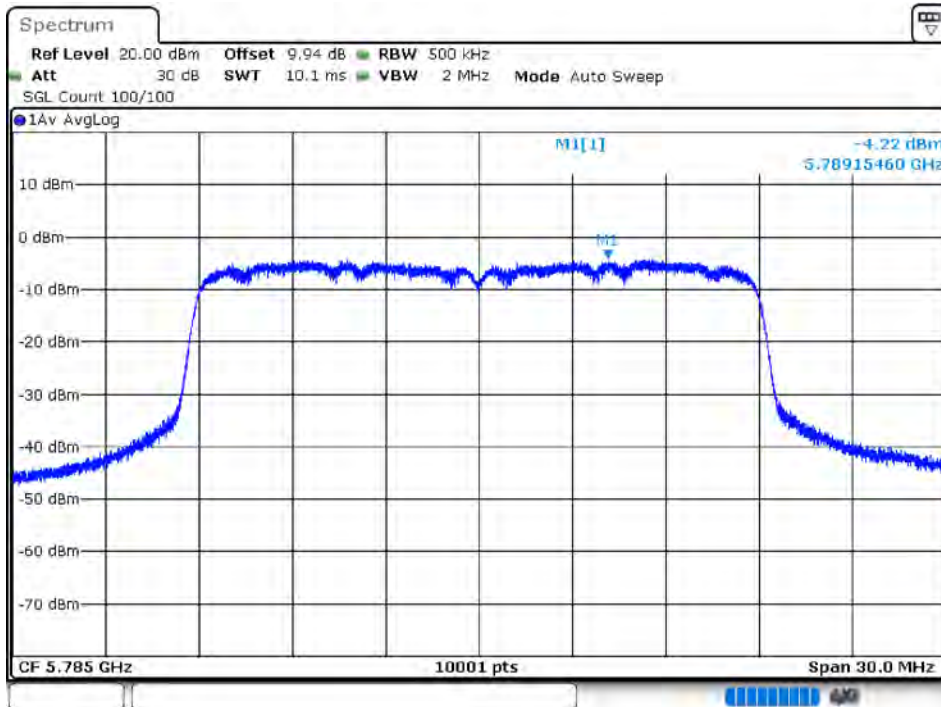


PSD NVNT ac20 5825MHz Ant 1

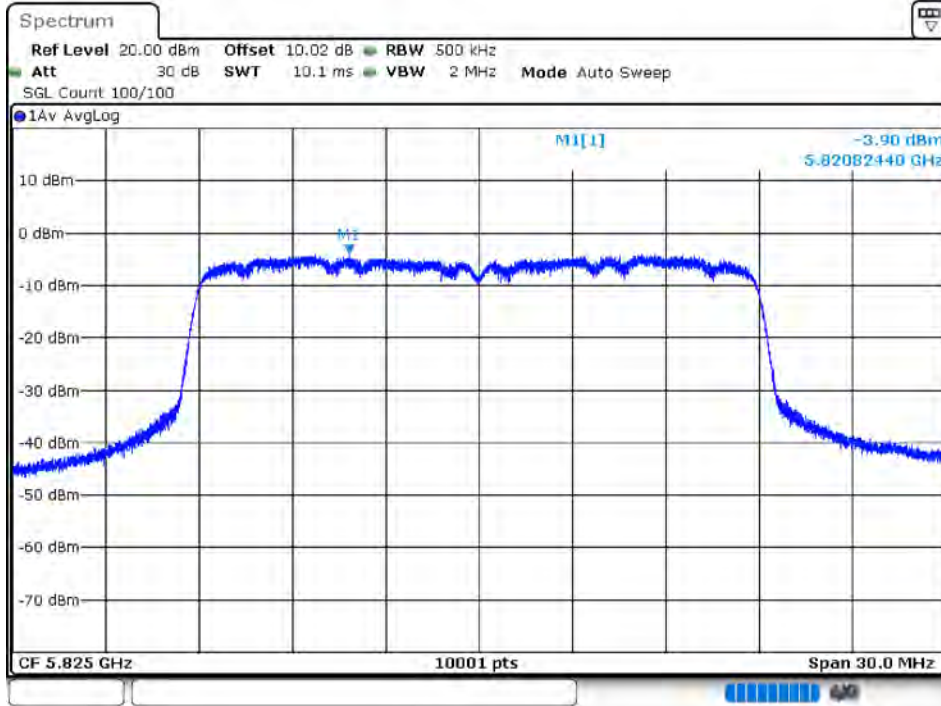


PSD NVNT ac20 5745MHz Ant 2

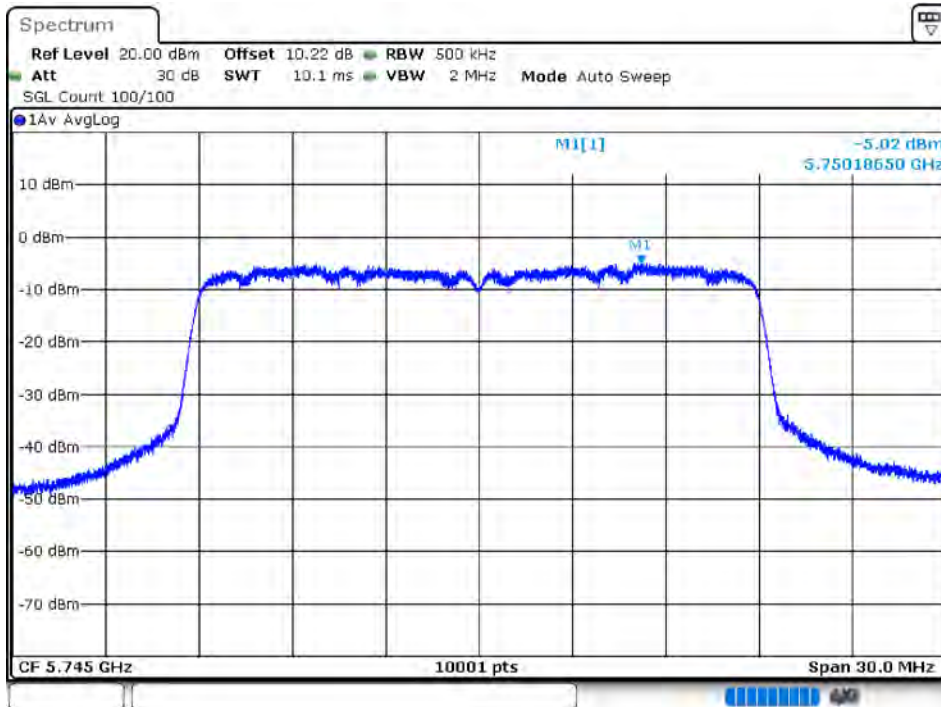

PSD NVNT ac20 5785MHz Ant 2

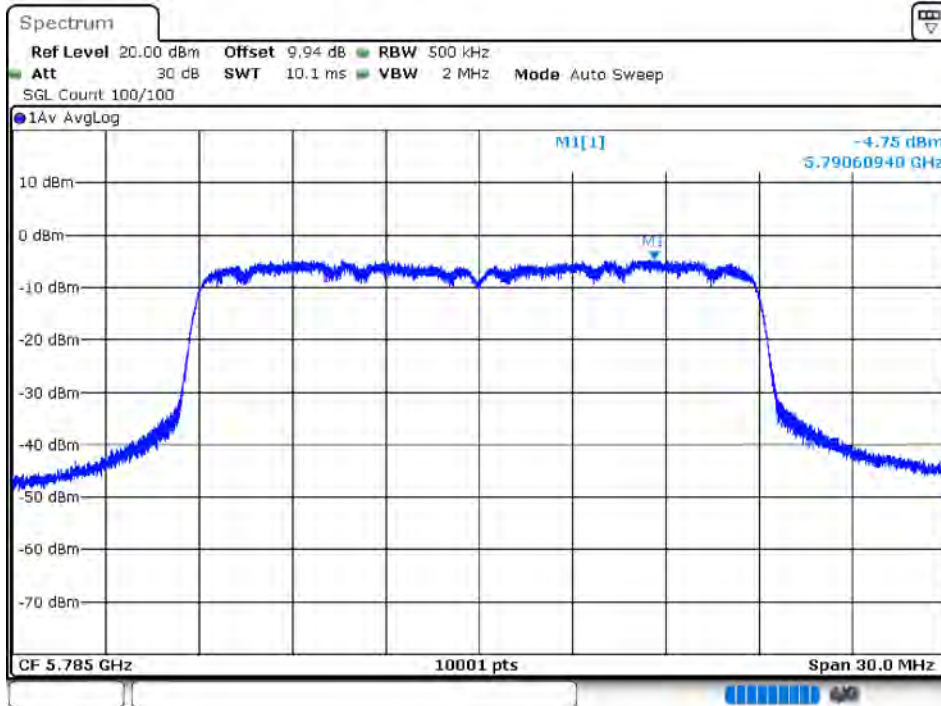


PSD NVNT ac20 5825MHz Ant 2

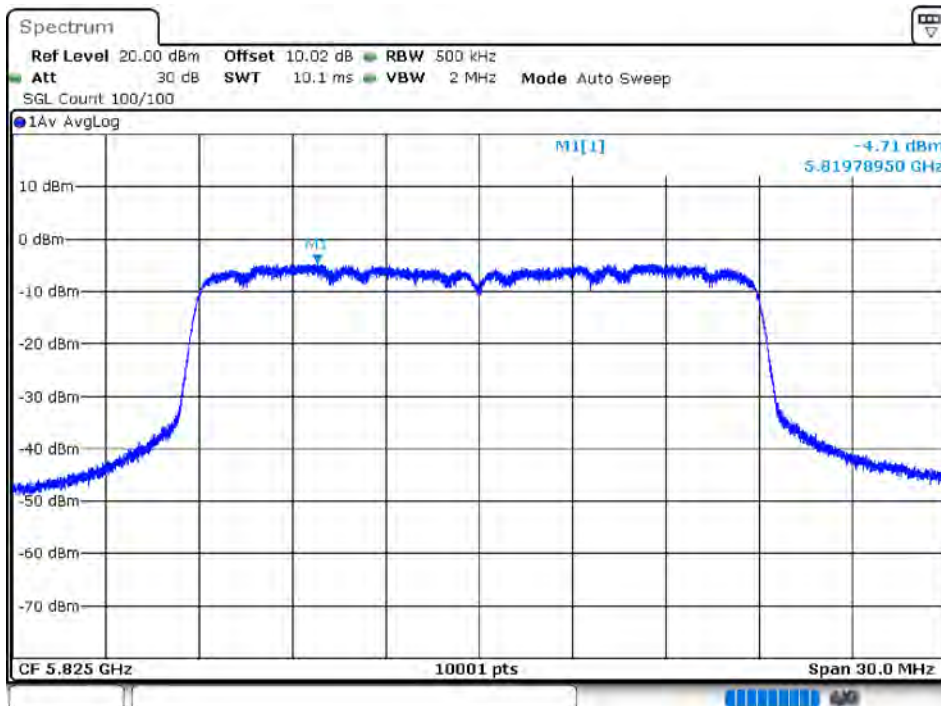


PSD NVNT ac40 5755MHz Ant 1




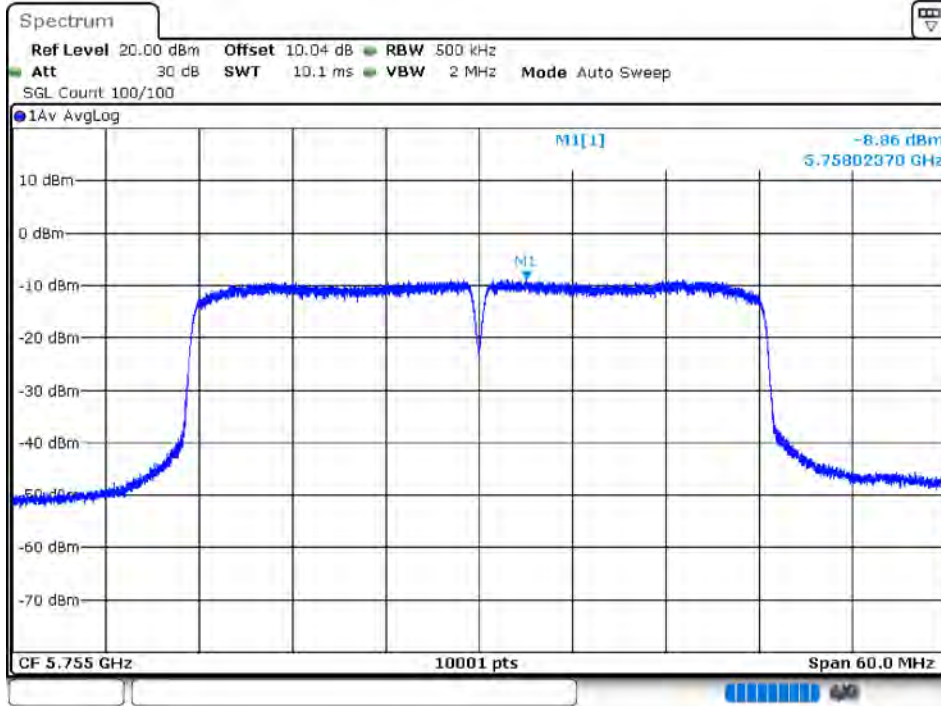


PSD NVNT ac40 5795MHz Ant 1

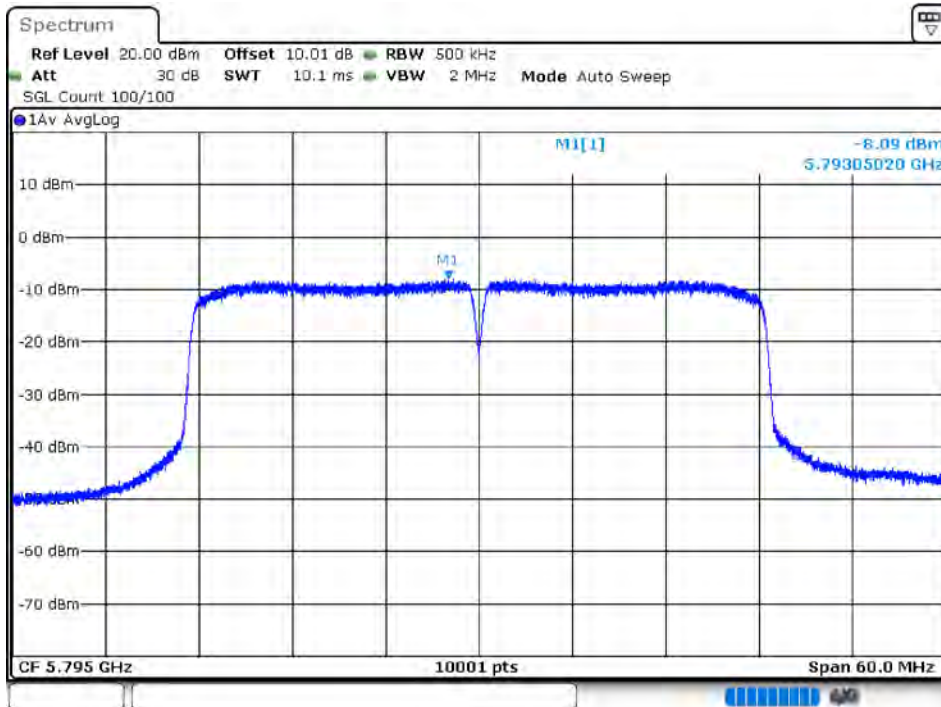


PSD NVNT ac40 5755MHz Ant 2

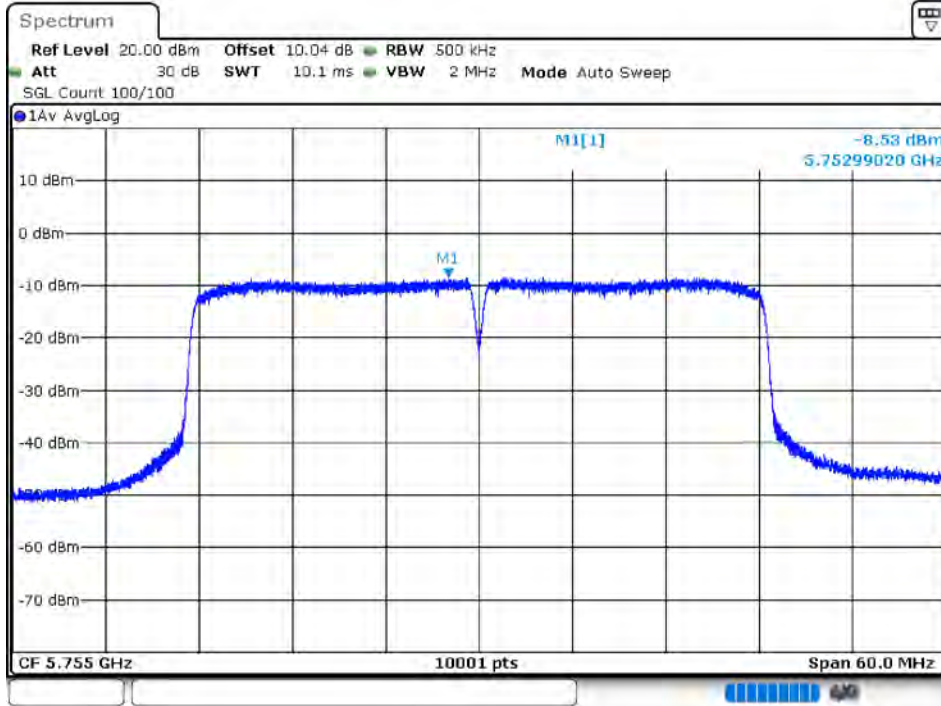

PSD NVNT ac40 5795MHz Ant 2

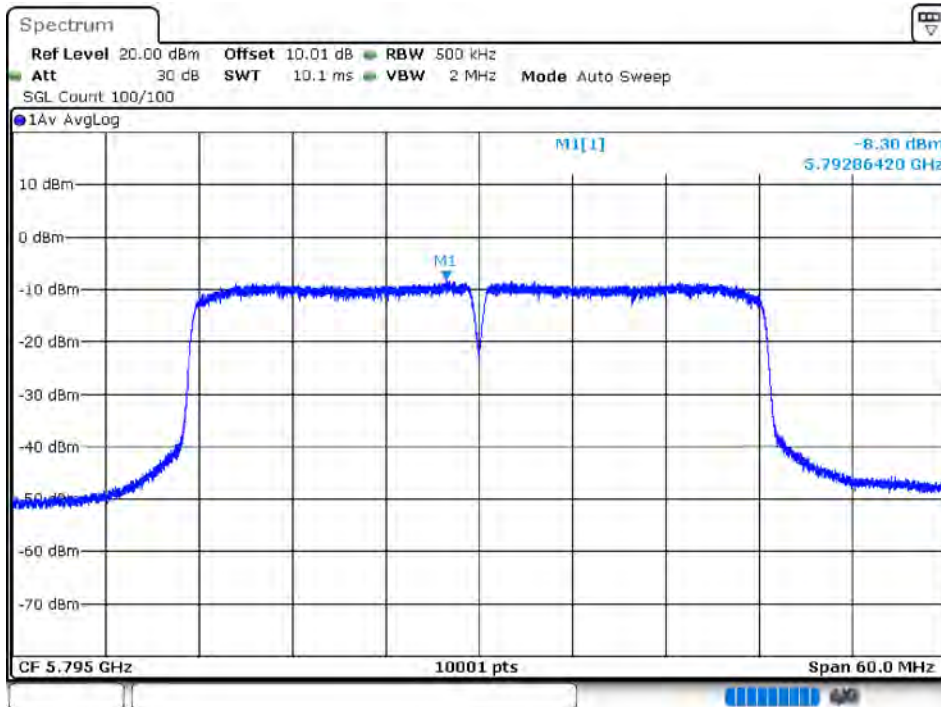

PSD NVNT ac80 5775MHz Ant 1

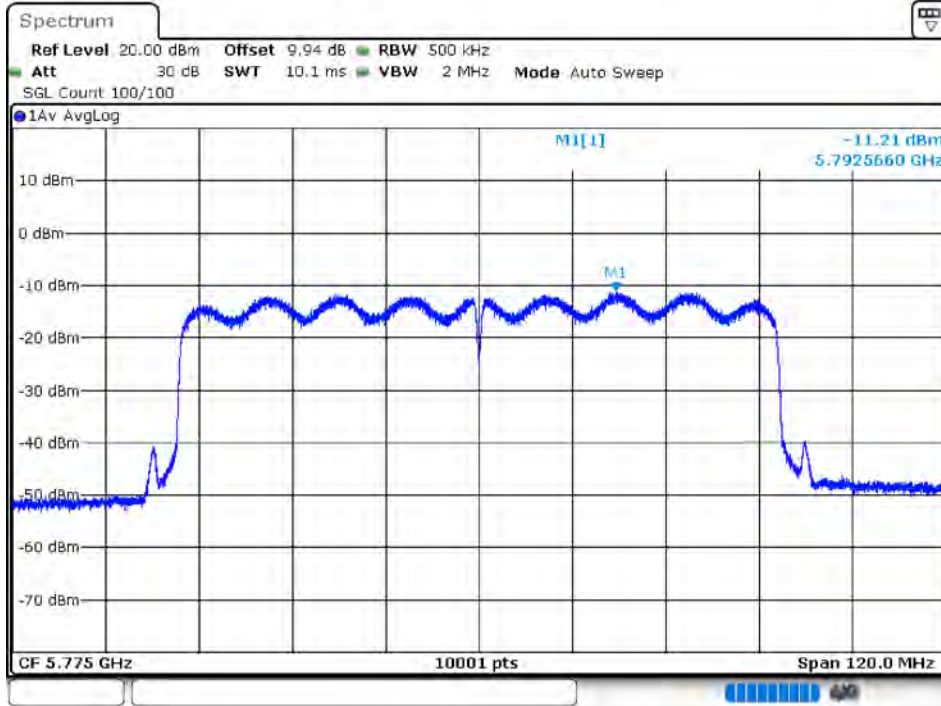


PSD NVNT ac80 5775MHz Ant 2




PSD NVNT n20 5745MHz Ant 1




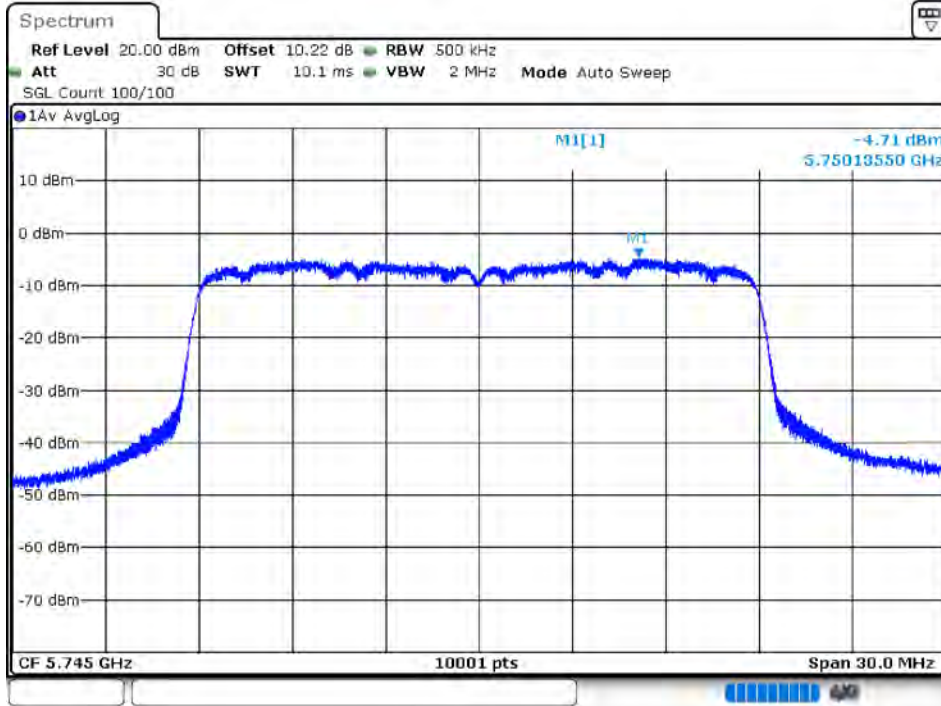


PSD NVNT n20 5785MHz Ant 1

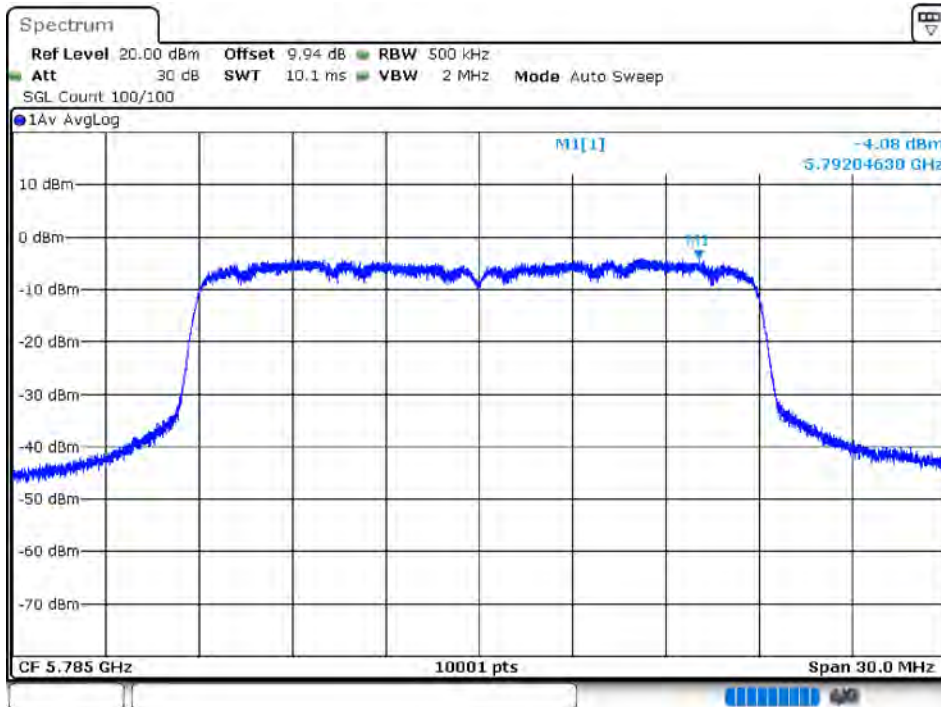


PSD NVNT n20 5825MHz Ant 1

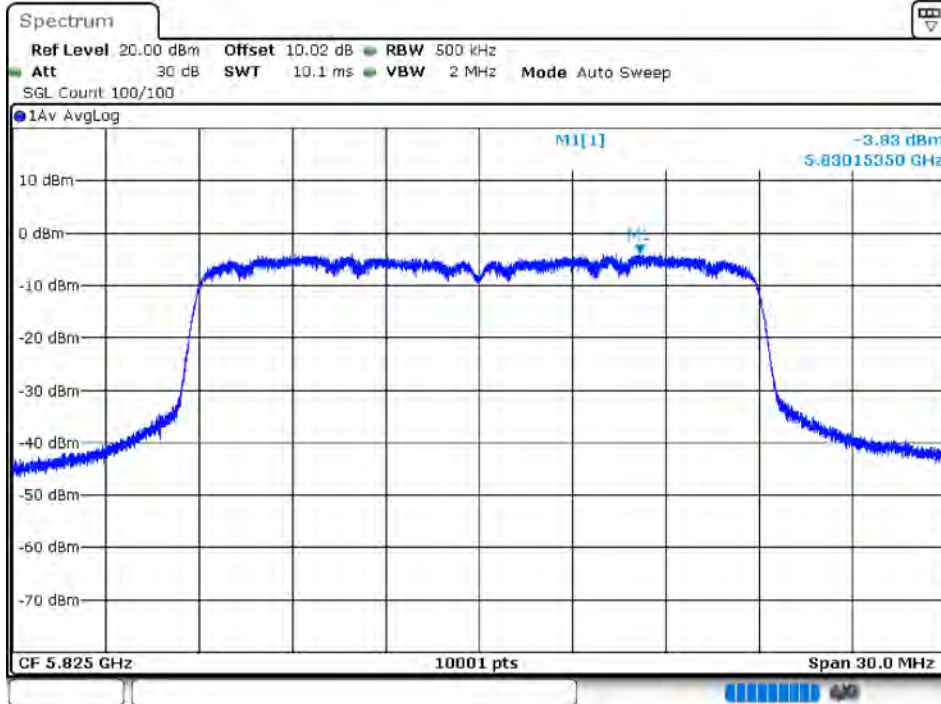


PSD NVNT n20 5745MHz Ant 2

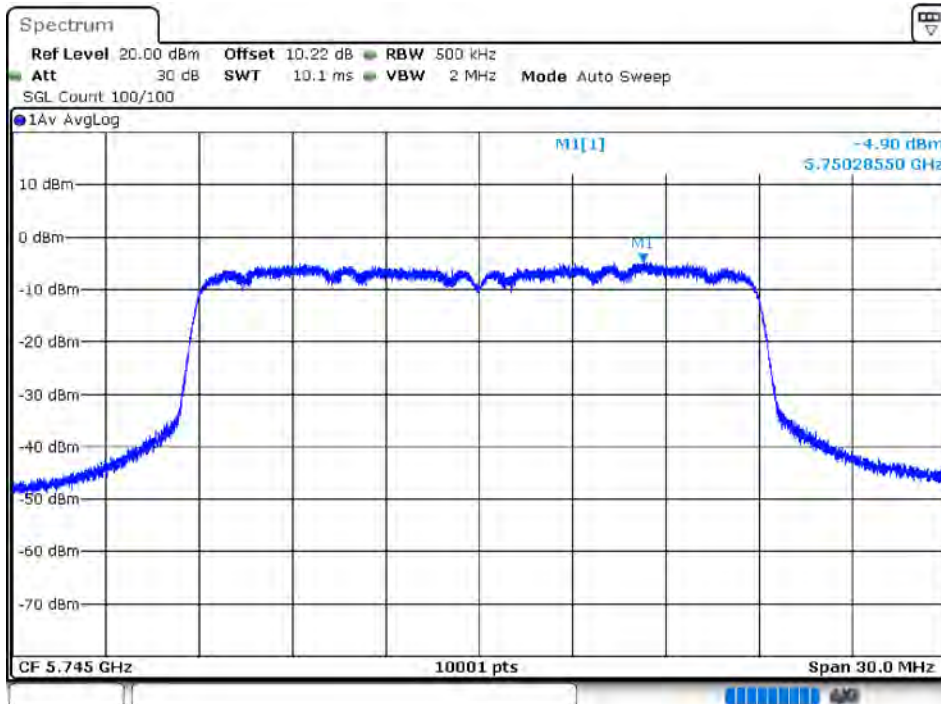


PSD NVNT n20 5785MHz Ant 2

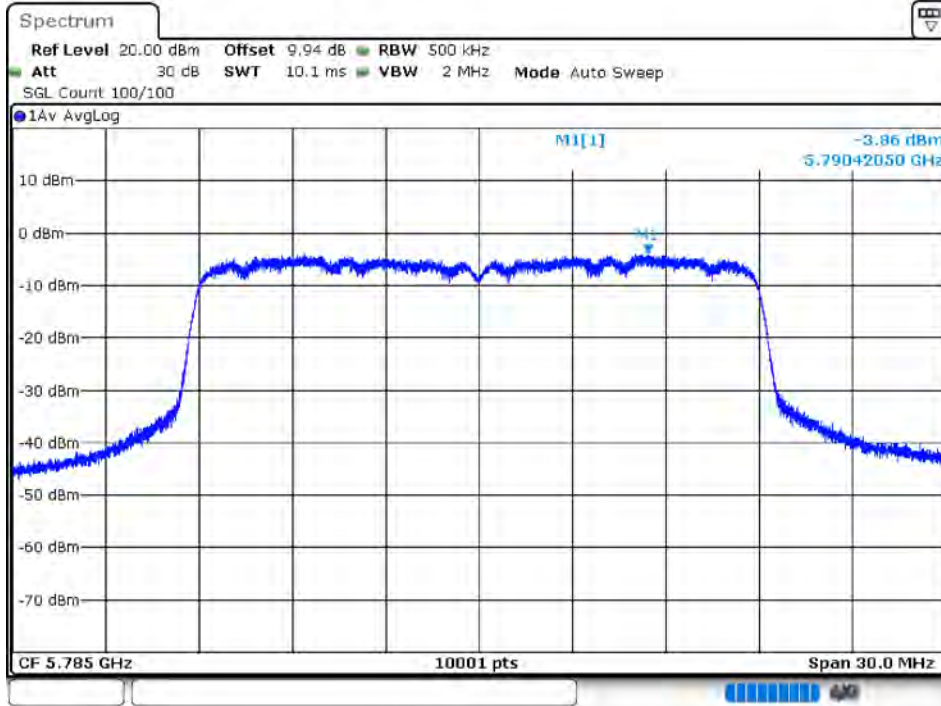


PSD NVNT n20 5825MHz Ant 2

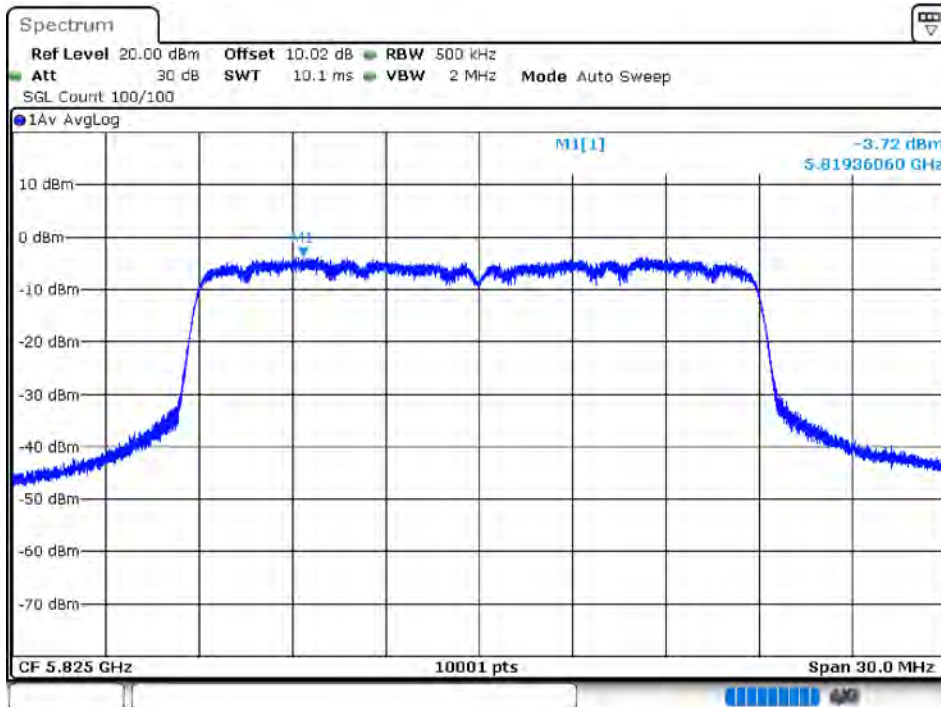

PSD NVNT n40 5755MHz Ant 1

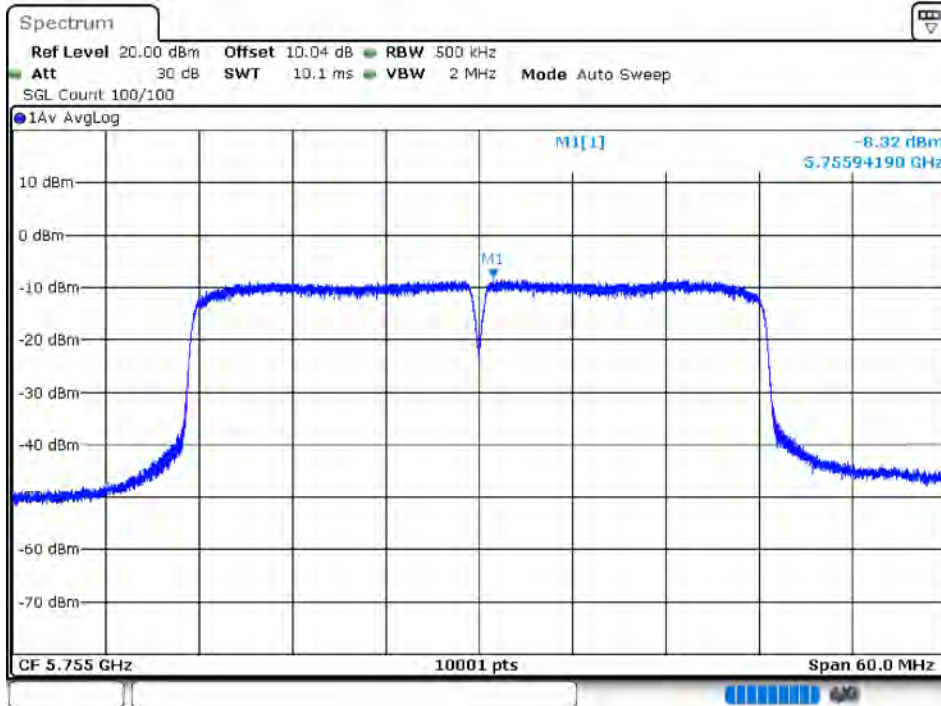

PSD NVNT n40 5795MHz Ant 1

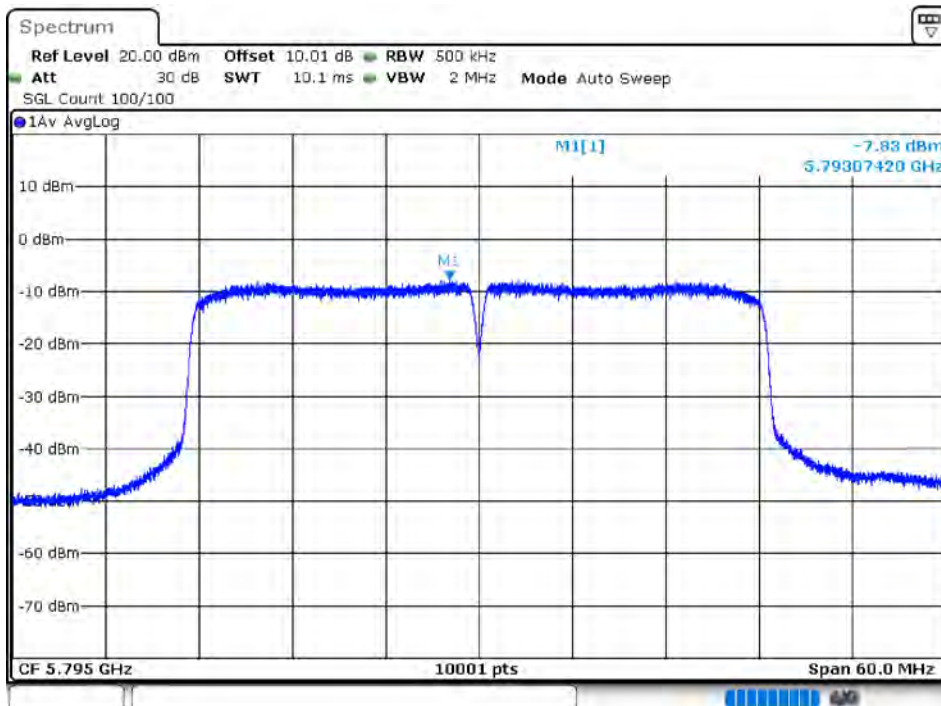


PSD NVNT n40 5755MHz Ant 2






PSD NVNT n40 5795MHz Ant 2

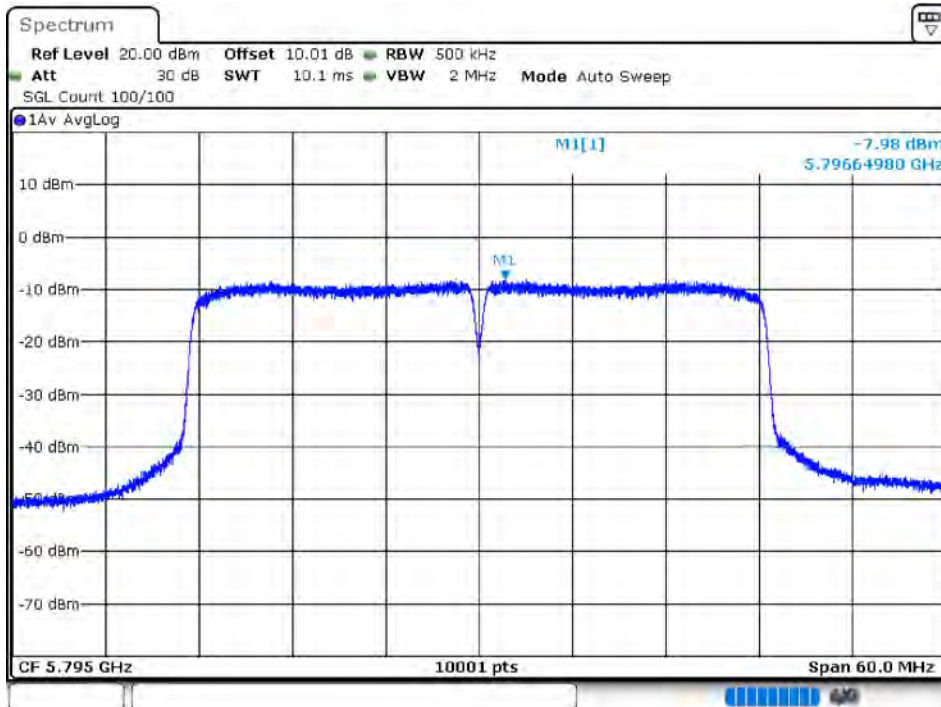


5.6 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant 1	-11.48		Pass
NVNT	a	5825	Ant 1	-26.05		Pass
NVNT	a	5745	Ant 2	-17.1		Pass
NVNT	a	5825	Ant 2	-25.27		Pass
NVNT	ac20	5745	Ant 1	-12.48		Pass
NVNT	ac20	5825	Ant 1	-24.43		Pass
NVNT	ac20	5745	Ant 2	-18.41		Pass
NVNT	ac20	5825	Ant 2	-24.94		Pass
NVNT	ac40	5755	Ant 1	-15.82		Pass
NVNT	ac40	5795	Ant 1	-27.74		Pass
NVNT	ac40	5755	Ant 2	-16.24		Pass
NVNT	ac40	5795	Ant 2	-25.66		Pass
NVNT	ac80	5775	Ant 1	-18.78		Pass
NVNT	ac80	5775	Ant 2	-18.53		Pass
NVNT	n20	5745	Ant 1	-14.62		Pass
NVNT	n20	5825	Ant 1	-22.76		Pass
NVNT	n20	5745	Ant 2	-18.63		Pass
NVNT	n20	5825	Ant 2	-24.29		Pass
NVNT	n40	5755	Ant 1	-15.68		Pass
NVNT	n40	5795	Ant 1	-26.28		Pass
NVNT	n40	5755	Ant 2	-11.99		Pass
NVNT	n40	5795	Ant 2	-24.32		Pass


Band Edge NVNT a 5745MHz Low Ant 1

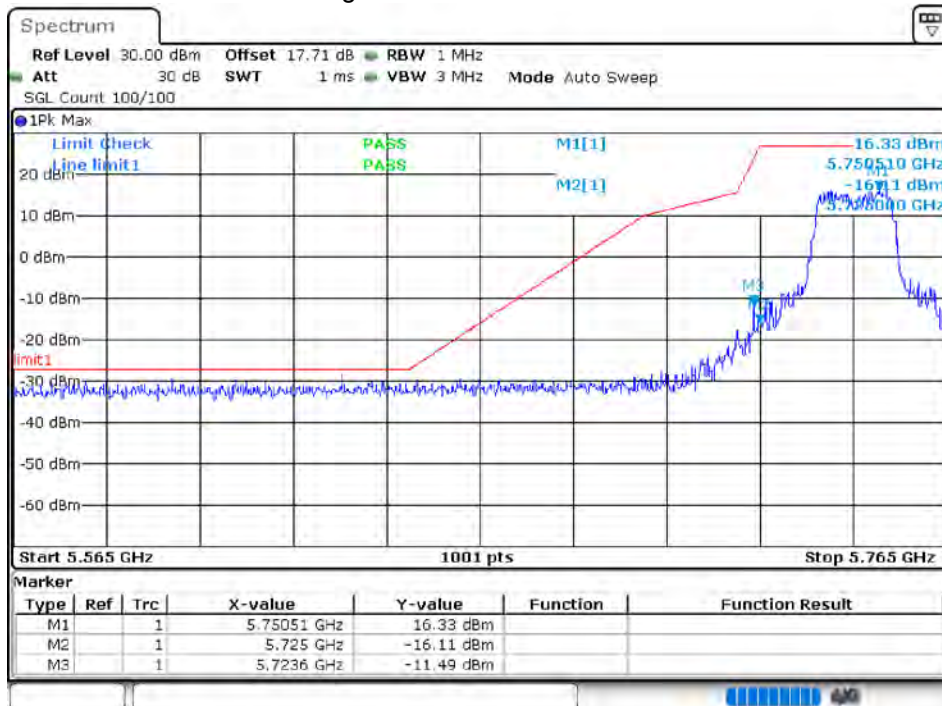


Band Edge NVNT a 5825MHz High Ant 1

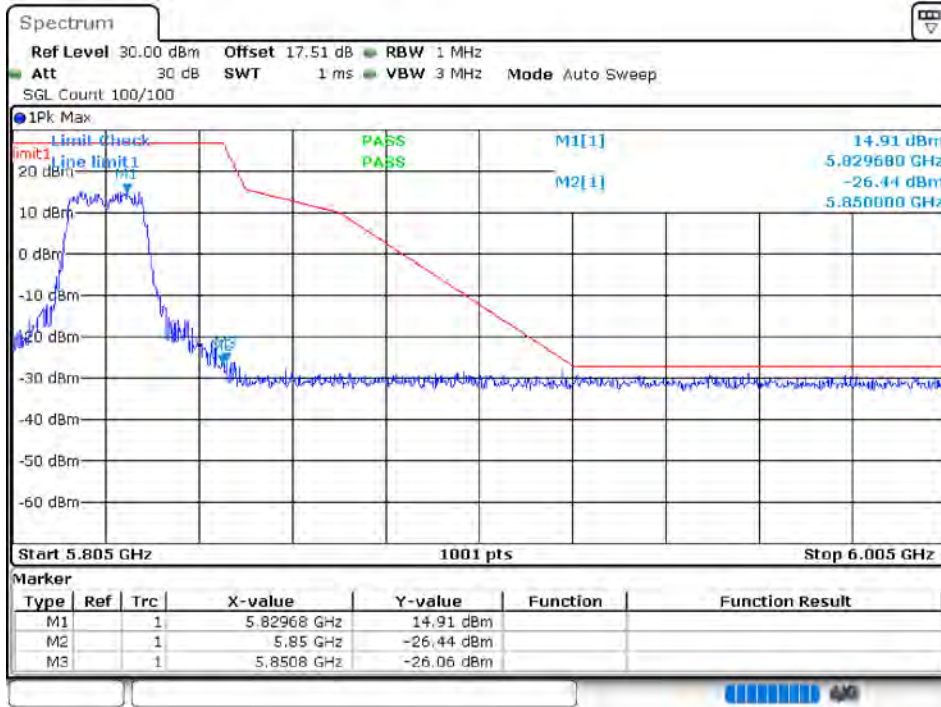


Band Edge NVNT a 5745MHz Low Ant 2

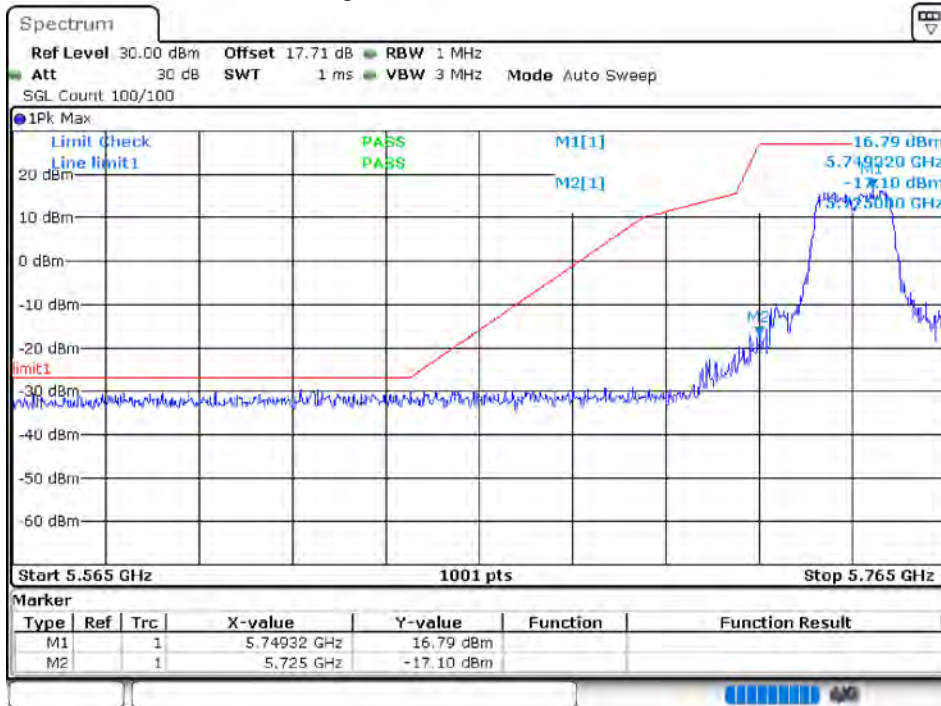

Band Edge NVNT a 5825MHz High Ant 2

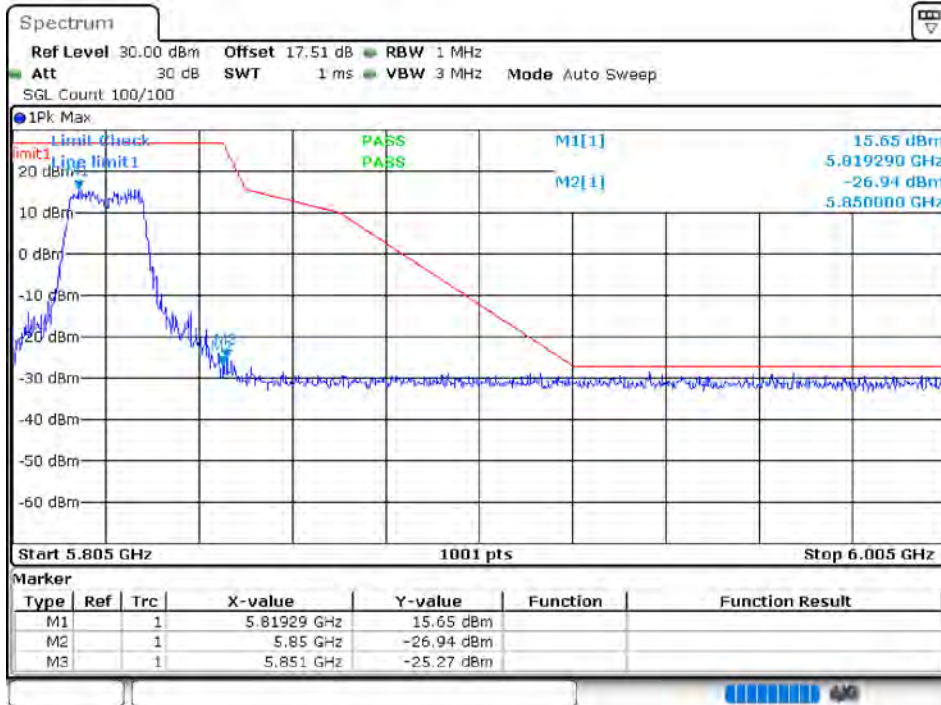


Band Edge NVNT ac20 5745MHz Low Ant 1

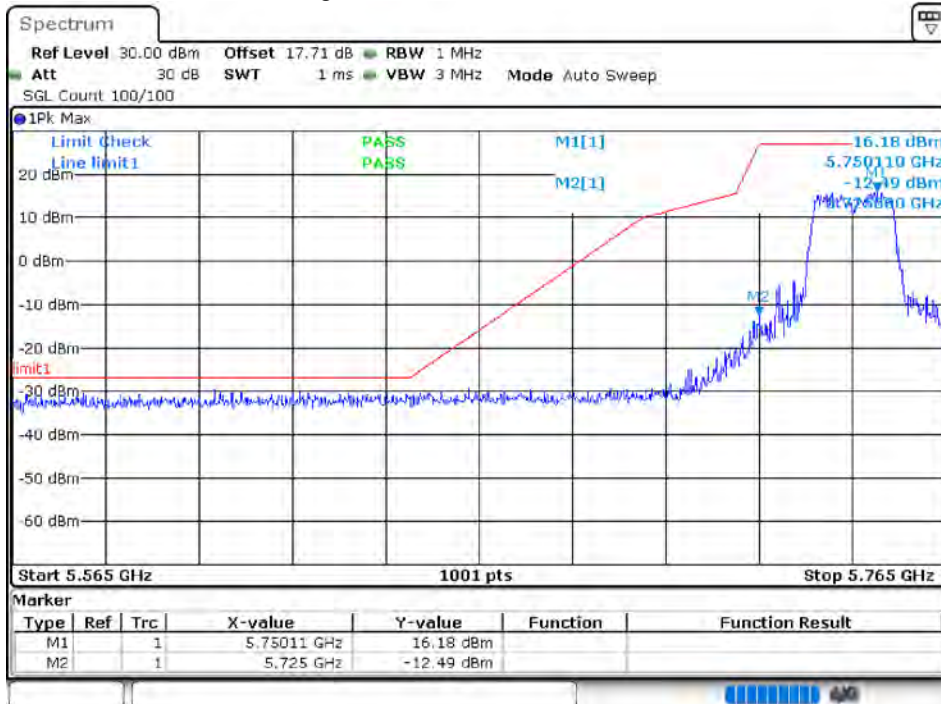





Band Edge NVNT ac20 5825MHz High Ant 1

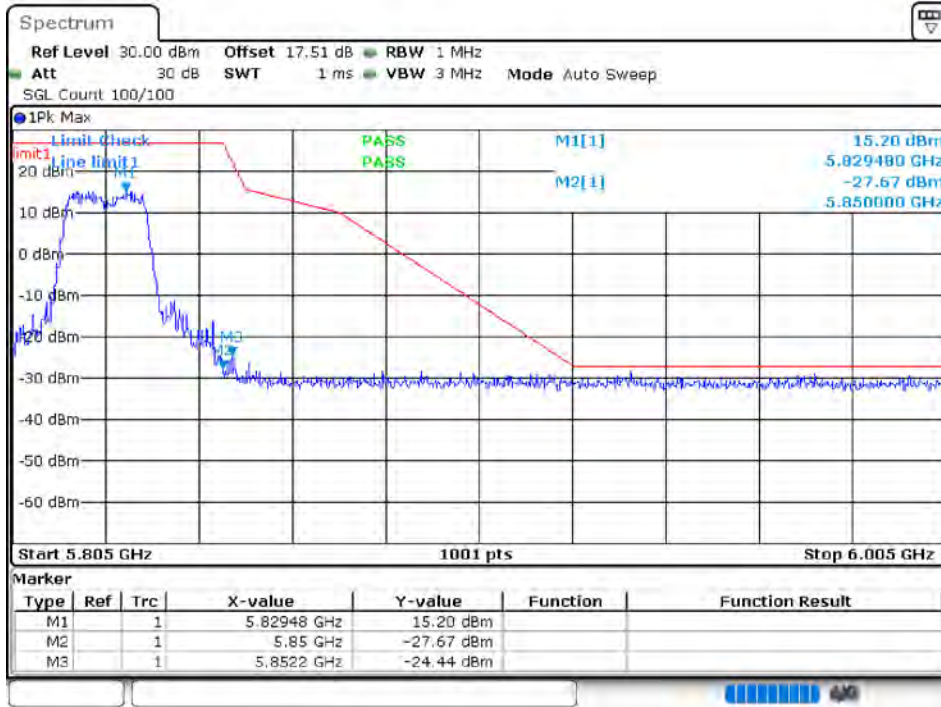


Band Edge NVNT ac20 5745MHz Low Ant 2

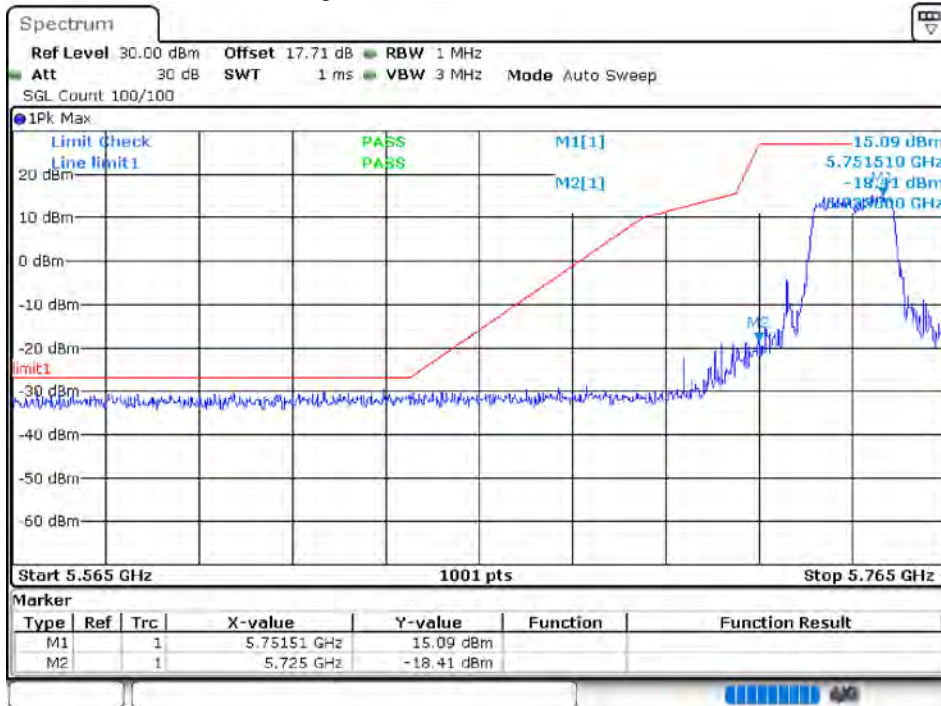


Band Edge NVNT ac20 5825MHz High Ant 2

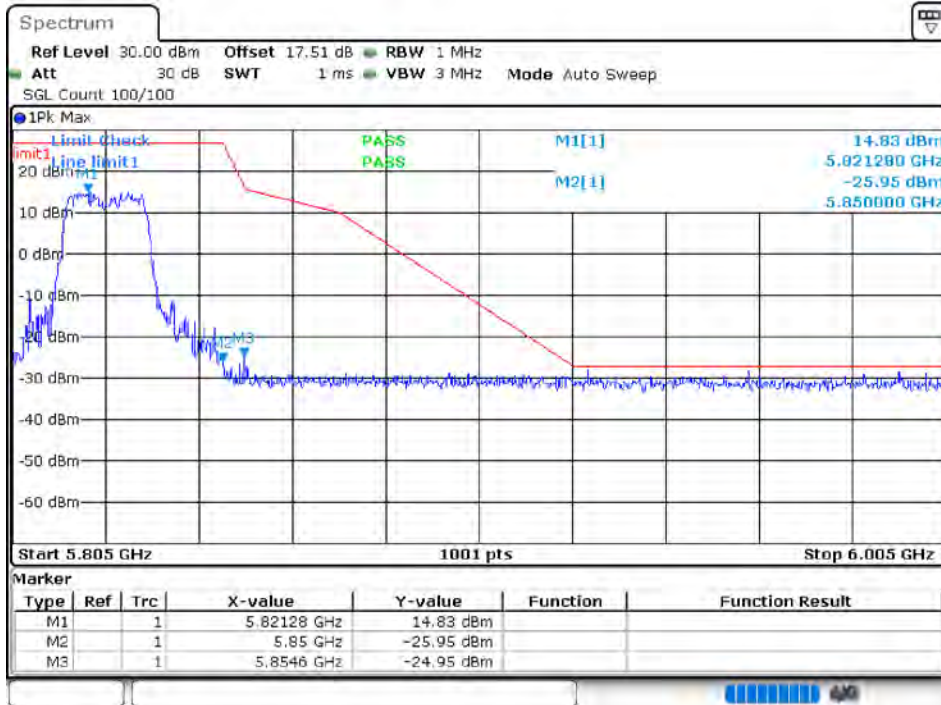


Band Edge NVNT ac40 5755MHz Low Ant 1

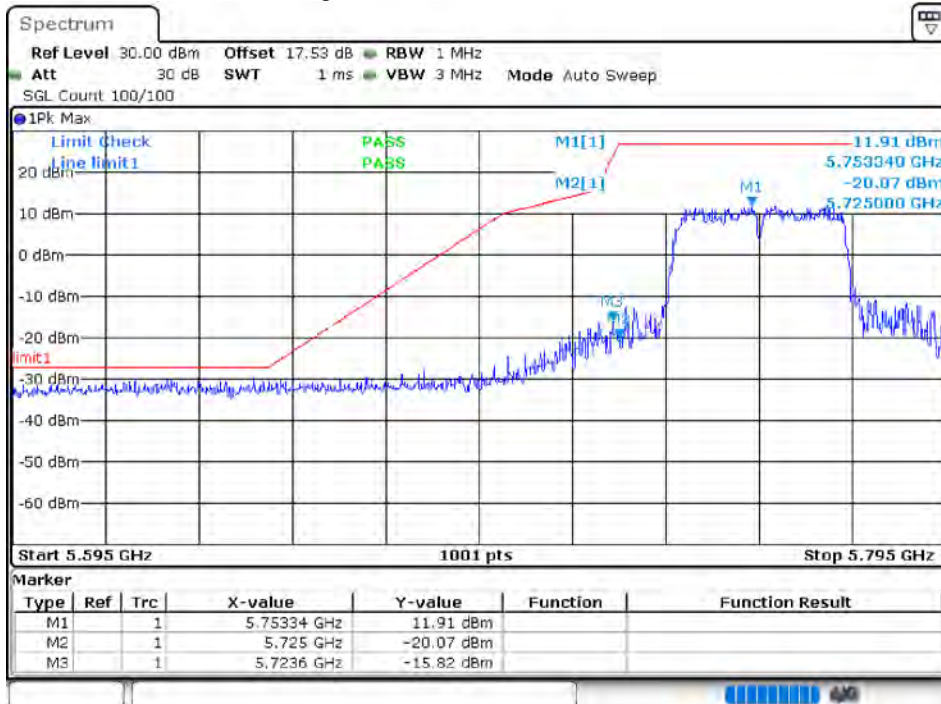

Band Edge NVNT ac40 5795MHz High Ant 1

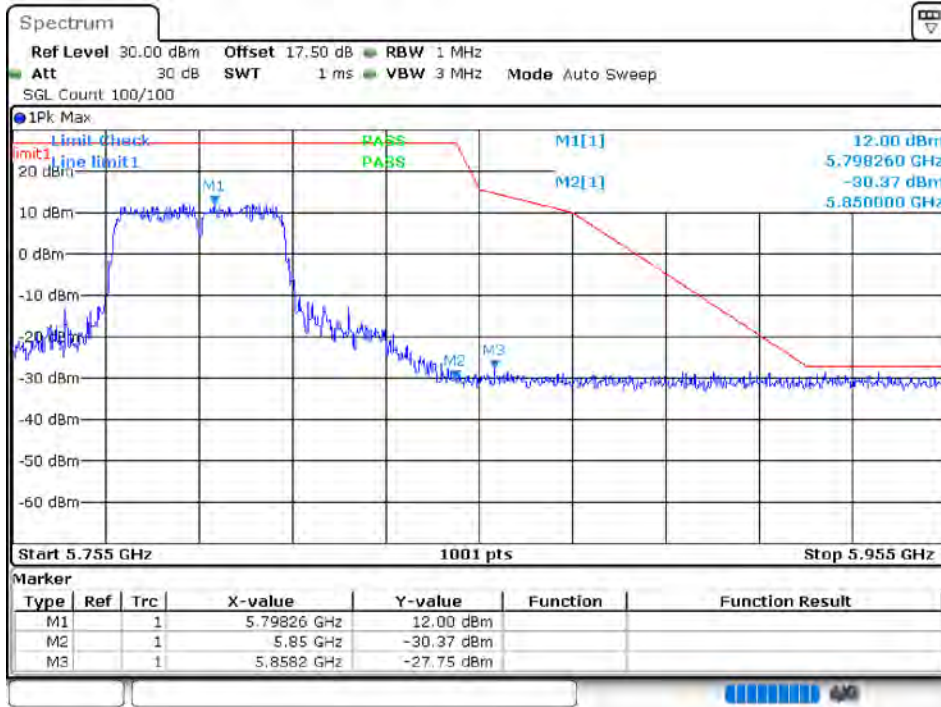


Band Edge NVNT ac40 5755MHz Low Ant 2

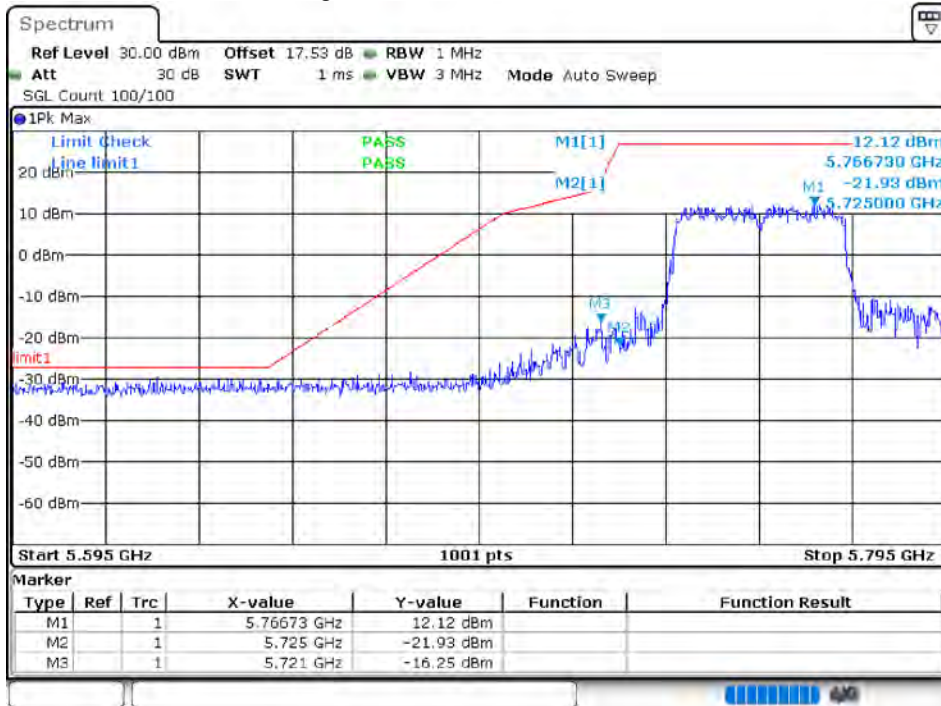




Band Edge NVNT ac40 5795MHz High Ant 2

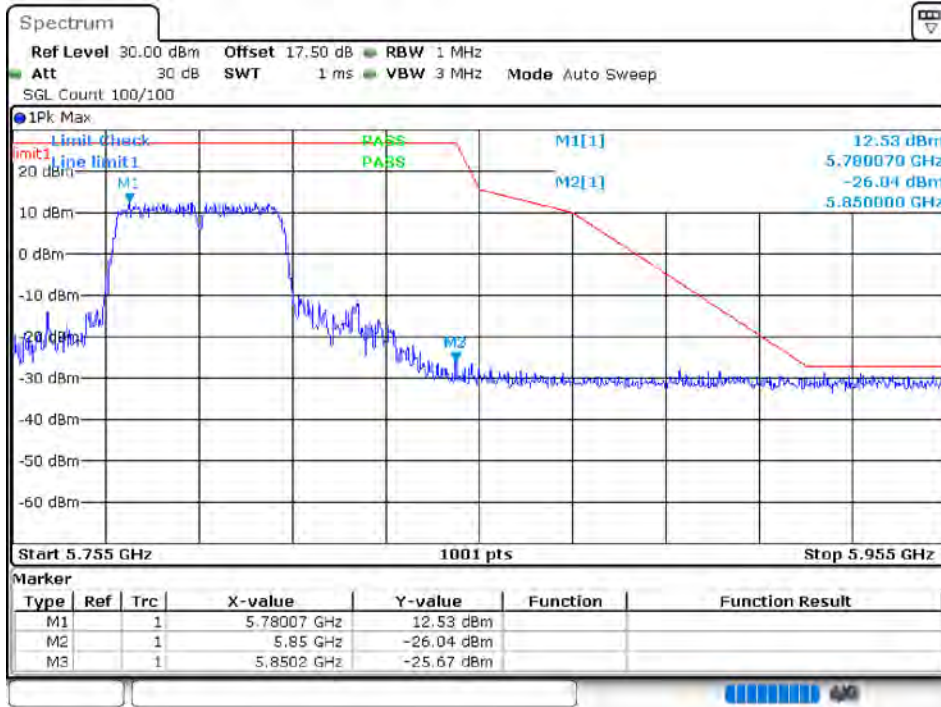


Band Edge NVNT ac80 5775MHz High Ant 1

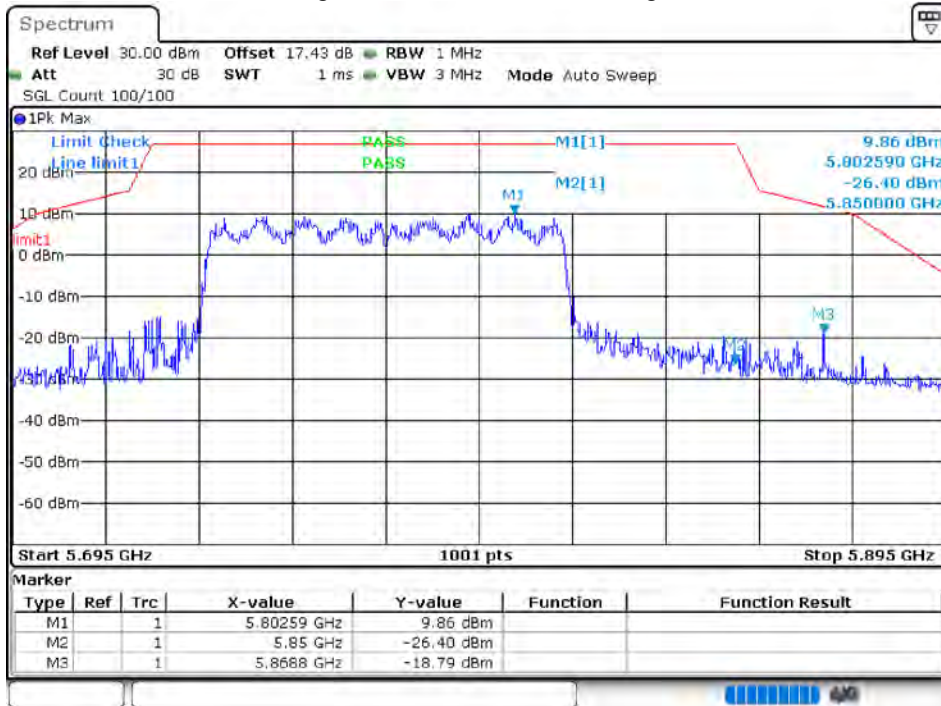





Band Edge NVNT ac80 5775MHz High Ant 2

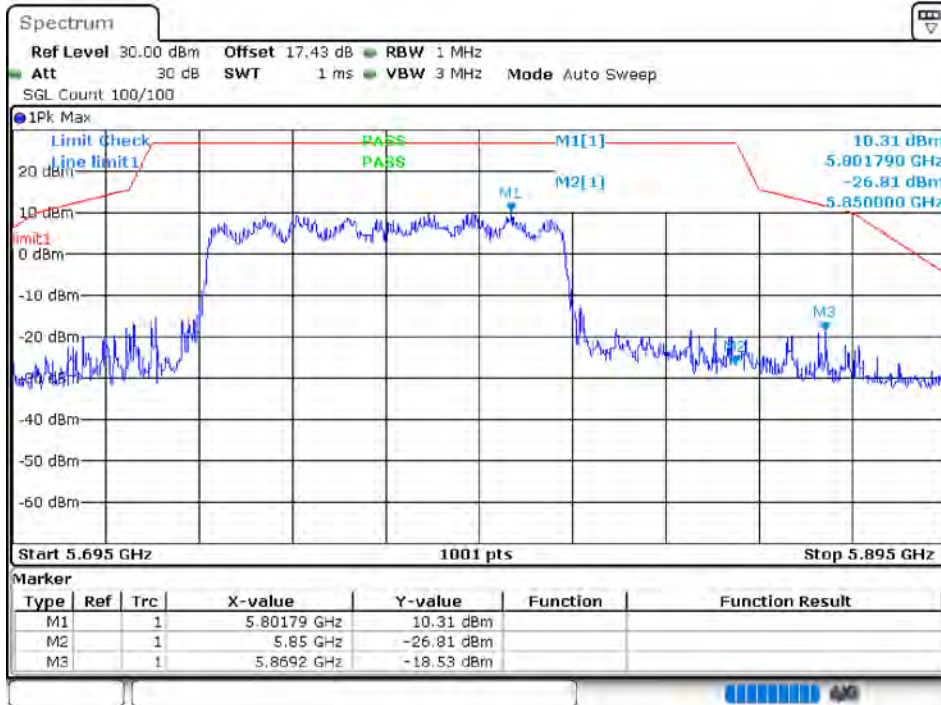


Band Edge NVNT n20 5745MHz Low Ant 1

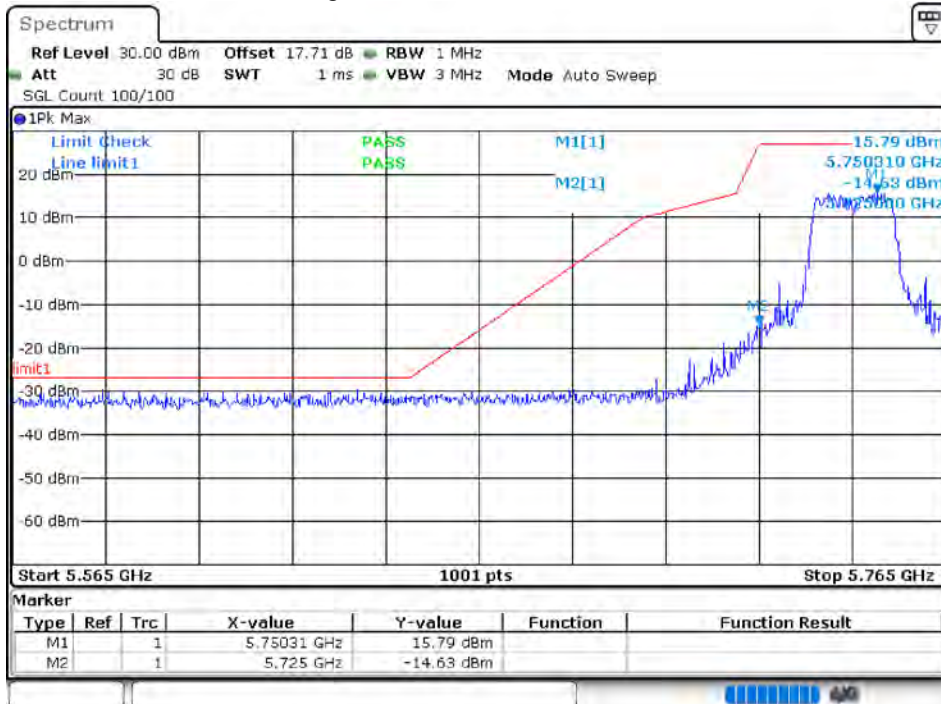


Band Edge NVNT n20 5825MHz High Ant 1

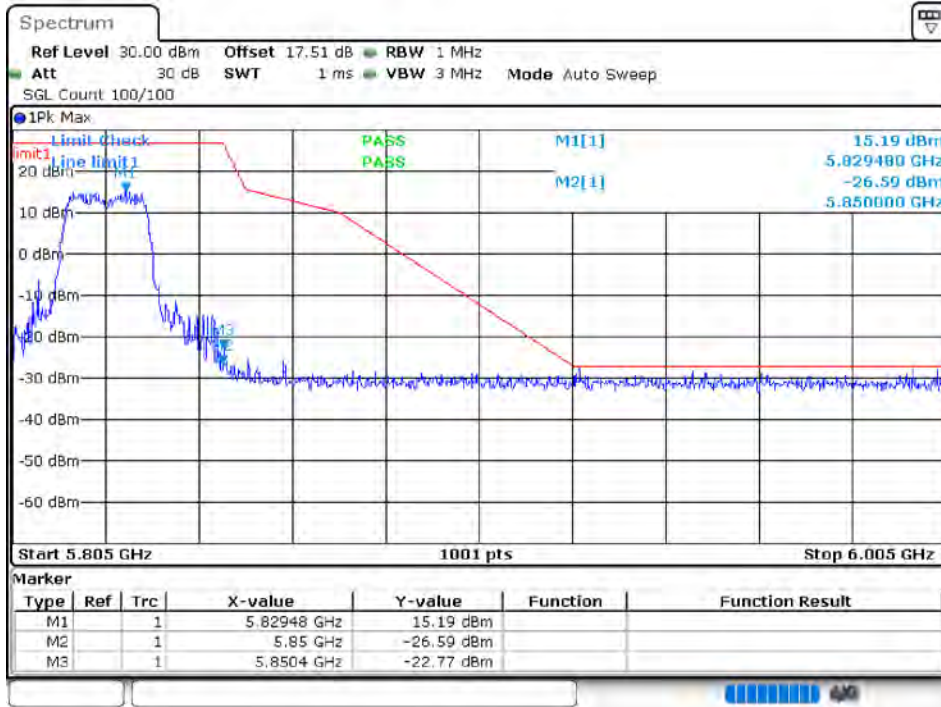


Band Edge NVNT n20 5745MHz Low Ant 2

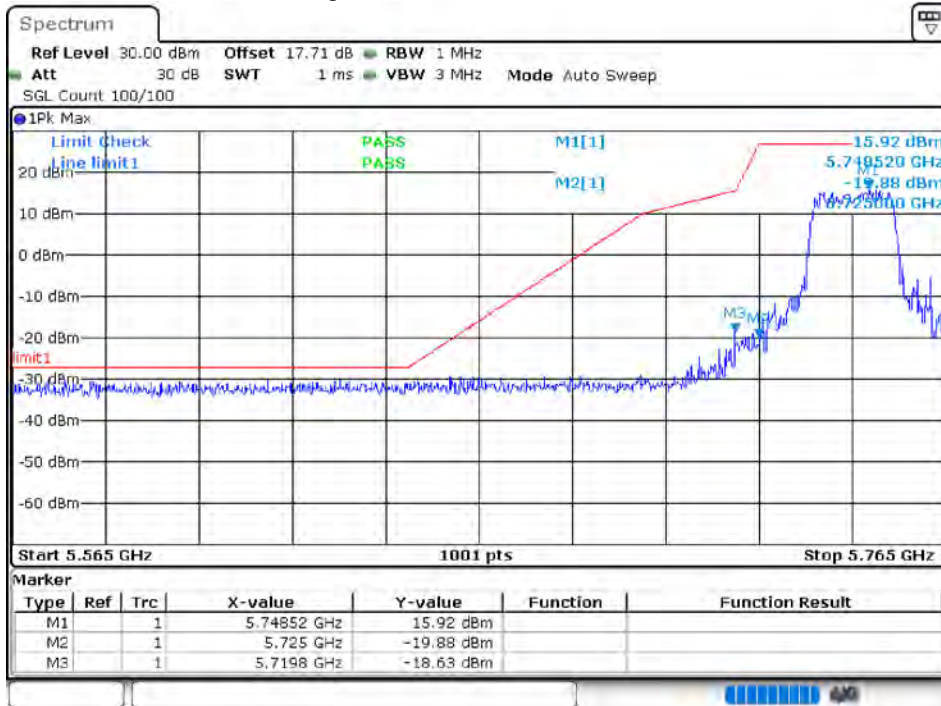

Band Edge NVNT n20 5825MHz High Ant 2

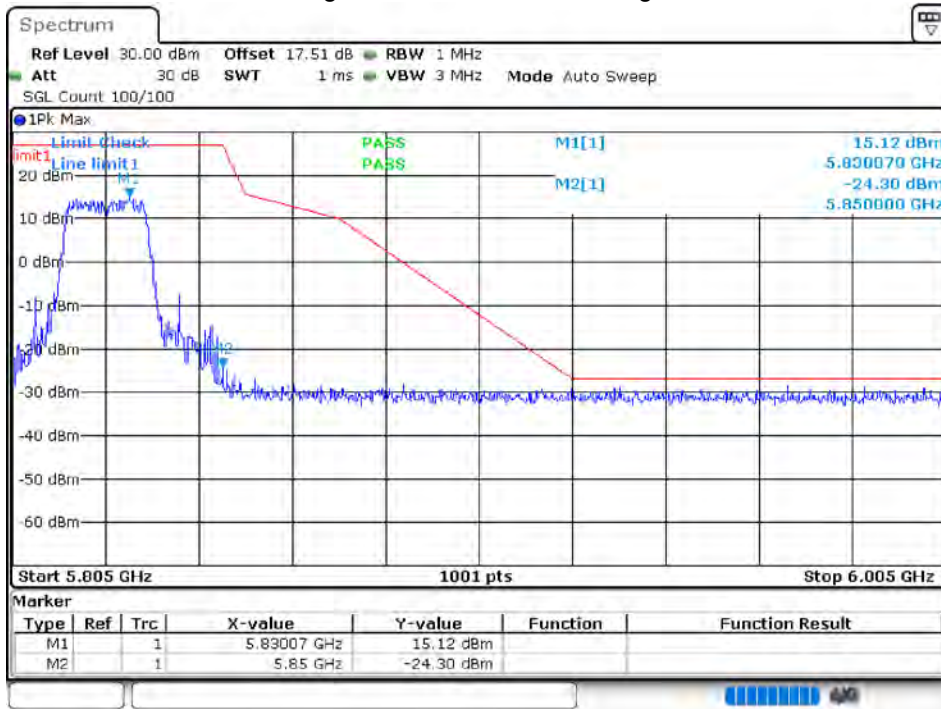


Band Edge NVNT n40 5755MHz Low Ant 1

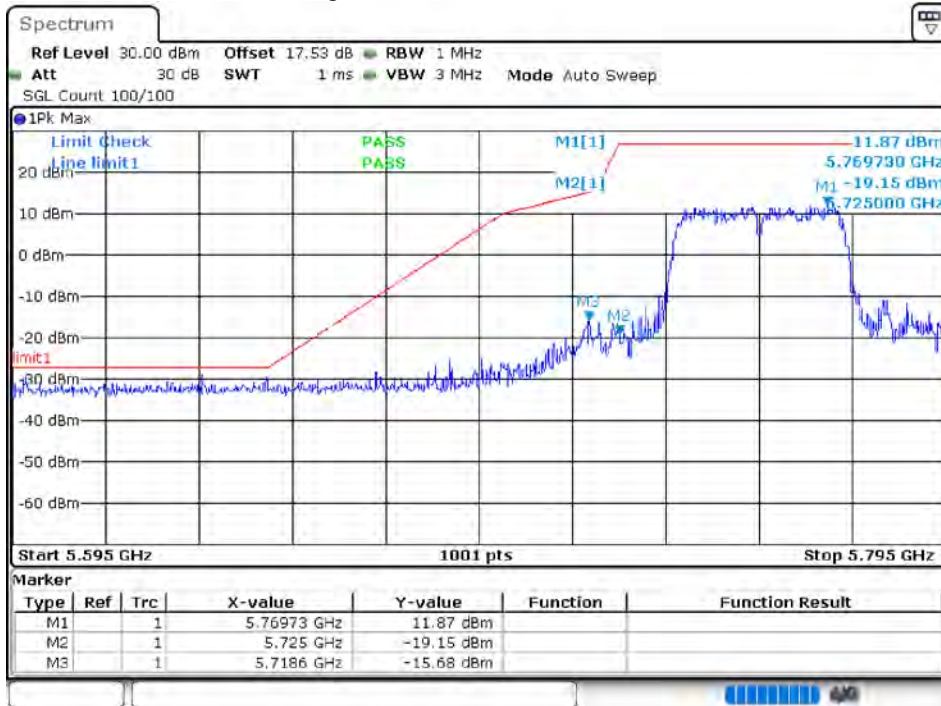




Band Edge NVNT n40 5795MHz High Ant 1

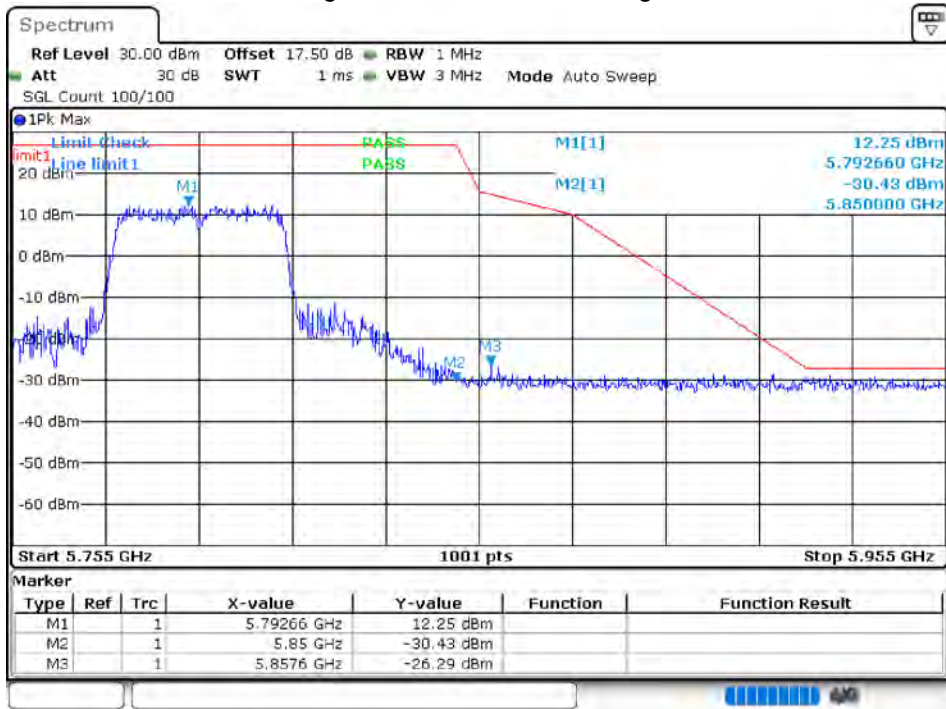


Band Edge NVNT n40 5755MHz Low Ant 2

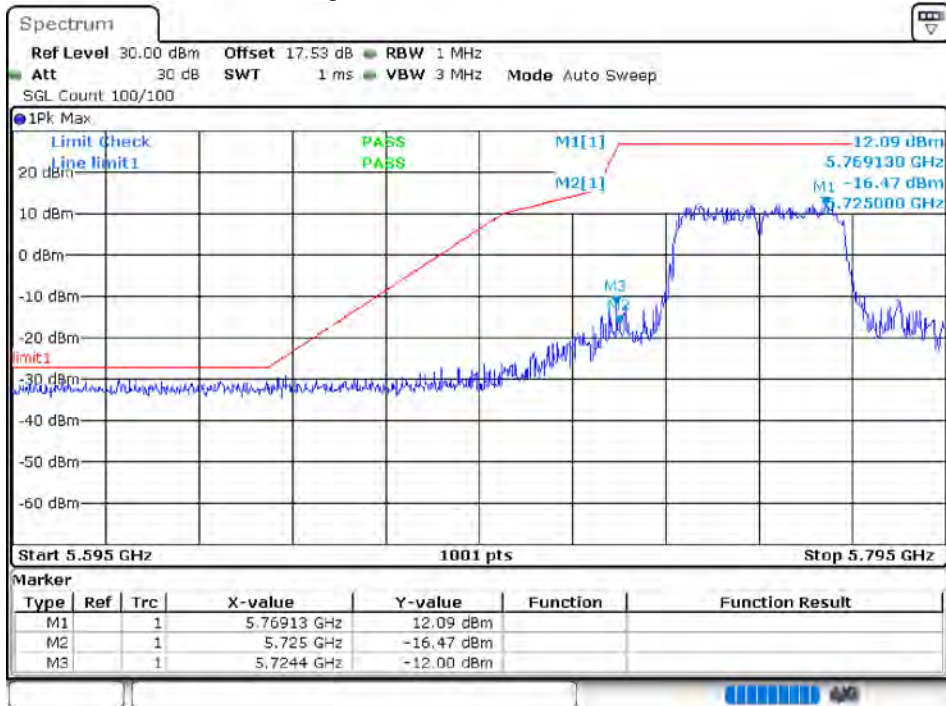




Band Edge NVNT n40 5795MHz High Ant 2

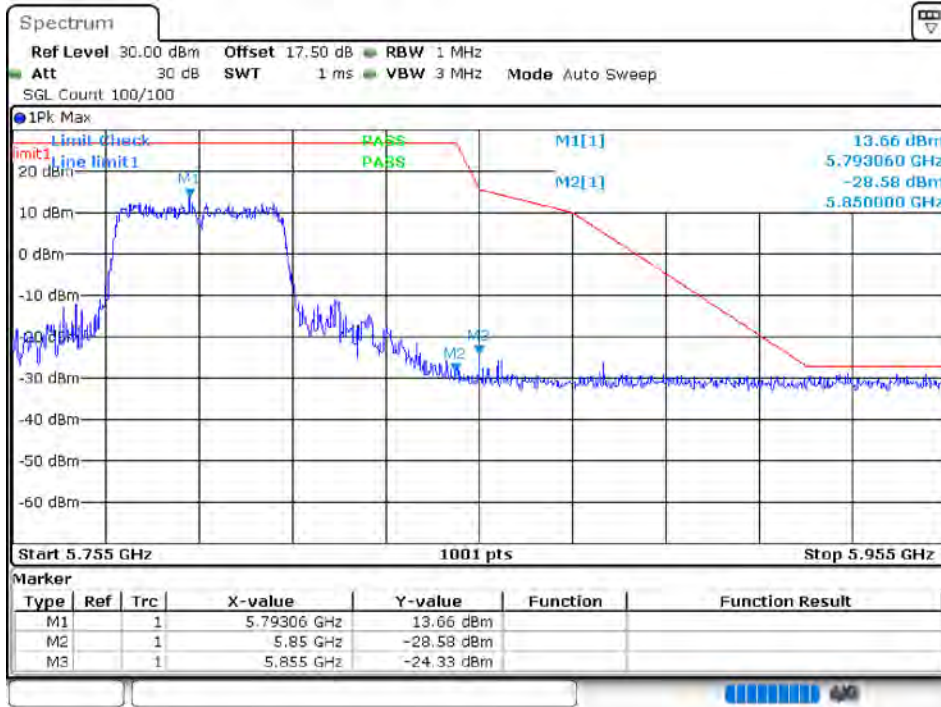


**5.7 CONDUCTED RF SPURIOUS EMISSION**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5745	Ant 1	-29.82	-27	Pass
NVNT	a	5785	Ant 1	-29.61	-27	Pass
NVNT	a	5825	Ant 1	-30.25	-27	Pass
NVNT	a	5745	Ant 2	-30.15	-27	Pass
NVNT	a	5785	Ant 2	-30.79	-27	Pass
NVNT	a	5825	Ant 2	-30.3	-27	Pass
NVNT	ac20	5745	Ant 1	-30.47	-27	Pass
NVNT	ac20	5785	Ant 1	-30.46	-27	Pass
NVNT	ac20	5825	Ant 1	-30.32	-27	Pass
NVNT	ac20	5745	Ant 2	-30.3	-27	Pass
NVNT	ac20	5785	Ant 2	-30.64	-27	Pass
NVNT	ac20	5825	Ant 2	-30.16	-27	Pass
NVNT	ac40	5755	Ant 1	-30	-27	Pass
NVNT	ac40	5795	Ant 1	-29.22	-27	Pass
NVNT	ac40	5755	Ant 2	-30.38	-27	Pass
NVNT	ac40	5795	Ant 2	-30.89	-27	Pass
NVNT	ac80	5775	Ant 1	-29.75	-27	Pass
NVNT	ac80	5775	Ant 2	-29.77	-27	Pass
NVNT	n20	5745	Ant 1	-30.24	-27	Pass
NVNT	n20	5785	Ant 1	-30.76	-27	Pass
NVNT	n20	5825	Ant 1	-29.84	-27	Pass
NVNT	n20	5745	Ant 2	-30.14	-27	Pass
NVNT	n20	5785	Ant 2	-30.7	-27	Pass
NVNT	n20	5825	Ant 2	-30.44	-27	Pass
NVNT	n40	5755	Ant 1	-29.78	-27	Pass
NVNT	n40	5795	Ant 1	-30.5	-27	Pass
NVNT	n40	5755	Ant 2	-30.09	-27	Pass
NVNT	n40	5795	Ant 2	-30.83	-27	Pass


Tx. Spurious NVNT a 5745MHz Ant 1 Emission

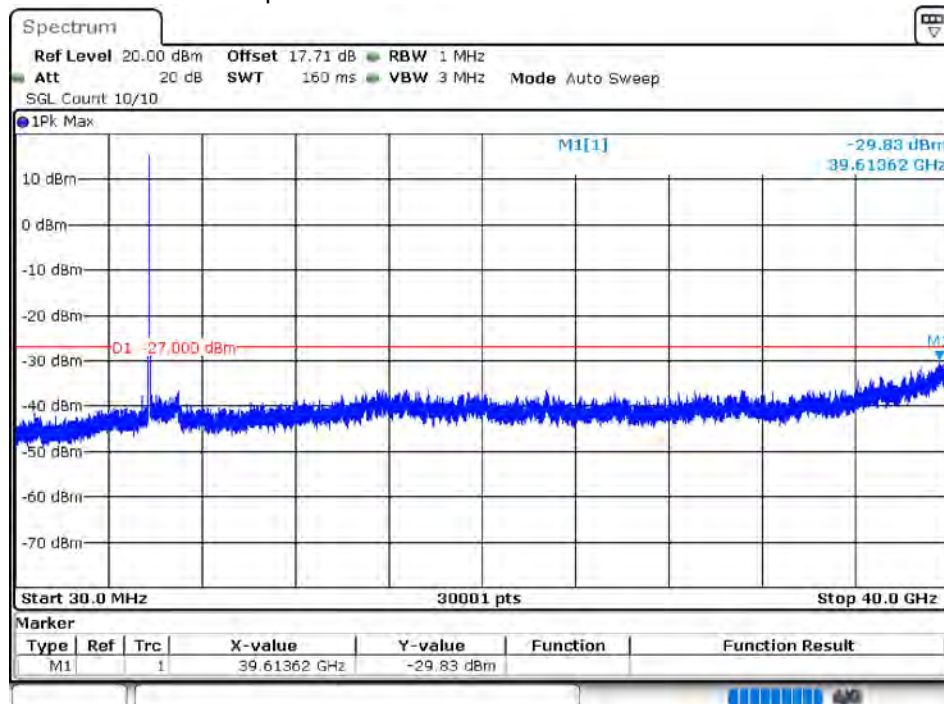


Tx. Spurious NVNT a 5785MHz Ant 1 Emission

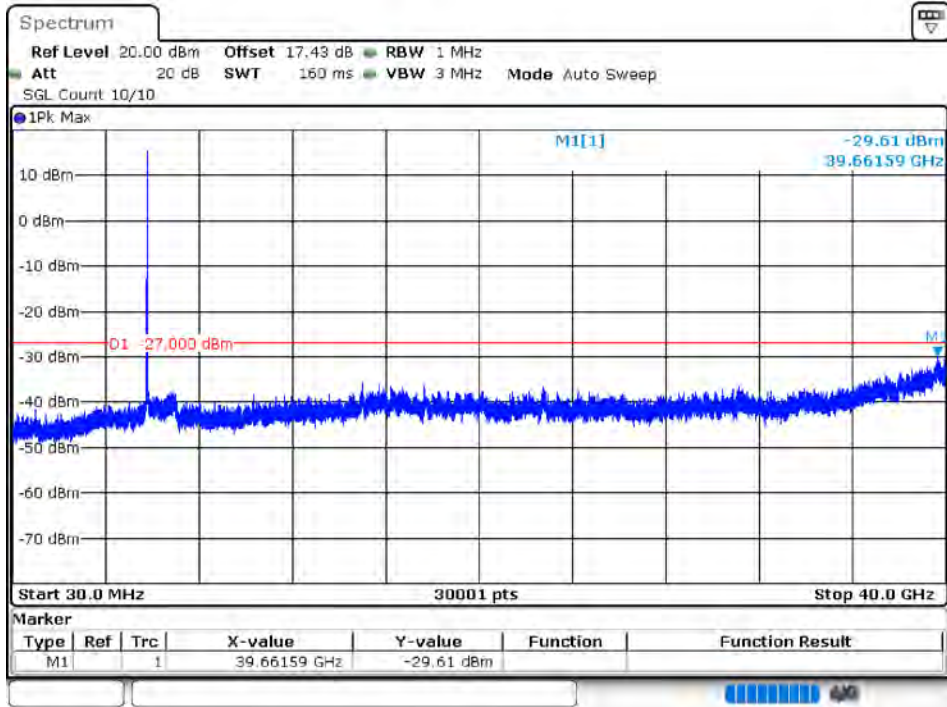


Tx. Spurious NVNT a 5825MHz Ant 1 Emission

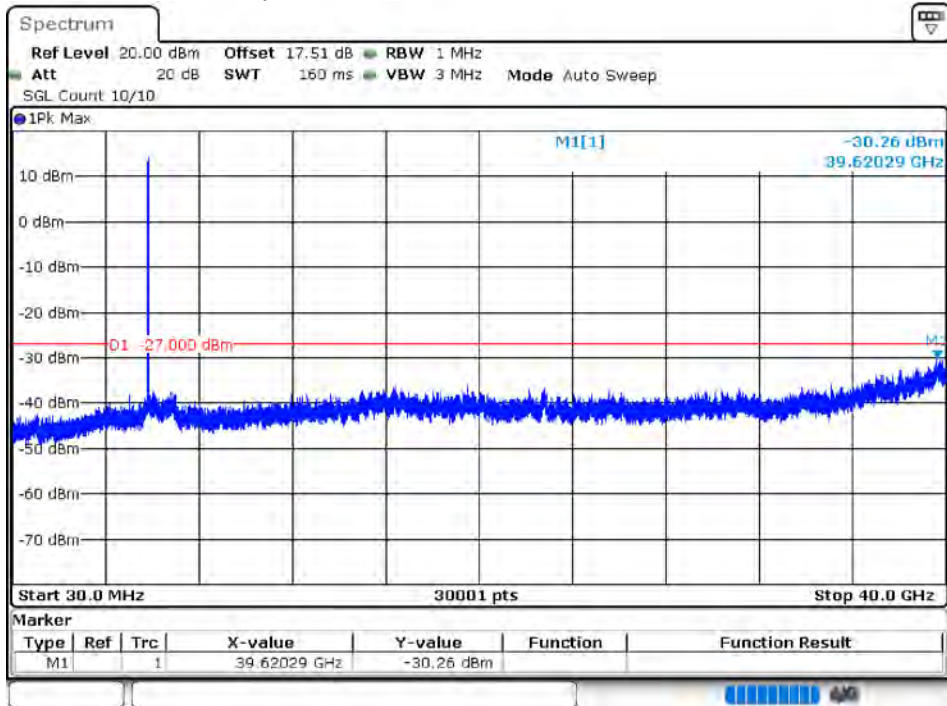

Tx. Spurious NVNT a 5745MHz Ant 2 Emission

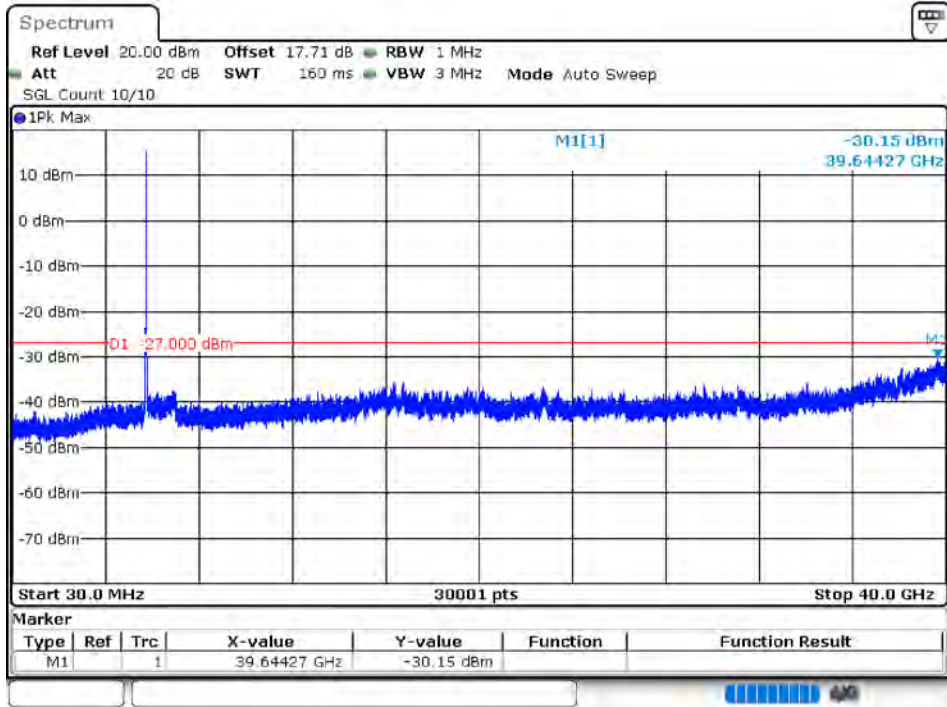


Tx. Spurious NVNT a 5785MHz Ant 2 Emission

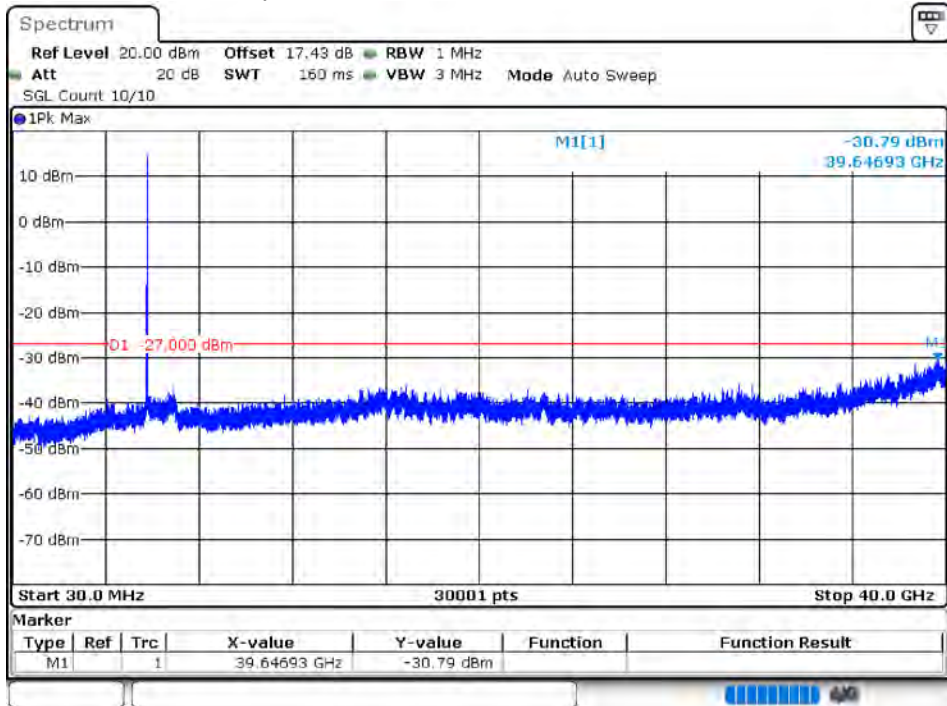





Tx. Spurious NVNT a 5825MHz Ant 2 Emission

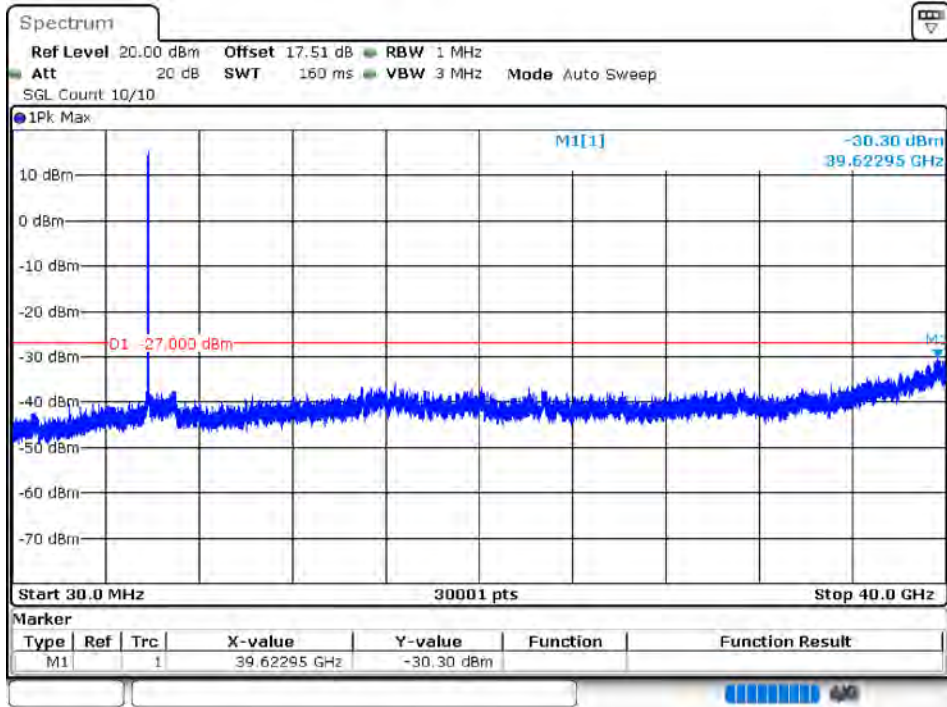


Tx. Spurious NVNT ac20 5745MHz Ant 1 Emission

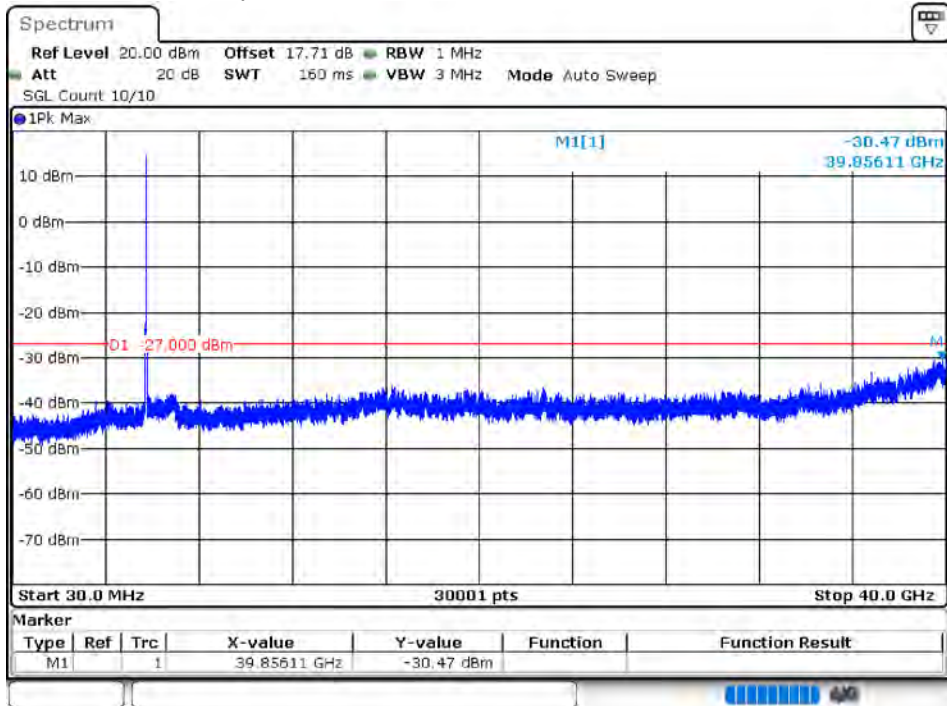


Tx. Spurious NVNT ac20 5785MHz Ant 1 Emission

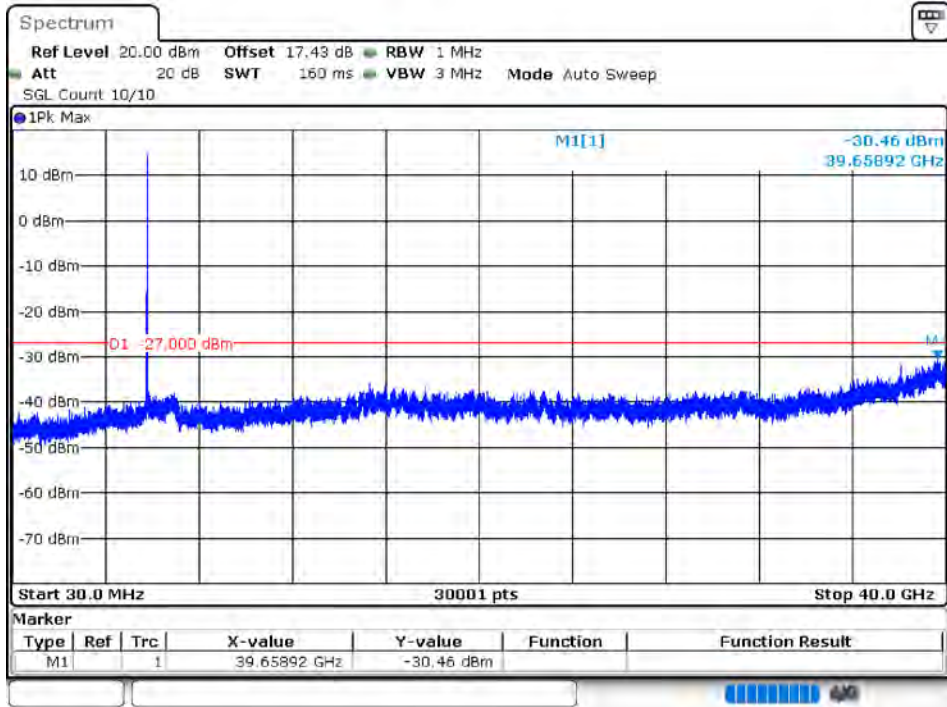


Tx. Spurious NVNT ac20 5825MHz Ant 1 Emission

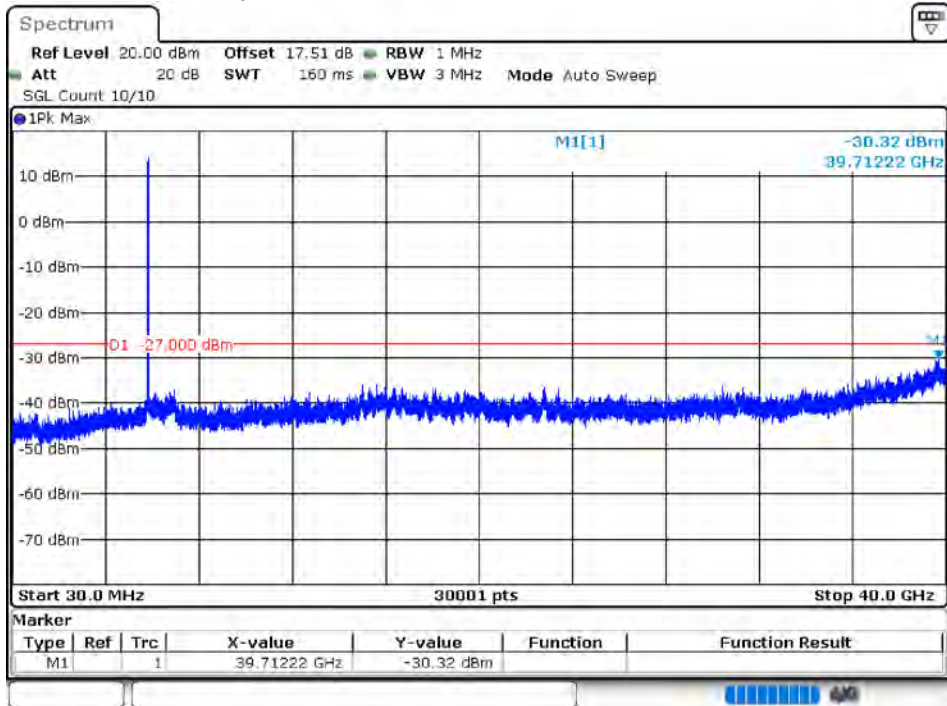

Tx. Spurious NVNT ac20 5745MHz Ant 2 Emission

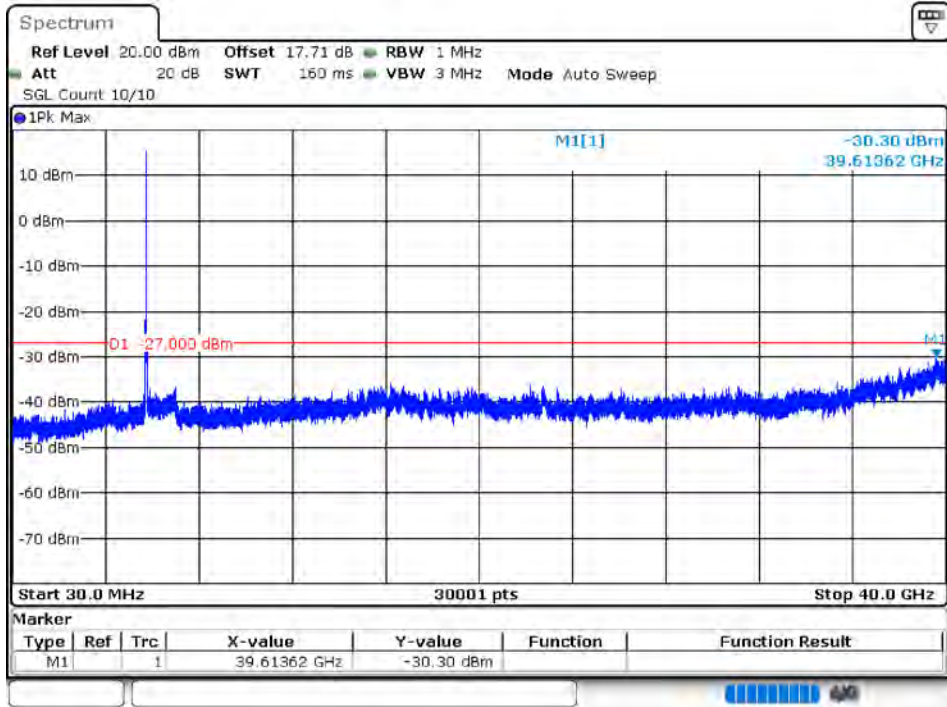


Tx. Spurious NVNT ac20 5785MHz Ant 2 Emission

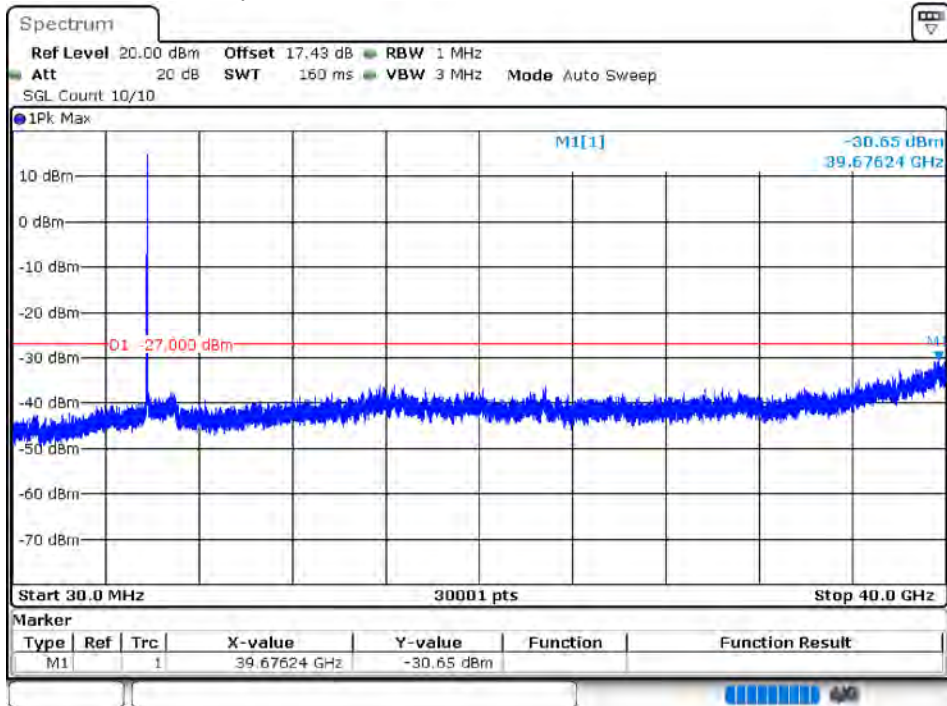




Tx. Spurious NVNT ac20 5825MHz Ant 2 Emission

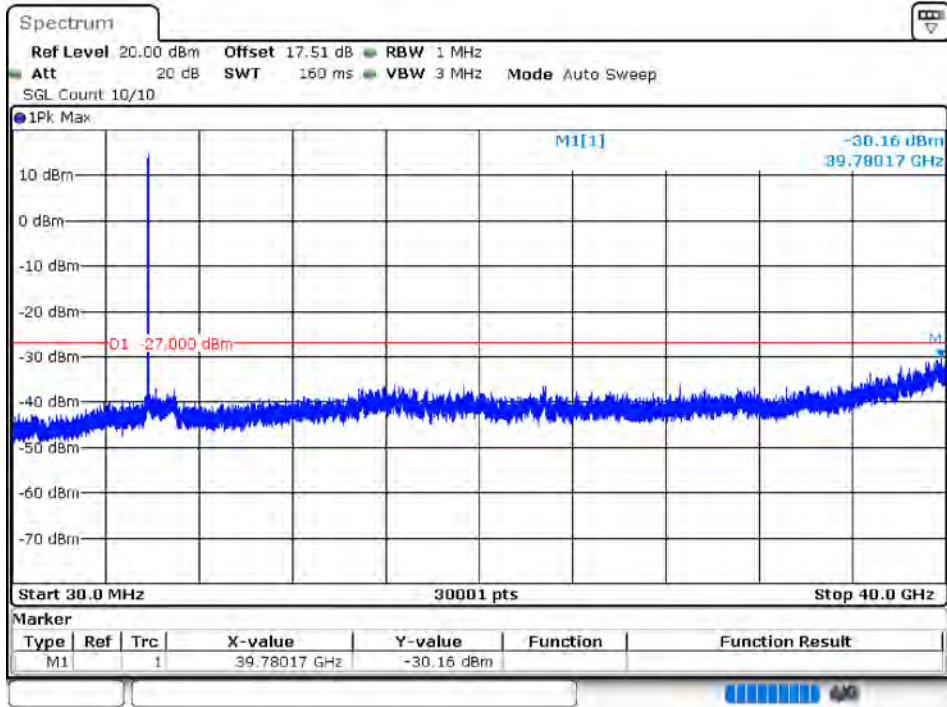


Tx. Spurious NVNT ac40 5755MHz Ant 1 Emission

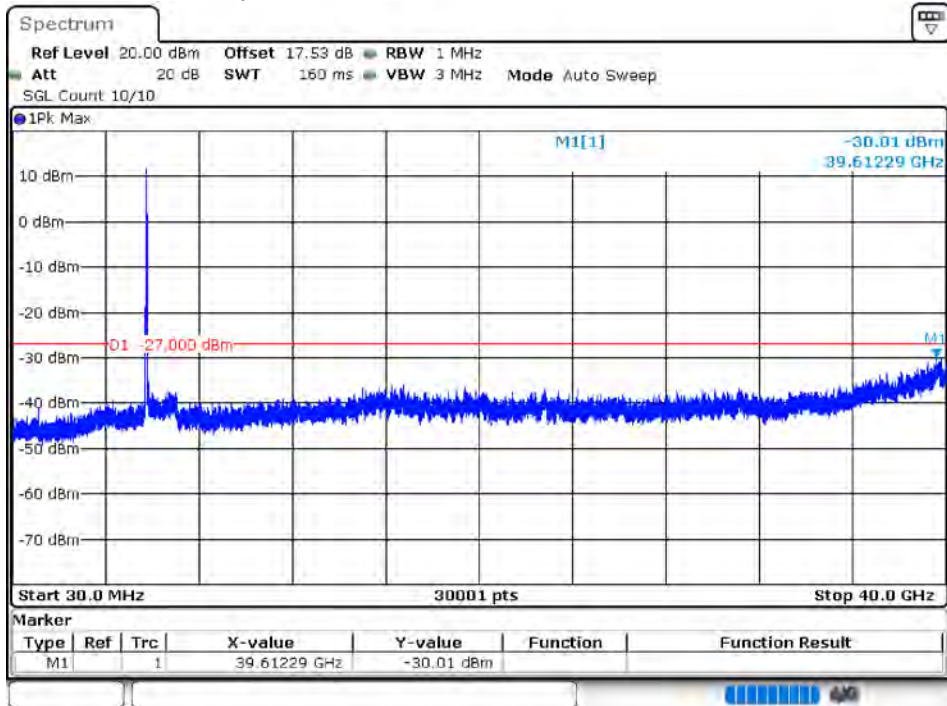





Tx. Spurious NVNT ac40 5795MHz Ant 1 Emission

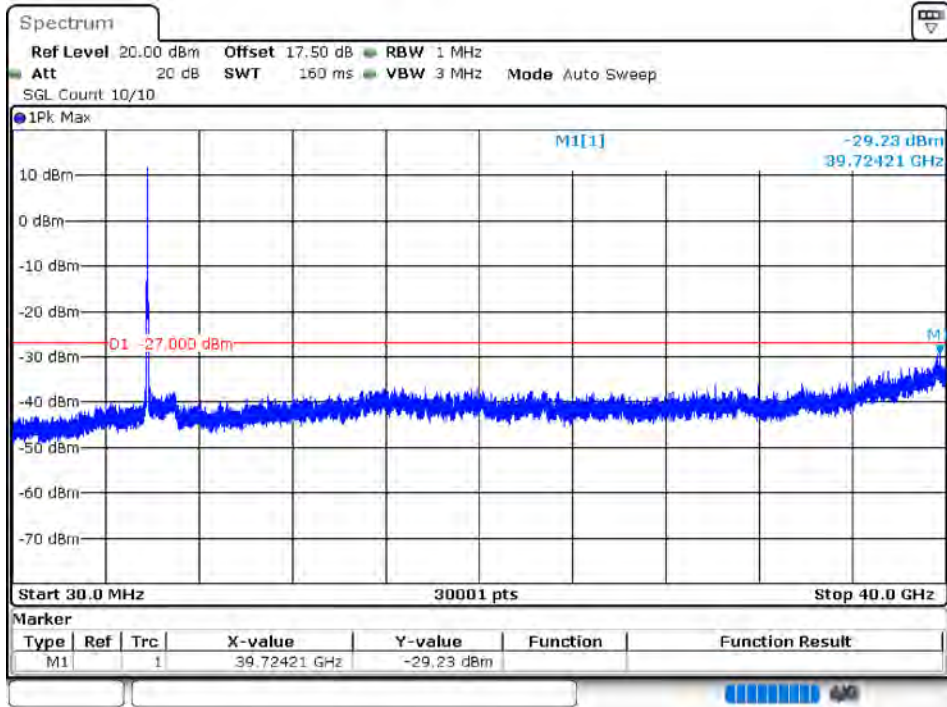


Tx. Spurious NVNT ac40 5755MHz Ant 2 Emission

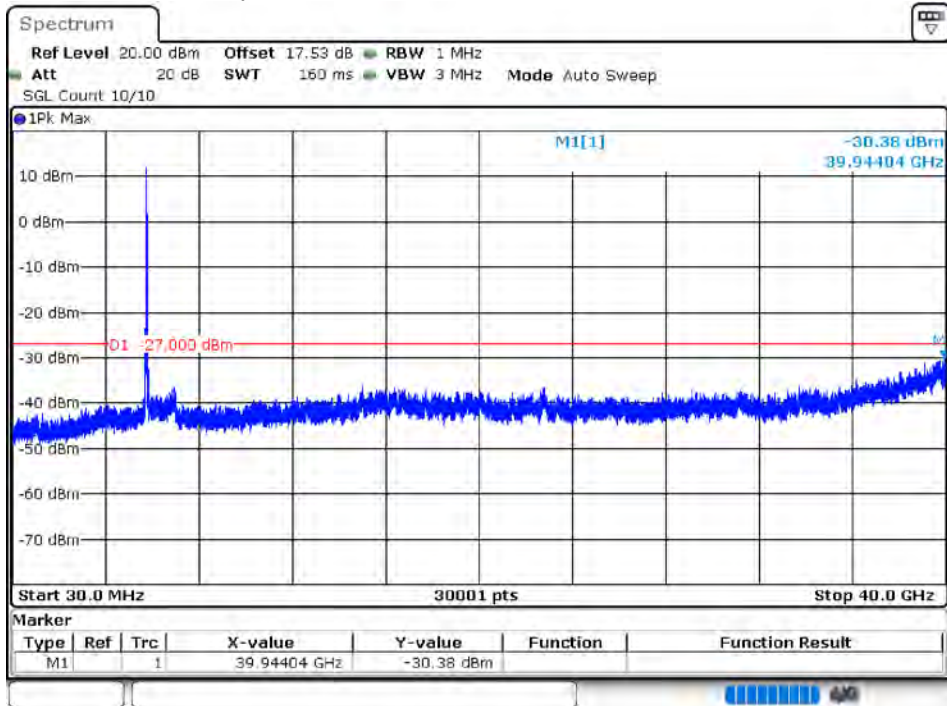


Tx. Spurious NVNT ac40 5795MHz Ant 2 Emission

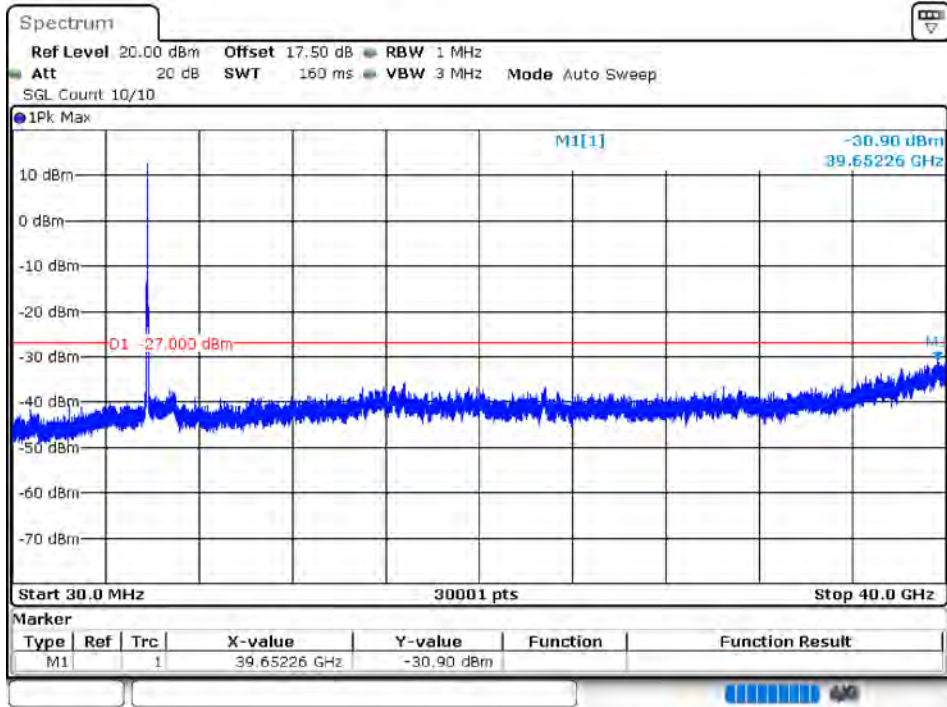


Tx. Spurious NVNT ac80 5775MHz Ant 1 Emission

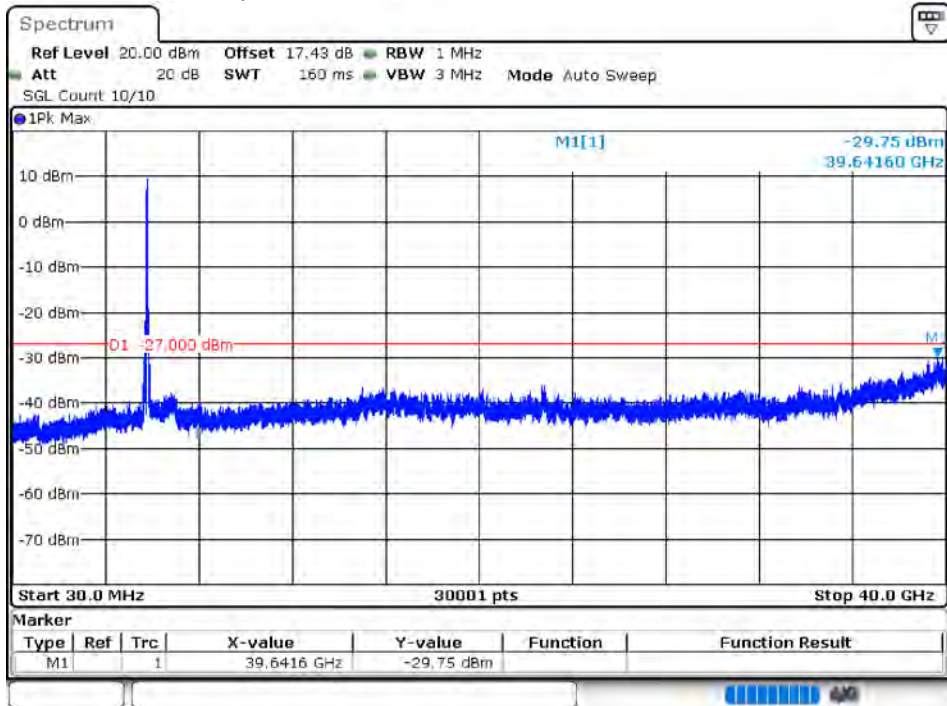

Tx. Spurious NVNT ac80 5775MHz Ant 2 Emission

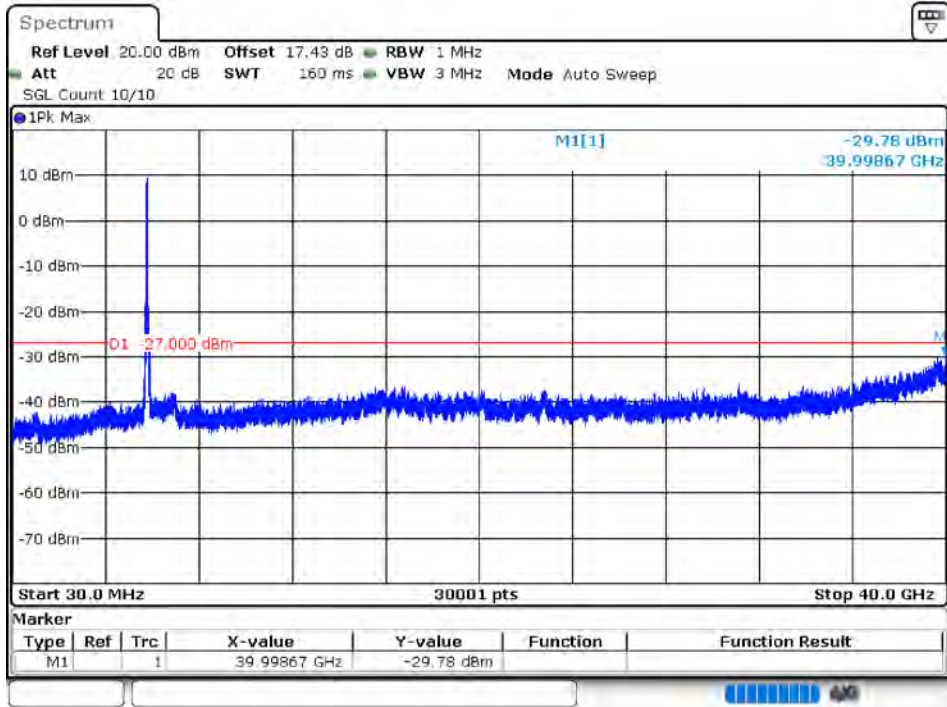


Tx. Spurious NVNT n20 5745MHz Ant 1 Emission

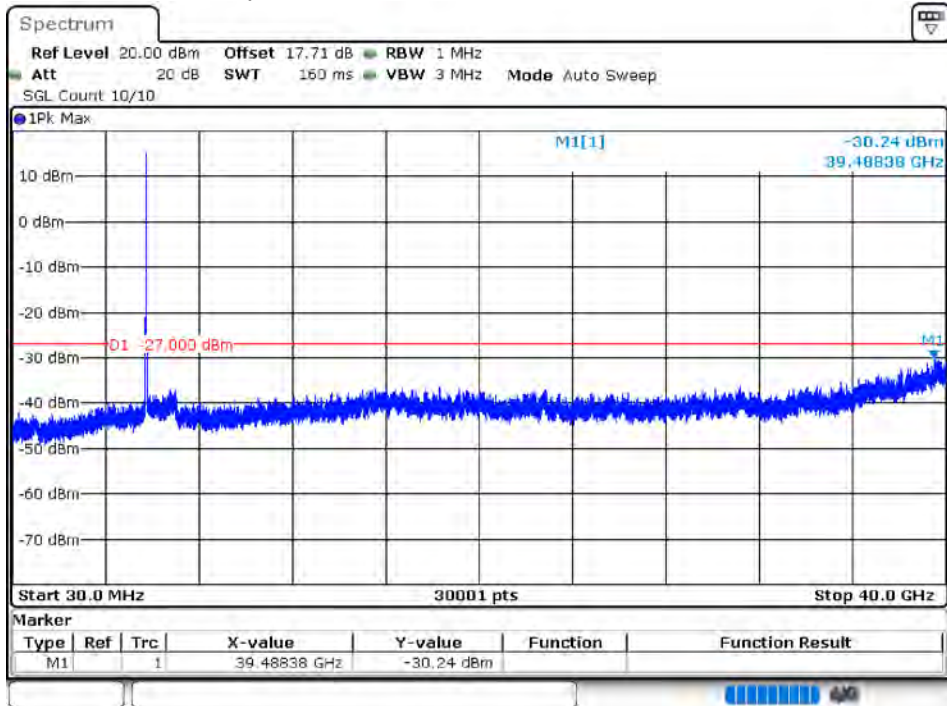




Tx. Spurious NVNT n20 5785MHz Ant 1 Emission

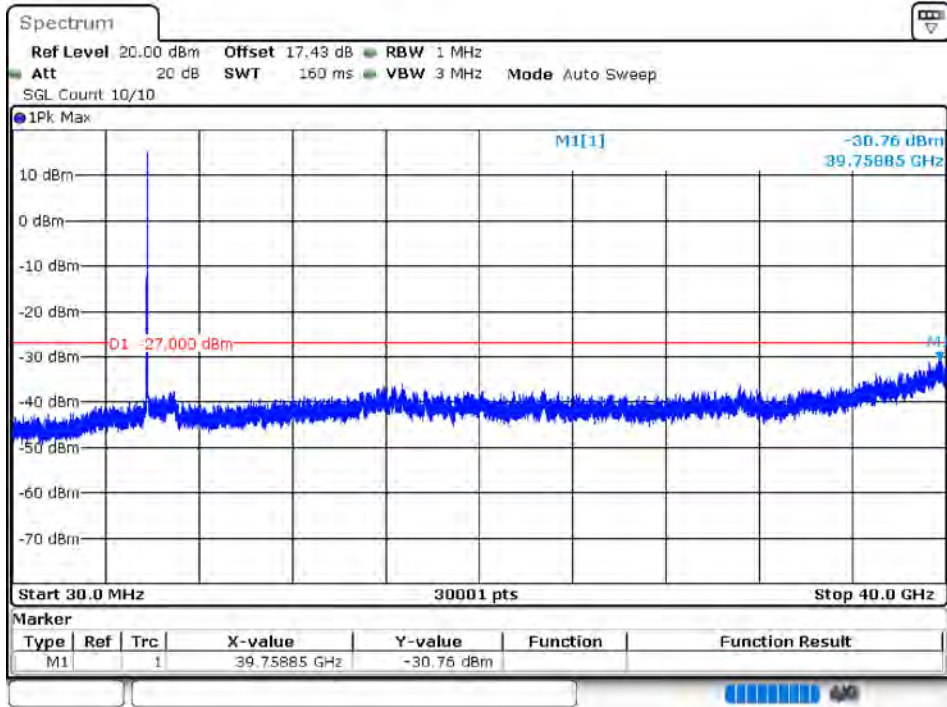


Tx. Spurious NVNT n20 5825MHz Ant 1 Emission

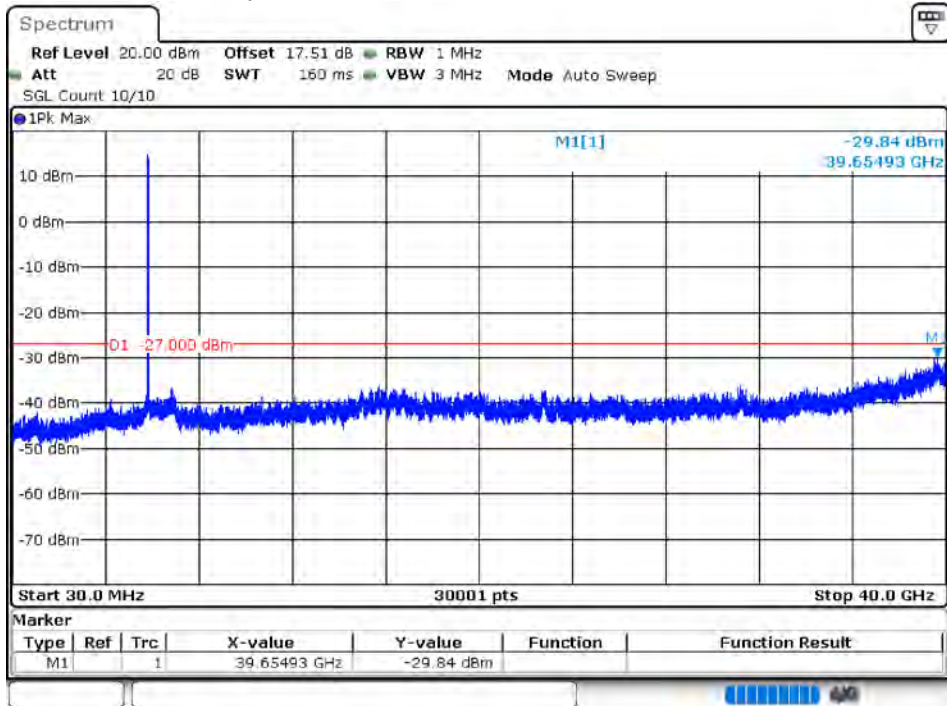





Tx. Spurious NVNT n20 5745MHz Ant 2 Emission

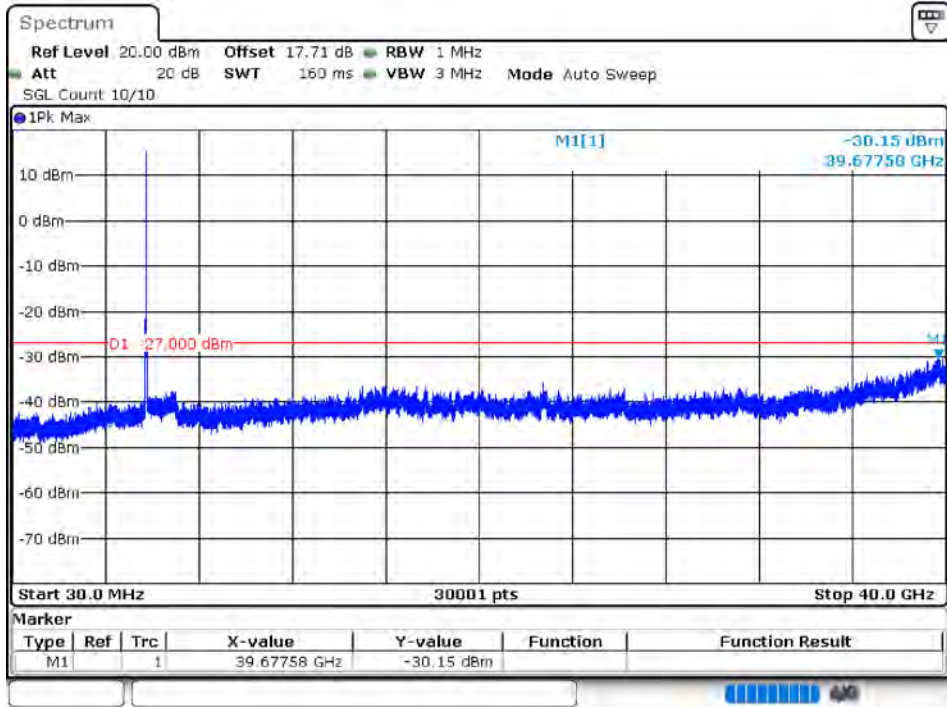


Tx. Spurious NVNT n20 5785MHz Ant 2 Emission

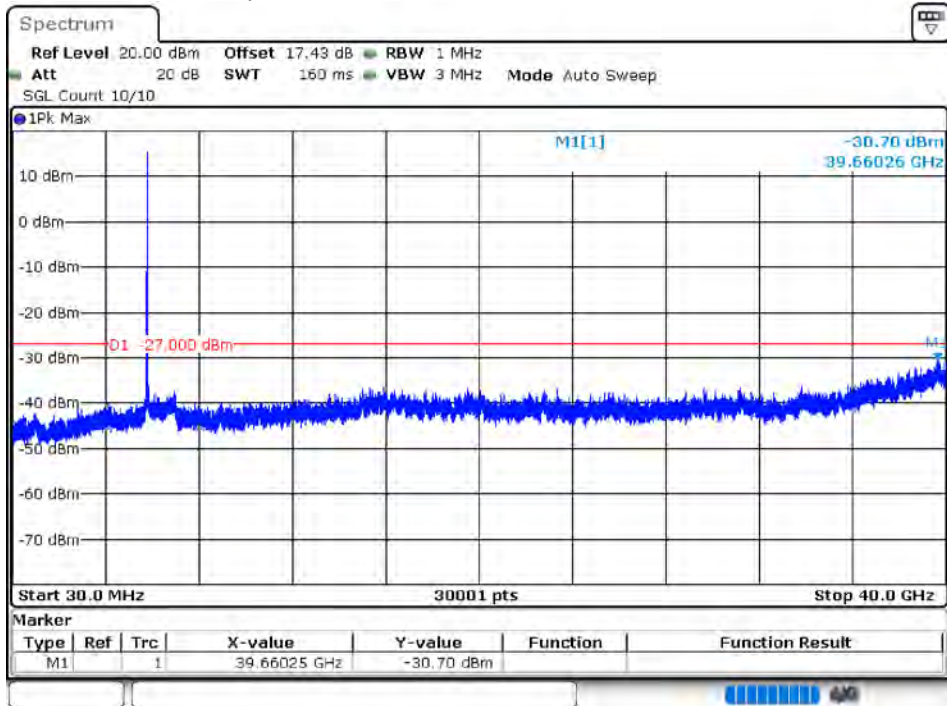


Tx. Spurious NVNT n20 5825MHz Ant 2 Emission

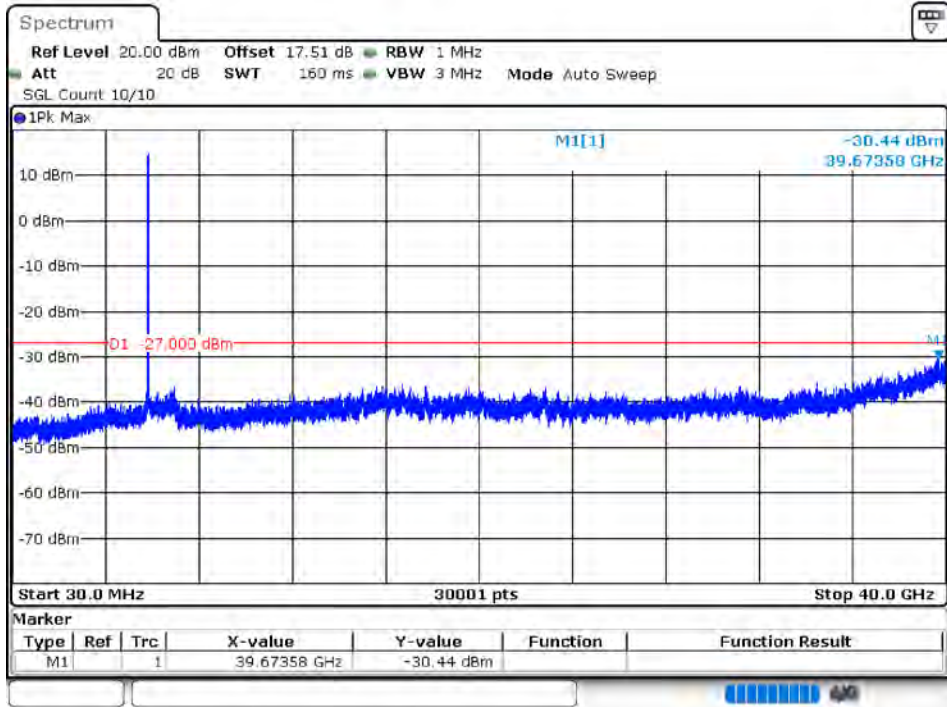


Tx. Spurious NVNT n40 5755MHz Ant 1 Emission

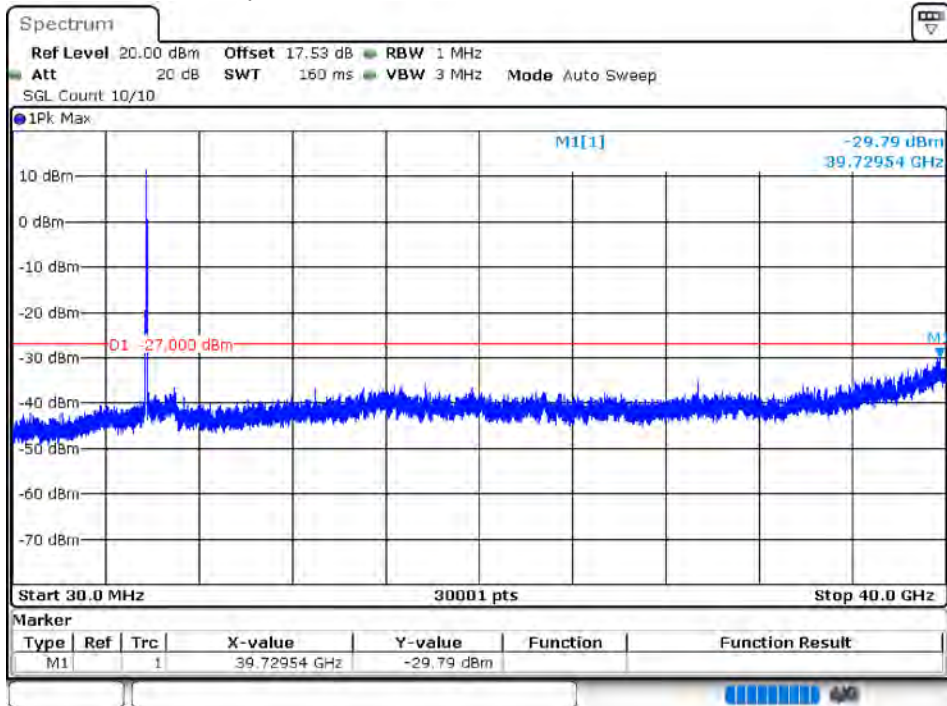

Tx. Spurious NVNT n40 5795MHz Ant 1 Emission

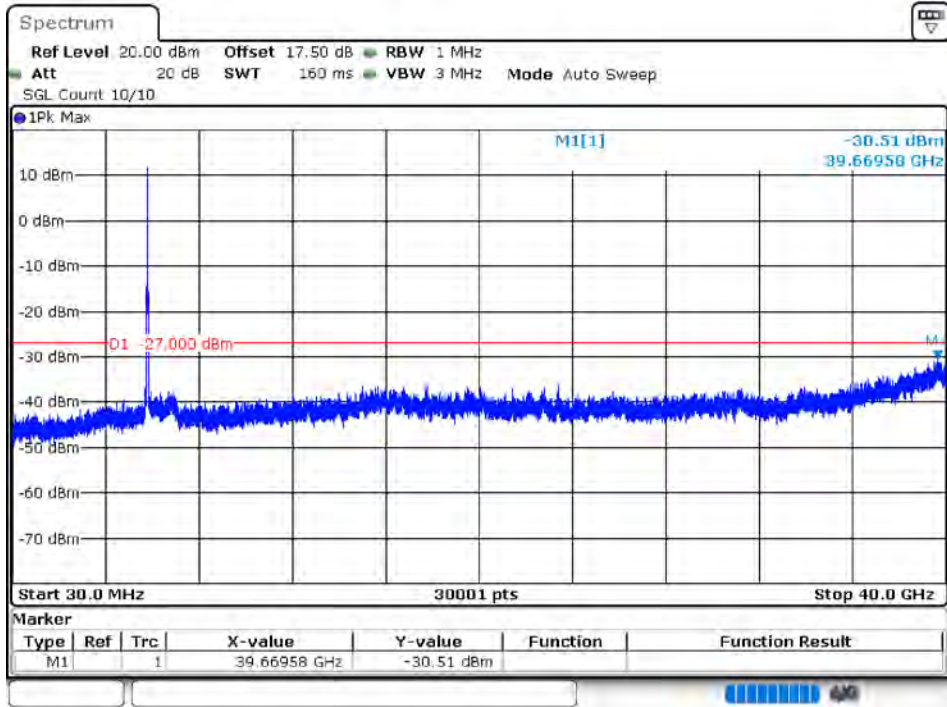


Tx. Spurious NVNT n40 5755MHz Ant 2 Emission

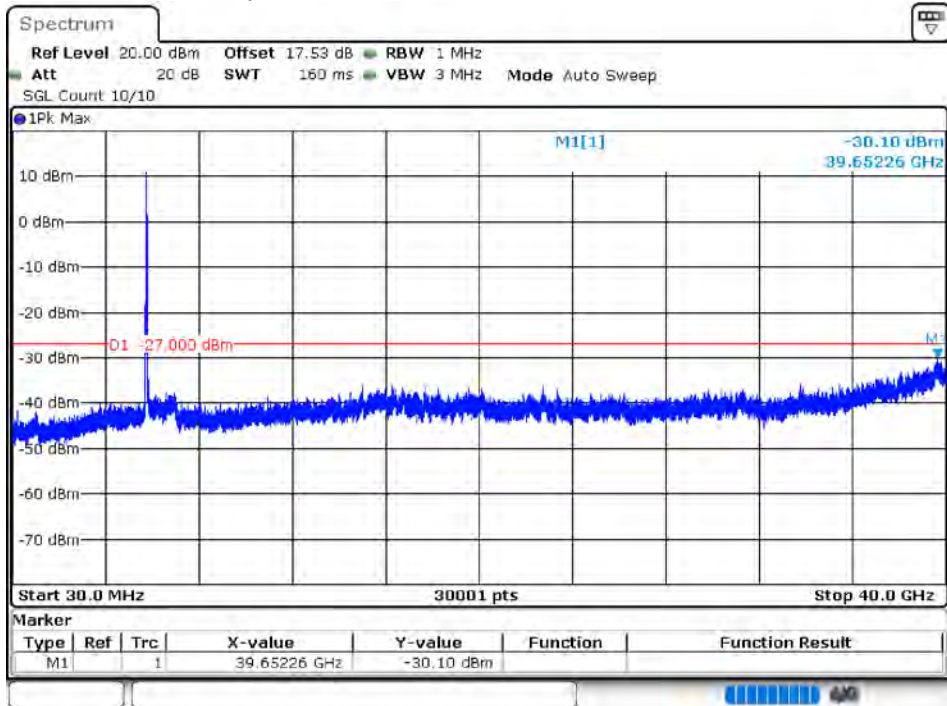



Tx. Spurious NVNT n40 5795MHz Ant 2 Emission

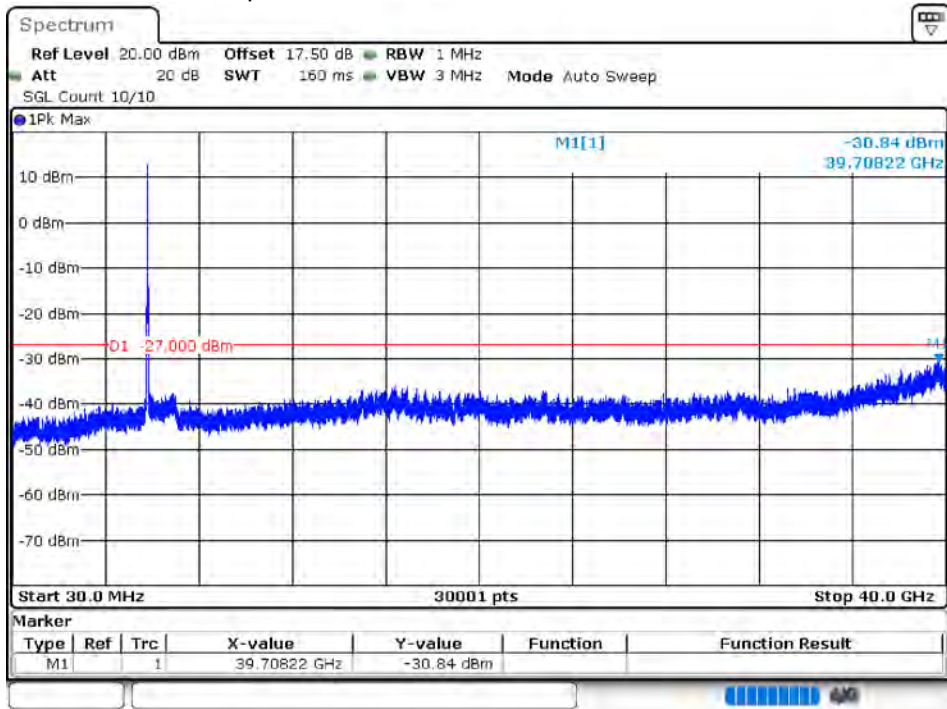

END OF REPORT