

MPE REPORT

3-in-1 Wireless Charging Station

MODEL No.: GY-Z5G-3S, GY-Z5G-3, GY-Z5G-1, GY-Z5G-2, GY-Z5G-5,
GY-Z5G-6, GY-Z5G-1S, GY-Z5G-2S, GY-Z5G-5S, GY-Z5G-6S, G334S

FCC ID: 2A2NS-GY-Z5G-3S

REPORT NO.:NCT23043204E-2

ISSUE DATE: Nov. 10, 2023

Prepared for

Guanyu(Dongguan) Intelligent Technology Co.,Ltd.

402 Room, NO#801 Building, Zhen'an Middle Road, Changan Town, Dongguan
City, Guangdong, China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT)	5
2.2. DESCRIPTION OF TEST FACILITY	6
2.3. MEASUREMENT UNCERTAINTY	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. FOR MPE MEASUREMENT	7
4. RF EXPOSURE	7
4.1. MEASURING STANDARD	8
4.2. REQUIMENTS	8
4.3. TEST CONFIGURATION	9
4.4. LIMITS	10
4.5. MEASURING RESULTS	12
5. PHOTOGRAPHS OF TEST SETUP	14

TEST REPORT DESCRIPTION

Applicant : Guanyu(Dongguan) Intelligent Technology Co.,Ltd.
Address : 402 Room, NO#801 Building, Zhen'an Middle Road, Changan Town, Dongguan City, Guangdong, China
Manufacturer : Guanyu(Dongguan) Intelligent Technology Co.,Ltd.
Address : 402 Room, NO#801 Building, Zhen'an Middle Road, Changan Town, Dongguan City, Guangdong, China
EUT : 3-in-1 Wireless Charging Station
Model Name : GY-Z5G-3S, GY-Z5G-3, GY-Z5G-1, GY-Z5G-2, GY-Z5G-5, GY-Z5G-6, GY-Z5G-1S, GY-Z5G-2S, GY-Z5G-5S, GY-Z5G-6S, G334S
Trademark : N/A

Measurement Procedure Used:

FCC Part 1(1.1310) and Part 2(2.1091)
680106 D01 RF Exposure Wireless Charging App v03r01

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:

Keven Wu
Keven Wu / Engineer



Technical Manager:

Henry Wang
Henry Wang / Manager

1. SUMMARY OF TEST RESULT


EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) 680106 D01 RF Exposure Wireless Charging App v03r01	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	:	3-in-1 Wireless Charging Station
Model Number	:	GY-Z5G-3S
Series Number	:	GY-Z5G-3, GY-Z5G-1, GY-Z5G-2, GY-Z5G-5, GY-Z5G-6, GY-Z5G-1S, GY-Z5G-2S, GY-Z5G-5S, GY-Z5G-6S, G334S
Mode difference	:	All the same except the model number and the colour.
Power Rating	:	Input: 9V/2A Output: For Phone 15W Max For Earbuds 3W Max For Watch 2.5W Max
Operation Frequency for WPT	:	110-205KHz For Phone or Earbuds 319.6KHz For Watch
Modulation	:	MSK
Antenna Type:	:	Coil Antenna
Date of Received	:	Oct. 24, 2023
Date of Test	:	Oct. 24, 2023 to Nov. 10, 2023

2.2. Test Setup

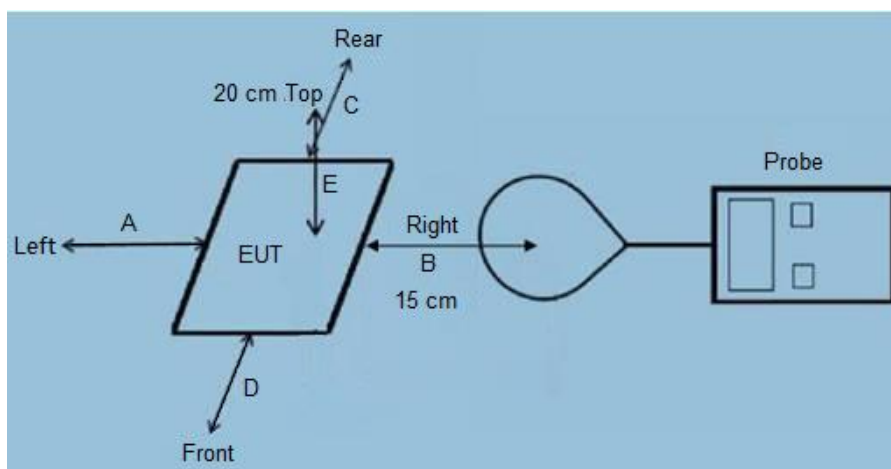

2.3. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27
The certificate is valid until 2028.01.07
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L8251

Designation Number: CN1347
Test Firm Registration Number: 894804
Accredited by A2LA, June 14, 2023
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0150
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

2.4. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.24dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Exposure Level Tester(1Hz-400KHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

4.2. Requirments

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
 - Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
 - General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

- 1) The field strength of both E-field and H-field was measured at 15cm(the 15 cm measured from the center of the probe(s) to the edge of the device) using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.
- 2) The RF power density was measured at 3 different charge conditions: min load, mid load, max load.
- 3) Maximum E-field and H-field measurements were made 15cm from each side of the EUT. Along the side of the EUT and still 15cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.
- 4) Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.
- 5) This device uses a wireless charging circuit for power transfer operating at the frequency of 325kHz. Thus, the 300kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).

4.4.Limits

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

Test Mode:

Test Mode	Description	Remark()
Mode 1	EUT + Phone	5%
Mode 2		50%
Mode 3		95%
Mode 4	EUT + Earbuds	5%
Mode 5		50%
Mode 6		95%
Mode 7	EUT + Watch	5%
Mode 8		50%
Mode 9		95%
Mode 10	EUT + Phone + Earbuds	5%
Mode 11		50%
Mode 12		95%
Mode 13	EUT + Phone + Watch	5%
Mode 14		50%
Mode 15		95%
Mode 16	EUT + Earbuds + Watch	5%
Mode 17		50%
Mode 18		95%
Mode 19	EUT + Phone + Earbuds + Watch	5%
Mode 20		50%
Mode 21		95%

Remark: All the modes have tested and recorded the worst mode 19 & mode 20 & mode 21 in the report

Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	3-in-1 Wireless Charging Station	N/A	GY-Z5G-3S	N/A	EUT
E-2	Adapter	KuXing	TC319U-5200	N/A	Auxiliary
E-3	Phone	HUAWEI	P50 Pro	N/A	Auxiliary
E-4	Headset	Apple	AirPods2	N/A	Auxiliary
E-5	Watch	HUAWEI	WATCH D	N/A	Auxiliary

4.5. Measuring Results

Test Mode: Mode 19

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	3.19	614
Left	2.26	614
Right	3.23	614
Rear	3.05	614
Front	2.48	614
Bottom	2.52	614
Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0219	1.63
Left	0.0335	1.63
Right	0.0126	1.63
Rear	0.0162	1.63
Front	0.0159	1.63
Bottom	0.0138	1.63

Test Mode: Mode 20

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	2.49	614
Left	2.43	614
Right	2.44	614
Rear	2.48	614
Front	2.41	614
Bottom	2.26	614
Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0228	1.63
Left	0.0216	1.63
Right	0.0146	1.63
Rear	0.0252	1.63
Front	0.0095	1.63
Bottom	0.0092	1.63

Test Mode: Mode 21

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	1.28	614
Left	1.29	614
Right	1.09	614
Rear	1.05	614
Front	1.31	614
Bottom	1.15	614
Magnetic Field Emissions		
Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0102	1.63
Left	0.0126	1.63
Right	0.0094	1.63
Rear	0.0051	1.63
Front	0.0099	1.63
Bottom	0.0084	1.63

Remark: The device meets the mobile RF exposure limit at a 15cm separation distance as specified in §2.1091 of the FCC Rules. The maximum leakage fields at 15 cm surrounding the device from all simultaneous transmitting coils are demonstrated to be less than 30% of the MPE limit.

Requirement for KDB Publication 680106 D01

Condition Requirement	Yes / No	Description
Power transfer frequency is less than 1 MHz.	Yes	The power transfer frequency is less than 1 MHz.
Output power from each primary coil is less than or equal to 15 watts.	Yes	Output power is 15W Max.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes	It has three coils and they are can Simultaneous emission at the same time.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	Please refer to the result of Electric Field Emissions and Magnetic Field Emissions.

5. PHOTOGRAPHS OF TEST SETUP

