




TEST REPORT

Report No. : **CHTEW20010040** Report verification : 

Project No. : **SHT1910073401EW**

FCC ID : **2AARFBFTD51501**

Applicant's name : **Fujian BelFone Communications Technology Co., Ltd.**

Address : A15 Huaqiao Economic Development Zone, Shuangyang
Luojiang, Quanzhou, Fujian, China

Manufacturer..... : Fujian BelFone Communications Technology Co., Ltd.

Address..... : A15 Huaqiao Economic Development Zone, Shuangyang
Luojiang, Quanzhou, Fujian, China

Test item description : **DMR RADIO**

Trade Mark : -

Model/Type reference : BF-TD515

Listed Model(s)..... : -


Standard..... : **FCC CFR Title 47 Part 2**
FCC CFR Title 47 Part 90


Date of receipt of test sample..... : Nov.19, 2019


Date of testing..... : Nov.19, 2019- Jan.03, 2020

Date of issue..... : Jan.06, 2020

Result : **PASS**

Compiled by
 (position+printed name+signature) . : File administrators Echo Wei 

Supervised by
 (position+printed name+signature) . : Project Engineer Gaosheng Pan 

Approved by
 (position+printed name+signature) . : RF Manager Hans Hu 

Testing Laboratory Name..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report revised information	3
<u>2</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3</u>	<u>SUMMARY</u>	<u>5</u>
3.1	Client Information	5
3.2	Product Description	5
3.3	Test frequency list	6
3.4	Operation mode	7
3.5	EUT configuration	8
<u>4</u>	<u>TEST ENVIRONMENT</u>	<u>9</u>
4.1	Address of the test laboratory	9
4.2	Test Facility	9
4.3	Environmental conditions	10
4.4	Statement of the measurement uncertainty	10
4.5	Equipments Used during the Test	11
<u>5</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	Conducted Carrier Output Power	12
5.2	99% Occupied Bandwidth & 26dB Bandwidth	13
5.3	Emission Mask	15
5.4	Modulation Limit	17
5.5	Audio Frequency Response	18
5.6	Frequency stability VS Temperature	20
5.7	Frequency stability VS Voltage	21
5.8	Transmitter Frequency Behavior	22
5.9	Transmit Conducted Spurious Emission	24
5.10	Transmitter Radiated Spurious Emission	25
<u>6</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>33</u>
<u>7</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>35</u>
<u>8</u>	<u>APPENDIX REPORT</u>	<u>41</u>

1 TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 2](#): Frequency allocations and radio treaty matters; General rules and regulations

[FCC Rules Part 90](#): Private land mobile radio services.

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[ANSI/TIA-603-E\(2016\)](#): Land Mobile FM or PM Communications Equipment and Performance Standards

[ANSI C63.4-2014](#): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

1.2. Report revised information

Revised No.	Date of issued	Description
N/A	2020-01-06	Original

2 TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Carrier Output Power	Part 90.205 Part 2.1046(a)	Pass	Linshuang Chen
99% Occupied Bandwidth & 26dB bandwidth	Part 90.209 & 210 Part 2.1049	Pass	Linshuang Chen
Emission Mask	Part 90.209 & 210 Part 2.1049	Pass	Linshuang Chen
Modulation Limit	Part 2.1047(b)	N/A	N/A
Audio Frequency Response	Part 2.1047(a)	N/A	N/A
Frequency Stability VS Temperature	Part 90.213 Part 2.1055	Pass	Linshuang Chen
Frequency Stability VS Voltage	Part 90.213 Part 2.1055	Pass	Linshuang Chen
Transient Frequency Behavior	Part 90.214	Pass	Linshuang Chen
Transmit Conducted Spurious Emission	Part 90.210 Part 2.1051	Pass	Linshuang Chen
Transmit Radiated Spurious Emission	Part 90.210 Part 2.1053	Pass	Linshuang Chen

Note:

- (1) *¹ Listed frequency range 400MHz~406MHz for Federal use Only.
- (2) *² The DMR standard specifies two-slot Time Division Multiplexing Technology to split the 12.5 kHz channel into two virtual 6.25kHz communication paths. This equates to an efficiency of one voice channel per 6.25 kHz of bandwidth even though it operates in channels of 12.5 kHz
- (3) *³ According to FCC Part 2.202 requirements, the Necessary Bandwidth is calculated as follows:
- For FM Data Modulation
 Channel Spacing = 12.5 KHz, R = 9600 bps, D = 1944Hz, S = 4, K = 0.72
 $B_n = (R/\log_2 S) + 2DK \cong 7.6 \text{ KHz}$
 Emission designation: 7K60FXW, 7K60FXD

3.3 Test frequency list

According to ANSI C63.26 section 5.1.2.1:

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in Table 2.

Frequency range over which EUT operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

Frequency Bands (MHz)	Test Frequency (MHz)	
400MHz ~ 406MHz	CH _L	400.0125
	CH _{M1}	405.9875
406.1MHz ~480MHz	CH _{M2}	406.1125
	CH _{M3}	443.0125
	CH _H	479.9875

3.4 Operation mode

Test Mode	Transmitting	Receiving	Digital	Power Level	
			12.5kHz	High	Low
TX-DNH	■		■	■	
TX-DNL	■		■		■

Note:

■: is operation mode.

Charing: Keep the EUT works at charging and off status

Modulation Type	Description
UM	Un-modulation
AM2	Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
AM6	Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation, then increase the level from the audio generator by 20 dB
AM5	Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation.
DM	A 511 bit binary pseudo-random bit sequence based on ITU-T Rec. O.153

Pre-scan above all test mode, found below test mode which it was worse case mode, so only show the test data for worse case mode on the test report.

Test item	Modulation Type	Test mode (Worse case mode)
Conducted Output Power	UM	TX-DNH, TX-DNL,
99% Occupied Bandwidth & 26dB bandwidth	DM	TX-DNH, TX-DNL,
Emission Mask	DM	TX-DNH, TX-DNL,
Modulation Limit	AM6	N/A
Audio Frequency Response	AM2	N/A
Frequency Stability VS Temperature	UM	TX-DNH, TX-DNL,
Frequency Stability VS Voltage	UM	TX-DNH, TX-DNL,
Transient Frequency Behavior	UM	TX-DNH,
Transmit Conducted Spurious Emission	DM	TX-DNH,
Transmit Radiated Spurious Emission	DM	TX-DNH,

3.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

●	Power Cable	Length (m) :	/
		Shield :	Unshielded
		Detachable :	Undetachable
○	Multimeter	Manufacturer :	/
		Model No. :	/

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235.

IC-Registration No.: 5377A

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3 Environmental conditions

Atmospheric Contions	
Temperature:	21°C to 25°C
Relative Humidity:	20 % to 75 %.
Atmospheric Pressure:	860 mbar to 1060 mbar
Norminal Test Voltage:	$V_N = DC 7.4V$
Extrem Test Voltage @115% V_N :	$V_H = DC 8.51V$
Extrem Test Voltage @85% V_N :	$V_L = DC 6.29V$

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability & Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Conducted Output Power	0.51dB	(1)
ERP / EIRP / RSE	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted Emission 9KHz-30MHz	3.02dB	(1)
Radiated Emission 30~1000MHz	4.90dB	(1)
Radiated Emission 1~18GHz	4.96dB	(1)
FM deviation	25 Hz	(1)
Audio level	0.62 dB	(1)
Low Pass Filter Response	0.76 dB	(1)
Modulation Limiting	0.42 %	(1)
Transient Frequency Behavior	6.8 %	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5 Equipments Used during the Test

● TS8613 Test system							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2019/10/26	2020/10/25
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2019/10/26	2020/10/25
●	RF Communication Test Set	HP	HTWE0038	8920A	3813A10206	2019/10/26	2020/10/25
●	Digital intercom communication tester	Aeroflex	HTWE0255	3920B	1001682041	2019/10/26	2020/10/25
●	Signal Generator	R&S	HTWE0191	SML02	100507	2019/10/26	2020/10/25
●	RF Control Unit	Tonscend	HTWE0294	JS0806-2	N/A	N/A	N/A
○	Filter-VHF	Microwave	HTWE0309	N26460M1	498702	N/A	N/A
●	Filter-UHF	Microwave	HTWE0311	N25155M2	498704	N/A	N/A
○	Power Divider	Microwave	HTWE0043	OPD1040-N-4	N/A	2019/05/24	2020/05/23
○	Attenuator	JFW	HTWE0292	50FH-030-100	N/A	2019/05/18	2020/05/17
○	Attenuator	JFW	HTWE0293	50-A-MFN-20	0322	2019/05/18	2020/05/17
●	Test software	HTW	N/A	Radio ATE	N/A	N/A	N/A

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Climate chamber	ESPEC	HTWE0254	GPL-2	N/A	2019/10/23	2020/10/22
●	DC Power Supply	Gwinstek	HTWE0274	SPS-2415	GER835793	N/A	N/A

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/11
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2018/04/04	2021/04/03
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2017/04/01	2020/03/31
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Preamp	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2019/05/23	2020/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2019/05/10	2020/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2019/05/10	2020/05/09
●	EMI Test Software	Audix	N/A	E3	N/A	N/A	N/A

5 TEST CONDITIONS AND RESULTS


5.1 Conducted Carrier Output Power

LIMIT

FCC Part 90.205, FCC Part 2.1046

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation.

TEST CONFIGURATION

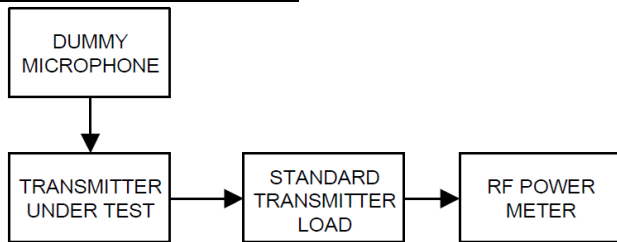

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Correct for all losses in the RF path
- (3) Measure the transmitter output power
- (4) If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix A on the section 8 appendix report

5.2 99% Occupied Bandwidth & 26dB Bandwidth


LIMIT

FCC Part 90.209, FCC Part 2.1049


Frequency band (MHz)	Channel spacing (kHz)	Authorized bandwidth (kHz)
Below 25 ²		
25-50	20	20
72-76	20	20
150-174	17.5	¹ 320/11.25/6
216-220 ⁵	6.25	20/11.25/6
220-222	5	4
406-512 ²	¹ 6.25	¹³⁶ 20/11.25/6
806-809/851-854	12.5	20
809-824/854-869	25	⁶ 20
896-901/935-940	12.5	13.6
902-928 ⁴		
929-930	25	20
1427-1432 ⁵	12.5	12.5
³ 2450-2483.5 ²		
Above 2500 ²		

TEST CONFIGURATION

Test setup for Analog:

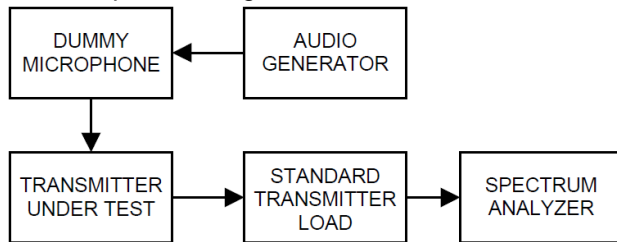

Test setup for Digital:

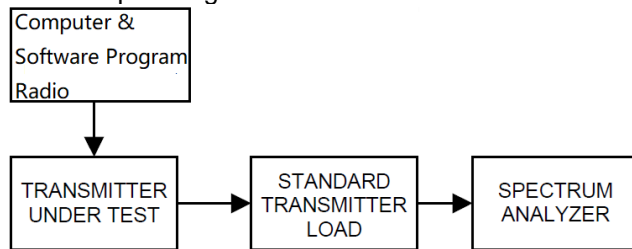

TEST PROCEDURE

- (1) Connect the equipment as illustrated
- (2) Spectrum set as follow:
 - Centre frequency = the nominal EUT channel center frequency,
 - The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of 1.5 × OBW is sufficient)
 - RBW = 1% to 5% of the anticipated OBW, VBW ≥ 3 × RBW, Sweep = auto,
 - Detector function = peak, Trace = max hold
- (3) Set 99% Occupied Bandwidth and 26dB Bandwidth
- (4) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix B on the section 8 appendix report

5.3 Emission Mask

LIMIT

FCC Part 90.210, FCC Part 2.1049

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 ¹	A or B	A or C
25-50	B	C
72-76	B	C
150-174 ²	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 ^{2 5}	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 ⁶	B	H
809-824/854-869 ^{3 5}	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 ⁴		
All other bands	B	C


Emission Mask D — 12.5 kHz channel bandwidth equipment

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- (1) On any frequency from the centre of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : 0dB
- (2) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

TEST CONFIGURATION

Test setup for Analog:

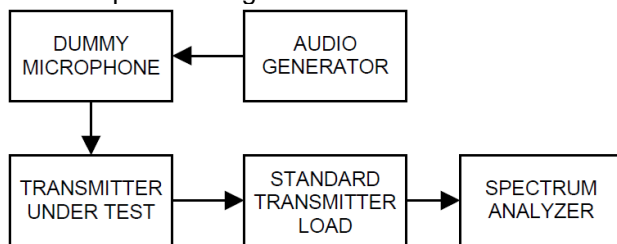

Test setup for Digital:

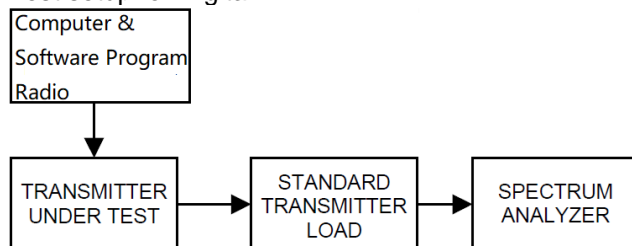

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Spectrum set as follow:
Centre frequency = fundamental frequency, span=120kHz for 12.5kHz channel spacing,
RBW=100Hz, VBW=1000Hz, Sweep = auto,
Detector function = peak, Trace = max hold
- 3) Key the transmitter, and set the level of the unmodulated carrier to a full scale reference line. This is the 0dB reference for the measurement.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4
- 5) Measure and record the results in the test report.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix C on the section 8 appendix report


5.4 Modulation Limit

LIMIT

FCC Part 2.1047(b)

2.5kHz for 12.5 KHz Channel Spacing System

TEST CONFIGURATION

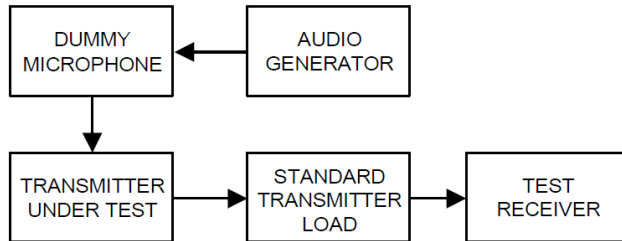

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 3) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- 4) Apply Input Modulation Signal to EUT according to Section 3.4 and vary the input level from -20 to $+20$ dB.
- 5) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level
- 6) Repeat step 4-5 with input frequency changing to 300Hz, 1004Hz, 1500Hz and 2500Hz in sequence.

TEST MODE

Please reference to the section 3.4


TEST RESULTS

Passed Not Applicable

5.5 Audio Frequency Response


LIMIT

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

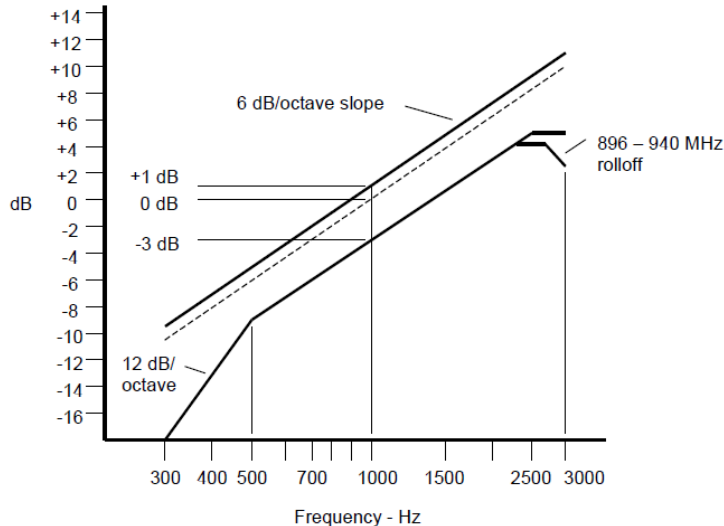

An additional 6 dB per octave attenuation is allowed from 2500 Hz to 3000 Hz in equipment operating in the 25 MHz to 869 MHz range.

TEST CONFIGURATION

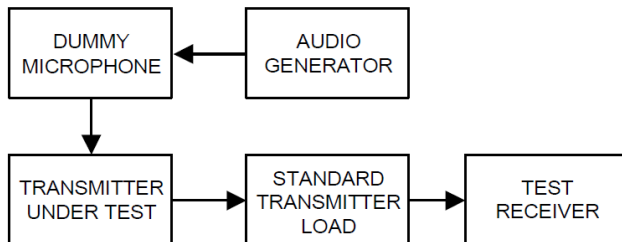

TEST PROCEDURE

- 1) Connect the equipment as illustrated.
- 2) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for 50 Hz to 15,000 Hz. Turn the de-emphasis function off.
- 3) Set the DMM to measure rms voltage.
- 4) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- 5) Apply Input Modulation Signal to EUT according to Section 3.4
- 6) Set the test receiver to measure rms deviation and record the deviation reading.
- 7) Record the DMM reading as V_{REF} .
- 8) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
- 9) Vary the audio frequency generator output level until the deviation reading that was recorded in step 6) is obtained.
- 10) Record the DMM reading as V_{FREQ}
- 11) Calculate the audio frequency response at the present frequency as:
audio frequency response = $20 \log_{10} (V_{FREQ}/V_{REF})$.
- 12) Repeat steps 8) through 11) for all the desired test frequencies

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable


5.6 Frequency stability VS Temperature

LIMIT

FCC Part 90.213, FCC Part 2.1055

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 2 3 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 11 5	6 5	4 6 5 0
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7 11 14 2.5	8 5	8 5
806-809	14 1.0	1.5	1.5
809-824	14 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	14 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 300	300	300
Above 2450 ¹⁰			

TEST CONFIGURATION

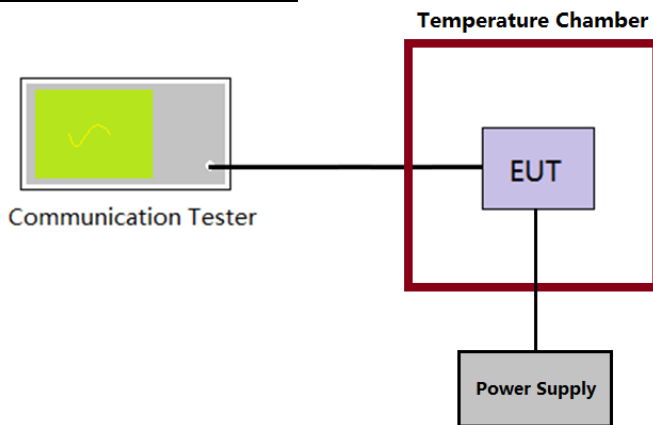

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber.
- 3) Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency as MCF_{MHz} .
- 4) Calculate the ppm frequency error by the following:

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix D on the section 8 appendix report


5.7 Frequency stability VS Voltage

LIMIT

FCC Part 90.213, FCC Part 2.1055

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 2 3 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 11 5	6 5	4 6 5 0
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7 11 14 2.5	8 5	8 5
806-809	14 1.0	1.5	1.5
809-824	14 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	14 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 300	300	300
Above 2450 ¹⁰			

TEST CONFIGURATION

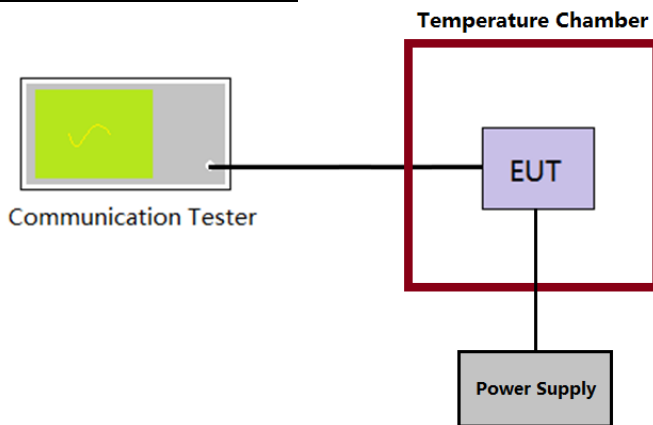

TEST PROCEDURE

- 1) The EUT output port was connected to communication tester.
- 2) The EUT was placed inside the temperature chamber at 25°C
- 3) Record the carrier frequency of the transmitter as MCF_{MHz}
- 4) Calculate the ppm frequency error by the following:

$$ppm\ error = (MCF_{MHz} / ACF_{MHz} - 1) * 10^6$$
 where
 MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz
- 5) Repeat step 3 measure with varied $\pm 15\%$ of the nominal value measured at the input to the EUT

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix E on the section 8 appendix report

5.8 Transmitter Frequency Behavior

LIMIT

FCC part 90.214


Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1 ⁴	±25.0 kHz	5.0 ms	10.0 ms
t_2	±12.5 kHz	20.0 ms	25.0 ms
t_3 ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1 ⁴	±12.5 kHz	5.0 ms	10.0 ms
t_2	±6.25 kHz	20.0 ms	25.0 ms
t_3 ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1 ⁴	±6.25 kHz	5.0 ms	10.0 ms
t_2	±3.125 kHz	20.0 ms	25.0 ms
t_3 ⁴	±6.25 kHz	5.0 ms	10.0 ms

Note:

- On is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 - t_1 is the time period immediately following t_{on} .
 - t_2 is the time period immediately following t_1 .
 - t_3 is the time period from the instant when the transmitter is turned off until t_{off} .
 - t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

TEST CONFIGURATION

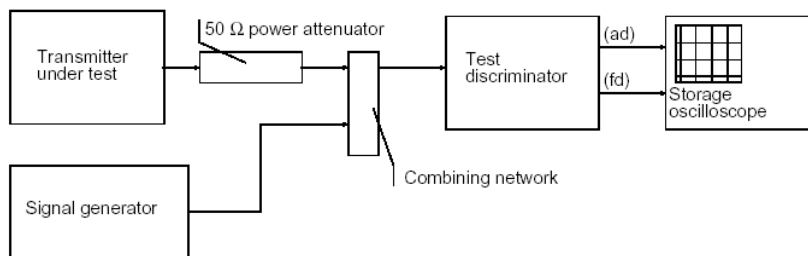

TEST PROCEDURE

- Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;
- Input 1kHz signal into DUT;
- Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;
- Keep DUT in OFF state and Key the PTT;
- Observe the stored oscilloscope of modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 ;
- Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.
- Keep the digital portable radio in ON state and unkey the PTT;
- Observe the stored oscilloscope of modulation domain analyzer, The signal trace shall be maintained within the allowable limits during the period t_3 .
- Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at ±12.5 kHz deviation and set its output level to -100dBm.
- Turn on the transmitter.

- 11) Supply sufficient attenuation via the RF attenuator to provide an input level to the stored oscilloscope
- 12) that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the stored oscilloscope as P_0 .
- 13) Turn off the transmitter.
- 14) Adjust the RF level of the signal generator to provide RF power equal to P_0 . This signal generator RF level shall be maintained throughout the rest of the measurement.
- 15) Remove the attenuation, so the input power to the stored oscilloscope is increased by 30 dB when the transmitter is turned on.
- 16) Adjust the vertical amplitude control of the stored oscilloscope to display the 1000 Hz at ± 4 divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- 17) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be ton. The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
- 18) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum
- 19) Analyzer. The trace should be maintained within the allowed divisions during the period t_3 .

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed **Not Applicable**

Please refer to appendix F on the section 8 appendix report

5.9 Transmit Conducted Spurious Emission

LIMIT

FCC Part 90.210, FCC Part 2.1051

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.


In general, the worse case attenuation requirement shown above was applied.

Calculation: Limit (dBm) =EL-50-10log (P)

EL is the emission level of the Output Power expressed in dBm,

Limit (dBm) = P(dBm)-50-10 log (Pwatts) = -20dBm

TEST CONFIGURATION

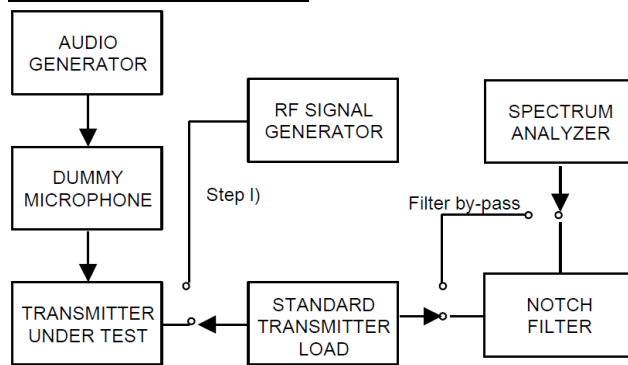

TEST PROCEDURE

1. Connect the equipment as illustrated, with the notch filter by-passed.
2. Apply Input Modulation Signal to EUT according to Section 3.4
3. Adjust the spectrum analyzer for the following settings:
 Below 1GHz: RBW=100kHz, VBW=300kHz
 Above 1GHz: RBW=1MHz, VBW=3MHz
 Detector=Peak, Sweep time=Auto, Trace=Max hold
4. Scan frequency range up to 10th harmonic.
5. Record the frequencies and levels of spurious emissions

TEST MODE

Please reference to the section 3.4

TEST RESULTS

Passed Not Applicable

Please refer to appendix G on the section 8 appendix report

5.10 Transmitter Radiated Spurious Emission

Radiated spurious emissions are emissions from the equipment when transmitting into a nonradiating load on a frequency or frequencies that are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

LIMIT

FCC Part 90.210, FCC Part 2.1051

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

In general, the worse case attenuation requirement shown above was applied.


Calculation: Limit (dBm) = EL - 50 - 10 log (P)

EL is the emission level of the Output Power expressed in dBm,


Limit (dBm) = P(dBm) - 50 - 10 log (Pwatts) = -20dBm


TEST CONFIGURATION

Below 1GHz:

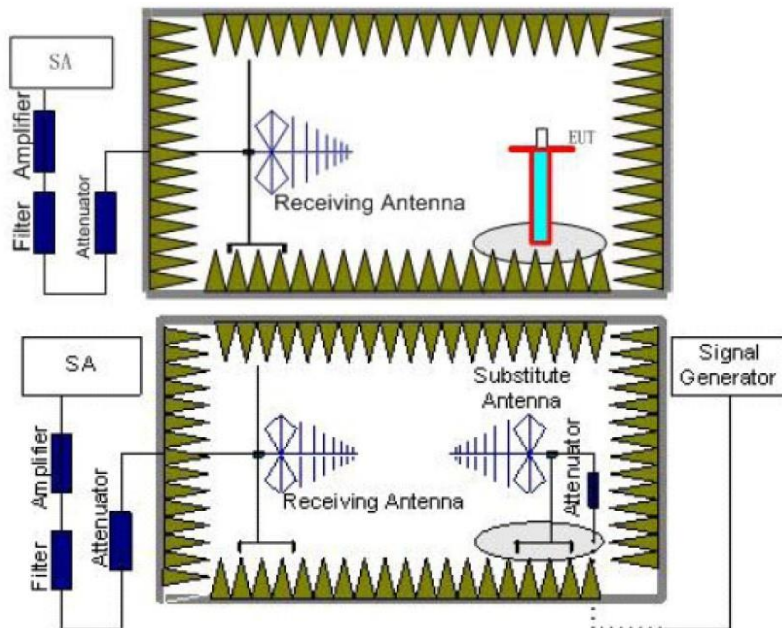

Above 1GHz:

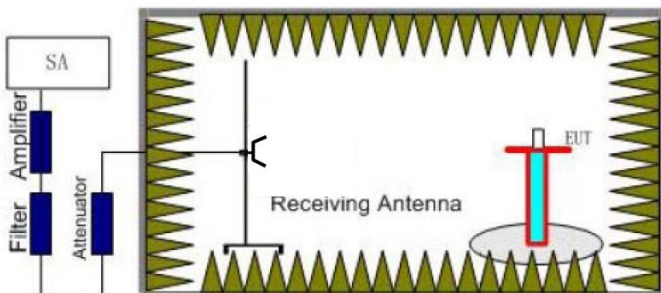

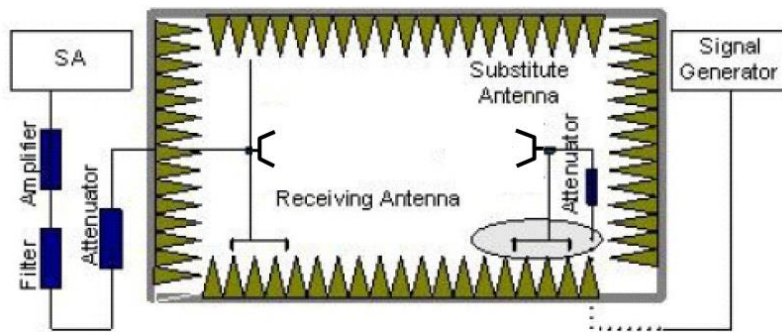

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:
 - Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
 - Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 - P_e = equivalent emission power in dBm
 - P_s = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$



If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.



TEST MODE



Please reference to the section 3.4



TEST RESULTS

Passed **Not Applicable**

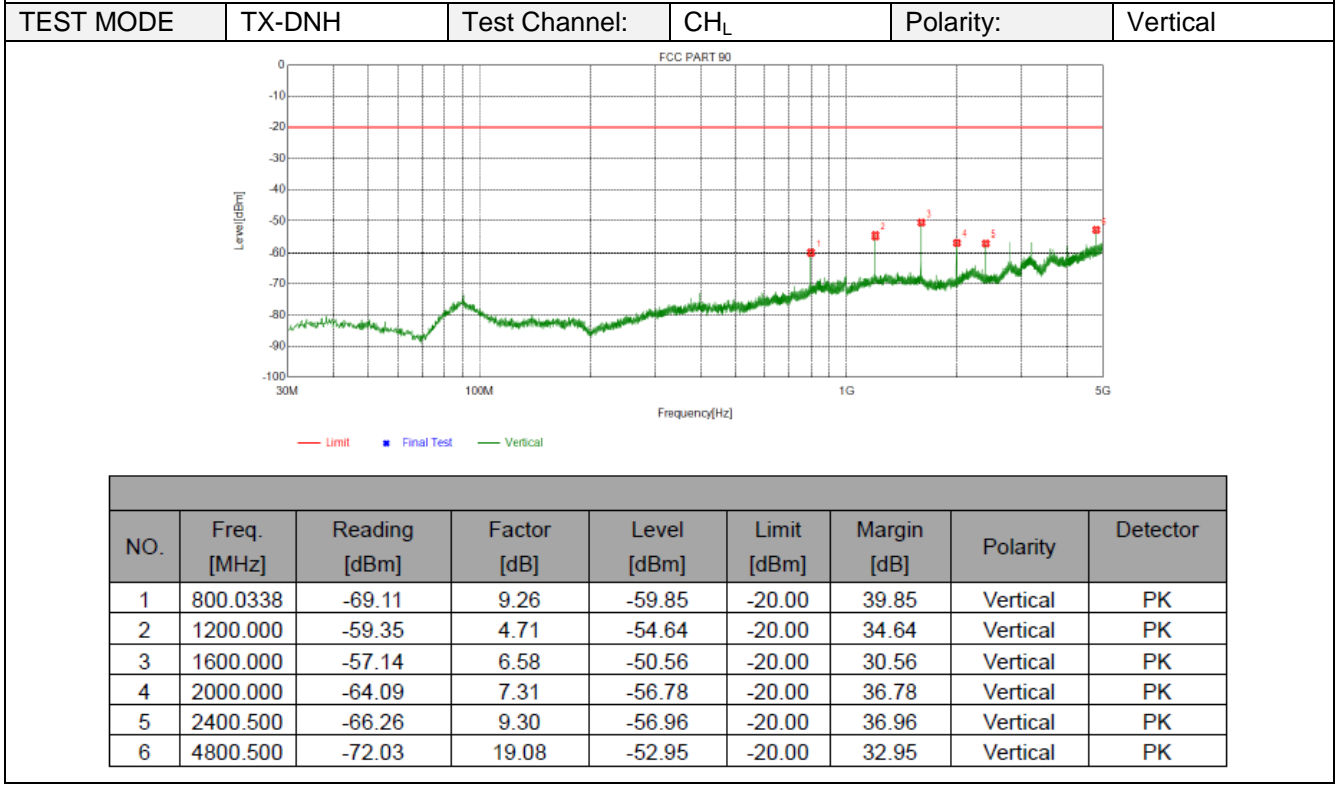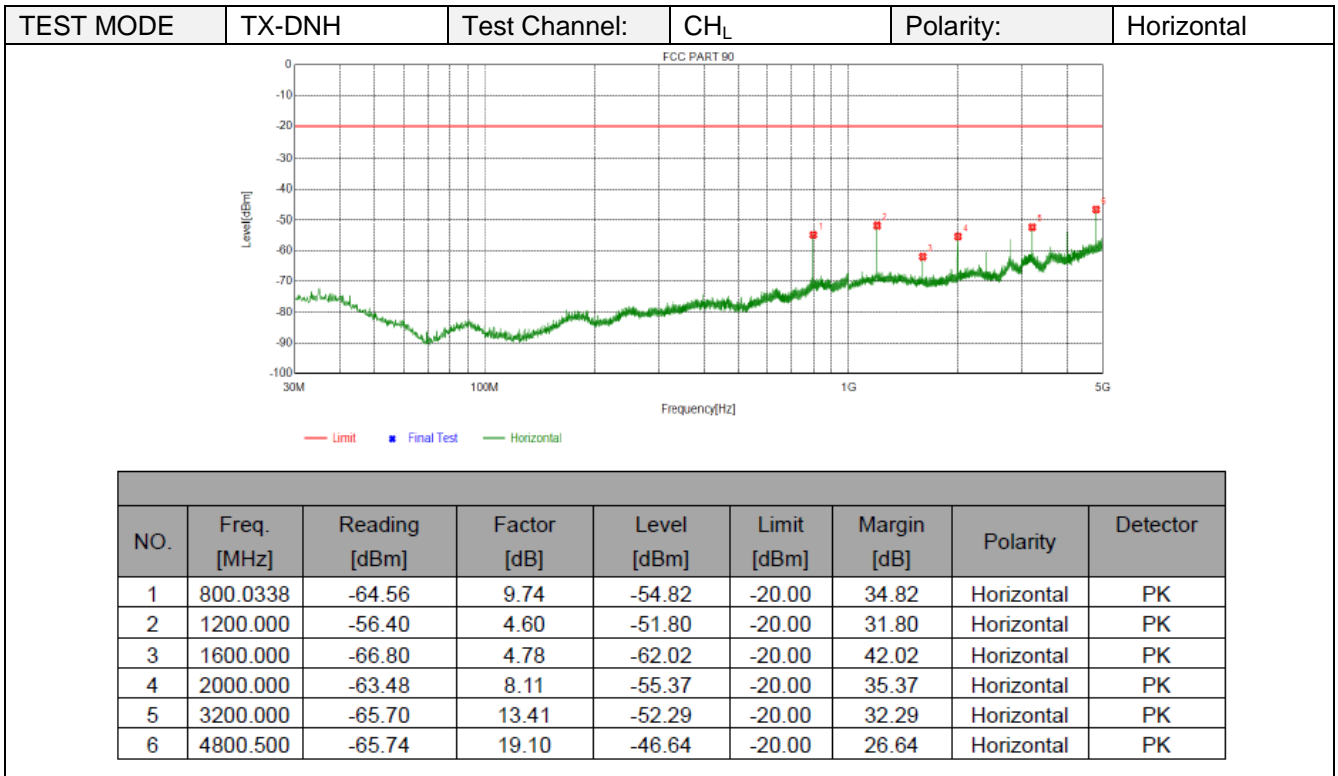


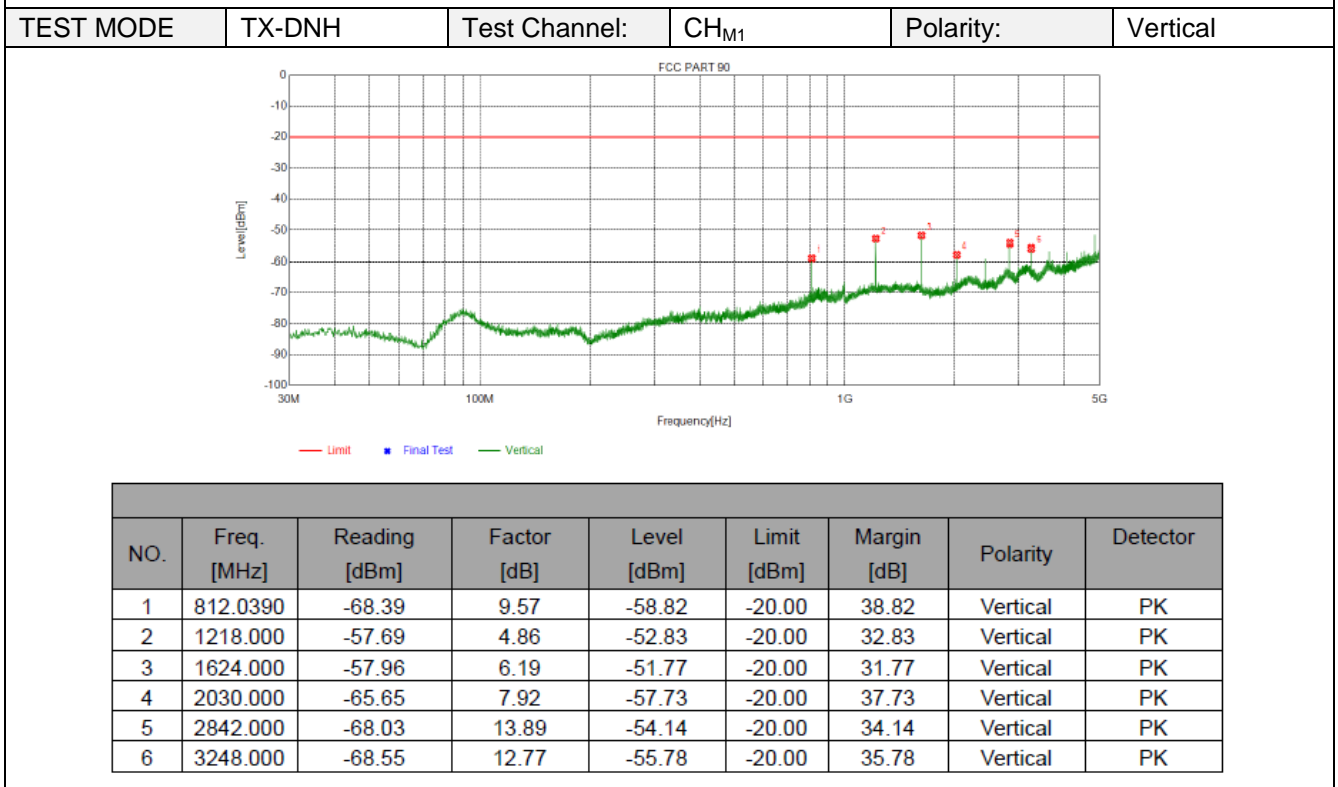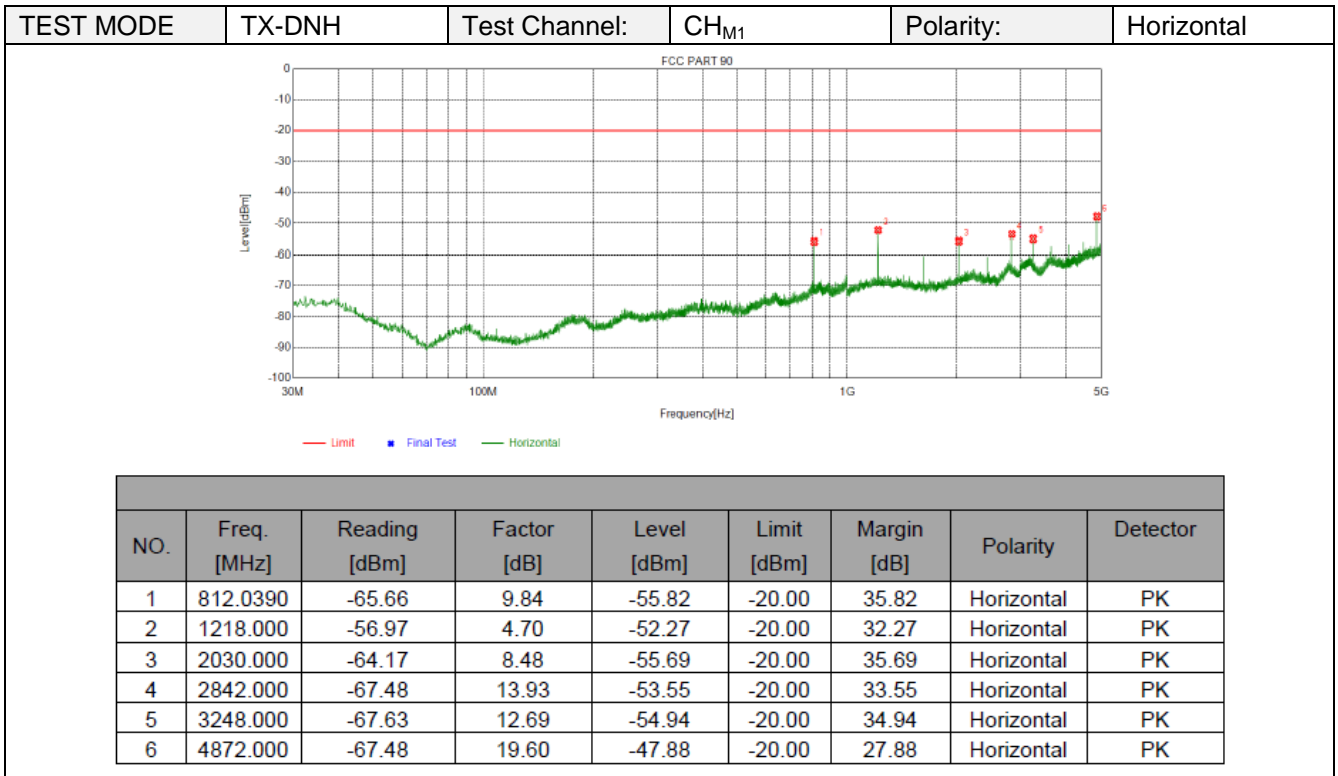

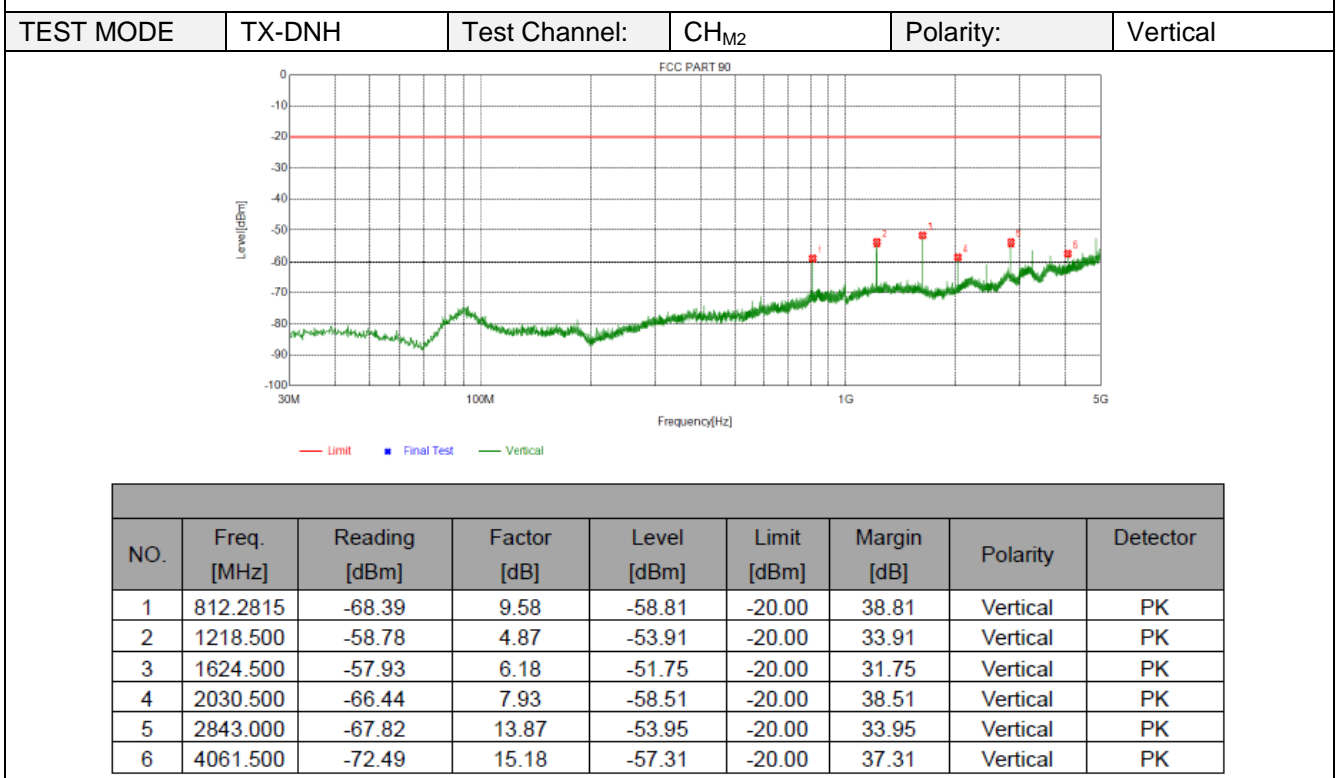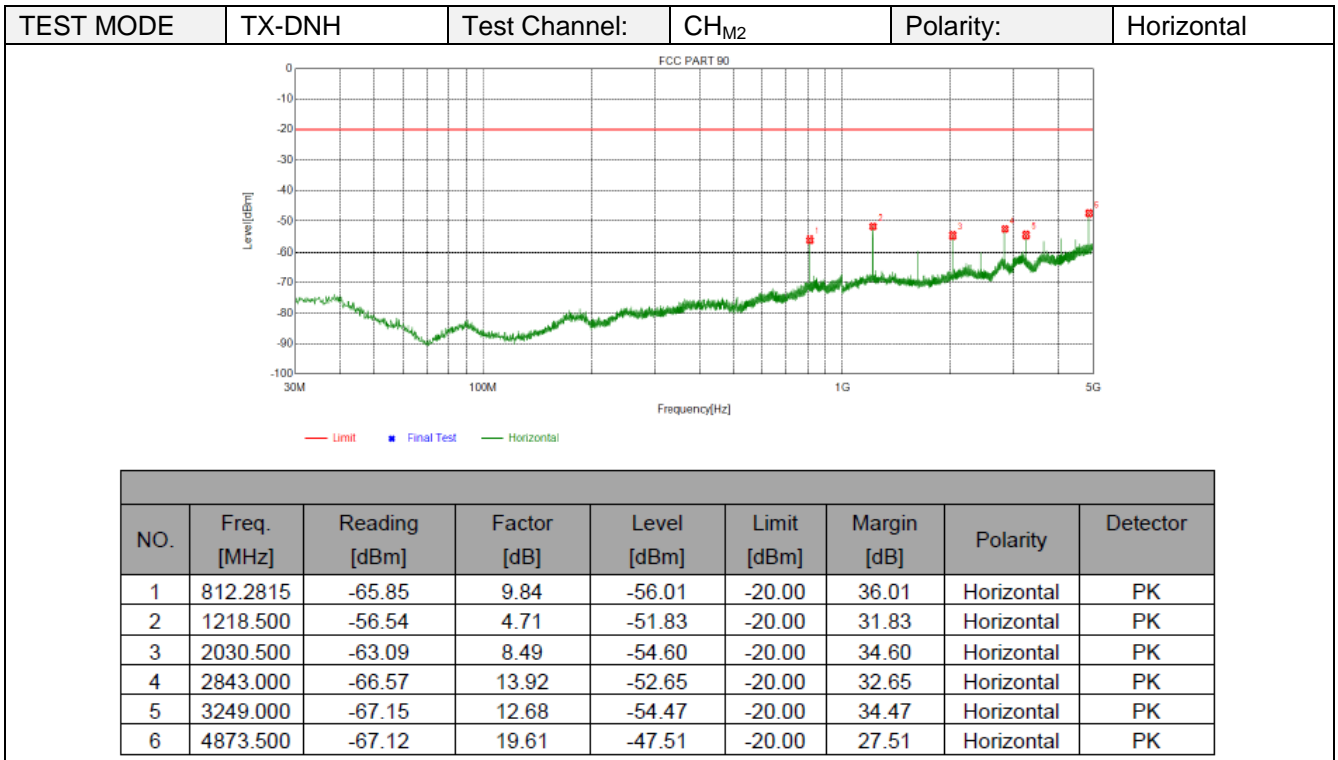

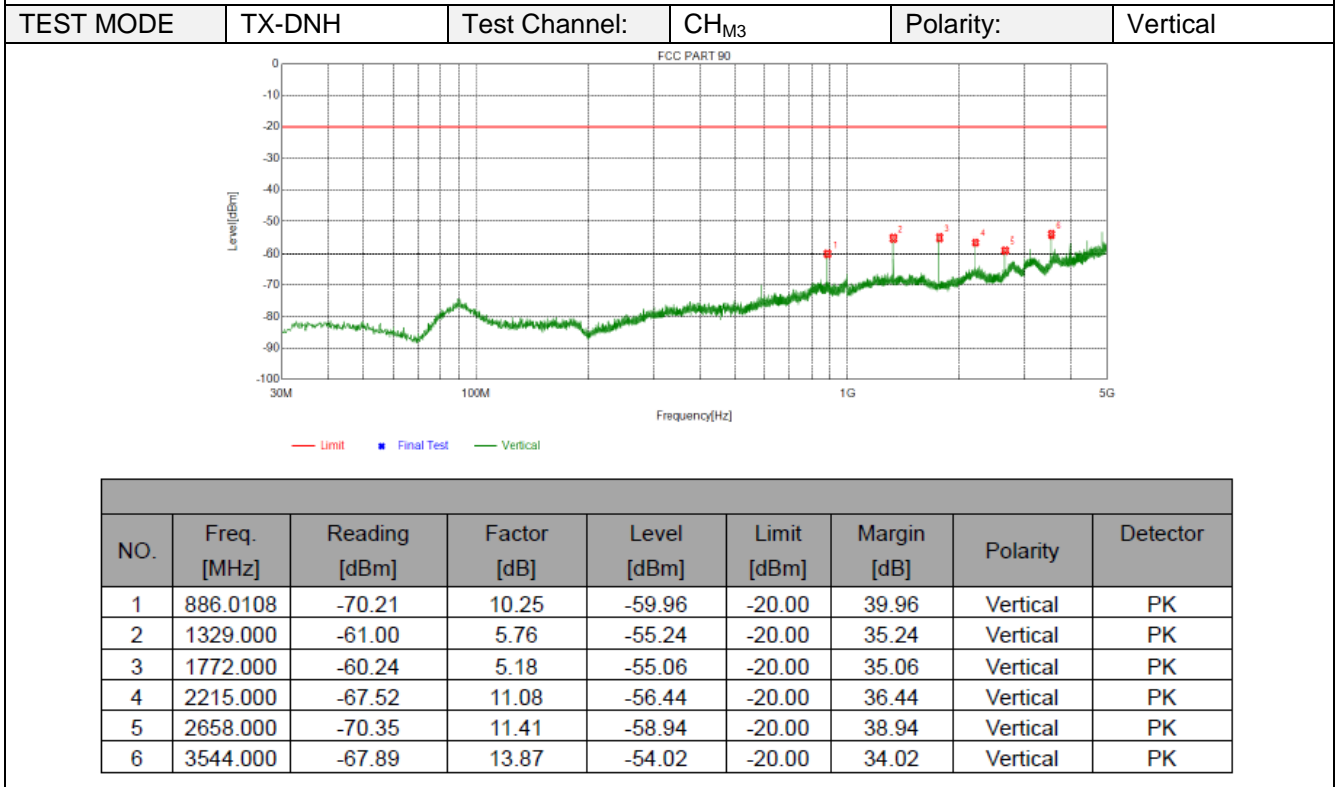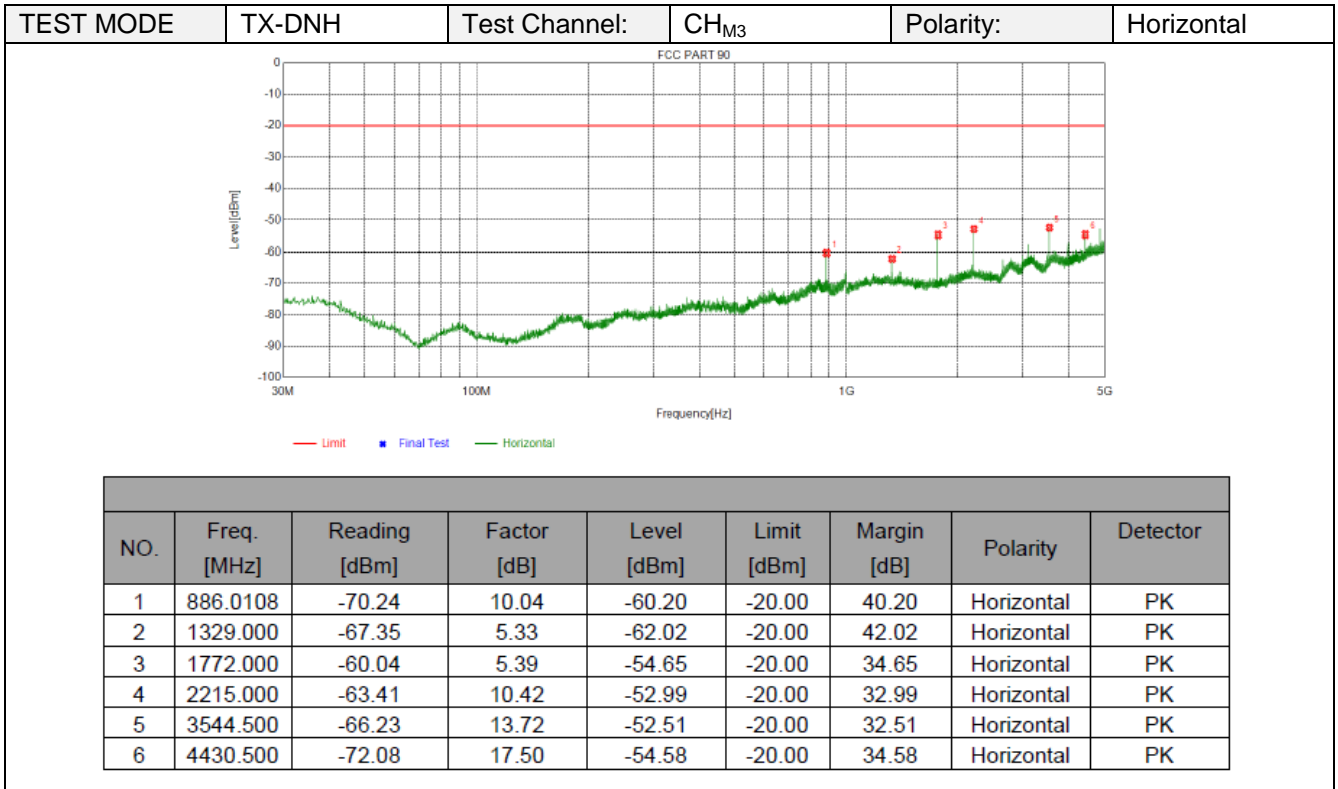


TEST MODE	TX-DNH	Test Channel:	CH _H	Polarity:	Horizontal
-----------	--------	---------------	-----------------	-----------	------------

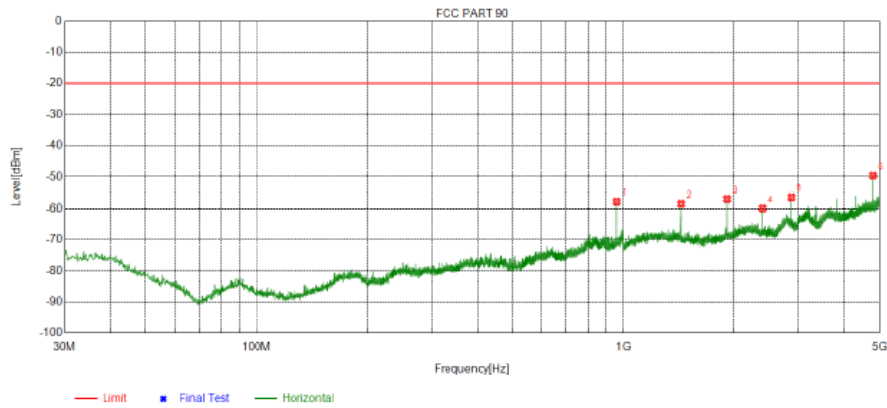

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	959.9825	-68.34	10.60	-57.74	-20.00	37.74	Horizontal	PK
2	1440.000	-63.86	5.45	-58.41	-20.00	38.41	Horizontal	PK
3	1919.500	-63.94	7.07	-56.87	-20.00	36.87	Horizontal	PK
4	2400.000	-69.64	9.80	-59.84	-20.00	39.84	Horizontal	PK
5	2880.000	-69.58	13.22	-56.36	-20.00	36.36	Horizontal	PK
6	4800.000	-68.72	19.10	-49.62	-20.00	29.62	Horizontal	PK



TEST MODE	TX-DNH	Test Channel:	CH _H	Polarity:	Vertical
-----------	--------	---------------	-----------------	-----------	----------

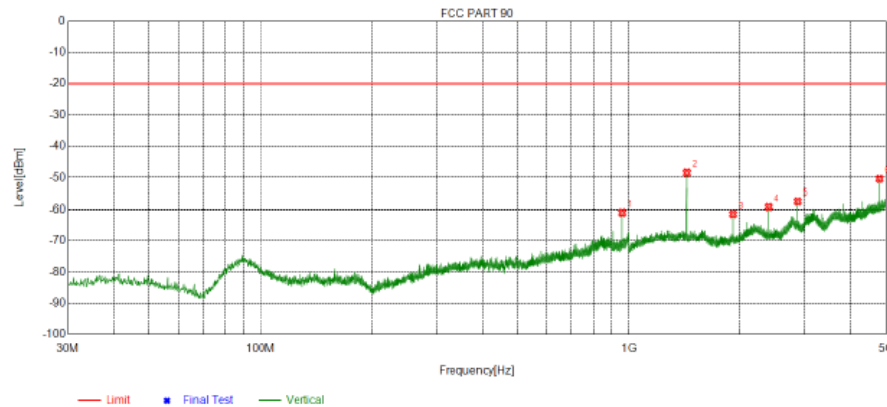


NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Polarity	Detector
1	959.9825	-71.31	10.38	-60.93	-20.00	40.93	Vertical	PK
2	1440.000	-54.84	6.30	-48.54	-20.00	28.54	Vertical	PK
3	1920.000	-67.84	6.49	-61.35	-20.00	41.35	Vertical	PK
4	2400.000	-68.38	9.30	-59.08	-20.00	39.08	Vertical	PK
5	2880.000	-70.56	13.18	-57.38	-20.00	37.38	Vertical	PK
6	4800.000	-69.50	19.08	-50.42	-20.00	30.42	Vertical	PK

6 TEST SETUP PHOTOS OF THE EUT

Transmitter Radiated Spurious Emission:

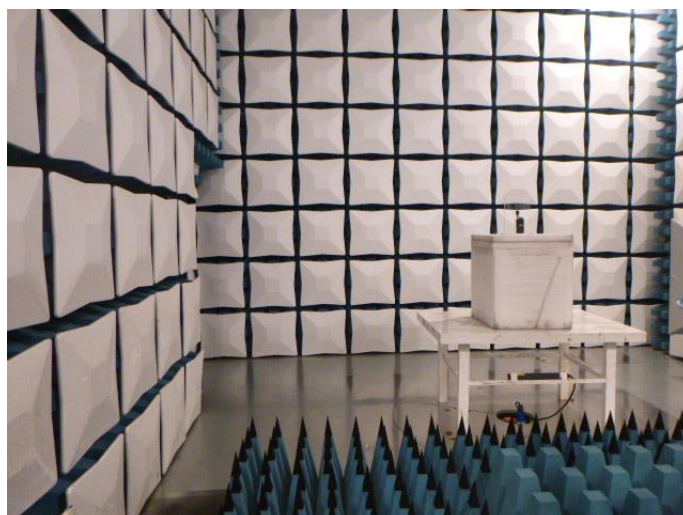
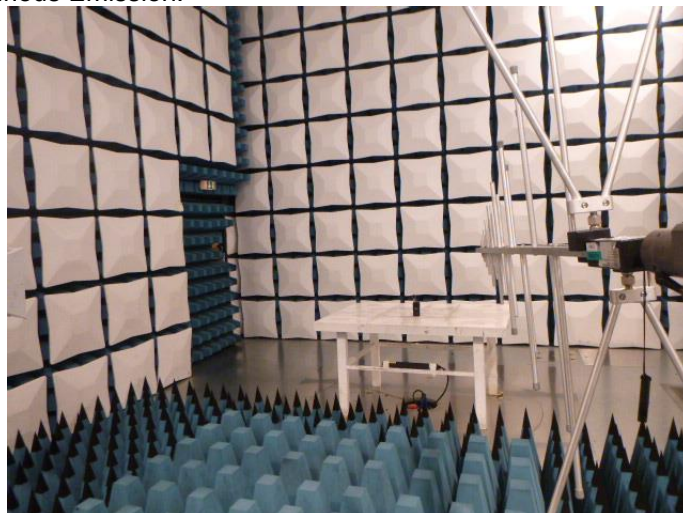




RF Conducted Test Item:

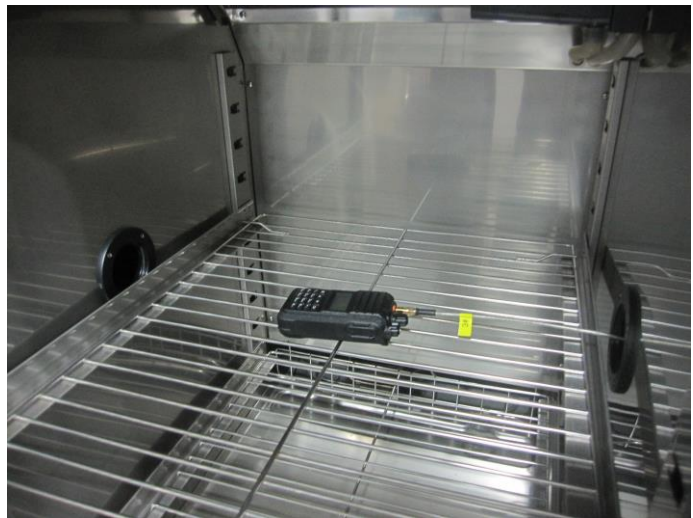


7 EXTERNAL AND INTERNAL PHOTOS OF THE EUT

External Photos of the EUT

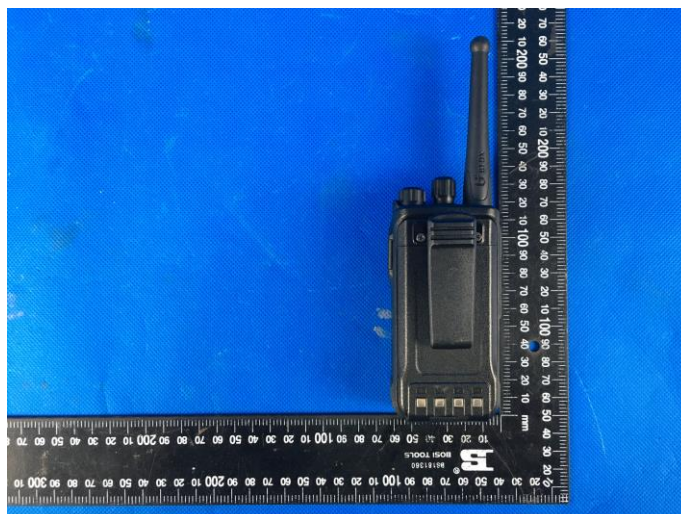
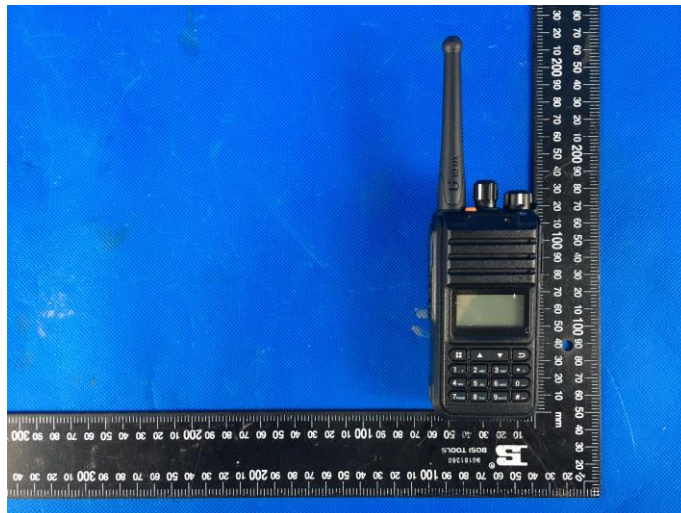



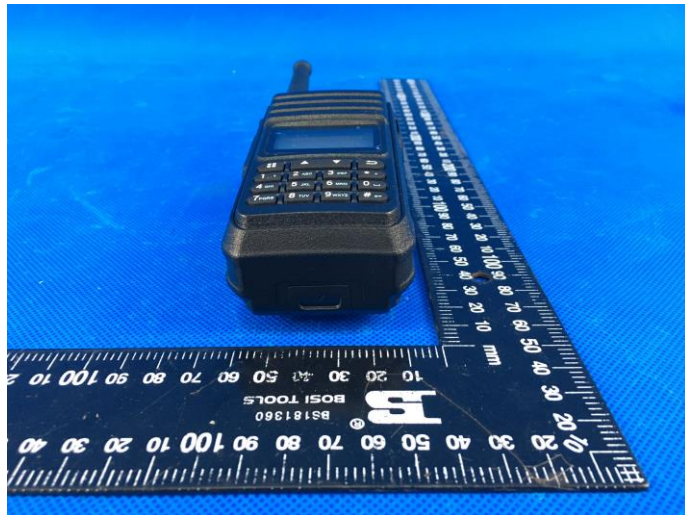
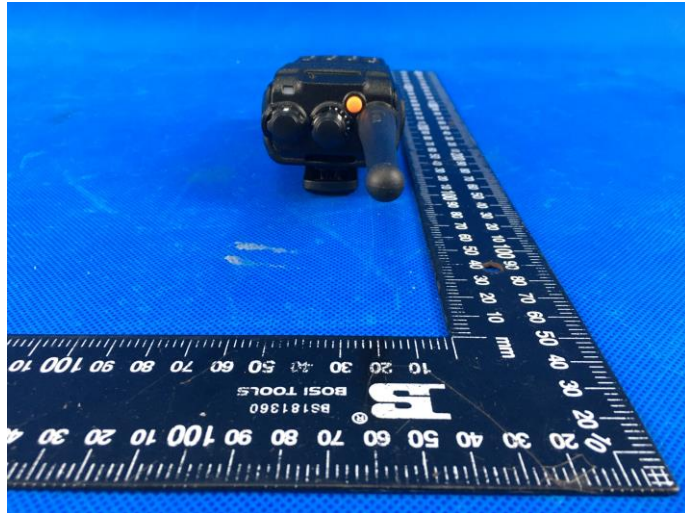




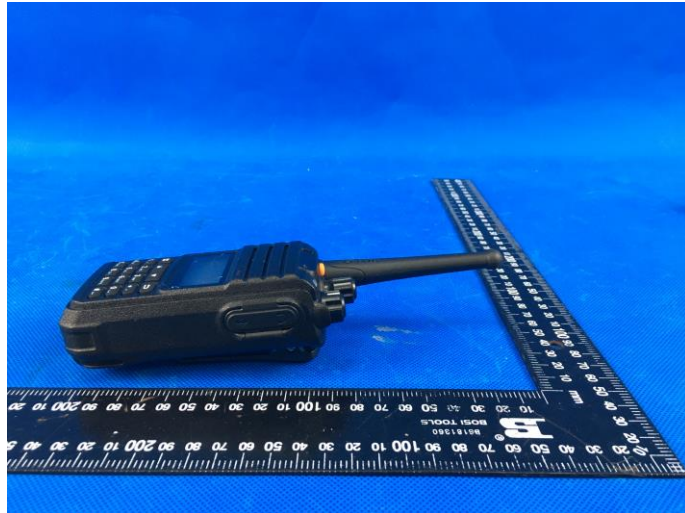




Internal Photos of the EUT

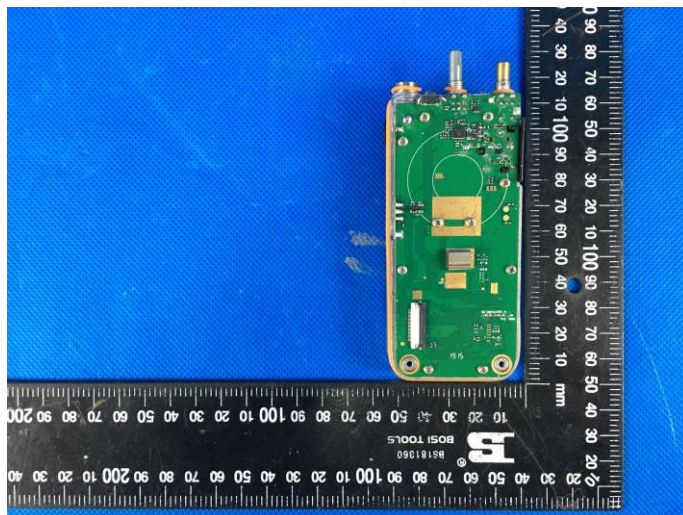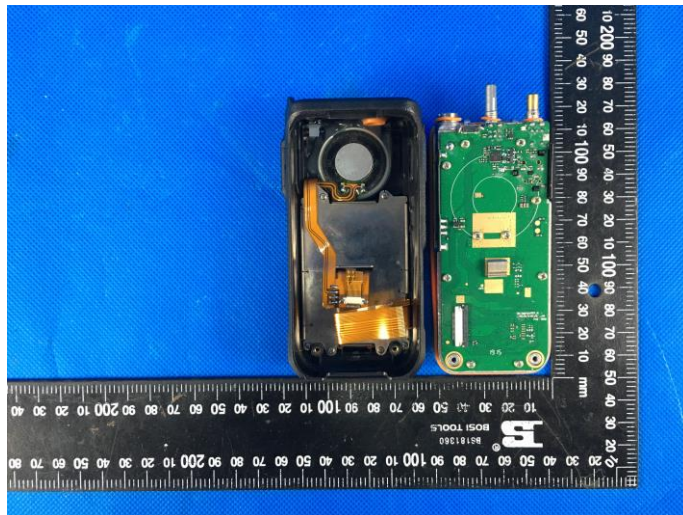

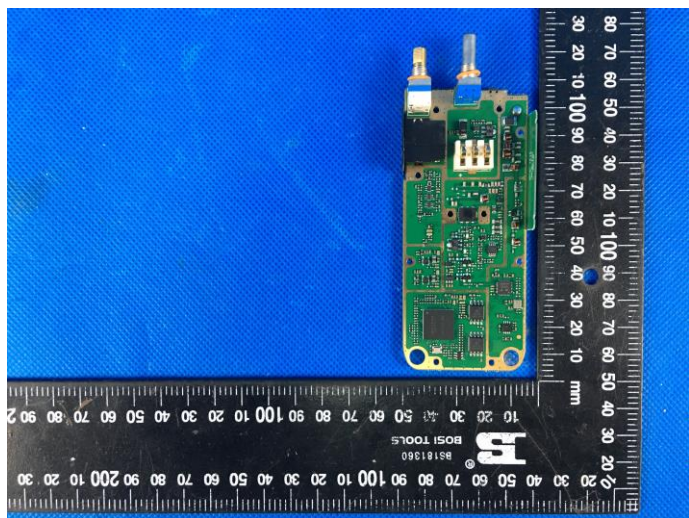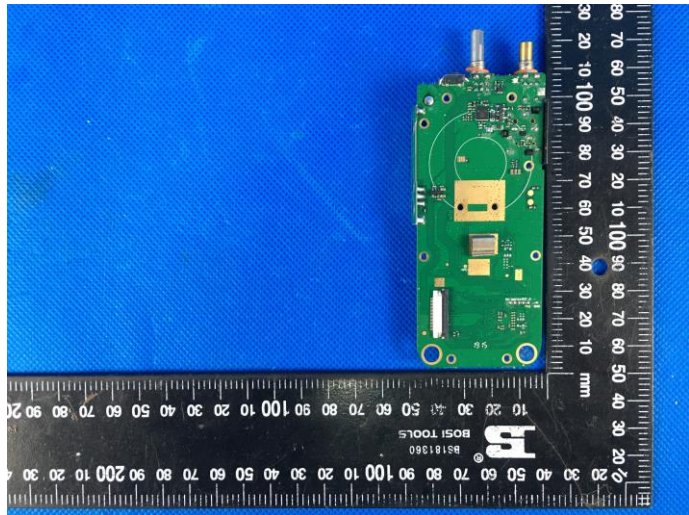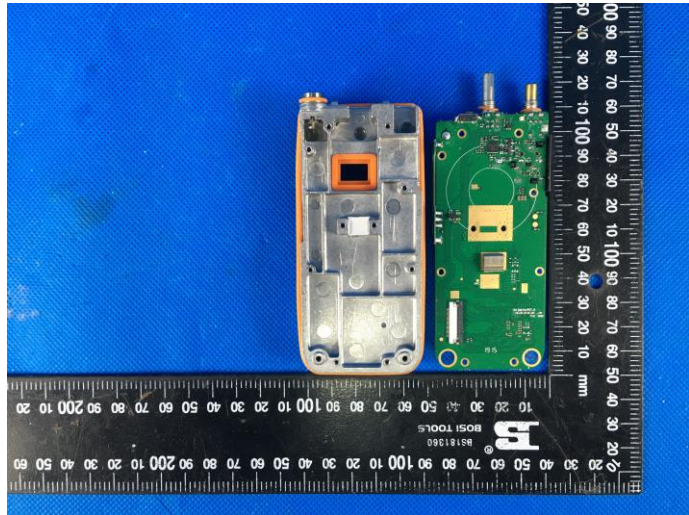

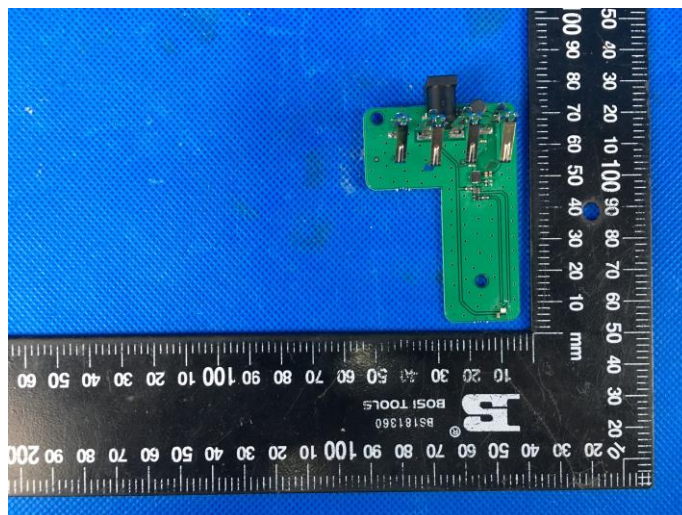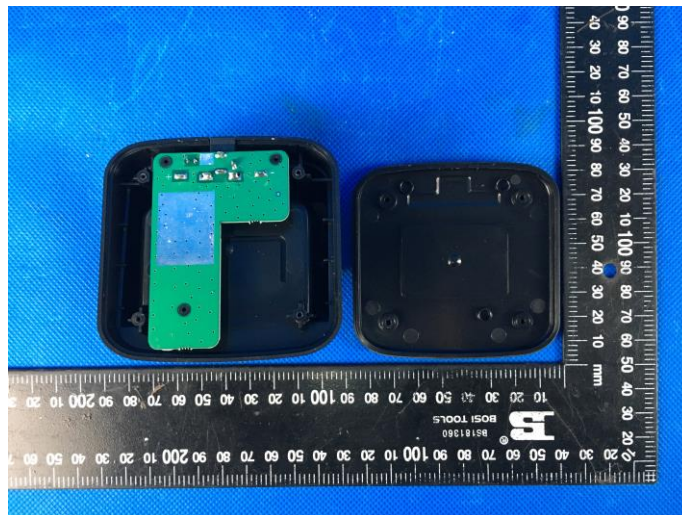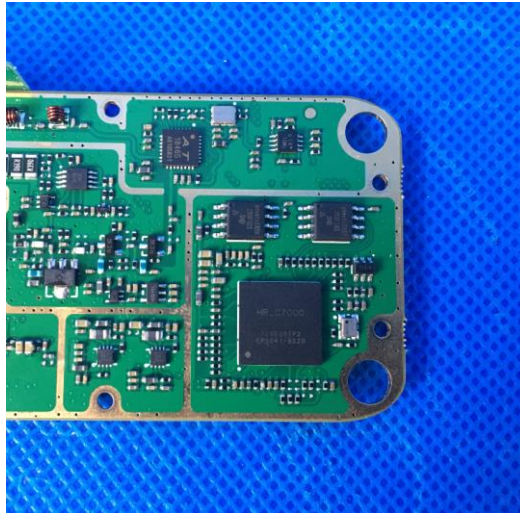

8 APPENDIX REPORT

Project No.	SHT1910073401EW		
Test sample No.	YPHT19100734001	Model No.	BF-TD515
Start test date	2019/12/12	Finish date	2019/12/13
Temperature	24.8	Humidity	39
Test Engineer	Linshuang.Chen	Auditor	<i>William.wang</i>

Appendix clause	Test Item	Test date (M/D)	Test Result (PASS/FAIL)
A	Maximum Transmitter Power	2019/12/12	PASS
B	Occupied Bandwidth	2019/12/13	PASS
C	Emission Mask	2019/12/13	PASS
D	Frequency Stability Test & Temperature	2019/12/12	PASS
E	Frequency Stability Test & Voltage	2019/12/12	PASS
F	Transmitter Frequency Behavior	2019/12/13	PASS
G	Spurious Emission On Antenna Port	2019/12/13	PASS
Note			

**Appendix A:Maximum Transmitter Power**

Operation Mode	Modulation Type	Test Channel	Measured Power(dBm)	Measured Power(W)	Rated Power(W)	Percentage (%)	Limit (%)	Result
TX-DNH	4FSK	CH _L	36.1	4.04	4.00	1.0	±20	PASS
TX-DNH	4FSK	CH _{M1}	36.2	4.12	4.00	3.0	±20	PASS
TX-DNH	4FSK	CH _{M2}	36.1	4.07	4.00	1.8	±20	PASS
TX-DNH	4FSK	CH _{M3}	36.4	4.37	4.00	9.1	±20	PASS
TX-DNH	4FSK	CH _H	36.1	4.04	4.00	1.0	±20	PASS
TX-DNL	4FSK	CH _L	29.8	0.96	1.00	-3.9	±20	PASS
TX-DNL	4FSK	CH _{M1}	29.7	0.93	1.00	-6.8	±20	PASS
TX-DNL	4FSK	CH _{M2}	29.6	0.91	1.00	-8.5	±20	PASS
TX-DNL	4FSK	CH _{M3}	29.6	0.91	1.00	-8.8	±20	PASS
TX-DNL	4FSK	CH _H	29.7	0.93	1.00	-7.2	±20	PASS



Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-DNH	4FSK	CH _L	6.765	9.674	≤11.25	PASS
TX-DNH	4FSK	CH _{M1}	7.044	9.901	≤11.25	PASS
TX-DNH	4FSK	CH _{M2}	6.939	9.201	≤11.25	PASS
TX-DNH	4FSK	CH _{M3}	7.075	9.682	≤11.25	PASS
TX-DNH	4FSK	CH _H	6.861	9.186	≤11.25	PASS
TX-DNL	4FSK	CH _L	7.068	9.441	≤11.25	PASS
TX-DNL	4FSK	CH _{M1}	6.958	9.402	≤11.25	PASS
TX-DNL	4FSK	CH _{M2}	7.009	9.290	≤11.25	PASS
TX-DNL	4FSK	CH _{M3}	6.822	9.383	≤11.25	PASS
TX-DNL	4FSK	CH _H	7.081	9.755	≤11.25	PASS



Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _L	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 400.012500 MHz Center Freq: 400.012500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gain:Low #Atten: 22 dB Radio Device: BTS</p> <p>10 dB/div Ref 38.63 dBm Log 38.6 18.6 8.63 -1.37 -11.4 -21.4 -31.4 -41.4 -51.4</p> <p>Center 400 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 6.765 kHz Total Power 41.2 dBm Transmit Freq Error -122 Hz OBW Power 99.00 % x dB Bandwidth 9.674 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNH	4FSK	CH _{M1}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 405.987500 MHz Center Freq: 405.987500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gain:Low #Atten: 22 dB Radio Device: BTS</p> <p>10 dB/div Ref 38.71 dBm Log 38.7 18.7 8.71 -1.29 -11.3 -21.3 -31.3 -41.3 -51.3</p> <p>Center 406 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 7.044 kHz Total Power 41.3 dBm Transmit Freq Error -31 Hz OBW Power 99.00 % x dB Bandwidth 9.901 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNH	4FSK	CH _{M2}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 406.112500 MHz Center Freq: 406.112500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gain:Low #Atten: 22 dB Radio Device: BTS</p> <p>10 dB/div Ref 38.65 dBm Log 38.7 18.7 8.65 -1.35 -11.4 -21.4 -31.4 -41.4 -51.4</p> <p>Center 406.1 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 6.939 kHz Total Power 41.4 dBm Transmit Freq Error 23 Hz OBW Power 99.00 % x dB Bandwidth 9.201 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>



Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _{M3}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 443.012500 MHz Center Freq: 443.012500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gate:Low #Atten: 22 dB Radio Device: BTS</p> <p>10 dB/div Ref 38.98 dBm Log 29.0 19.0 8.98 -1.02 -11.0 -21.0 -31.0 -41.0 -51.0</p> <p>Center 443 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 7.075 kHz Total Power 41.4 dBm Transmit Freq Error -127 Hz OBW Power 99.00 % x dB Bandwidth 9.682 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNH	4FSK	CH _H	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 479.987500 MHz Center Freq: 479.987500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gate:Low #Atten: 22 dB Radio Device: BTS</p> <p>10 dB/div Ref 38.58 dBm Log 28.6 18.6 8.58 -1.42 -11.4 -21.4 -31.4 -41.4 -51.4</p> <p>Center 480 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 6.861 kHz Total Power 41.3 dBm Transmit Freq Error -18 Hz OBW Power 99.00 % x dB Bandwidth 9.186 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNL	4FSK	CH _L	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 400.012500 MHz Center Freq: 400.012500 MHz Radio Std: None Trig: Free Run Avg Hold>10/10 #IF Gate:Low #Atten: 16 dB Radio Device: BTS</p> <p>10 dB/div Ref 32.48 dBm Log 22.5 12.5 2.48 -7.52 -17.5 -27.5 -37.5 -47.5 -57.5</p> <p>Center 400 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 7.068 kHz Total Power 35.0 dBm Transmit Freq Error -128 Hz OBW Power 99.00 % x dB Bandwidth 9.441 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>



Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _{M1}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 405.987500 MHz Center Freq: 405.987500 MHz Trig: Free Run Avg Hold>10/10 Radio Std: None #IF Gain:Low #Atten: 16 dB Radio Device: BTS</p> <p>10 dB/div Ref 32.29 dBm Log 22.3 12.3 2.29 -7.71 -17.7 -27.7 -37.7 -47.7 -57.7</p> <p>Center 406 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 6.958 kHz Total Power 34.9 dBm Transmit Freq Error -43 Hz OBW Power 99.00 % x dB Bandwidth 9.402 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNL	4FSK	CH _{M2}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 406.112500 MHz Center Freq: 406.112500 MHz Trig: Free Run Avg Hold>10/10 Radio Std: None #IF Gain:Low #Atten: 16 dB Radio Device: BTS</p> <p>10 dB/div Ref 32.24 dBm Log 22.2 12.2 2.24 -7.76 -17.8 -27.8 -37.8 -47.8 -57.8</p> <p>Center 406.1 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 7.009 kHz Total Power 35.0 dBm Transmit Freq Error 6 Hz OBW Power 99.00 % x dB Bandwidth 9.290 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>
TX-DNL	4FSK	CH _{M3}	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 443.012500 MHz Center Freq: 443.012500 MHz Trig: Free Run Avg Hold>10/10 Radio Std: None #IF Gain:Low #Atten: 16 dB Radio Device: BTS</p> <p>10 dB/div Ref 33.07 dBm Log 23.1 13.1 3.07 -6.93 -16.9 -26.9 -36.9 -46.9 -56.9</p> <p>Center 443 MHz Span 50 kHz #Res BW 100 Hz #VBW 300 Hz Sweep FFT</p> <p>Occupied Bandwidth 6.822 kHz Total Power 35.6 dBm Transmit Freq Error -35 Hz OBW Power 99.00 % x dB Bandwidth 9.383 kHz x dB -26.00 dB</p> <p>MSG STATUS DC Coupled</p>



Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _H	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 479.987500 MHz</p> <p>Ref 32.36 dBm</p> <p>Occupied Bandwidth: 7.081 kHz</p> <p>Total Power: 34.8 dBm</p> <p>Transmit Freq Error: -121 Hz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 9.755 kHz</p> <p>x dB: -26.00 dB</p>



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _L	<p>MultiView Spectrum Ref Level 42.00 dBm Offset 20.50 dB RBW 100 Hz Att 31 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 40 dBm 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm -90 dBm -100 dBm Mask 0 CF 400.0125 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz M1[1] 25.18 dBm 400.0124200 MHz Date: 13.DEC.2019 09:23:31</p>
TX-DNH	4FSK	CH _{M1}	<p>MultiView Spectrum Ref Level 42.00 dBm Offset 20.50 dB RBW 100 Hz Att 31 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 40 dBm 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm -90 dBm -100 dBm Mask 0 CF 405.9875 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz M1[1] 25.55 dBm 405.9874200 MHz Date: 13.DEC.2019 09:27:07</p>
TX-DNH	4FSK	CH _{M2}	<p>MultiView Spectrum Ref Level 42.00 dBm Offset 20.50 dB RBW 100 Hz Att 31 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 40 dBm 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm -80 dBm -90 dBm -100 dBm Mask 0 CF 406.1125 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz M1[1] 23.50 dBm 406.1124200 MHz Date: 13.DEC.2019 09:28:12</p>



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _{M3}	<p>MultiView Spectrum Ref Level 42.00 dBm Offset 20.50 dB RBW 100 Hz Att 31 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 40 dBm 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Mask 0 M1[1] 25.78 dBm 443.0124200 MHz CF 443.0125 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz 13.12.2019 09:29:55 Date: 13.DEC.2019 09:29:54</p>
TX-DNH	4FSK	CH _H	<p>MultiView Spectrum Ref Level 42.00 dBm Offset 20.50 dB RBW 100 Hz Att 31 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 40 dBm 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Mask 0 M1[1] 25.49 dBm 479.9874200 MHz CF 479.9875 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz 13.12.2019 09:31:28 Date: 13.DEC.2019 09:31:28</p>
TX-DNL	4FSK	CH _L	<p>MultiView Spectrum Ref Level 36.00 dBm Offset 20.50 dB RBW 100 Hz Att 25 dB SWI 41.9 ms (~54 ms) VBW 300 Hz Mode Auto FFT 1 Frequency Sweep 30 dBm 20 dBm 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm Mask 0 M1[1] 23.25 dBm 400.0124200 MHz CF 400.0125 MHz 1001 pts 4.0 kHz/ Span 40.0 kHz 13.12.2019 09:34:46 Date: 13.DEC.2019 09:34:46</p>



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _{M1}	<p>The plot shows a spectrum with a peak at 29.05 dBm. The mask is a trapezoidal shape. The signal is centered at 405.9874200 MHz. The plot includes parameters: Ref Level 36.00 dBm, Att 25 dB, Offset 20.50 dB, RBW 100 Hz, Mode Auto FFT, Span 40.0 kHz, and Date: 13.DEC.2019 09:38:32.</p>
TX-DNL	4FSK	CH _{M2}	<p>The plot shows a spectrum with a peak at 28.86 dBm. The mask is a trapezoidal shape. The signal is centered at 406.1125 MHz. The plot includes parameters: Ref Level 36.00 dBm, Att 25 dB, Offset 20.50 dB, RBW 100 Hz, Mode Auto FFT, Span 40.0 kHz, and Date: 13.DEC.2019 09:39:50.</p>
TX-DNL	4FSK	CH _{M3}	<p>The plot shows a spectrum with a peak at 29.84 dBm. The mask is a trapezoidal shape. The signal is centered at 443.0124200 MHz. The plot includes parameters: Ref Level 36.00 dBm, Att 25 dB, Offset 20.50 dB, RBW 100 Hz, Mode Auto FFT, Span 40.0 kHz, and Date: 13.DEC.2019 09:41:48.</p>



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _H	

**Appendix D:Frequency Stability Test & Temperature**

Operation Mode	Modulation Type	Test Conditions		Frequency error (ppm)					Limit (ppm)	Result
		Voltage	Temperature	CH _L	CH _{M1}	CH _{M2}	CH _{M3}	CH _H		
TX-DNH	4FSK	V _N	-30	-0.124	-0.098	-0.107	-0.126	-0.127	±5.0	PASS
TX-DNH	4FSK	V _N	-20	-0.117	-0.091	-0.103	-0.126	-0.127	±5.0	PASS
TX-DNH	4FSK	V _N	-10	-0.124	-0.092	-0.104	-0.118	-0.126	±5.0	PASS
TX-DNH	4FSK	V _N	0	-0.115	-0.098	-0.108	-0.118	-0.123	±5.0	PASS
TX-DNH	4FSK	V _N	10	-0.121	-0.094	-0.106	-0.121	-0.132	±5.0	PASS
TX-DNH	4FSK	V _N	20	-0.114	-0.090	-0.099	-0.117	-0.123	±5.0	PASS
TX-DNH	4FSK	V _N	30	-0.125	-0.091	-0.103	-0.125	-0.132	±5.0	PASS
TX-DNH	4FSK	V _N	40	-0.115	-0.094	-0.101	-0.125	-0.130	±5.0	PASS
TX-DNH	4FSK	V _N	55	-0.119	-0.094	-0.100	-0.123	-0.124	±5.0	PASS
TX-DNL	4FSK	V _N	-30	-0.097	-0.114	-0.095	-0.110	-0.123	±5.0	PASS
TX-DNL	4FSK	V _N	-20	-0.097	-0.112	-0.098	-0.117	-0.129	±5.0	PASS
TX-DNL	4FSK	V _N	-10	-0.094	-0.111	-0.097	-0.107	-0.123	±5.0	PASS
TX-DNL	4FSK	V _N	0	-0.098	-0.118	-0.098	-0.114	-0.126	±5.0	PASS
TX-DNL	4FSK	V _N	10	-0.097	-0.111	-0.093	-0.110	-0.121	±5.0	PASS
TX-DNL	4FSK	V _N	20	-0.091	-0.108	-0.093	-0.107	-0.120	±5.0	PASS
TX-DNL	4FSK	V _N	30	-0.093	-0.115	-0.095	-0.108	-0.132	±5.0	PASS
TX-DNL	4FSK	V _N	40	-0.092	-0.115	-0.100	-0.109	-0.124	±5.0	PASS
TX-DNL	4FSK	V _N	55	-0.092	-0.118	-0.098	-0.111	-0.123	±5.0	PASS



Appendix E:Frequency Stability Test & Voltage

Operation Mode	Modulation Type	Test Conditions		Frequency error (ppm)					Limit (ppm)	Result
		Voltage	Temperature	CH _L	CH _{M1}	CH _{M2}	CH _{M3}	CH _H		
TX-DNH	4FSK	V _N	T _N	-0.114	-0.090	-0.099	-0.117	-0.123	±5.0	PASS
TX-DNH	4FSK	V _L	T _N	-0.115	-0.090	-0.099	-0.118	-0.124	±5.0	PASS
TX-DNH	4FSK	V _H	T _N	-0.119	-0.093	-0.103	-0.124	-0.128	±5.0	PASS
TX-DNL	4FSK	V _N	T _N	-0.091	-0.108	-0.093	-0.107	-0.120	±5.0	PASS
TX-DNL	4FSK	V _L	T _N	-0.092	-0.110	-0.094	-0.108	-0.121	±5.0	PASS
TX-DNL	4FSK	V _H	T _N	-0.093	-0.111	-0.098	-0.112	-0.124	±5.0	PASS



Appendix F:Transmitter Frequency Behavior

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT												
TX-DNH	4FSK	CH _{M2}	<thead> <tr> <th colspan="2">Carrier Power</th> <th colspan="2">Carrier Offset</th> </tr> <tr> <th>+Peak</th> <th>-Peak</th> <th>+Peak/2</th> <th>RMS</th> </tr> </thead> <tbody> <tr> <td>13.796 kHz</td> <td>-13.12 kHz</td> <td>13.458 kHz</td> <td>2.754 kHz</td> </tr> </tbody>	Carrier Power		Carrier Offset		+Peak	-Peak	+Peak/2	RMS	13.796 kHz	-13.12 kHz	13.458 kHz	2.754 kHz
Carrier Power		Carrier Offset													
+Peak	-Peak	+Peak/2	RMS												
13.796 kHz	-13.12 kHz	13.458 kHz	2.754 kHz												

 The plot also shows a carrier offset of -47.50 Hz. The date is 13.DEC.2019 09:49:20.

| TX-DNH | 4FSK | CH_{M2} | | Carrier Power | | Carrier Offset | | | --- | --- | --- | --- | | +Peak | -Peak | +Peak/2 | RMS | | 12.116 kHz | -12.799 kHz | 12.458 kHz | 8.7339 kHz | The plot also shows a carrier offset of -62.46 Hz. The date is 13.DEC.2019 09:49:56. |



Appendix G:Spurious Emission On Antenna Port

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																								
TX-DNH	4FSK	CHL	<p>MultiView Spectrum Ref Level 20.50 dBm Offset 20.50 dB Mode Auto Sweep</p> <p>1 Spurious Emissions</p> <table border="1"> <tr> <td>M2[1]</td> <td>-46.12 dBm</td> <td>800.0200 MHz</td> </tr> <tr> <td>M1[1]</td> <td>-14.50 dBm</td> <td>399.9980 MHz</td> </tr> </table> <p>SPURIOUS_LINE_ASS_001</p> <p>30.0 MHz 64002 pts 497.0 MHz/ 5.0 GHz</p> <p>2 Result Summary</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ALimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>399.99797 MHz</td> <td>-14.50 dBm</td> <td>-200.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>5.000 GHz</td> <td>1.000 MHz</td> <td>4.72007 GHz</td> <td>-53.84 dBm</td> <td>-200.00 dB</td> </tr> </tbody> </table> <p>Date: 13.DEC.2019 10:07:54</p>	M2[1]	-46.12 dBm	800.0200 MHz	M1[1]	-14.50 dBm	399.9980 MHz	Range Low	Range Up	RBW	Frequency	Power Abs	ALimit	30.000 MHz	1.000 GHz	100.000 kHz	399.99797 MHz	-14.50 dBm	-200.00 dB	1.000 GHz	5.000 GHz	1.000 MHz	4.72007 GHz	-53.84 dBm	-200.00 dB
M2[1]	-46.12 dBm	800.0200 MHz																									
M1[1]	-14.50 dBm	399.9980 MHz																									
Range Low	Range Up	RBW	Frequency	Power Abs	ALimit																						
30.000 MHz	1.000 GHz	100.000 kHz	399.99797 MHz	-14.50 dBm	-200.00 dB																						
1.000 GHz	5.000 GHz	1.000 MHz	4.72007 GHz	-53.84 dBm	-200.00 dB																						
TX-DNH	4FSK	CHM1	<p>MultiView Spectrum Ref Level 20.50 dBm Offset 20.50 dB Mode Auto Sweep</p> <p>1 Spurious Emissions</p> <table border="1"> <tr> <td>M2[1]</td> <td>-46.12 dBm</td> <td>811.9620 MHz</td> </tr> <tr> <td>M1[1]</td> <td>-23.06 dBm</td> <td>405.9690 MHz</td> </tr> </table> <p>SPURIOUS_LINE_ASS_001</p> <p>30.0 MHz 64002 pts 497.0 MHz/ 5.0 GHz</p> <p>2 Result Summary</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ALimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>405.96934 MHz</td> <td>-23.06 dBm</td> <td>-200.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>5.000 GHz</td> <td>1.000 MHz</td> <td>4.95244 GHz</td> <td>-53.70 dBm</td> <td>-200.00 dB</td> </tr> </tbody> </table> <p>Date: 13.DEC.2019 10:08:34</p>	M2[1]	-46.12 dBm	811.9620 MHz	M1[1]	-23.06 dBm	405.9690 MHz	Range Low	Range Up	RBW	Frequency	Power Abs	ALimit	30.000 MHz	1.000 GHz	100.000 kHz	405.96934 MHz	-23.06 dBm	-200.00 dB	1.000 GHz	5.000 GHz	1.000 MHz	4.95244 GHz	-53.70 dBm	-200.00 dB
M2[1]	-46.12 dBm	811.9620 MHz																									
M1[1]	-23.06 dBm	405.9690 MHz																									
Range Low	Range Up	RBW	Frequency	Power Abs	ALimit																						
30.000 MHz	1.000 GHz	100.000 kHz	405.96934 MHz	-23.06 dBm	-200.00 dB																						
1.000 GHz	5.000 GHz	1.000 MHz	4.95244 GHz	-53.70 dBm	-200.00 dB																						
TX-DNH	4FSK	CHM2	<p>MultiView Spectrum Ref Level 20.50 dBm Offset 20.50 dB Mode Auto Sweep</p> <p>1 Spurious Emissions</p> <table border="1"> <tr> <td>M2[1]</td> <td>-46.31 dBm</td> <td>812.2050 MHz</td> </tr> <tr> <td>M1[1]</td> <td>-23.33 dBm</td> <td>406.0910 MHz</td> </tr> </table> <p>SPURIOUS_LINE_ASS_001</p> <p>30.0 MHz 64002 pts 497.0 MHz/ 5.0 GHz</p> <p>2 Result Summary</p> <table border="1"> <thead> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>ALimit</th> </tr> </thead> <tbody> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>406.09059 MHz</td> <td>-23.33 dBm</td> <td>-200.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>5.000 GHz</td> <td>1.000 MHz</td> <td>4.79082 GHz</td> <td>-51.58 dBm</td> <td>-200.00 dB</td> </tr> </tbody> </table> <p>Date: 13.DEC.2019 10:09:29</p>	M2[1]	-46.31 dBm	812.2050 MHz	M1[1]	-23.33 dBm	406.0910 MHz	Range Low	Range Up	RBW	Frequency	Power Abs	ALimit	30.000 MHz	1.000 GHz	100.000 kHz	406.09059 MHz	-23.33 dBm	-200.00 dB	1.000 GHz	5.000 GHz	1.000 MHz	4.79082 GHz	-51.58 dBm	-200.00 dB
M2[1]	-46.31 dBm	812.2050 MHz																									
M1[1]	-23.33 dBm	406.0910 MHz																									
Range Low	Range Up	RBW	Frequency	Power Abs	ALimit																						
30.000 MHz	1.000 GHz	100.000 kHz	406.09059 MHz	-23.33 dBm	-200.00 dB																						
1.000 GHz	5.000 GHz	1.000 MHz	4.79082 GHz	-51.58 dBm	-200.00 dB																						



Appendix G:Spurious Emission On Antenna Port

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																				
TX-DNH	4FSK	CH _{M3}	<p>1 Spurious Emissions</p> <table border="1"> <tr> <td>M2[1]</td> <td>-55.61 dBm</td> <td>886.0130 MHz</td> </tr> <tr> <td>M1[1]</td> <td>-41.48 dBm</td> <td>443.0100 MHz</td> </tr> </table> <p>2 Result Summary</p> <table border="1"> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>Alimit</th> </tr> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>443.01006 MHz</td> <td>-41.48 dBm</td> <td>-200.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>5.000 GHz</td> <td>1.000 MHz</td> <td>4.35158 GHz</td> <td>-53.03 dBm</td> <td>-200.00 dB</td> </tr> </table> <p>Date: 13.DEC.2019 10:10:48</p>	M2[1]	-55.61 dBm	886.0130 MHz	M1[1]	-41.48 dBm	443.0100 MHz	Range Low	Range Up	RBW	Frequency	Power Abs	Alimit	30.000 MHz	1.000 GHz	100.000 kHz	443.01006 MHz	-41.48 dBm	-200.00 dB	1.000 GHz	5.000 GHz	1.000 MHz	4.35158 GHz	-53.03 dBm	-200.00 dB																												
M2[1]	-55.61 dBm	886.0130 MHz																																																					
M1[1]	-41.48 dBm	443.0100 MHz																																																					
Range Low	Range Up	RBW	Frequency	Power Abs	Alimit																																																		
30.000 MHz	1.000 GHz	100.000 kHz	443.01006 MHz	-41.48 dBm	-200.00 dB																																																		
1.000 GHz	5.000 GHz	1.000 MHz	4.35158 GHz	-53.03 dBm	-200.00 dB																																																		
TX-DNH	4FSK	CH _H	<p>1 Spurious Emissions</p> <table border="1"> <tr> <td>M3[1]</td> <td>-48.77 dBm</td> <td>596.2350 MHz</td> </tr> <tr> <td>M1[1]</td> <td>-41.96 dBm</td> <td>126.1030 MHz</td> </tr> </table> <p>2 Result Summary</p> <table border="1"> <tr> <th>Range Low</th> <th>Range Up</th> <th>RBW</th> <th>Frequency</th> <th>Power Abs</th> <th>Alimit</th> </tr> <tr> <td>30.000 MHz</td> <td>1.000 GHz</td> <td>100.000 kHz</td> <td>126.10278 MHz</td> <td>-41.96 dBm</td> <td>-200.00 dB</td> </tr> <tr> <td>1.000 GHz</td> <td>5.000 GHz</td> <td>1.000 MHz</td> <td>4.99531 GHz</td> <td>-52.67 dBm</td> <td>-200.00 dB</td> </tr> </table> <p>3 Marker Table</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>126.103 MHz</td> <td>-41.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>363.715 MHz</td> <td>-48.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>596.235 MHz</td> <td>-48.77 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 13.DEC.2019 10:12:03</p>	M3[1]	-48.77 dBm	596.2350 MHz	M1[1]	-41.96 dBm	126.1030 MHz	Range Low	Range Up	RBW	Frequency	Power Abs	Alimit	30.000 MHz	1.000 GHz	100.000 kHz	126.10278 MHz	-41.96 dBm	-200.00 dB	1.000 GHz	5.000 GHz	1.000 MHz	4.99531 GHz	-52.67 dBm	-200.00 dB	Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		126.103 MHz	-41.96 dBm			M2	1		363.715 MHz	-48.22 dBm			M3	1		596.235 MHz	-48.77 dBm		
M3[1]	-48.77 dBm	596.2350 MHz																																																					
M1[1]	-41.96 dBm	126.1030 MHz																																																					
Range Low	Range Up	RBW	Frequency	Power Abs	Alimit																																																		
30.000 MHz	1.000 GHz	100.000 kHz	126.10278 MHz	-41.96 dBm	-200.00 dB																																																		
1.000 GHz	5.000 GHz	1.000 MHz	4.99531 GHz	-52.67 dBm	-200.00 dB																																																		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																																	
M1	1		126.103 MHz	-41.96 dBm																																																			
M2	1		363.715 MHz	-48.22 dBm																																																			
M3	1		596.235 MHz	-48.77 dBm																																																			

----End of Report----