




11AX20SISO-Ant2-2412-PASS

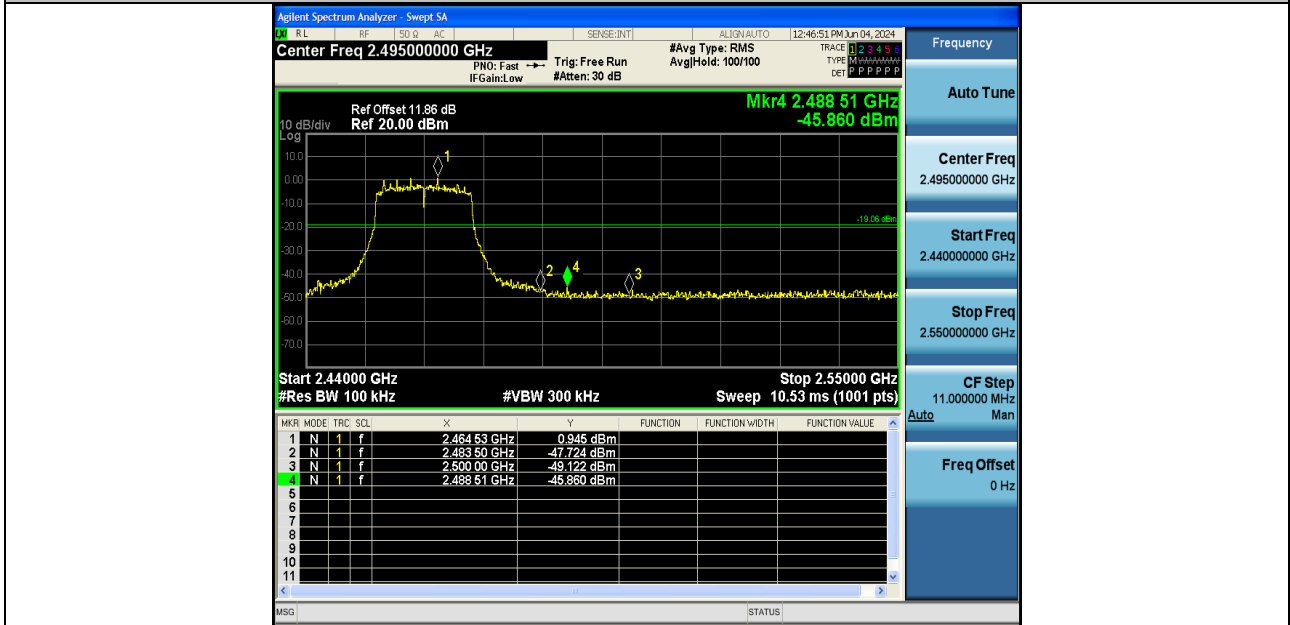


11AX20SISO-Ant1-2462-PASS

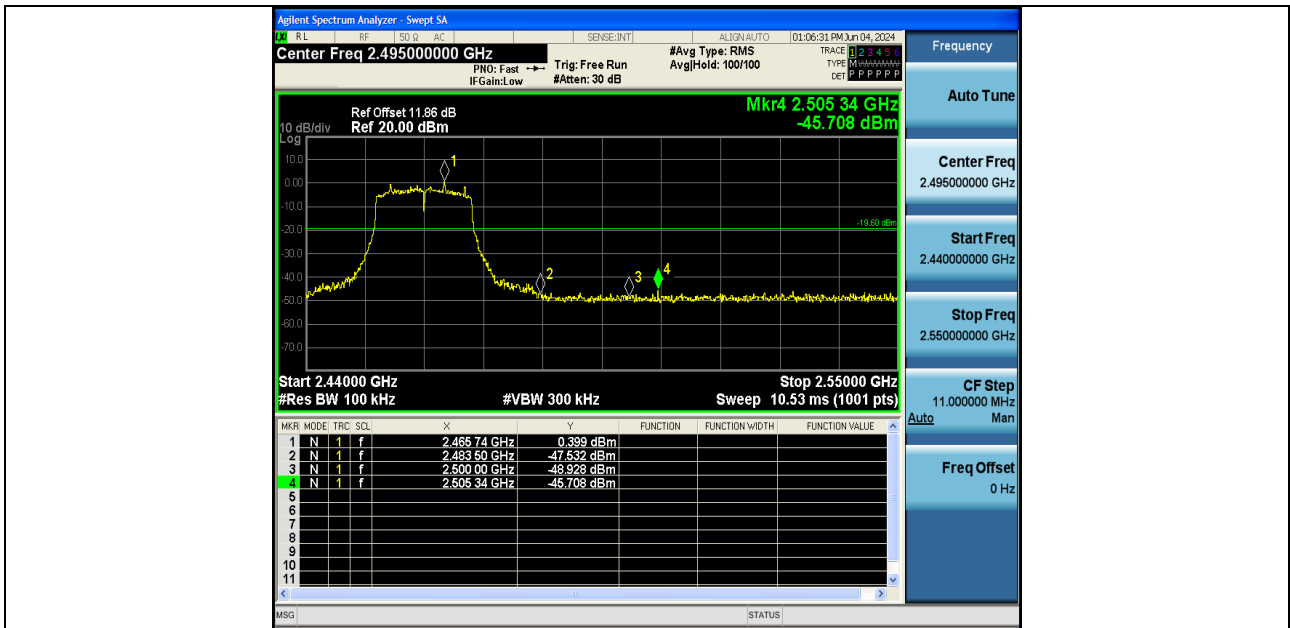


11AX20SISO-Ant2-2462-PASS

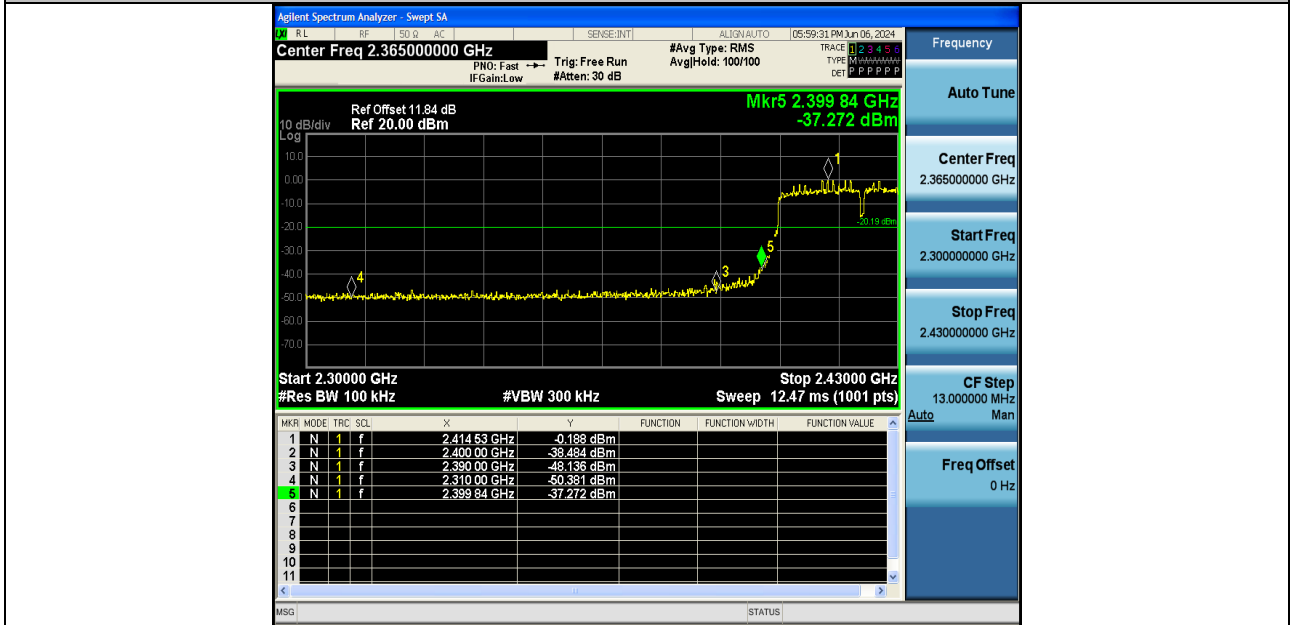


11AX40SISO-Ant1-2422-PASS

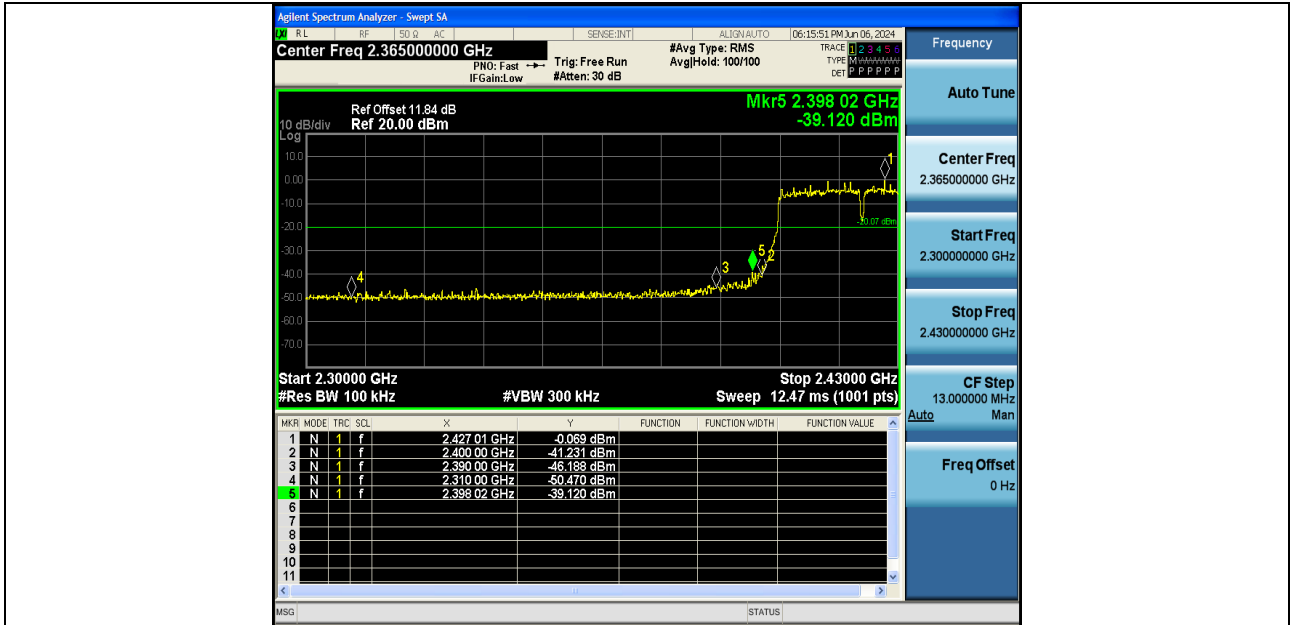

11AX40SISO-Ant2-2422-PASS

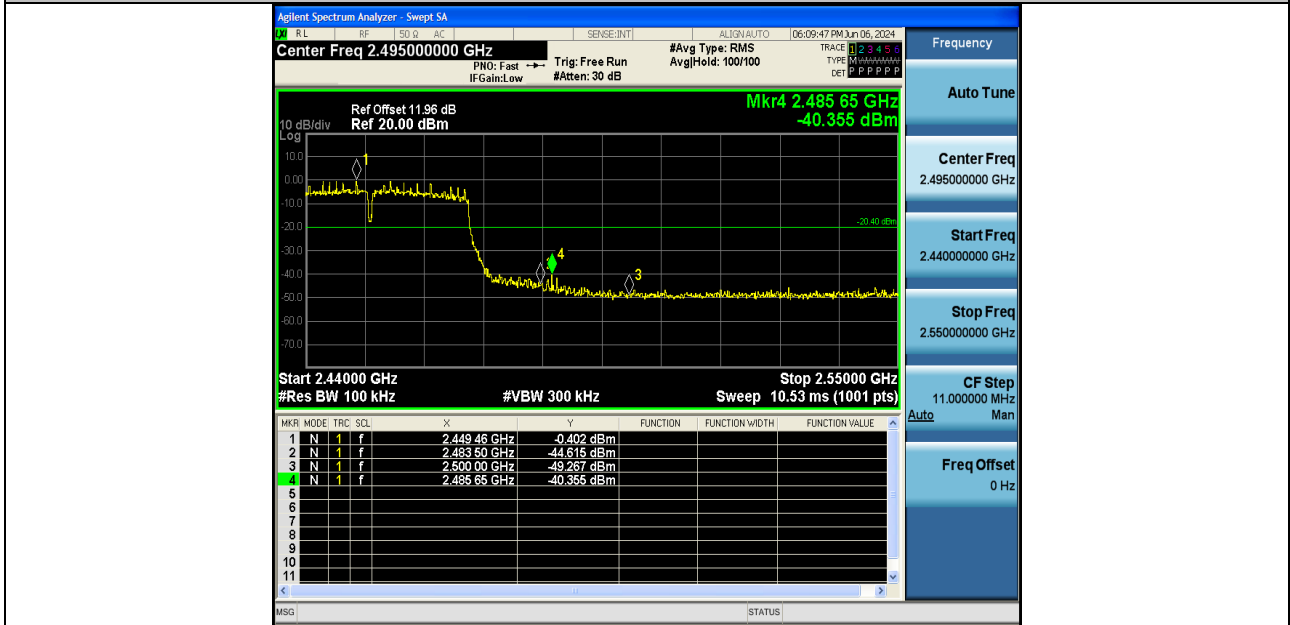

11AX40SISO-Ant1-2452-PASS

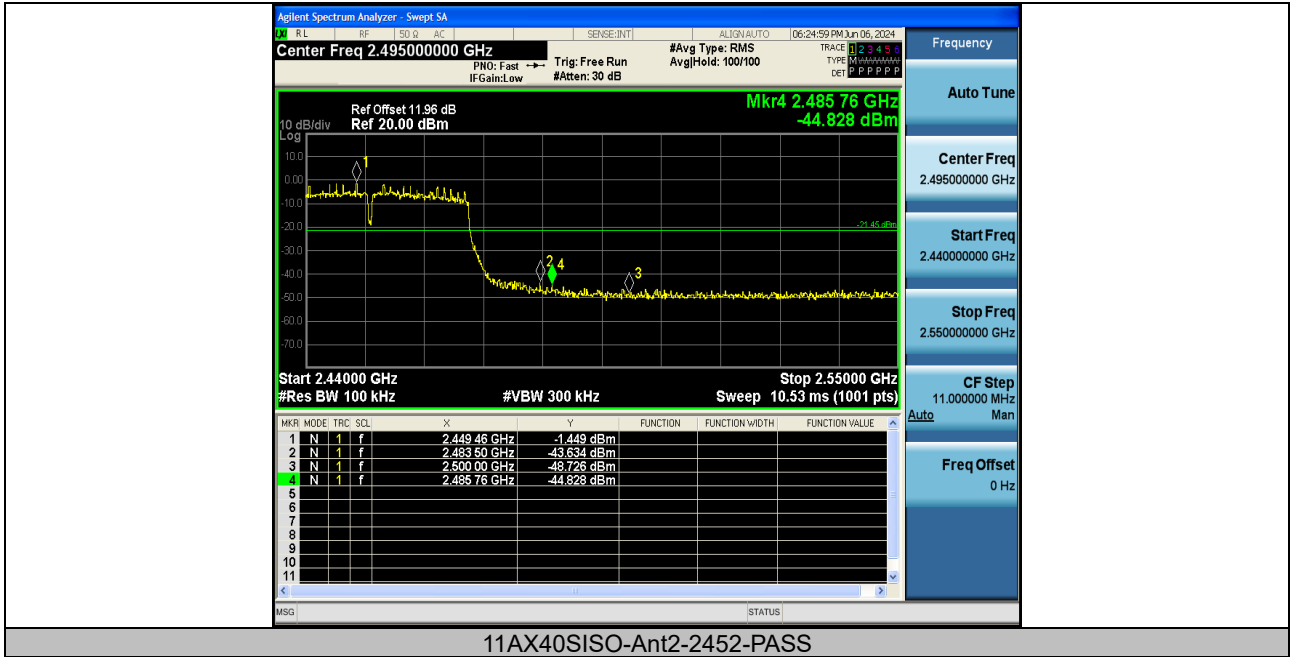

11AX40SISO-Ant2-2452-PASS



## 9 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247


Test Method : ANSI C63.10:2013

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 9.2 Test Setup

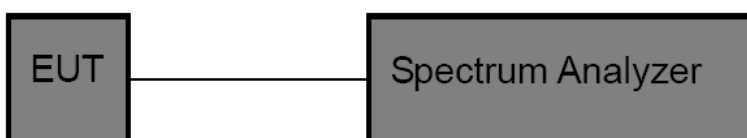

### 9.3 Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.040	2407.000	2417.040	0.5	PASS
11B	Ant2	2412	10.080	2406.960	2417.040	0.5	PASS
11B	Ant1	2437	10.080	2431.960	2442.040	0.5	PASS
11B	Ant2	2437	10.080	2431.960	2442.040	0.5	PASS
11B	Ant1	2462	10.080	2456.960	2467.040	0.5	PASS
11B	Ant2	2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	15.120	2404.440	2419.560	0.5	PASS
11G	Ant2	2412	15.120	2404.440	2419.560	0.5	PASS
11G	Ant1	2437	15.080	2429.480	2444.560	0.5	PASS
11G	Ant2	2437	15.120	2429.440	2444.560	0.5	PASS
11G	Ant1	2462	15.120	2454.440	2469.560	0.5	PASS
11G	Ant2	2462	15.120	2454.440	2469.560	0.5	PASS
11N20SISO	Ant1	2412	15.120	2404.440	2419.560	0.5	PASS
11N20SISO	Ant2	2412	15.080	2404.440	2419.520	0.5	PASS
11N20SISO	Ant1	2437	15.080	2429.440	2444.520	0.5	PASS
11N20SISO	Ant2	2437	15.120	2429.440	2444.560	0.5	PASS
11N20SISO	Ant1	2462	15.120	2454.440	2469.560	0.5	PASS
11N20SISO	Ant2	2462	15.120	2454.440	2469.560	0.5	PASS
11N40SISO	Ant1	2422	35.040	2404.480	2439.520	0.5	PASS
11N40SISO	Ant2	2422	35.040	2404.480	2439.520	0.5	PASS
11N40SISO	Ant1	2437	35.040	2419.480	2454.520	0.5	PASS
11N40SISO	Ant2	2437	30.160	2419.400	2449.560	0.5	PASS
11N40SISO	Ant1	2452	35.120	2434.400	2469.520	0.5	PASS
11N40SISO	Ant2	2452	35.040	2434.480	2469.520	0.5	PASS
11AX20SISO	Ant1	2412	15.640	2404.480	2420.120	0.5	PASS
11AX20SISO	Ant2	2412	15.400	2404.160	2419.560	0.5	PASS
11AX20SISO	Ant1	2437	15.960	2428.600	2444.560	0.5	PASS
11AX20SISO	Ant2	2437	16.280	2428.480	2444.760	0.5	PASS




Report No.: PTC24022712801E-FC03


11AX20SISO	Ant1	2462	16.640	2453.480	2470.120	0.5	PASS
11AX20SISO	Ant2	2462	15.720	2453.840	2469.560	0.5	PASS
11AX40SISO	Ant1	2422	32.560	2405.680	2438.240	0.5	PASS
11AX40SISO	Ant2	2422	35.040	2404.480	2439.520	0.5	PASS
11AX40SISO	Ant1	2437	35.120	2419.480	2454.600	0.5	PASS
11AX40SISO	Ant2	2437	34.960	2419.560	2454.520	0.5	PASS
11AX40SISO	Ant1	2452	35.120	2434.480	2469.600	0.5	PASS
11AX40SISO	Ant2	2452	34.960	2434.560	2469.520	0.5	PASS




Test Graphs:

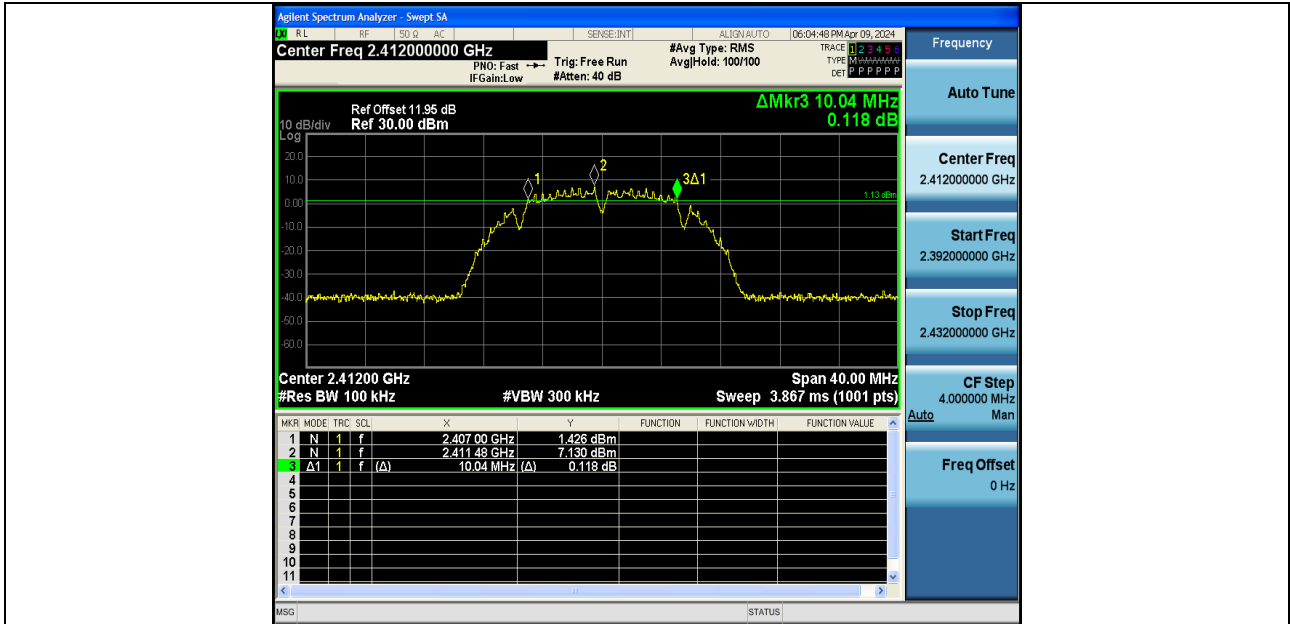


11B-Ant1-2412-PASS

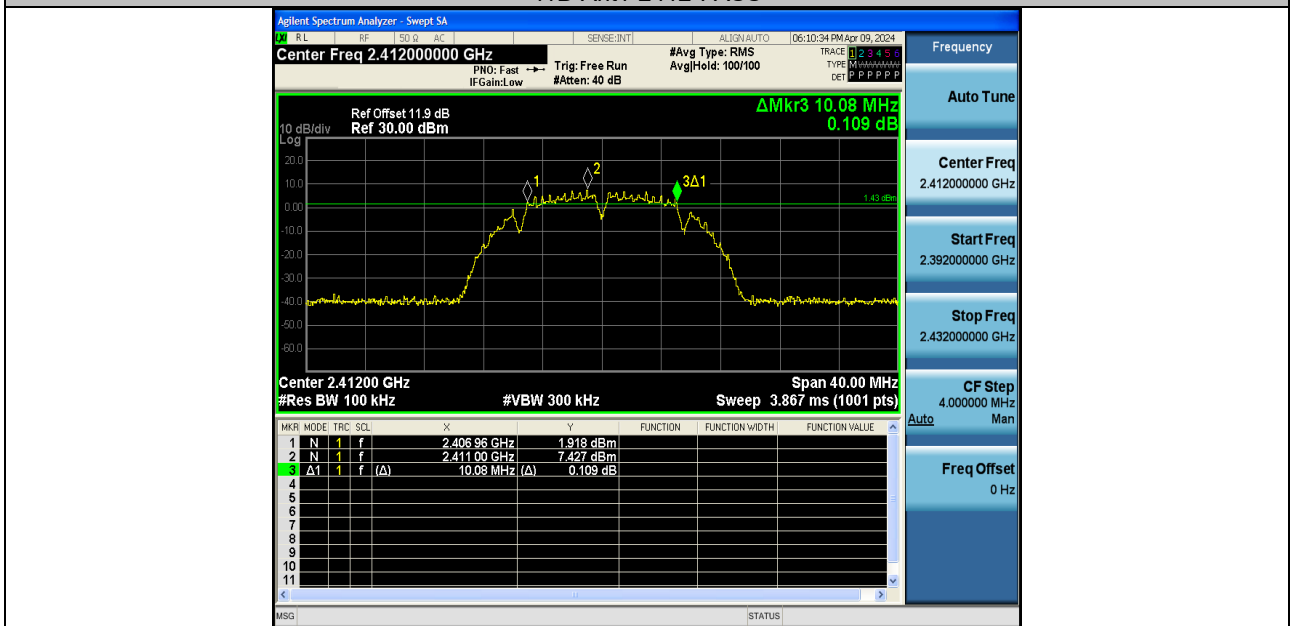

11B-Ant2-2412-PASS

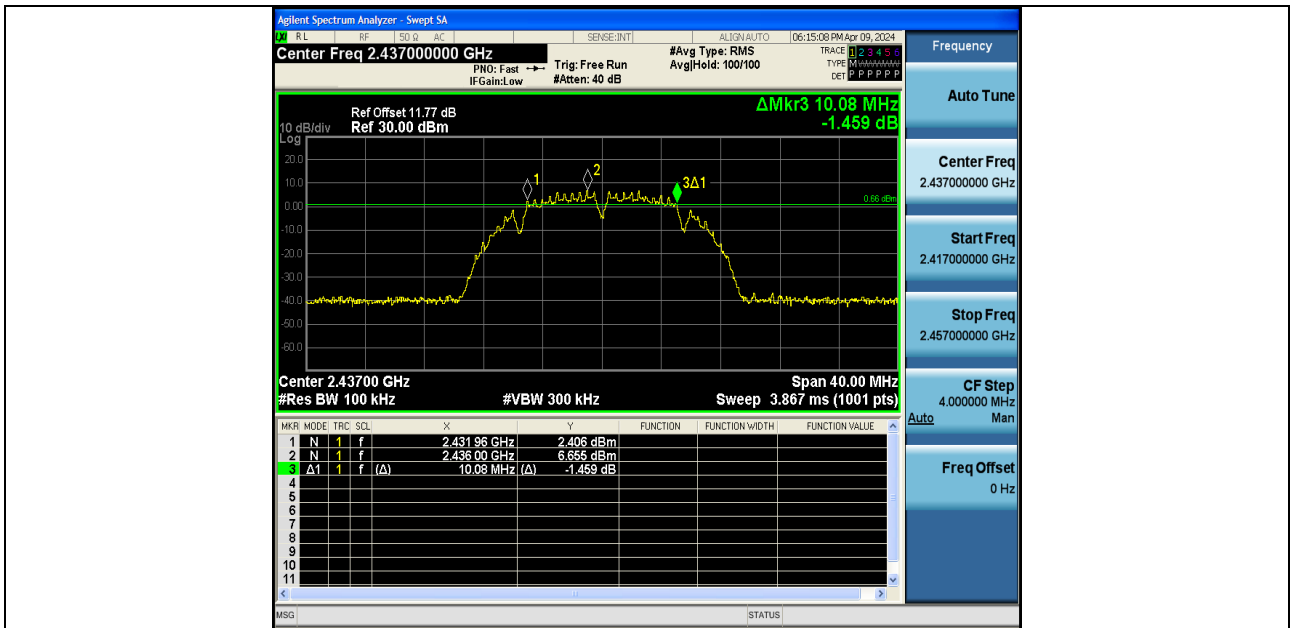


11B-Ant1-2437-PASS

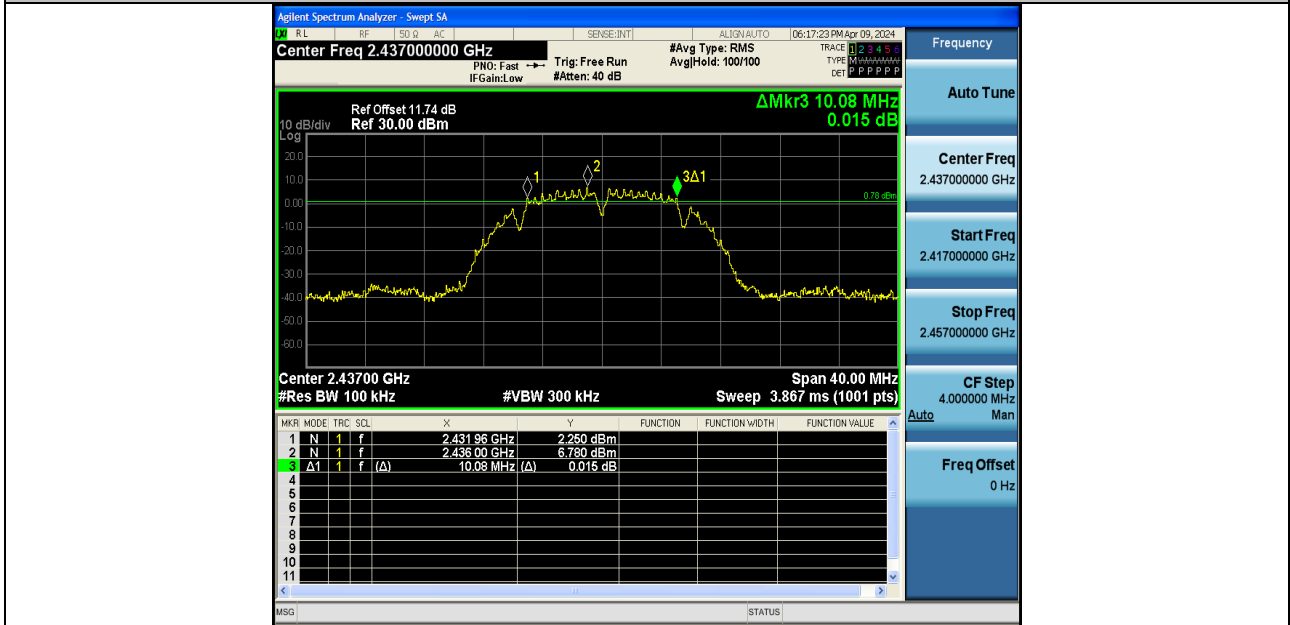

11B-Ant2-2437-PASS



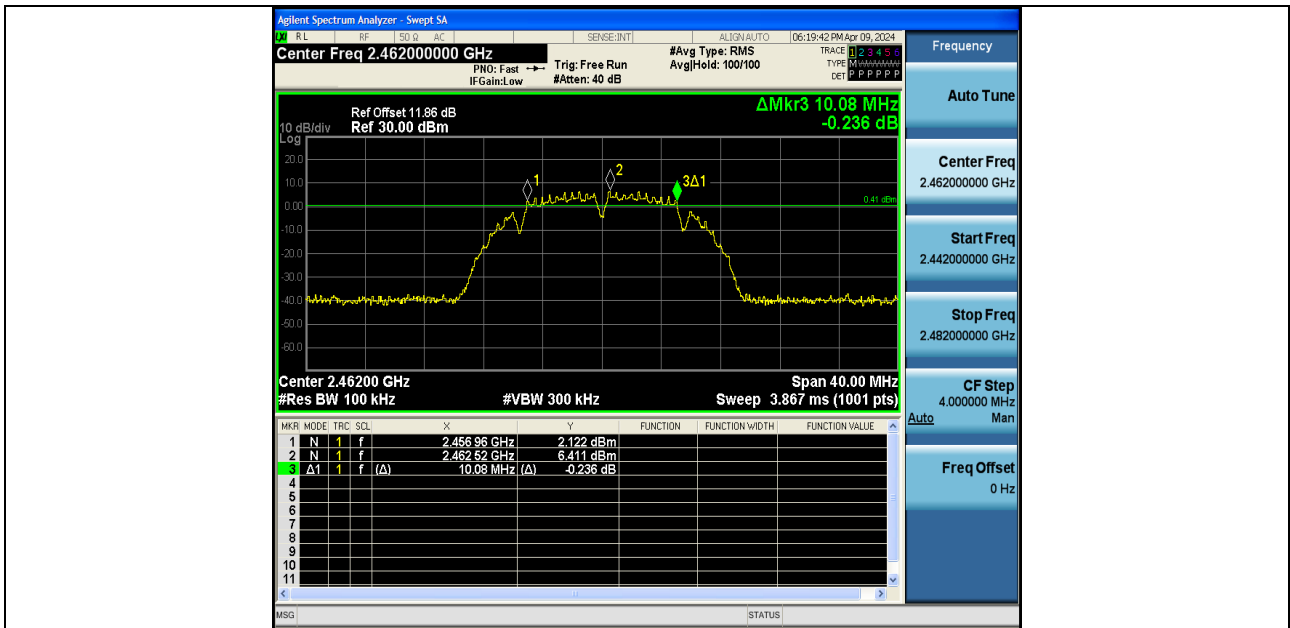

11B-Ant1-2462-PASS



11B-Ant2-2462-PASS



11G-Ant1-2412-PASS



11G-Ant2-2412-PASS



11G-Ant1-2437-PASS



11G-Ant2-2437-PASS




11G-Ant1-2462-PASS




11G-Ant2-2462-PASS



11N20SISO-Ant1-2412-PASS

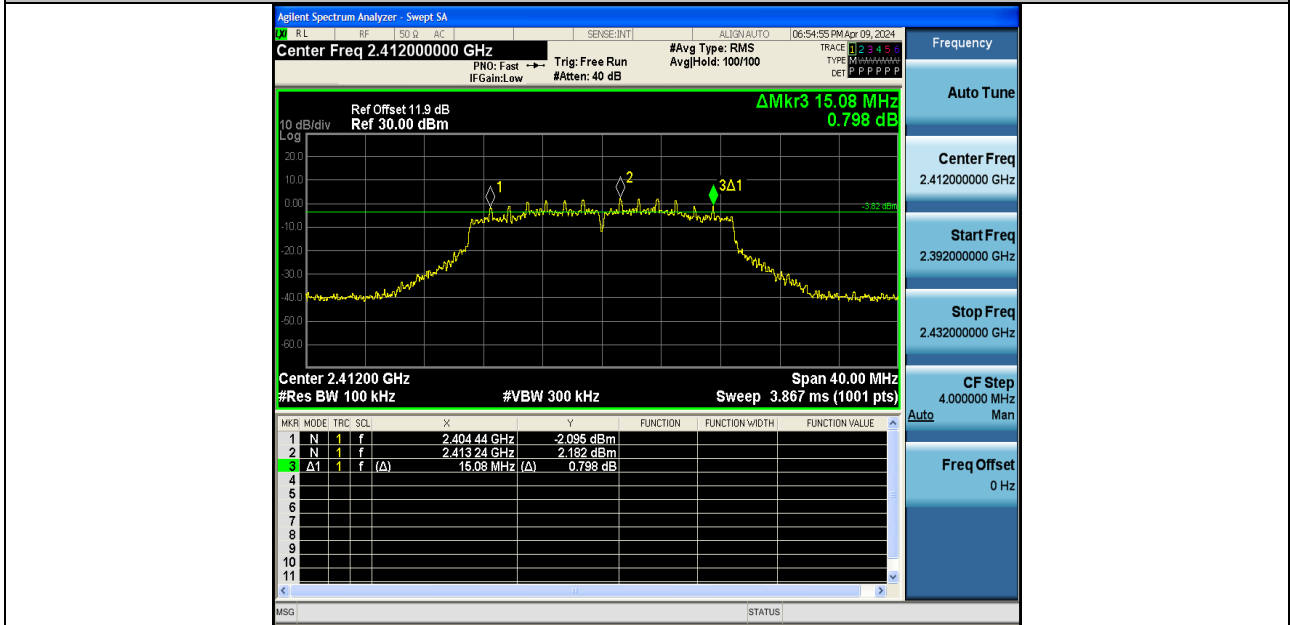


11N20SISO-Ant2-2412-PASS

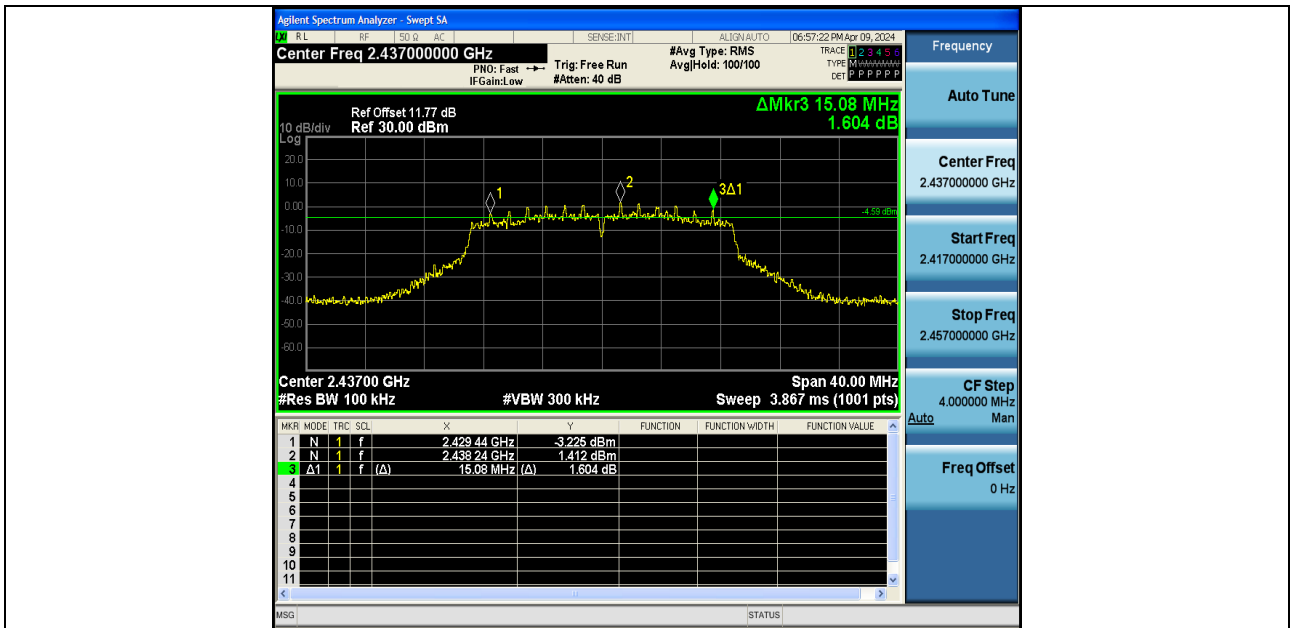


11N20SISO-Ant1-2437-PASS




11N20SISO-Ant2-2437-PASS

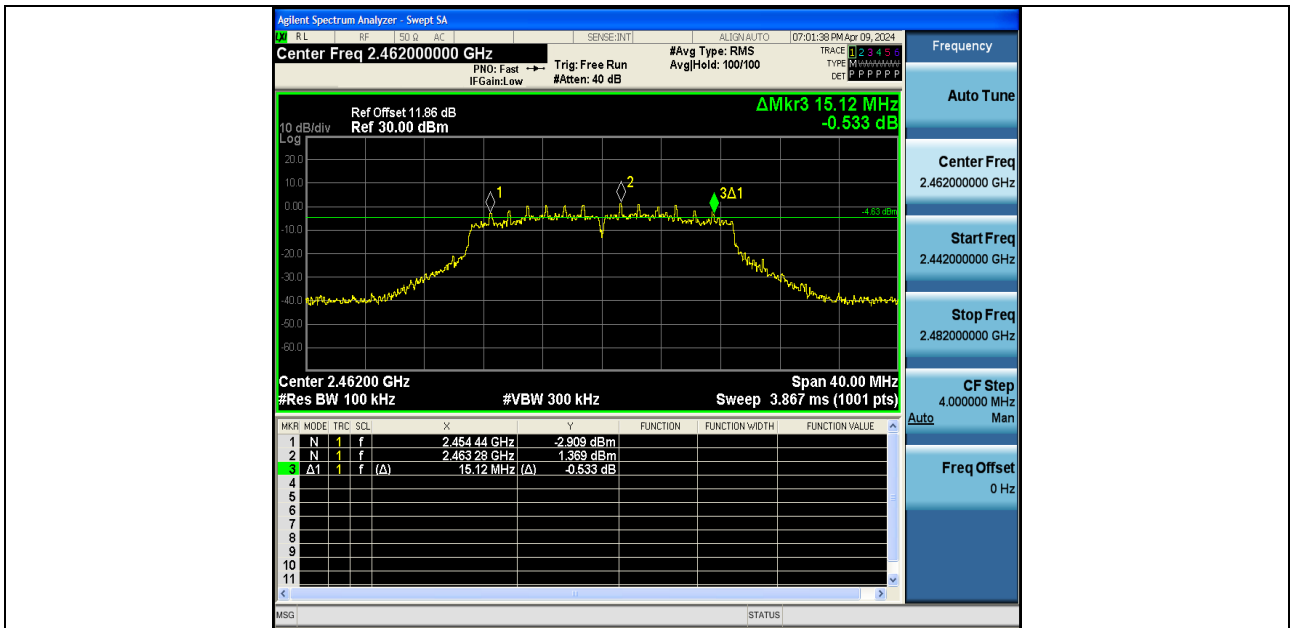


11N20SISO-Ant1-2462-PASS

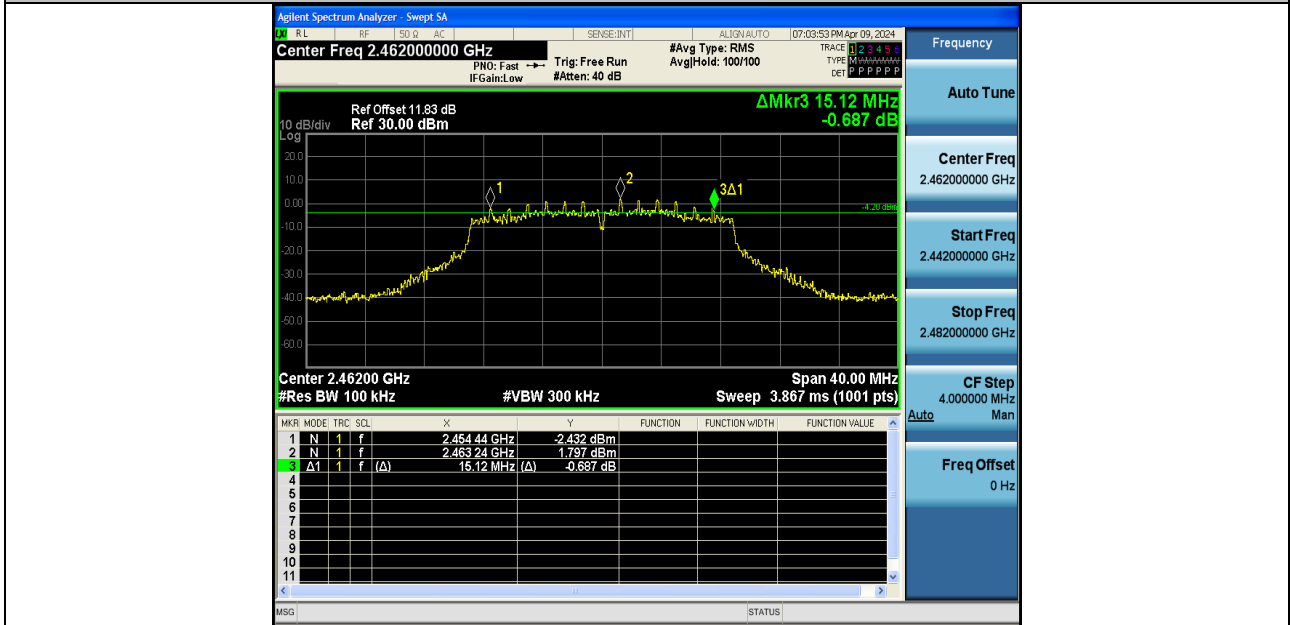

11N20SISO-Ant2-2462-PASS

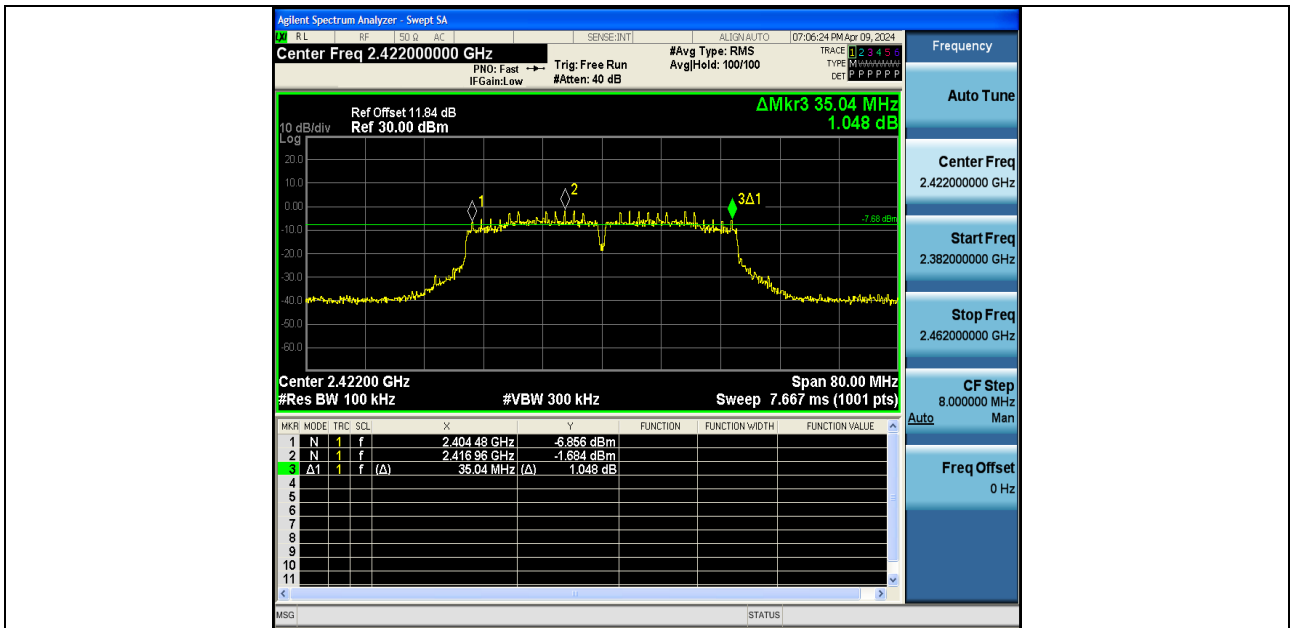


11N40SISO-Ant1-2422-PASS

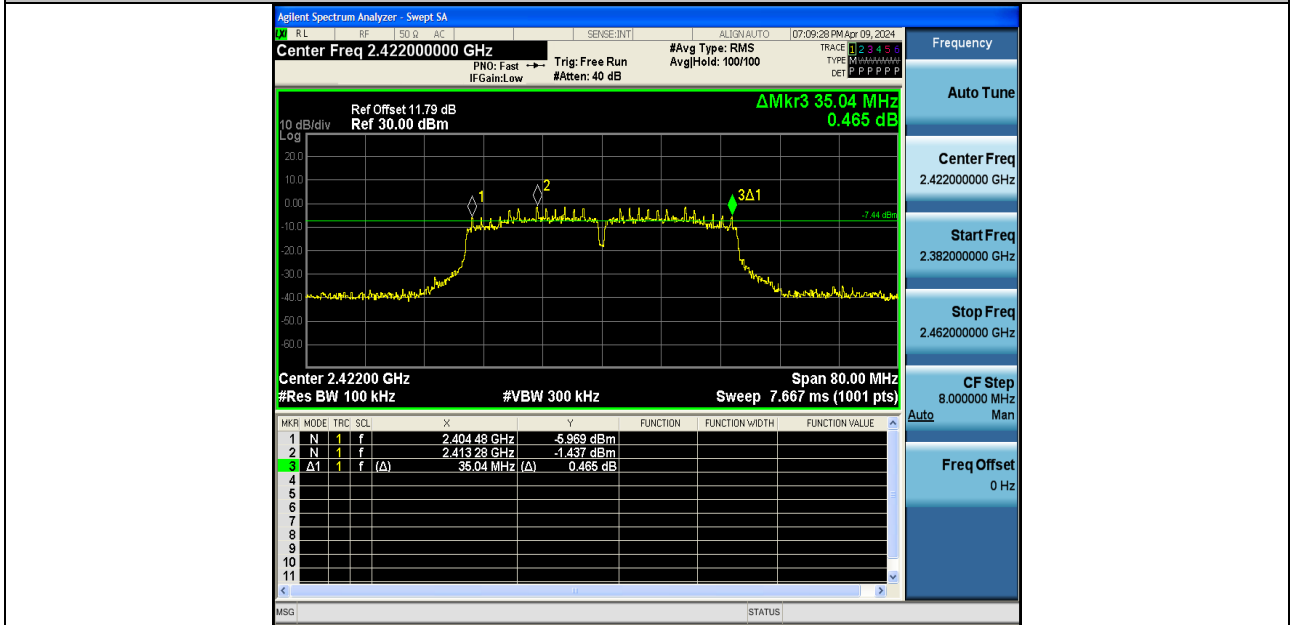


11N40SISO-Ant2-2422-PASS




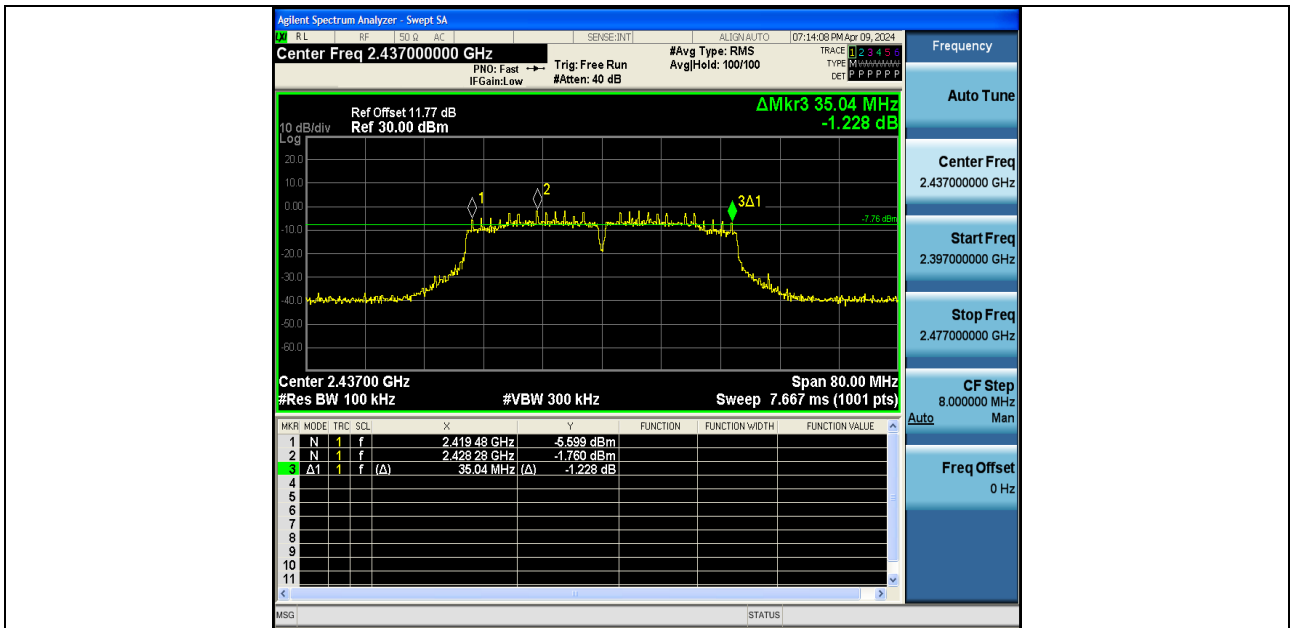


11N40SISO-Ant1-2437-PASS

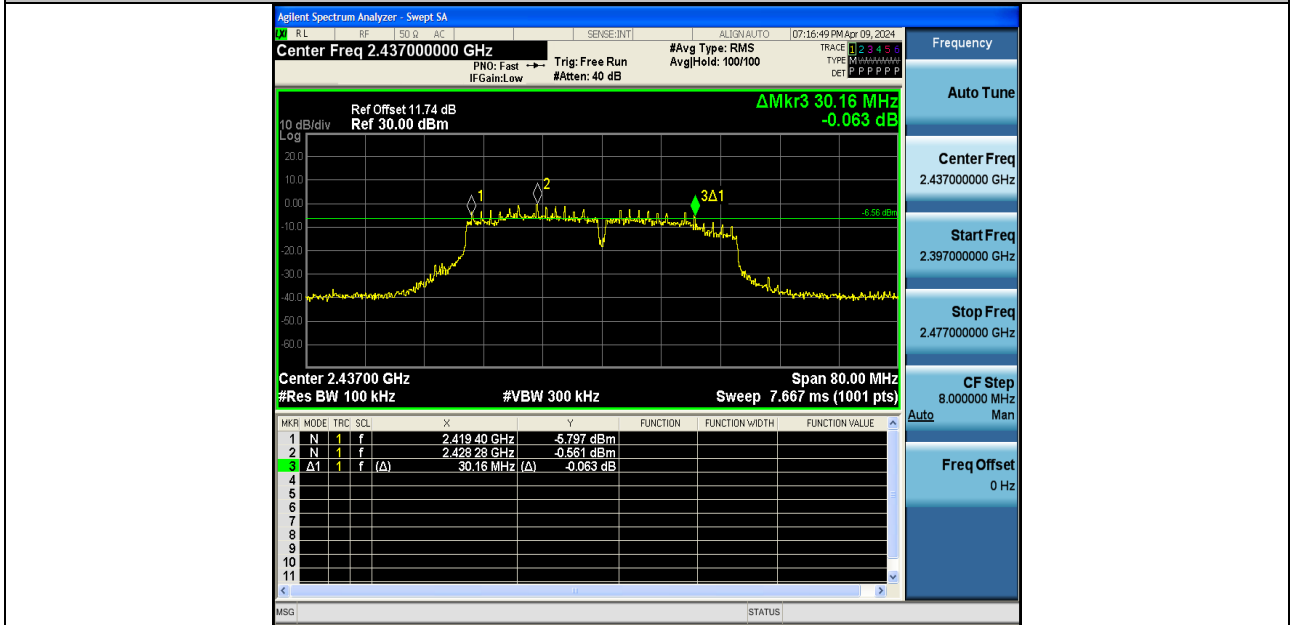


11N40SISO-Ant2-2437-PASS

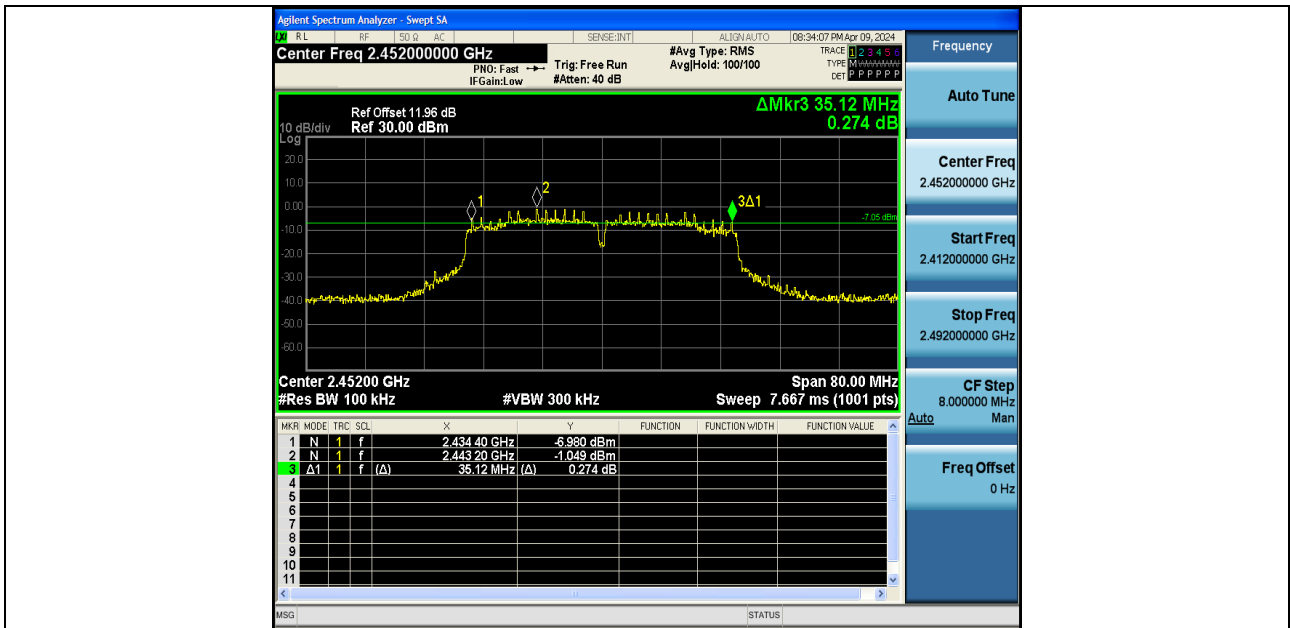


11N40SISO-Ant1-2452-PASS

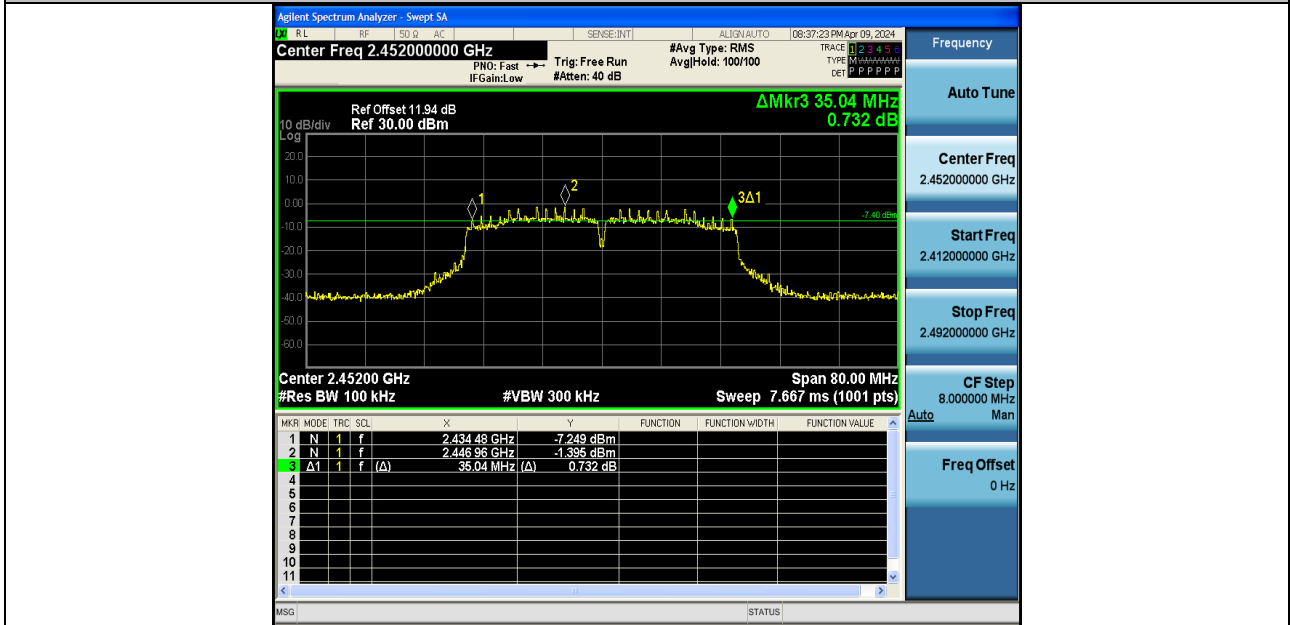


11N40SISO-Ant2-2452-PASS

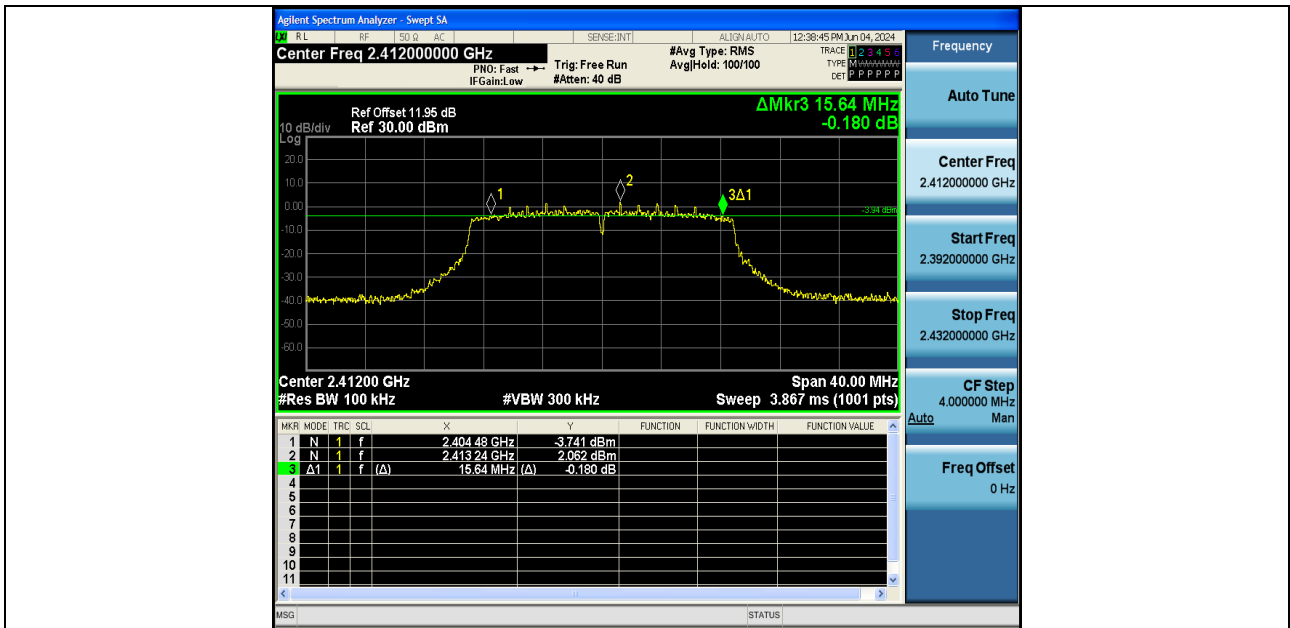


11AX20SISO-Ant1-2412-PASS

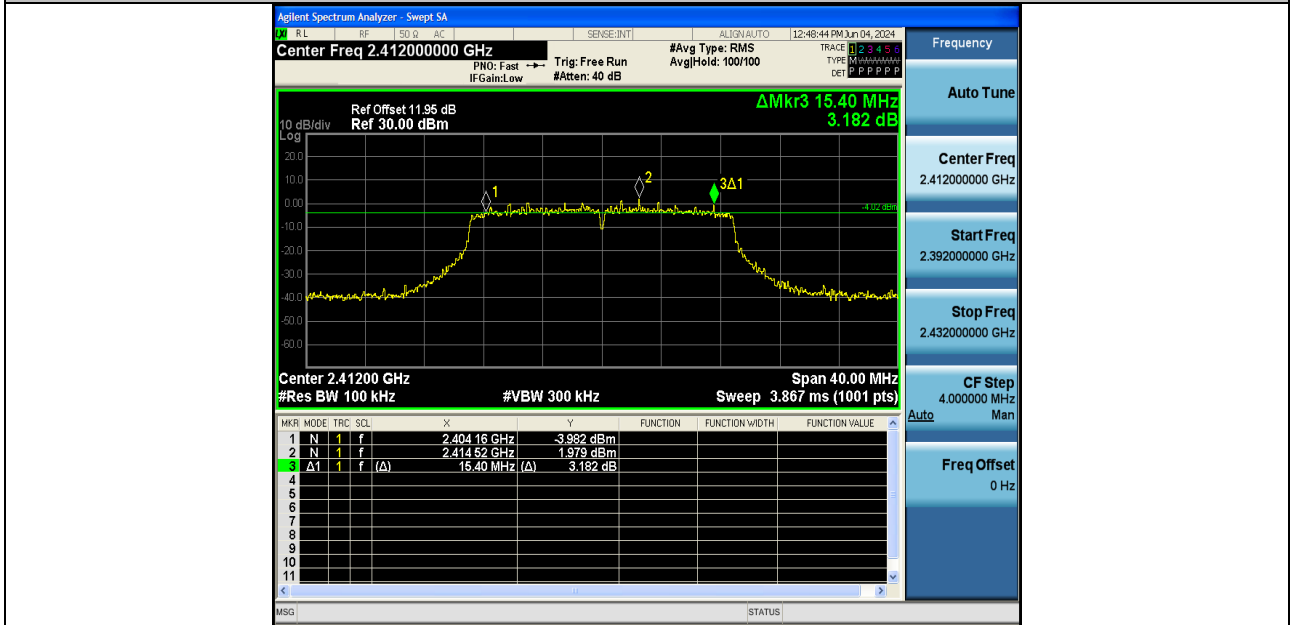


11AX20SISO-Ant2-2412-PASS

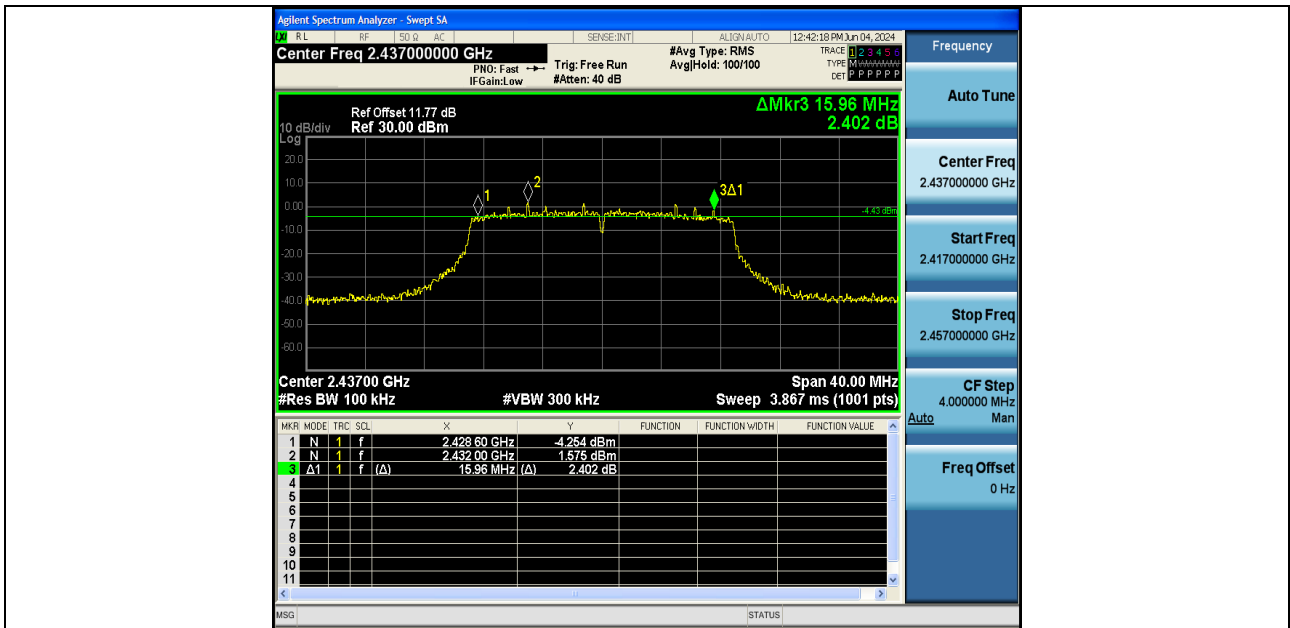


11AX20SISO-Ant1-2437-PASS

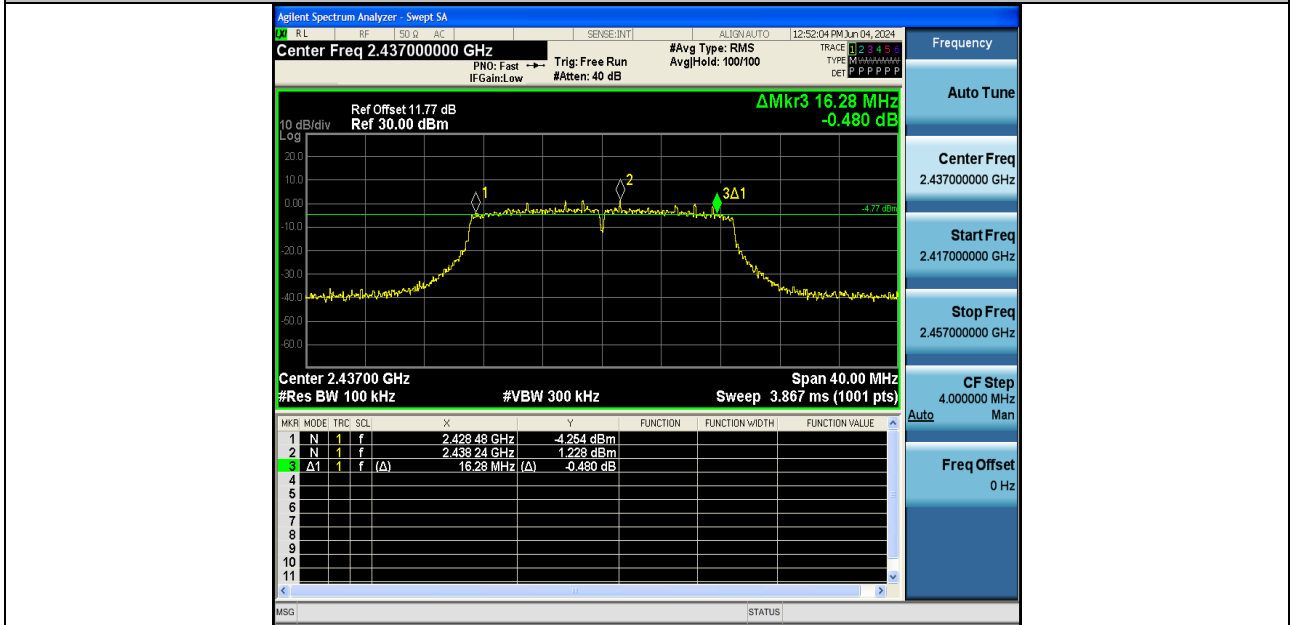


11AX20SISO-Ant2-2437-PASS

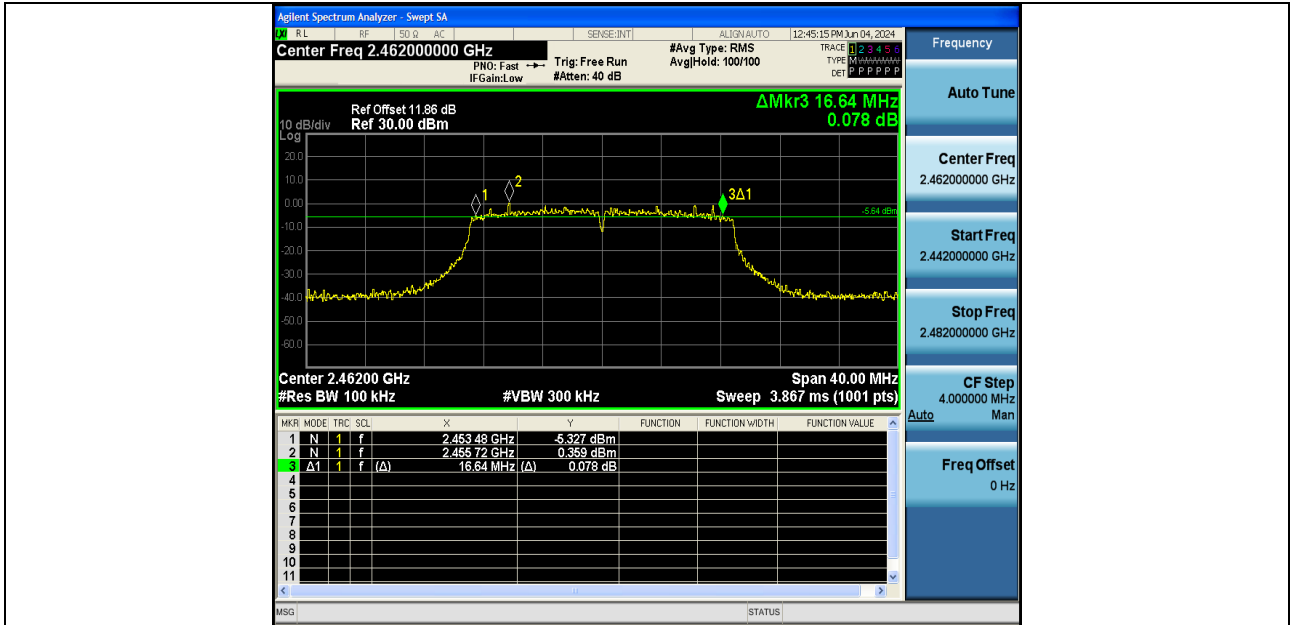


11AX20SISO-Ant1-2462-PASS

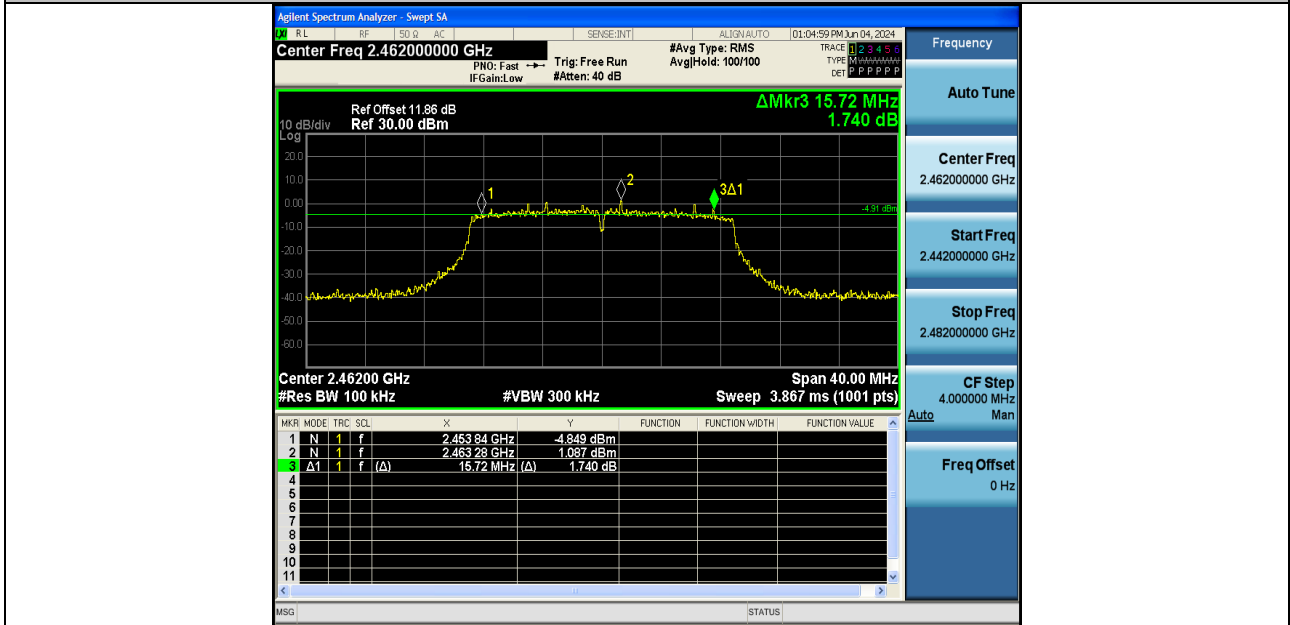


11AX20SISO-Ant2-2462-PASS

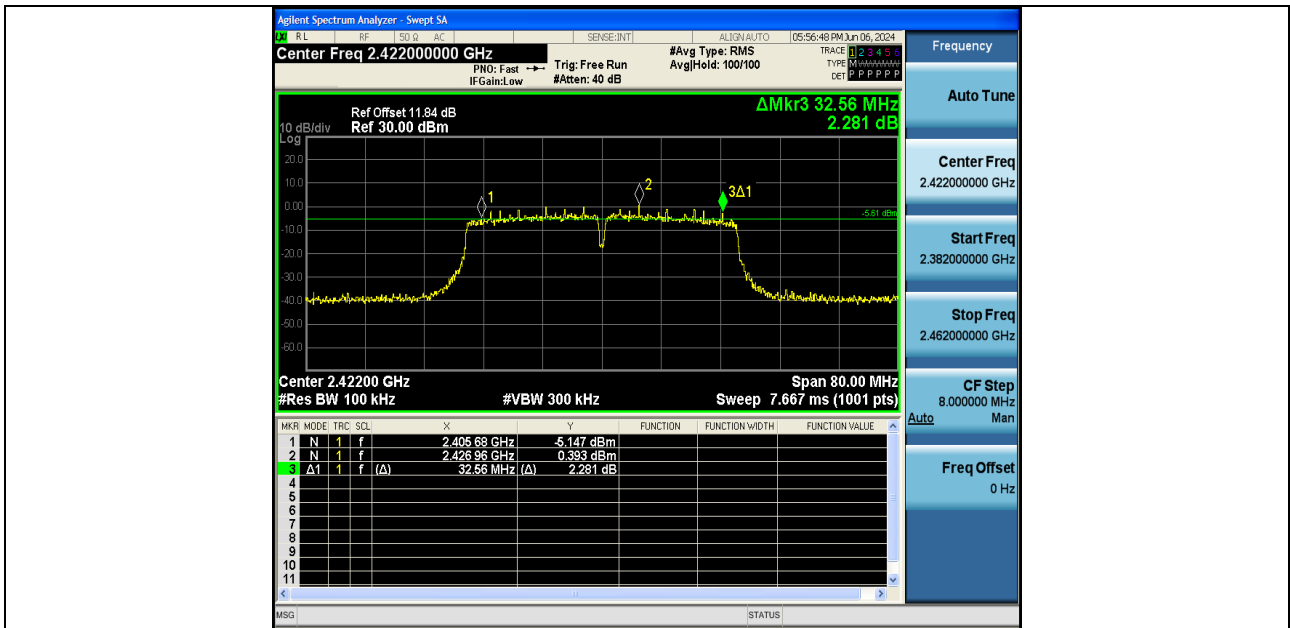


11AX40SISO-Ant1-2422-PASS

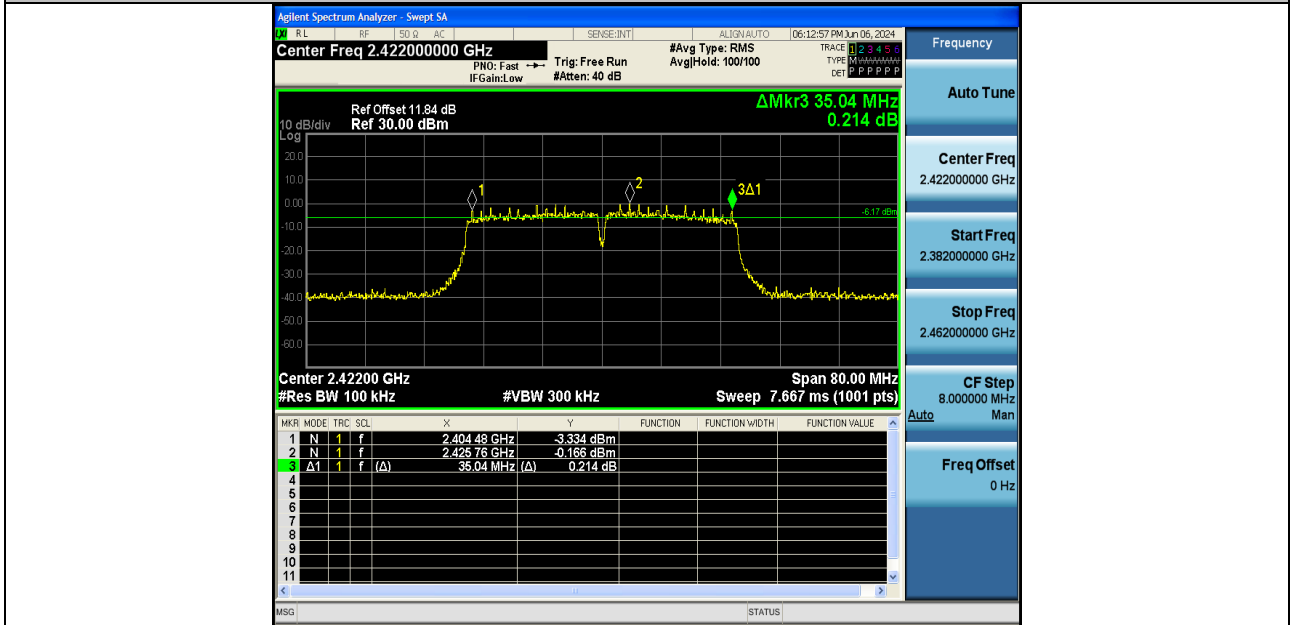


11AX40SISO-Ant2-2422-PASS

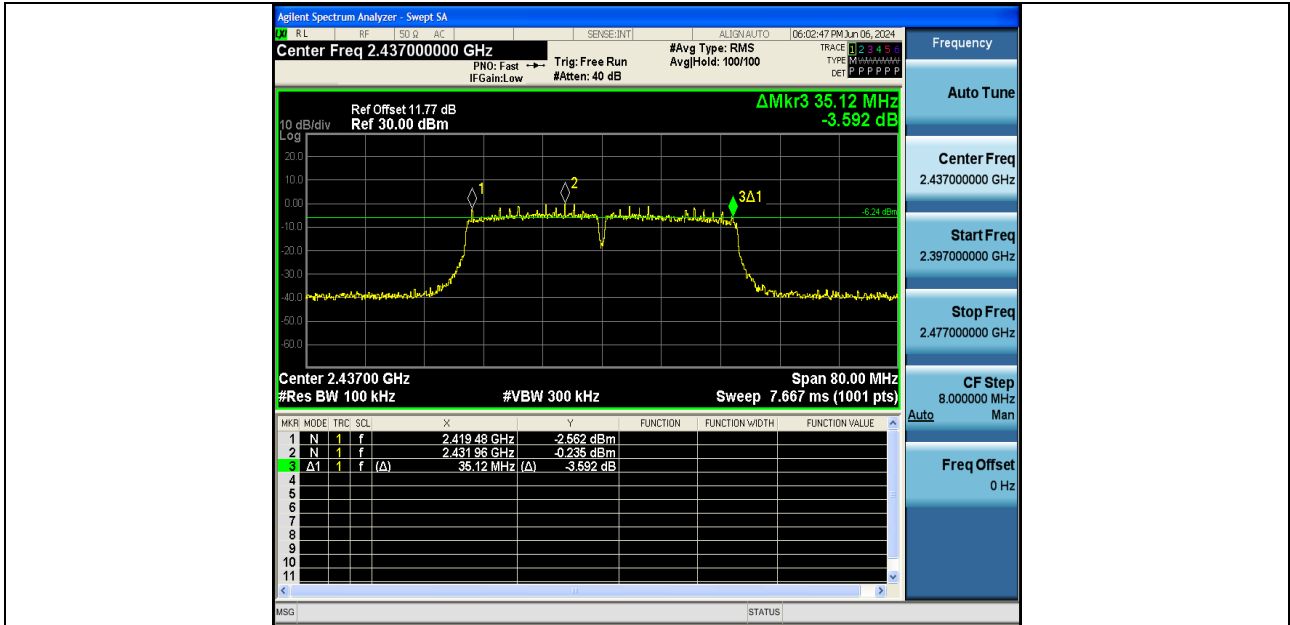


11AX40SISO-Ant1-2437-PASS

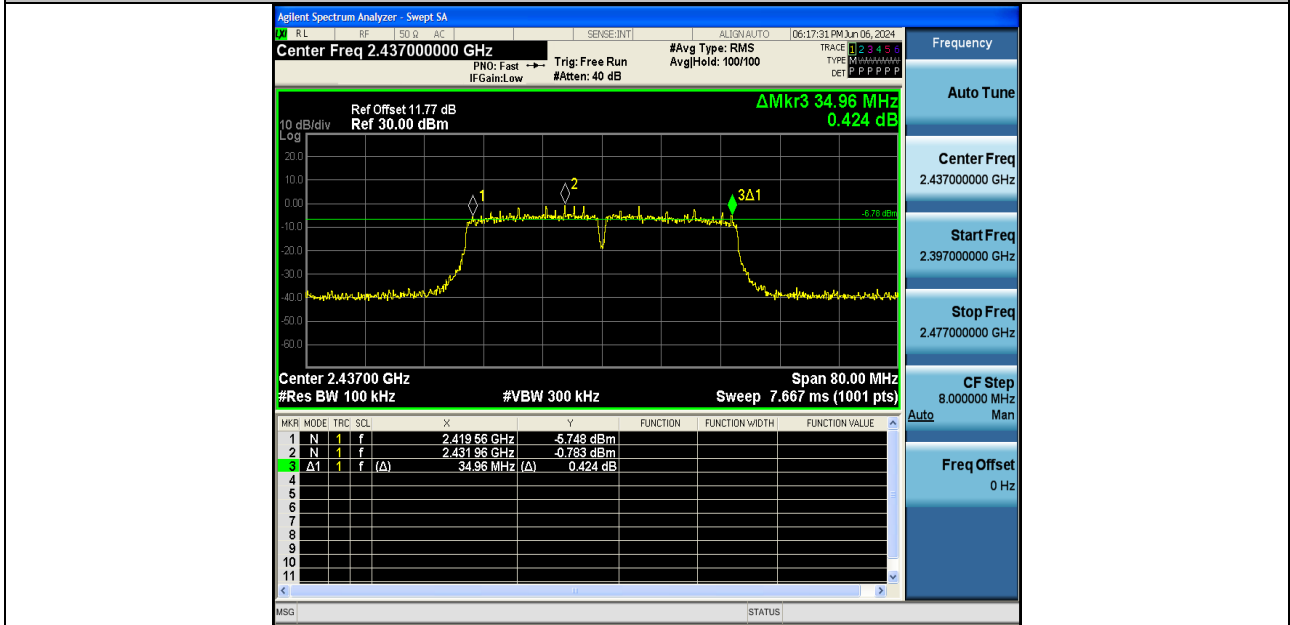

11AX40SISO-Ant2-2437-PASS

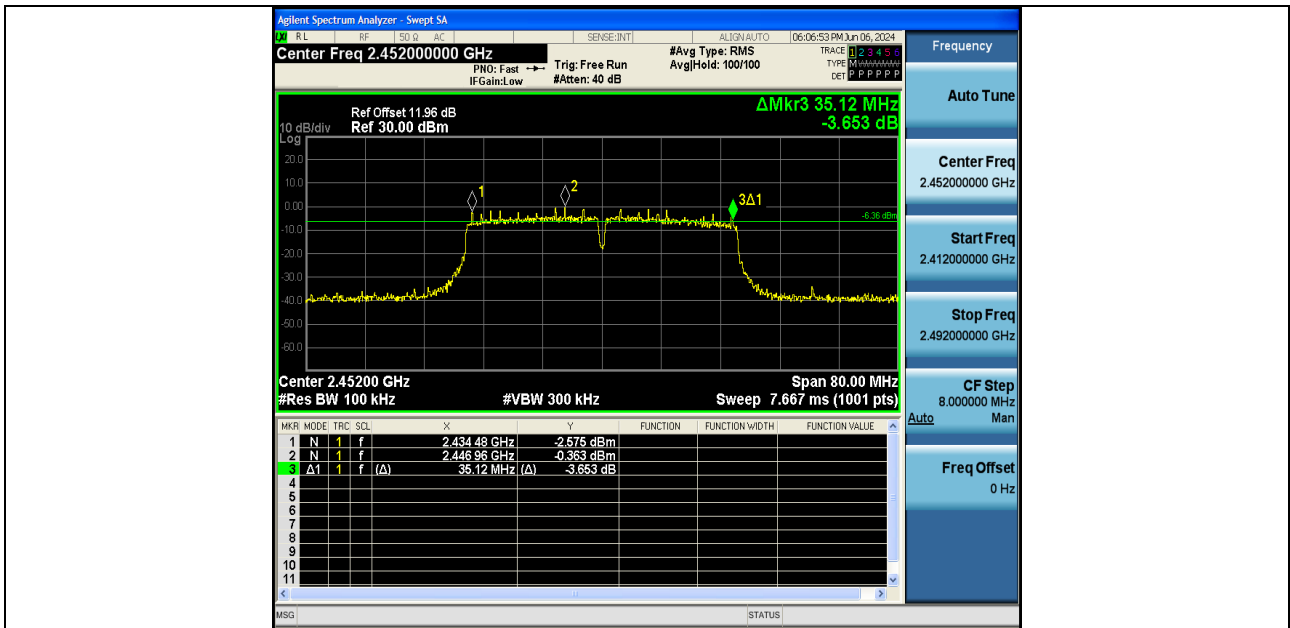

11AX40SISO-Ant1-2452-PASS

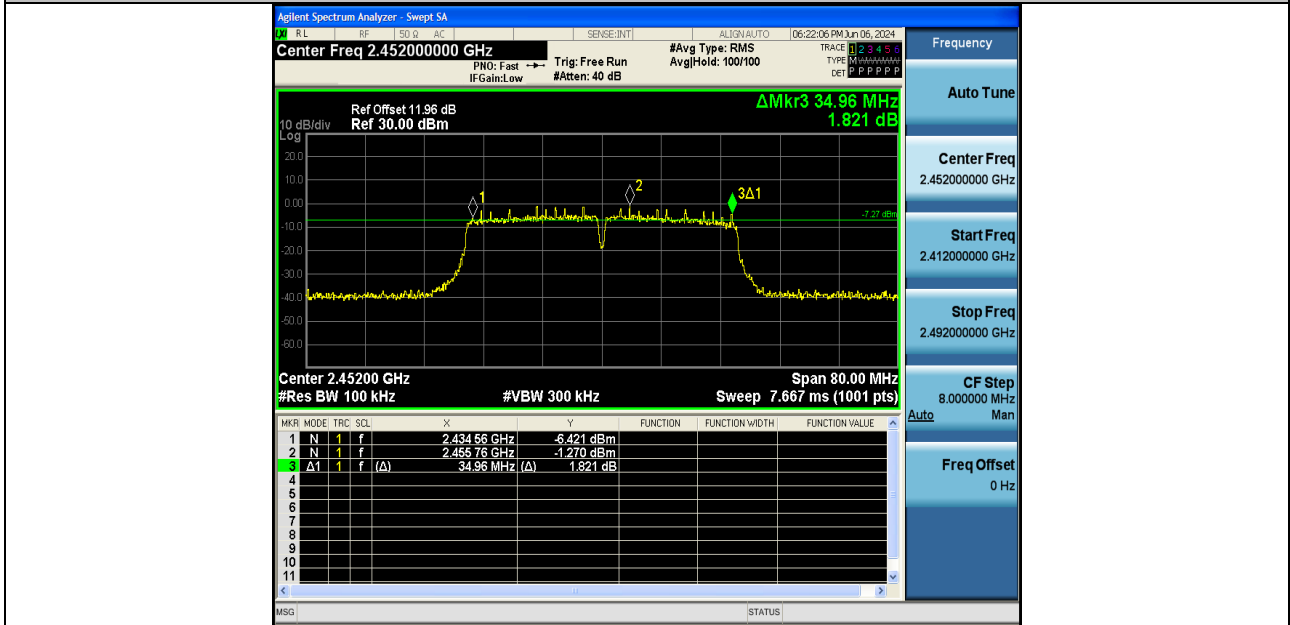

11AX40SISO-Ant2-2452-PASS






## 10 Maximum conducted output power

Test Requirement : FCC CFR47 Part 15 Section 15.247  
 Test Method : ANSI C63.10:2013  
 Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

### 10.1 Test Procedure

1. According to ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 10.2 Test Setup

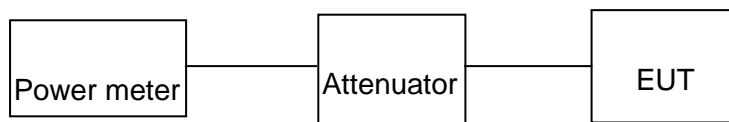

### 10.3 Test Result

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	---	<b>19.04</b>	≤30.00	PASS
11B	Ant1	2437	---	18.65	≤30.00	PASS
11B	Ant1	2462	---	18.71	≤30.00	PASS
11G	Ant1	2412	---	18.28	≤30.00	PASS
11G	Ant1	2437	---	17.8	≤30.00	PASS
11G	Ant1	2462	---	17.78	≤30.00	PASS
11N20SISO	Ant1	2412	---	17.96	≤30.00	PASS
11N20SISO	Ant1	2437	---	17.41	≤30.00	PASS
11N20SISO	Ant1	2462	---	17.39	≤30.00	PASS
11N40SISO	Ant1	2422	---	18.26	≤30.00	PASS
11N40SISO	Ant1	2437	---	18.1	≤30.00	PASS
11N40SISO	Ant1	2452	---	18.4	≤30.00	PASS
11B	Ant2	2412	---	<b>19.32</b>	≤30.00	PASS
11B	Ant2	2437	---	18.71	≤30.00	PASS
11B	Ant2	2462	---	18.81	≤30.00	PASS
11G	Ant2	2412	---	18.59	≤30.00	PASS
11G	Ant2	2437	---	17.89	≤30.00	PASS
11G	Ant2	2462	---	18.07	≤30.00	PASS



11N20SISO	Ant2	2412	---	18.19	≤30.00	PASS
11N20SISO	Ant2	2437	---	17.53	≤30.00	PASS
11N20SISO	Ant2	2462	---	17.77	≤30.00	PASS
11N40SISO	Ant2	2422	---	18.41	≤30.00	PASS
11N40SISO	Ant2	2437	---	18.09	≤30.00	PASS
11N40SISO	Ant2	2452	---	18.08	≤30.00	PASS

TestMode	Antenna	Frequency[MHz]	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11AX20SISO	Ant1	2412	---	19.44	≤30.00	PASS
11AX20SISO	Ant2	2412	---	19.44	≤30.00	PASS
11AX20SISO	Ant1	2437	---	19.25	≤30.00	PASS
11AX20SISO	Ant2	2437	---	19.25	≤30.00	PASS
11AX20SISO	Ant1	2462	---	18.76	≤30.00	PASS
11AX20SISO	Ant2	2462	---	18.67	≤30.00	PASS
11AX40SISO	Ant1	2422	---	20.68	≤30.00	PASS
11AX40SISO	Ant2	2422	---	20.50	≤30.00	PASS
11AX40SISO	Ant1	2437	---	20.21	≤30.00	PASS
11AX40SISO	Ant2	2437	---	19.66	≤30.00	PASS
11AX40SISO	Ant1	2452	---	20.17	≤30.00	PASS
11AX40SISO	Ant2	2452	---	19.09	≤30.00	PASS




## 11 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 11.1 Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span = 1.5 times the DTS bandwidth  
RBW = 3KHz, VBW = 10KHz  
Sweep time = auto couple  
Detector = peak  
Trace mode =max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW(no less than 3KHz) and repeat.

### 11.2 Test Setup

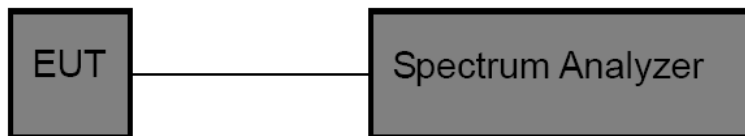

### 11.3 Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-6.88	≤8.00	PASS
11B	Ant2	2412	-5.84	≤8.00	PASS
11B	Ant1	2437	-6.63	≤8.00	PASS
11B	Ant2	2437	-7.51	≤8.00	PASS
11B	Ant1	2462	-7.29	≤8.00	PASS
11B	Ant2	2462	-6.94	≤8.00	PASS
11G	Ant1	2412	-13.96	≤8.00	PASS
11G	Ant2	2412	-12.81	≤8.00	PASS
11G	Ant1	2437	-14.18	≤8.00	PASS
11G	Ant2	2437	-12.78	≤8.00	PASS
11G	Ant1	2462	-13.3	≤8.00	PASS
11G	Ant2	2462	-14.06	≤8.00	PASS
11N20SISO	Ant1	2412	-12.68	≤8.00	PASS
11N20SISO	Ant2	2412	-12.32	≤8.00	PASS
11N20SISO	Ant1	2437	-14.34	≤8.00	PASS
11N20SISO	Ant2	2437	-12.29	≤8.00	PASS




Report No.: PTC24022712801E-FC03


11N20SISO	Ant1	2462	-13.31	≤8.00	PASS
11N20SISO	Ant2	2462	-13.6	≤8.00	PASS
11N40SISO	Ant1	2422	-16.48	≤8.00	PASS
11N40SISO	Ant2	2422	-16.4	≤8.00	PASS
11N40SISO	Ant1	2437	-17.13	≤8.00	PASS
11N40SISO	Ant2	2437	-16.71	≤8.00	PASS
11N40SISO	Ant1	2452	-15.85	≤8.00	PASS
11N40SISO	Ant2	2452	-16.24	≤8.00	PASS
11AX20SISO	Ant1	2412	-12.47	≤8.00	PASS
11AX20SISO	Ant2	2412	-12.47	≤8.00	PASS
11AX20SISO	Ant1	2437	-12.46	≤8.00	PASS
11AX20SISO	Ant2	2437	-12.93	≤8.00	PASS
11AX20SISO	Ant1	2462	-13.49	≤8.00	PASS
11AX20SISO	Ant2	2462	-13.42	≤8.00	PASS
11AX40SISO	Ant1	2422	-13.11	≤8.00	PASS
11AX40SISO	Ant2	2422	-13.39	≤8.00	PASS
11AX40SISO	Ant1	2437	-14.15	≤8.00	PASS
11AX40SISO	Ant2	2437	-14.73	≤8.00	PASS
11AX40SISO	Ant1	2452	-13.99	≤8.00	PASS
11AX40SISO	Ant2	2452	-14.86	≤8.00	PASS




Test Graphs:

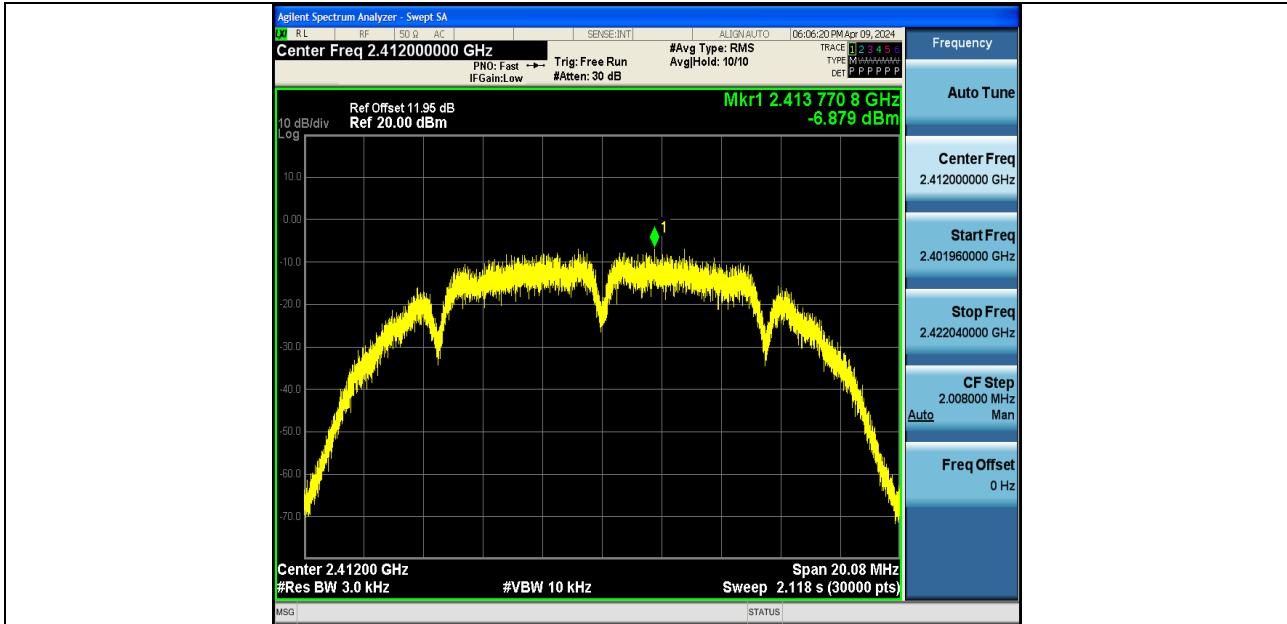


11B-Ant1-2412-PASS

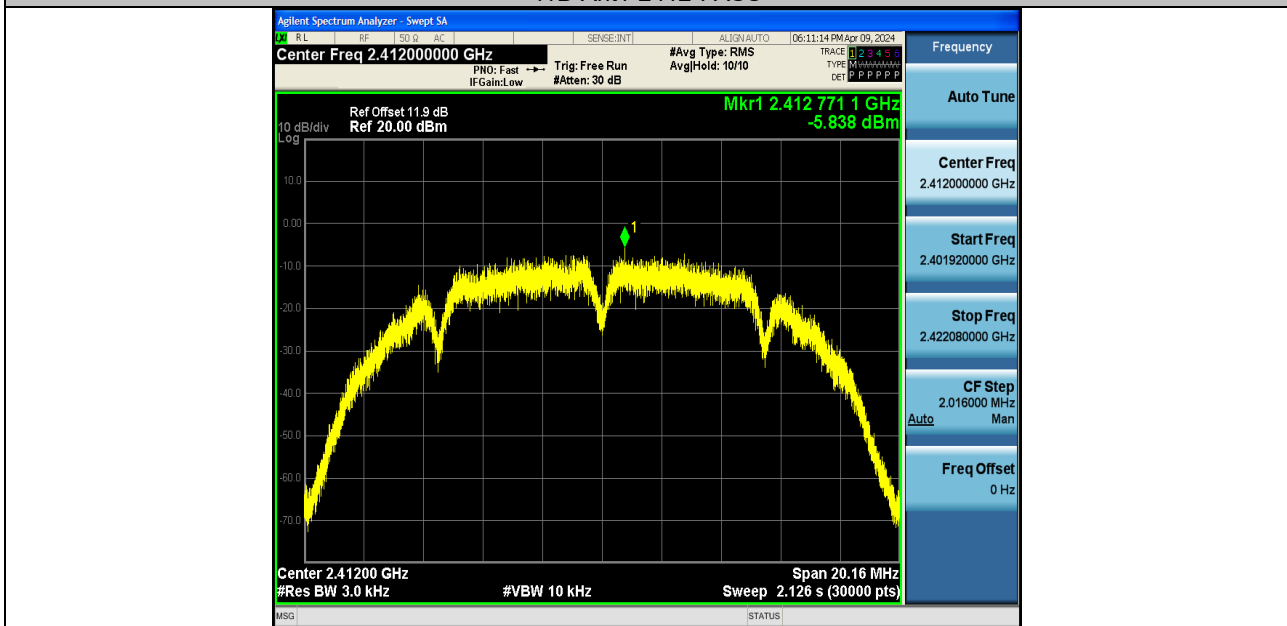


11B-Ant2-2412-PASS

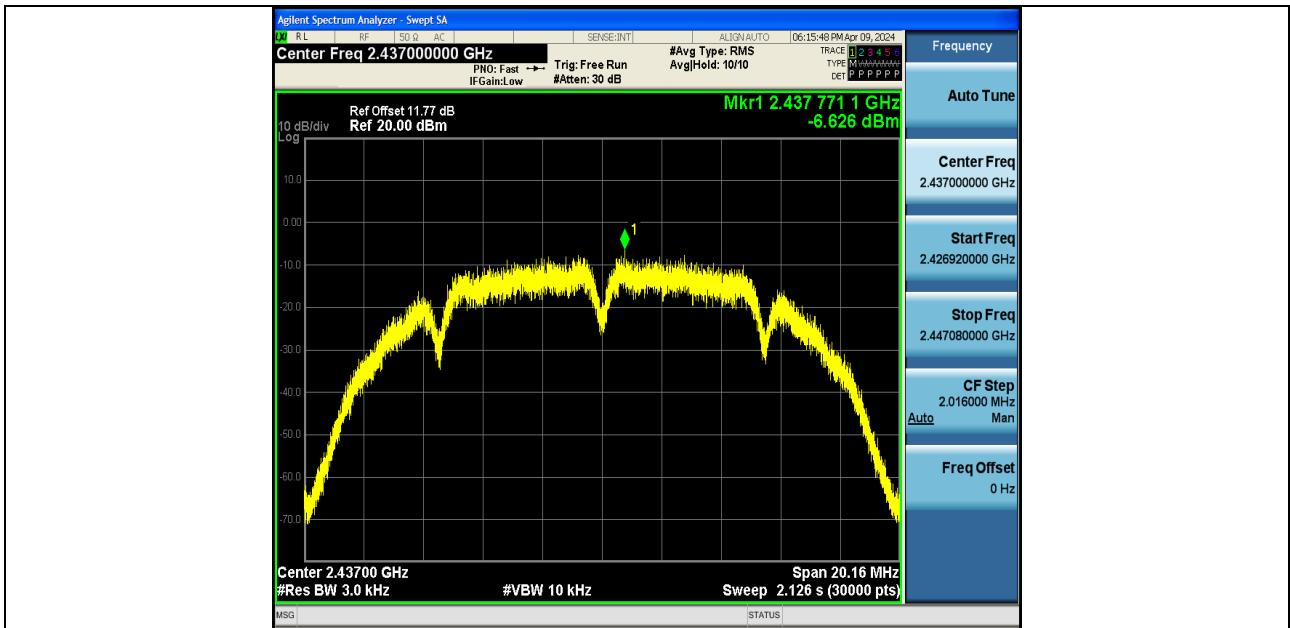


11B-Ant1-2437-PASS

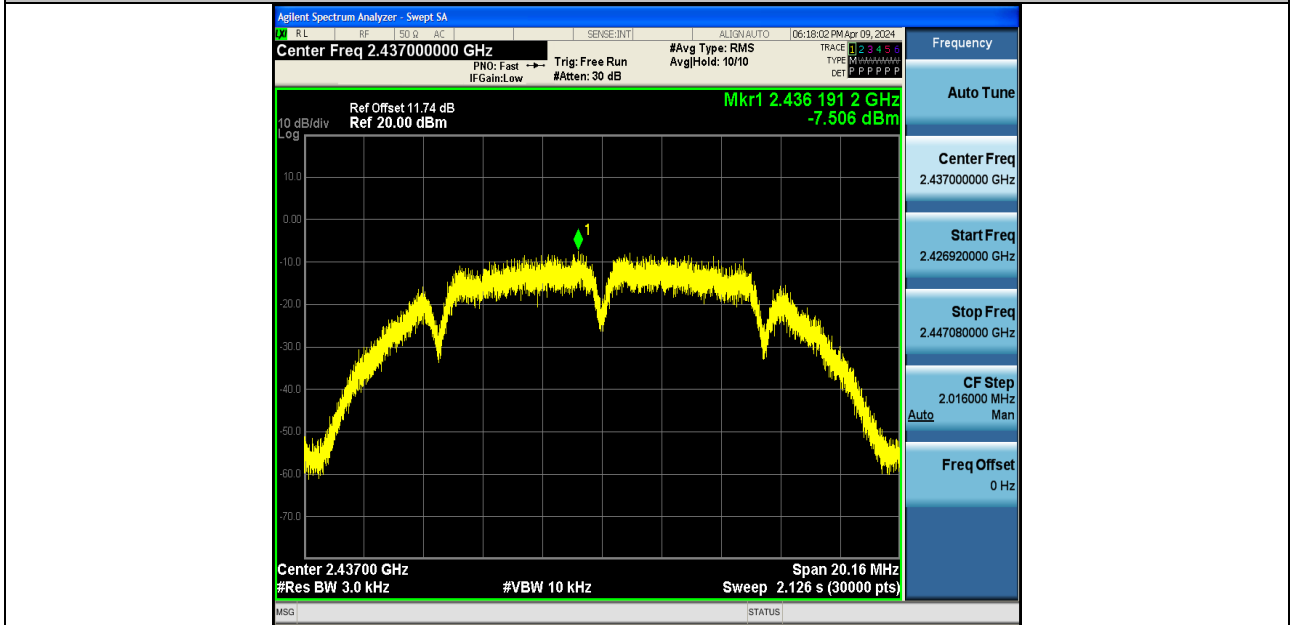


11B-Ant2-2437-PASS

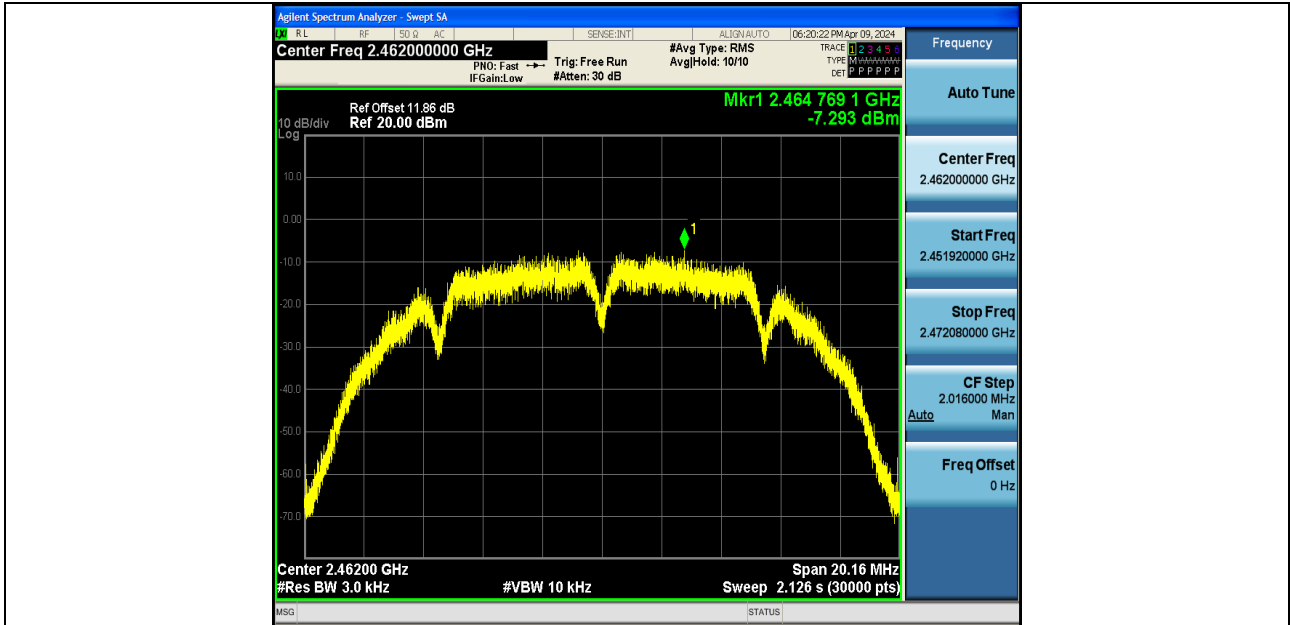


11B-Ant1-2462-PASS

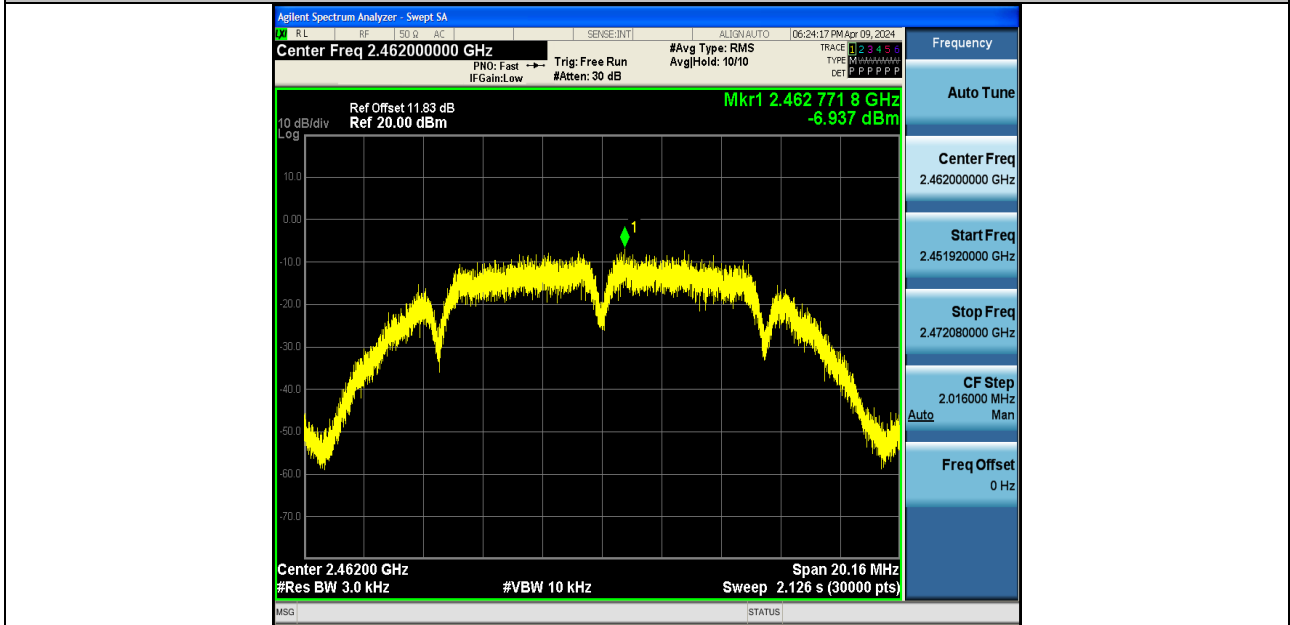

11B-Ant2-2462-PASS

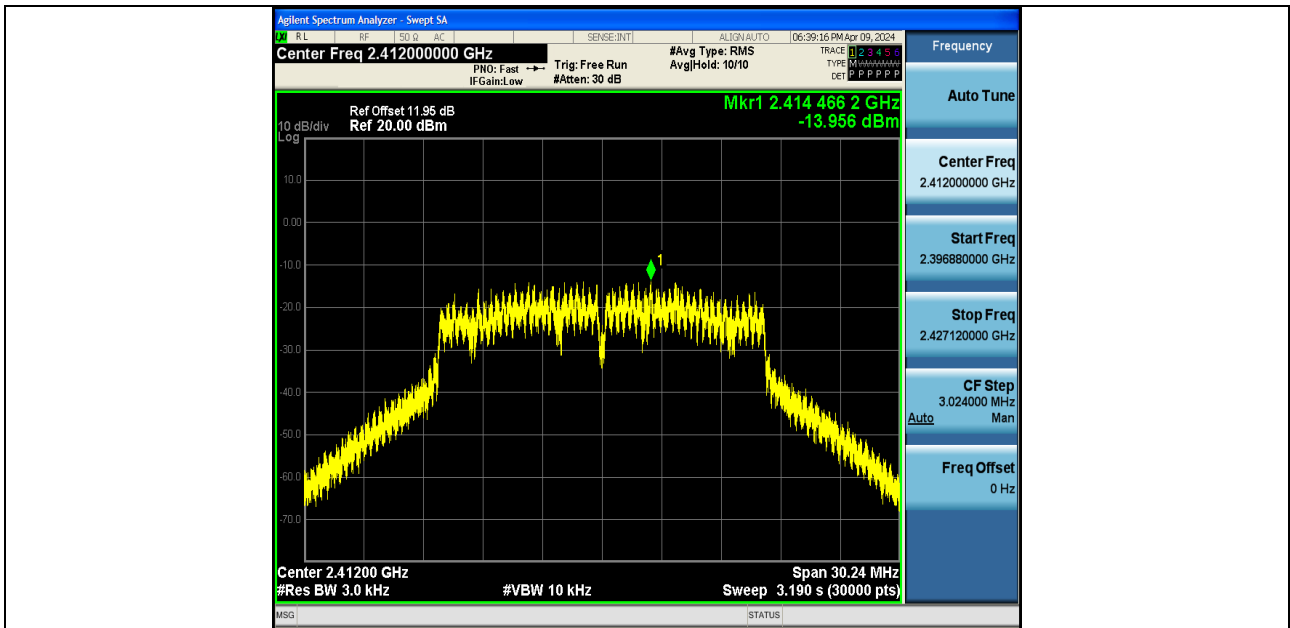


11G-Ant1-2412-PASS

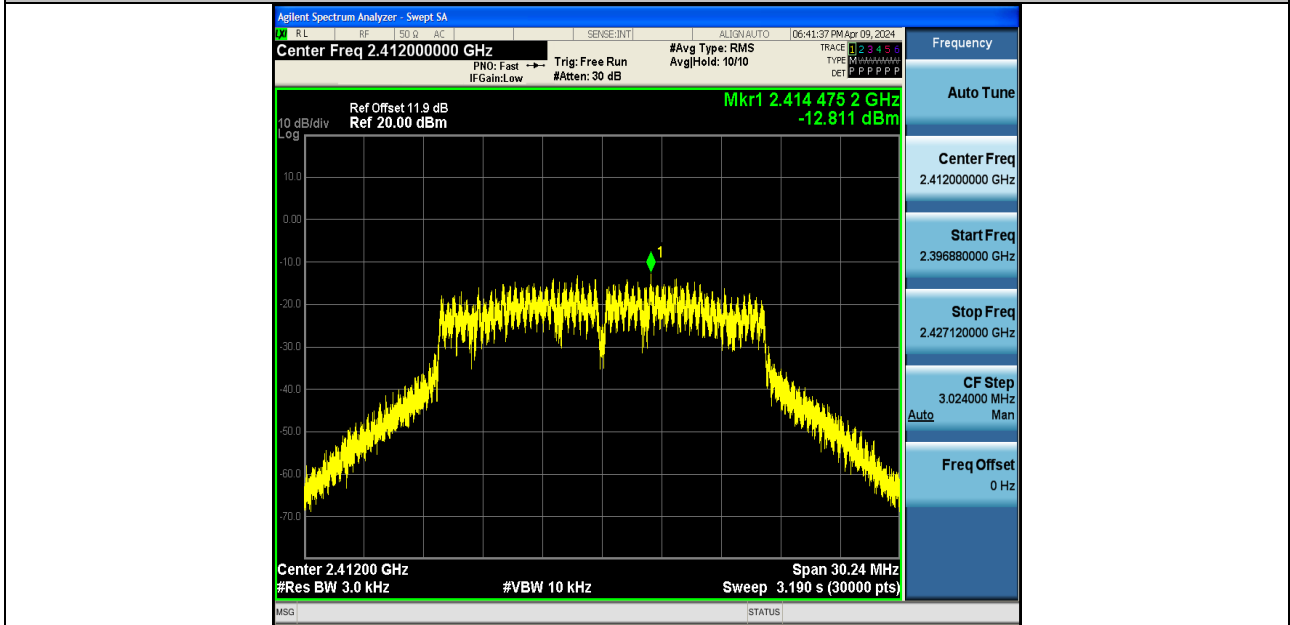


11G-Ant2-2412-PASS




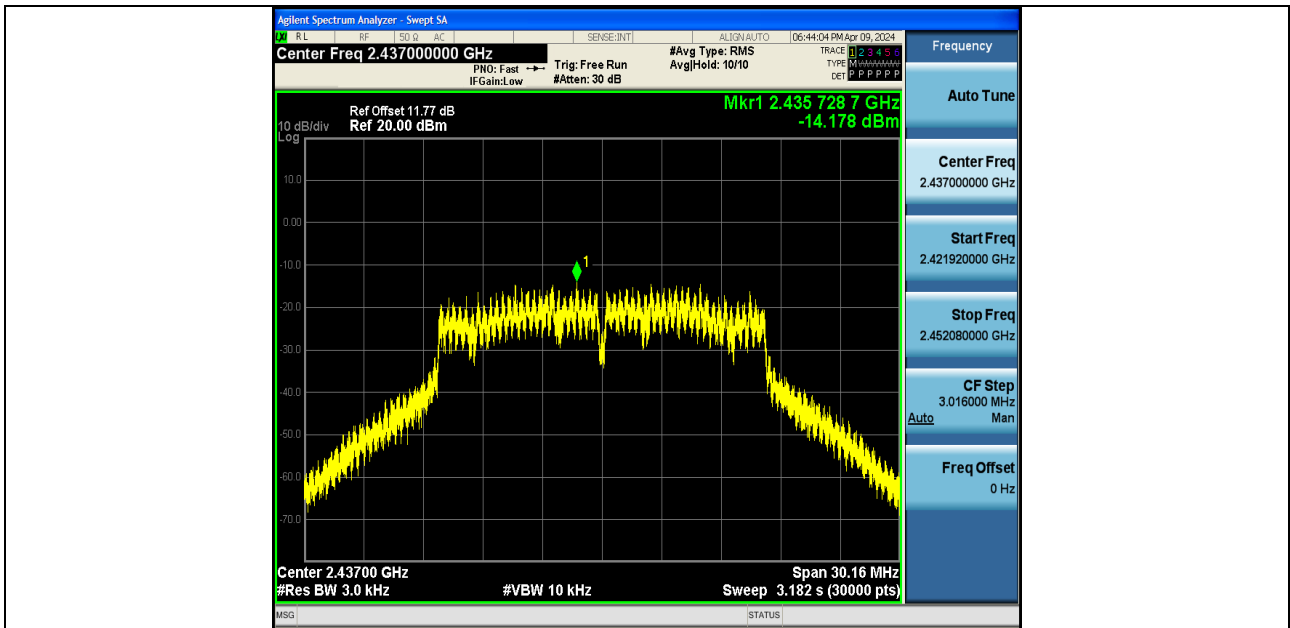


11G-Ant1-2437-PASS

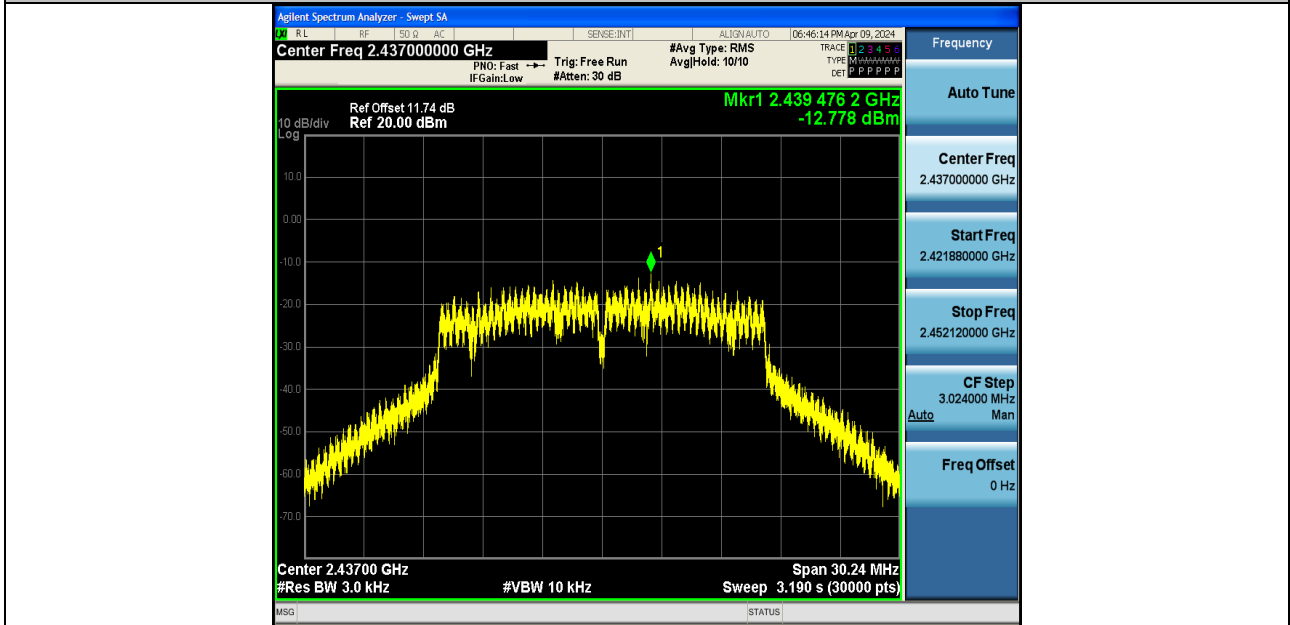


11G-Ant2-2437-PASS

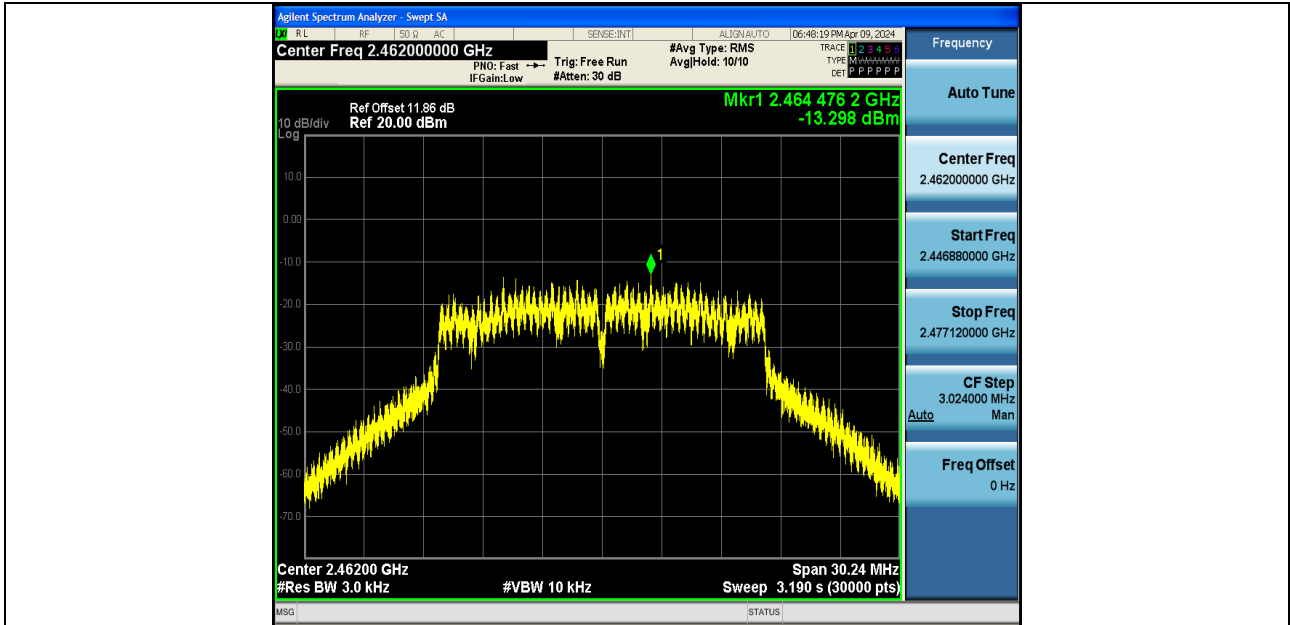


11G-Ant1-2462-PASS

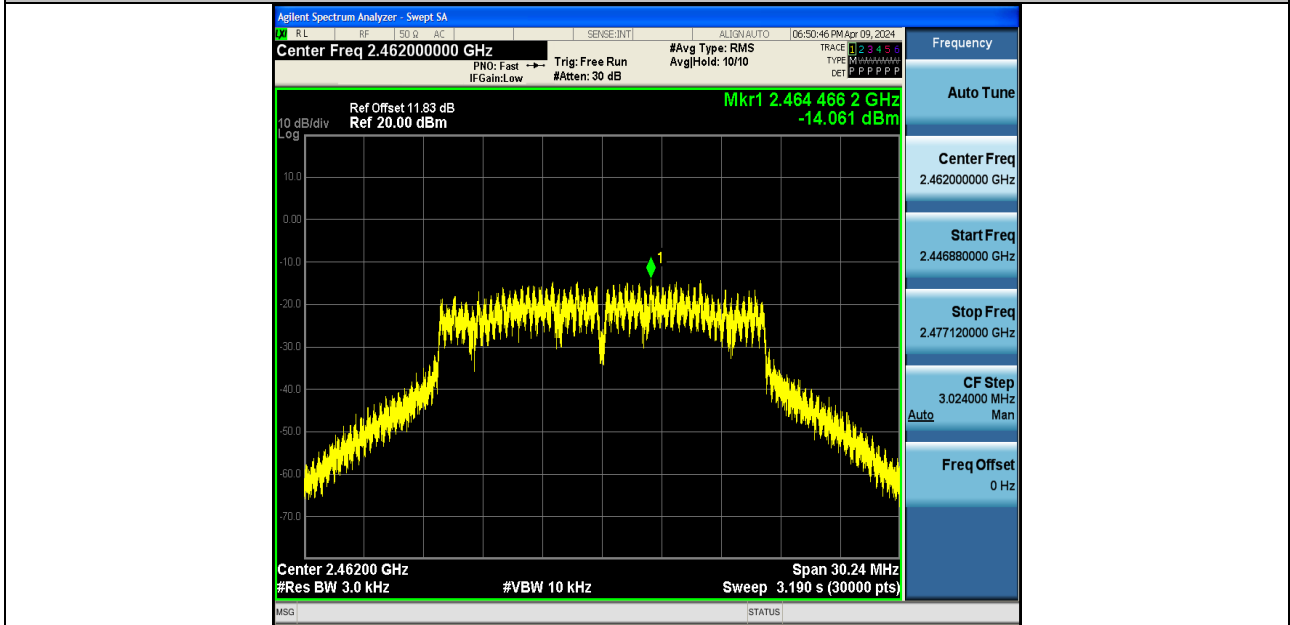


11G-Ant2-2462-PASS

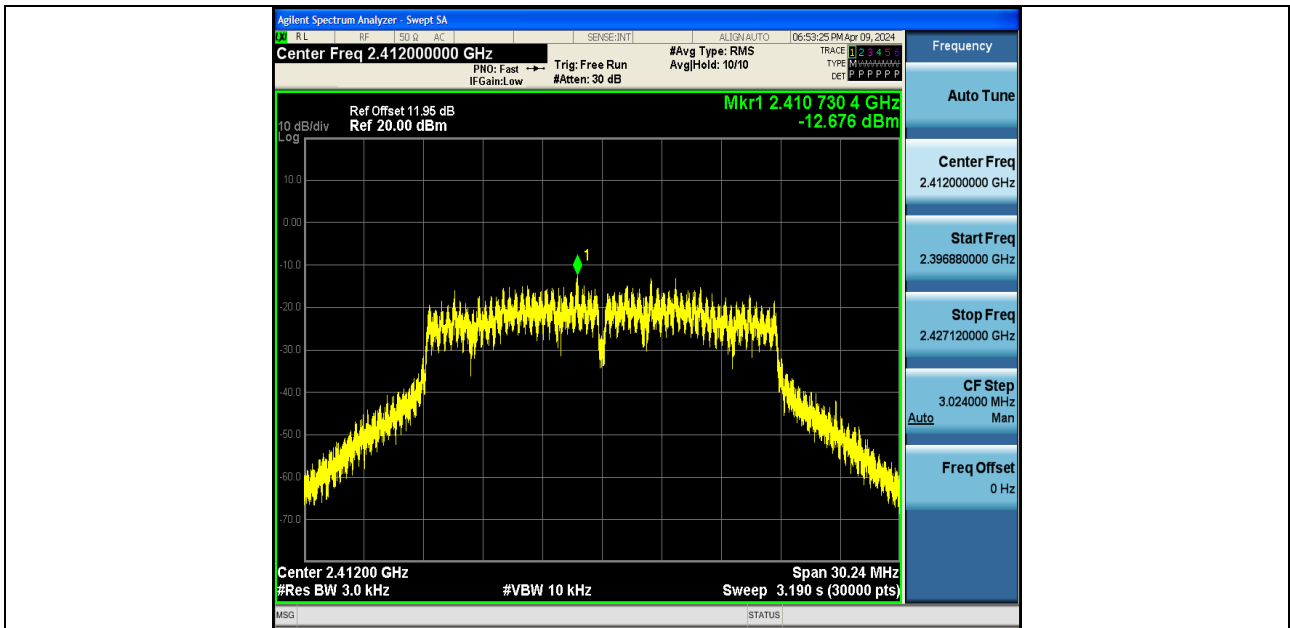


11N20SISO-Ant1-2412-PASS

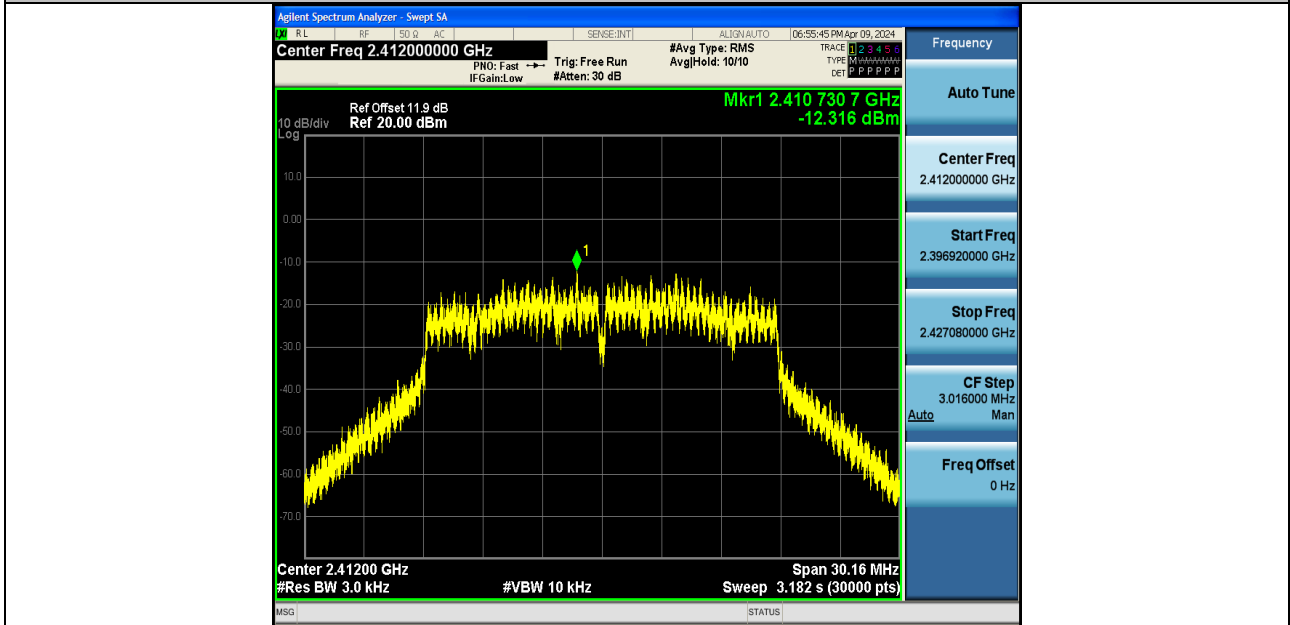


11N20SISO-Ant2-2412-PASS

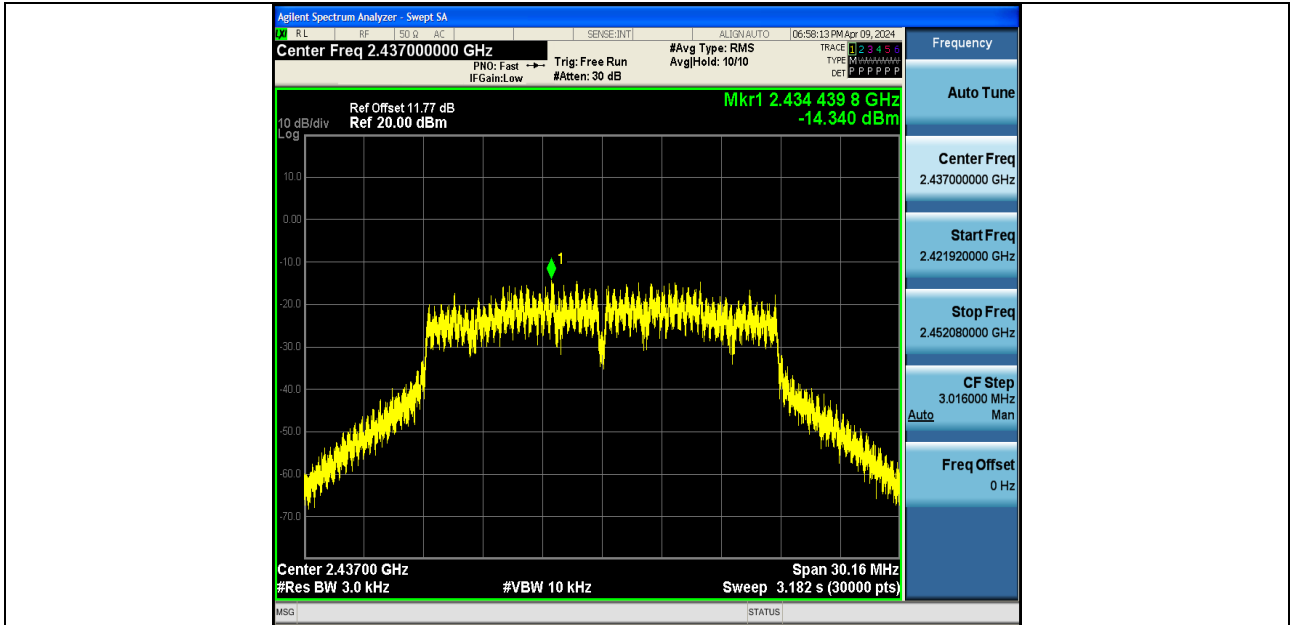


11N20SISO-Ant1-2437-PASS

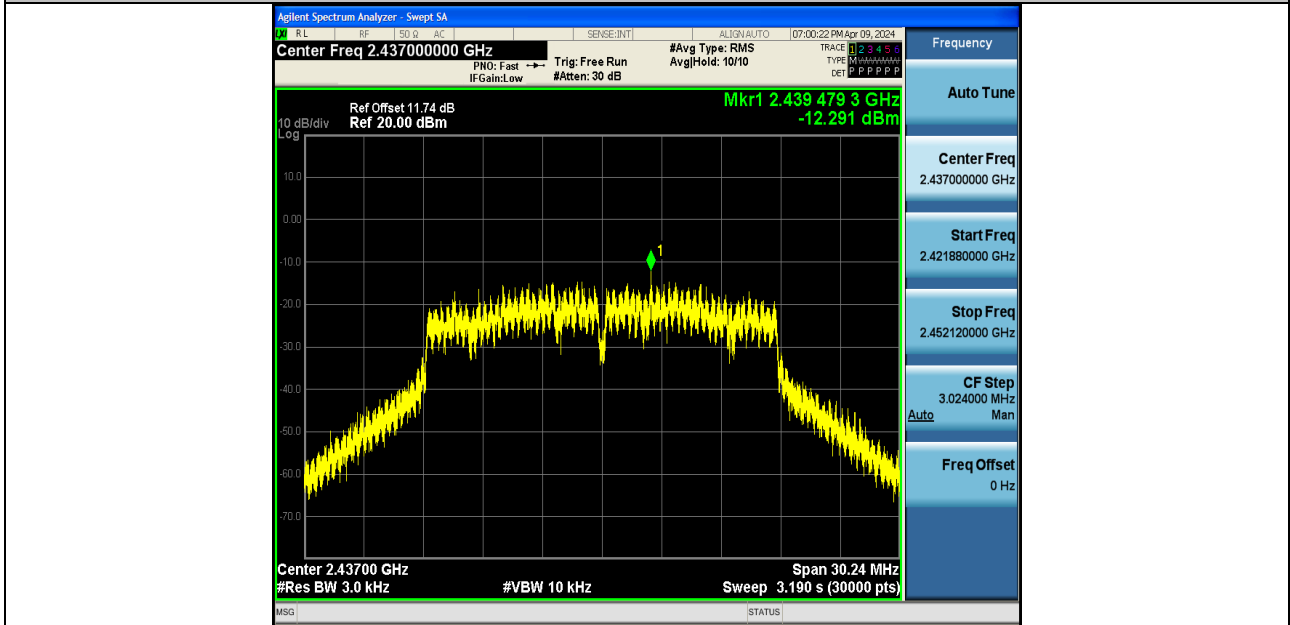


11N20SISO-Ant2-2437-PASS

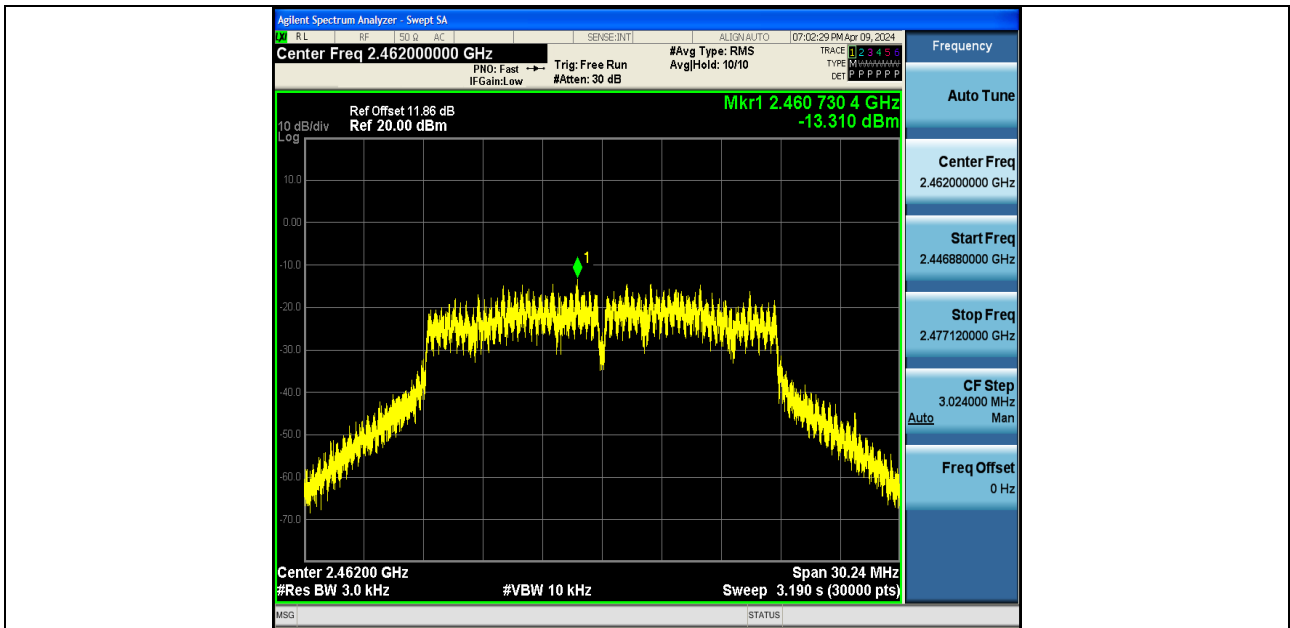


11N20SISO-Ant1-2462-PASS

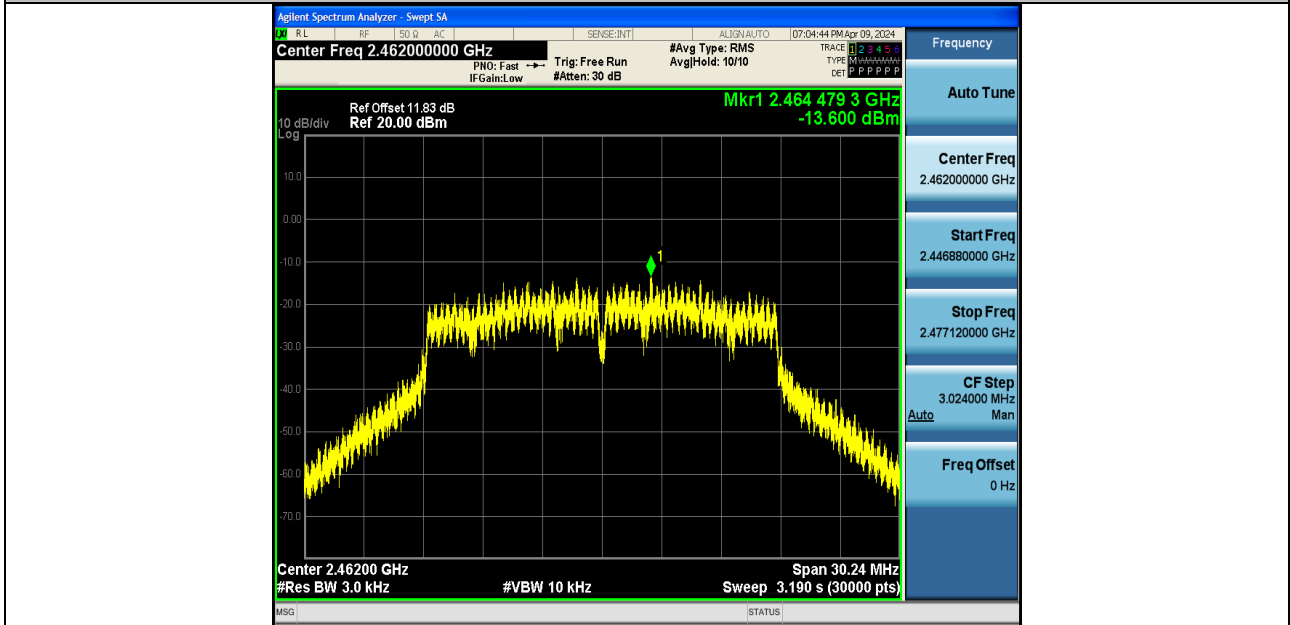


11N20SISO-Ant2-2462-PASS

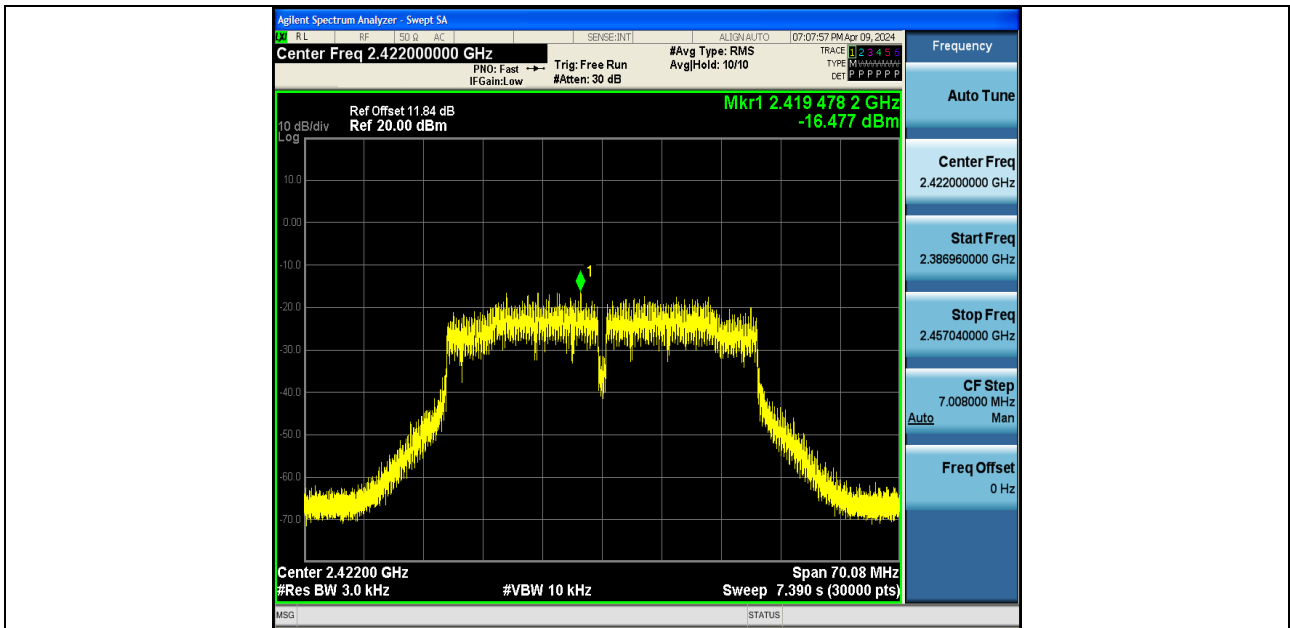


11N40SISO-Ant1-2422-PASS

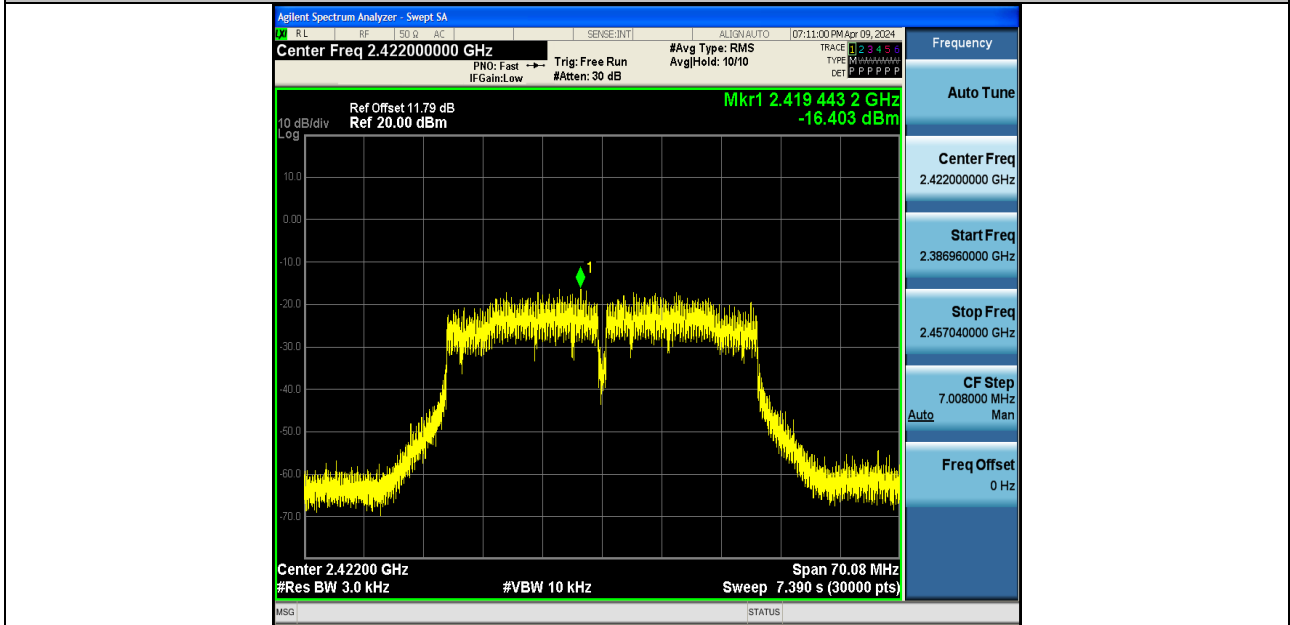


11N40SISO-Ant2-2422-PASS

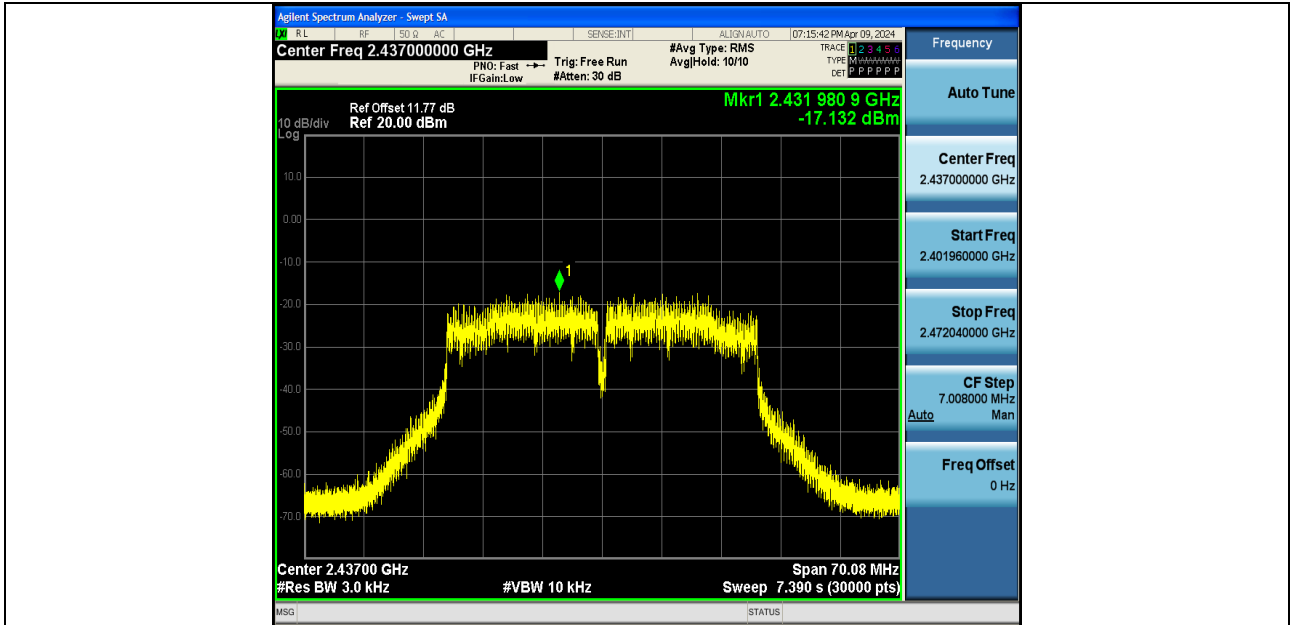


11N40SISO-Ant1-2437-PASS

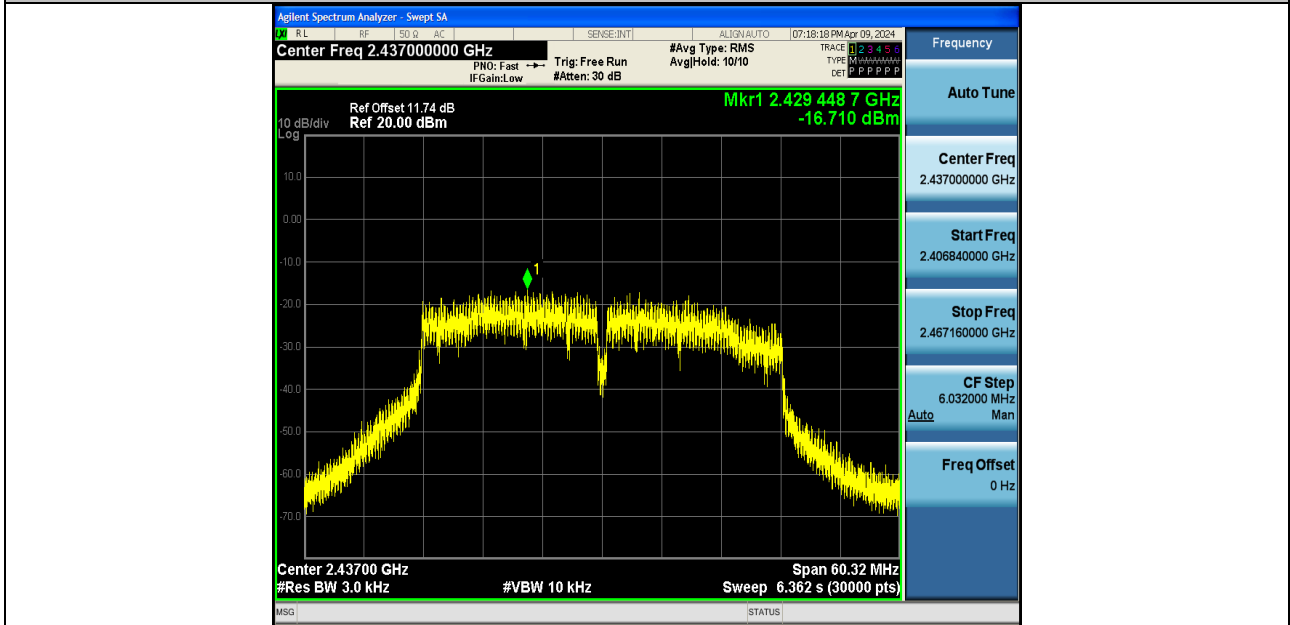

11N40SISO-Ant2-2437-PASS

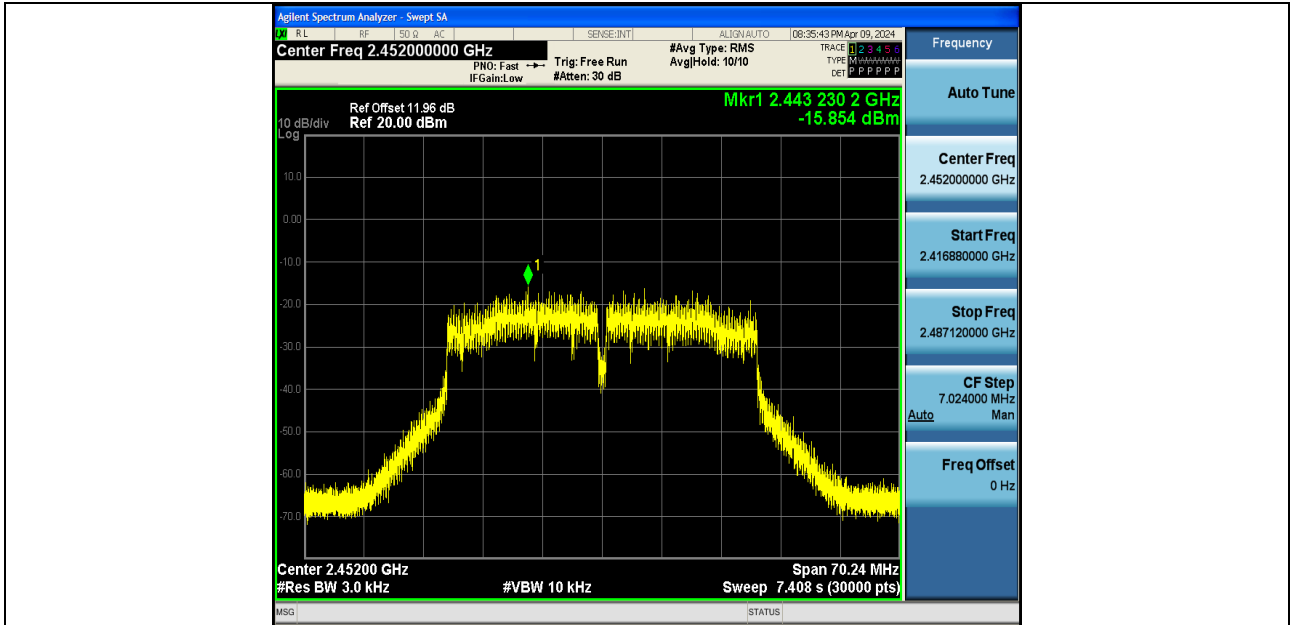


11N40SISO-Ant1-2452-PASS

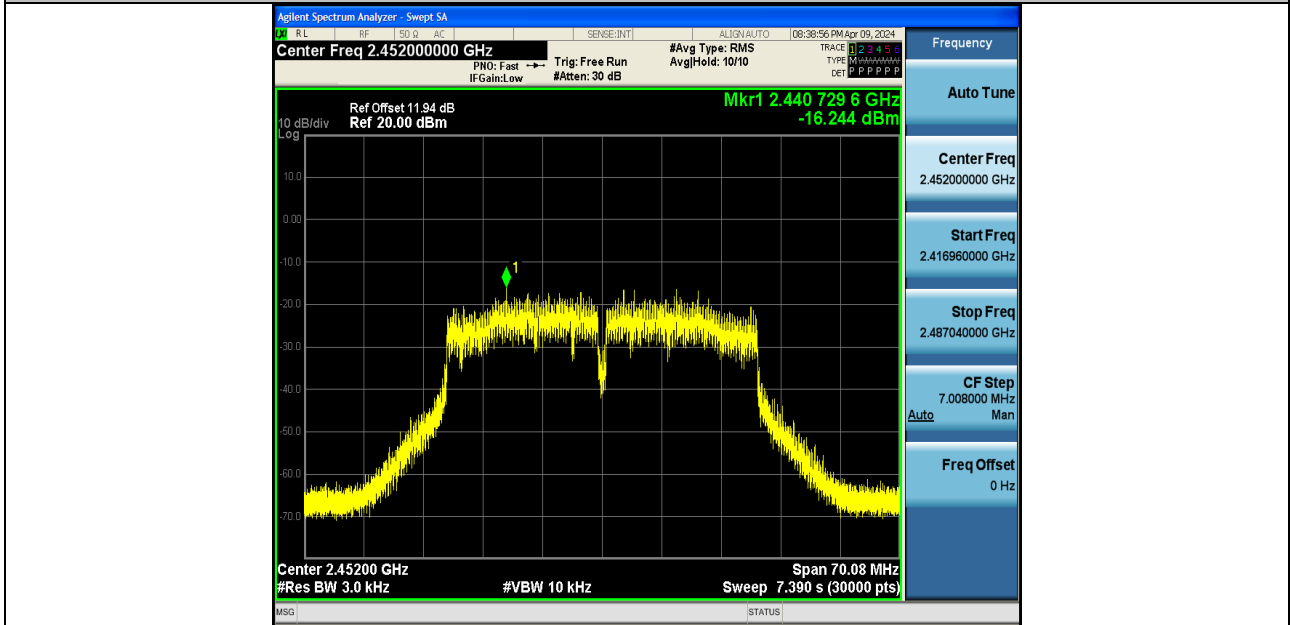


11N40SISO-Ant2-2452-PASS




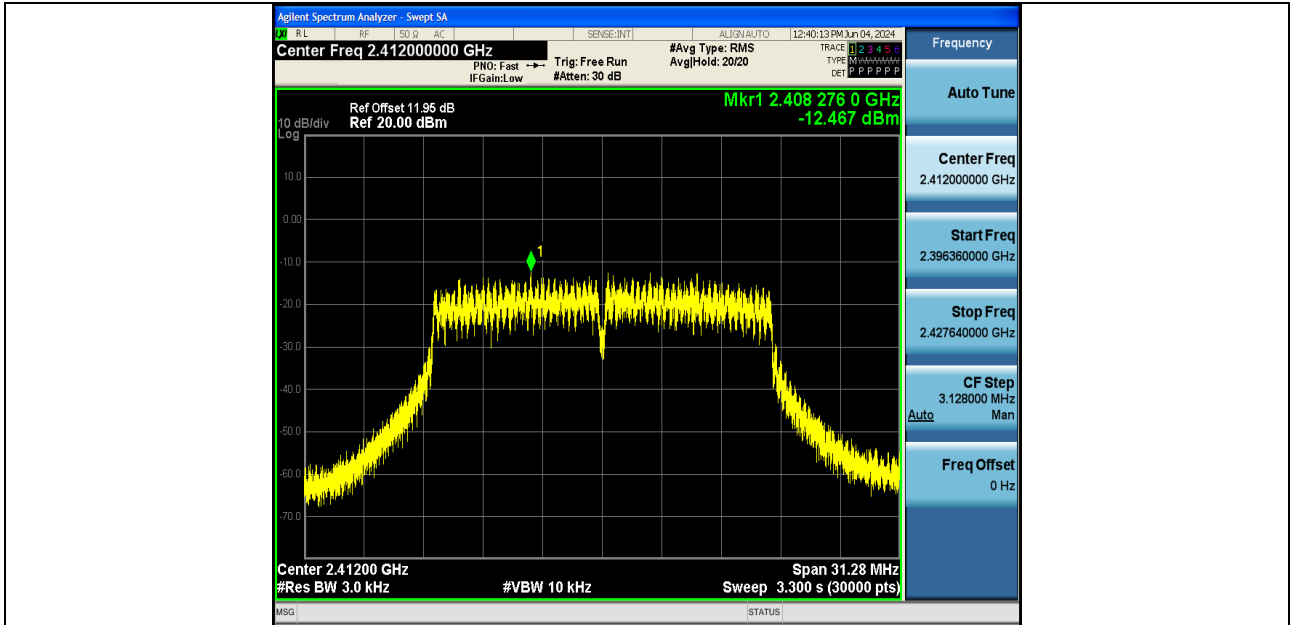


11AX20SISO-Ant1-2412-PASS

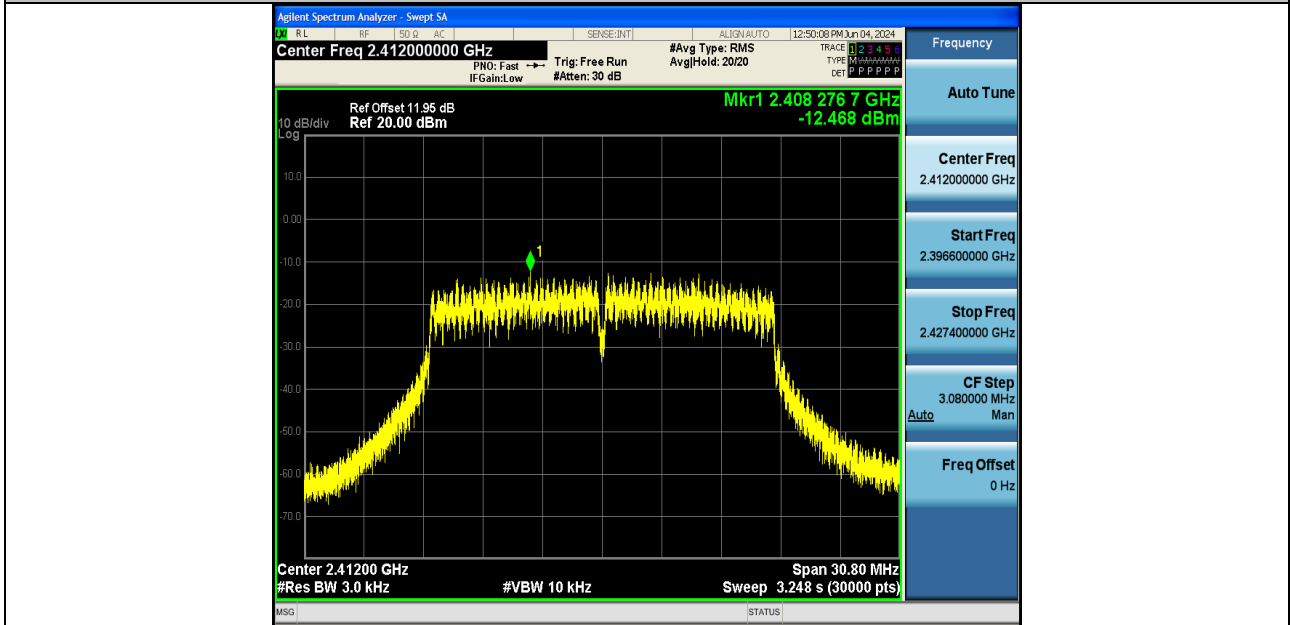


11AX20SISO-Ant2-2412-PASS

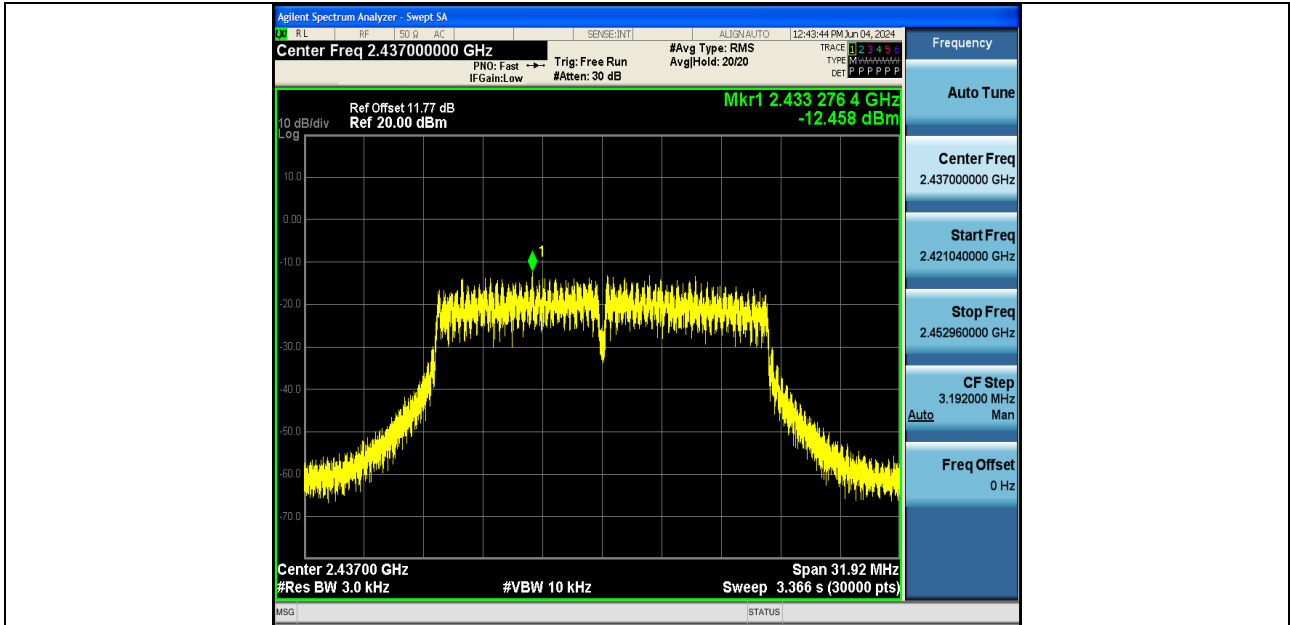


11AX20SISO-Ant1-2437-PASS

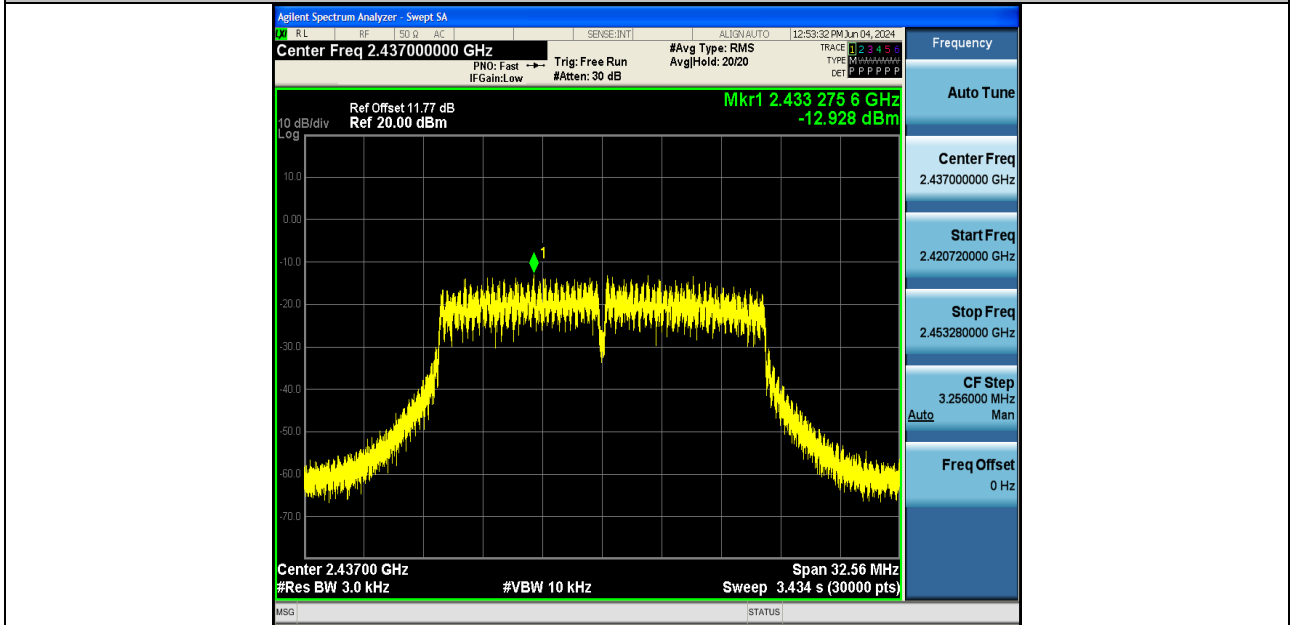


11AX20SISO-Ant2-2437-PASS

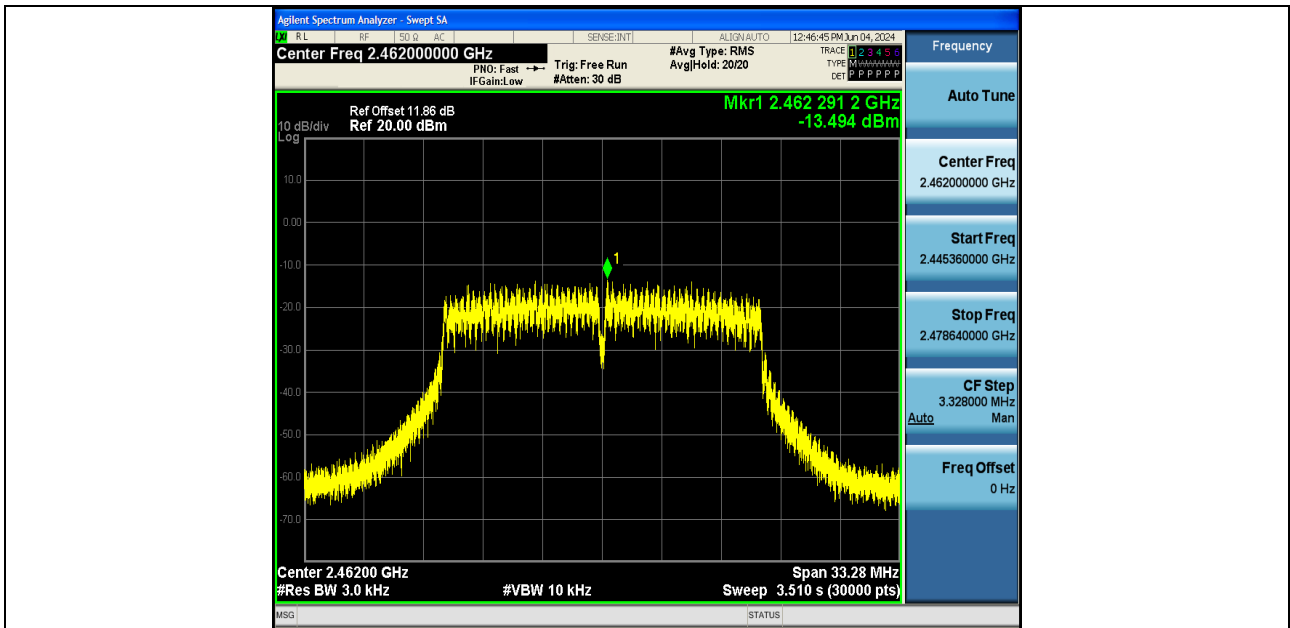


11AX20SISO-Ant1-2462-PASS

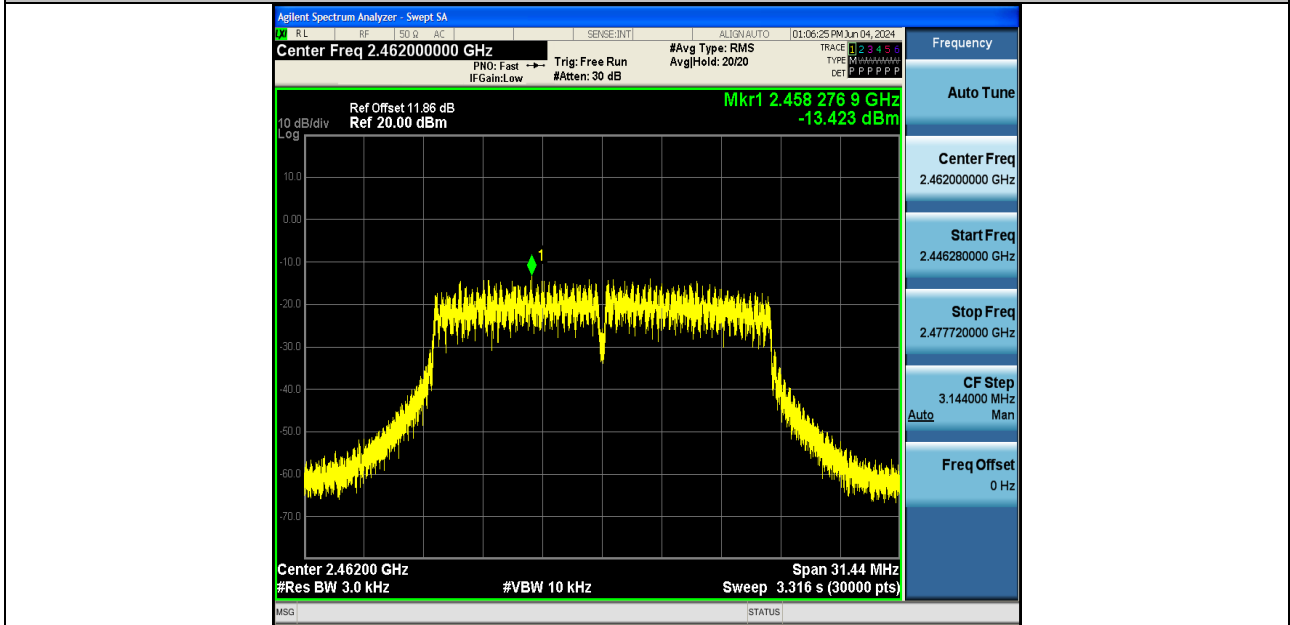


11AX20SISO-Ant2-2462-PASS

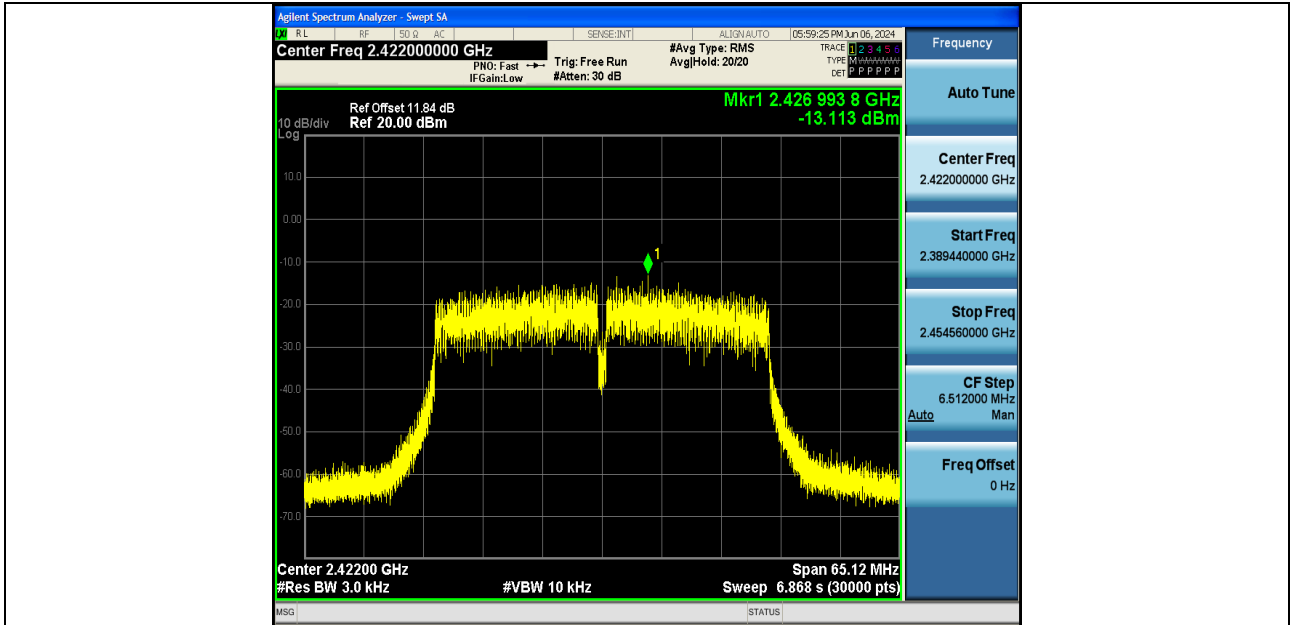


11AX40SISO-Ant1-2422-PASS

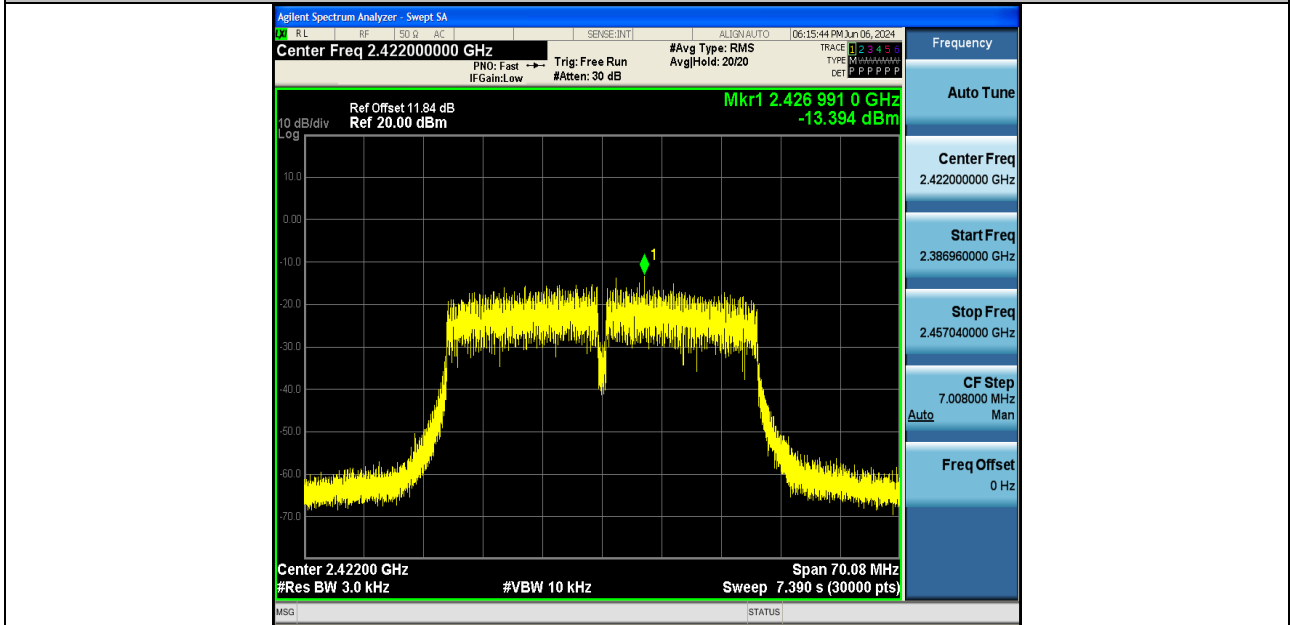


11AX40SISO-Ant2-2422-PASS

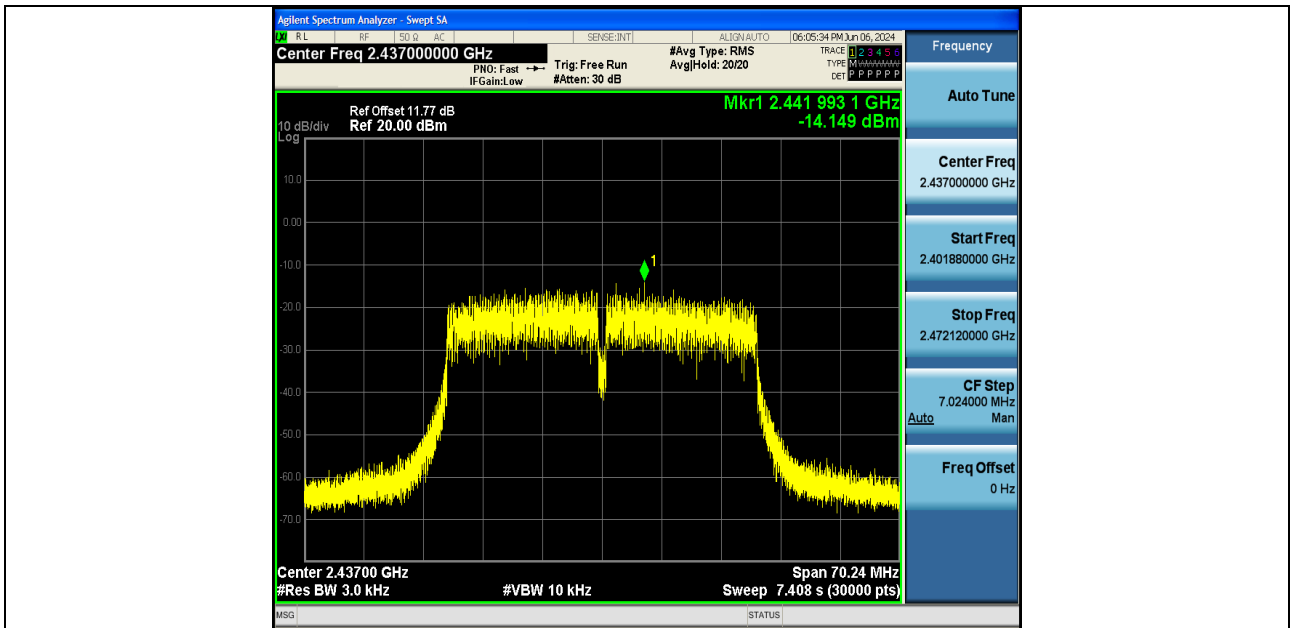


11AX40SISO-Ant1-2437-PASS

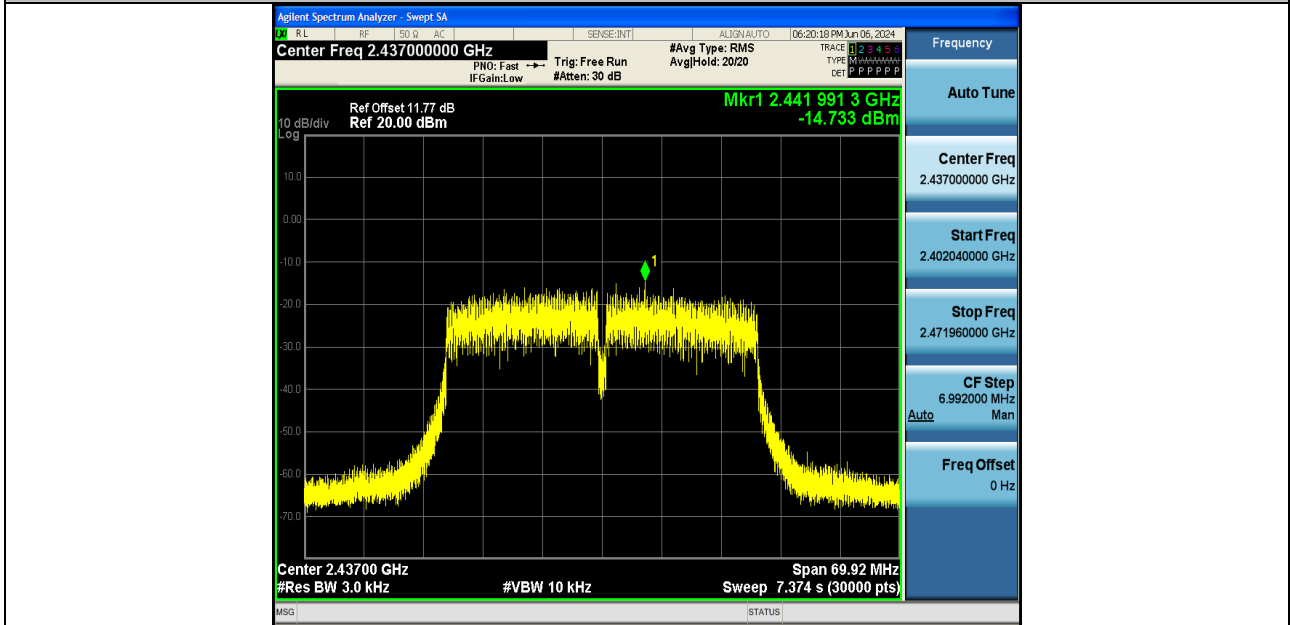

11AX40SISO-Ant2-2437-PASS

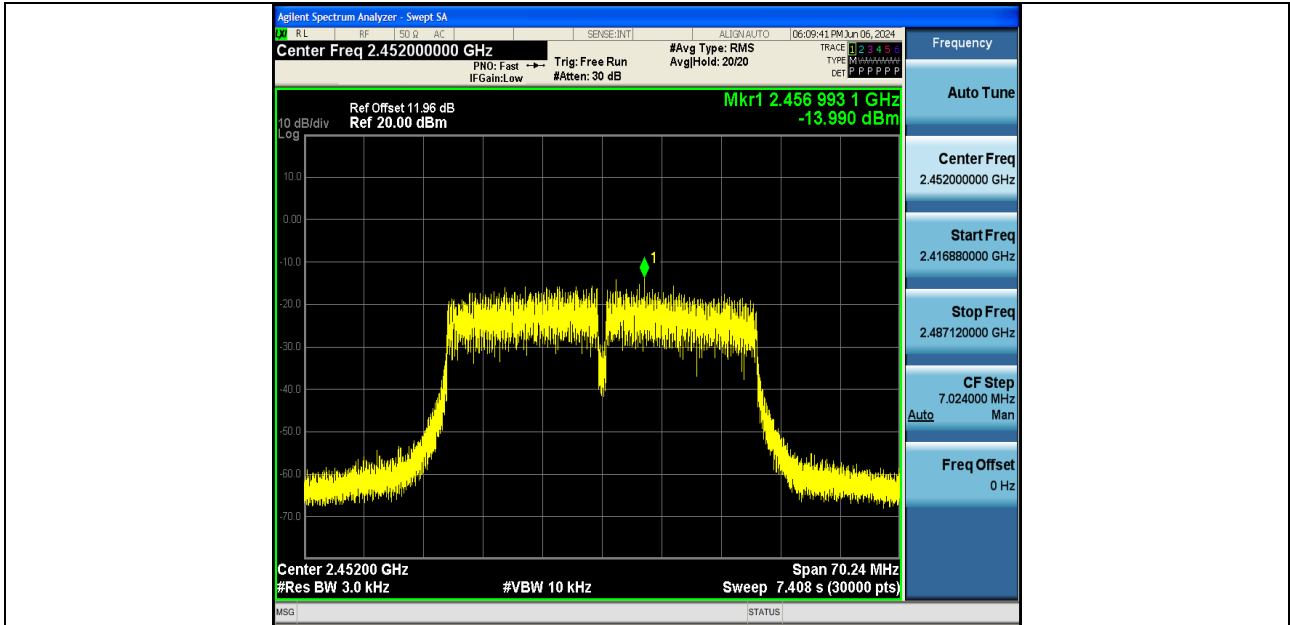

11AX40SISO-Ant1-2452-PASS

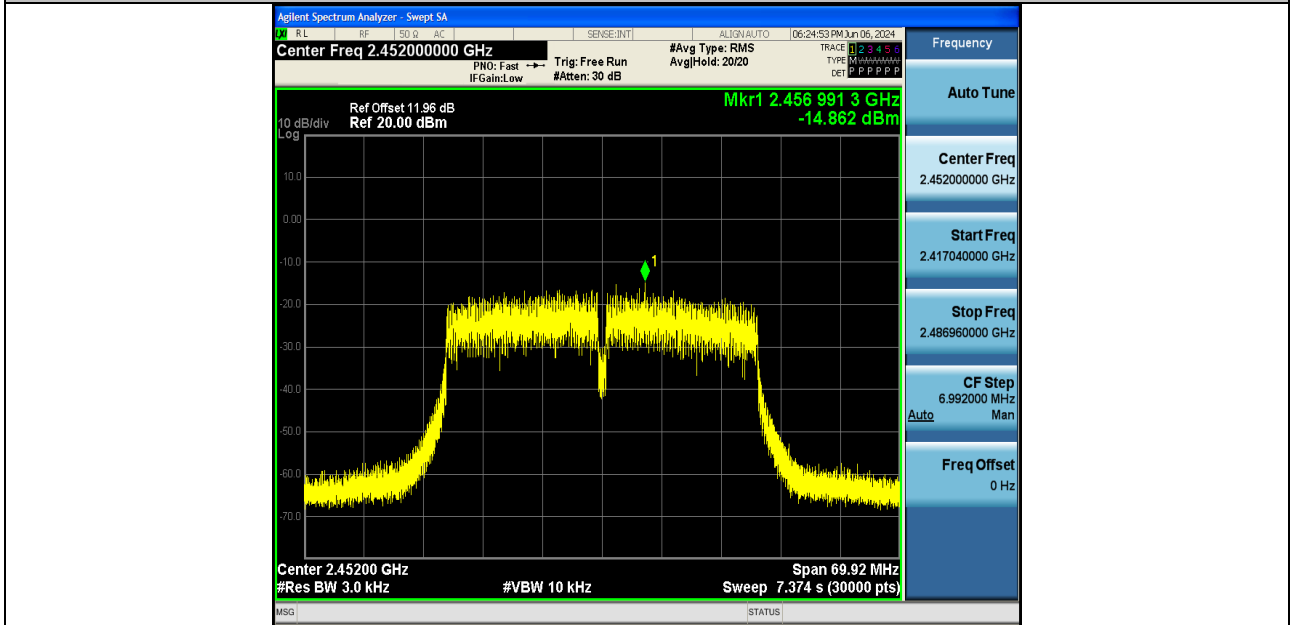

11AX40SISO-Ant2-2452-PASS



## **12 Antenna Application**

### **12.1 Antenna Requirement**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **12.2 Result**


The EUT'S antenna, permanent attached antenna, is FPC Antenna. The antenna's gain are Main(ANT2):2.16 dBi; AUX(ANT1):2.02 dBi and meets the requirement.

### 13 Test Setup

Conducted Emissions




Radiated Spurious Emissions  
From 30MHz-1000MHz

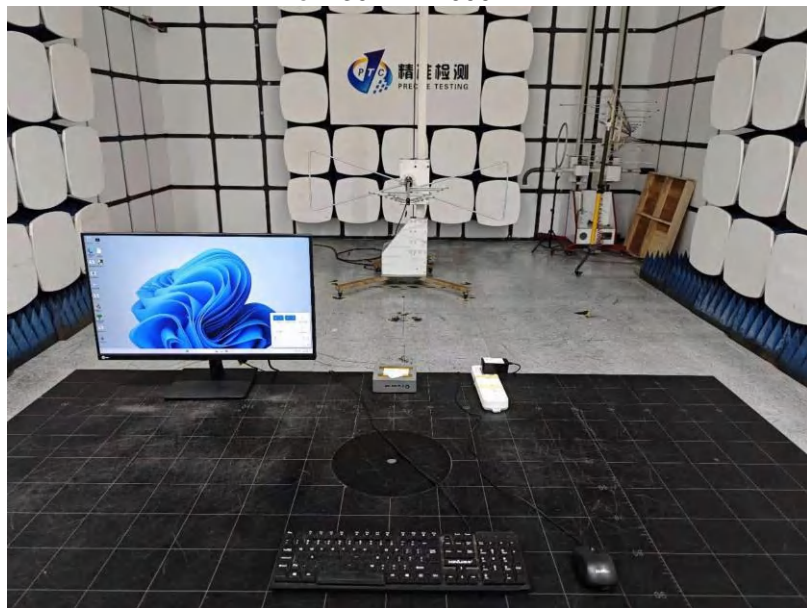





Test frequency from Above 1GHz

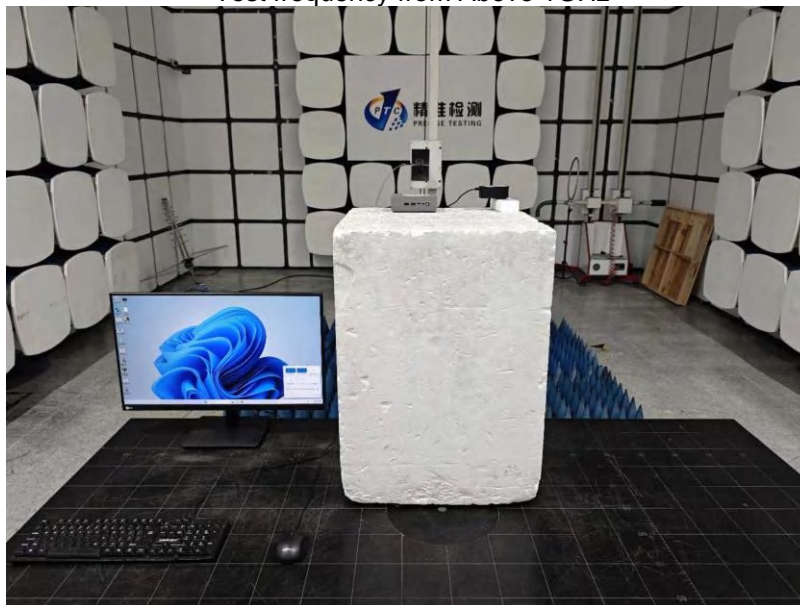

## 14 EUT PHOTOS

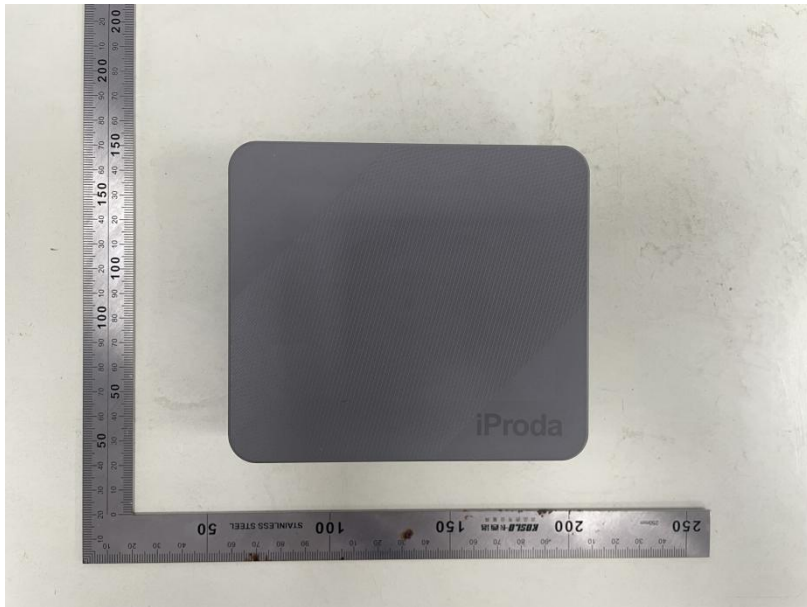


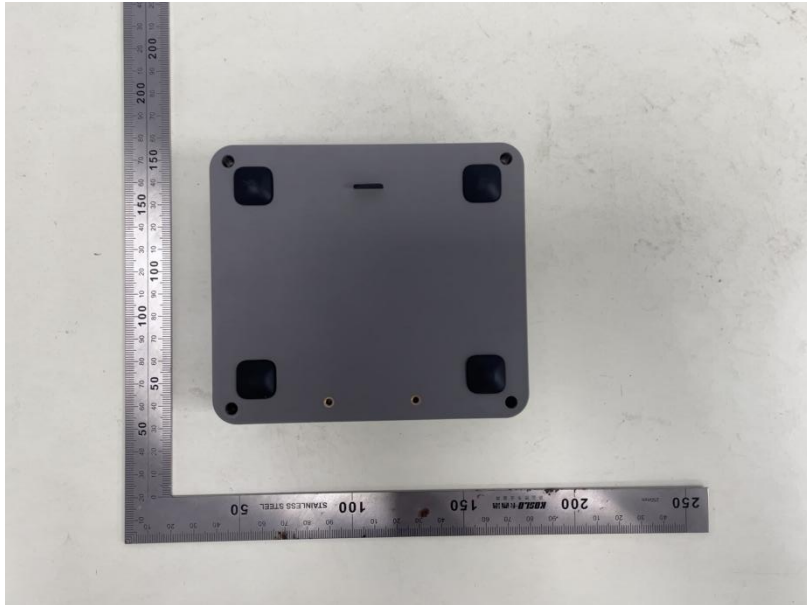








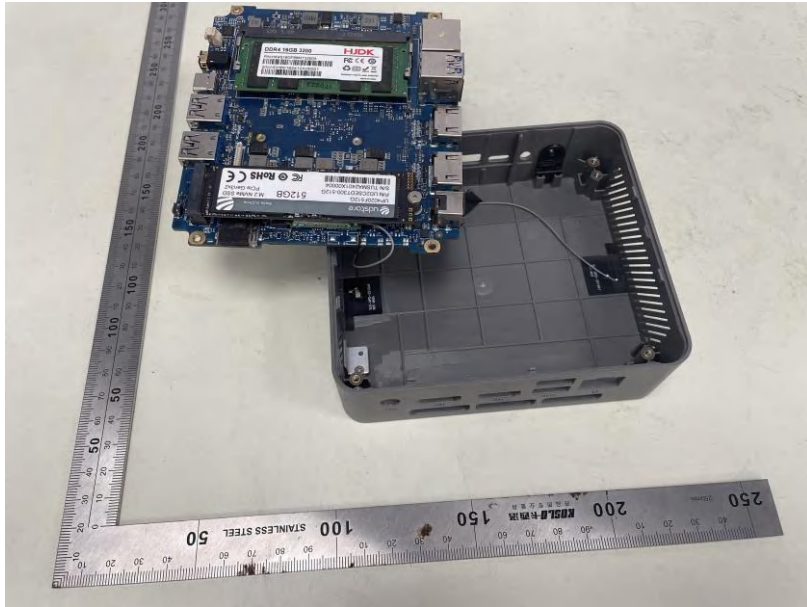











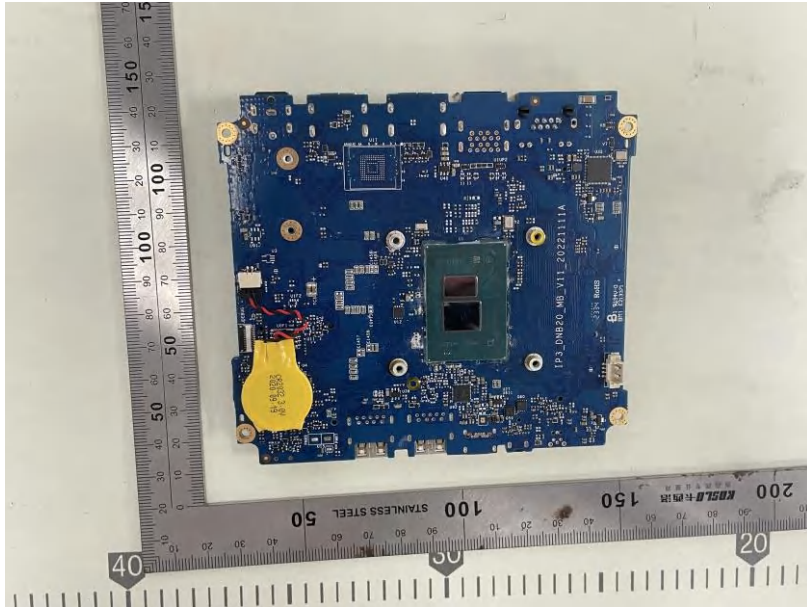


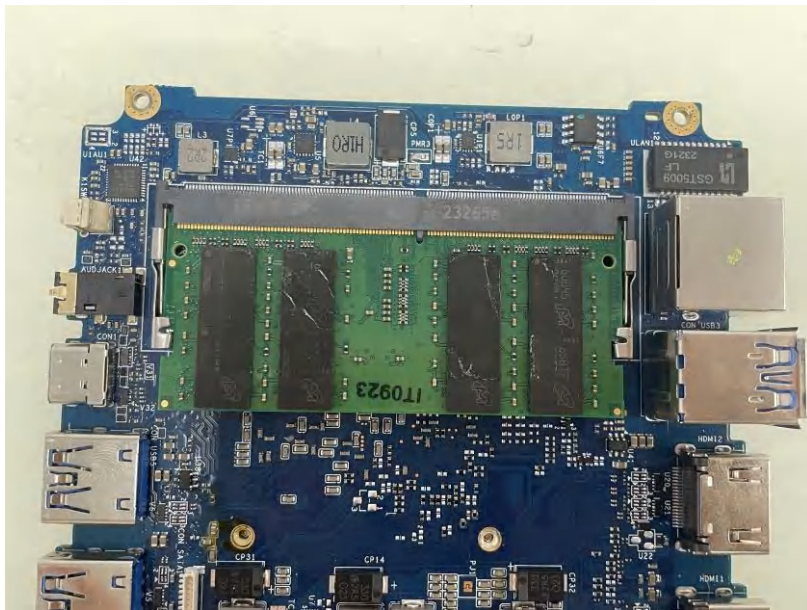

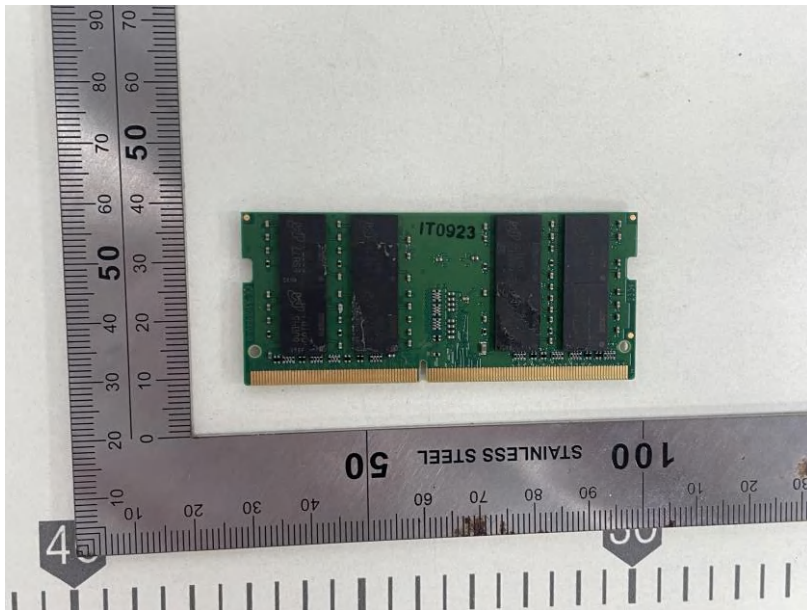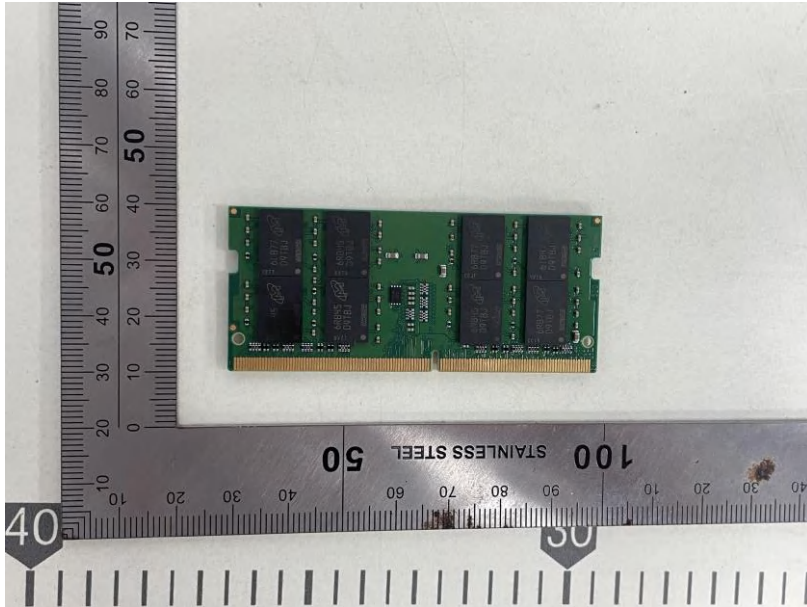

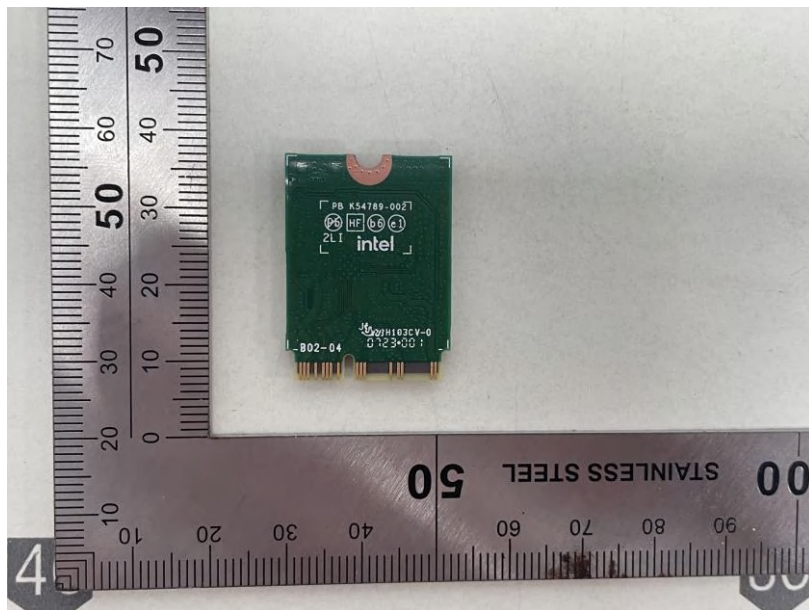



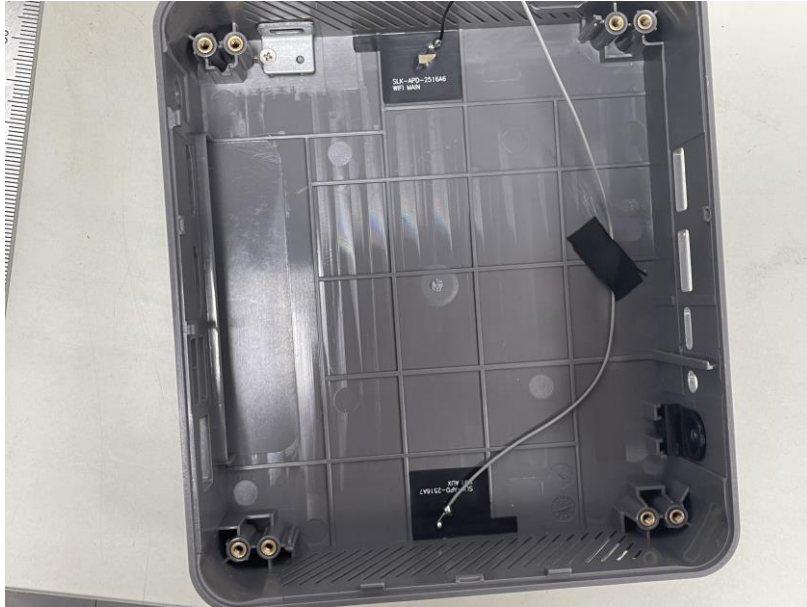

\*\*\*\*\*THE END REPORT\*\*\*\*\*