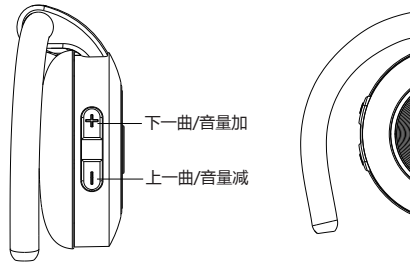
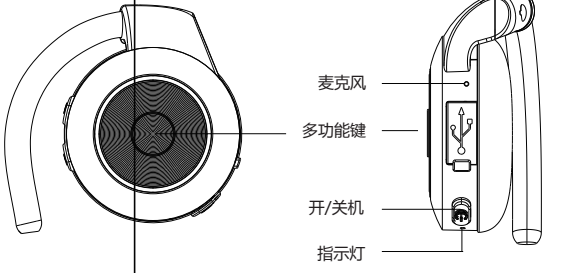
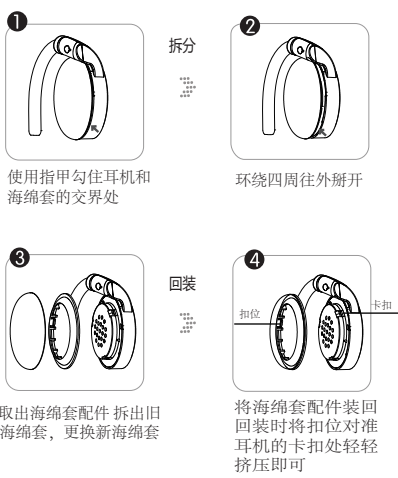
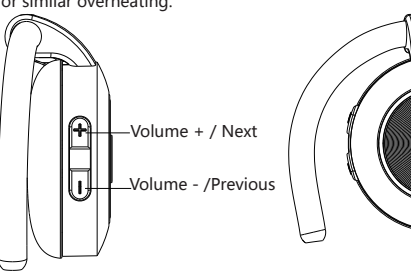
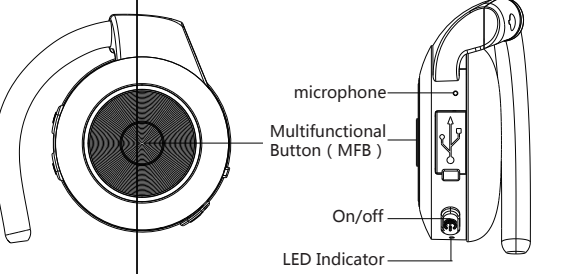
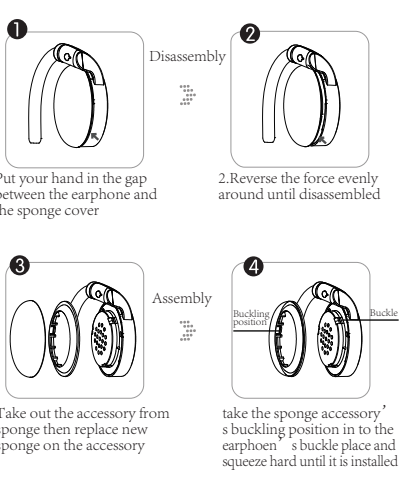


<p style="text-align: center;">无线耳机 Stereo Headphones</p> <p style="text-align: center;">快速入门指南 Quick Guide</p> <p style="text-align: center;">HP-20</p>	<p>为确保正确而安全地使用本耳机，请在使用前详细阅读本手册，并保存好。</p> <p>使用耳机时应注意下列事项：</p> <p>应尽量避免长期高音量使用耳机模式，以避免损伤听力。</p> <p>如所处环境存在潜在危险，请暂停使用耳机，以确保安全。</p> <p>应合理控制使用耳机时的音量大小和时间。</p> <p>不应把音量调得太高，导致您听不到四周的声音。如果出现耳鸣可能把音量调得太高，请将音量调低。</p> <p>不建议在驾驶时使用耳机听歌。</p> <p>用干的软布擦拭便可！应避免耳机进水，以免导致耳机损坏或者音质下降。</p> <p>如果使用耳机感觉到明显不适，或有刺激感等其他不良反应时，应立即停止使用本耳机。</p> <p>不应将耳机储存或使用于温度低于-15°C(5°F)或高于55°C(131°F)的环境，以免影响耳机寿命。</p> <p>电池警告 警告：禁止拆解、撞击、挤压或投入火中。若出现严重膨胀，请勿继续使用。请勿置于高温环境下。</p>	<p>警告语</p> <p>建议使用原装配套的充电线给耳机充电，如果使用不配套的充电线可能会损坏耳机。</p> <p>本耳机使用内置式不可拆卸充电电池。请勿尝试从耳机中取出电池，以免损坏耳机。</p> <p>电池（电池包或组合）不得暴露于诸如日照、火烤或类似过热环境中。</p> <p>如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换。</p> <p>适用于本机充电的电源适配器为5V/1A,如使用过高的电压电源适配器为本机充电则有烧机的风险！</p>  <p>下一曲/音量加 上一曲/音量减</p>	<p>充电前，请关闭耳机。</p> <p>2. 连接充电器后，耳机开始充电。充电时，红灯亮。</p> <p>3. 耳机充满电，红灯熄灭。</p> <p>开机/关机：</p> <p>1. 在关机状态下，电源开关拨至“ON”位，直到蓝灯亮闪1次，耳机提示“开机”，5秒后进入配对状态，耳机提示“进入配对”，此时红蓝交替快闪。</p> <p>2. 在开机状态下，电源开关拨至“OFF”位，耳机提示“关机”，此时，耳机关机，红灯亮闪1次，熄灭。</p> <p>将耳机跟两部手机连接</p> <p>1. 将耳机与第一部手机配对成功后，关闭第一部手机蓝牙同时将耳机关机</p> <p>2. 按照与第一部手机配对的步骤与第二部手机配对；</p> <p>3. 打开第一部手机蓝牙功能，选择“S9”，完成与两部手机的配对。</p> <p>温馨提示：</p> <p>1. 当已经配对过的蓝牙设备处于蓝牙开启状态，并在连接范围内，无需操作“S9”开机就可以自动回连到上次连接的设备如果不能自动回连，请打开蓝牙设备的蓝牙菜单，点击已连接过的“S9”就可以回连。</p> <p>2. 配对时间超过3分钟，耳机会自动关机；退出连接范围断开连接后3分钟内回到有效距离就可以自动回连上一次连接的设备。</p>  <p>麦克风 多功能键 开/关机 指示灯</p>	<p>蓝牙配对步骤：</p> <p>1. 请将耳机和手机（或其他作用连接的装置）的距离控制在1米范围内，越近越好。</p> <p>2. 在关机状态下，电源开关拨至“ON”位，直到蓝灯亮闪1次，耳机提示“开机”，5秒后进入配对状态，耳机提示“进入配对”，此时红蓝交替快闪。</p> <p>3. 打开手机或其他所需连接装置的蓝牙搜索功能，手机上会显示已找到“S9”。</p> <p>4. 选择“S9”耳机会自动与手机连接，蓝灯闪烁，此时耳机会语音提示“已连接”。</p> <p>接听来电：</p> <p>当手机与耳机连接后，有来电时，耳机会提示音，短按来电号码“134...”，短按“多功能键”可接听来电，或用您的手机接听来电。</p> <p>挂断通话：</p> <p>正在通话时，短按耳机的“多功能键”即可挂断通话，或用您的手机直接挂断通话。</p> <p>智能语音：</p> <p>长按“多功能键”听到提示音“塞”后说出指示操作，例如“打电话给XXX”手机就会自动拨出该电话（手机内需存有XXX电话）部分手机不通用。</p> <p>来电提醒：</p> <p>双击“多功能键”即可弹出手机最后一次拨打的号码。</p> <p>电话转移：</p> <p>通话时可双击“多功能键”，在手机与耳机间相互切换通话。</p> <p>挂断电话：</p> <p>当第一个电话正在通话中，第二个电话呼入，如果你想接听第二个来电，双击“多功能键”，就可以结束第一个通话，接听第二个来电。</p>	<p>中英文切换：</p> <p>在开机状态下同时长按“+”和“-”键，中、英文可相互转换。</p> <p>电量提示：</p> <p>“S9”每次开机时会提示耳机的剩余电量情况，如“电量满”、“电量充足”、“电量中等”、“电量低”、“电量低请及时充电”。</p> <p>播放/暂停：</p> <p>耳机正在音乐播放期间，短按“多功能键”可暂停音乐播放再次短按“多功能键”可恢复音乐播放。</p> <p>上一曲/音量减：</p> <p>在播放音乐时可短按“-”，选择上一首音乐，长按“-”降低音量。</p> <p>下一曲/音量加：</p> <p>在播放音乐时可短按“+”，选择下一首音乐，长按“+”增加音量。</p> <p>手机防丢提示：</p> <p>当手机与耳机连接后，耳机离开手机约10米外，耳机会语音提示“超出连接范围”如果在三分钟内回到有效距离，可自动与手机连接，超过3分钟不回到有效距离，10分钟后自动关机。</p> <p>恢复出厂设置：</p> <p>关机状态下充电时，长按“多功能键”，红灯同闪3次，恢复出厂设置。</p>	<p>耳机包装清单：</p> <ul style="list-style-type: none"> • 耳机1个 • 海绵套2个 • USB充电线1条 • 说明书1本 <p>技术参数</p> <p>符合蓝牙标准：V4.2</p> <p>支持：HSP、HFP、A2DP、AVRCP</p> <p>发送功率：Class 2</p> <p>连接范围：≤10m</p> <p>操作频率范围：2.402GHz-2.480GHz</p> <p>充电时间：≤3.5小时</p> <p>待机时间：≥300小时</p> <p>耳机通话时间：≥18小时</p> <p>耳机听歌时间：≥16小时</p> <p>USB充电电源：≤5V/1A</p>	<p>耳机更换海绵步骤</p> <p>正确拆装步骤</p> <p>为了延长耳机的使用寿命，更换海绵时，请按下图所示步骤操作！</p>  <p>1. 使用指甲勾住耳机和海绵套的交界处</p> <p>2. 环绕四周往外掰开</p> <p>3. 取出海绵套配件拆出旧海绵套，更换新海绵套</p> <p>4. 将海绵套配件装回耳机的卡扣处轻轻挤压即可</p>	
<p>For user's safety, please read this manual before using the headset.</p> <p>The following matters should be paid attention to when using headset:</p> <p>Please avoid long-time use of high volume mode, because it will lead to hearing loss caused by noise.</p> <p>If you are in bad condition of potential danger, please stop using headset, in order to ensure safety.</p> <p>Users should reasonably control the volume and time when listening to the headset.</p> <p>This headset has built-in rechargeable battery, so do not attempt to remove the battery from the headset to avoid damaging it.</p> <p>The battery (battery pack or combination) shall not be exposed to such conditions as sunshine, fire roasting, or similar overheating.</p> <p>Don't drive while listening to songs.</p> <p>Use dry soft cloth to clean the headset! Should avoid the headset into the water, that will cause headset damage.</p> <p>If you feel obvious discomfort, stimulation, or other adverse reaction when using the headset, stop using it immediately.</p> <p>The headset should not be stored or used in temperature below-15°C(5°F) or higher than 55°C(131°F), otherwise will reduce the battery life.</p>	<p>Battery warning warning: do not disassemble, collide, squeeze or throw it into fire.</p> <p>If there is serious bloating, do not continue to use it. Do not place it in high temperature.</p> <p>Warning</p> <p>Please charge the headsets with original charging cable, it may damage the battery or the headset if you are using improper charging cable.</p> <p>This headset has built-in rechargeable battery, so do not attempt to remove the battery from the headset to avoid damaging it.</p> <p>The battery (battery pack or combination) shall not be exposed to such conditions as sunshine, fire roasting, or similar overheating.</p>  <p>Volume + / Next Volume - / Previous</p>	<p>If not properly change the battery, there will be danger of explosion. Should only use the same type of battery.</p> <p>The power adapter for charging the product is 5V/1A, if use high voltage power adapter for charging the machine, there is the risk of burning machine!</p> <p>1. Before charging, please turn off the headset.</p> <p>2. After the charger is connected, the headset starts to charge, the red light is on when charging.</p> <p>3. After fully charged, the red light goes off.</p> <p>ON/OFF</p> <p>1. OFF state, push the power button to "ON", LED flashes blue one time; the headset prompts "power on"</p>  <p>microphone Multifunction Button (MFB) On/off LED Indicator</p>	<p>2. ON state Push the power button to "Off" the headset prompts "power off" and the red LED flashes one time goes off</p> <p>Bluetooth connection steps:</p> <p>1. Please keep your headset and mobile phone as close as you can, within 1 meter.</p> <p>2. Push the power button to "ON", LED flashes blue one time and the headset prompts "power on". In 5 seconds the headset enters pairing mode and it prompts "Pairing". LED flashes red and blue alternately.</p> <p>3. Turn on "Bluetooth" in setting(your device) and find headset's name S9</p> <p>4. Click S9 Bluetooth headset gets connected with your mobile phone automatically.</p> <p>Pairing the headset with 2 mobile phones</p> <p>1. After successfully connected with your mobile phone please close mobile's Bluetooth function and Turn off the headset</p> <p>2. Same procedure to get the 2nd mobile phone paired with the Bluetooth headset.</p> <p>3. Turn on the Bluetooth function of the 1st mobile phone; Chose "S9" to finish the pairing status with the 2nd mobile phones.</p>	<p>Note :</p> <p>1. With your previously paired device's Bluetooth turned on and in range, turn on "S9". The headset will automatically reconnect to the same Bluetooth device that connected last time. If you have a previously paired device that does not auto-reconnect, navigate to the Bluetooth settings menu on your device, turn on the Bluetooth feature, and select "S9" from your list of paired Bluetooth devices.</p> <p>2. Pairing time exceeds 3 minutes, S9 will automatically shut down; in 3 minutes back to the effective distance can automatically return to the last connected device.</p> <p>3. If connected with two mobile phones, only one mobile phone supports wireless music and you can start conversation for both mobile phones. Battery check up through iPhone.</p> <p>Answer phone call :</p> <p>When there is an incoming call, there will be a voice Prompts, 134...578 (phone number will be broadcasted), short press MFB to answer, or just operate your mobile phone.</p> <p>End Call :</p> <p>Short press the "MFB" button to hang up calls, or by direct hang up your phone call.</p>	<p>Reject call :</p> <p>When there is an incoming call, headset will broadcast the phone number. Double click the "MFB" to reject, or just reject it on your mobile phone.</p> <p>Intelligent Voice:</p> <p>Long press "MFB" button, after hear the voice prompts "Du" and speak the operation instruction, such as: "Call XXX" the phone will automatically dial the phone number (the phone number in your contact list). Some Android/phones without smart voice are not applicable!</p> <p>Last number redial :</p> <p>Double click "MFB" button.</p> <p>Call Transfer :</p> <p>Double click the "+ -" to transfer incoming call between phone and headset.</p> <p>Hang up the phone call and answer other incoming call</p> <p>If there is an incoming call when you are answering the phone call, and you want to Answer the other incoming call, double click the "MFB" button, you can hang up the phone call, and answer the incoming call.</p> <p>Chinese/English Shift :</p> <p>Turn on the headset, Long press the volume "+ -" and "- +" simultaneously.</p>	<p>Power prompt :</p> <p>Each time turning on S9, it will report headset battery power remaining, such as "battery full", "battery level high", "battery level medium", "battery level low", "recharge headset".</p> <p>Play/Pause :</p> <p>During music playing, Short press "MFB" to pause music, and click again MFB back to play.</p> <p>Previous/Volume down</p> <p>During music playing, short press "-" to change the last song, Long press "-" to volume down</p> <p>Next/Volume plus</p> <p>During music playing short press "+" to change the next song, Long press "+" to increase volume</p> <p>Mobile phone anti-lost indicator</p> <p>When the headphone connected with smart phone, if the distance between device and headphone out of 10 m, headset will prompts "Beyond the range of connections". If coming back to the working distance within 3 min, the headset will reconnect Automatically with smart phone. If not coming back to the working distance in 10 min, headphone will be power off, please switch the button to the OFF then switch to ON, headset will reconnect with smart phone.</p>	<p>Restore Factory Settings</p> <p>Turn off the headset and in charge state, long press "MFB" button for three seconds, the red and blue light flashes three times, it will back to Factory setting.</p> <p>Package content:</p> <ul style="list-style-type: none"> • Headset 1pcs • USB charging cable 1pcs • Sponge cover 2 Sets • User Manual 1pcs <p>Technical Index</p> <ul style="list-style-type: none"> • Correspond With : V4.2 • Support : HSP、HFP、A2DP、AVRCP • Transmitting Power : Class 2 • Working Distance : ≤10m • Frequency Range : 2.402GHz-2.480GHz • Charging time : ≤3.5 Hours • Standby Time : ≥300 Hours • Talk Time : ≥18 Hours • Music Time : ≥16 Hours • USB power supply : ≤5V/1A 	<p>In order to extend the life of the headphones, when replacing the sponge, please follow the steps below.</p> <p>The steps to replace sponge cover</p>  <p>1. Put your hand in the gap between the earphone and the sponge cover</p> <p>2. Reverse the force evenly around until disassembled</p> <p>3. Take out the accessory from sponge then replace new sponge on the accessory</p> <p>4. Take the sponge accessory's buckling position in to the earphone's buckle place and squeeze hard until it is installed</p>

FCC ID:2AB3N-HP20

FCC WARNING:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter