

TEST REPORT

Product Name :		PLL AM/FM DUAL ALARM CLOCK RADIO WITH BLUETOOTH AND USB CHARGING PORT
Model Number		MET8106,JCR-298,JCR-298XXXXX(where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)
FCC ID	:	2AB4KMETYH8106
Prepared for Address	::	MET INDUSTRIAL LTD Room 605, 6/F., No. 9 Wing Hong Street, Lai Chi Kok, Kowloon, Hong Kong
Prepared by Address		EMTEK (SHENZHEN) CO., LTD. Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Tel: (0755) 26954280 Fax: (0755) 26954282
Report Number Date(s) of Tests		ES201013037W October 20, 2020 to October 28, 2020

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn

November 02, 2020

EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Date of issue :



Table of Contents

1	TEST R	RESULT CERTIFICATION	
2	EUT TE	ECHNICAL DESCRIPTION	5
3	SUMM	ARY OF TEST RESULT	6
4	TEST M	/IETHODOLOGY	7
	4.1 4.2 4.3	GENERAL DESCRIPTION OF APPLIED STANDARDS MEASUREMENT EQUIPMENT USED DESCRIPTION OF TEST MODES	7
5	FACILI	TIES AND ACCREDITATIONS	9
	5.1 5.2	FACILITIES LABORATORY ACCREDITATIONS AND LISTINGS	
6	TEST S	YSTEM UNCERTAINTY	10
7	SETUP	OF EQUIPMENT UNDER TEST	11
	7.1 7.2 7.3 7.4	RADIO FREQUENCY TEST SETUP 1 RADIO FREQUENCY TEST SETUP 2 CONDUCTED EMISSION TEST SETUP SUPPORT EQUIPMENT	
8	FREQU	JENCY HOPPING SYSTEM REQUIREMENTS	14
	8.1 8.2 8.3 8.4	STANDARD APPLICABLE EUT Pseudorandom Frequency Hopping Sequence Equal Hopping Frequency Use Frequency Hopping System	
9	TEST R	REQUIREMENTS	16
	9.1 9.2 9.3 9.4 9.5 9.6	20DB BANDWIDTH CARRIER FREQUENCY SEPARATION NUMBER OF HOPPING FREQUENCIES AVERAGE TIME OF OCCUPANCY (DWELL TIME) MAXIMUM PEAK CONDUCTED OUTPUT POWER CONDUCTED SUPRIOUS EMISSION	22 28 30 33
	9.6 9.7	RADIATED SPURIOUS EMISSION	
	9.8	CONDUCTED EMISSION TEST	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



1 TEST RESULT CERTIFICATION

Applicant	ET INDUSTRIAL LTD			
Address	² Room 605, 6/F., No. 9 Wing Hong Street, Lai Chi Kok, Kowloon, Hong Kong			
Manufacturer : Dongguan City Wangniudun Yinghui Electronics Factory				
Address	Chijiaoluduan Zhengzhong Road Wangniudun Town Dongguan City, China			
EUT	: PLL AM/FM DUAL ALARM CLOCK RADIO WITH BLUETOOTH AND USB CHARGING PORT			
Model	: MET8106,JCR-298,JCR-298XXXXX(where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers)			
Trademark	: MET, JENSEN			

Measurement Procedure Used:

APPLICABLE STANDARDS					
STANDARD	TEST RESULT				
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS				

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report

Data of Tost	October 20, 2020 to October 28, 2020
Date of Test :	October 20, 2020 to October 28, 2020
	Lanceli
Prepared by :	
	Lance Li/Editor
Reviewer :	Foe Xia
	Joe Xia/Supervisor
Approved & Authorized Signer :	* EMTE
	Lisa Wang/Manager

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Modified History

Version	Report No.	Revision Date	Summary
V1.0	ES201013037W	/	Original Report

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description				
Product	PLL AM/FM DUAL ALARM CLOCK RADIO WITH BLUETOOTH AND USB CHARGING PORT				
Model Number	MET8106, JCR-298, JCR-298XXXXX (where XXXXX denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers) (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is model number.for trading purpose.We prepare MET8106 for test.)				
Device Type	Bluetooth V5.0				
Modulation:	GFSK modulation (1Mbps) π /4DQPSK modulation (2Mbps) 8DPSK modulation for (3Mbps)				
Operating Frequency Range(s):	2402-2480MHz				
Number of Channels:	79 channels				
Transmit Power Max:	3.09 dBm				
Antenna Type	PCB Antenna				
Max Antenna Gain	1.9 dBi				
Power Adapter	Model: OBL-0503000U Input: 100-240V~, 50/60Hz, 1.0A Max Output: 5.0V, 3.0A, 15W				
Temperature Range:	-10°C ~ 50°C				

Note: for more details, please refer to the User's manual of the EUT.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



FCC Part Clause **Test Parameter** Verdict Remark 20 dB Bandwidth 15.247(a)(1) PASS 15.247(a)(1) **Carrier Frequency Separation** PASS Number of Hopping Frequencies PASS 15.247(a)(1) Average Time of Occupancy (Dwell Time) 15.247(a)(1) PASS Maximum Peak Conducted Output Power 15.247(b)(1) PASS **Conducted Spurious Emissions** PASS 15.247(c) 15.247(d), 15.209 **Radiated Spurious Emissions** PASS 15.207 Conducted Emission PASS 15.203 Antenna Application PASS NOTE1: N/A (Not Applicable)

3 SUMMARY OF TEST RESULT

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AB4KMETYH8106 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.





4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 16, 2020	1Year
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	May 17, 2020	1Year
50Ω Coaxial Switch	Anritsu	MP59B	M20531	May 17, 2020	1Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 16, 2020	1Year
Voltage Probe	Rohde & Schwarz	TK9416	N/A	May 16, 2020	1Year
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	May 17, 2020	1Year

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 17, 2020	1Year
Pre-Amplifier	HP	8447D	2944A07999	May 17, 2020	1Year
Bilog Antenna	Schwarzbeck	VULB9163	142	May 16, 2020	1Year
Loop Antenna	ARA	PLA-1030/B	1029	May 17, 2020	1Year
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 16, 2020	1Year
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 16, 2020	1Year
Cable	Schwarzbeck	AK9513	ACRX1	May 17, 2020	1Year
Cable	Rosenberger	N/A	FP2RX2	May 16, 2020	1Year
Cable	Schwarzbeck	AK9513	CRPX1	May 17, 2020	1Year
Cable	Schwarzbeck	AK9513	CRRX2	May 17, 2020	1Year

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Last Cal.	Cal. Interval
Spectrum Analyzer	Agilent	E4407B	88156318	May 16, 2020	1Year
Signal Analyzer	Agilent	N9010A	My53470879	May 16, 2020	1Year
Power meter	Anritsu	ML2495A	0824006	May 17, 2020	1Year
Power sensor	Anritsu	MA2411B	0738172	May 17, 2020	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 17, 2020	1Year

Remark: Each piece of equipment is scheduled for calibration once a year.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation; 2Mbps for π /4-DQPSK modulation; 3Mbps for 8DPSK modulation) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	- 14 - C	
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
			/	78	2480
Note: $fc=2402MHz+(k-1)\times 1MHz$ k=1 to 79					

Frequency and Channel list:

Test Frequency and channel:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	: Accredited by CNAS, 2018.11.30 The certificate is valid until 2022.10.28
	The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
	The Certificate Registration Number is L2291
	Accredited by FCC, August 09, 2018 Designation Number: CN1204
	Test Firm Registration Number: 882943
	Accredited by A2LA, August 08, 2018
	The Certificate Registration Number is 4321.01
	Accredited by Industry Canada, November 09, 2018 The Certificate Registration Number is CN0008
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%



Report No. ES201013037W



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

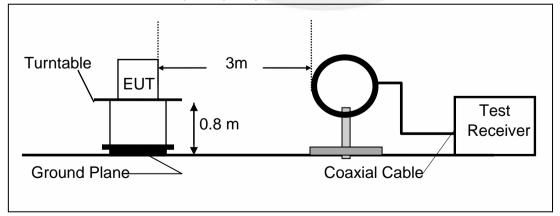


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



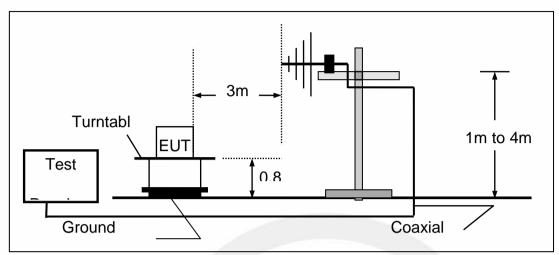

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

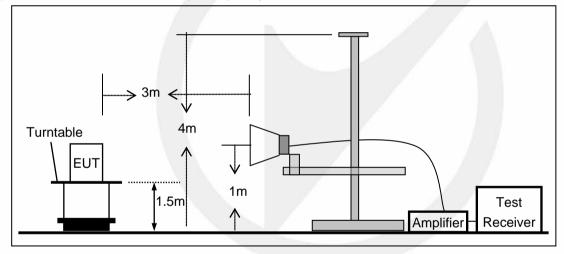

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

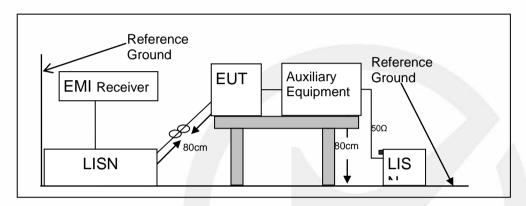

7.4 SUPPORT EQUIPMENT

EUT Cable List and Details						
Cable Description Length (m) Shielded /Unshielded With / Without Ferrite Supplied by Certification						
/	/	1	1	/	/	

Auxiliary Cable List and Details						
Cable Description	Length (m)	Shielded /Unshielded	With / Without Ferrite	Supplied by	Certification	
/	/	/	/	/	/	

Auxiliary Equipment List and Details						
Description	Manufacturer	Model	Serial Number	Supplied by	Certification	
/	/	/	/	/	/	

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W



8 FREQUENCY HOPPING SYSTEM REQUIREMENTS

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9


Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





Linear Feedback Shift Register for Generation of the PRBS sequence

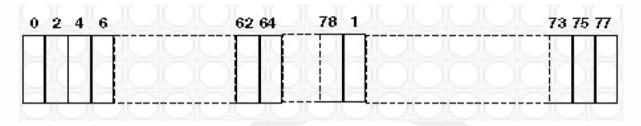

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode:

35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9 TEST REQUIREMENTS

9.1 20DB BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.


Test Results

Temperature:	24°C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

Modulation Mode	Channel Number	Channel Frequency (MHz)	20dB Measurement Bandwidth(KHz)	Verdict			
	00	2402	824.9	PASS			
GFSK	39	2441	842.3	PASS			
	78	2480	881.3	PASS			
	00	2402	1228.7	PASS			
π /4DQPSK	39	2441	1228.7	PASS			
	78	2480	1228.7	PASS			
	00	2402	1363.2	PASS			
8DPSK	39	2441	1363.2	PASS			
	78	2480	1363.2	PASS			
Note: N/A (Not	Note: N/A (Not Applicable).						


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



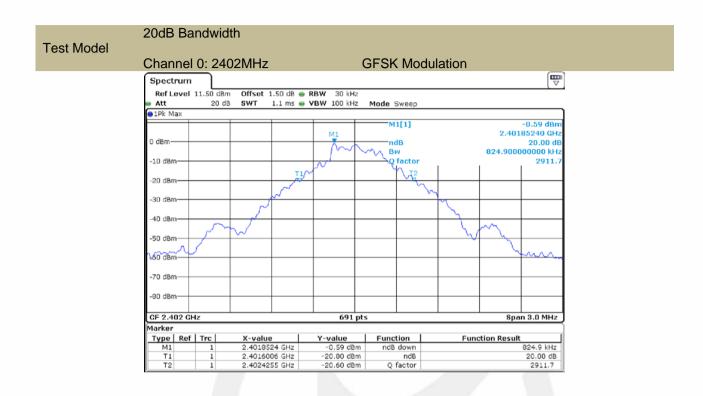


20dB Bandwidth

Test Model

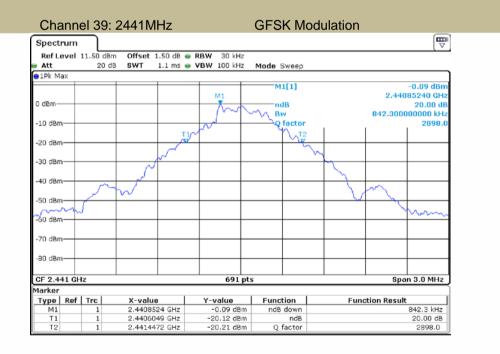


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



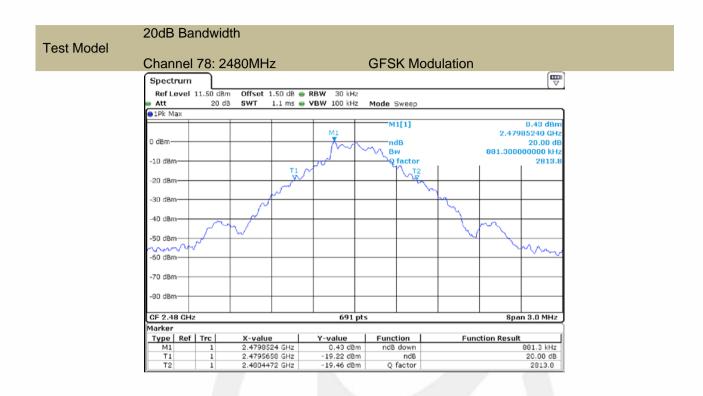


20dB Bandwidth



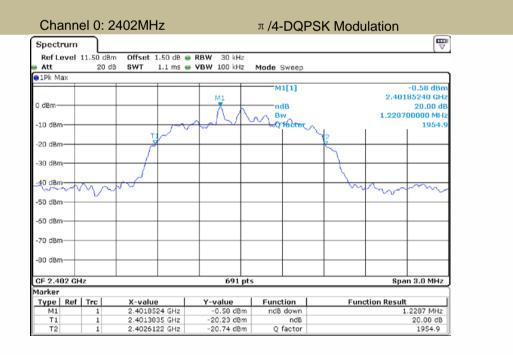


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



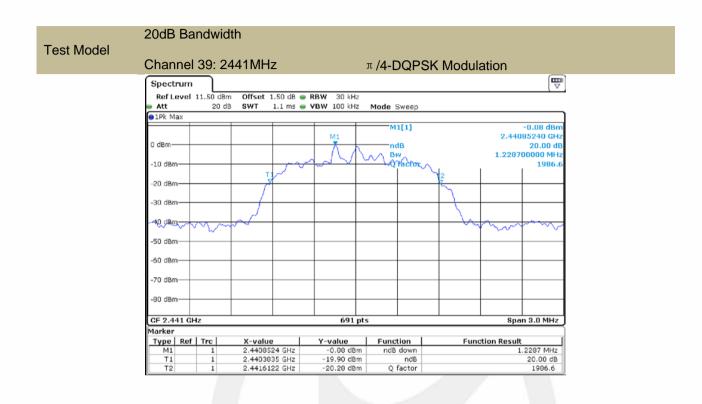


20dB Bandwidth

Test Model

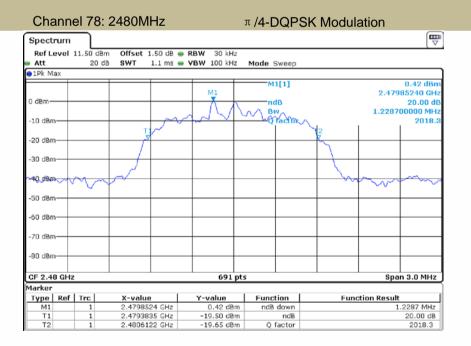


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



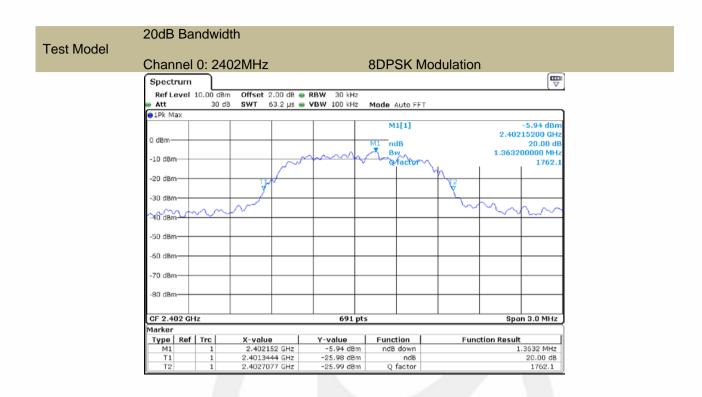


20dB Bandwidth

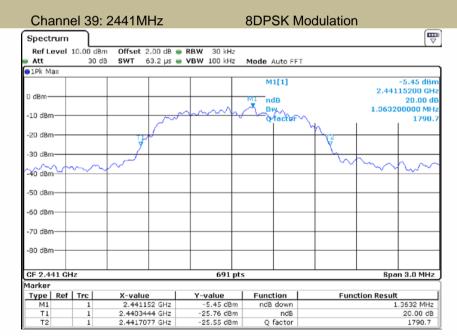

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



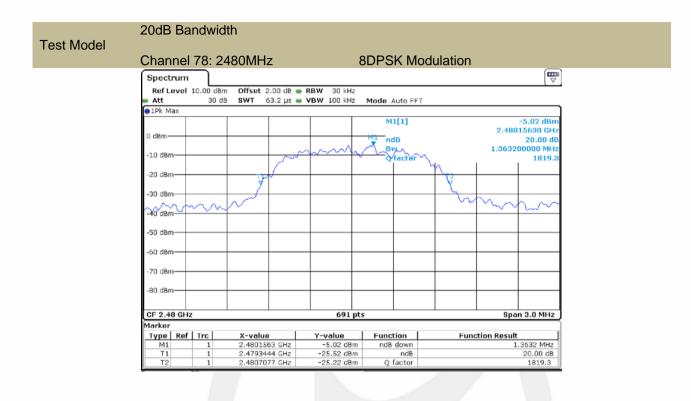

深圳信溯标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W

Ver.1.0



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

According to FCC Part15.247(a)(1)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Set the RBW =100kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


Test Results

Temperature:	24°C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

Modulation	Channel	Channel Frequency	Measurement Bandwidth	Limit	Vardiat		
Mode	Number	(MHz)	(kHz)	(kHz)	Verdict		
	0	2402	1002.9	>549.9	PASS		
GFSK	39	2441	998.6	>561.5	PASS		
	78	2480	998.6	>587.5	PASS		
	0	2402	1002.9	>819.1	PASS		
π /4DQPSK	39	2441	998.6	>819.1	PASS		
78		2480	998.6	>819.1	PASS		
	0	2402	1002.9	>908.8	PASS		
8DPSK	39	2441	1002.9	>908.8	PASS		
	78	2480	998.6	>908.8	PASS		
Note: GFSK: L	Note: GFSK: Limit=20dB bandwidth						
π /4DQP	SK and 8D	PSK: Limit >20dB band	dwidth * 2/3				


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



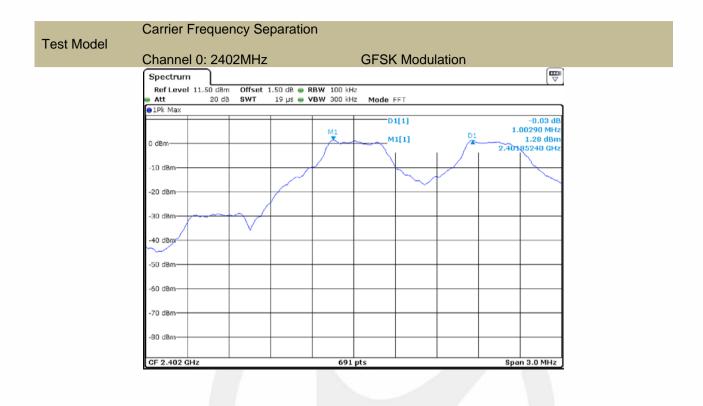


Carrier Frequency Separation

Test Model

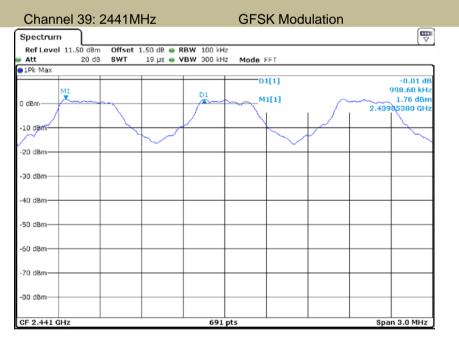


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



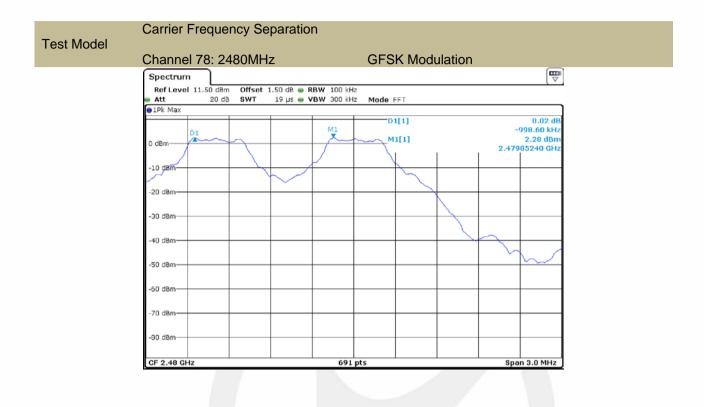


Carrier Frequency Separation

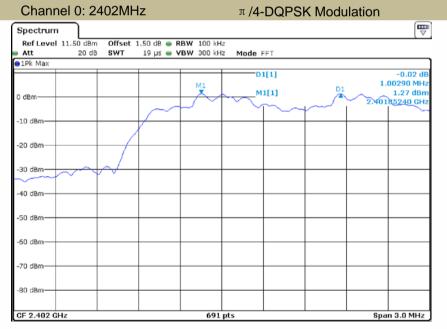


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



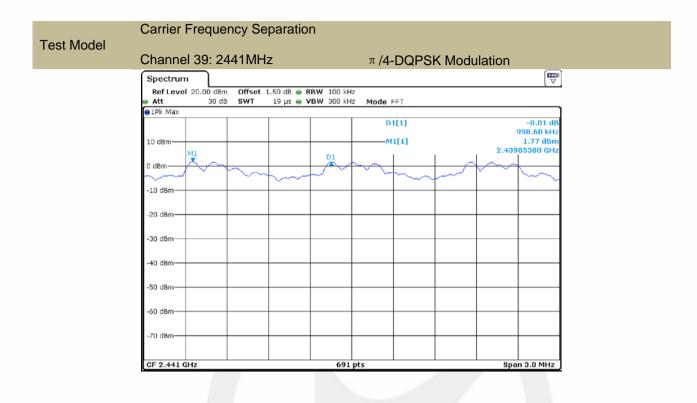


Carrier Frequency Separation

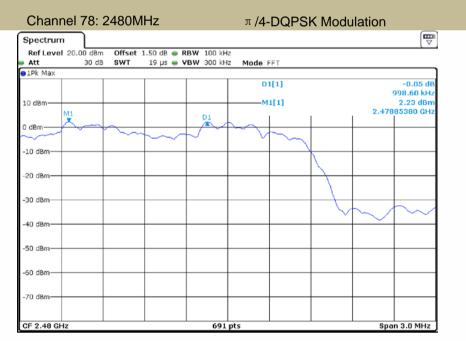

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



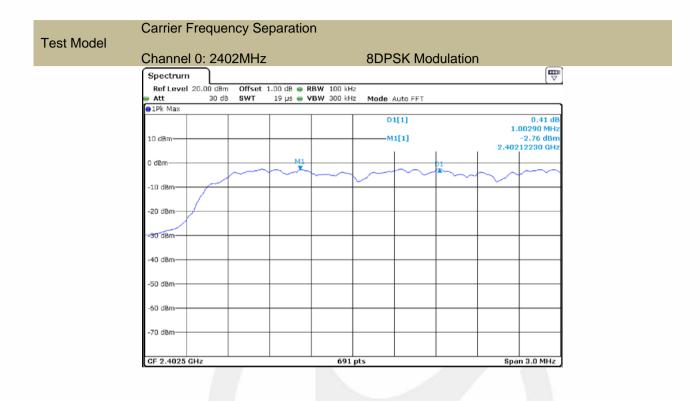


Carrier Frequency Separation

Spectrum					
Ref Level 20			RBW 100 kHz		
Att	30 dB SWT	19 µs 👄	VBW 300 kHz	Mode Auto FFT	
●1Pk Max					
				D1[1]	-0.07 di
10 dBm				M1[1]	1.00290 MH -1.60 dBn
10 0011				and all	2.44012300 GH
0.40.00	1/11			-D1	
0 dBm	\sim		In the second		
		$\neg \checkmark$			
-10 dBm					
-20 dBm			+		
-30 dBm			+		
-40 dBm			+		
-50 dBm					
-60 dBm					
-70 dBm					
- o ubiii					

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



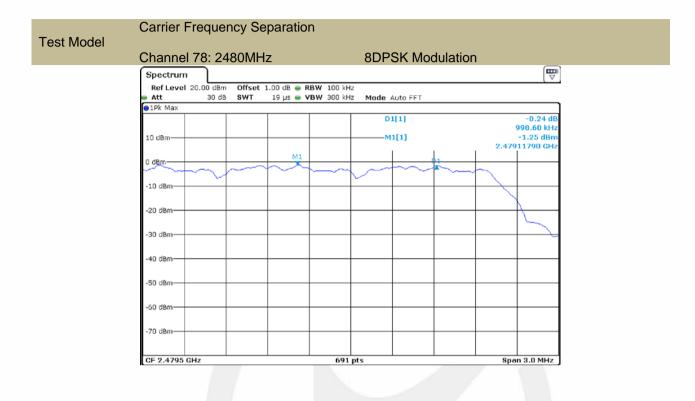

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2400-2483.5MHz)

 $\rm RBW\,\geqslant\,100 KHz$

 $\rm VBW\,\geqslant\,RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results


Temperature:	24°C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

Modulation Mode	Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
GFSK	2402-2480	79	>15
π /4DQPSK	2402-2480	79	>15
8DPSK	2402-2480	79	>15

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



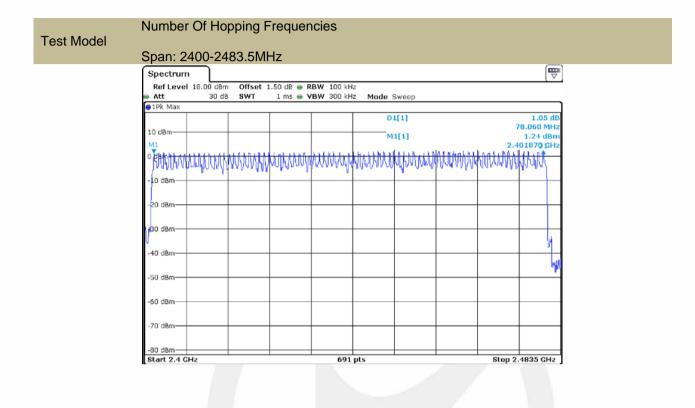

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.4.2 Conformance Limit

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.4.4 Test Procedure

According to FCC Part15.247(a)(1)(iii)

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

9.4.5 Test Results


Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1011 mbar


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Modulation Mode	Channel Number	Packet type	Pluse width (ms)	Dwell Time (ms)	Limit (ms)	Verdict
	0	DH1	0.365	116.80	<400	PASS
GFSK	0	DH3	1.623	259.68	<400	PASS
	0	DH5	2.869	306.03	<400	PASS
Note: Dwell Time(DH1)=PW*(1600/2/79)*31.6						
Dwell Time(DH3)=PW*(1600/4/79)*31.6						
Dwell Time(DH5)=PW*(1600/6/79)*31.6						

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



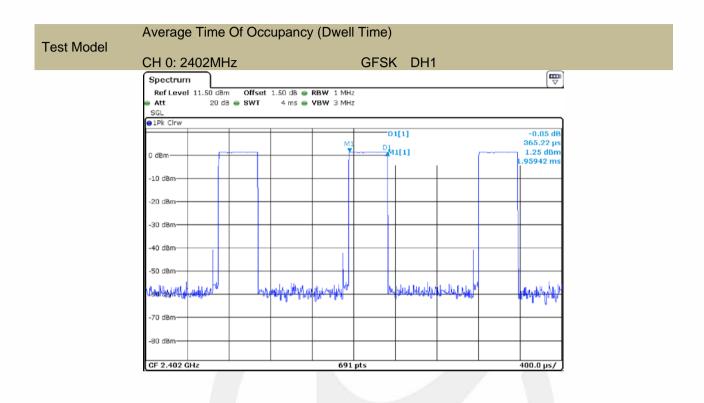

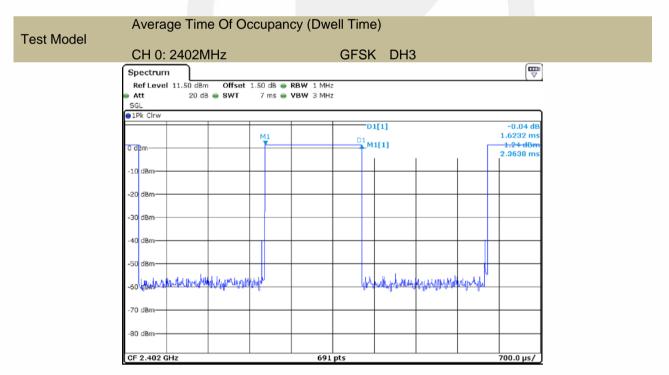

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn





深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

According to FCC Part15.247(b)(1)

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 10MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.


Test Results


Temperature:	24°C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
0		2402	1.49	30	PASS
GFSK	39	2441	1.89	30	PASS
	78	2480	2.41	30	PASS
π/4-DQPSK	0	2402	2.22	30	PASS
	39	2441	2.59	30	PASS
	78	2480	3.09	30	PASS
	0	2402	1.95	30	PASS
8DPSK	39	2441	2.56	30	PASS
	78	2480	2.82	30	PASS
Note:					

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69练 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




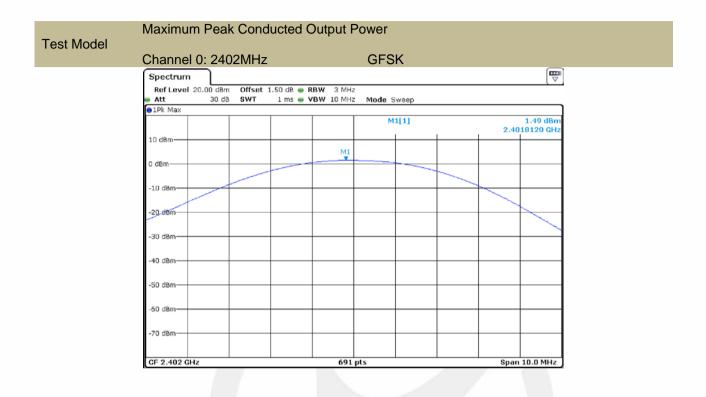

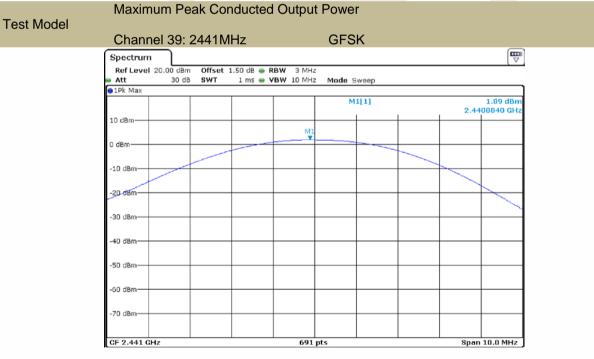

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



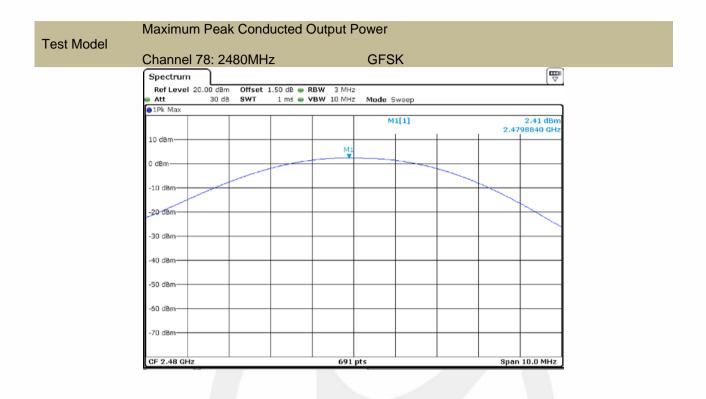



Maximum Peak Conducted Output Power

Channel 0:	2402MHz	π	/4DQPSK	
Spectrum				
RefLevel 20.00 d Att 30			de Sweep	,
●1Pk Max				
			M1[1]	2.22 dBn 2.4018990 GH
10 dBm				
		M1		
0 dBm				
-10 dBm				
-20-dBm				
-30 dBm				
-So ubili				
-40 dBm				
-50 dBm				
-60 dBm				
-70 dBm				
CF 2.402 GHz		691 pts		Span 10.0 MHz

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




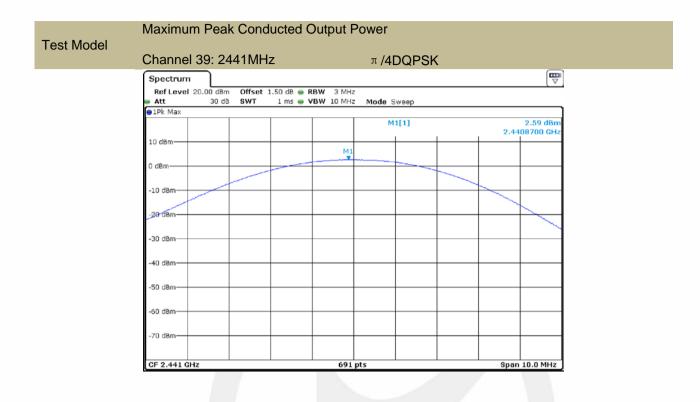


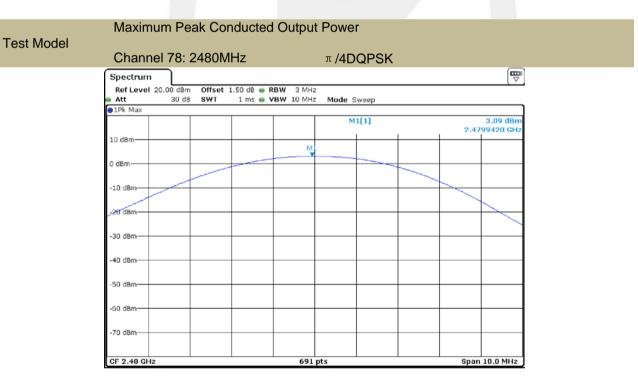

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




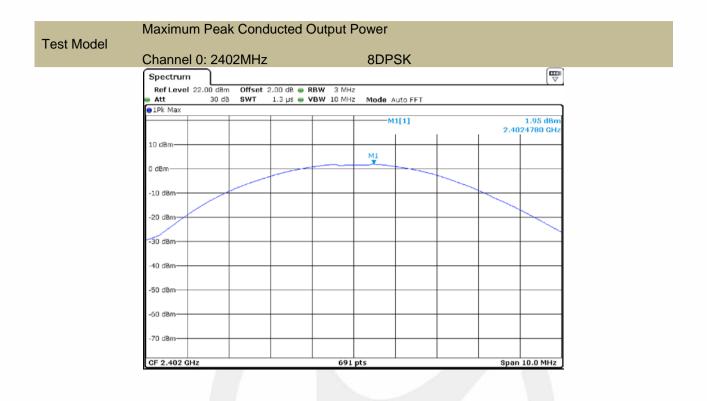

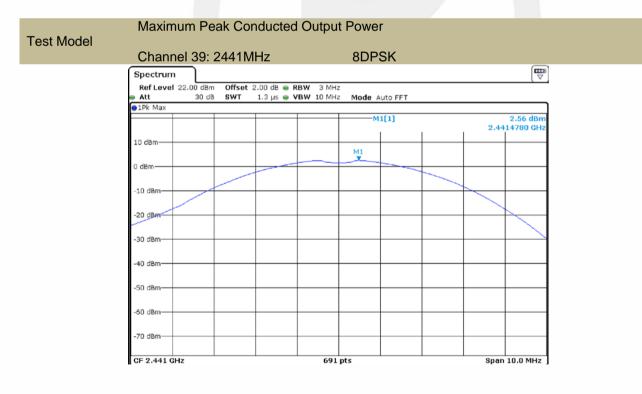

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69练 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



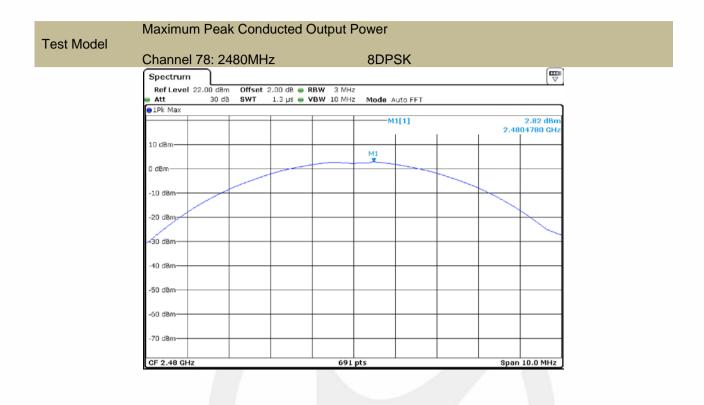

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \ge 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conducted level.

Note that the channel found to contain the maximum conducted level can be used to establish the reference level.

Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW \geq 1% of the span=100kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Conducted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW \geq RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold


Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.6.5 Test Results


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result (GFSK) was report as below:

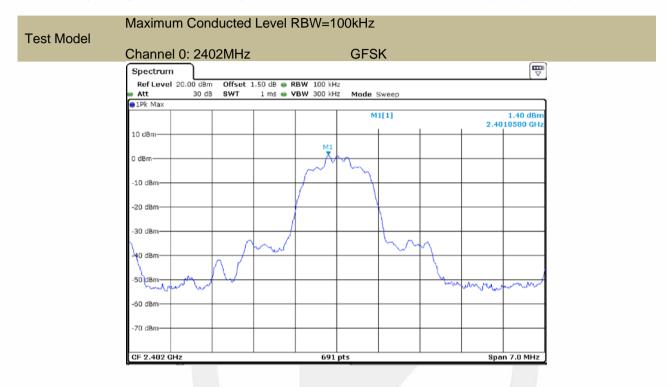

Test Model	Condu	cted Spuri	ous RF C	onducte	ed Emis	ssion			
	Channe	el 0: 2402	MHz		GFS	K			
	Spectrum								
	Ref Level Att	11.50 dBm Off 20 dB SW	set 1.50 dB 👄 T 1.1 ms 👄	RBW 100 kH VBW 300 kH		Sweep			
	●1Pk Max								
						2[1]		2.39	29.23 dBm 81930 GHz
	0 dBm				M	1[1]		2.40	42,42 dBm 00000 GHz
	-10 dBm							ſ	
	-20 dBm-0	1 -18.600 dBm							
	-30 dBm					M2			
					1	N.		m	4
	-40 dBm		• A A				M1	- r-	
	-50 dBm	,	MW.				- A/		
		Sand	- M		mon	l h	w V		
	-60 dBm	mmo							
	-70 dBm								
	-30 dBm								
	-00 UBM								
	Start 2.39 G	Hz	I	691	pts	1		Stop 2	2.403 GHz

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




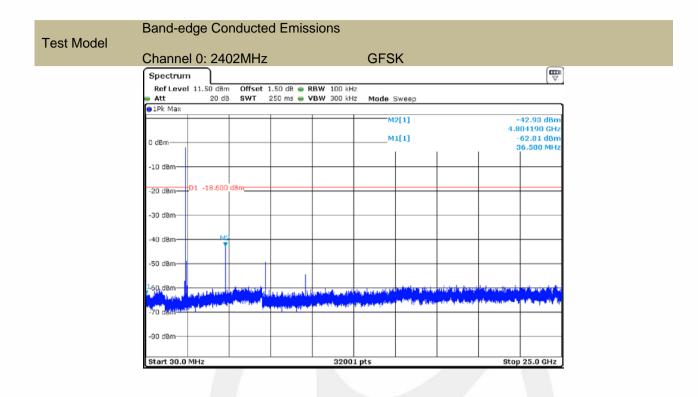




深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn




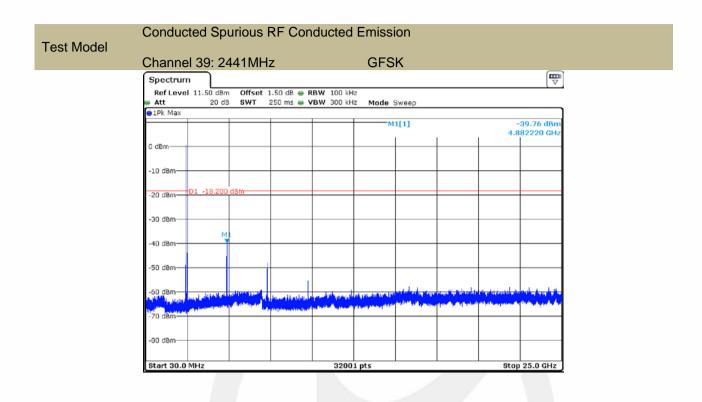

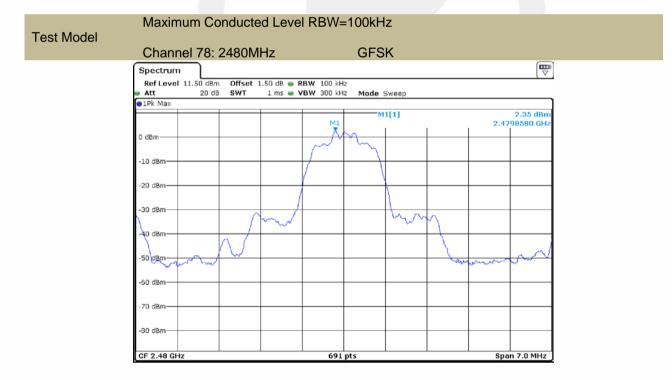


深圳信澍标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69练 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



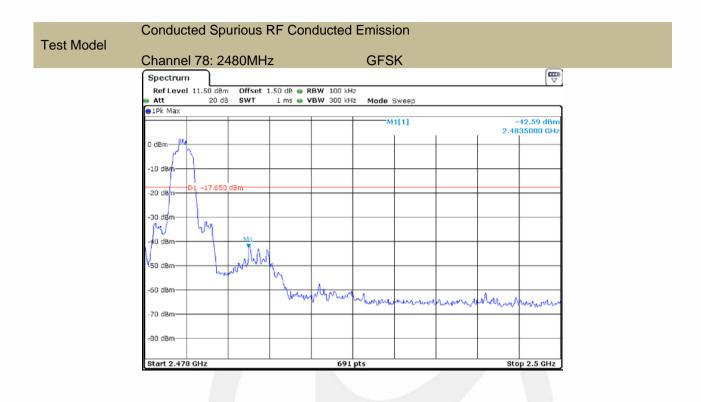


Test Model

Band-edge Conducted Emissions

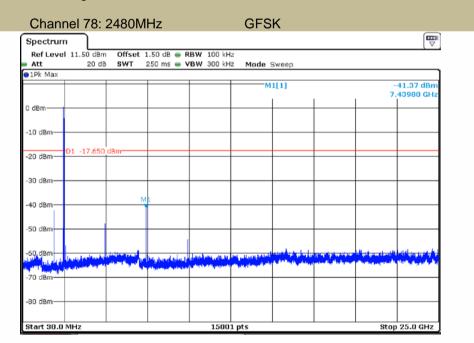

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



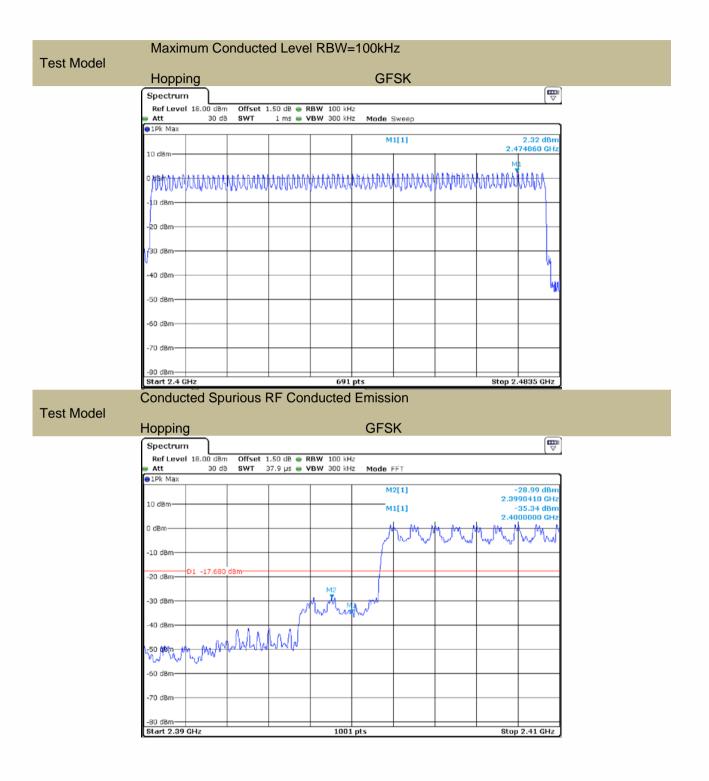


深圳信測标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W

Ver.1.0



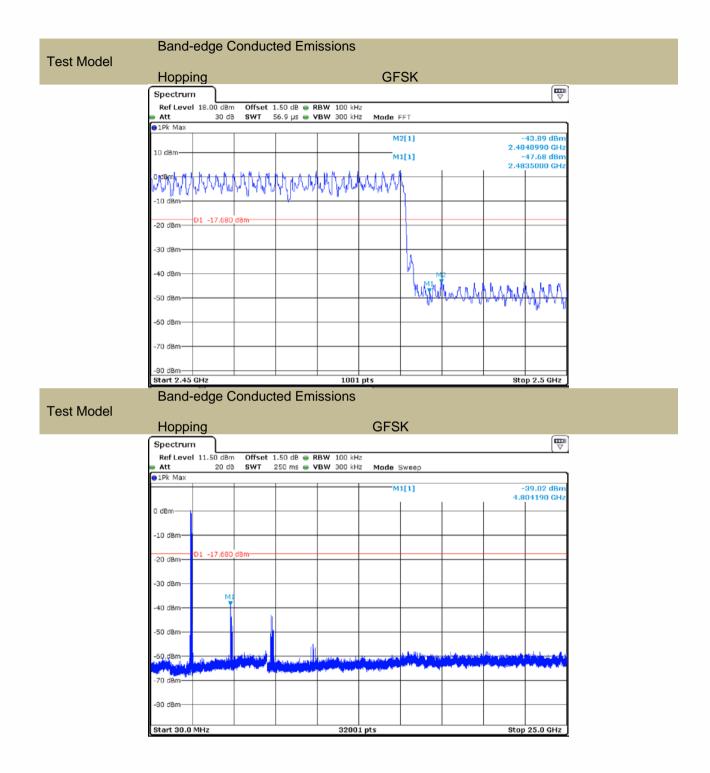

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.	205, Restricted bands		
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



 $VBW \ge RBW$ Sweep = autoDetector function = peak Trace = max hold For Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max holdFor Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHz $VBW \ge RBW$ Sweep = autoDetector function = peak Trace = max holdFor Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must

comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	29.5°C
Relative Humidity:	52%
ATM Pressure:	1017 mbar

Freq.	Ant.Pol.		sion BuV/m)	Limit 3m	(dBuV/m)	Ove	er(dB)
(MHz)	H/V	PK È	ÁÝ	PK	AV	PK	AV


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor



深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



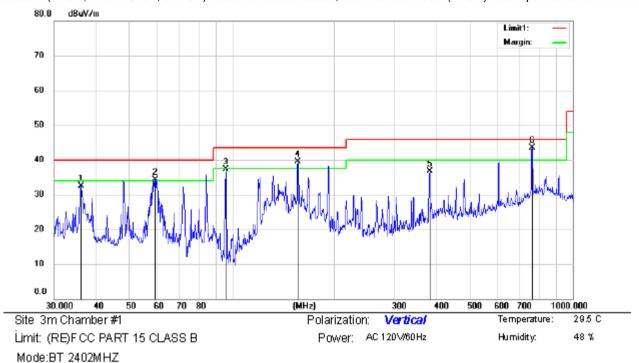

Spurious Emission below 1GHz (30MHz to 1GHz)


Bluetooth (GFSK, π/4DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∖√m	d Bu\V/m	dB	Detector	cm	degre e	Comment
1		36.0955	46.12	-13.52	32.60	40.00	-7.40	QP			
2	ļ	59.6231	46.37	-12.00	34.37	40.00	-5.63	QP			
3		95.8882	51.89	-14.66	37.23	43.50	-6.27	QP			
4	ļ	156.3892	53.44	-13.91	39.53	43.50	-3.97	QP			
5		380.4140	43.82	-7.10	36.72	46.00	-9.28	QP			
6	*	761.7045	42.85	0.59	43.44	46.00	-2.56	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



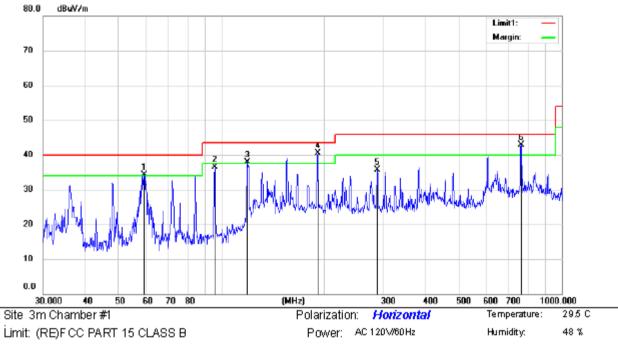


Mode:BT 2402MHZ

Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBuV/m	d Bu√/m	dÐ	Detector	cm	degre e	Comment
1	İ	59.6231	46.37	-12.00	34.37	40.00	-5.63	QP			
2		95.8041	51.13	-14.65	36.48	43.50	-7.02	QP			
3	İ	119.6980	52.27	-14.34	37.93	43.50	-5.57	QP			
4	*	192.5872	54.27	-13.68	40.59	43.50	-2.91	QP			
5		287.4860	45.35	-9.69	35.66	46.00	-10.34	QP			
6	ļ	761.7045	42.35	0.59	42.94	46.00	-3.06	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



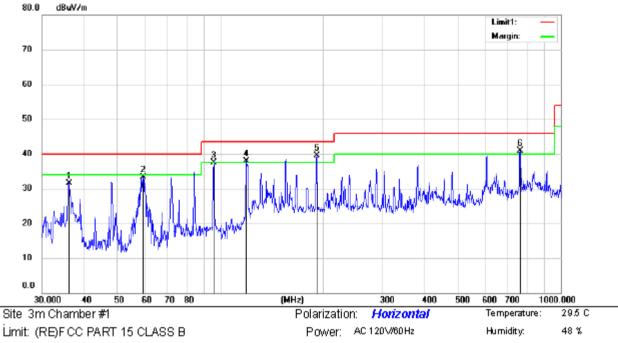


Mode:BT 2441MHZ

Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∖√m	d Bu\√m	dB	Detector	cm	degre e	Comment
1		36.0955	45.12	-13.52	31.60	40.00	-8.40	QP			
2		59.6231	45.37	-12.00	33.37	40.00	-6.63	QP			
3		95.8041	52.13	-14.65	37.48	43.50	-6.02	QP			
4	İ	119.6980	52.27	-14.34	37.93	43.50	-5.57	QP			
5	*	192.5871	53.27	-13.68	39.59	43.50	-3.91	QP			
6	İ	761.7045	40.35	0.59	40.94	46.00	-5.06	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



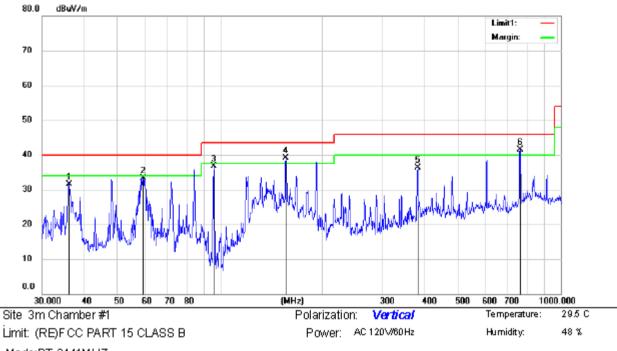


Mode:BT 2441MHZ

Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∖√m	d Bu\√m	dÐ	Detector	cm	degree	Comment
1		36.0955	45.12	-13.52	31.60	40.00	-8.40	QP			
2		59.6231	45.37	-12.00	33.37	40.00	-6.63	QP			
3		95.8880	51.39	-14.66	36.73	43.50	-6.77	QP			
4	*	156.3891	52.94	-13.91	39.03	43.50	-4,47	QP			
5		380.4140	43.32	-7.10	36.22	46.00	-9.78	QP			
6	ļ	761.7045	40.85	0.59	41.44	46.00	-4.56	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



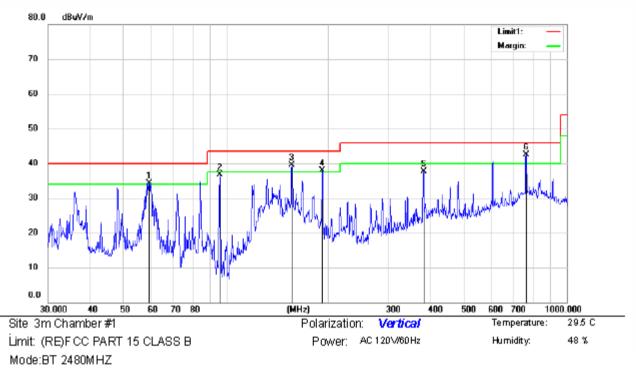


Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∖√m	d Bu\//m	dÐ	Detector	cm	degre e	Comment
1	İ	59.6231	46.37	-12.00	34.37	40.00	-5.63	QP			
2		95.8880	51.39	-14.66	36.73	43.50	-6.77	QP			
3	ļ	156.3891	53.44	-13.91	39.53	43.50	-3.97	QP			
4	ļ	191.8290	51.64	-13.74	37.90	43.50	-5.60	QP			
5		380.4140	44.82	-7.10	37.72	46.00	-8.28	QP			
6	*	761.7045	41.85	0.59	42.44	46.00	-3.56	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



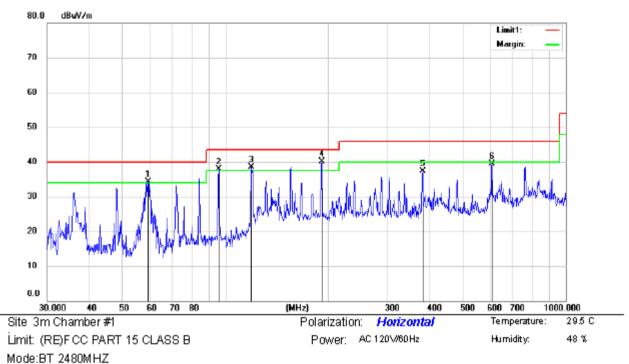

Note: EUT: PLL AM/FM Dual Alarm Clock Radio With Bluetooth AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∖Vm	d Bu\√m	dÐ	Detector	cm	degree	Comment
1	İ	59.6231	46.37	-12.00	34.37	40.00	-5.63	QP			
2	İ	95.8041	52.63	-14.65	37.98	43.50	-5.52	QP			
3	İ	119.6980	52.77	-14.34	38.43	43.50	-5.07	QP			
4	*	192.5871	53.77	-13.68	40.09	43.50	-3.41	QP			
5		380.4140	44.32	-7.10	37.22	46.00	-8.78	QP			
6		609.3872	42.15	-2.73	39.42	46.00	-6.58	QP			

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



Ant.Pol. Emission Level(dBuV/m) Limit 3m(dBuV/m) Over(dB) Freq. (MHz) H/V PK AV PK AV PK AV 3960.59 V 46.94 33.10 74.00 54.00 -27.06 -20.90 5468.26 V 49.29 35.70 74.00 54.00 -24.71 -18.30 14138.21 V 57.76 40.20 74.00 54.00 -16.24 -13.80 74.00 5605.07 Η 49.30 35.20 54.00 -24.70 -18.80 10664.55 Н 56.20 38.40 74.00 54.00 -17.80 -15.60 14741.21 Η 58.62 41.50 74.00 54.00 -15.38 -12.50

Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, x/4DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below: Test mode: GFSK Frequency: Channel 0: 2402MHz

т	~~	+ -	\mathbf{n}	4	~.
н	es	τr	nc	Da	e:

GFSK

Frequency:

Channel 39: 2441MHz

Freq.	Ant.Pol.	Emission Lev	/el(dBuV/m)	Limit 3m	(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
3863.36	V	45.20	30.80	74.00	54.00	-28.80	-23.20	
7592.51	V	52.10	36.60	74.00	54.00	-21.90	-17.40	
11216.23	V	56.51	38.70	74.00	54.00	-17.49	-15.30	
3758.18	Н	45.22	31.30	74.00	54.00	-28.78	-22.70	
7119.59	Н	52.95	36.90	74.00	54.00	-21.05	-17.10	
14749.73	Н	58.03	41.80	74.00	54.00	-15.97	-12.20	

Test mode:

GFSK

Channel 78: 2480MHz

Emission Freq. Ant.Pol. Limit 3m(dBuV/m) Over(dB) Level(dBuV/m) (MHz) H/V ΡK AV ΡK AV ΡK AV 4002.02 V 45.43 30.60 74.00 54.00 -28.57 -23.40 5786.98 V 49.44 34.00 74.00 54.00 -24.56 -20.00 V 56.88 38.30 74.00 54.00 -15.70 11175.78 -17.12 74.00 54.00 -27.97 -22.60 4181.16 Н 46.03 31.40 7410.39 Н 52.14 36.70 74.00 54.00 -21.86 -17.30 14717.79 Н 58.16 41.20 74.00 54.00 -15.84 -12.80

Frequency:

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, *π*/4DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode:	GFSK	Frequen	cy: Ch	Channel 0: 2402MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2389.76	Н	51.58	74	34.70	54	
2386.40	V	50.67	74	34.20	54	

Test mode:

GFSK

Frequency: Channel 78: 2480MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.53	Н	51.55	74	35.10	54
2483.51	V	51.74	74	35.40	54

Test mode:	GFSK	Frequence			
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2390.00	Н	43.63	74	29.69	54
2483.50	Н	47.01	74	32.69	54
2390.00	V	43.42	74	29.88	54
2483.50	V	50.27	74	35.26	54


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



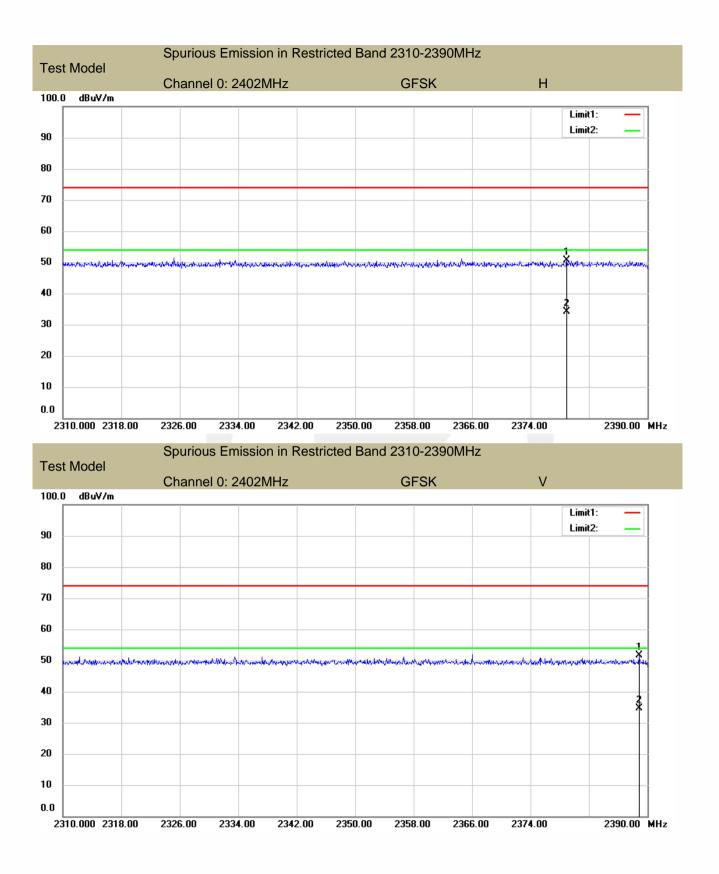

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



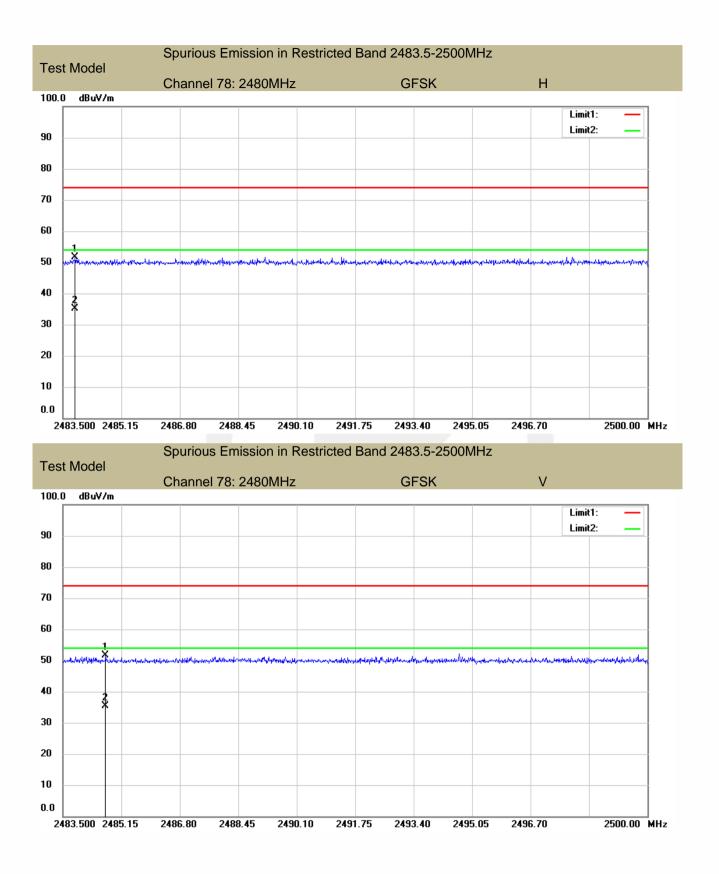


深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W

Ver.1.0



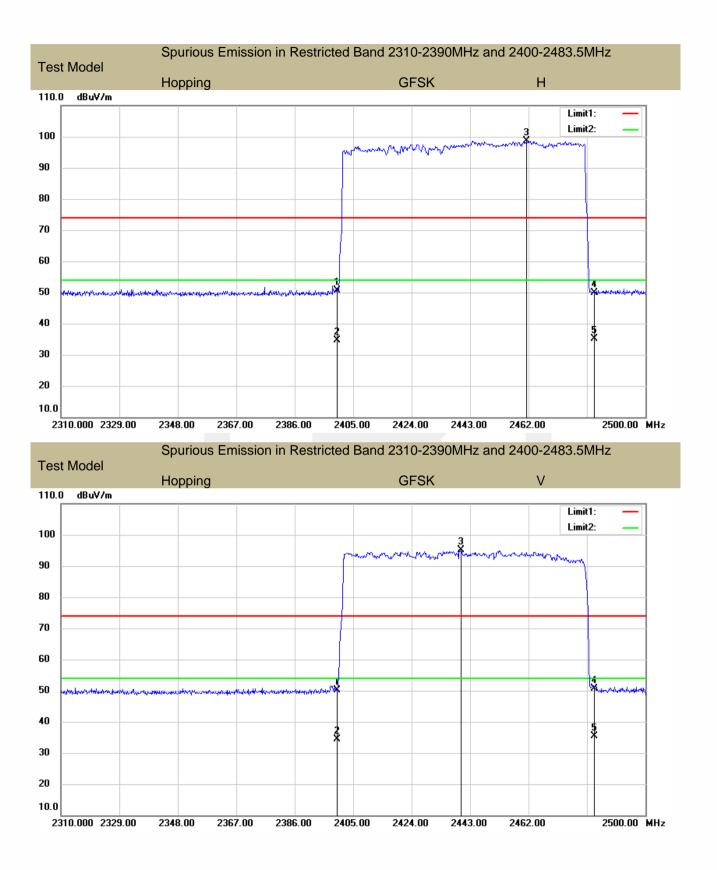

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn

Report No. ES201013037W

Ver.1.0



9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207(a)

9.8.2 Conformance Limit

Conducted Emission Limit							
Frequency(MHz)	Quasi-peak	Average					
0.15-0.5	66-56	56-46					
0.5-5.0	56	46					
5.0-30.0	60	50					
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.							

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

The 120V voltage have been tested, and the worst result recorded was report as below:

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn



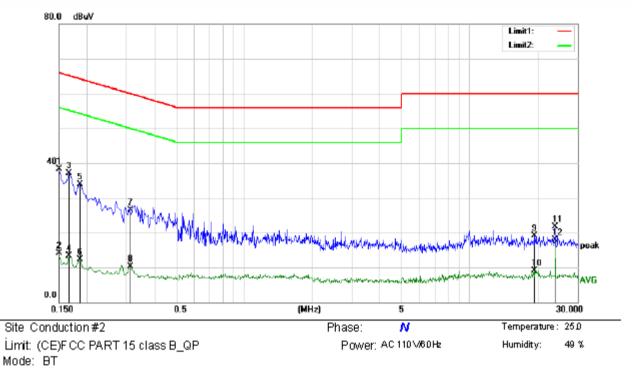


Note: Eut:PLL AM/FM DULL ALARM CLOCK RADIO WITH BLUETOOTH AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1	*	0.1500	27.80	10.52	38.32	66.00	-27.68	QP	
2		0.1500	3.55	10.52	14.07	56.00	-41.93	AVG	
3		0.1660	26.61	10.49	37.10	65.16	-28.06	QP	
4		0.1660	2.80	10.49	13.29	55.16	-41.87	AVG	
5		0.1863	23.39	10.46	33.85	64.20	-30,35	QP	
6		0.1863	1.85	10.46	12.31	54.20	-41.89	AVG	
7		0.3116	16.12	10.38	26.50	59.93	-33,43	QP	
8		0.3116	-0.05	10.38	10.33	49.93	-39.60	AVG	
9		19.3860	8.41	10.68	19.09	60.00	-40.91	QP	
10		19.3860	-1.60	10.68	9.08	50.00	-40.92	AVG	
11		24.0020	10.97	10.76	21.73	60.00	-38.27	QP	
12		24.0020	7.06	10.76	17.82	50.00	-32.18	AVG	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



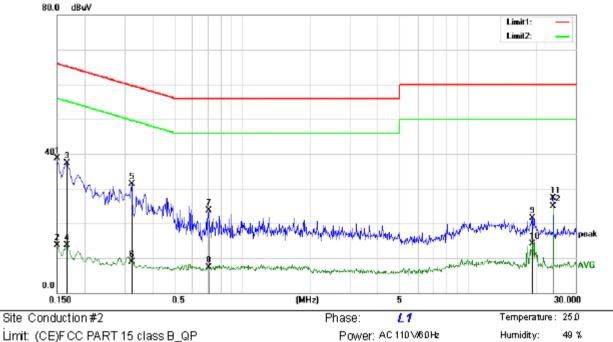

Mode: BT

Note: Eut:PLL AM/FM DULL ALARM CLOCK RADIO WITH BLUETOOTH AND USB CHARGING PORT

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1		0.1500	28.28	10.52	38.80	66.00	-27.20	QP	
2		0.1500	3.28	10.52	13.80	56.00	-42.20	AVG	
3		0.1660	26.72	10.49	37.21	65.16	-27.95	QP	
4		0.1660	3.12	10.49	13.61	55.16	-41.55	AVG	
5		0.3220	20.92	10.38	31.30	59.66	-28.36	QP	
6		0.3220	-1.39	10.38	8.99	49.66	-40.67	AVG	
7		0.7060	13.41	10.30	23.71	56.00	-32.29	QP	
8		0.7060	-3.08	10.30	7.22	46.00	-38.78	AVG	
9		19.4060	10.89	10.68	21.57	60.00	-38,43	QP	
10		19.4060	3.47	10.68	14.15	50.00	-35.85	AVG	
11		24.0020	16.60	10.76	27.36	60.00	-32.64	QP	
12	*	24.0020	14.20	10.76	24.96	50.00	-25.04	AVG	

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn EMTEK (Shenzhen) Co., Ltd. Add: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China Http://www.emtek.com.cn E-mail: cs.rep@emtek.com.cn



ANTENNA APPLICATION

9.8.6 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.8.7 Result

PASS.

Note:

The EUT is PCB Antenna, the gain is 1.9 dBi.

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

深圳信测标准技术服务股份有限公司地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn邮箱:cs.rep@emtek.com.cn



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	/	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

Detail of factor for radiated emission

----- End of Report ------

深圳信测标准技术服务股份有限公司 地址:广东省深圳市南山区马家龙工业区69栋 网址:Http://www.emtek.com.cn 邮箱:cs.rep@emtek.com.cn