

SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 1 of 30

# TEST REPORT

**Application No.:** FYCR2304000060AT (SGS SZ NO.: T52310270041EM)

Applicant: SCX DESIGN

Address of Applicant: 44 rue de la Jonquiere Paris 75017 France

Manufacturer: SCX DESIGN

Address of Manufacturer: 44 rue de la Jonquière Paris 75017 France

**Equipment Under Test (EUT):** 

**EUT Name:** Foldable induction mouse pad

Model No.: CTEK079

**FCC ID:** 2A2OH-O26-CTEK079

Standard(s): 47 CFR PART 2, Subpart J, Section 2.1093

47 CFR PART 1, Subpart I, Section 1.1310

**Date of Receipt:** 2023-04-10

**Date of Test:** 2023-11-15 to 2023-11-16

**Date of Issue:** 2023-11-28

Test Result: Pass\*

Winkey Wang
EMC Technical Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.ags.com/en/Terms-and-Conditions.aspx">https://www.ags.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention: I certain and Conditions for Electronic Documents at <a href="https://www.ags.com/en/Terms-and-Conditions/Terms-en-Document.aspx">https://www.ags.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authersticity of testing inspection report & certificate, please contact us at telephone: (85-755)83071443

|Fuyorg|lab. Xinlong TechnoPark, Fenglang Road, Fuyong Subdistrict, Bao'an, Shenzhen, Chira 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 2 of 30

	Revision Record							
Version	Chapter	Date	Modifier	Remark				
01		2023-11-28		Original				

Authorized for issue by:		
	Tree Zhan	
	Tree Zhan/Project Engineer	
	Winkeywarg	
	Winkey Wang/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions</a> for Electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Ter



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Dago

Page: 3 of 30

### 2 Contents

1 COVER PAGE       1         2 CONTENTS       3         3 GENERAL INFORMATION       4         3.1 DETAILS OF E.U.T       4         3.2 DESCRIPTION OF SUPPORT UNITS       4         3.3 TEST LOCATION       5         3.4 TEST FACILITY       5         3.5 DEVIATION FROM STANDARDS       5         3.6 ABNORMALITIES FROM STANDARD CONDITIONS       5         4 EQUIPMENT USED DURING TEST       6         5 RADIO SPECTRUM MATTER TEST RESULTS       7         5.1 MAGNETIC FIELD STRENGTH       7         5.1.1 E.U.T. Operation       8         5.1.2 Test Setup Diagram       8         5.1.3 Measurement Procedure and Data       9				raye
3 GENERAL INFORMATION       4         3.1 DETAILS OF E.U.T.       4         3.2 DESCRIPTION OF SUPPORT UNITS       4         3.3 TEST LOCATION       5         3.4 TEST FACILITY       5         3.5 DEVIATION FROM STANDARDS       5         3.6 ABNORMALITIES FROM STANDARD CONDITIONS       5         4 EQUIPMENT USED DURING TEST       6         5 RADIO SPECTRUM MATTER TEST RESULTS       7         5.1 MAGNETIC FIELD STRENGTH       7         5.1.1 E.U.T. Operation       8         5.1.2 Test Setup Diagram       8	1	CO	VER PAGE	1
3.1       DETAILS OF E.U.T.       4         3.2       DESCRIPTION OF SUPPORT UNITS.       4         3.3       TEST LOCATION.       5         3.4       TEST FACILITY.       5         3.5       DEVIATION FROM STANDARDS.       5         3.6       ABNORMALITIES FROM STANDARD CONDITIONS.       5         4       EQUIPMENT USED DURING TEST.       6         5       RADIO SPECTRUM MATTER TEST RESULTS.       7         5.1       MAGNETIC FIELD STRENGTH.       7         5.1.1       E.U.T. Operation.       8         5.1.2       Test Setup Diagram.       8	2	CON	NTENTS	3
3.1       DETAILS OF E.U.T.       4         3.2       DESCRIPTION OF SUPPORT UNITS.       4         3.3       TEST LOCATION.       5         3.4       TEST FACILITY.       5         3.5       DEVIATION FROM STANDARDS.       5         3.6       ABNORMALITIES FROM STANDARD CONDITIONS.       5         4       EQUIPMENT USED DURING TEST.       6         5       RADIO SPECTRUM MATTER TEST RESULTS.       7         5.1       MAGNETIC FIELD STRENGTH.       7         5.1.1       E.U.T. Operation.       8         5.1.2       Test Setup Diagram.       8	3	GEN	NERAL INFORMATION	4
3.2       DESCRIPTION OF SUPPORT UNITS       4         3.3       TEST LOCATION       5         3.4       TEST FACILITY       5         3.5       DEVIATION FROM STANDARDS       5         3.6       ABNORMALITIES FROM STANDARD CONDITIONS       5         4       EQUIPMENT USED DURING TEST       6         5       RADIO SPECTRUM MATTER TEST RESULTS       7         5.1       MAGNETIC FIELD STRENGTH       7         5.1.1       E.U.T. Operation       8         5.1.2       Test Setup Diagram       8	Ī			
3.3       TEST LOCATION		•	DESCRIPTION OF SUPPORT UNITS	4
3.4       TEST FACILITY			Test Logation	4
3.5       DEVIATION FROM STANDARDS       5         3.6       ABNORMALITIES FROM STANDARD CONDITIONS       5         4       EQUIPMENT USED DURING TEST       6         5       RADIO SPECTRUM MATTER TEST RESULTS       7         5.1       MAGNETIC FIELD STRENGTH       7         5.1.1       E.U.T. Operation       8         5.1.2       Test Setup Diagram       8			TEST LOCATION	
4 EQUIPMENT USED DURING TEST		_	DEVIATION FROM STANDARDS	
4 EQUIPMENT USED DURING TEST			ADNODMALITIES EDOM STANDARD CONDITIONS	5
5       RADIO SPECTRUM MATTER TEST RESULTS       7         5.1       MAGNETIC FIELD STRENGTH       7         5.1.1       E.U.T. Operation       8         5.1.2       Test Setup Diagram       8				
5.1 Magnetic field strength	4	EQU	JIPMENT USED DURING TEST	6
5.1 Magnetic field strength				
5.1.1 E.U.T. Operation	5	RAD	DIO SPECTRUM MATTER TEST RESULTS	7
5.1.1 E.U.T. Operation		5.1	MAGNETIC FIELD STRENGTH	7
5.1.2 Test Setup Diagram		5.1.	1 F.U.T. Operation	8
5.1.3 Measurement Procedure and Data				
		5.1.	3 Measurement Procedure and Data	9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate

Fuyong lab. Xinlong TechnoPark, Fengtang Road, Fuyong Subdistrict, Barian, Sherazhen, Chira 518103 t (86-755) 88663988 f (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・宝安区福永街道凤塘大道鑫龙科技园福永实验室 邮编: 518103 t (86-755) 88663988 f (86-755) 26710594 sgs.china@sgs.com



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 4 of 30

### 3 General Information

### 3.1 Details of E.U.T.

Power supply:	Input 5Vdc/2A or 9Vdc/1.67A via Type-C port,
	Wireless induction output: 5Vdc/1A, 9Vdc/1.1A
Cable(s):	USB Cable: 100cm, unshielded
Operation frequency:	111.80kHz to 172.20kHz
Modulation type:	Load modulation
Antenna type:	Loop Antenna

Remark: The information in this section is provided by the applicant or manufacturer, CCS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

### 3.2 Description of Support Units

Description	Description Manufacturer		Serial No.
Adapter	Apple	A2167	REF. No.SEA01A01
Mobile Phone	HUAWEI	LYA-AL00	REF. No.SEA16C00
iPhone 13	Apple	MLE03ZA/A	REF. No.SEA16Q01





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 5 of 30

#### 3.3 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc. Shenzhen branch.

Fuyong lab. Xinlong TechnoPark,Fengtang Road, Fuyong Subdistrict, Bao'an, Shenzhen, China Tel: +86 755 8866 3988 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 3.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### A2LA (Certificate No. 6606.01)

Compliance Certification Services (Kunshan) Inc. Shenzhen branch is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6606.01.

### • FCC -Designation Number: CN1322

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized as an accredited testing laboratory.

Designation Number: CN1322. Test Firm Registration Number: 718073

### • Innovation, Science and Economic Development Canada

Compliance Certification Services (Kunshan) Inc. Shenzhen branch has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0129.

IC#: 28189.

### 3.5 Deviation from Standards

None

### 3.6 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a></a>
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend of the law Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Termina and the company a



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 6 of 30

## 4 Equipment Used during Test

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Due date
1	3m Anechoic Chamber	CRT	N/A	SEM001-13	2024/7/12
2	Electric and Magnetic Field Analyzer	Narda	EHP-200AC	SEM022-20	2024-03-31

**Test Mode Description** 

Pre-scan / Final test	Mode Code	Description
Pre-scan	00	Charge mode_Keep the EUT charging(5W)
Final test	01	Charge mode_Keep the EUT charging(10W)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 7 of 30

## 5 Radio Spectrum Matter Test Results

### 5.1 Magnetic field strength

Test Requirement: 47 CFR PART 2, Subpart J, Section 2.1093

47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 0/2/4/6/8/10/12/14/16/18/20cm

#### Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)							
	(i) Limits for C	Occupational/Contr	olled Exposure								
0.3-3.0	0.3-3.0 614 1.63 *(100) ≤6										
3.0-30	1842/f	4.89/f	*(900/f²)	<6							
30-300	61.4	0.163	1.0	<6							
300-1,500	/	/	f/300	<6							
1,500-100,000	/	/	5	<6							
(i	i) Limits for Gene	eral Population/Und	controlled Exposure	е							
0.3-1.34	614	1.63	*(100)	<30							
1.34-30	824/f	2.19/f	*(180/f²)	<30							
30-300	27.5	0.073	0.2	<30							
300-1,500	/	/	f/1500	<30							
1,500-100,000	/	/	1.0	<30							

F=frequency in MHz

RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are tested for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, P

<sup>\*=</sup>Plane-wave equivalent power density



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 8 of 30


### 5.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C Humidity: 52.9 % RH Atmospheric Pressure: 1020 mbar

This device has been tested the worst status of full load and the device has been tested with mobile phone at zero charge, intermediate charge, and full charge.

### 5.1.2 Test Setup Diagram

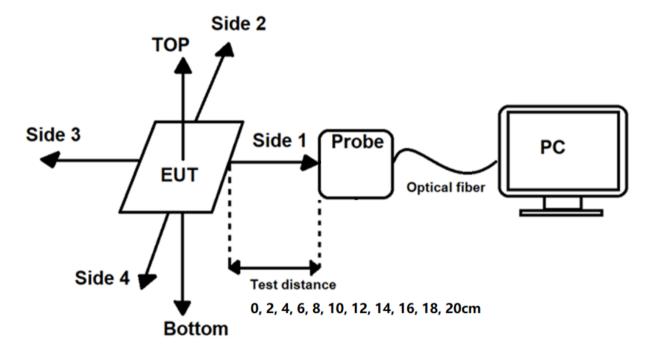

Note1: H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents a thitp://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 9 of 30

#### 5.1.3 Measurement Procedure and Data

Input Voltage=DC 9V; The max output power =10W for each coil.

**Magnetic Field Emissions** 

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (A/m)			50 % Limit (A/m)	10 % Limit (A/m)
			unload	Half load	full load		
121 kHz which is the		Side 1	0.041	0.393	0.475		
worst case		Side 2	0.038	0.385	0.464		
within the 0 operation frequency	Side 3	0.039	0.405	0.491	0.815	0.163	
	Side 4	0.040	0.314	0.379			
range		Тор	0.039	0.222	0.266		

Test Distance		Tool	Probe M	leasure Result(	50 % Limit	10 % Limit	
Operation frequency	(cm)	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.422	0.354	0.175	0.815	0.163
which is the worst case		Side 2	0.413	0.347	0.173		
within the 0 operation frequency	0	Side 3	0.435	0.366	0.186		
		Side 4	0.337	0.284	0.141		
range		Тор	0.234	0.197	0.094		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 10 of 30

### **Electric Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.048	2.095	2.991			
which is the worst case	which is the	Side 2	0.044	1.880	2.680		
within the	0	Side 3	0.046	2.027	2.896	307	61.4
operation frequency range		Side 4	0.044	1.511	2.157		
		Тор	0.040	1.367	1.949		

Operation frequency (cm)	Tool	Probe Measure Result(V/m)			50 % Limit	10 % Limit	
	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)	
117 kHz		Side 1	2.465	2.070	1.282	307	61.4
which is the worst case		Side 2	2.212	1.857	1.151		
within the	0	Side 3	2.388	2.005	1.275		
operation frequency range		Side 4	1.778	1.493	0.943		
		Тор	1.608	1.350	0.857		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 11 of 30

**Magnetic Field Emissions** 

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (A/m)	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.044	0.167	0.435		
which is the worst case		Side 2	0.034	0.161	0.426		
within the	2	Side 3	0.042	0.168	0.444	0.815	0.163
operation	Side 4	0.040	0.132	0.341			
frequency range		Тор	0.040	0.091	0.240		

Operation	eration quency (cm)	Test	Probe N	leasure Result(	50 % Limit	10 % Limit	
frequency		(cm)	Position	zero charge	intermediate charge	full charge	(A/m)
117 kHz		Side 1	0.355	0.301	0.147		
which is the worst case		Side 2	0.349	0.295	0.143		
within the	2	Side 3	0.363	0.307	0.147	0.815	0.163
operation		Side 4	0.280	0.237	0.118		
frequency range		Тор	0.194	0.165	0.078		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, 1443, 1443, 1444, 14



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 12 of 30

### **Electric Field Emissions**

Operation frequency	·		Prob	Probe Measure Result (V/m)			10 % Limit (V/m)
			unload	Half load	full load		
121 kHz	Side 1	0.046	1.768	2.319			
which is the worst case		Side 2	0.043	1.623	2.128		
within the	2	Side 3	0.045	1.685	2.208	307	61.4
operation		Side 4	0.047	1.251	1.642		
frequency range		Тор	0.039	1.214	1.593		

Operation	Operation frequency (cm)	Tool	Probe N	leasure Result	50 % Limit	10 % Limit	
		Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	2.048	1.748	1.054		
which is the worst case		Side 2	1.878	1.603	0.985	307	61.4
within the 2	2	Side 3	1.951	1.665	1.026		
operation		Side 4	1.449	1.237	0.735		
frequency range		Тор	1.404	1.198	0.735		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 13 of 30

### **Magnetic Field Emissions**

Operation frequency	Test Distance (cm)	Test Position				50 % Limit (A/m)	10 % Limit (A/m)
			unload	Half load	full load		
121 kHz		Side 1	0.037	0.267	0.352		
which is the worst case		Side 2	0.034	0.261	0.338		
within the	4	Side 3	0.038	0.270	0.354	0.815	0.163
operation		Side 4	0.044	0.213	0.279		
frequency range		Тор	0.035	0.151	0.196		

Omeration	Test Distance	Tool	Probe M	leasure Result	50 % Limit	10 % Limit	
Operation frequency	(cm)	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.284	0.238	0.122		
which is the worst case		Side 2	0.276	0.231	0.118		
within the	4	Side 3	0.289	0.241	0.122	0.815	0.163
operation		Side 4	0.225	0.188	0.098		
frequency range		Тор	0.156	0.131	0.070		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 14 of 30

### **Electric Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.048	1.249	1.725			
which is the worst case		Side 2	0.039	1.150	1.590		
within the	4	Side 3	0.047	1.183	1.639	307	61.4
operation	Side 4	0.042	0.836	1.159			
frequency range		Тор	0.048	0.829	1.148		

Test Distance	Tool	Probe N	leasure Result	50 % Limit	10 % Limit		
Operation frequency	-	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	1.525	1.234	0.767		
which is the worst case		Side 2	1.403	1.136	0.689		
within the	4	Side 3	1.444	1.169	0.726	307	61.4
operation		Side 4	1.021	0.826	0.532		
frequency range		Тор	1.009	0.817	0.503		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 15 of 30

**Magnetic Field Emissions** 

Operation frequency	Test Distance (cm)	Test Position	Prob	50 % Limit (A/m)	10 % Limit (A/m)		
			unload	Half load	full load		
121 kHz	Side 1	0.043	0.223	0.301			
which is the worst case		Side 2	0.041	0.224	0.296		
within the	6	Side 3	0.034	0.232	0.303	0.815	0.163
operation	Side 4	0.041	0.185	0.247			
frequency range		Тор	0.038	0.132	0.169		

Oneration	Operation frequency (cm)	Tool	Probe N	leasure Result(	50 % Limit	10 % Limit	
		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.242	0.202	0.114		
which is the worst case		Side 2	0.241	0.200	0.115		
within the	6	Side 3	0.247	0.205	0.110	0.815	0.163
operation		Side 4	0.197	0.164	0.091		
frequency range		Тор	0.136	0.114	0.063		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 16 of 30

### **Electric Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	24		sult	50 % Limit (V/m)	10 % Limit (V/m)
			unload	Half load	full load		
121 kHz		Side 1	0.042	0.875	1.169		
which is the worst case		Side 2	0.047	0.799	1.068		
within the	6	Side 3	0.043	0.840	1.124	307	61.4
operation frequency		Side 4	0.050	0.566	0.758		
range		Тор	0.049	0.550	0.740		

Oneration	Test Distance	Tool	Probe N	leasure Result	50 % Limit	10 % Limit	
Operation frequency	(cm)	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz	Side 1	1.033	0.864	0.534			
which is the worst case		Side 2	0.941	0.787	0.509		
within the	6	Side 3	0.990	0.828	0.533	307	61.4
operation		Side 4	0.667	0.558	0.357		
frequency range		Тор	0.649	0.543	0.322		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 17 of 30

**Magnetic Field Emissions** 

Operation frequency (cm)		Test Position	Probe Measure Result (A/m)		50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.041	0.192	0.250			
which is the worst case		Side 2	0.033	0.188	0.241		
within the	8	Side 3	0.036	0.199	0.259	0.815	0.163
operation		Side 4	0.042	0.159	0.210		
frequency range		Тор	0.037	0.110	0.145		

Test Distance	Tool	Probe N	leasure Result(	50 % Limit	10 % Limit		
Operation frequency		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.204	0.171	0.090		0.163
which is the worst case		Side 2	0.196	0.165	0.095	0.815	
within the	8	Side 3	0.208	0.174	0.102		
operation		Side 4	0.168	0.140	0.074		
frequency range		Тор	0.115	0.097	0.059		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/T



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 18 of 30

### **Electric Field Emissions**

Operation frequency			Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.048	0.562	0.731			
which is the worst case		Side 2	0.047	0.486	0.975		
within the	8	Side 3	0.040	0.504	1.077	307	61.4
operation		Side 4	0.041	0.333	0.747		
frequency range		Тор	0.041	0.339	0.847		

Test Distance	Tool	Probe Measure Result(V/m)			50 % Limit	10 % Limit	
Operation frequency		(cm)	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	0.644	0.555	0.338	307	
which is the worst case		Side 2	0.861	0.480	0.282		61.4
within the	8	Side 3	0.950	0.497	0.298		
operation		Side 4	0.658	0.326	0.194		
frequency range		Тор	0.747	0.334	0.214		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 19 of 30

### **Magnetic Field Emissions**

Operation frequency	Test Distance (cm)	Test Position			50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.045	0.159	0.208			
which is the worst case		Side 2	0.035	0.152	0.202	0.815	0.163
within the		Side 3	0.036	0.158	0.208		
operation		Side 4	0.038	0.132	0.169		
frequency range		Тор	0.034	0.091	0.124		

Operation		Toot	Probe N	leasure Result(	50 % Limit	10 % Limit	
Operation frequency		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz	Side 1	0.167	0.140	0.076			
which is the		Side 2	0.162	0.136	0.082		
worst case within the 10	Side 3	0.167	0.140	0.074	0.815	0.163	
operation		Side 4	0.135	0.113	0.069		
frequency range		Тор	0.097	0.081	0.042		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 20 of 30

### **Electric Field Emissions**

Operation frequency	. ' / \		Prob	Probe Measure Result (V/m)			10 % Limit (V/m)
			unload	Half load	full load		
121 kHz	Side 1	0.043	0.375	0.506			
which is the worst case		Side 2	0.041	0.326	0.438		
within the	10	Side 3	0.048	0.336	0.453	307	61.4
operation		Side 4	0.048	0.222	0.298		
frequency range		Тор	0.041	0.226	0.305		

Test Distance	Tool	Probe N	leasure Result	50 % Limit	10 % Limit		
frequency	Deration requency (cm)	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	0.445	0.369	0.233	307	
which is the worst case		Side 2	0.385	0.319	0.184		61.4
within the 10	10	Side 3	0.399	0.330	0.213		
operation		Side 4	0.262	0.217	0.143		
frequency range		Тор	0.268	0.222	0.115		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 21 of 30

**Magnetic Field Emissions** 

Operation frequency	Test Distance (cm)	Test Position	4.4.3				10 % Limit (A/m)
			unload	Half load	full load		
121 kHz		Side 1	0.041	0.120	0.157		
which is the worst case		Side 2	0.033	0.117	0.150		
within the	12	Side 3	0.036	0.119	0.154	0.815	0.163
operation		Side 4	0.042	0.097	0.124		
frequency range		Тор	0.038	0.069	0.090		

Oneration	Operation frequency (cm)	Tool	Probe N	leasure Result(	(A/m)	50 % Limit	10 % Limit
		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.138	0.115	0.063		
which is the worst case		Side 2	0.133	0.113	0.068		
within the	12	Side 3	0.136	0.116	0.061	0.815	0.163
operation		Side 4	0.110	0.093	0.057		
frequency range		Тор	0.079	0.067	0.035		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 22 of 30

### **Electric Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz	Side 1	0.046	0.283	0.375			
which is the worst case		Side 2	0.043	0.249	0.323		
within the	12	Side 3	0.044	0.255	0.337	307	61.4
operation	Side 4	0.048	0.169	0.222			
frequency range		Тор	0.044	0.173	0.227		

Test Distance	Tool	Probe N	leasure Result	50 % Limit	10 % Limit		
Operation frequency		Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	0.330	0.273	0.172	307	
which is the worst case		Side 2	0.284	0.237	0.135		61.4
within the	12	Side 3	0.296	0.244	0.158		
operation		Side 4	0.194	0.161	0.106		
frequency range		Тор	0.198	0.164	0.085		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 23 of 30

**Magnetic Field Emissions** 

Operation frequency (cm)		Test Position	Probe Measure Result n (A/m)		50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.039	0.106	0.124		
which is the worst case		Side 2	0.036	0.100	0.121		
within the	14	Side 3	0.043	0.102	0.122	0.815	0.163
operation		Side 4	0.035	0.085	0.101		
frequency range	Тор	0.038	0.064	0.071			

Test Distance	Toot	Probe N	leasure Result(	50 % Limit	10 % Limit		
Operation frequency		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.110	0.092	0.051		0.163
which is the worst case		Side 2	0.106	0.089	0.054		
within the operation	14	Side 3	0.108	0.091	0.049	0.815	
	Side 4	0.088	0.073	0.044			
frequency range		Тор	0.062	0.052	0.028		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/T



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 24 of 30

### **Electric Field Emissions**

Operation frequency			Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.041	0.217	0.292		
which is the worst case		Side 2	0.040	0.192	0.253	307	61.4
within the 14	14	Side 3	0.043	0.195	0.264		
operation		Side 4	0.040	0.131	0.175		
frequency range		Тор	0.042	0.132	0.179	1	

Test Distance	Toot	Probe N	leasure Result(	50 % Limit	10 % Limit		
Operation frequency	-	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	0.257	0.212	0.134		
which is the worst case		Side 2	0.221	0.186	0.106	307	61.4
within the operation	14	Side 3	0.230	0.191	0.124		
		Side 4	0.152	0.126	0.084		
frequency range		Тор	0.155	0.129	0.065		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 25 of 30

### **Magnetic Field Emissions**

Operation frequency	Test Distance (cm)	Test Position	Prob	Probe Measure Result (A/m)			10 % Limit (A/m)
			unload	Half load	full load		
121 kHz		Side 1	0.041	0.076	0.097		
which is the worst case		Side 2	0.040	0.074	0.094	0.815	
within the	16	Side 3	0.034	0.074	0.095		0.163
operation		Side 4	0.037	0.060	0.079		
frequency range		Тор	0.035	0.042	0.056		

Distan	Test Distance	Tool	Probe N	leasure Result(	50 % Limit	10 % Limit	
frequency	Operation frequency (cm)	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.086	0.073	0.041	0.815	0.163
which is the worst case		Side 2	0.084	0.071	0.042		
within the operation	10	Side 3	0.085	0.071	0.040		
		Side 4	0.069	0.057	0.036		
frequency range		Тор	0.049	0.040	0.022		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 26 of 30

### **Electric Field Emissions**

Operation frequency	·		Probe Measure Result (V/m)		50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.041	0.168	0.222		
which is the worst case		Side 2	0.042	0.148	0.190	307	
within the	16	Side 3	0.042	0.152	0.200		61.4
operation		Side 4	0.043	0.099	0.133		
frequency range		Тор	0.044	0.102	0.135		

Operation frequency (cm)		T	Probe N	leasure Result	50 % Limit	10 % Limit	
	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)	
117 kHz		Side 1	0.195	0.161	0.102	307	
which is the worst case		Side 2	0.167	0.142	0.081		61.4
within the operation	16	Side 3	0.176	0.146	0.094		
		Side 4	0.116	0.095	0.063		
frequency range		Тор	0.118	0.097	0.049		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, 1443, 1443, 1444, 14



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 27 of 30

**Magnetic Field Emissions** 

Operation frequency (cm)		Test Position	Probe Measure Result (A/m)		50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.039	0.040	0.045		0.163
which is the worst case		Side 2	0.035	0.046	0.052	0.815	
within the 18 operation frequency range	18	Side 3	0.038	0.047	0.058		
	Side 4	0.038	0.048	0.058			
		Тор	0.042	0.047	0.057		

Operation	Operation frequency (cm)	Toot	Probe Measure Result		(A/m)	50 % Limit	10 % Limit
•		Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz		Side 1	0.071	0.061	0.033	0.815	0.163
which is the worst case		Side 2	0.070	0.060	0.034		
within the operation	18	Side 3	0.071	0.059	0.033		
		Side 4	0.057	0.047	0.029		
frequency range		Тор	0.039	0.033	0.017		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions/T



SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 28 of 30

### **Electric Field Emissions**

Operation frequency	·		Prob	e Measure Res (V/m)	50 % Limit (V/m)	10 % Limit (V/m)	
			unload	Half load	full load		
121 kHz		Side 1	0.046	0.126	0.169		
which is the worst case		Side 2	0.043	0.111	0.143	307	61.4
within the 18 operation frequency range	18	Side 3	0.040	0.113	0.150		
	Side 4	0.040	0.074	0.100			
		Тор	0.041	0.078	0.101		

Test Distance	Tool	Probe N	leasure Result(	50 % Limit	10 % Limit		
frequency	Operation frequency (cm)	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz		Side 1	0.147	0.121	0.076	307	61.4
which is the worst case		Side 2	0.125	0.106	0.061		
within the	18	Side 3	0.131	0.108	0.071		
operation	Side 4	0.087	0.070	0.048			
frequency range		Тор	0.088	0.074	0.037		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 29 of 30

#### **Magnetic Field Emissions**

Operation frequency				ult	50 % Limit (A/m)	10 % Limit (A/m)	
			unload	Half load	full load		
121 kHz which is the worst case within the operation frequency range		Side 1	0.049	0.049	0.051		
		Side 2	0.039	0.042	0.053		
	20	Side 3	0.040	0.053	0.059	0.815	0.163
		Side 4	0.045	0.033	0.039		
		Тор	0.037	0.033	0.040		

Operation frequency	Test Distance	Tool	Probe N	leasure Result(	50 % Limit	10 % Limit	
	(cm)	Test Position	zero charge	intermediate charge	full charge	(A/m)	(A/m)
117 kHz which is the worst case within the operation frequency range		Side 1	0.064	0.054	0.027		
		Side 2	0.064	0.054	0.025		
	20	Side 3	0.063	0.053	0.029	0.815	0.163
		Side 4	0.050	0.042	0.020		
		Тор	0.040	0.034	0.018		





SZCCS-TRF-01 Rev. A/0 Aug01,2022

Report No.: FYCR230400006002

Page: 30 of 30

### **Electric Field Emissions**

Operation frequency	( )				sult	50 % Limit (V/m)	10 % Limit (V/m)
			unload	Half load	full load		
121 kHz which is the worst case within the operation frequency range		Side 1	0.043	0.104	0.138		
		Side 2	0.029	0.090	0.116		
	20	Side 3	0.040	0.092	0.122	307	61.4
		Side 4	0.044	0.060	0.081		
		Тор	0.043	0.062	0.082	İ	

Operation frequency	Test Distance	Toot	Probe N	leasure Result	50 % Limit	10 % Limit	
	(cm)	Test Position	zero charge	intermediate charge	full charge	(V/m)	(V/m)
117 kHz which is the worst case within the operation frequency range		Side 1	0.120	0.099	0.063		
		Side 2	0.101	0.086	0.050		
	20	Side 3	0.106	0.087	0.058	307	61.4
		Side 4	0.070	0.057	0.039		
		Тор	0.071	0.059	0.030		

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions-and-Conditions-and