




Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

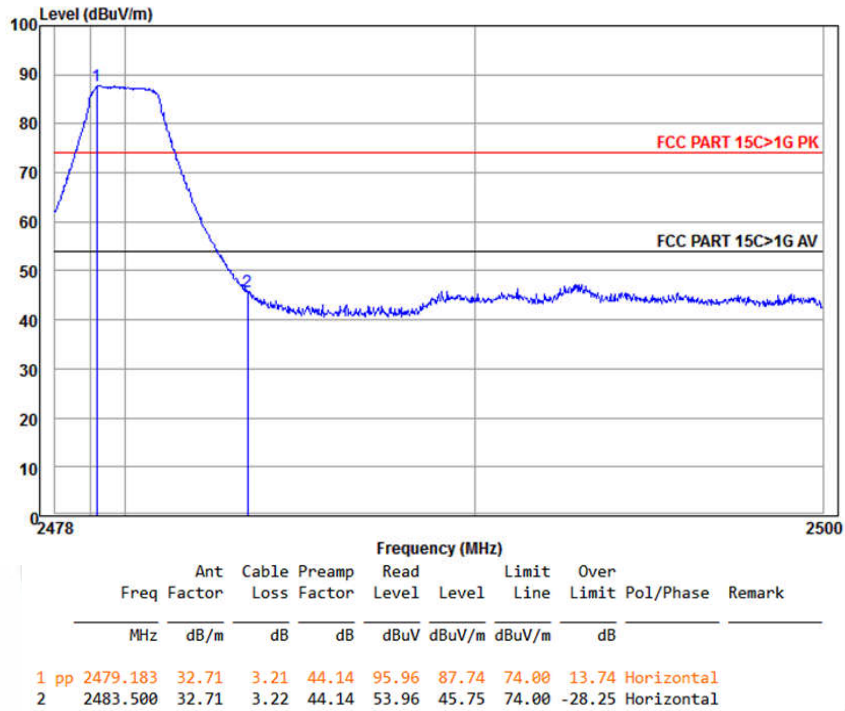

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

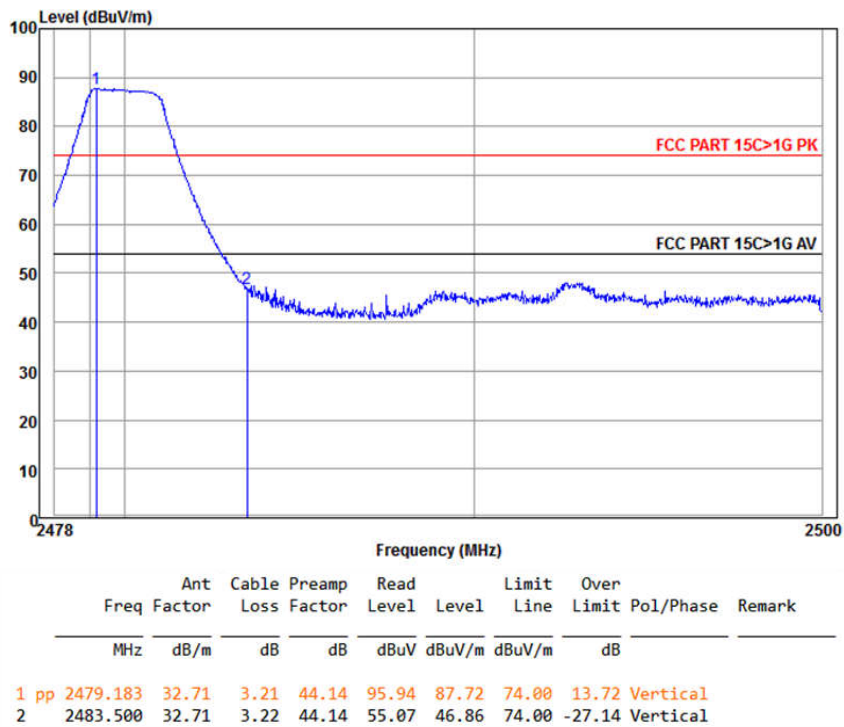


Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

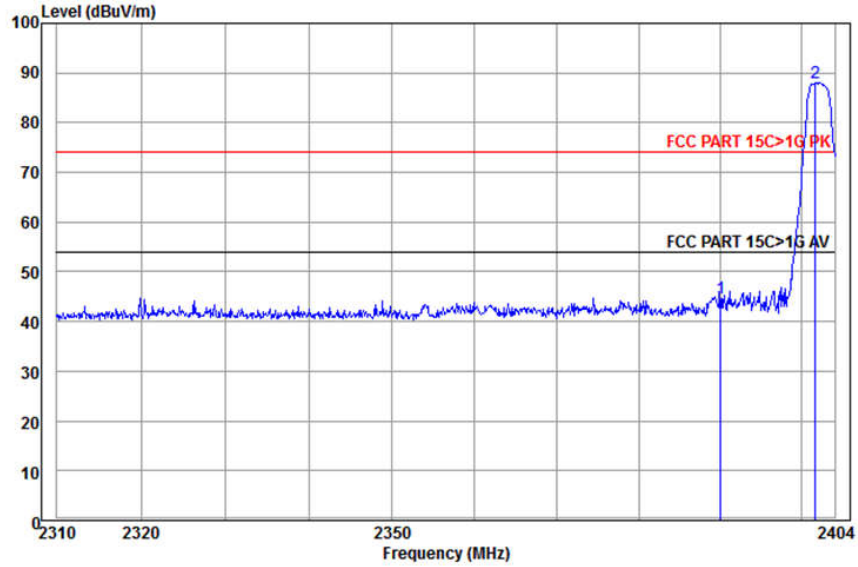


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	2390.000	32.53	3.15	44.03	53.11	44.76	74.00	-29.24	Horizontal
2 pp	2401.604	32.56	3.16	44.04	96.34	88.02	74.00	14.02	Horizontal

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

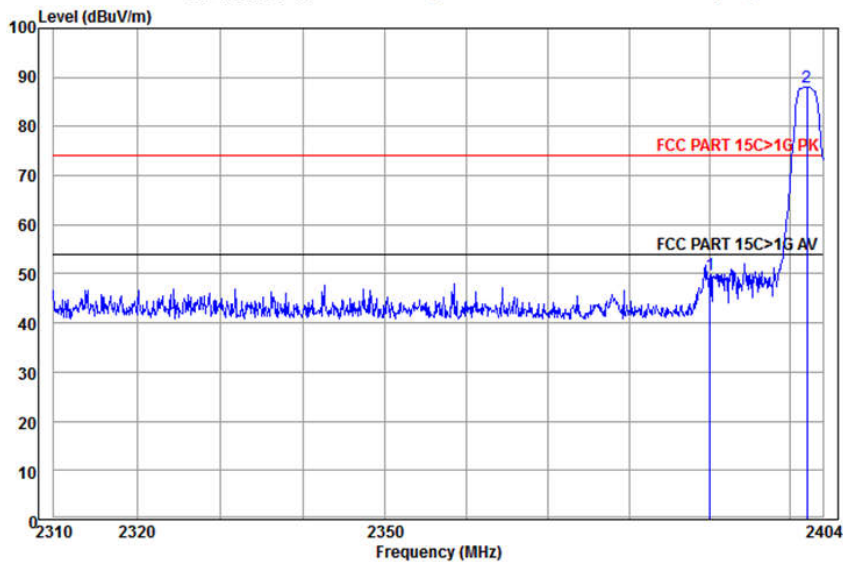


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	2390.000	32.53	3.15	44.03	58.28	49.93	74.00	-24.07	Vertical
2 pp	2402.083	32.56	3.16	44.04	96.31	87.99	74.00	13.99	Vertical

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

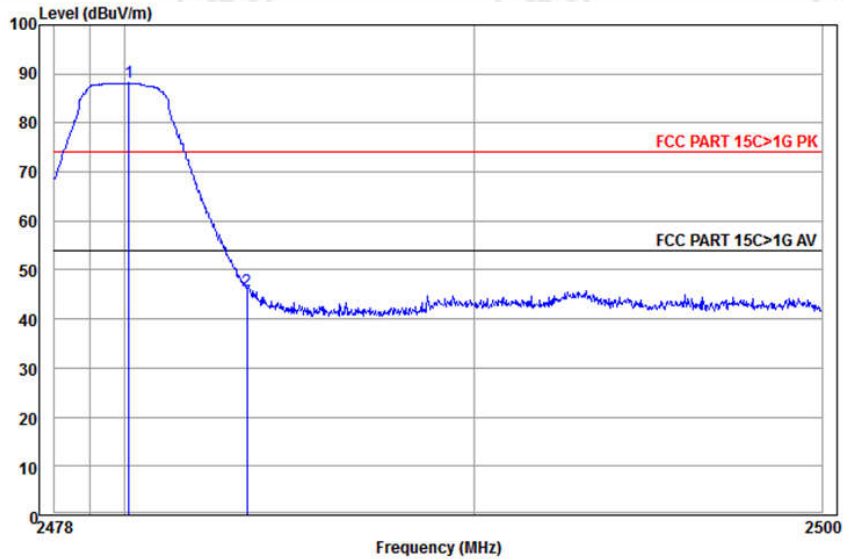


	Ant Freq	Cable Factor	Preamp Factor	Read Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.125	32.71	3.22	44.14	96.36	88.15	74.00	14.15 Horizontal
2	2483.500	32.71	3.22	44.14	53.99	45.78	74.00	-28.22 Horizontal

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

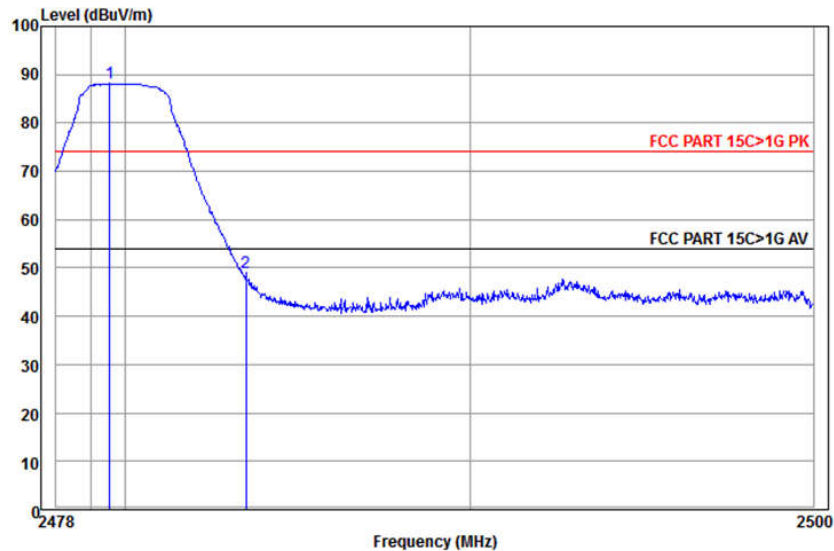


	Ant Freq	Cable Factor	Preamp Factor	Read Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.556	32.71	3.22	44.14	96.39	88.18	74.00	14.18 Vertical
2	2483.500	32.71	3.22	44.14	57.26	49.05	74.00	-24.95 Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

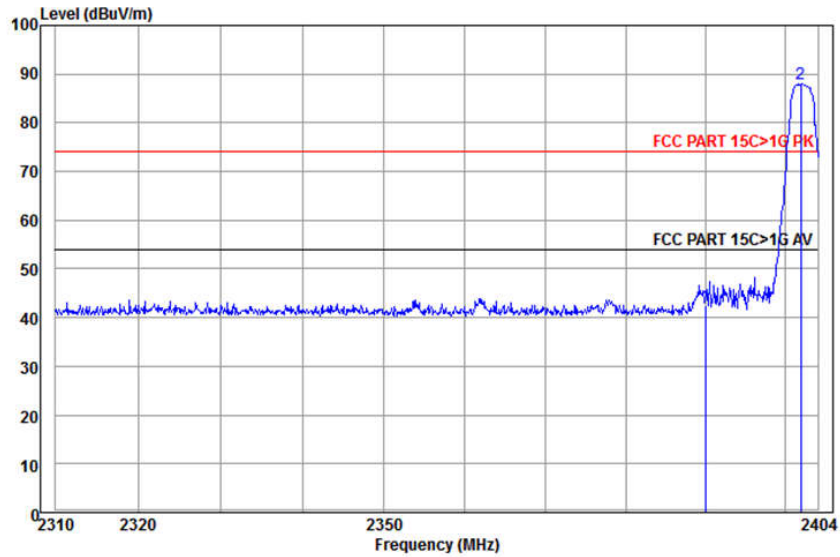


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	50.81	42.46	74.00	-31.54	Horizontal
2 pp	2401.891	32.56	3.16	44.04	96.21	87.89	74.00	13.89	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

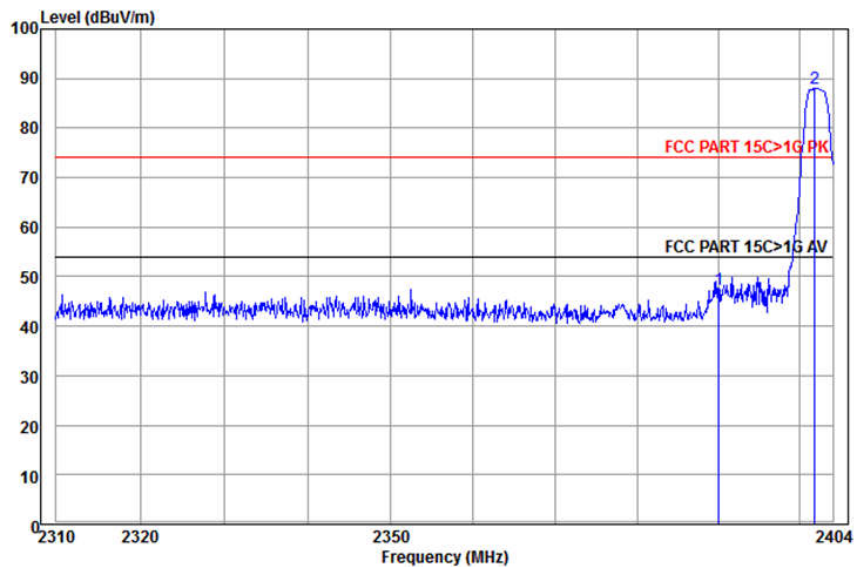


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.15	44.03	55.83	47.48	74.00	-26.52	Vertical
2 pp	2401.796	32.56	3.16	44.04	96.27	87.95	74.00	13.95	Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

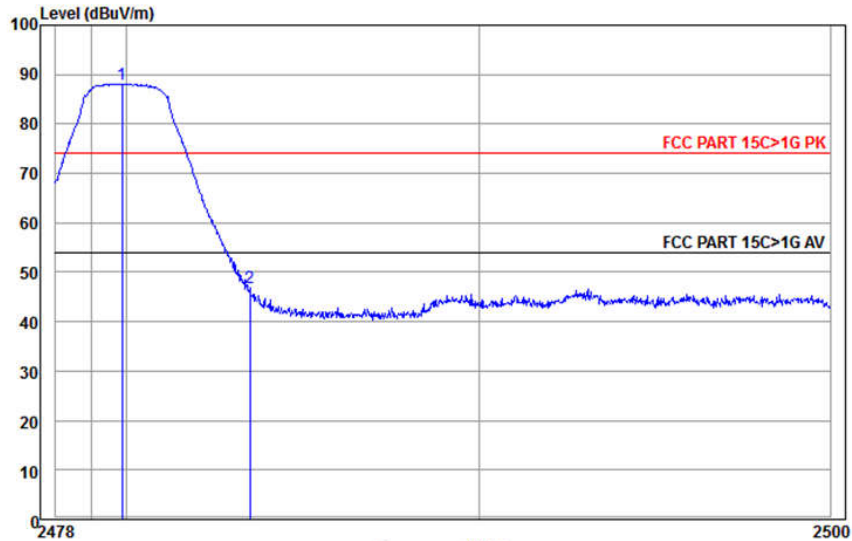

		Frequency (MHz)							
	Ant	Cable	Preamp	Read	Limit	Over			
	Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	pp 2479.884	32.71	3.22	44.14	96.24	88.03	74.00	14.03	Horizontal
2	2483.500	32.71	3.22	44.14	55.07	46.86	74.00	-27.14	Horizontal

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

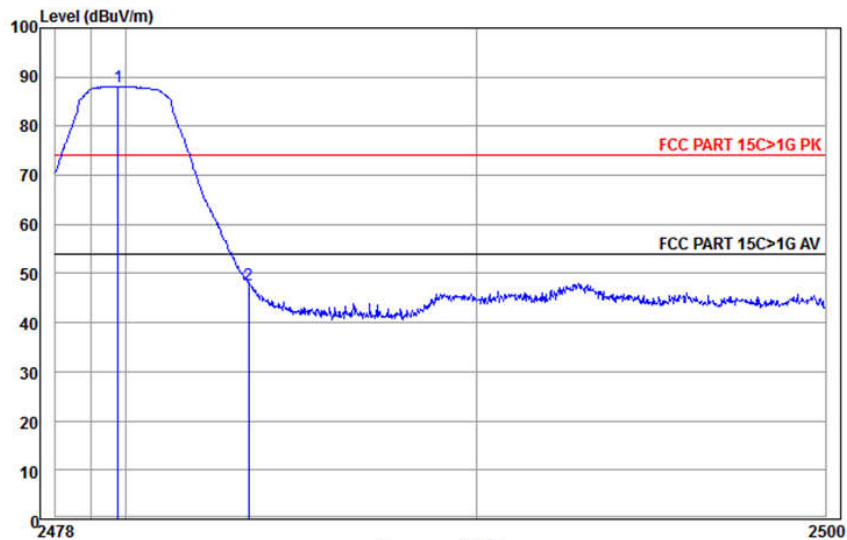

		Frequency (MHz)							
	Ant	Cable	Preamp	Read	Limit	Over			
	Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark	
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	pp 2479.775	32.71	3.22	44.14	96.26	88.05	74.00	14.05	Vertical
2	2483.500	32.71	3.22	44.14	55.97	47.76	74.00	-26.24	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

Appendix L): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average


Test Procedure:
<p>Below 1GHz test procedure as below:</p> <p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>Above 1GHz test procedure as below:</p> <p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3


Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

30MHz~1GHz (QP)

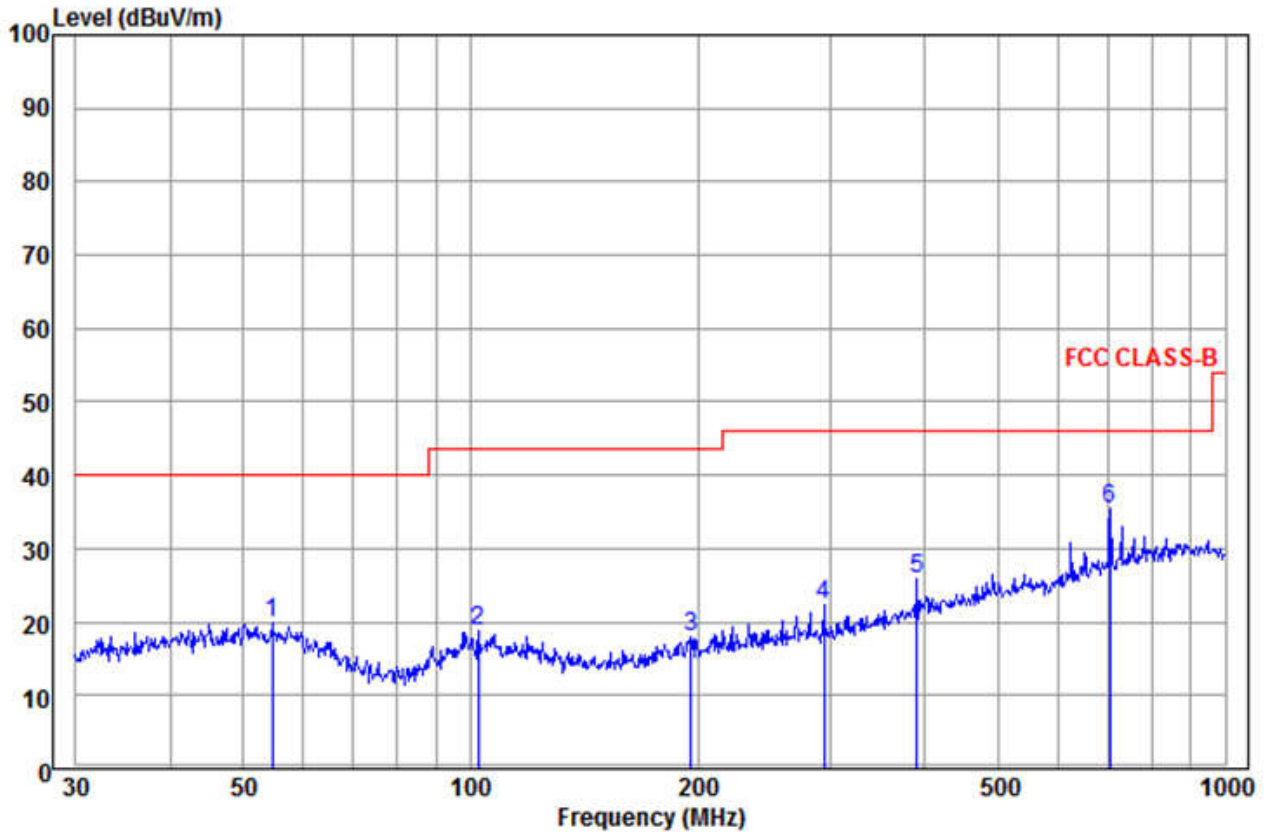

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	54.643	14.47	0.16	5.19	19.82	40.00	-20.18	Horizontal
2	102.360	13.00	0.59	5.34	18.93	43.50	-24.57	Horizontal
3	195.822	11.46	1.06	5.39	17.91	43.50	-25.59	Horizontal
4	294.114	13.38	1.10	7.96	22.44	46.00	-23.56	Horizontal
5	390.723	16.04	1.32	8.61	25.97	46.00	-20.03	Horizontal
6 pp	704.226	20.73	2.06	12.61	35.40	46.00	-10.60	Horizontal

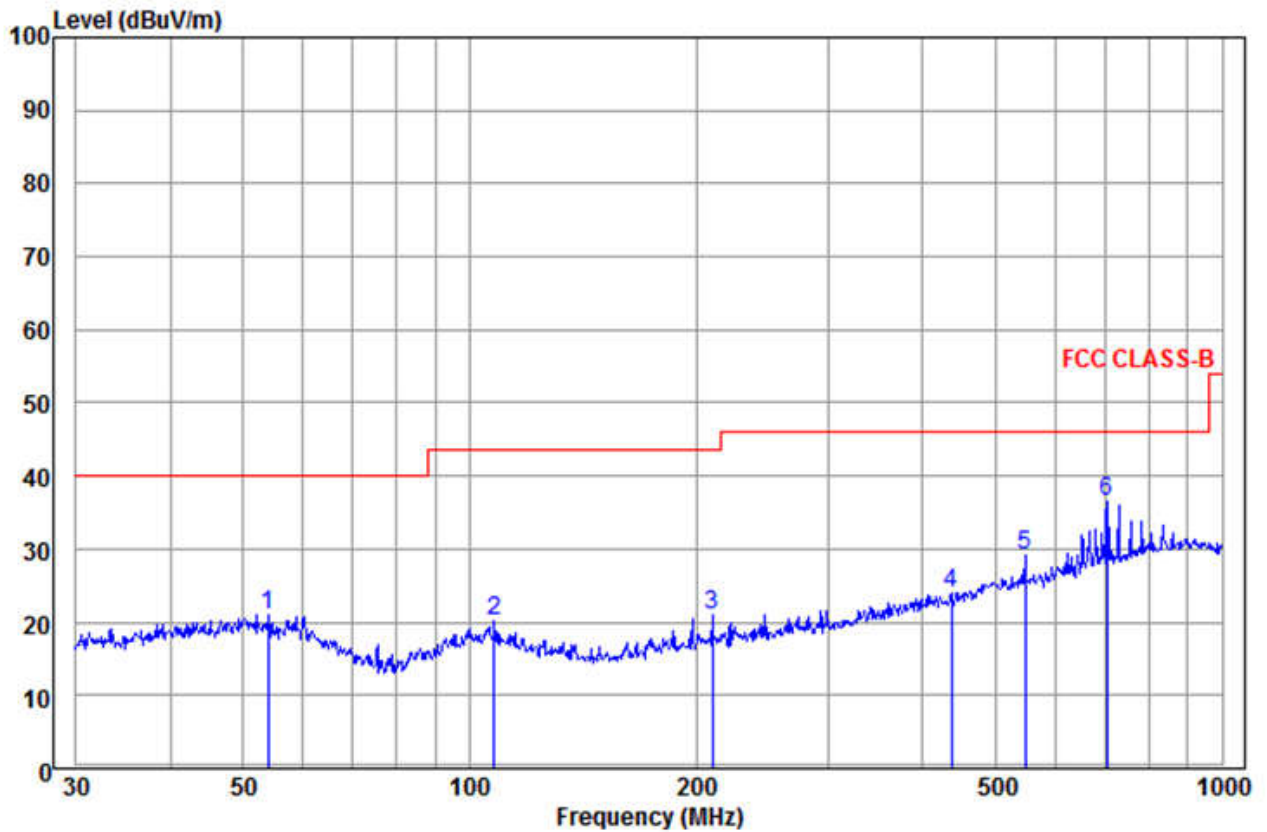

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	53.882	14.57	0.15	6.30	21.02	40.00	-18.98	Vertical
2	107.888	12.54	0.59	6.93	20.06	43.50	-23.44	Vertical
3	210.048	11.78	1.15	8.13	21.06	43.50	-22.44	Vertical
4	437.120	16.90	1.43	5.58	23.91	46.00	-22.09	Vertical
5	547.098	18.59	1.54	9.04	29.17	46.00	-16.83	Vertical
6 pp	704.226	20.73	2.06	13.66	36.45	46.00	-9.55	Vertical

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2055.225	31.83	2.91	43.58	49.33	40.49	74.00	-33.51	Pass	Horizontal
3200.502	33.42	4.21	44.68	55.82	48.77	74.00	-25.23	Pass	Horizontal
3795.660	32.95	5.99	44.62	50.66	44.98	74.00	-29.02	Pass	Horizontal
4804.000	34.69	6.72	44.60	47.65	44.46	74.00	-29.54	Pass	Horizontal
7206.000	36.42	8.35	44.77	47.01	47.01	74.00	-26.99	Pass	Horizontal
9608.000	37.88	7.67	45.58	46.46	46.43	74.00	-27.57	Pass	Horizontal
2076.259	31.88	2.92	43.61	50.04	41.23	74.00	-32.77	Pass	Vertical
3200.502	33.42	4.21	44.68	53.00	45.95	74.00	-28.05	Pass	Vertical
3834.506	32.92	6.10	44.61	47.97	42.38	74.00	-31.62	Pass	Vertical
4804.000	34.69	6.72	44.60	45.53	42.34	74.00	-31.66	Pass	Vertical
7206.000	36.42	8.35	44.77	50.15	50.15	74.00	-23.85	Pass	Vertical
9608.000	37.88	7.67	45.58	44.25	44.22	74.00	-29.78	Pass	Vertical

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2092.175	31.91	2.93	43.63	48.57	39.78	74.00	-34.22	Pass	Horizontal
3258.042	33.37	4.39	44.67	55.18	48.27	74.00	-25.73	Pass	Horizontal
3776.385	32.96	5.94	44.62	51.37	45.65	74.00	-28.35	Pass	Horizontal
4882.000	34.85	6.74	44.60	49.21	46.20	74.00	-27.80	Pass	Horizontal
7323.000	36.43	8.45	44.87	49.46	49.47	74.00	-24.53	Pass	Horizontal
9764.000	38.05	7.53	45.55	45.26	45.29	74.00	-28.71	Pass	Horizontal
2065.715	31.85	2.91	43.60	48.81	39.97	74.00	-34.03	Pass	Vertical
3258.042	33.37	4.39	44.67	53.14	46.23	74.00	-27.77	Pass	Vertical
3766.785	32.97	5.91	44.62	50.11	44.37	74.00	-29.63	Pass	Vertical
4882.000	34.85	6.74	44.60	52.74	49.73	74.00	-24.27	Pass	Vertical
7323.000	36.43	8.45	44.87	50.87	50.88	74.00	-23.12	Pass	Vertical
9764.000	38.05	7.53	45.55	48.37	48.40	74.00	-25.60	Pass	Vertical

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2108.213	31.95	2.95	43.66	48.55	39.79	74.00	-34.21	Pass	Horizontal
3192.366	33.43	4.18	44.68	54.48	47.41	74.00	-26.59	Pass	Horizontal
3824.757	32.92	6.07	44.62	50.30	44.67	74.00	-29.33	Pass	Horizontal
4960.000	35.02	6.75	44.60	46.13	43.30	74.00	-30.70	Pass	Horizontal
7440.000	36.45	8.55	44.97	46.05	46.08	74.00	-27.92	Pass	Horizontal
9920.000	38.22	7.41	45.52	46.16	46.27	74.00	-27.73	Pass	Horizontal
2055.225	31.83	2.91	43.58	49.78	40.94	74.00	-33.06	Pass	Vertical
3308.185	33.33	4.55	44.67	54.02	47.23	74.00	-26.77	Pass	Vertical
3993.903	32.80	6.52	44.60	49.36	44.08	74.00	-29.92	Pass	Vertical
4960.000	35.02	6.75	44.60	52.45	49.62	74.00	-24.38	Pass	Vertical
7440.000	36.45	8.55	44.97	45.52	45.55	74.00	-28.45	Pass	Vertical
9920.000	38.22	7.41	45.52	43.57	43.68	74.00	-30.32	Pass	Vertical

Worse case mode:		π /4DQPSK(2-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2118.973	31.97	2.96	43.67	49.33	40.59	74.00	-33.41	Pass	Horizontal
3200.502	33.42	4.21	44.68	57.11	50.06	74.00	-23.94	Pass	Horizontal
4245.509	33.41	6.60	44.60	50.05	45.46	74.00	-28.54	Pass	Horizontal
4804.000	34.69	6.72	44.60	47.81	44.62	74.00	-29.38	Pass	Horizontal
7206.000	36.42	8.35	44.77	48.49	48.49	74.00	-25.51	Pass	Horizontal
9608.000	37.88	7.67	45.58	50.05	50.02	74.00	-23.98	Pass	Horizontal
2044.788	31.80	2.90	43.57	49.72	40.85	74.00	-33.15	Pass	Vertical
3200.502	33.42	4.21	44.68	55.01	47.96	74.00	-26.04	Pass	Vertical
3776.385	32.96	5.94	44.62	50.51	44.79	74.00	-29.21	Pass	Vertical
4804.000	34.69	6.72	44.60	47.49	44.30	74.00	-29.70	Pass	Vertical
7206.000	36.42	8.35	44.77	51.42	51.42	74.00	-22.58	Pass	Vertical
9608.000	37.88	7.67	45.58	48.77	48.74	74.00	-25.26	Pass	Vertical

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2102.853	31.93	2.94	43.65	48.86	40.08	74.00	-33.92	Pass	Horizontal
3258.042	33.37	4.39	44.67	56.08	49.17	74.00	-24.83	Pass	Horizontal
4202.500	33.31	6.59	44.60	49.42	44.72	74.00	-29.28	Pass	Horizontal
4882.000	34.85	6.74	44.60	48.53	45.52	74.00	-28.48	Pass	Horizontal
7323.000	36.43	8.45	44.87	48.43	48.44	74.00	-25.56	Pass	Horizontal
9764.000	38.05	7.53	45.55	47.97	48.00	74.00	-26.00	Pass	Horizontal
1809.605	31.41	2.77	43.67	49.56	40.07	74.00	-33.93	Pass	Vertical
3258.042	33.37	4.39	44.67	53.83	46.92	74.00	-27.08	Pass	Vertical
4004.083	32.81	6.54	44.60	49.54	44.29	74.00	-29.71	Pass	Vertical
4882.000	34.85	6.74	44.60	52.79	49.78	74.00	-24.22	Pass	Vertical
7323.000	36.43	8.45	44.87	50.46	50.47	74.00	-23.53	Pass	Vertical
9764.000	38.05	7.53	45.55	46.70	46.73	74.00	-27.27	Pass	Vertical

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2092.175	31.91	2.93	43.63	49.46	40.67	74.00	-33.33	Pass	Horizontal
3308.185	33.33	4.55	44.67	55.10	48.31	74.00	-25.69	Pass	Horizontal
4399.537	33.78	6.63	44.60	49.55	45.36	74.00	-28.64	Pass	Horizontal
4960.000	35.02	6.75	44.60	48.43	45.60	74.00	-28.40	Pass	Horizontal
7440.000	36.45	8.55	44.97	48.52	48.55	74.00	-25.45	Pass	Horizontal
9920.000	38.22	7.41	45.52	48.11	48.22	74.00	-25.78	Pass	Horizontal
2034.405	31.78	2.89	43.55	49.05	40.17	74.00	-33.83	Pass	Vertical
3308.185	33.33	4.55	44.67	56.42	49.63	74.00	-24.37	Pass	Vertical
3738.129	32.99	5.83	44.62	50.27	44.47	74.00	-29.53	Pass	Vertical
4960.000	35.02	6.75	44.60	53.61	50.78	74.00	-23.22	Pass	Vertical
7440.000	36.45	8.55	44.97	48.02	48.05	74.00	-25.95	Pass	Vertical
9920.000	38.22	7.41	45.52	48.06	48.17	74.00	-25.83	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2086.856	31.90	2.93	43.63	49.00	40.20	74.00	-33.80	Pass	Horizontal
3200.502	33.42	4.21	44.68	55.25	48.20	74.00	-25.80	Pass	Horizontal
4004.083	32.81	6.54	44.60	49.78	44.53	74.00	-29.47	Pass	Horizontal
4804.000	34.69	6.72	44.60	47.37	44.18	74.00	-29.82	Pass	Horizontal
7206.000	36.42	8.35	44.77	47.92	47.92	74.00	-26.08	Pass	Horizontal
9608.000	37.88	7.67	45.58	46.72	46.69	74.00	-27.31	Pass	Horizontal
1832.785	31.45	2.78	43.65	49.10	39.68	74.00	-34.32	Pass	Vertical
3200.502	33.42	4.21	44.68	54.17	47.12	74.00	-26.88	Pass	Vertical
3883.622	32.88	6.23	44.61	49.84	44.34	74.00	-29.66	Pass	Vertical
4804.000	34.69	6.72	44.60	47.44	44.25	74.00	-29.75	Pass	Vertical
7206.000	36.42	8.35	44.77	50.72	50.72	74.00	-23.28	Pass	Vertical
9608.000	37.88	7.67	45.58	46.19	46.16	74.00	-27.84	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2086.856	31.90	2.93	43.63	48.95	40.15	74.00	-33.85	Pass	Horizontal
3258.042	33.37	4.39	44.67	55.24	48.33	74.00	-25.67	Pass	Horizontal
4055.371	32.94	6.55	44.60	49.42	44.31	74.00	-29.69	Pass	Horizontal
4882.000	34.85	6.74	44.60	47.77	44.76	74.00	-29.24	Pass	Horizontal
7323.000	36.43	8.45	44.87	49.42	49.43	74.00	-24.57	Pass	Horizontal
9764.000	38.05	7.53	45.55	46.99	47.02	74.00	-26.98	Pass	Horizontal
2008.676	31.72	2.87	43.51	48.68	39.76	74.00	-34.24	Pass	Vertical
3258.042	33.37	4.39	44.67	55.06	48.15	74.00	-25.85	Pass	Vertical
3786.010	32.95	5.96	44.62	50.81	45.10	74.00	-28.90	Pass	Vertical
4882.000	34.85	6.74	44.60	47.48	44.47	74.00	-29.53	Pass	Vertical
7323.000	36.43	8.45	44.87	50.86	50.87	74.00	-23.13	Pass	Vertical
9764.000	38.05	7.53	45.55	46.63	46.66	74.00	-27.34	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
2108.213	31.95	2.95	43.66	48.96	40.20	74.00	-33.80	Pass	Horizontal
3308.185	33.33	4.55	44.67	53.87	47.08	74.00	-26.92	Pass	Horizontal
3747.656	32.98	5.86	44.62	50.49	44.71	74.00	-29.29	Pass	Horizontal
4960.000	35.02	6.75	44.60	48.90	46.07	74.00	-27.93	Pass	Horizontal
7440.000	36.45	8.55	44.97	47.94	47.97	74.00	-26.03	Pass	Horizontal
9920.000	38.22	7.41	45.52	46.34	46.45	74.00	-27.55	Pass	Horizontal
2102.853	31.93	2.94	43.65	48.81	40.03	74.00	-33.97	Pass	Vertical
3308.185	33.33	4.55	44.67	55.61	48.82	74.00	-25.18	Pass	Vertical
3757.208	32.97	5.88	44.62	50.17	44.40	74.00	-29.60	Pass	Vertical
4960.000	35.02	6.75	44.60	52.86	50.03	74.00	-23.97	Pass	Vertical
7440.000	36.45	8.55	44.97	47.88	47.91	74.00	-26.09	Pass	Vertical
9920.000	38.22	7.41	45.52	46.93	47.04	74.00	-26.96	Pass	Vertical

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP


Test mode No.: WPC23



Radiated emission Test Setup-1 (9kHz~30MHz)



Radiated spurious emission Test Setup-2(30MHz-1GHz)

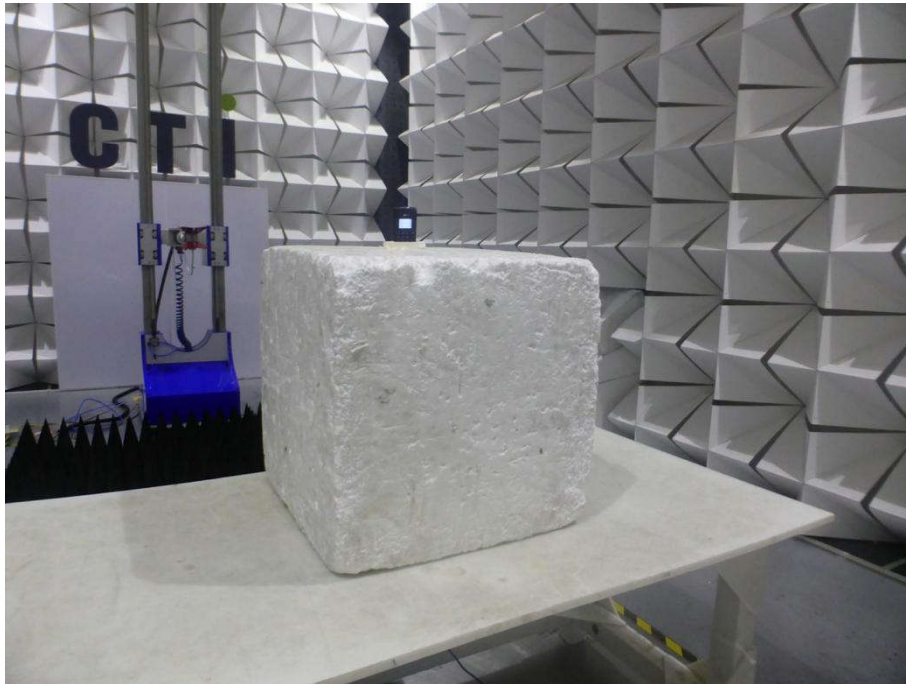

Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

APPENDIX 2 PHOTOGRAPHS OF EUT


Test mode No.: WPC23



View of Product-1



View of Product-2

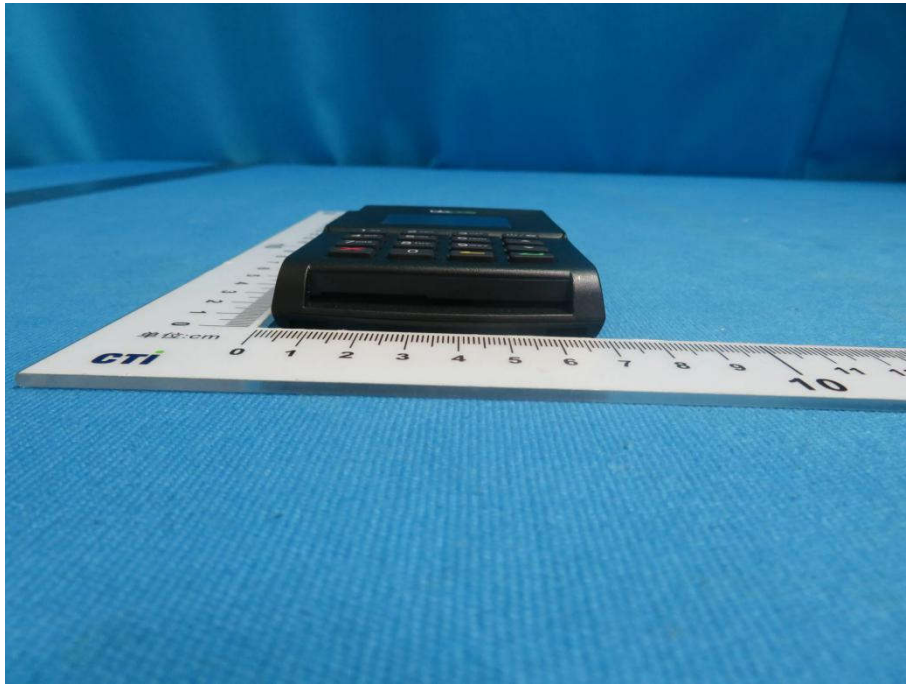

View of Product-3



View of Product-4



View of Product-5




View of Product-6




View of Product-7




View of Product-8

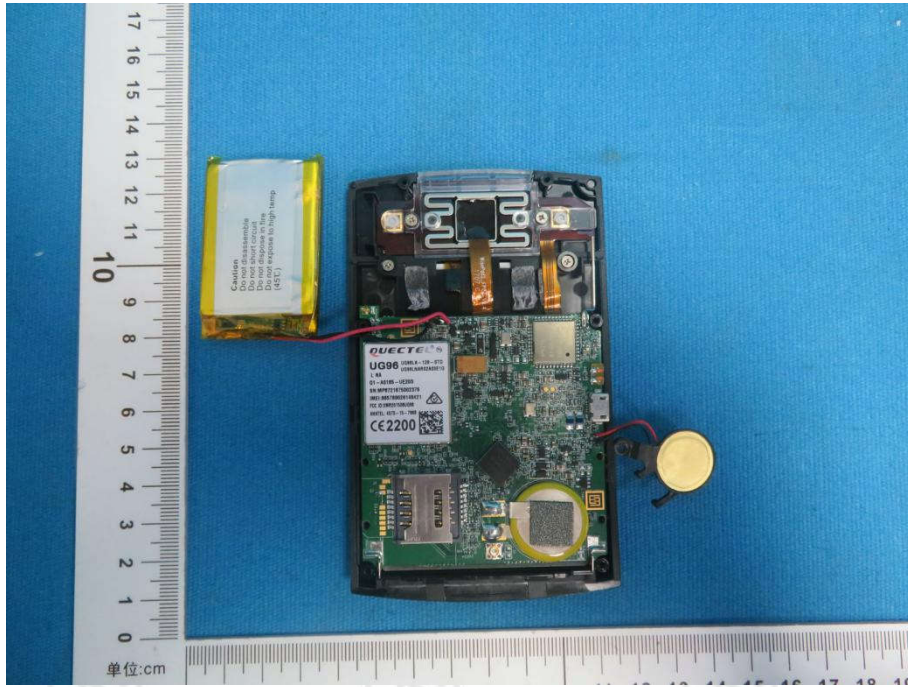

View of Product-9

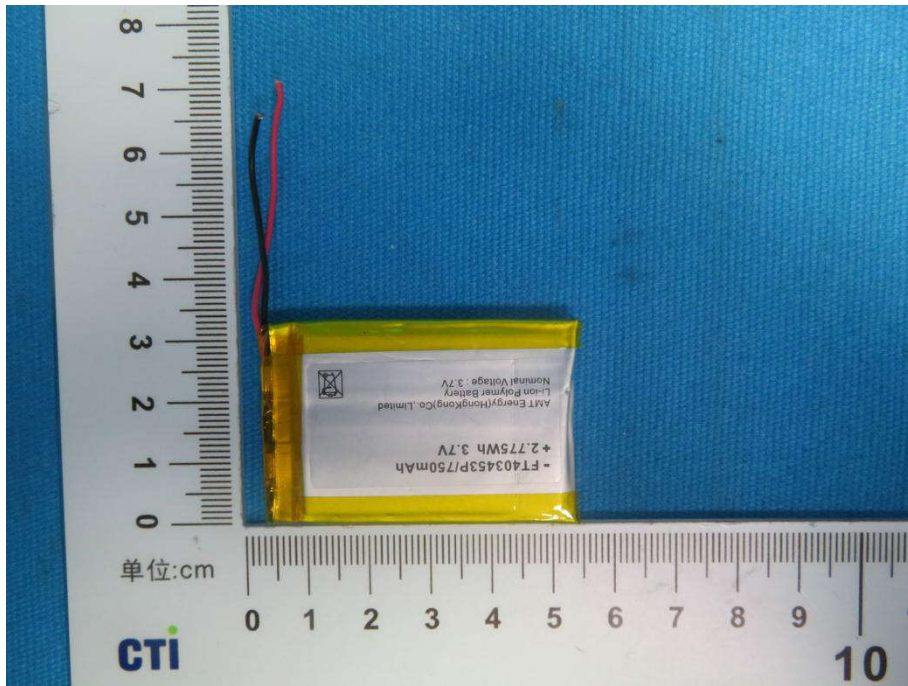


View of Product-10

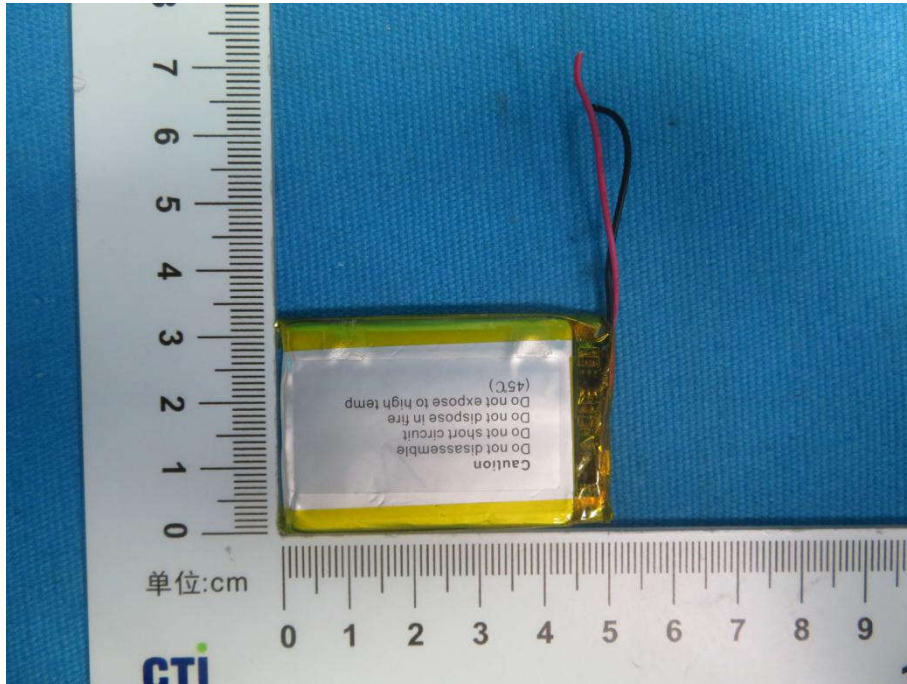


View of Product-11




View of Product-12

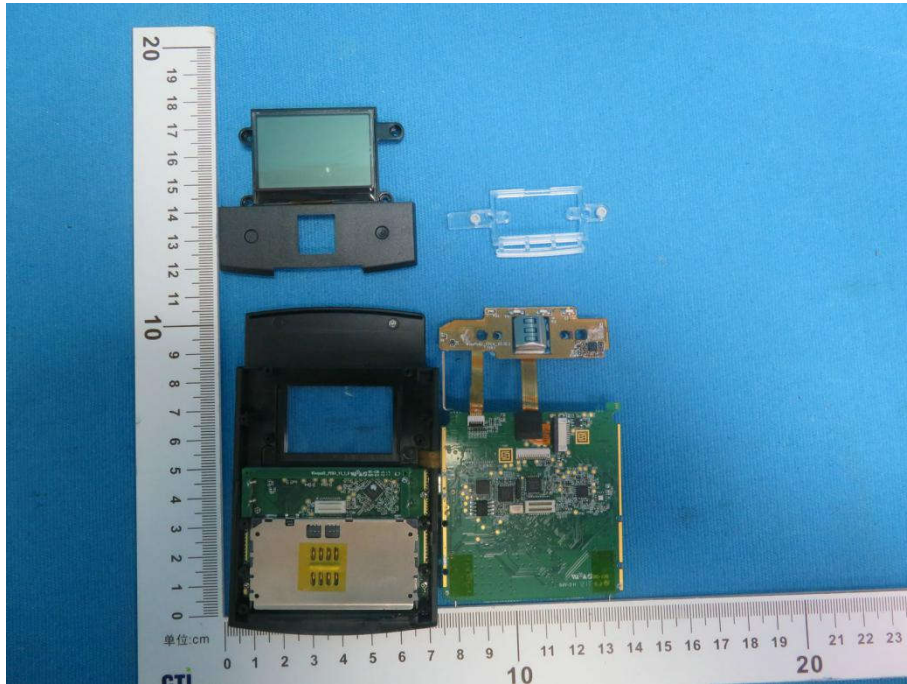


View of Product-13

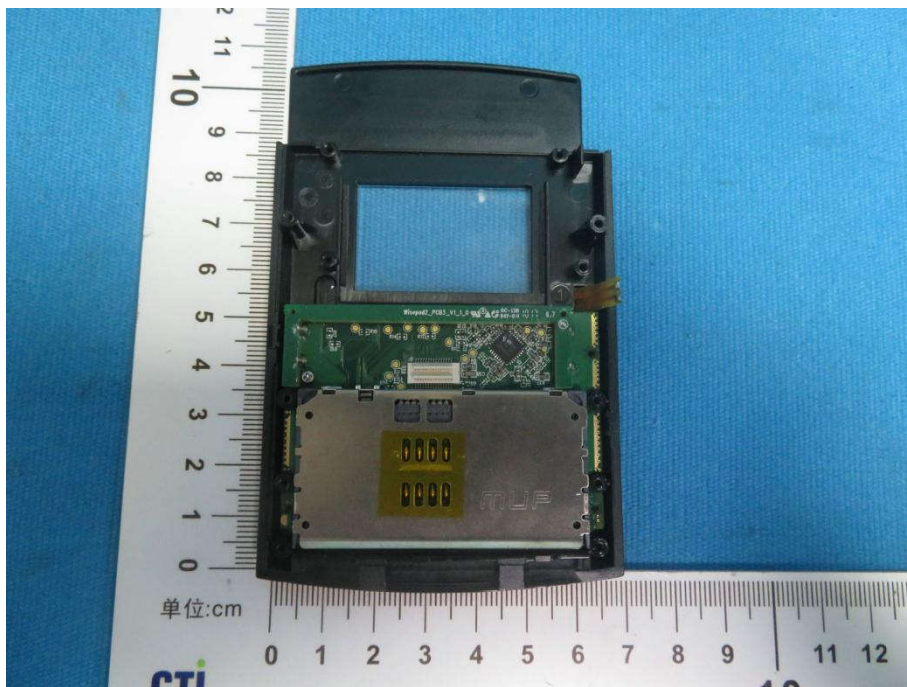


View of Product-14

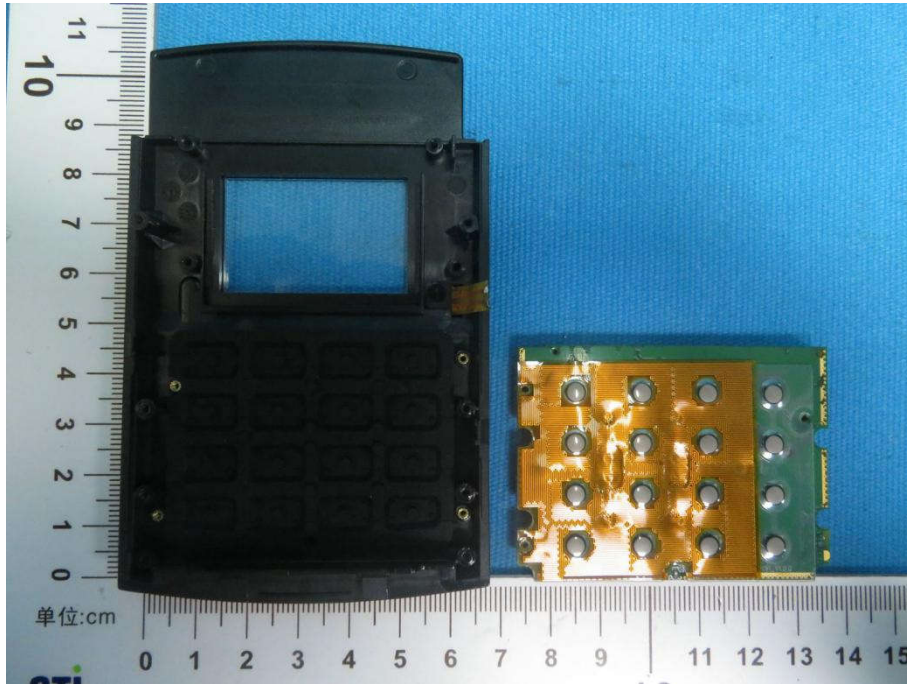


View of Product-15

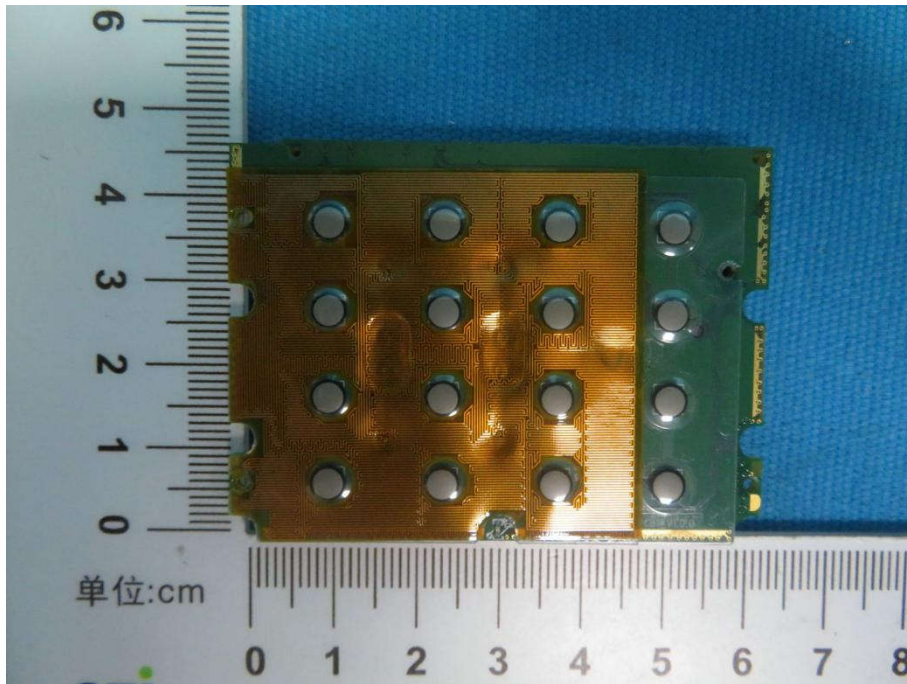


View of Product-16

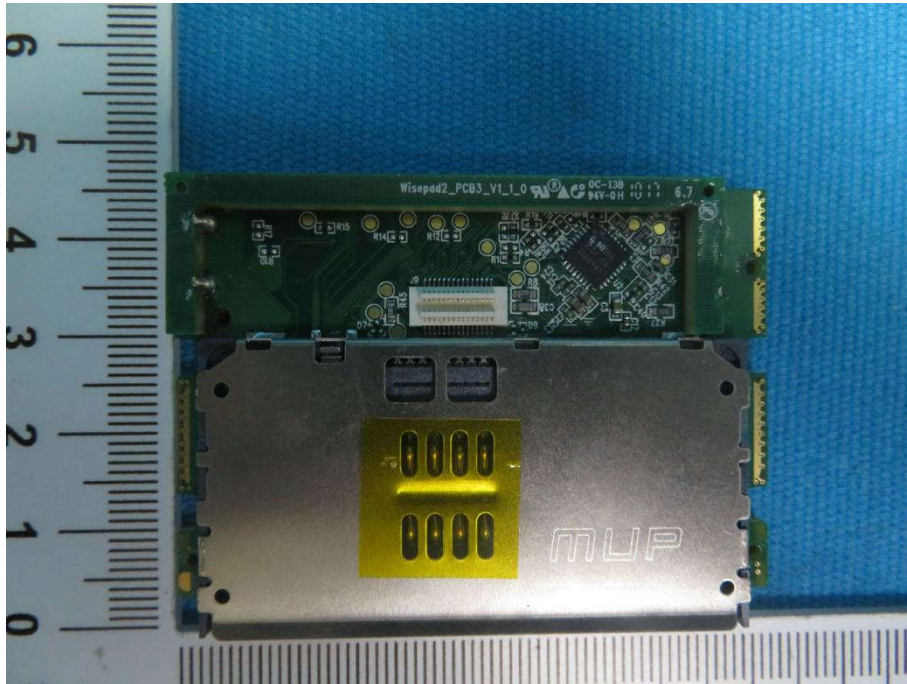


View of Product-17

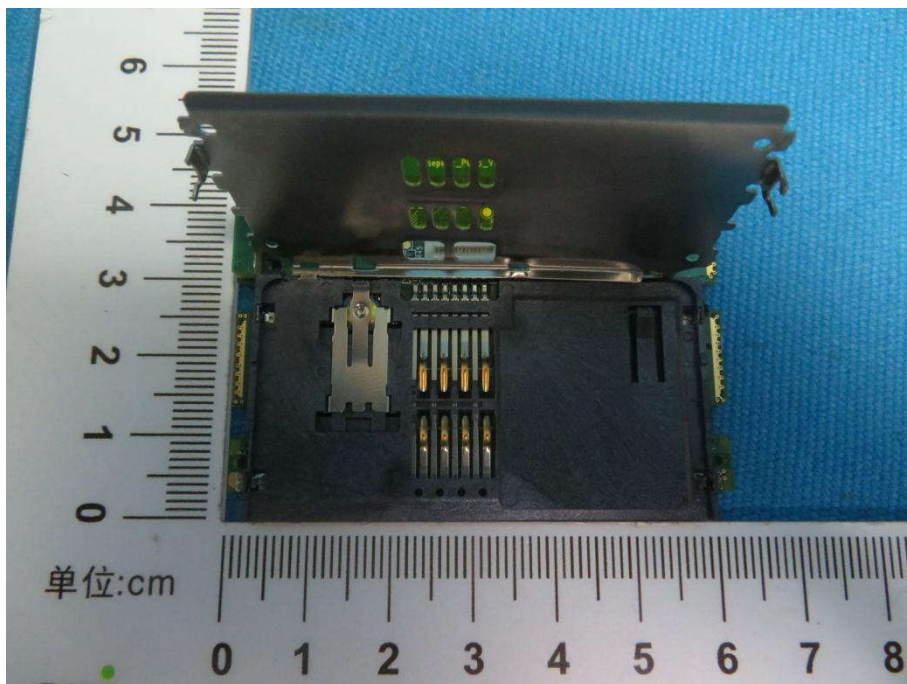


View of Product-18

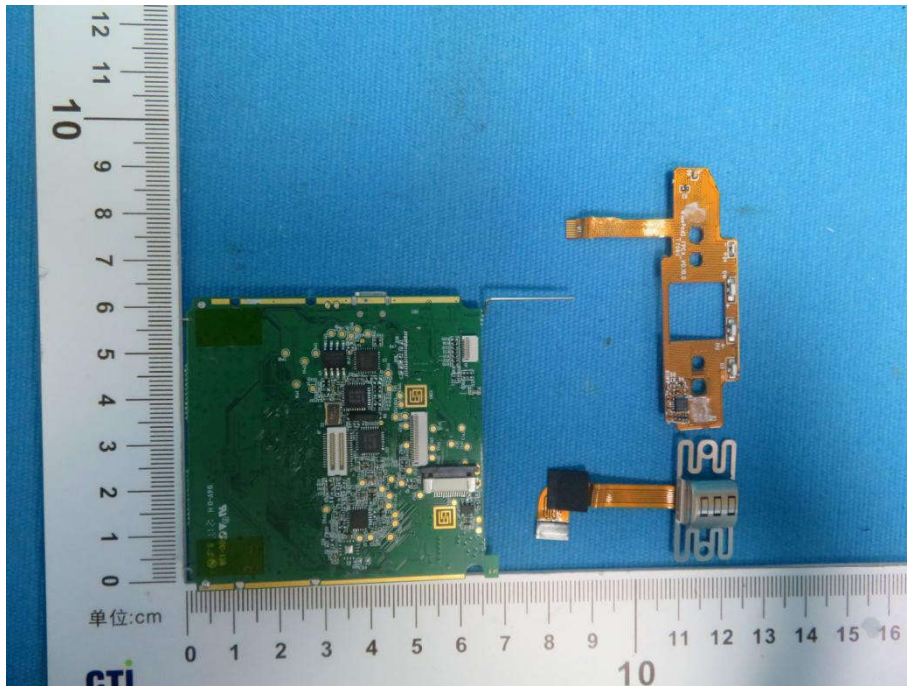


View of Product-19

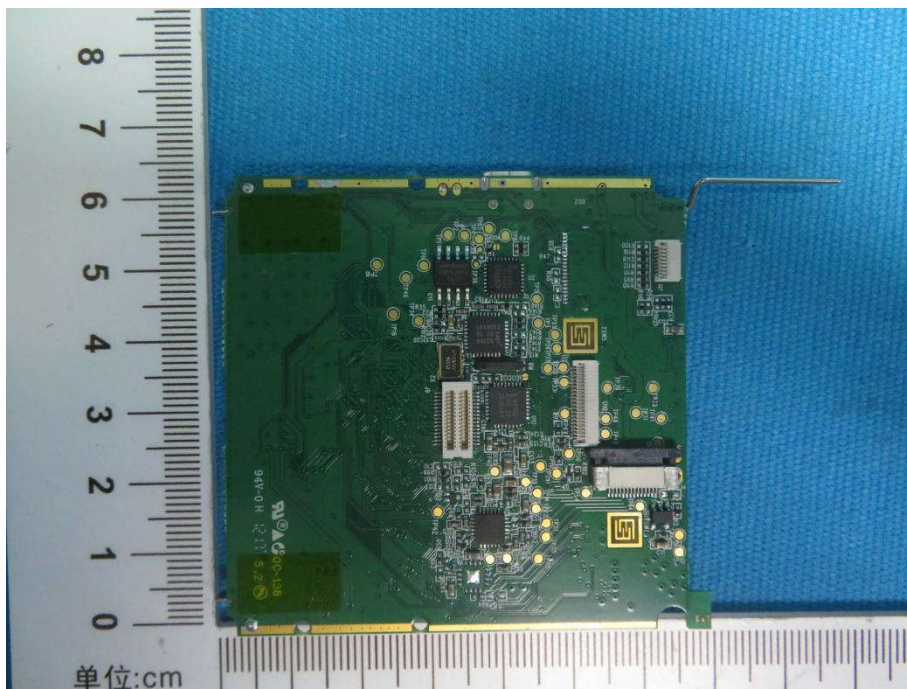


View of Product-20

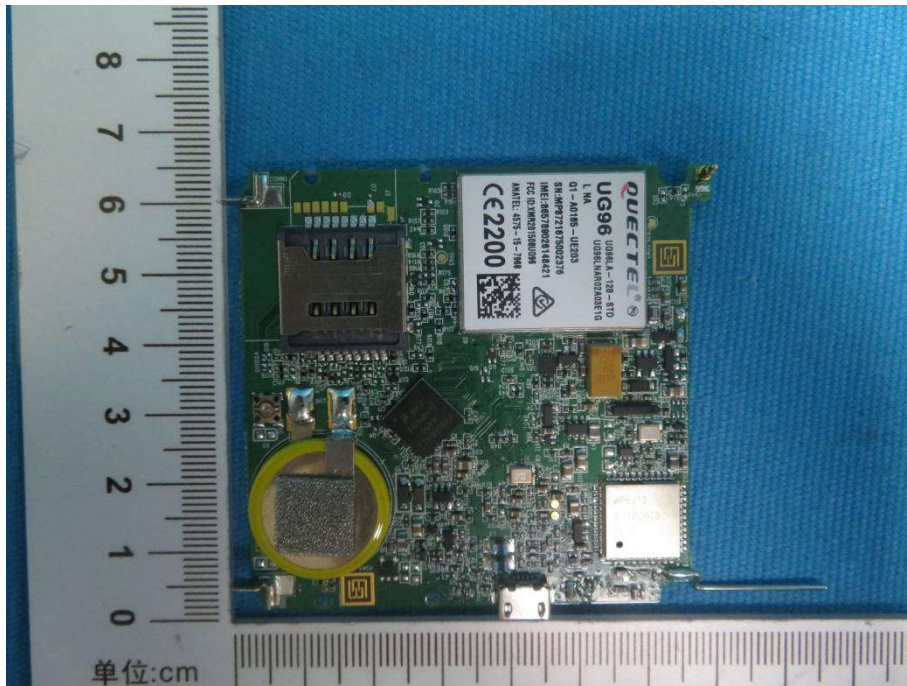


View of Product-21

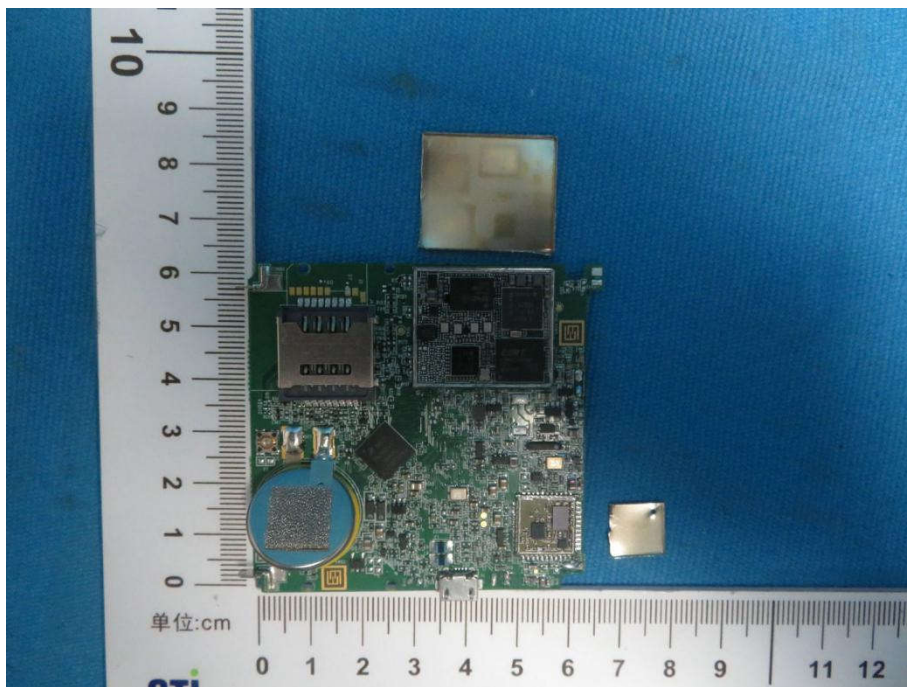


View of Product-22

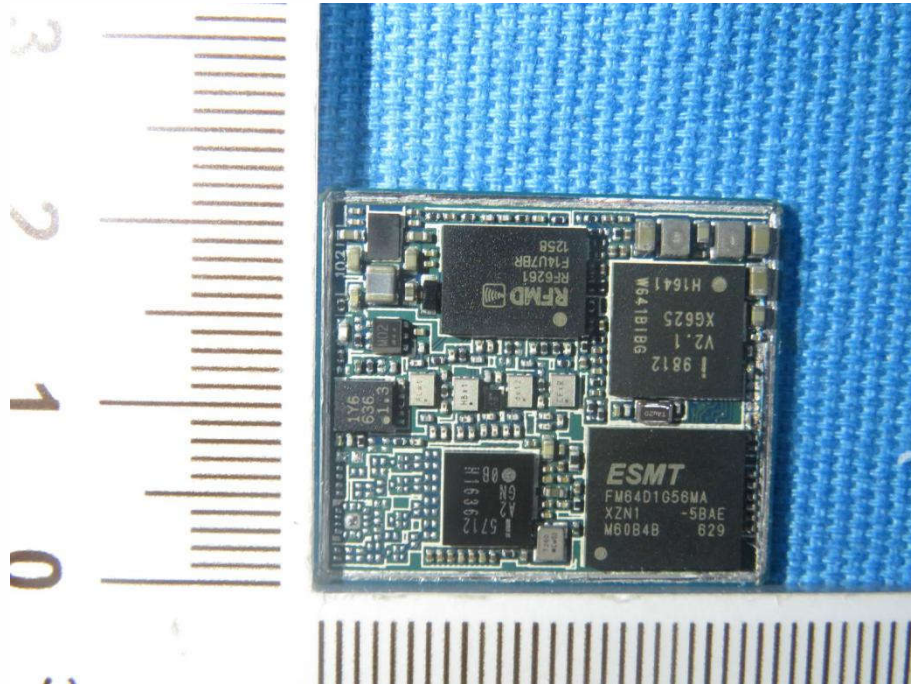


View of Product-23

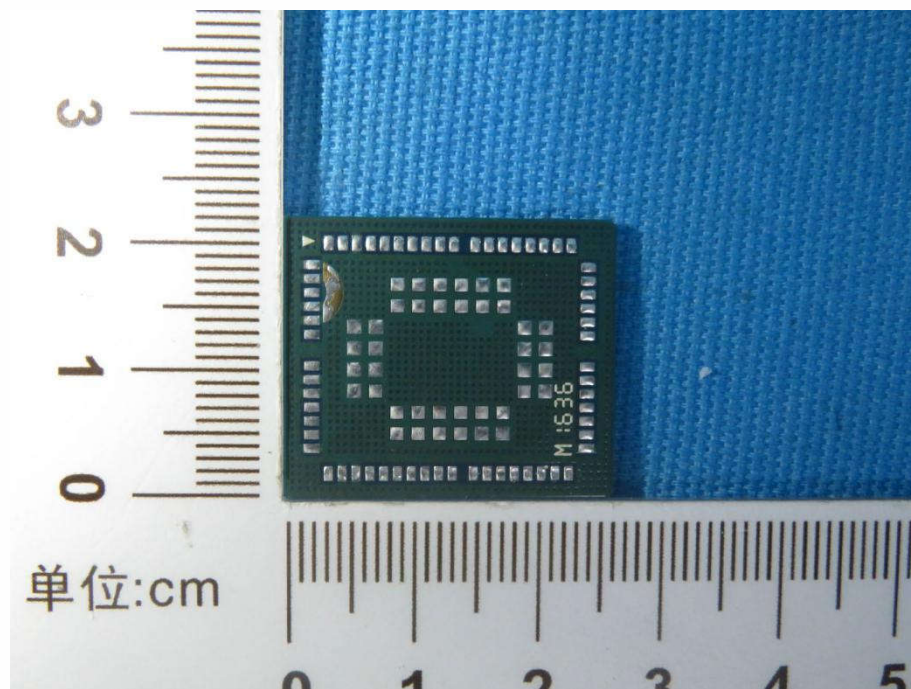


View of Product-24

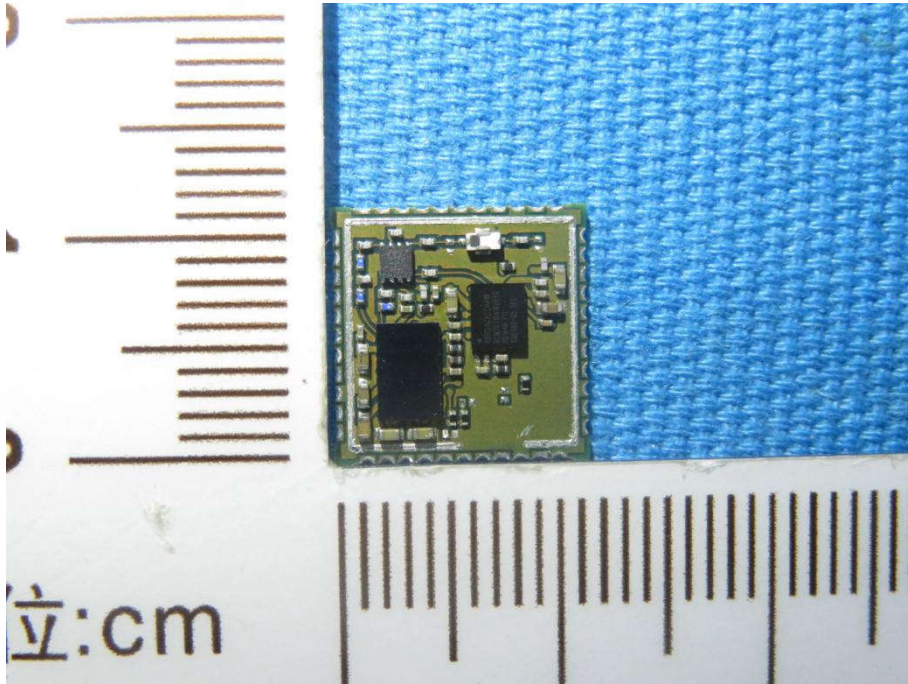


View of Product-25

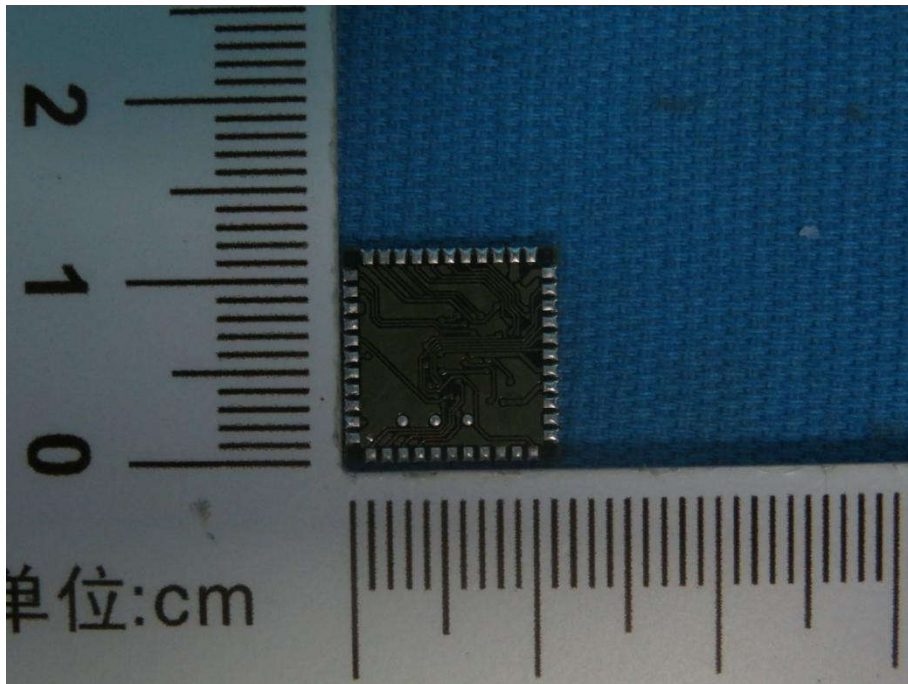


View of Product-26

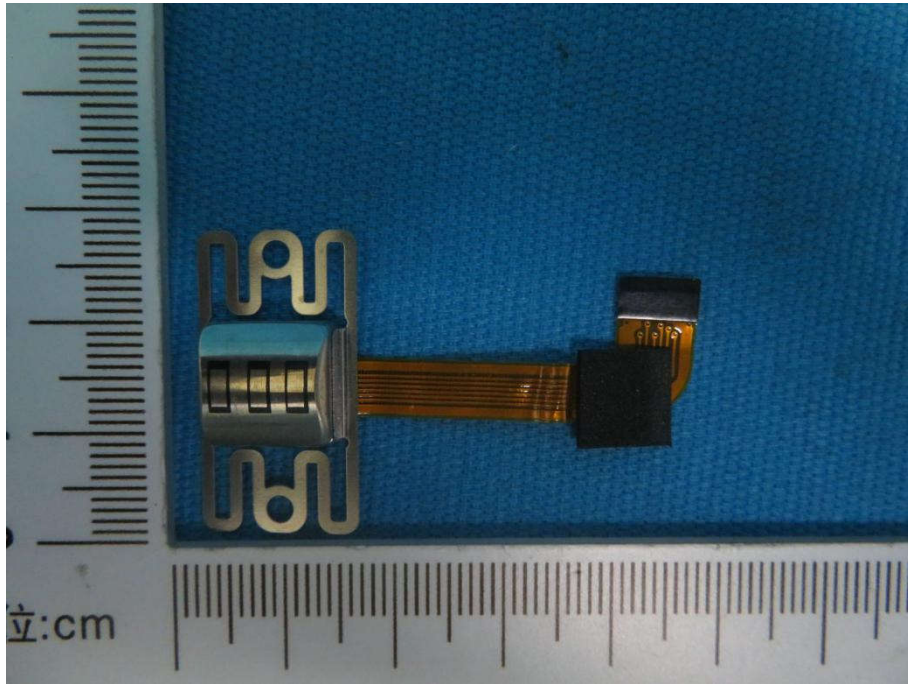


View of Product-27

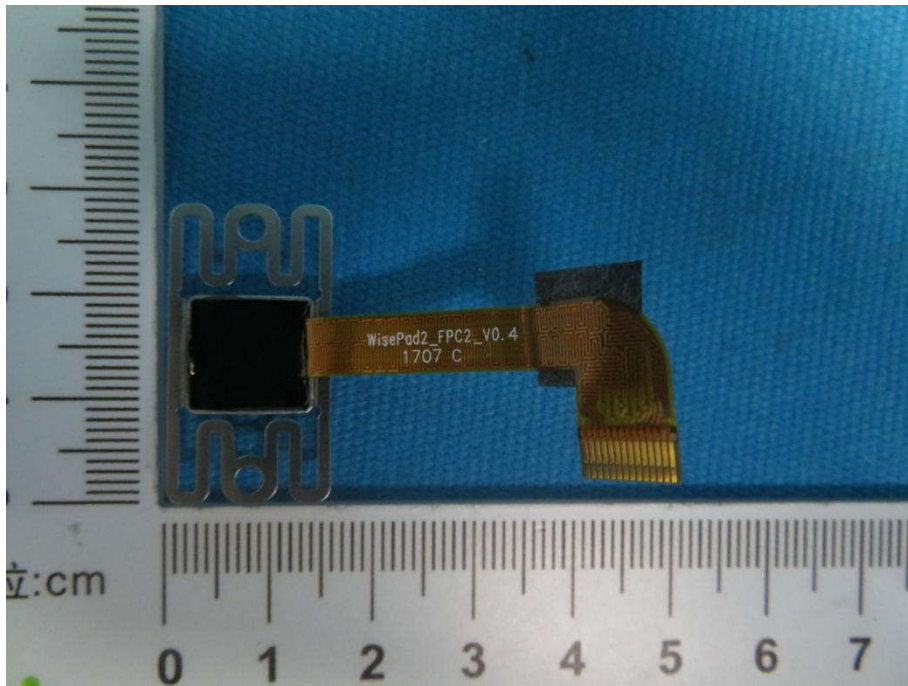

View of Product-28

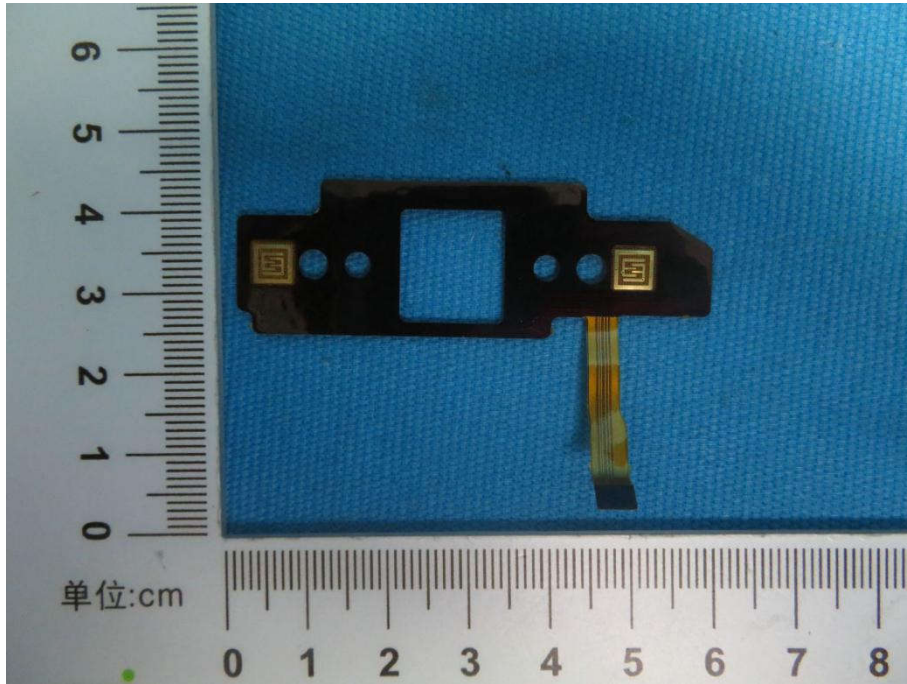

View of Product-29

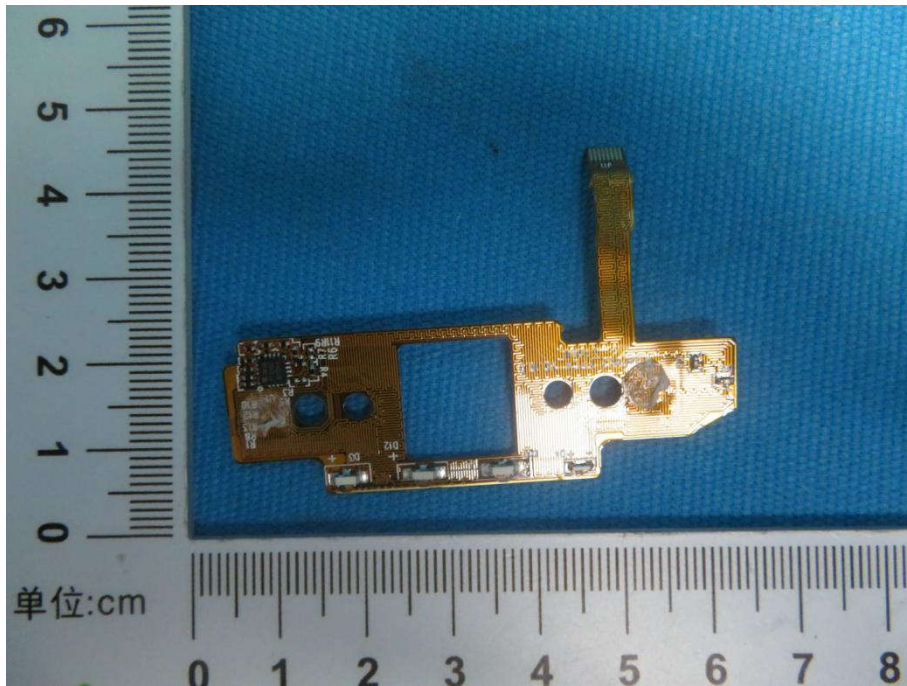

View of Product-30

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.