

bluMe Pro



Quick Start Guide

theauris.com

WELCOME!

Congratulations on your purchase of the auris bluMe Pro Premium Hi-Fi Bluetooth Music Receiver!

The following pages explain the features and operations of bluMe Pro. Please take a few moments to read this user guide.

Also read all safety instructions before proceeding. The answers to most set up and performance questions can be found in this guide. If you have any further questions about the operation or use of this product, please contact our customer care team for assistance on support@theauris.com

In the Box


- auris bluMe Pro
- 2RCA to 2RCA Stereo Audio Cable
- 3.5mm to 2RCA Splitter Cable
- Power Adapter with USB - microUSB Cable
- Self Adhesive Feet Bumpers x 4
- Quick Start Guide

Overview

bluMe Pro is the HiFi Bluetooth Music Receiver reinvented for hi-res wireless audio streaming, combining audiophile-grade componentry and highest quality Bluetooth audio capabilities, to create a modern addition to any existing HiFi stereo systems or your favorite set of powered speakers.

KEYS AND PARTS

- 1 Antenna
- 2 OLED Display
- 3 Power On/Off
- 4 Analog audio output
- 5 Optical audio output
- 6 Coaxial audio output
- 7 DC power input / USB In

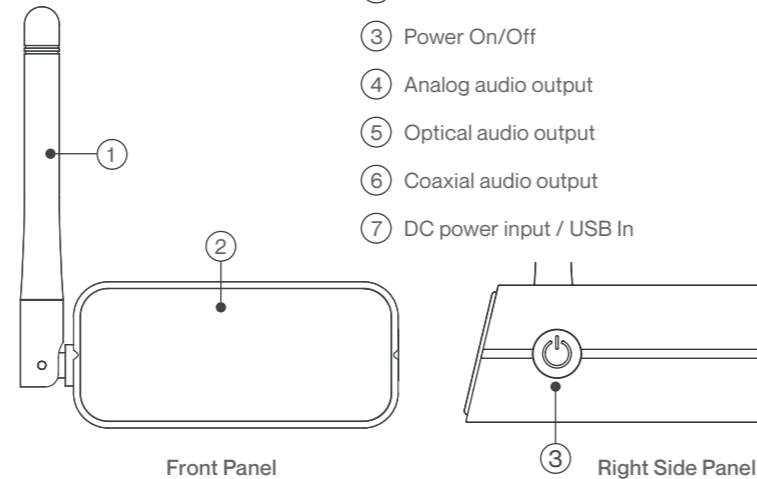

QUICK SETUP

Setup and pairing is really easy. The following instructions will help you connect bluMe Pro to your music system and pair with your tablet, computer or smartphone.

Step 1: Connect audio cables from bluMe Pro rear panel to your music system audio input.

Step 2: Connect a power adapter to bluMe Pro with the included power supply cable and plug the power adapter into an AC outlet.

Step 3: bluMe Pro will automatically 'Power ON' with a sound and go into discoverable / pairing mode. The OLED display will show "Pairing" indicating that the unit is now ready to be paired.

Step 4: Turn ON Bluetooth on your device and go to Bluetooth preferences.

Step 5: Scan listed Bluetooth devices and select "bluMe Pro" to pair and connect. The OLED display will indicate "Connected" with a sound.

Step 6: Make sure your Hi-Fi audio system is turned on and the proper input source is selected.

Step 7: The music on your smart device will now play through your Hi-Fi audio system while bluMe Pro will display the Bluetooth status, format / sampling rate and the song name!

bluMe Pro can connect to one smart device at a time, but is capable of remembering up to 8 devices. Automatically connects to the last paired device.

CONNECT TO A COMPUTER

bluMe Pro can be used as a USB DAC when connected to a computer (PC/Mac) with the included USB-microUSB cable. It allows you to bypass your computer's soundcard and send audio through USB, processing digital audio at any bit depth up to 24 bits and any sample rate to 192kHz.

Step 1: Connect the RCA's / Optical output on the rear of bluMe HD to your music system audio input.

Step 2: Connect bluMe Pro to your computer's USB port with the included USB-microUSB cable.

Step 3: bluMe Pro will automatically 'Power ON' with a sound. The OLED display will indicate that the unit has now entered the USB DAC mode.

Step 4: On your computer select bluMe Pro as the default audio output device to play music - If you're using a Mac, you will need to go to System Preferences / Sound, and select "bluMe Pro" and if you're using a PC, no setting changes are needed as the computer will automatically find the USB driver.

Step 5: Make sure your Hi-Fi audio system is turned on and the proper input source is selected.

Step 6: The music from your favorite media player on your computer will now play through your Hi-Fi audio system!

NOTE:

1. bluMe Pro connects to your computer without any software / app / driver installation.
2. When connected to the computer, bluMe Pro is powered via the computer's USB power and therefore no external power supply is needed.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

TROUBLESHOOTING TIPS

My device does not pair with bluMe Pro.

Ensure that Bluetooth is turned ON on your device. Make sure that the OLED display indicates "Pairing" and your device is within bluMe Pro's wireless range of 30 meters (100 feet). Check whether no other devices are connected. If so, either disconnect or turn off Bluetooth on the other devices, then try connecting. Try unpairing and repairing your device to bluMe Pro. Power cycle bluMe Pro by disconnecting and reconnecting the power cable.

The OLED display shows my device is connected but there is no audio output.

Ensure that the bluMe Pro output is correctly connected to your audio system. Check whether the audio source is correctly selected on your music system (analog audio or digital optical input). Verify the volume levels on your computer OS and player app. Try unpairing and repairing your device to bluMe Pro. Power cycle bluMe Pro by disconnecting and reconnecting the power cable.

The volume output level from bluMe Pro is Low.


Verify the volume levels on your computer OS and player app. Also check the volume levels on your powered speakers or stereo system.

The sound quality is poor and / or the audio is cutting out.

Move your device or bluMe away from cordless phones, routers, microwave ovens or other Bluetooth devices. Try moving your device closer to bluMe Pro. Try another location. Turn off your device's Wi-Fi.


TECHNICAL SPECIFICATIONS

| | |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bluetooth® Version | Bluetooth v5.0 |
| Supported Codecs | LDAC, Qualcomm® aptX™ HD, aptX™ LL, aptX™, AAC and SBC |
| Bluetooth® Range | 30 meters, 100 feet |
| Bluetooth Chipset | Qualcomm CSR8675 |
| D/A Converter | ESS SABRE ES9028Q2M |
| Digital Conversion Chip | Cirrus Logic CS8406 |
| Dynamic Range (DNR) | 129dB |
| Total Harmonic Distortion | -120dB |
| PCM Support | 384kHz / 32bit |
| Outputs | Stereo Analog RCA Digital Optical (SPDIF) |
| Power In | DC 5V/1A |
| USB Port | Type C |
| Screen | 1.3 inch OLED, 128 x 64 pixels |
| Enclosure | Aluminum |
| Included Accessories | 2RCA to 2RCA Stereo Audio Cable 3.5mm to 2RCA Splitter Cable Power adapter with USB - microUSB Cable Self Adhesive Feet Bumpers x 4 Quick Start Guide |

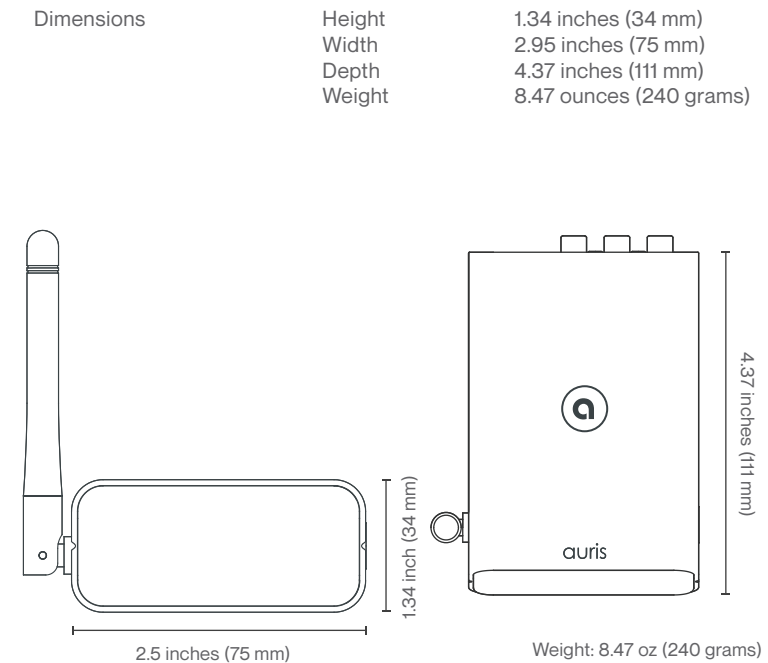

PRODUCT SAFETY

When used in the directed manner, this unit has been designed and manufactured to ensure your personal safety. Improper use of this product can result in potential electrical shock or fire hazards. Please read all safety and operating instructions carefully before installation and use. Keep these instructions handy for future reference.

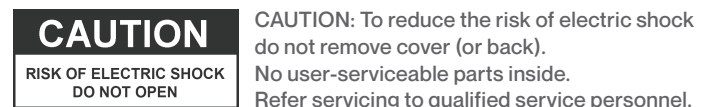

Users of this product are cautioned not to make modifications or changes that are not approved by Auris, Inc. Doing so may void the compliance of this product and may result in the loss of the user's authority to operate the equipment.

SAFETY INSTRUCTIONS

- Keep product dry to avoid affecting the interior circuitry of the product.
- Don't put the product in direct sunlight or place in hot areas.
- High temperature will shorten the life of electronic device.
- Don't expose to extreme temperatures, it may damage the internal circuit board.
- Don't take the product apart or the warranty will be voided.
- Don't drop the product.
- Don't use chemical or detergent to clean the product.
- Due to isolating characteristic of the product, do not use the product at excessive volume while driving or in any other activity where failure to hear surrounding sounds could be dangerous.
- Using the product at excessive volumes may cause permanent hearing damage. You can get the most out of your equipment and enjoy great audio performance even at safe levels.

WARRANTY

Don't worry. Your auris bluMe Pro is covered under our warranty. For warranty information please visit:

<https://theauris.com/pages/warranty>

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including the interference that can cause undesired operation.
Any changes or modifications to the device will void the user's authority to operate the device.

This device complies with FCC radiation exposure limits set for an uncontrolled environment. This device should be installed and operated with minimum distance of 20cm between the radiator and the body.

FCC ID: 2ABCJAU07



www.theauris.com
support@theauris.com

© 2021 Auris, Inc. All Rights Reserved.
The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries. LDAC and LDAC logo are trademarks of Sony Corporation. All other trademarks and logos are property of their respective owners.

Designed in the U.S.A. | Made in China.

Auris, Inc.
DE 19958, USA

