

User Manual

Bluetooth speaker

BTS81

GOLD FINGERS TECHNOLOGY CO., LTD

Contents

1.Notice.....	1
2.Operation instruction.....	2
3.Product Specificationsn	5

Thank you for purchasing the Bluetooth Speaker, we hope you will enjoy all its benefits.

Please read this user's guide to get start, and to make the best usage of the speaker's many features.

1. Notice

Before use your speakers

Checking speaker compatibility. Your speaker is compatible with most Bluetooth mobile phones that are compliant with bluetooth version V4.0 and support the headset and/or hands-free profile(s). Make sure that your phone has bluetooth capability by visiting your phone manufacturer's web site.

Do not keep the voice of speaker on the maximum often, or it will hurt your hearing. We suggest you to adjust the voice with 2/3 level of the maximum, this operation can not only let you hear the perfect sound of music , but also can extend speaker's service life

Avoid to storage at high temperatures such as in a hot vehicle or in direct sunlight. (Storage at high temperatures can damage performance and reduce battery life).

Do not expose the speaker or any of parts to rain or other liquids.


Always store the speaker with power off and make sure it is safely protected.

Please use 5V 1A to charge ,charging time will be about 3-4 hours.

If the LED indicator can not light on when turn on the speaker, please charge with the speaker


2. Operation instruction

I. Function instruction

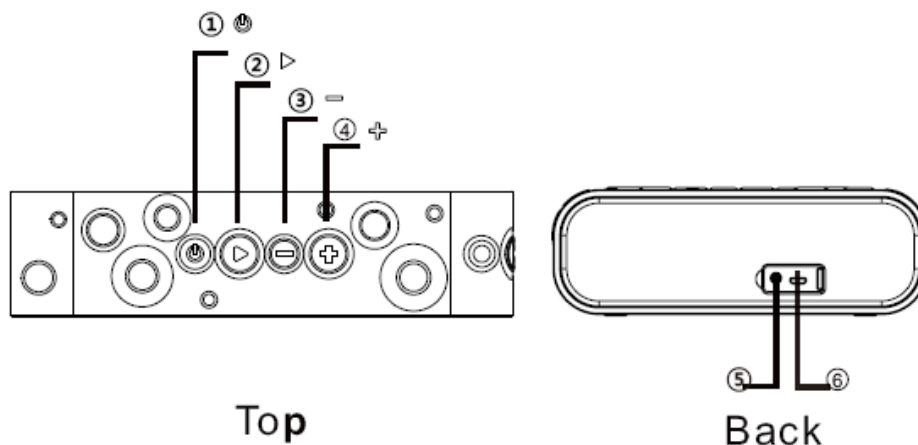

- ①Power on/off (Long press)
- ②Play/Pause/Answer Call(Bluetooth) / line in
- ③Previous song/VOL-(Long press)
- ④Next song/VOL+(Long press)
- ⑤Aux-in
- ⑥5V charging input port


II.Connection diagram

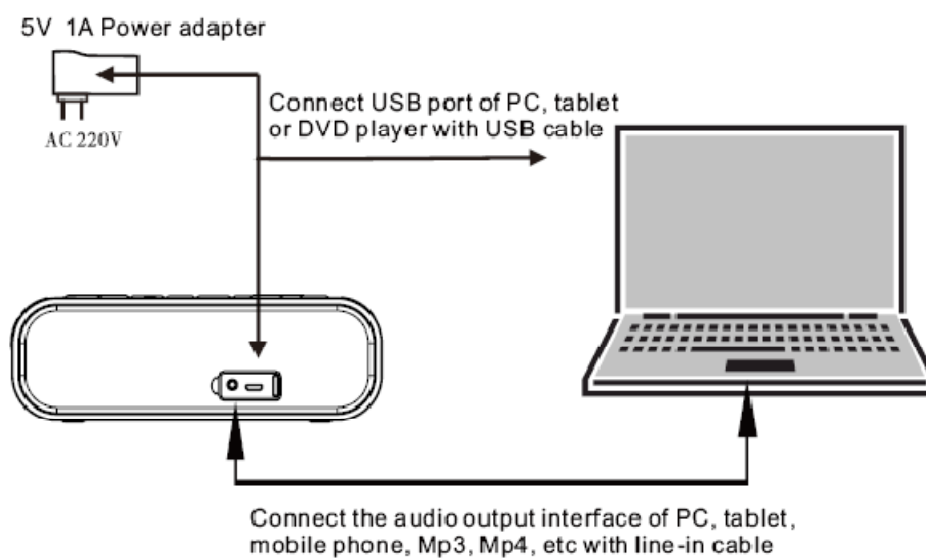


III. Operation instruction

The speaker uses a rechargeable battery. You must charge the battery fully before using the first time .

Turning on/off Speaker

Press and hold the “” button until you hear a tone with “power on”. and led light will be on blue in 1 second.

press and hold the “” button until you hear a tone with “power off”.

Pairing

Enter automatic pairing mode .led light will flash with red and blue.

Connect speaker to cell phone with Bluetooth function Set your cell phone to discover the speaker by following up your phone’s guide .Your phone will find the speaker (paring name of the speaker is: BTS81 Confirm this pressing the “Yes” or “OK” key . you will hear a voice with “paired”, it means your phone has been connected with the speaker.

Changing music


When the speaker is playing , short press “ + / - ” to change music.

This feature may vary due to user’s operation mode and mobile phone settings.

Adjust the volume

Long press “ + / - ” to adjust sound volume.

Play/Pause

short press “  ” to play/pause

Hands free function:

1). Answering a call: short Press “▷” when you receiving an incoming call. Short press “▷” again to end the call. long press “+/-” to adjust sound volume

2). Last number redialing

Connected with one mobile phone: Shortly press “▷” Button twice to make the last number redial.

3). Rejecting an incoming call

Press “▷” Button for 2 seconds to reject a call.

3. Product Specifications

Version: 4.0 ,Class 2

Support Bluetooth HSP, HFP, A2DP and AVRCP Profiles

Output: 3Wx2

Play time: 5-6 hours

Standby Time: 350 hours

Setting bass boost

Support iPhone battery indication

Range: 10m

Frequency responds range: 100Hz~20 kHz

Size: L180*W62*H45

Net weight: 340g

*Play time may vary depending on the phone type.

FCC Information and Copyright

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates,

uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference

to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is

encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.