

# **TEST REPORT**

- **APPLICANT** : Reliance Communications, LLC
- **PRODUCT NAME** : 4G-LTE feature phone
- MODEL NAME : R320L, R320L2
- BRAND NAME : Orbic
- FCC ID : 2ABGH-R320L
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **RECEIPT DATE** : 2023-02-17
- **TEST DATE** : 2023-02-27 to 2023-05-15
- **ISSUE DATE** : 2023-10-12

Vong /Vii Edited by: Peng Mi (Rapporteur) Approved by: Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel:
 86-755-36698555
 Fax:
 86-755-36698525

 Http://www.morlab.cn
 E-mail:
 service@morlab.cn



Page 1 of 111



# DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty 8
1.4.	Testing Laboratory 8
2. G	eneral Description ······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······11
2.4.	Test Configuration of EUT12
2.5.	Test Conditions12
2.6.	Test Setup Layout Diagram ······12
3. T	est Results ······15
3.1.	Antenna Requirement ······15
3.2.	Hopping Mechanism ······15
3.3.	Number of Hopping Frequency 16
3.4.	Duty Cycle of Test Signal17
3.5.	Maximum Peak Conducted Output Power ······18
3.6.	Maximum Average Conducted Output Power ······19
3.7.	20 dB Bandwidth ······20
3.8.	Carried Frequency Separation21
3.9.	Time of Occupancy (Dwell time)22
3.10.	Conducted Spurious Emissions and Band Edge23
3.11.	Conducted Emission ······24
3.12.	Restricted Frequency Bands25
3.13.	Radiated Emission





#### 

Change History					
Version	Date	Reason for change			
1.0	2023-10-12	First edition			



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Mar. 03, 2023	Su Xiaoxian	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Mar. 01, 2023	Su Xiaoxian	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Mar. 01, 2023	Su Xiaoxian	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Mar. 01, 2023	Su Xiaoxian	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Mar. 01, 2023	Su Xiaoxian	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Mar. 03, 2023	Su Xiaoxian	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Mar. 03, 2023	Su Xiaoxian	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Mar. 03, 2023	Su Xiaoxian	PASS	No deviation
11	15.207	Conducted Emission	Apr. 14, 2023	Fan Zehang	PASS	No deviation
12	15.247(d)	Restricted Frequency Bands	May 15, 2023	Li Hanbin	PASS	No deviation
13	15.209,	Radiated	May 15, 2023	Li Hanbin	PASS	No deviation



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



15.247(d)	Emission		

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB558074 D01 v05r02 and DA 00-075.

**Note 2:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

# **1.1. Testing Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax:

Fax: 86-755-36698525

Http://www.morlab.cn



# **1.2. Test Equipment List**

#### **1.2.1 Conducted Test Equipments**

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal	MY53470836	N9010A	Agilopt	2023.02.27	2024.02.26
Analzyer	MT55470650	N9010A	Agilent	2023.02.27	2024.02.20
RF Cable		RF01	Morlab	N1/A	NI/A
(30MHz-26GHz)	CB01	REUI	INIOLIAD	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

#### 1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2022.07.06	2023.07.05
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2022.07.08	2023.07.07

#### 1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0





#### 1.2.4 Radiated Test Equipments


Equipment	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Name	Senariuo.	туре	Manuacturer		Due Date
Receiver	MY54130016	N9038A	Agilent	2022.07.06	2023.07.05
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2022.07.23	2023.07.22
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2022.07.08	2023.07.07
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525

Http://www.morlab.cn





# 1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

# 1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.		
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong		
Laboratory Address	Province, P. R. China		
Telephone	+86 755 36698555		
Facsimile	+86 755 36698525		
FCC Designation Number	CN1192		
FCC Test Firm	226174		
Registration Number			





# 2. General Description

# 2.1. Information of Applicant and Manufacturer

Applicant Reliance Communications, LLC			
Applicant Address555 Wireless Blvd. Hauppauge, NY 11788, USA			
Manufacturer	ShenZhen Wellstec Communication Co., Ltd		
Manufacturer Address	1403, Block A, BOTON Science & Technology Park, No. 1044		
Manufacturer Address	Chaguang Road, Nanshan District, ShenZhen, China.		

# 2.2. Information of EUT

Product Name:	4G-LTE feature p	hone	
Sample No.:	2#		
Hardware Version:	V1.0		
Software Version:	R320L: R320L_v R320L2: R320L2	—	
Equipment Type:	Bluetooth classic		
Bluetooth Version:	4.2		
Modulation Type:	FHSS (GFSK(1N 8-DPSK(EDR 3N	lbps), π/4-DQPSK(EDR 2Mbps), lbps))	
<b>Operating Frequency Range:</b>	e: 2402MHz-2480MHz		
Antenna Type:	PIFA Antenna		
Antenna Gain:	1.80dBi		
	Battery		
	Brand Name:	Orbic	
	Model No.:	BP2243	
	Serial No.:	N/A	
Accessory Information:	Capacity:	1850mAh	
	Rated Voltage:	3.85V	
	Charge Limit:	4.4V	
	Manufacturer:	Zhongshan Tianmao Battery Limited Company	





	Adaptor	
	Brand Name:	Orbic
	Model No.:	A18A-050100U-US2
	Serial No.:	N/A
	Rated Output:	5.0V=1.0A
Accessory Information:	Rated Input:	100-240V~50/60Hz, 0.2A
	Manufacturer:	Dongguan Aohai Technology Co., Ltd
	USB Cable	
	Model No.:	R320L
	Manufacturer:	SHENZHEN YONGQUANDA
		TECHNOLOGY CO.,LTD

**Note 1:** According to the certificate holder, they declared that the models R320L and R320L2 only differ in model name and software version, everything else is the same. The main measuring model is R320L, only the results for R320L were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

**Note 3:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.





# 2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	10 2412		2432	50	2452	70	2472
11	2413 31		2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





# 2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

## 2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

# 2.6. Test Setup Layout Diagram

#### 2.6.1.Conducted Measurement



#### 2.6.2.Conducted Emission Measurement

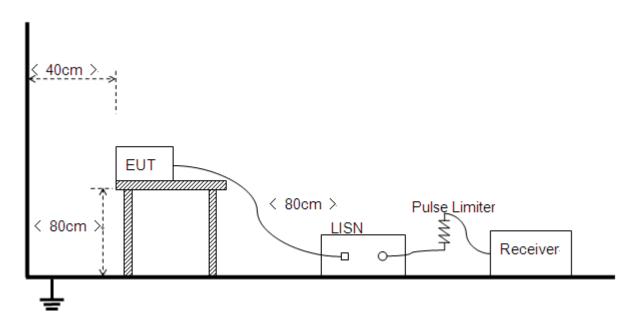



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn




#### 2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

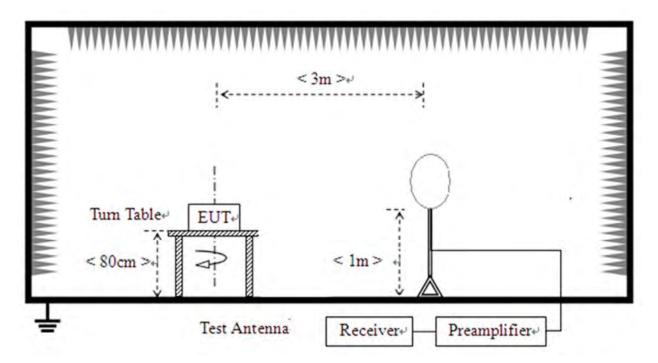

2) For radiated emissions from 30MHz to1GHz

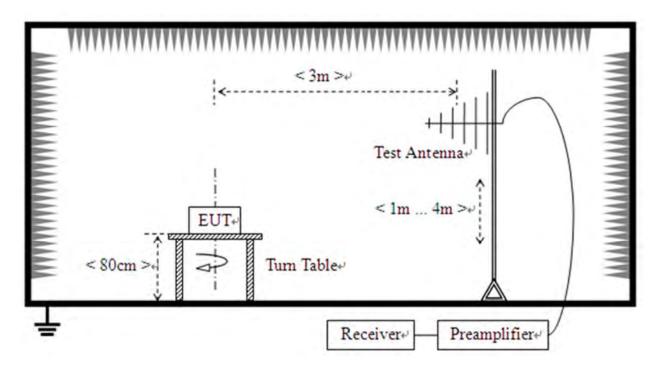




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



3) For radiated emissions above 1GHz

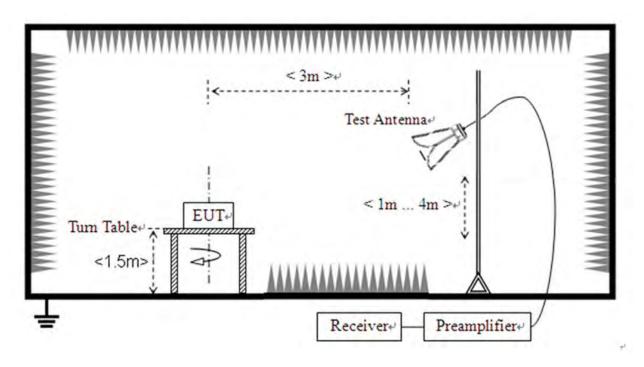




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





# 3.1. Antenna Requirement

#### 3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 3.1.2.Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

## 3.2. Hopping Mechanism

#### 3.2.1.Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 3.2.2.Test Result

The hopping mechanism of the EUT is in compliance with the document "*Bluetooth core specification v5.1*".





# **3.3. Number of Hopping Frequency**

#### 3.3.1.Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

#### 3.3.2.Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.  $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize

#### 3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.3.4.Test Result

Refer to Annex A.1 in this report.





# 3.4. Duty Cycle of Test Signal

#### 3.4.1.Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be non constant.

#### 3.4.2.Test Result

Refer to Annex A.2 in this report.





# 3.5. Maximum Peak Conducted Output Power

#### 3.5.1.Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

#### 3.5.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

#### 3.5.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.5.4.Test Result


Refer to Annex A.3 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn





### 3.6. Maximum Average Conducted Output Power

#### 3.6.1.Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

#### 3.6.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

#### 3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.6.4.Test Result

Refer to Annex A.4 in this report.



Http://www.morlab.cn



#### 3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ( $10*\log 1\% = 20$  dB) taking the total RF output power.

#### 3.7.1.Test Procedures

Use the following spectrum analyzer settings: Span = between 2 to 5 times the OBW, centered on the test channel RBW= 1% to 5% of the OBW VBW  $\geq$  3 x RBW Sweep = auto Detector function = peak Trace = max hold

#### 3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.7.3.Test Result

Refer to Annex A.5 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# 3.8. Carried Frequency Separation

#### 3.8.1.Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

#### 3.8.2.Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.8.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.


#### 3.8.4.Test Result

Refer to Annex A.6 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn E-mail: service@morlab.cn





# **3.9. Time of Occupancy (Dwell time)**

#### 3.9.1.Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 3.9.2.Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) \*(1600 / 2 /79)\*31.6 Millisecond DH3: Dwell time equal to Pulse time (ms) \* (1600 /4 /79) \*31.6 Millisecond DH5: Dwell time equal to Pulse Time (ms)\* (1600 / 6 /79) \*31.6 Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) (800 / 2 / 20)(0.4 + 20) Millisecond DH3: Dwell time equal to Pulse time (ms) (800 / 4 / 20)(0.4 + 20) Millisecond DH5: Dwell time equal to Pulse Time (ms) (800 / 6 / 20)(0.4 + 20) Millisecond.

#### 3.9.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.9.4.Test Result

Refer to Annex A.7 in this report.





# 3.10. Conducted Spurious Emissions and Band Edge

#### 3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### 3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHzVBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize.

#### 3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

#### 3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.





# 3.11. Conducted Emission

#### 3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/ $50\Omega$  line impedance stabilization network (LISN).

Frequency Panga (MHz)	Conducted	Limit (dBµV)
Frequency Range (MHz)	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

#### 3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

#### 3.11.4.Test Result

Refer to Annex A.10 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



## 3.12. Restricted Frequency Bands

#### 3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

#### 3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

#### 3.12.4.Test Result

Refer to Annex A.11 in this report.





# 3.13. Radiated Emission

#### 3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





#### 3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

#### 3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

#### 3.13.4.Test Result

Refer to Annex A.12 in this report.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn



# **Annex A Test Data and Result**

#### A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



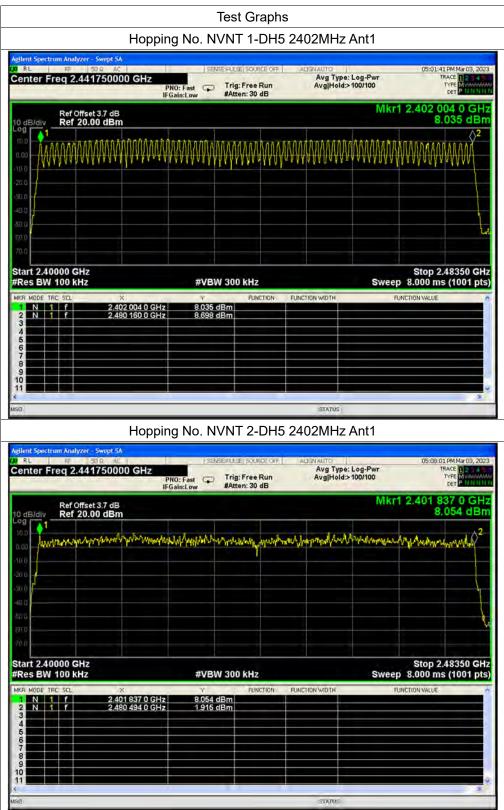



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



enter Freq 2		NO: East Trig	E SOUNCE OFF   p: Free Run ten: 30 dB	ALIGNAUTO Avg Type Avg Hold:	Log-Pwr	Π	SPM Mar 03, 2 RACE
dB/div Rel	Offset 3.7 dB 20.00 dBm				Mk	r1 2.401 8 5.	37 0 GI 522 dB
	- A-dahannanananan	Malada	Anna maa	An AARAA JA	Andraha	A & Auffertund	0
	winnananana	a had ta hadded	and the second s	And Add Add And	he ad A to P	ndia han maran	www
10							
10							4
ia							
ŵ							
art 2.40000 les BW 100		#VBW 30			Swa	Stop 2. ep 8.000 ms	48350 G
R MODE TRC SCL	X	# V EWY 30	FUNCTION	FUNCTION WIDTH	SWE	FUNCTION VALUE	s (1001 p
N 1 f	2.401 837 0 GHz 2.480 410 5 GHz	5.522 dBm 5.080 dBm					
	2,400 410 0 0112	0,000 4011					
الم <u>الم</u> الحدة							



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.2. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.39	1.11	0.34
NVNT	1-DH5	2441	Ant1	77.39	1.11	0.34
NVNT	1-DH5	2480	Ant1	77.39	1.11	0.34
NVNT	2-DH5	2402	Ant1	77.41	1.11	0.34
NVNT	2-DH5	2441	Ant1	77.44	1.11	0.34
NVNT	2-DH5	2480	Ant1	77.44	1.11	0.34
NVNT	3-DH5	2402	Ant1	77.49	1.11	0.34
NVNT	3-DH5	2441	Ant1	77.47	1.11	0.34
NVNT	3-DH5	2480	Ant1	77.47	1.11	0.34




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



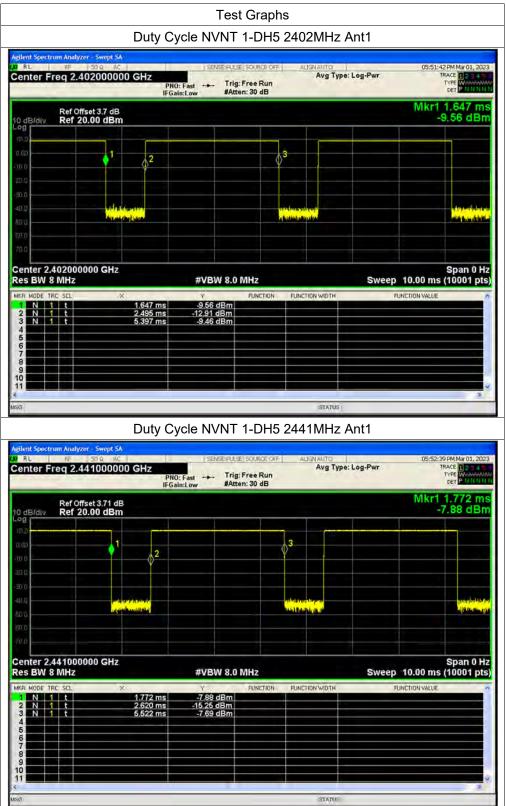



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Page 32 of 111








STATUS



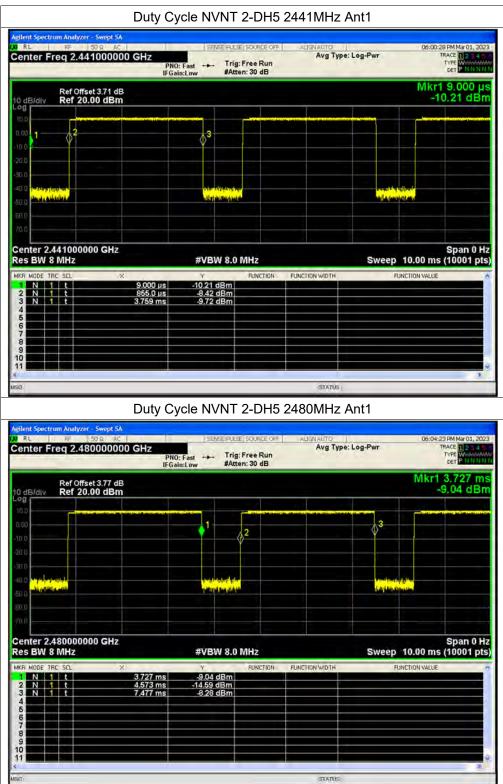



Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn







Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

STATUS



R	L		市	alyzer - Sw 50 Q 2.48000	AC			Fast 🔸	Trig	e sounce of : Free Run en: 30 dB			vg Type: L	og-Pwr		6 PM Mar 01, 202 RACE 23 4 TYPE W DET P N N N M
0 d	B/di	V.		Offset 3. 20.00											Mkr1	1.709 m 9.03 dBn
(DJ	-				-		_				-		_			
a. 60					• <sup>1-</sup>	<	2				¢ <sup>3</sup>					
30.0 40.0	1					a landaria					dente	dellere				te met la start
					March 1	and date					1. A. 10 a	Jestinger-				September 1
			800 MH:	00000 C	GHz			#VBV	V 8.0	MHz				Sweep	10.00 ms	Span 0 H (10001 pts
KA	MODE	TB	c sci			6		Ŷ		FUNCTION	FUN	CTION V	UDTH.	FL	INCTION VALUE	
23	N		t t			2.55	9 ms 4 ms 9 ms	-9.03 c -8.59 c -9.13 c	dBm							
456																
7 8 9																
10																





Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



## A.3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	9.09	0	9.09	21	Pass
NVNT	1-DH5	2441	Ant1	10.67	0	10.67	21	Pass
NVNT	1-DH5	2480	Ant1	9.54	0	9.54	21	Pass
NVNT	2-DH5	2402	Ant1	9.59	0	9.59	21	Pass
NVNT	2-DH5	2441	Ant1	11.33	0	11.33	21	Pass
NVNT	2-DH5	2480	Ant1	10.16	0	10.16	21	Pass
NVNT	3-DH5	2402	Ant1	9.68	0	9.68	21	Pass
NVNT	3-DH5	2441	Ant1	11.37	0	11.37	21	Pass
NVNT	3-DH5	2480	Ant1	10.21	0	10.21	21	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



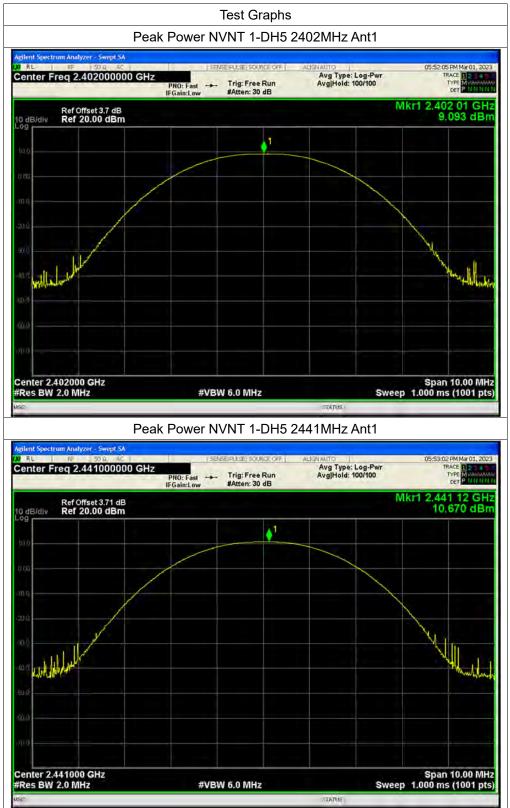





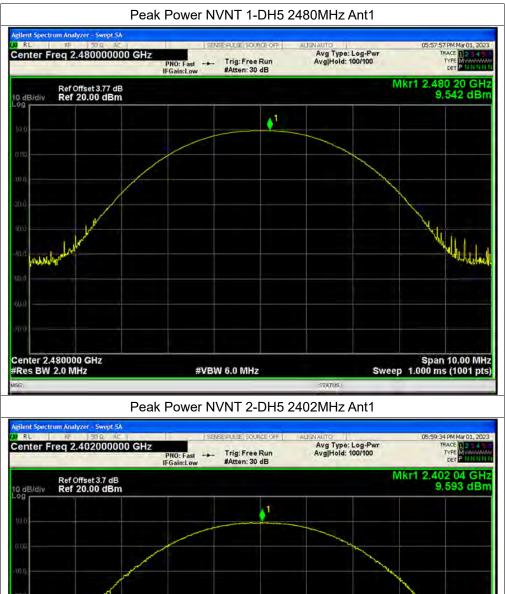




**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

TATUS



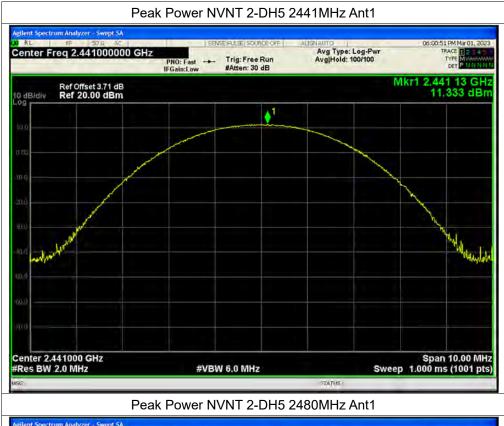


# gilent Spectrum Analyzer - Swept SA RL M Mar 01, 2023 DIFUSE SOURCE OF TYPE NNNN Center Freq 2.480000000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 PNO: Fast ---- Trig: Free Run IFGain:Low #Atten: 30 dB Mkr1 2.480 32 GHz 10,158 dBm Ref Offset 3.77 dB Ref 20.00 dBm 10 dB/div ▲1 NU. 1.11.5 Y.m. Span 10.00 MHz Sweep 1.000 ms (1001 pts) Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz STATUS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



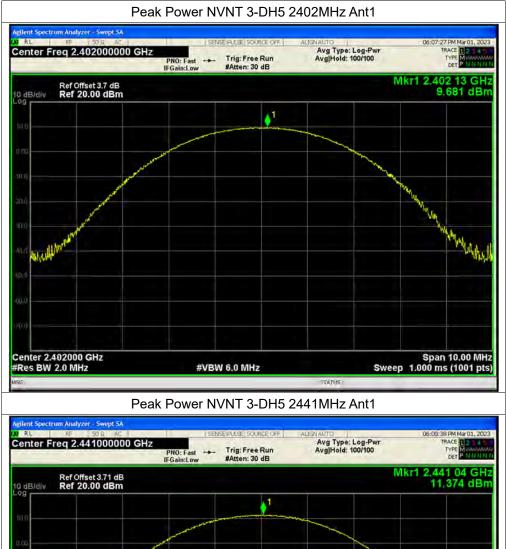




**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



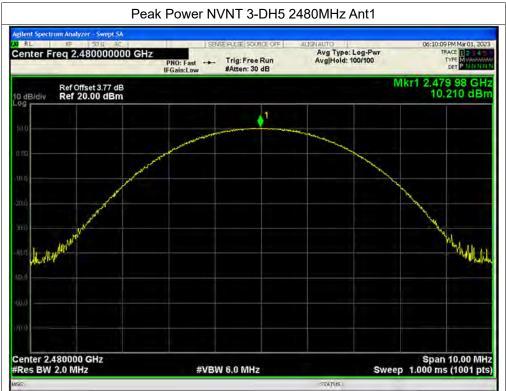



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# A.4. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	7.66	1.11	8.77	21	Pass
NVNT	1-DH5	2441	Ant1	9.06	1.11	10.17	21	Pass
NVNT	1-DH5	2480	Ant1	7.75	1.11	8.86	21	Pass
NVNT	2-DH5	2402	Ant1	6.26	1.11	7.37	21	Pass
NVNT	2-DH5	2441	Ant1	7.62	1.11	8.73	21	Pass
NVNT	2-DH5	2480	Ant1	6.7	1.11	7.81	21	Pass
NVNT	3-DH5	2402	Ant1	6.31	1.11	7.42	21	Pass
NVNT	3-DH5	2441	Ant1	7.72	1.11	8.83	21	Pass
NVNT	3-DH5	2480	Ant1	6.87	1.11	7.98	21	Pass



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



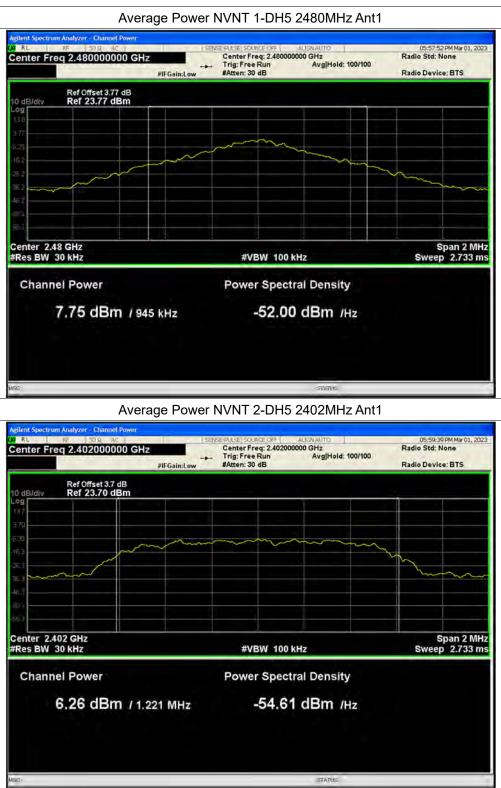






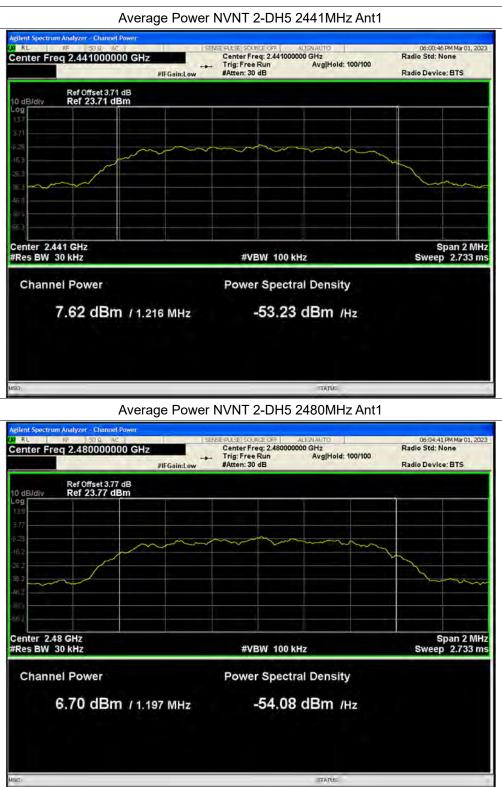




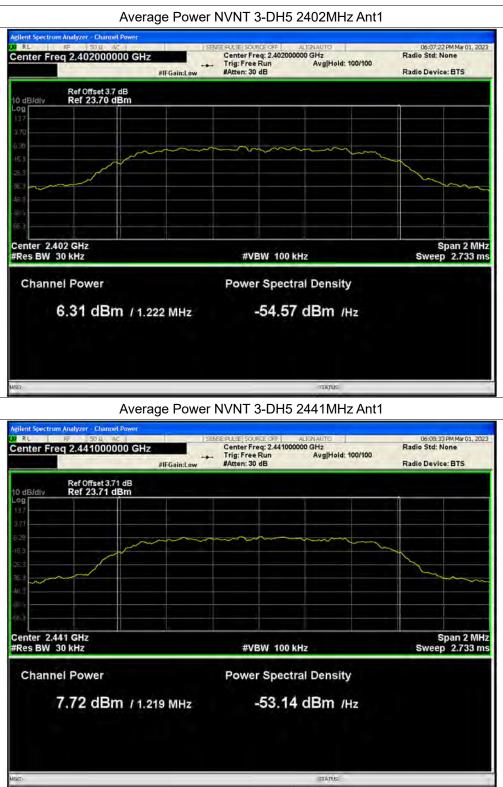

**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



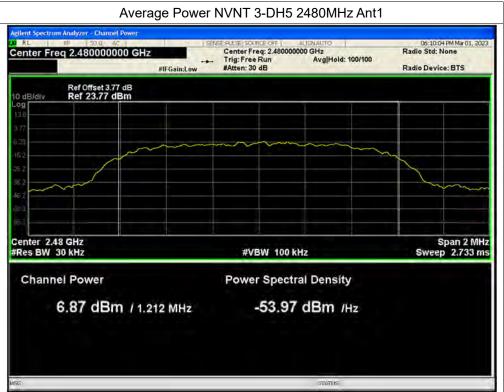



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.5. 20 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	1.024	Pass
NVNT	1-DH5	2441	Ant1	1.018	Pass
NVNT	1-DH5	2480	Ant1	1.044	Pass
NVNT	2-DH5	2402	Ant1	1.279	Pass
NVNT	2-DH5	2441	Ant1	1.288	Pass
NVNT	2-DH5	2480	Ant1	1.313	Pass
NVNT	3-DH5	2402	Ant1	1.288	Pass
NVNT	3-DH5	2441	Ant1	1.281	Pass
NVNT	3-DH5	2480	Ant1	1.294	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



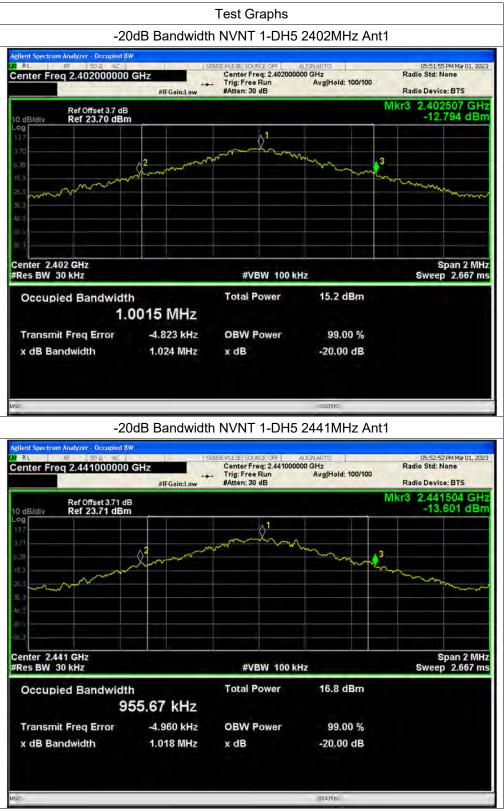




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



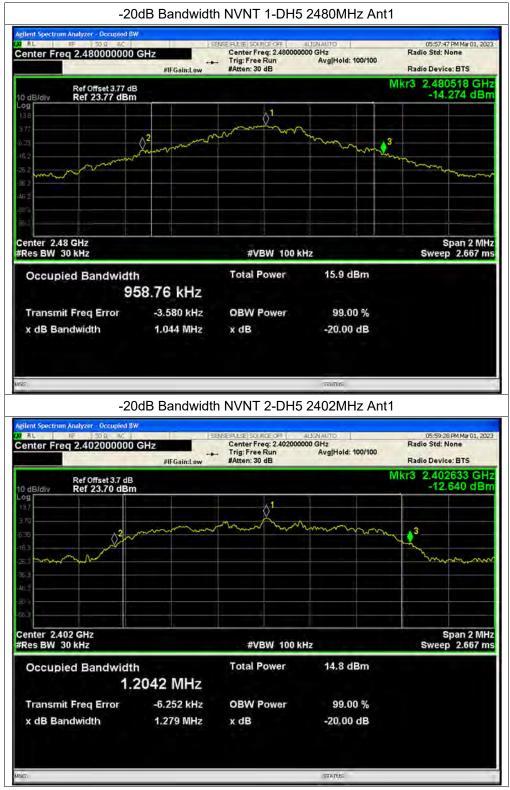




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



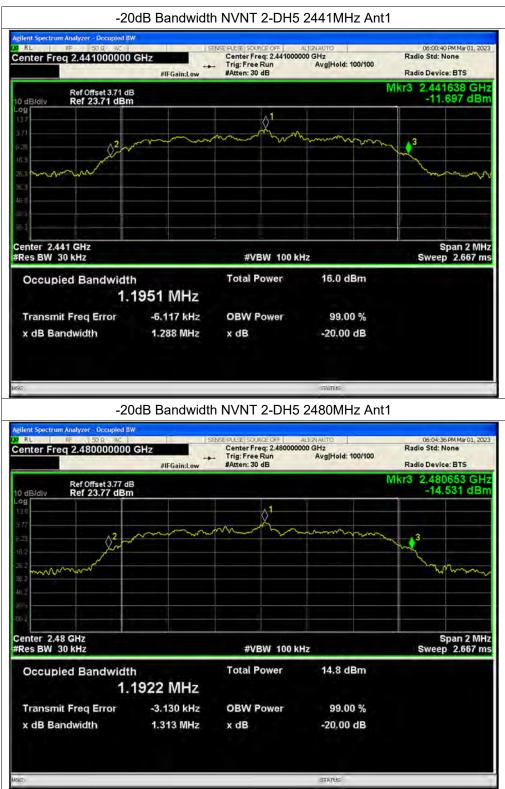







**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525







Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### A.6. Carried Frequency Separation

Condition Mode		Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS	Limit	Verdict
Condition	Condition Mode A		riopping rieq (winz)	nopping rieqz (minz)	(MHz)	(MHz)	Vertici
NVNT	1-DH5	Ant1	2401.964	2402.97	1.006	0.025	Pass
NVNT	2-DH5	Ant1	2402.008	2403.008	1	0.025	Pass
NVNT	3-DH5	Ant1	2402.026	2403.164	1.138	0.025	Pass

		Tes	t Graph	s		
	CFS	NVNT 1-[	DH5 240	02MHz Ant	:1	
Agilent Spectrum Analyzer	- Swept SA 50 Ω AC	SENSENTIS	E SOURCE OFF.	ALIGNAUTO		05:01:27 PM Mar 03, 202
Center Freq 2.40	2500000 GHz	Mide 😱 Trig	: Free Run en: 30 dB		e: Log-Pwr >100/100	TRACE 22 C
Ref Offse 0 dB/div Ref 20.0					Mkr	2.401 964 GH 5.998 dBn
.og [0.D	1				2 minut	A
100	Nende and	mm	m	non		mon
20.0						
48.Q						
eo ù						
70.0						
enter 2.402500 G Res BW 30 kHz	Hz	#VBW 100	kHz		Sweep	Span 2.000 MH 2.133 ms (1001 pts
KA MODE TAC SCL	× 2,401 964 GHz	7 5,998 dBm	FUNCTION	FUNCTION WIDTH	FUNC	TION VALUE
2 N 1 f 3	2,402 970 GHz	5.910 dBm				
5 <b>6 7</b>						
8 9 10						
						2
5G				STATUS		

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



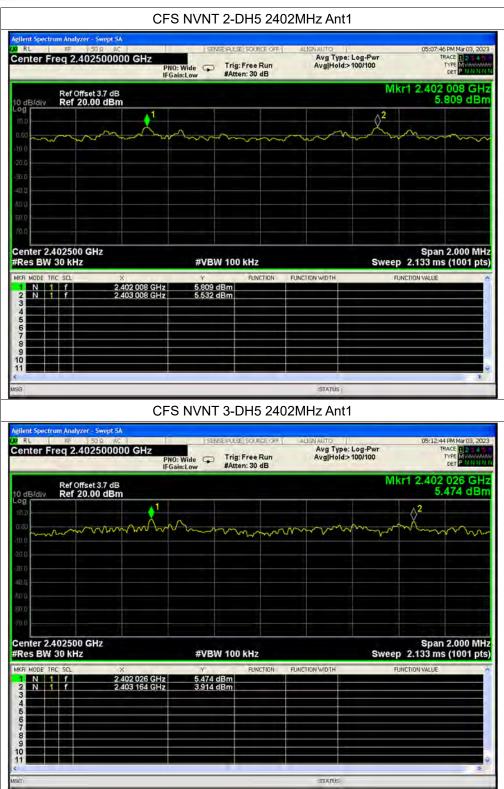

**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China





# A.7. Time of Occupancy (Dwell time)

Condition	Condition Mode	Modo	Frequency	Frequency	Frequency	Antenna	Pulse Time	Total Dwell	Burst	Period	Limit	Verdict
Condition	woue	(MHz)	Antenna	(ms)	Time (ms)	Count	Time (ms)	(ms)	vertici			
NVNT	1-DH1	2402	Ant1	0.382	119.566	313	31600	400	Pass			
NVNT	1-DH3	2402	Ant1	1.638	280.098	171	31600	400	Pass			
NVNT	1-DH5	2402	Ant1	2.885	317.35	110	31600	400	Pass			
NVNT	2-DH1	2402	Ant1	0.387	127.323	329	31600	400	Pass			
NVNT	2-DH3	2402	Ant1	1.64	257.48	157	31600	400	Pass			
NVNT	2-DH5	2402	Ant1	2.888	309.016	107	31600	400	Pass			
NVNT	3-DH1	2402	Ant1	0.387	122.292	316	31600	400	Pass			
NVNT	3-DH3	2402	Ant1	1.638	258.804	158	31600	400	Pass			
NVNT	3-DH5	2402	Ant1	2.888	326.344	113	31600	400	Pass			




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



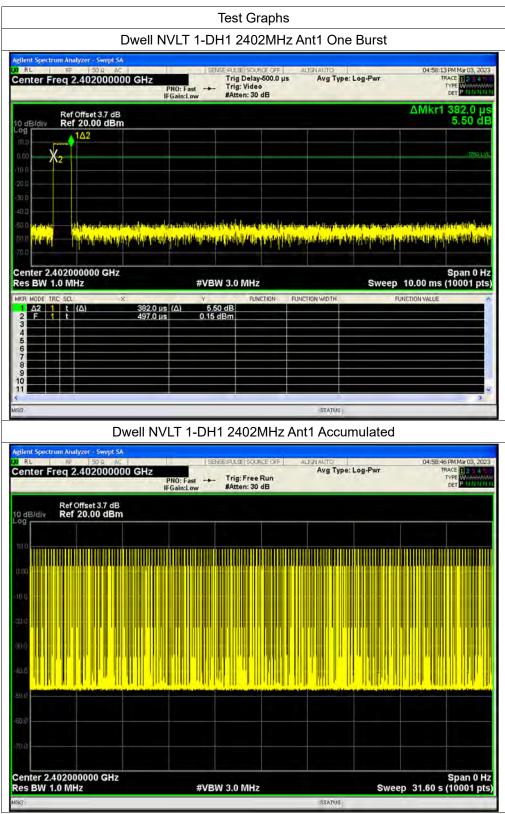




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




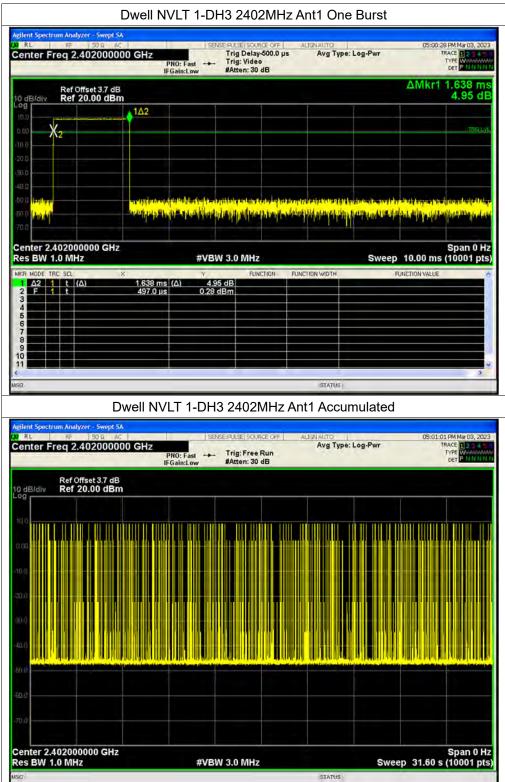



Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn




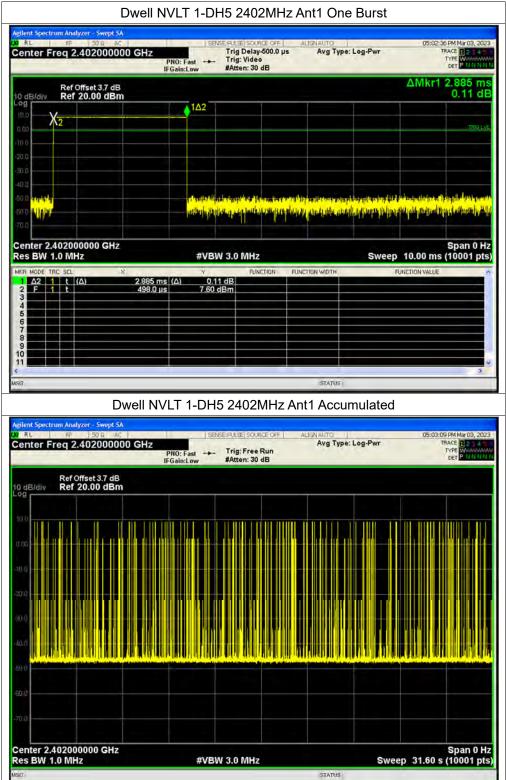




Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



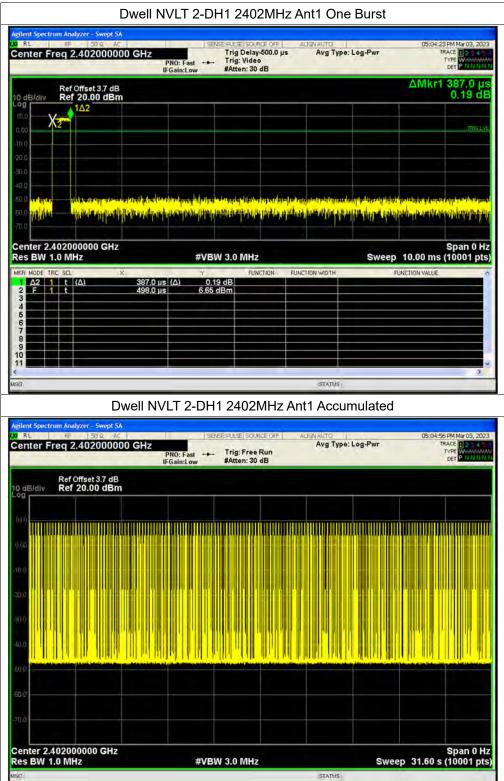





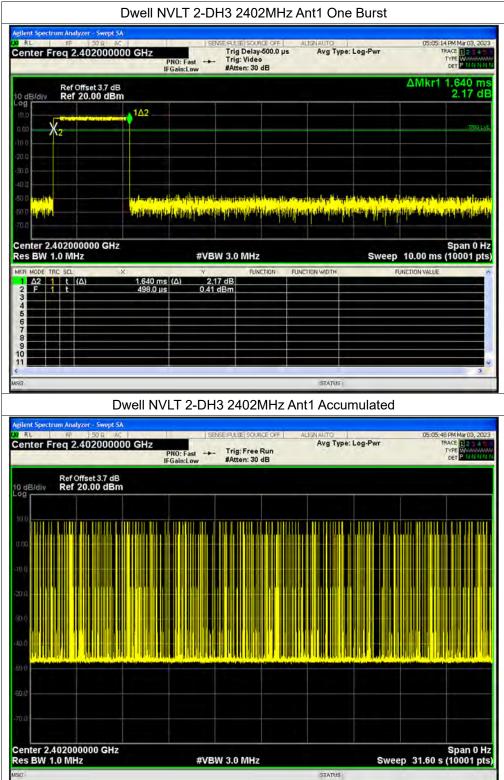




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



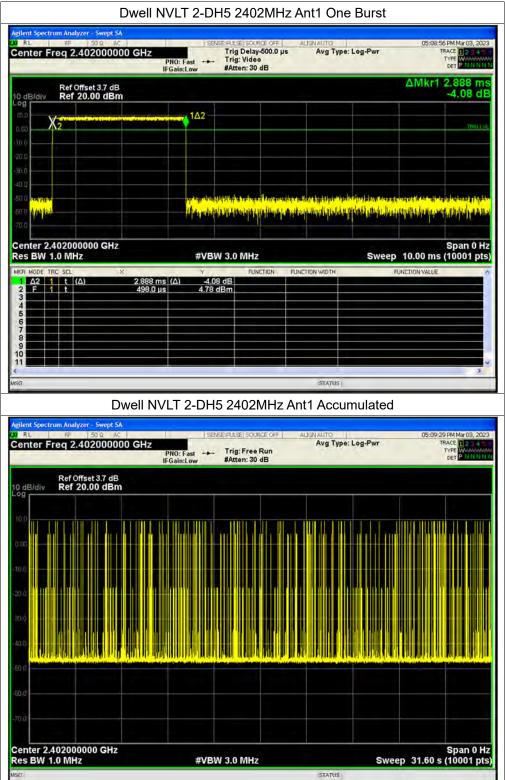






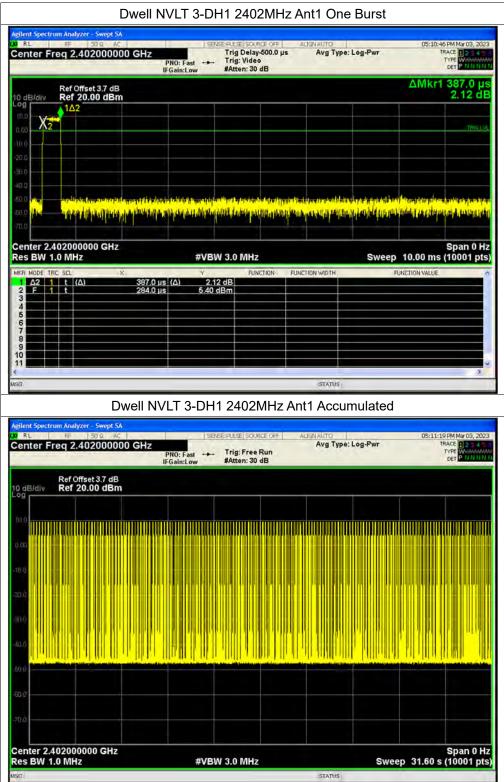






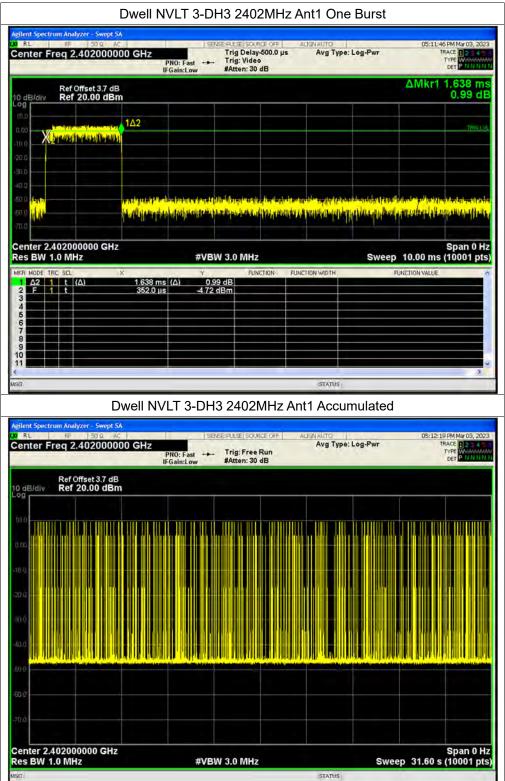





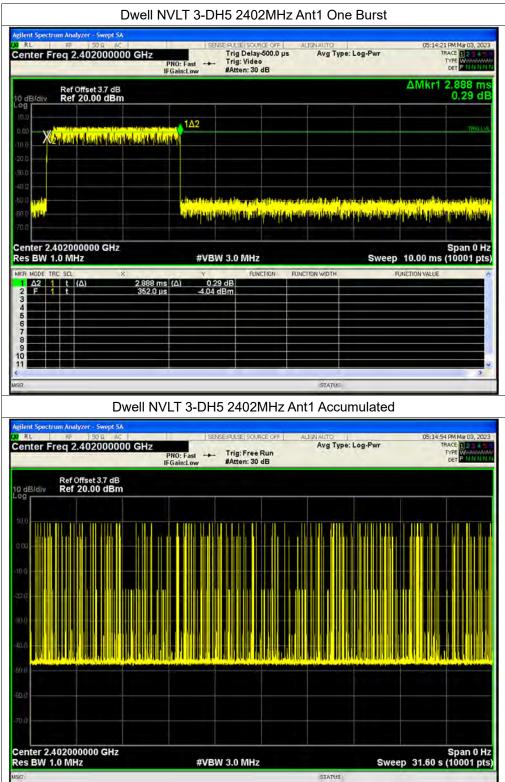



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



# A.8. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-56.68	-20	Pass
NVNT	1-DH5	2441	Ant1	-57.74	-20	Pass
NVNT	1-DH5	2480	Ant1	-56.81	-20	Pass
NVNT	2-DH5	2402	Ant1	-55.93	-20	Pass
NVNT	2-DH5	2441	Ant1	-56.92	-20	Pass
NVNT	2-DH5	2480	Ant1	-56.43	-20	Pass
NVNT	3-DH5	2402	Ant1	-54.81	-20	Pass
NVNT	3-DH5	2441	Ant1	-57.45	-20	Pass
NVNT	3-DH5	2480	Ant1	-55.6	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



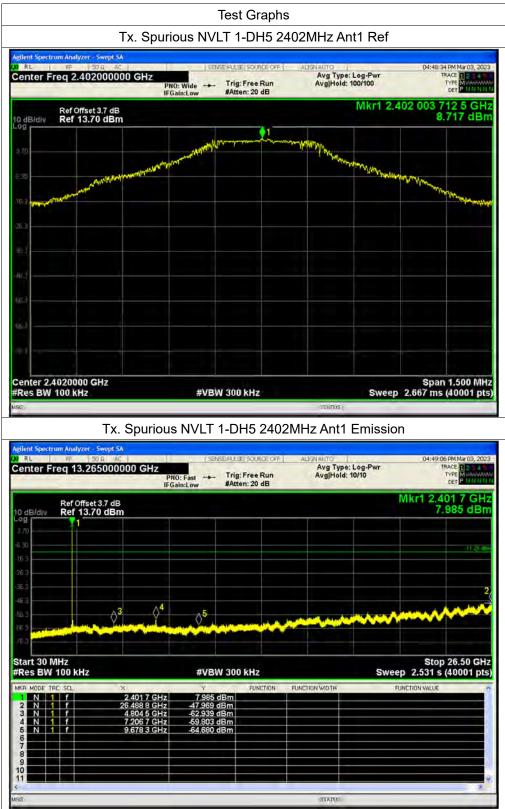


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



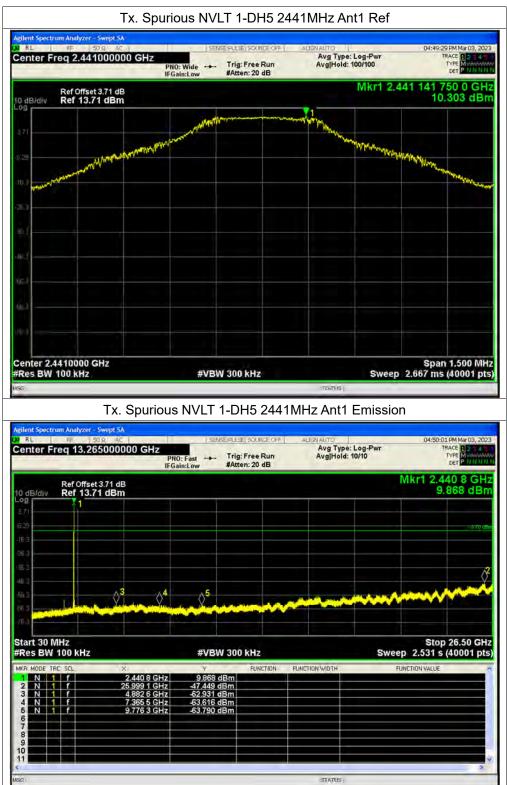

**MORLAB** 



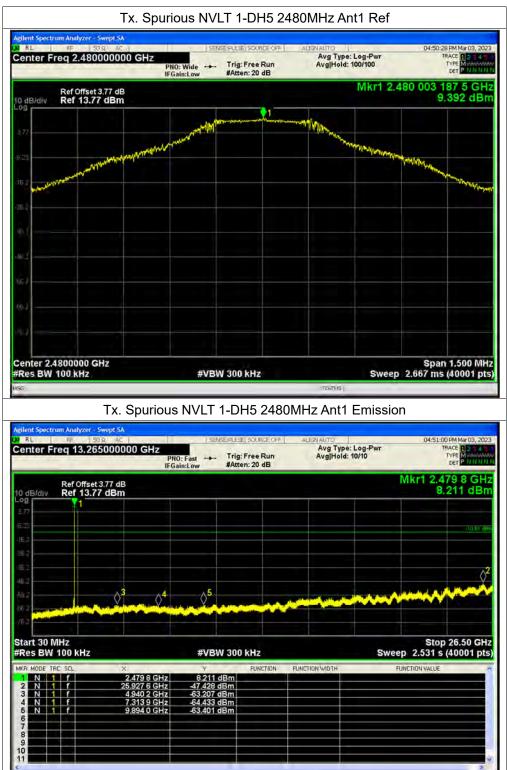




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn

STATUS



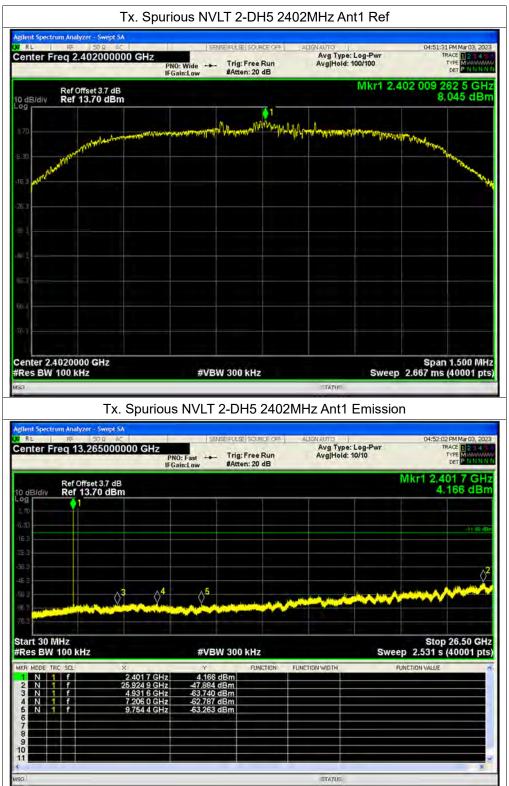




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fa Http://www.morlab.cn E-


Fax: 86-755-36698525



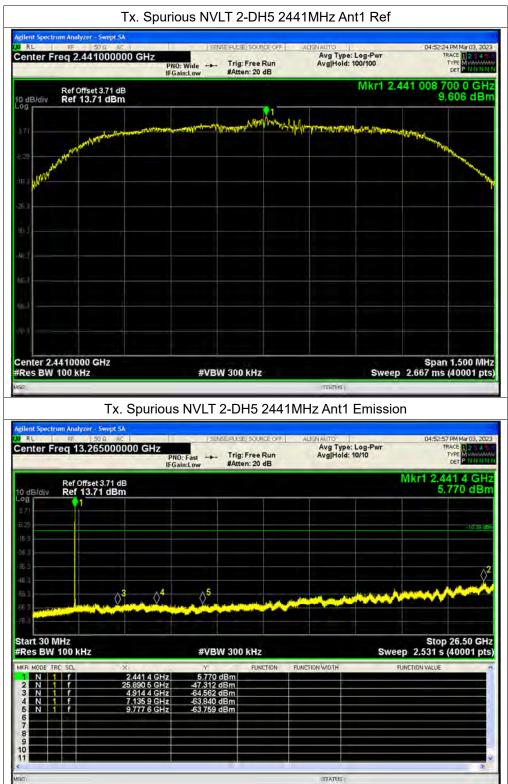






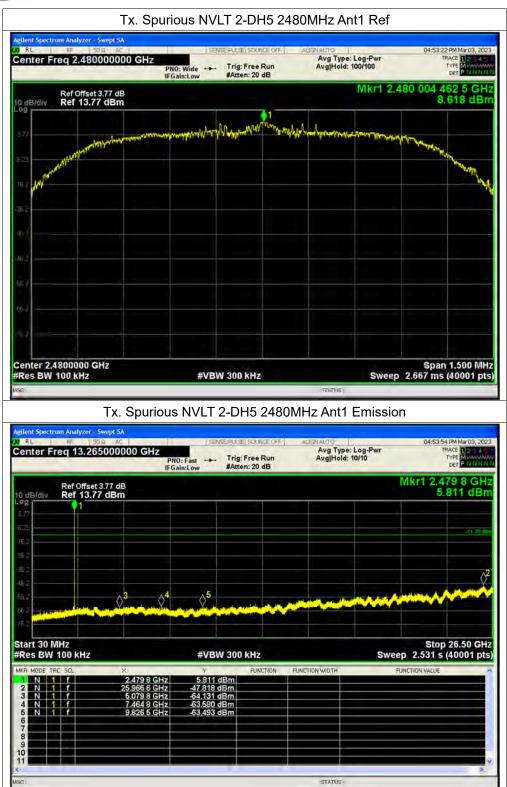



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



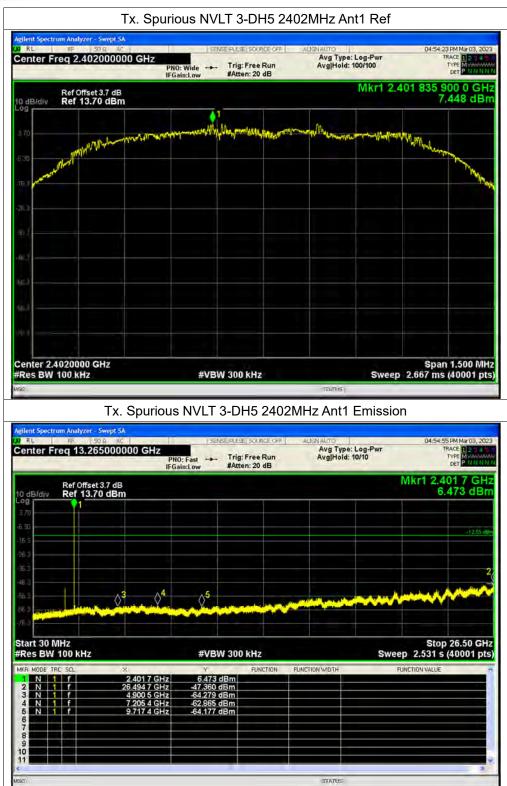




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn



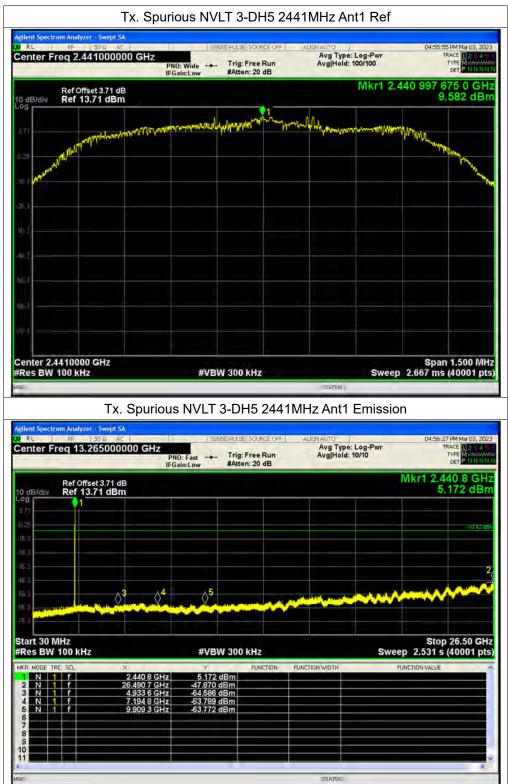




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



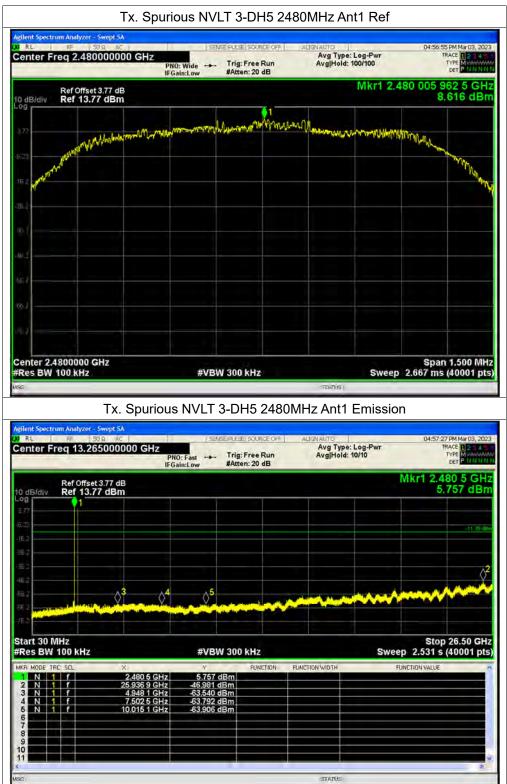



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



## A.9. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-57.78	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-63.28	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-48.7	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-62.79	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-51.03	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-61.78	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-63.4	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-63.19	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-62.54	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-61.46	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-62.44	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-61.96	-20	Pass




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



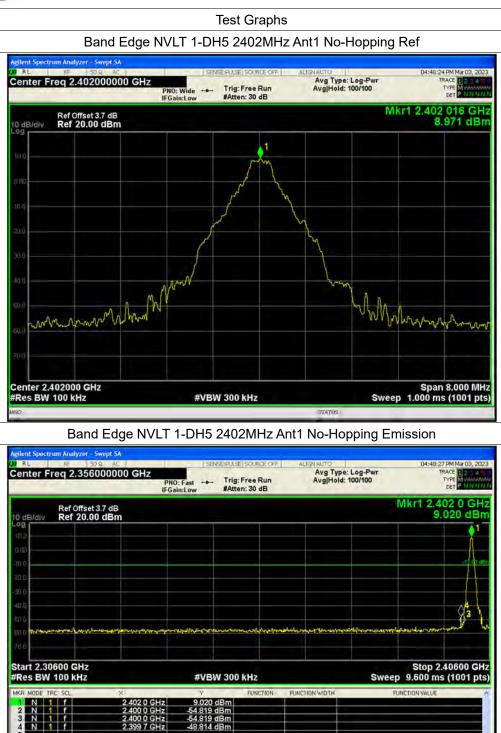

Shenzhen Morlab Communications Technology Co., Ltd.

STATU

E-mail: service@morlab.cn


1 f 1 f

4 5 67

10

**MORLAB** 



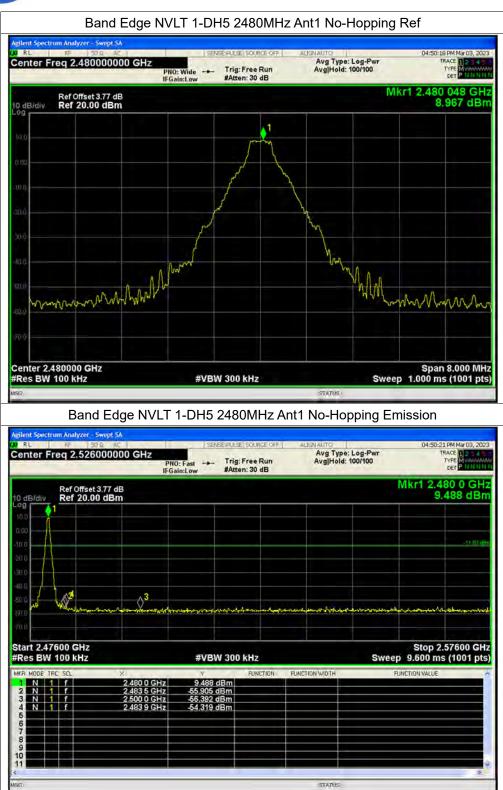

E-mail: service@morlab.cn


Fax: 86-755-36698525

Tel: 86-755-36698555

Http://www.morlab.cn

**MORLAB** 



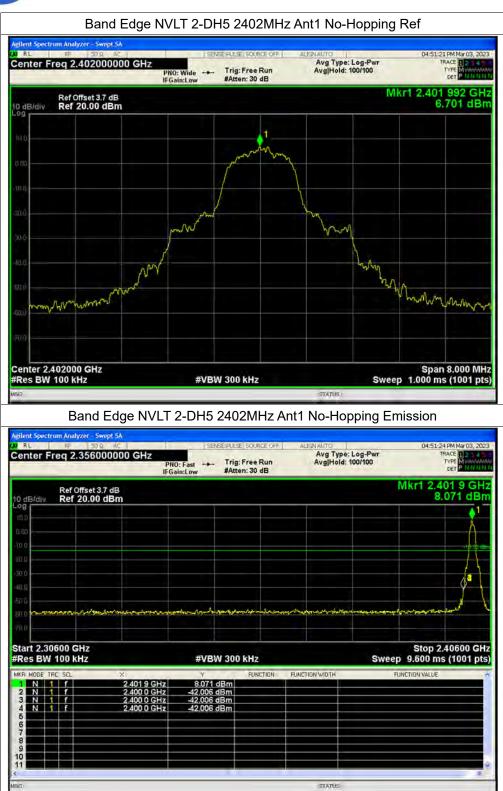


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn



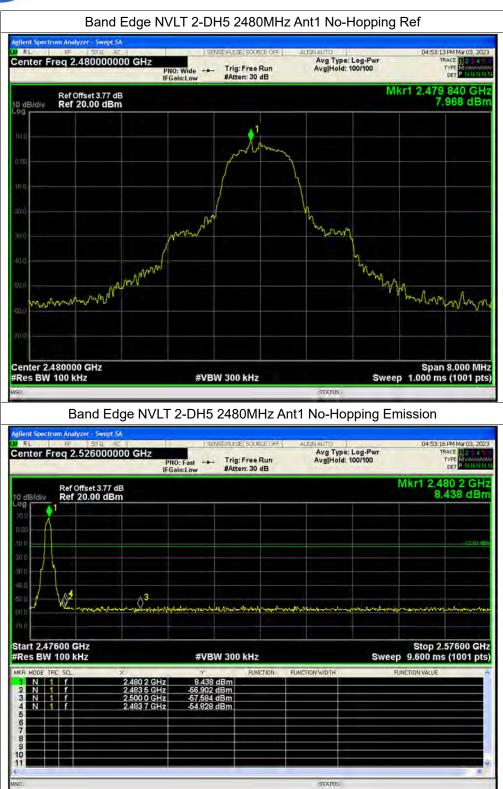

Fax: 86-755-36698525

E-mail: service@morlab.cn


Tel: 86-755-36698555

Http://www.morlab.cn

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

**MORLAB** 



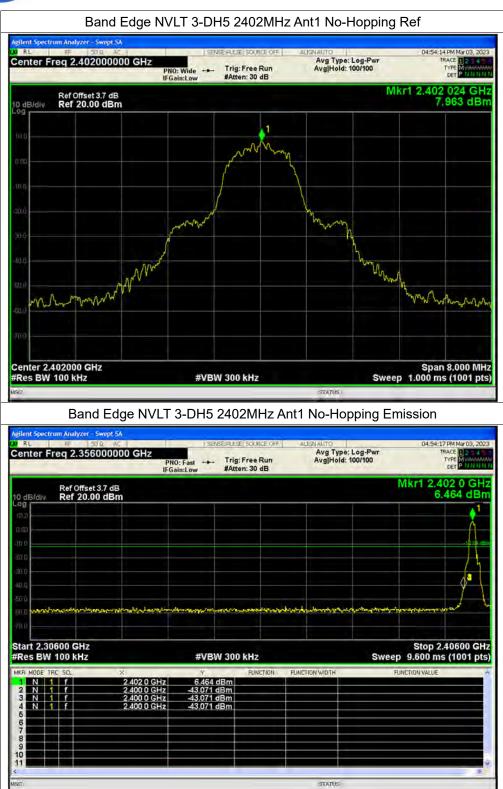

Fax: 86-755-36698525


E-mail: service@morlab.cn

Tel: 86-755-36698555

Http://www.morlab.cn

Shenzhen Morlab Communications Technology Co., Ltd. **MORLAB** FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China




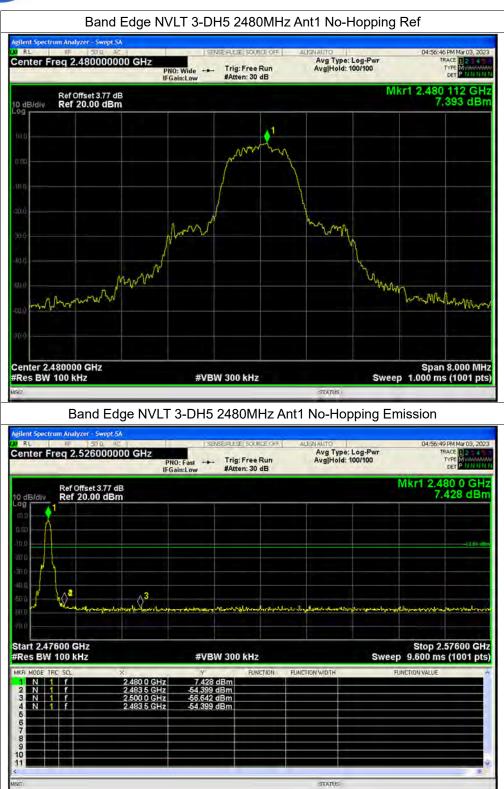

Shenzhen Morlab Communications Technology Co., Ltd.

**MORLAB** 



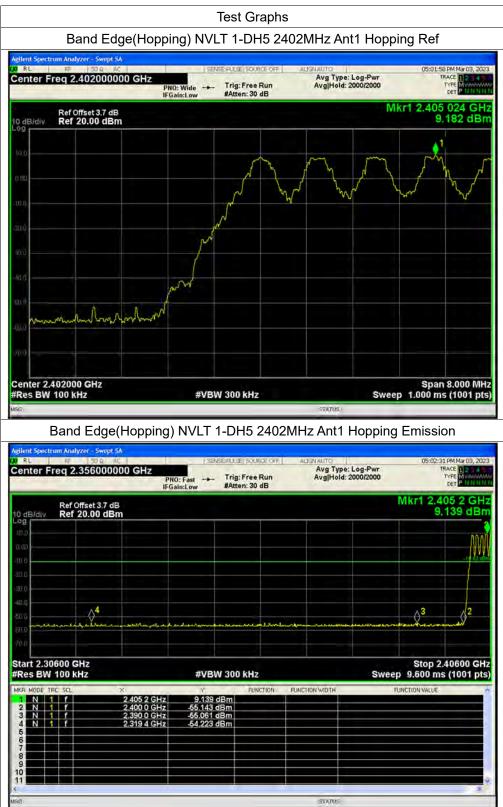


**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Fax: 86-755-36698525 Tel: 86-755-36698555 Http://www.morlab.cn



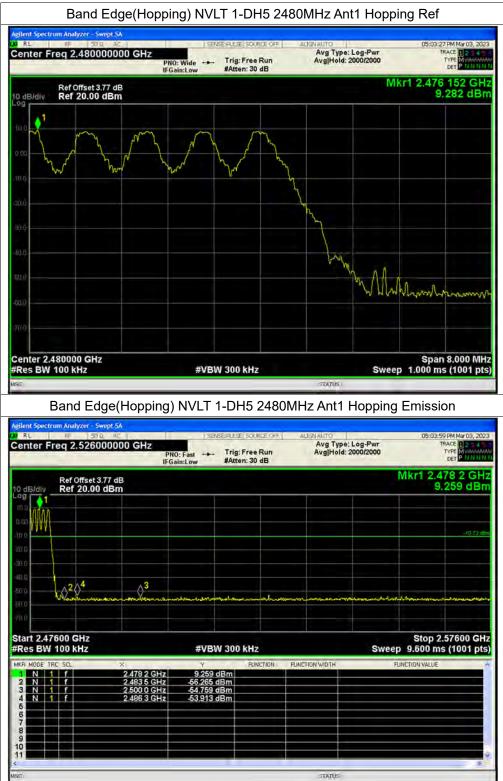

Fax: 86-755-36698525

E-mail: service@morlab.cn


Tel: 86-755-36698555

Http://www.morlab.cn

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

**MORLAB** 



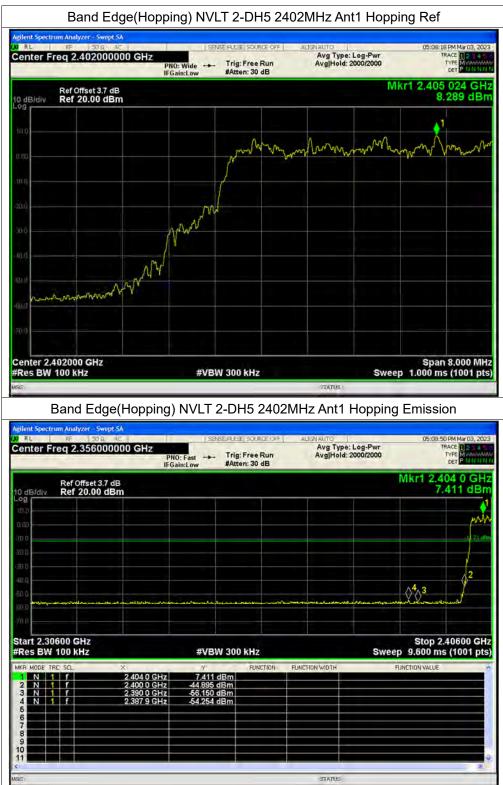

Dogo 96 of 4

Fax: 86-755-36698525

E-mail: service@morlab.cn

Tel: 86-755-36698555

Http://www.morlab.cn

MORLAB








Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn E-mail: service@morlab.cn




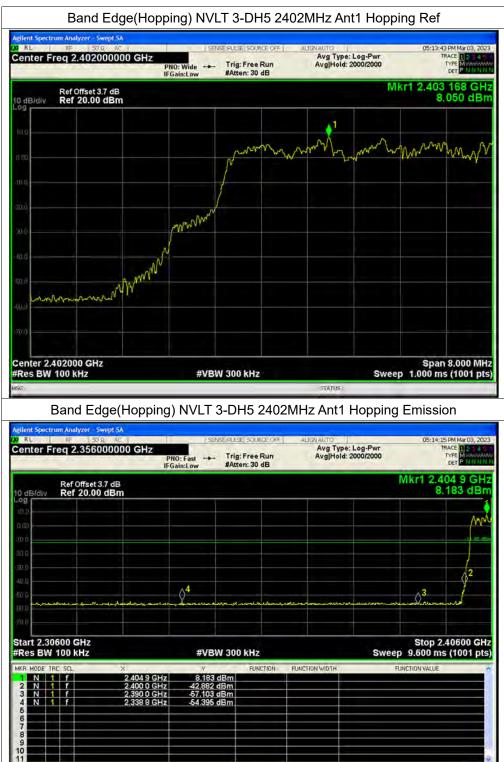



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China STATUS



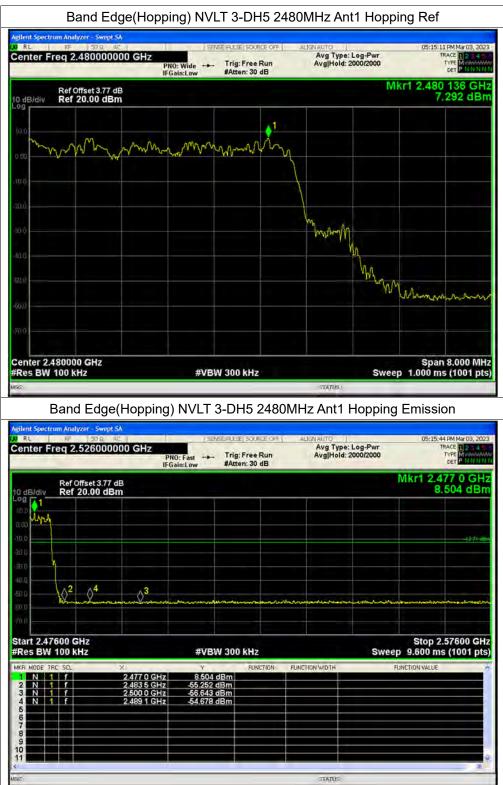

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

**MORLAB** 





## A.10. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


## A. Test Setup:

Test Mode: <u>EUT + Adapter + USB cable + Earphone + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB $\mu$ V] =U<sub>R</sub> + L<sub>Cable loss</sub> [dB] + A<sub>Factor</sub> U<sub>R</sub>: Receiver Reading A<sub>Factor</sub>: Voltage division factor of LISN






## **B. Test Plot:**

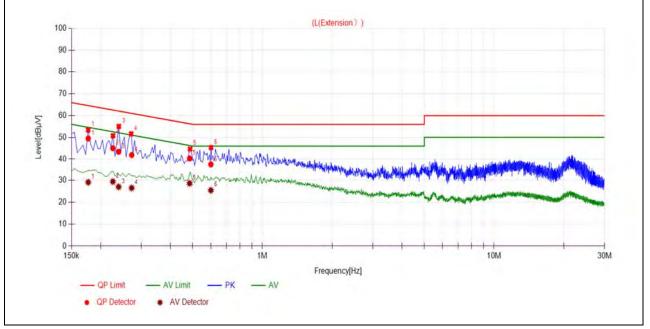


(L Phase)

No.	Fre.	Emission L	evel (dBµV)	Limit (	dBµV)	Power-line	Verdict
	(MHz) Quai-pea		<sup>IHz)</sup> Quai-peak Average Quai-peak Average				
1	0.1770	49.48	29.14	64.63	54.63		PASS
2	0.2262	45.01	29.44	62.59	52.59		PASS
3	0.2395	43.39	27.04	62.11	52.11	Line	PASS
4	0.2727	41.89	26.53	61.03	51.03	LITE	PASS
5	0.4851	40.27	28.64	56.25	46.25		PASS
6	0.5991	37.34	25.46	56.00	46.00		PASS







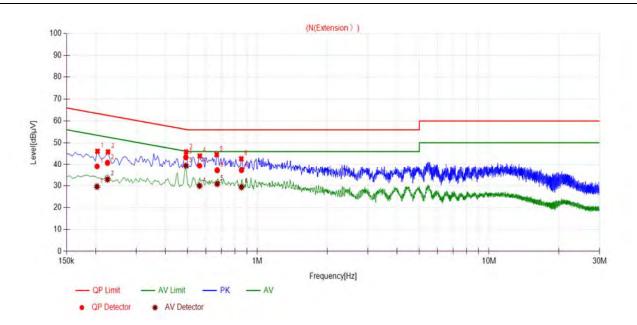

(N	Phase)	
----	--------	--

No.	Fre.	Emission L	Emission Level (dBµV)		dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak Average			
1	0.2031	39.07	29.66	63.48	53.48		PASS
2	0.2254	40.82	32.98	62.62	52.62		PASS
3	0.4911	43.36	39.44	56.15	46.15	Noutral	PASS
4	0.5627	39.37	30.04	56.00	46.00	Neutral	PASS
5	0.6708	37.17	30.92	56.00	46.00		PASS
6	0.8534	37.26	29.43	56.00	46.00		PASS



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# A.11. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### Receiver Max. Detector Frequency Reading AT Emission Limit A<sub>Factor</sub> Channel (MHz) UR (dB) (dB@3m) Е (dBµV/m) PK/AV (dBµV) $(dB\mu V/m)$ 0 PΚ 74 2311.44 25.24 6.74 27.20 59.18 0 2389.65 AV 11.84 6.74 27.20 45.78 54 78 2493.95 PΚ 25.00 6.74 27.20 74 58.94 2483.54 AV 6.74 78 12.08 27.20 46.02 54

#### GFSK Mode



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525

Verdict

PASS

PASS


PASS

PASS



Marker	03:07:07 AM Apr 23, 2023	ALIGN OFF		SENSE:IN	1	zer - Swept SA 50 Ω DC	RF PRESEL	1
Select Market	TRACE 2 3 4 5 6 TYPE NWWWWWW DET PPNNNN	Type: Voltage Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast IFGain:Low	40000000	2.31144 PREAMP	
	2.311 440 GHz 25.235 dBµV	Mkr2				2.99 dBµV	Ref 82.	3/div
Norm								
Del				a			2-	
Fixed								
c	Stop 2.40400 GHz 000 ms (1001 pts)		FUNCTION	3.0 MHz	#VBW :		000 GHz (CISPR)	
Properties	POWLTON VALUE	FONCTION (ND) A	FUNCTION	23.206 dBµV 25.235 dBµV		2.390	f	N 1 N 1
<b>Mo</b> 1 o								
	1.10	STATUS		_ 111				

(PEAK, Channel 0, GFSK)

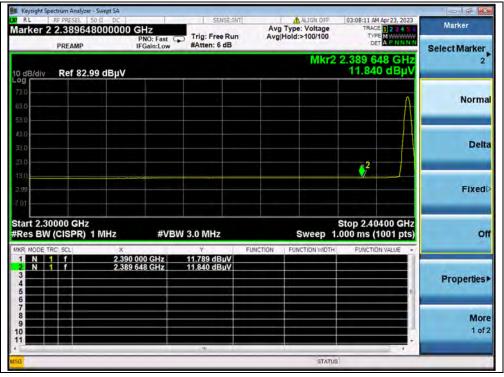

# (AVERAGE, Channel 0, GFSK)

**MORLAB** 

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



RF PR	ESEL 50 D	DC		SENSE		ALIGN OFF	04:32:54 AM Apr 23, 2023	10-steel
	9395000 EAMP		PNO: Fast ( FGain:Low	Trig: Free Re	un Av	g Type: Voltage g Hold:>100/100	TRACE 2 3 4 5 0 TYPE MWWWWW DET P P N N N	And the second second second
	ef 82.99 d		-Gain:Low	#Atten: 0 dB		Mkr2	2.493 950 GHz 25.000 dBµV	Select Marker 2
1								Norma
/		mal 1		- Aug		2		Delt
								Fixed
2.47800 BW (CIS	SPR) 1 M	Hz	#VB	W 3.0 MHz	FUNCTION	Sweep 1	Stop 2.50000 GHz .000 ms (1001 pts)	o
		2.483 5	00 GHz 50 GHz	23,846 dBµV 25.000 dBµV			PONCTION VALUE	Properties
								Moi 1 of
							-	

(PEAK, Channel 78, GFSK)

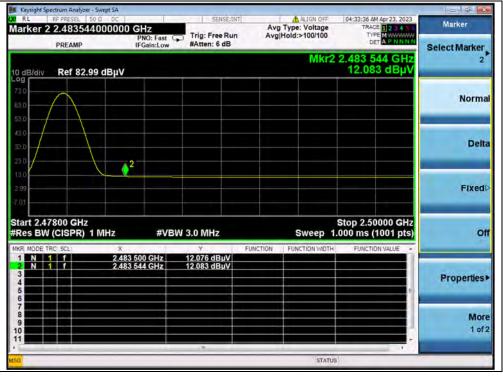

## (AVERAGE, Channel 78, GFSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525 E-mail: service@morlab.cn



#### π/4-DQPSK Mode

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voraiot
0	2348.05	PK	24.52	6.74	27.20	58.46	74	PASS
0	2389.02	AV	11.81	6.74	27.20	45.75	54	PASS
78	2483.68	PK	25.48	6.74	27.20	59.42	74	PASS
78	2483.50	AV	11.96	6.74	27.20	45.90	54	PASS



(PEAK, Channel 0,π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 8 Http://www.morlab.cn E-mai


Fax: 86-755-36698525

orlab.cn E-mail: service@morlab.cn



trum Analyzer - Swept SA F PRESEL 50 Ω DC 2.389024000000	GHz	SENSE:INT	Aug Type: Voltage	03:12:45 AM Apr 23, 2023 TRACE 2 3 4 5 6	Marker
PREAMP	PNO: Fast C Trig	: Free Run ten: 6 dB	Avg[Hold:>100/100	DET A P N N N N	Select Marker
Ref 82.99 dBµV			Mkr2	2.389 024 GHz 11.814 dBµV	2
				Λ	Norm
					Del
				<b>♦</b> <sup>21</sup>	Fixed
000 GHz CISPR) 1 MHz	#VBW 3.01	MHZ	Sweep 1	Stop 2.40400 GHz .000 ms (1001 pts)	c
f 2.390		06 dBµV 14 dBµV	ON PONCHON WOTH	FORCHONVALUE	Properties
					<b>Mo</b> 1 o
			STATUS		

(AVERAGE, Channel 0, π/4-DQPSK)

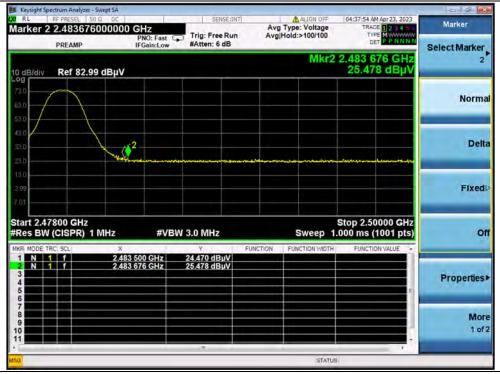

#### (PEAK, Channel 78, π/4-DQPSK)

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn

Fax: 86-755-36698525 E-mail: service@morlab.cn



Marker	M Apr 23, 2023		ALIGN OFF		SENSE:1/	1	DC	n Analyzer - Sweş RESEL   50 Ω	RF PR
Select Marker	E 1 2 3 4 5 4 PE MWWWWW T A P NNNN	TV	Type: Voltage old:>100/100		Trig: Free Run #Atten: 6 dB	IO: Fast G	P	8354400 EAMP	
2	44 GHz 2 dBµV	2.483 5	Mkr2				BμV	ef 82.99 d	/div Re
Norma									- (
Dell							<u>^2</u>		/
Fixed							<u> </u>		
c	0000 GHz 1001 pts)	.000 ms (	Sweep 1.	Eluiotici.	3.0 MHz	#VBW		SPR) 1 MI	_
	DN VALUE	FUNCTI	FUNCTION WIDTH	FUNCTION	1.962 dBµV 1.952 dBµV	) GHz I GHz	× 2.483 50 2.483 54		ODE TRC SC N 1 f N 1 f
Properties									
Properties Mor 1 of									بر کر بر و بر بر و بر بر و بر بر و بر بر و بر بر و بر بر

(AVERAGE, Channel 78, π/4-DQPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



#### 8-DPSK Mode

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
	(MHz)	PK/ AV	U <sub>R</sub> (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Voluiot
0	2384.03	PK	24.92	6.74	27.20	58.86	74	PASS
0	2390.00	AV	11.85	6.74	27.20	45.79	54	PASS
78	2483.61	PK	24.36	6.74	27.20	58.30	74	PASS
78	2483.50	AV	11.98	6.74	27.20	45.92	54	PASS



(PEAK, Channel 0, 8-DPSK)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.cn E-mail: service@morlab.cn

Fax: 86-755-36698525



Marker	123450	03:23:29 AM / TRACE	ALIGN OFF Type: Voltage		SENSE:IN	GHz	og oc   3000000 (	2 389648	RL
Select Marker	APNNNN	TVPE DET	Hold:>100/100	Avg	Trig: Free Run #Atten: 6 dB	PNO: Fast C	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	PREAMP	
2		2.389 64 11.844	Mkr2				9 dBµV	Ref 82.9	dB/div
Norm	Λ								9 10 3.0
Del									3 D 3 D 3 D
		¢ <sup>2</sup>							3.0 3.0 3.0
Fixed									99 01
o		Stop 2.404 000 ms (1			3.0 MHz	#VBW	MHz	000 GHz (CISPR) 1	
_	VALUE -	FUNCTION	FUNCTION WIDTH	FUNCTION	Y 1.852 dBµV		× 2,390 (	C SCL	R MODE TR
Properties	E				11.844 dBµV	648 GHz	2.389		2 N 1 3 4 5 6
Moi 1 of									
				_					
			STATUS						3

(AVERAGE, Channel 0, 8-DPSK)

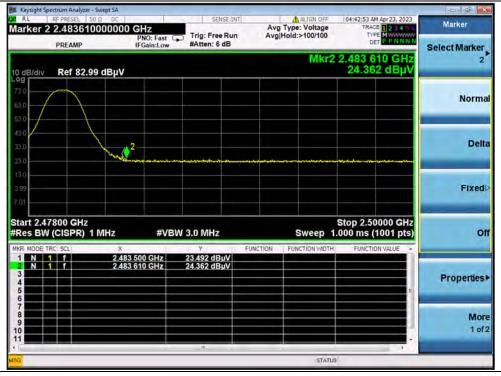

# (PEAK, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.cn Fax: 86-755-36698525



arker 2 2	F PRESEL 50 9		7	SENSE:10		ALIGN OFF	04:43:39 AM Apr 23, 2023 TRACE 2 3 4 5 6	Marker
	PREAMP	PNO	D: Fast G	Trig: Free Run #Atten: 6 dB	n Avg	Hold:>100/100	DET A P N N N N	Select Marker
dB/div	Ref 82.99 dl	ΒμV				Mkr2	2.483 544 GHz 11.948 dBµV	2
								Norm
		<u>A</u> 2						De
10		<u> </u>						Fixe
	CISPR) 1 MH		#VB\	₩ 3.0 MHz		Sweep 1	Stop 2.50000 GHz .000 ms (1001 pts)	
R MODE TRC		× 2.483 500 2.483 544		Υ 11.975 dBμV 11.948 dBμV	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	
							ананананананананананананананананананан	Propertie
								Mc 1 c

(AVERAGE, Channel 78, 8-DPSK)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn



# A.12. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ 

A<sub>T</sub>: Total correction Factor except Antenna

U<sub>R</sub>: Receiver Reading

G<sub>preamp</sub>: Preamplifier Gain

A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




## GFSK Mode

Plots for Channel 0

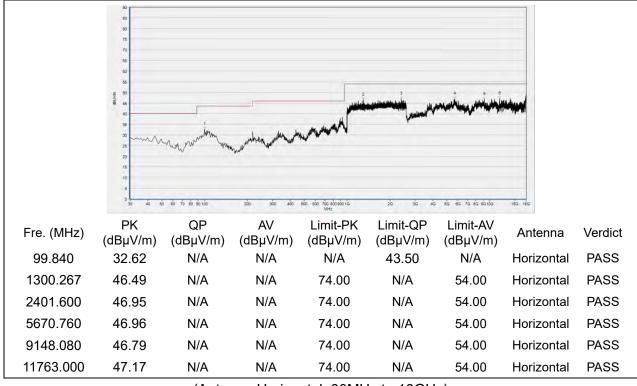

(Antenna Horizontal, 30MHz to 18GHz)

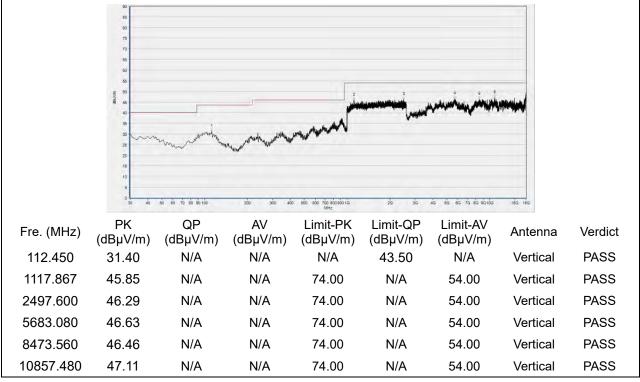

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



#### Plot for Channel 39

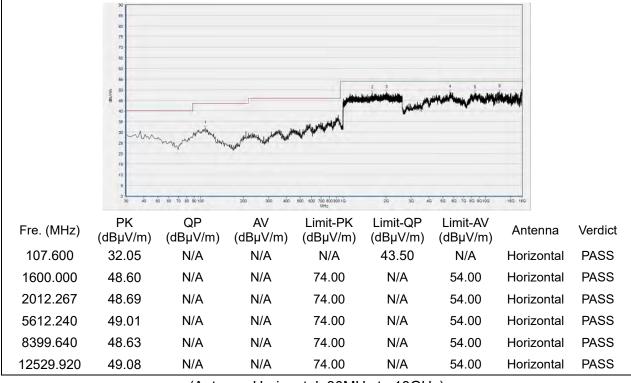

(Antenna Horizontal, 30MHz to 18GHz)

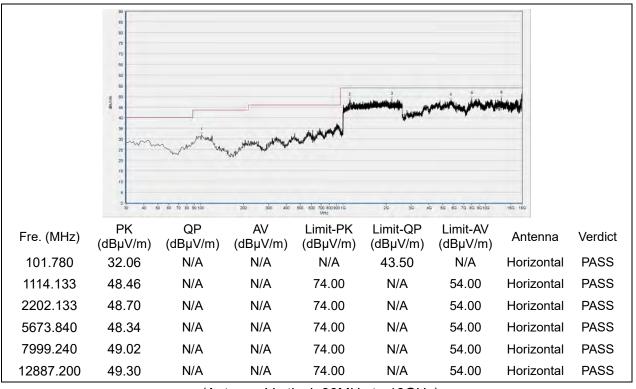

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn



#### Plot for Channel 78

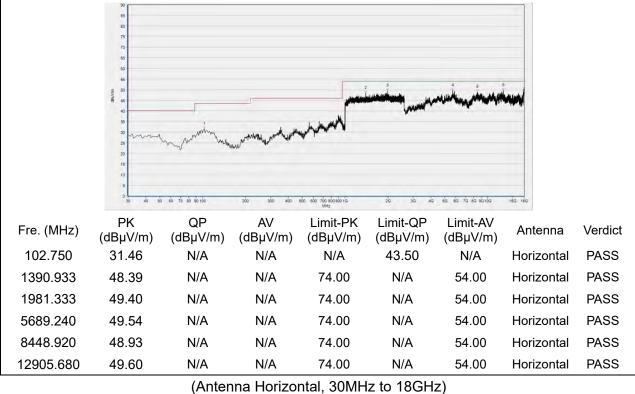

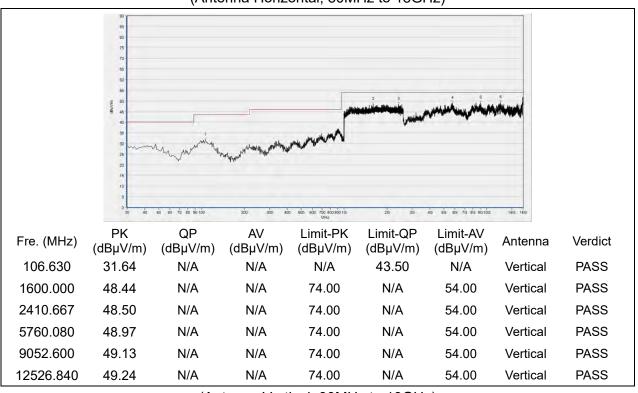

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




## π/4-DQPSK Mode



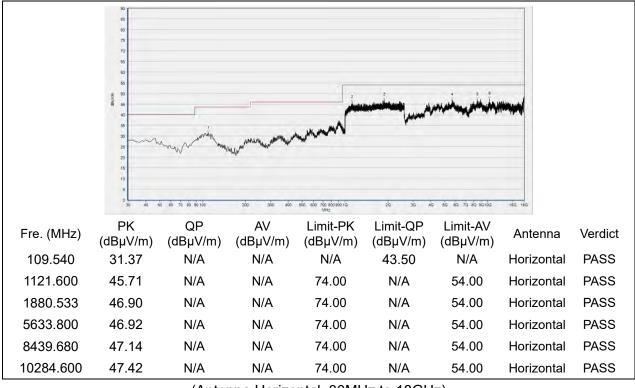

(Antenna Horizontal, 30MHz to 18GHz)

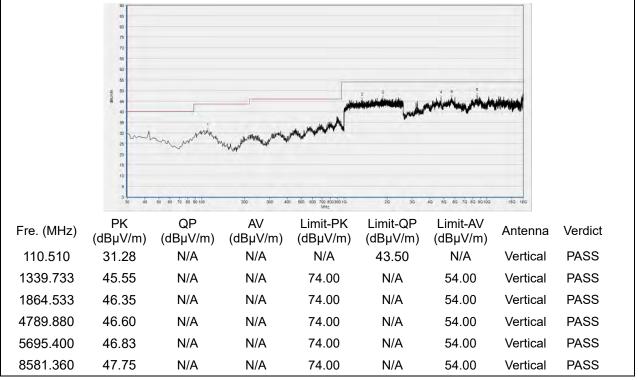

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



#### Plot for Channel 39

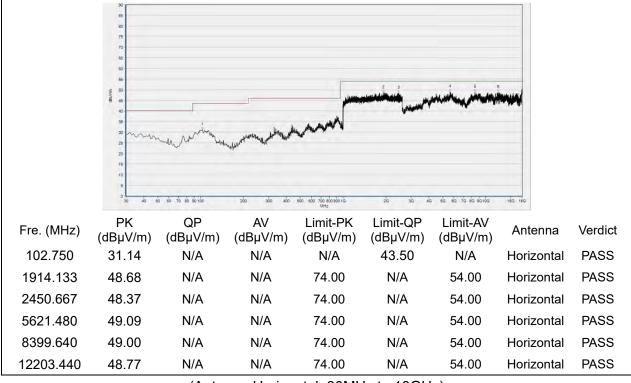

(Antenna Horizontal, 30MHz to 18GHz)

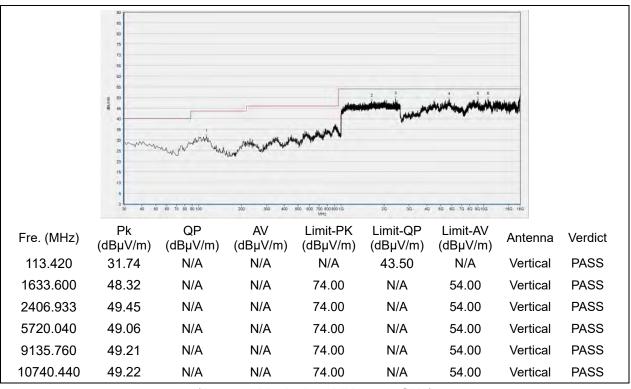

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn


Http://www.morlab.cn



#### Plot for Channel 78

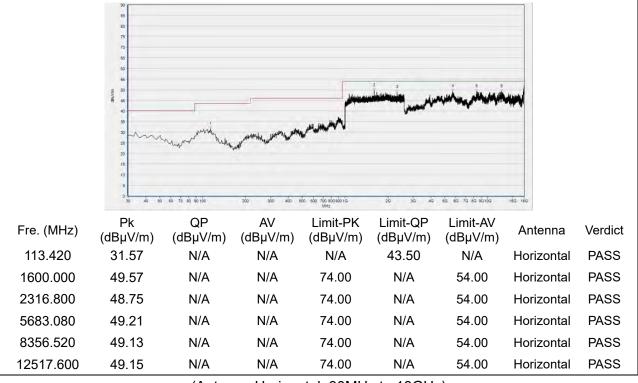

(Antenna Horizontal, 30MHz to 18GHz)

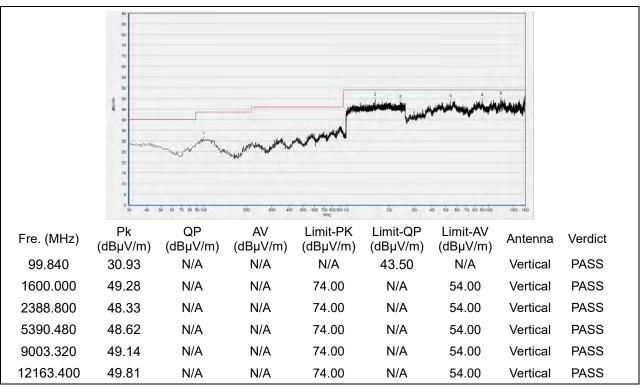

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555


Fax: 86-755-36698525

Http://www.morlab.cn




## 8-DPSK Mode



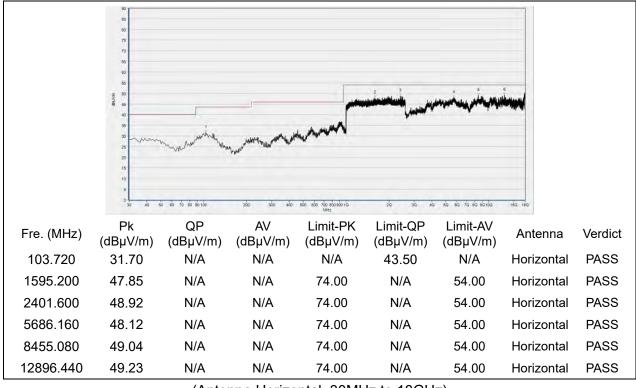

(Antenna Horizontal, 30MHz to 18GHz)

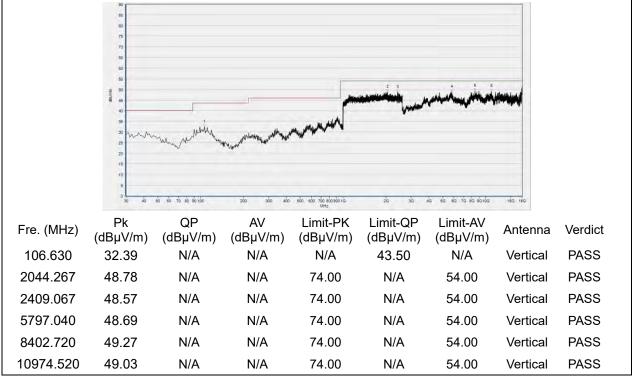

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525


Http://www.morlab.cn



#### Plot for Channel 39

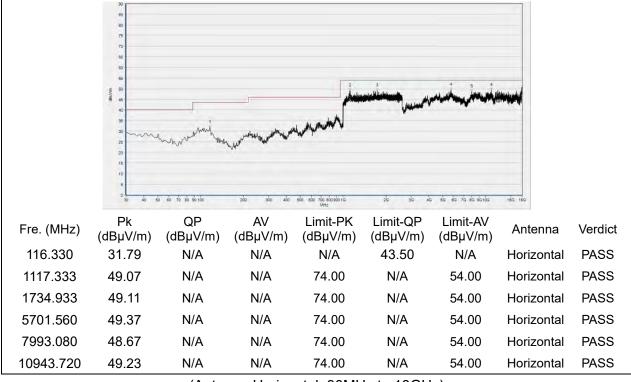

(Antenna Horizontal, 30MHz to 18GHz)

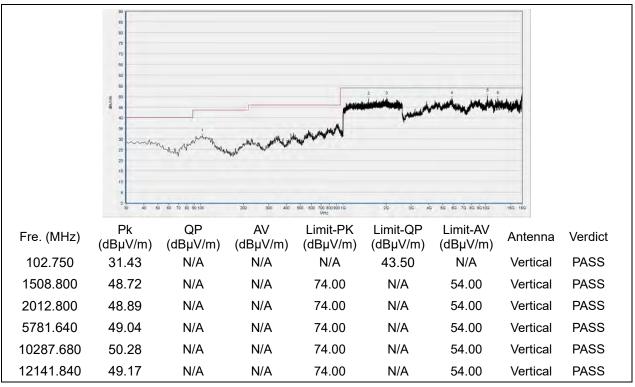

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555

Fax: 86-755-36698525 E-mail: service@morlab.cn


Http://www.morlab.cn



#### Plot for Channel 78

		n na so to so so to	zio zio io		a <b>La sa sa sa sa sa sa</b>	in to so socio ito i		
Fre. (MHz)	Pk (dBµV/m)	QP (dBµV/m)	AV (dBμV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
113.420	31.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1119.467	48.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
1600.000	49.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5596.840	48.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7879.120	48.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10355.440	49.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

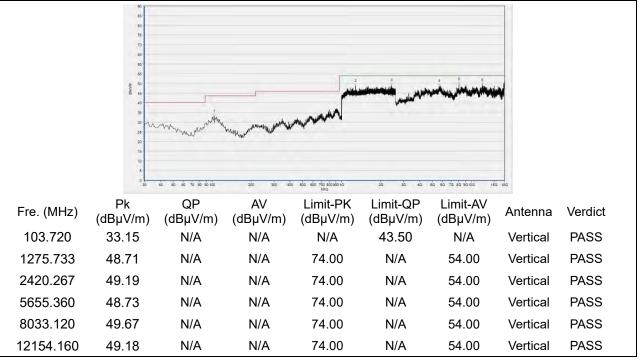

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn