



TEST REPORT

- APPLICANT : Reliance Communications LLC
- **PRODUCT NAME** : Orbic Trophy 5G
- MODEL NAME : R667L5
- BRAND NAME : Orbic
- FCC ID : 2ABGH-R667L5
- STANDARD(S) : 47 CFR Part 15 Subpart C
- **RECEIPT DATE** : 2023-11-07
- **TEST DATE** : 2023-11-20 to 2024-02-19
- **ISSUE DATE** : 2024-04-22

Edited by: Zeng Xiaoving (Rappol 0/ Approved by: Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China





DIRECTORY

1. S	Summary of Test Result ······· 4
1.1.	Testing Applied Standards 5
1.2.	Test Equipment List ······ 6
1.3.	Measurement Uncertainty 8
1.4.	Testing Laboratory 8
2. 0	Seneral Description ······9
2.1.	Information of Applicant and Manufacturer9
2.2.	Information of EUT······9
2.3.	Channel List of EUT ······10
2.4.	Test Configuration of EUT ······11
2.5.	Test Conditions11
2.6.	Test Setup Layout Diagram ······11
3. T	est Results ······14
3.1.	Antenna Requirement ······14
3.2.	Duty Cycle of Test Signal15
3.3.	Maximum Peak Conducted Output Power ······16
3.4.	Maximum Average Conducted Output Power ······17
3.5.	6 dB Bandwidth ······18
3.6.	Conducted Spurious Emissions and Band Edge19
3.7.	Power Spectral Density20
3.8.	Conducted Emission ······21
3.9.	Restricted Frequency Bands22
	Radiated Emission ······23
Anne	ex A Test Data and Result ······25





Change History				
Version	Date	Reason for change		
1.0 2024-04-22		First edition		



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn

Page **3** of **72**



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Nov. 23, 2023	He Yuyang	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Nov. 23, 2023	He Yuyang	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Nov. 23, 2023	He Yuyang	PASS	No deviation
5	15.247(a)	Bandwidth	Nov. 23, 2023	He Yuyang	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Nov. 23, 2023	He Yuyang	PASS	No deviation
7	15.247(e)	Power Spectral Density	Nov. 23, 2023	He Yuyang	PASS	No deviation
8	15.207	Conducted Emission	Jan. 03, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Dec. 30, 2023	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Dec. 31, 2023	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 2: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.





1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR Part 15 Subpart C Radio Frequency Devices

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
EXA Signal Analzyer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
RF Cable	0504				N 1/A
(30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Dessiver		NN/50400000	2023.02.09	2024.02.08	
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
	0407440	NSLK	O shuus mela sala	2023.02.21	2024.02.20
LISN	8127449	8127449 8127 Schwarzbeck	2024.02.02	2025.02.01	
Pulse Limiter	VTSD 9561	VTSD	Caburan ta ali	2023.06.27	2024.06.26
(10dB)	F-B #206	9561-F	Schwarzbeck	2023.00.27	2024.00.20
RF Coaxial Cable	BNC	MRE04	Qualwave	N/A	N/A
(DC-100MHz)	DINC		Qualwave	IN/A	IN/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0






1.2.4 Radiated Test Equipment

Equipment	O and a l N a	T	N	Oct Data	Due Dete
Name	Serial No.	Туре	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400- 2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09







1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.	
	FL.3, Building A, FeiYang Science Park, No.8 LongChang	
Laboratory Address	Road, Block 67, BaoAn District, ShenZhen, GuangDong	
	Province, P. R. China	
Telephone	+86 755 36698555	
Facsimile	+86 755 36698525	
FCC Designation Number	CN1192	
FCC Test Firm	226174	
Registration Number	226174	





2. General Description

2.1. Information of Applicant and Manufacturer

Applicant Reliance Communications LLC		
Applicant Address 555 Wireless Blvd. Hauppauge, NY 11788, USA		
Manufacturer	Unimaxcomm	
Manufacturer Address	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua,	
Manufacturer Address	Shenzhen, P.R. China 518110	

2.2. Information of EUT

Product Name:	Orbic Trophy 5G	Orbic Trophy 5G		
Sample No.:	2#			
Hardware Version:	V1.0			
Software Version:	R667L5_v1.0.4_I	3LB		
Equipment Type:	Bluetooth LE			
Bluetooth Version:	5.1			
Modulation Type:	GFSK			
Data Rate:	1Mbps, 2Mbps			
Operating Frequency Range:	: 2402MHz-2480MHz			
Antenna Type:	PIFA Antenna			
Antenna Gain:	0.68dBi			
	Battery			
	Brand Name:	Shenbird		
	Model No.:	BTE-5003		
Accessory Information:	Serial No.:	N/A		
Accessory Information:	Capacity:	5000mAh		
	Rated Voltage:	3.89V		
	Charge Limit:	4.48V		
	Manufacturer:	Shenbird New Energy (Huizhou) Co., Ltd.		





	AC Adapter	AC Adapter		
	Brand Name:	Orbic		
	Model No.:	OACH023US1		
	Serial No.:	N/A		
	Rated Output:	5V=3A, 9V=2A, 12V=1.5A		
	Rated Input:	100-240V~50/60Hz,0.5A		
Accessory Information:	Manufacturer 1:	WATAI ELECTRONICS PRIVATE LIMITED		
	Manufacturer 2:	KANGYIN ELECTRONIC TECHNOLOGY		
		CO.,LTD		
	USB Cable			
	Model No.:	HX-YLMK-06		
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS		
		CO.,LTD		

Note 1: We use the dedicated software to control the EUT continuous transmission.


Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3. Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.







2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1.Conducted Measurement



2.6.2.Conducted Emission Measurement

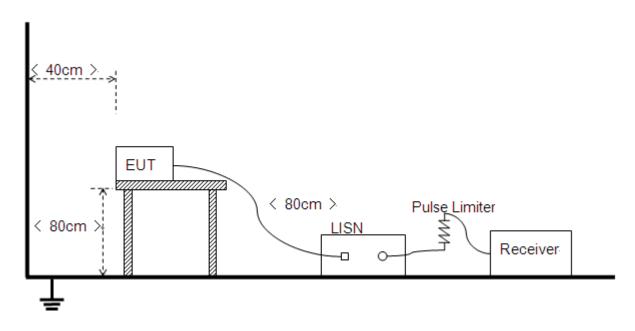




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




2.6.3.Radiation Measurement

1) For radiated emissions from 9kHz to 30MHz

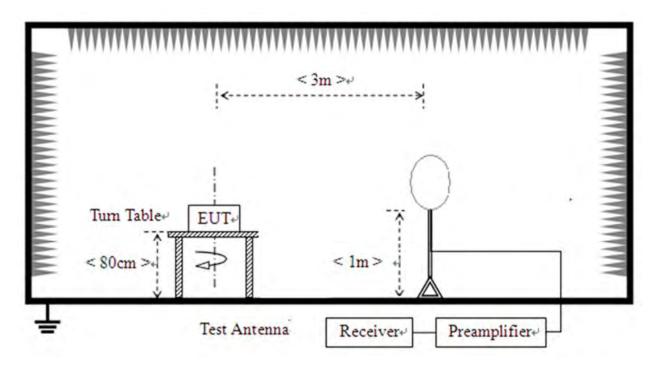

2) For radiated emissions from 30MHz to1GHz

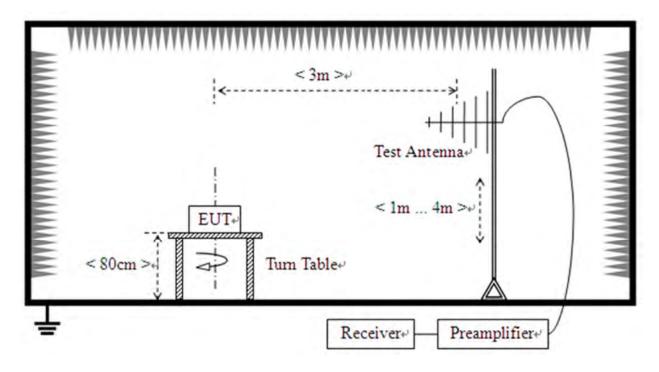




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



3) For radiated emissions above 1GHz

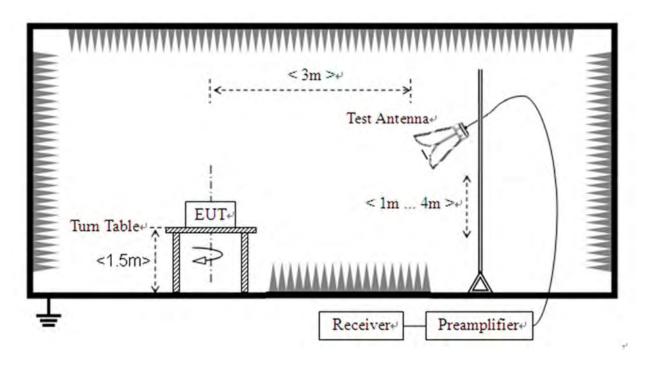





3.1. Antenna Requirement

3.1.1.Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2.Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT photos.





3.2. Duty Cycle of Test Signal

3.2.1.Requirement


Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than ±2%; otherwise, the duty cycle is considered to be non constant.

3.2.2.Test Result

Refer to Annex A.1 in this report.







3.3. Maximum Peak Conducted Output Power

3.3.1.Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2.Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4.Test Result

Refer to Annex A.2 in this report.







3.4. Maximum Average Conducted Output Power

3.4.1.Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2.Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.


3.4.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4.Test Result

Refer to Annex A.3 in this report.







3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize

h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW \geq 3 \times RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.


3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.







3.6. Conducted Spurious Emissions and Band Edge

3.6.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2.Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4.Test Result

Refer to Annex A.5 and A.6 in this report.





3.7. Power Spectral Density

3.7.1.Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2.Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

i) Use the peak marker function to determine the maximum amplitude level within the RBW


3.7.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4.Test Result

Refer to Annex A.7 in this report.







3.8. Conducted Emission

3.8.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μ H/ 50Ω line impedance stabilization network (LISN).

Frequency Penge (MHz)	Conducted Limit (dBµV)				
Frequency Range (MHz)	Quai-peak	Average			
0.15 - 0.50	66 to 56	56 to 46			
0.50 - 5	56	46			
5 - 30	60	50			

Note:

(a) The lower limit shall apply at the band edges.

(b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.8.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4.Test Result

Refer to Annex A.8 in this report.





3.9. Restricted Frequency Bands

3.9.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1GHz

VBW = 3 MHz Sweep = auto Detector function = peak/average Trace = max hold Allow the trace to stabilize

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.





3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. **Note2:**For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).





3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result

Refer to Annex A.10 in this report.






Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	65.08	1.87	2.44
NVNT	BLE 1M	2440	Ant1	66.13	1.80	2.44
NVNT	BLE 1M	2480	Ant1	66.13	1.80	2.44
NVNT	BLE 2M	2402	Ant1	37.10	4.31	4.35
NVNT	BLE 2M	2440	Ant1	36.51	4.38	4.35
NVNT	BLE 2M	2480	Ant1	36.51	4.38	4.35






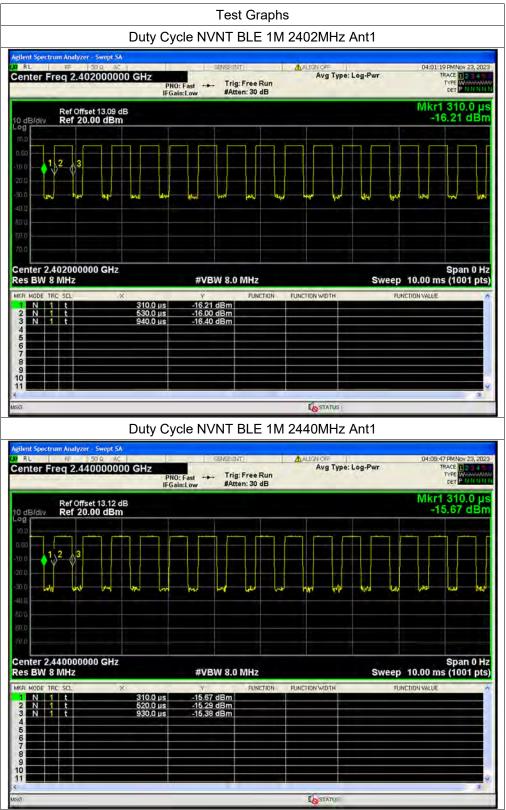



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




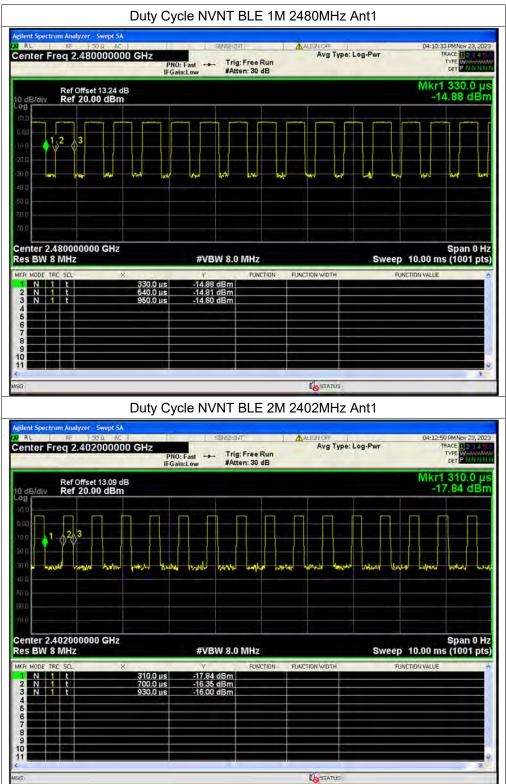



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



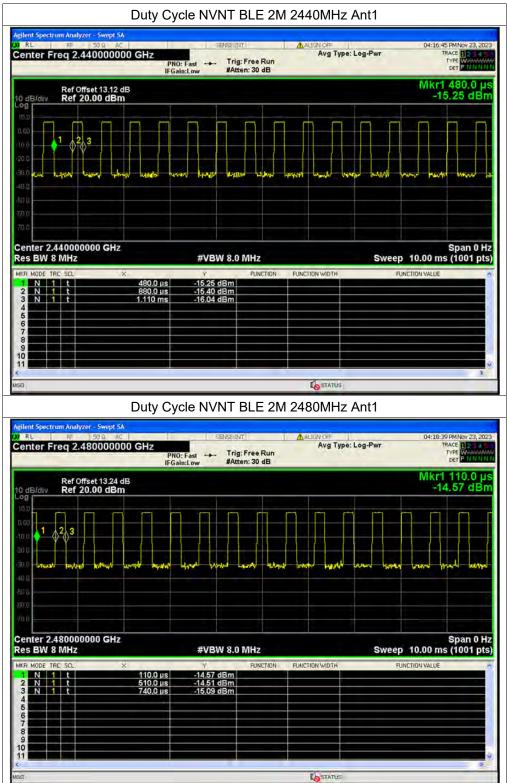



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.76	0	5.76	0.00377	30	Pass
NVNT	BLE 1M	2440	Ant1	6.56	0	6.56	0.00453	30	Pass
NVNT	BLE 1M	2480	Ant1	7.01	0	7.01	0.00502	30	Pass
NVNT	BLE 2M	2402	Ant1	5.64	0	5.64	0.00366	30	Pass
NVNT	BLE 2M	2440	Ant1	6.44	0	6.44	0.00441	30	Pass
NVNT	BLE 2M	2480	Ant1	7.05	0	7.05	0.00507	30	Pass






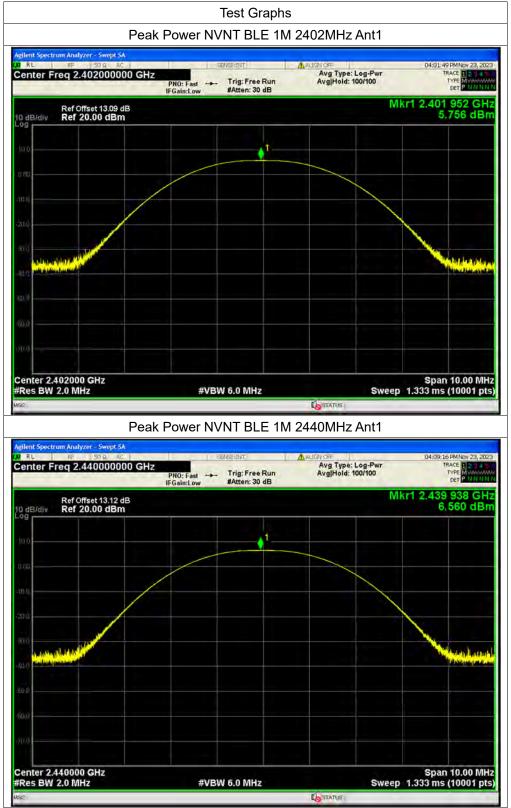



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




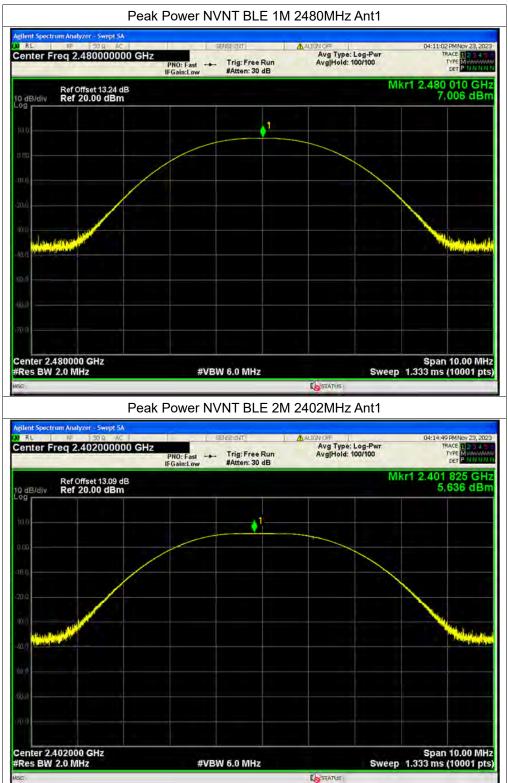

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



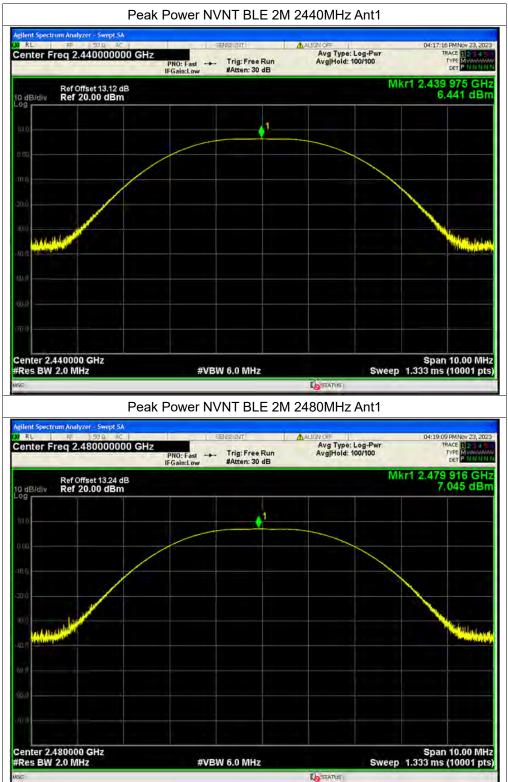

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	3.2	1.87	5.07	0.00321	30	Pass
NVNT	BLE 1M	2440	Ant1	4.09	1.8	5.89	0.00388	30	Pass
NVNT	BLE 1M	2480	Ant1	4.71	1.8	6.51	0.00448	30	Pass
NVNT	BLE 2M	2402	Ant1	0.46	4.31	4.77	0.003	30	Pass
NVNT	BLE 2M	2440	Ant1	1.28	4.38	5.66	0.00368	30	Pass
NVNT	BLE 2M	2480	Ant1	1.84	4.38	6.22	0.00419	30	Pass










Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




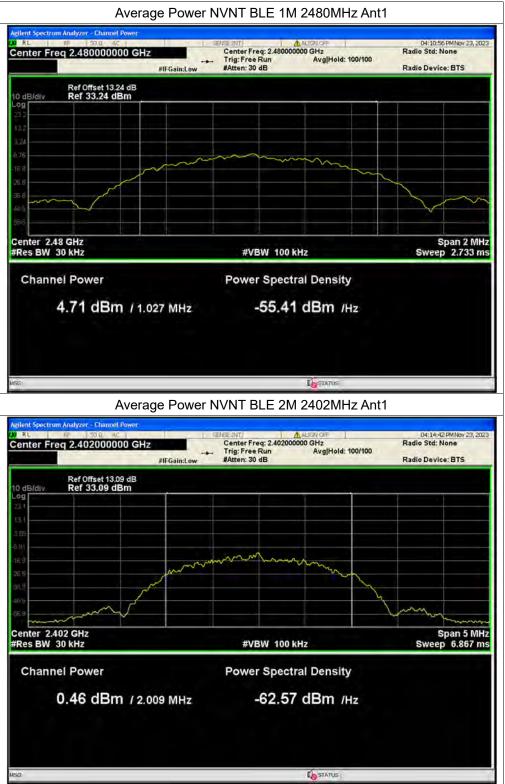



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



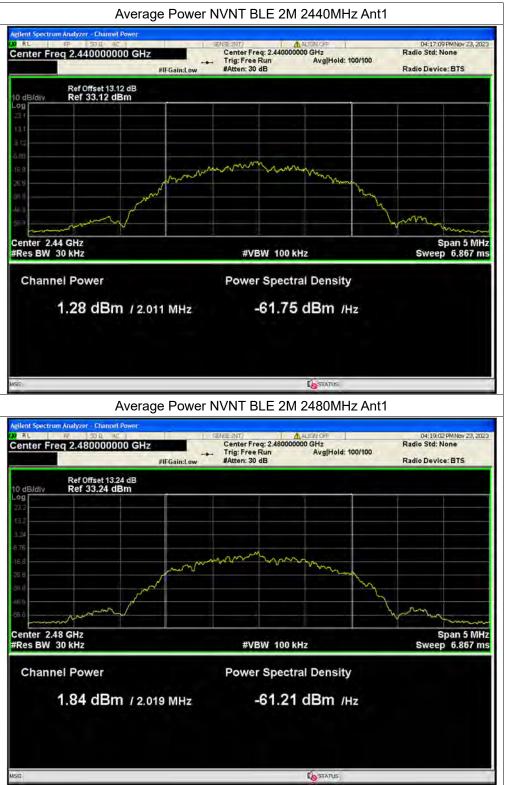



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



A.4. 6 dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.648	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.659	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.656	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.123	0.5	Pass
NVNT	BLE 2M	2440	Ant1	1.28	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.148	0.5	Pass









Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn

Page 38 of 72





MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China





MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




A.5. Conducted Spurious Emissions

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-34.07	-20	Pass
NVNT	BLE 1M	2440	Ant1	-34.66	-20	Pass
NVNT	BLE 1M	2480	Ant1	-36.35	-20	Pass
NVNT	BLE 2M	2402	Ant1	-34.58	-20	Pass
NVNT	BLE 2M	2440	Ant1	-35.49	-20	Pass
NVNT	BLE 2M	2480	Ant1	-36.21	-20	Pass






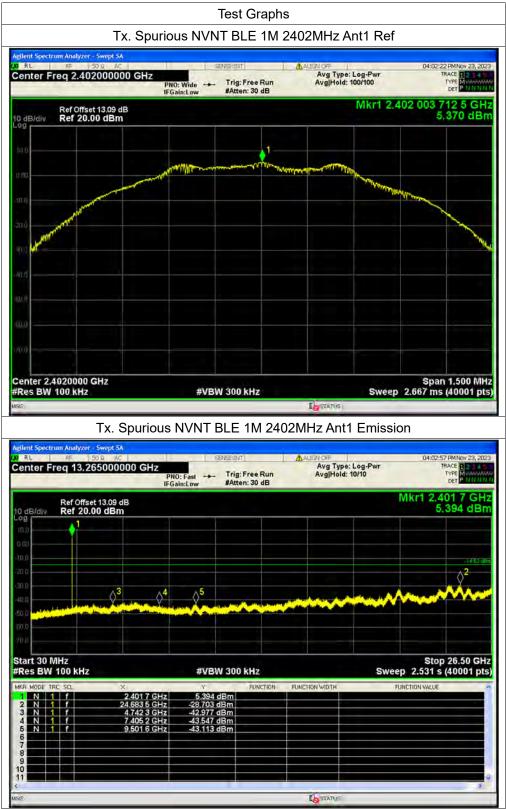

MORLAB


Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



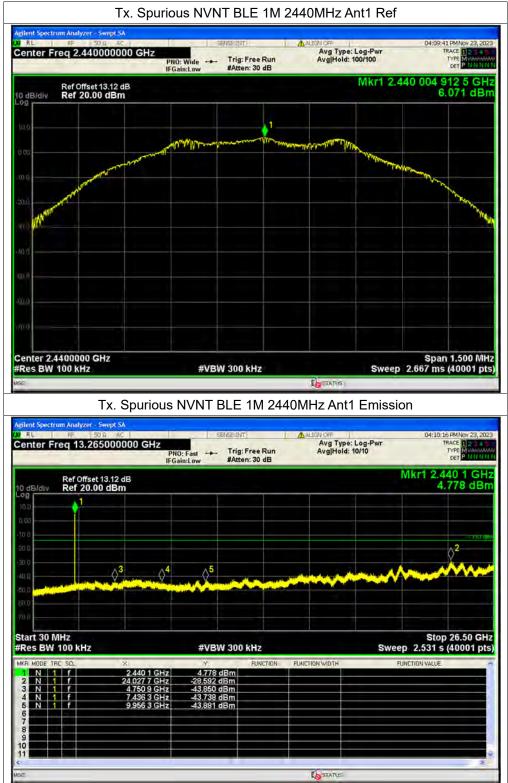






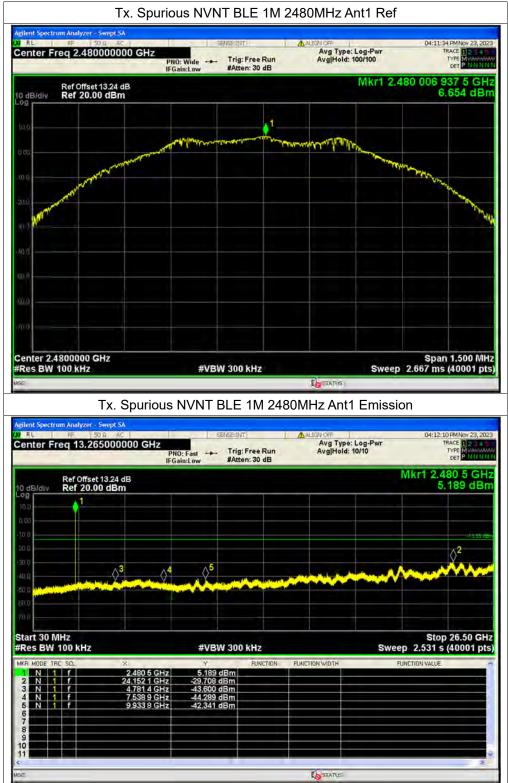






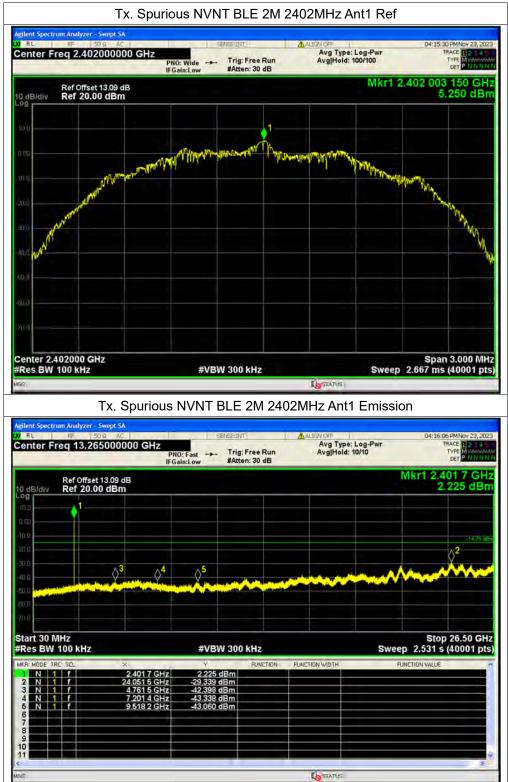






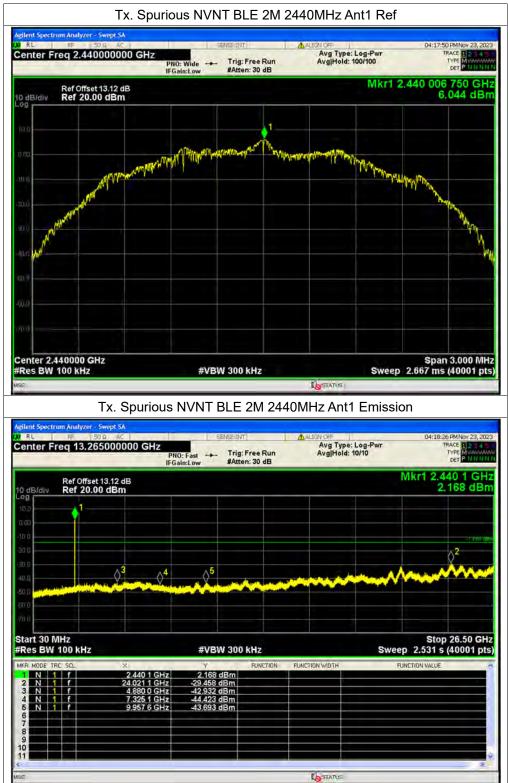

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



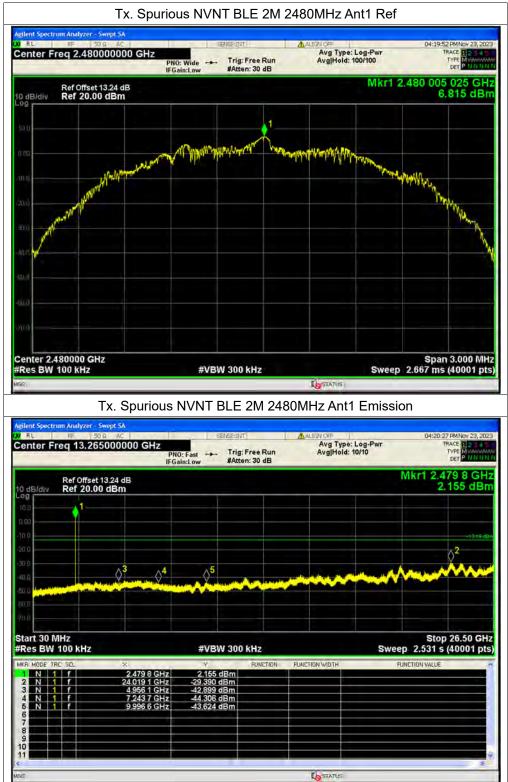






A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-51.54	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.15	-20	Pass
NVNT	BLE 2M	2402	Ant1	-45.84	-20	Pass
NVNT	BLE 2M	2480	Ant1	-52.04	-20	Pass






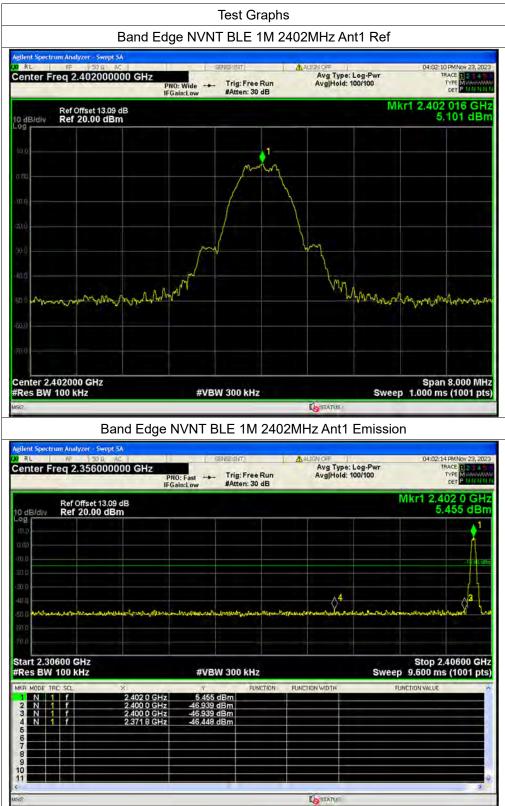

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



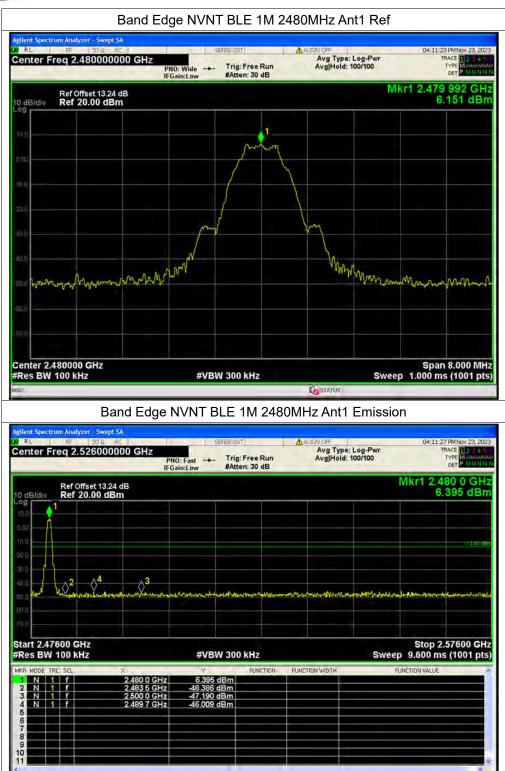

MORLAB Shenzhen Mor FL.1-3, Building Block67, BaoA


Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Lo STATUS





PR0: Fast Trig: Free Run #Atten: 30 dB Avg[Hold: 100/100 Trig: Mutual Microsoft Ref Offset 13.09 dB Microsoft 3.867 dBm 0 dB/dlv Ref 20.00 dBm 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB 3.867 dBm 0 dB/dlv Ref 0 ffset 13.09 dB Stop 2.40600 GHz #Res BW 100 kHz #VEW 300 kHz Stop 2.40600 GHz #Res BW 100 kHz Y Runction Function Vulle Function Vulle 1 f 2.400 0 GHz 42.660 dBm Ref 0 dBm Ref 0 dBm 3 N 1 f 2.400 0 GHz -42.660 dBm Ref 0 dBm Ref 0 dBm 3 N 1 f 2.400 0 GHz -42.660 dBm



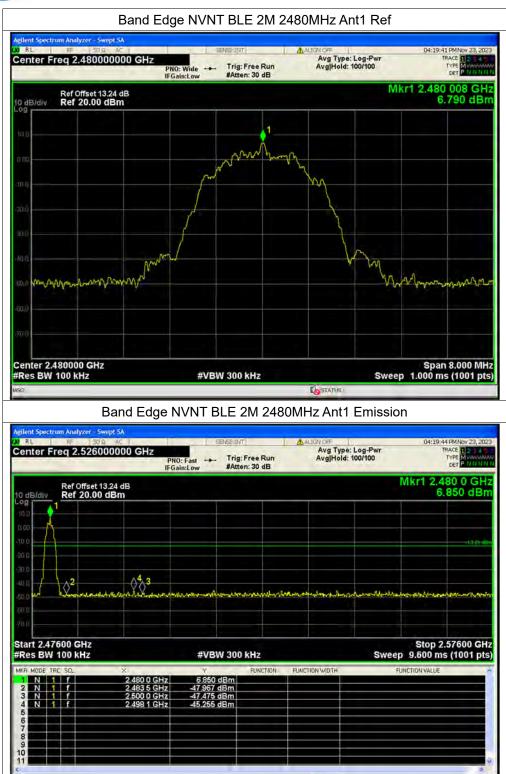

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

MORLAB

Lo STATUS




A.7. Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-9.11	0	-9.11	8	Pass
NVNT	BLE 1M	2440	Ant1	-8.35	0	-8.35	8	Pass
NVNT	BLE 1M	2480	Ant1	-7.89	0	-7.89	8	Pass
NVNT	BLE 2M	2402	Ant1	-12.19	0	-12.19	8	Pass
NVNT	BLE 2M	2440	Ant1	-11.33	0	-11.33	8	Pass
NVNT	BLE 2M	2480	Ant1	-10.85	0	-10.85	8	Pass






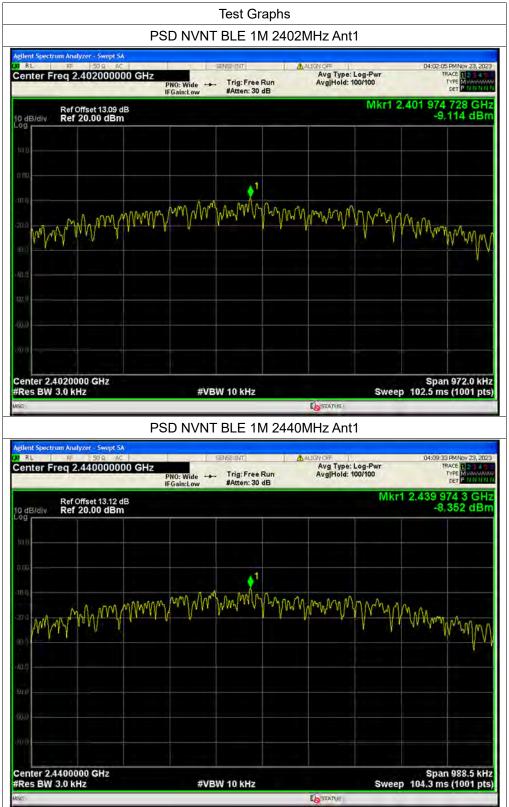



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China




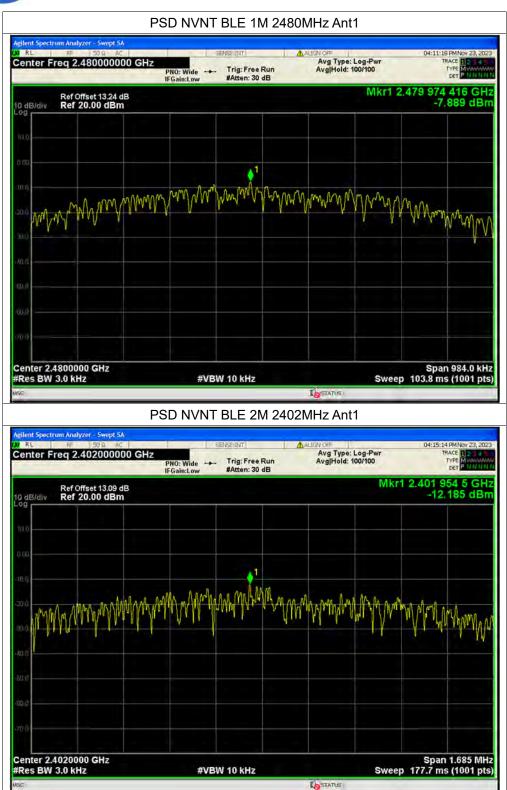



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China



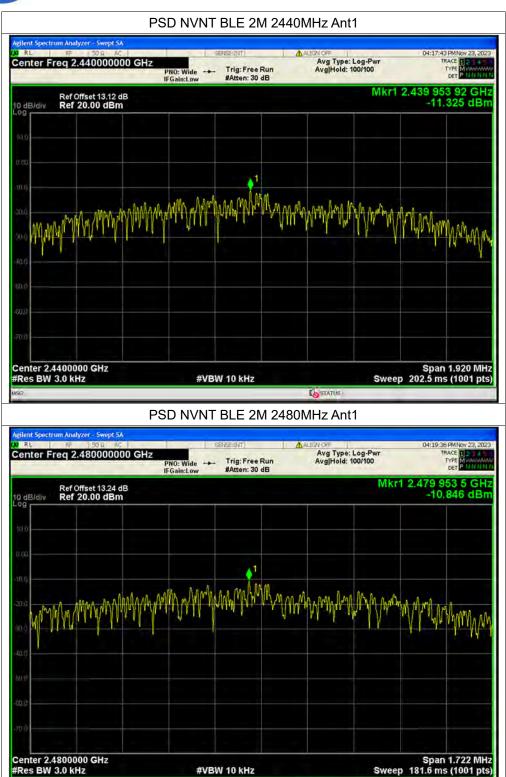



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Http://www.morlab.cn
 E-mail: service@morlab.cn

STATUS



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.


A. Test Setup:

Test Mode: <u>EUT + PC + PC Adapter + BT TX</u> Test voltage: <u>AC 120V/60Hz</u> The measurement results are obtained as below: E [dB μ V] =U_R + L_{Cable loss} [dB] + A_{Factor} U_R: Receiver Reading A_{Factor}: Voltage division factor of LISN






B. Test Plot:

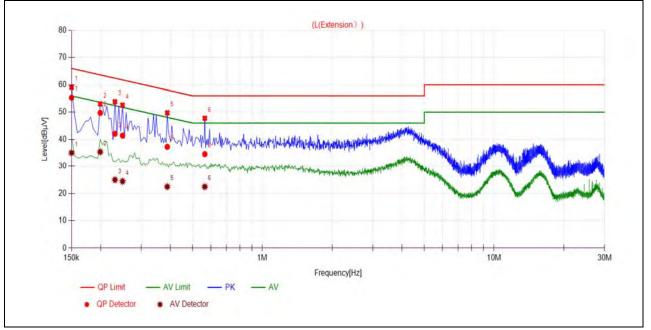


(L Phase	e)
----------	----

No.	Fre.	Emission Level (dBµV)				V) Limit (dBµV)		Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		voruiot		
1	0.1500	55.33	35.04	66.00	56.00		PASS		
2	0.1995	49.74	35.39	63.63	53.63		PASS		
3	0.2310	42.06	24.94	62.41	52.41	Lino	PASS		
4	0.2490	41.40	24.40	61.79	51.79	Line	PASS		
5	0.3885	37.25	22.43	58.09	48.09		PASS		
6	0.5640	34.55	22.40	56.00	46.00		PASS		







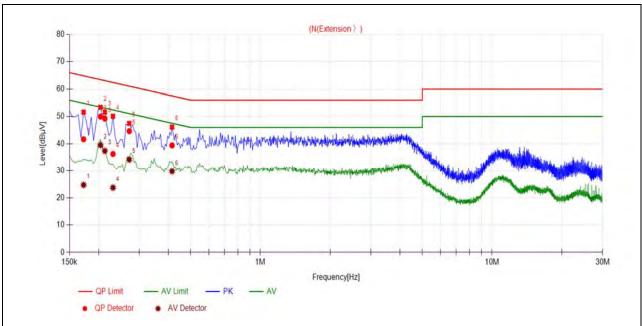

(N Phase)

No.	Fre.	Emission L	.evel (dBµV)	Limit (dBµV)	Power-line	Verdict
	(MHz)	Quai-peak	Average	Quai-peak	Average		
1	0.1725	41.67	24.70	64.84	54.84		PASS
2	0.2040	49.99	39.52	63.45	53.45		PASS
3	0.2130	49.26	37.40	63.09	53.09	Noutral	PASS
4	0.2310	36.26	23.71	62.41	52.41	Neutral	PASS
5	0.2715	44.64	34.21	61.07	51.07		PASS
6	0.4155	39.42	29.78	57.54	47.54		PASS





A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain


A_{Factor}: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Channel	Frequency	Detector	Receiver Reading	A _T	AFactor	Max. Emission	Limit	Verdict
onanner	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdiot
0	2388.71	PK	22.56	6.74	27.20	56.50	74	PASS
0	2389.34	AV	10.35	6.74	27.20	44.29	54	PASS
39	2484.69	PK	22.36	6.74	27.20	56.30	74	PASS
39	2483.691	AV	11.68	6.74	27.20	45.62	54	PASS

1Mbps








6	1Dec 30, 2023	03:47:44 PM	ALIGN OFF	rl	SENSE: IN		50 Q DC	RF PRESEL	R L
Marker Select Marker		TRACE	Type: Voltage Hold:>100/100		Trig: Free Run #Atten: 6 dB	PNO: Fast	2000000	2.38871 PREAMP	rker '
Select Marker		2.388 71	Mkr1				99 dBµV	Ref 82.	dB/dív
Norma	Λ								
Dell		12					الم المحضور ال		
Fixed									0 9 1
o	1001 pts)	Stop 2.404 000 ms (1		FUNCTION	3.0 MHz	#VBW	MHz	0000 GHz CISPR) 1	
Properties		PONCTO		- SNC HON	2.557 dBµV 20.509 dBµV		2,388		N
Moi 1 of								ی می می ا این می می ا این می می م	
			STATUS						

(PEAK, Channel 0)

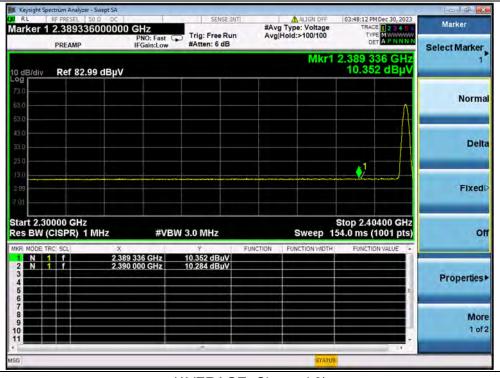

(AVERAGE, Channel 0)


MORLAB

Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn



	3 PM Dec 30, 2023		ALIGN OFF	-	SENSE:INT		1	DC DC	PRESEL	RF	iL.
~	TYPE MWWWWWW DET PNNNNN	T	vpe: Voltage Id:>100/100		Free Run h: 6 dB	Trig: F #Atten	PNO: Fast (IFGain:Low	000000	48468 REAMP		ke
	688 GHz 56 dBµV		Mkr2					9 dBµV	Ref 82.	liv	iB/d
										1	
		Land Margaret			Alasara		2	n 21		/	
)
	50000 GHz s (1001 pts)	.000 ms			Hz	W 3.0 MI	#VB		0 GHz SPR) 1	W (CI	B
Prop	TION VALUE	FUNC	UNCTION WIDTH	FUNCTION	dBµV dBµV	22.193 22.356	500 GHz 688 GHz		SCL f	DE TRC	N
and the same second		_				181					

(PEAK, Channel 39)

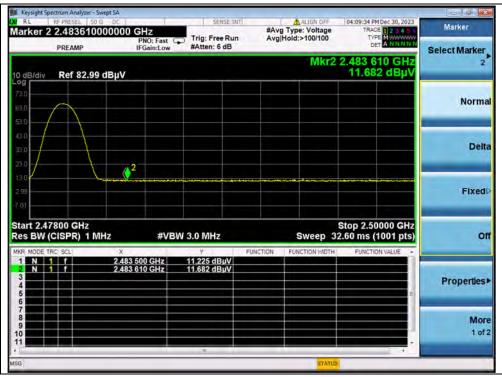


(AVERAGE, Channel 39)






2Mbps

Channel	Frequency	Detector	Receiver Reading	A _T	A _{Factor}	Max. Emission	Limit	Verdict
Channel	(MHz)	PK/ AV	U _R (dBµV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
0	2379.14	PK	22.35	6.74	27.20	56.29	74	PASS
0	2388.92	AV	10.29	6.74	27.20	44.23	54	PASS
39	2483.81	PK	21.58	6.74	27.20	55.52	74	PASS
39	2483.90	AV	11.73	6.74	27.20	45.67	54	PASS

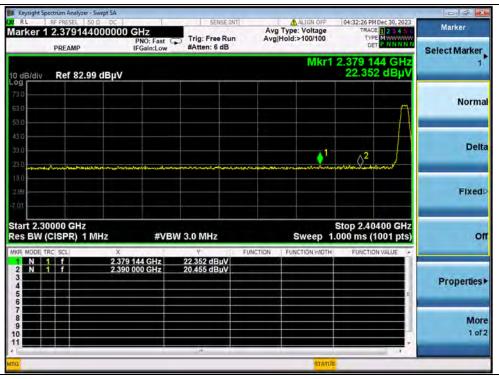

(PEAK, Channel 0)







6	04:33:01 PM Dec 30, 2023	ALIGN OFF	-	SENSE:IN	7	yzer - Swept SA	ctrum Analyze RF PRESEL	
Marker Select Marker	TRACE 2 3 4 5 C TYPE MWWWWW DET A N N N N	Type: Voltage Hold:>100/100	#Av	Trig: Free Run #Atten: 6 dB	GHz PNO: Fast C	920000000		
1	2.388 920 GHz 10.291 dBµV	Mkr1 :				2.99 dBµV	Ref 82	3/div
Norm								
Dell								
Fixed	<u>,</u> !!							
c	Stop 2.40400 GHz 54.0 ms (1001 pts)	Sweep 15	FUNCTION	3.0 MHz	#VBW		000 GHz CISPR)	
Properties				10.291 dBµV 10.064 dBµV	920 GHz 000 GHz		f	N 1
Mo 1 of							ی کار سر کار سر کار	
	-							

(AVERAGE, Channel 0)



(PEAK, Channel 39)





Marker Select Marke	04:11:18 PM Dec 30, 2023 TRACE 1 2 3 4 5 6 TYPE MWWWWWW DET A NNNNN	ALIGN OFF Type: Voltage Hold:>100/100	#Ave	SENSE:IN Trig: Free Run #Atten: 6 dB	Z IO: Fast G	000 GH	Inalyzer - Swep SEL 50 Ω 3896000	RF PRE	RL
	dB/div Ref 82.99 dBμV Mkr2 2.483 896 GHz GHz Her He								
Norm								\wedge	
De									
Fixe						⊘ ∳ ²			0 9
	Stop 2.50000 GHz #VBW 3.0 MHz Sweep 32.60 ms (1001 pts)						R) 1 MHz	_	s BW
Propertie	FUNCTION VALUE	FUNCTION WIDTH	FUNCTION	Υ 10.652 dBμV 11.725 dBμV) GHz 5 GHz	× 2.483 500 2.483 896		TRC SCL	N
Ma 1 o									
		STATUS							

(AVERAGE, Channel 39)





A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

 $E [dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$

A_T: Total correction Factor except Antenna

U_R: Receiver Reading

G_{preamp}: Preamplifier Gain

A_{Factor}: Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.






1Mbps



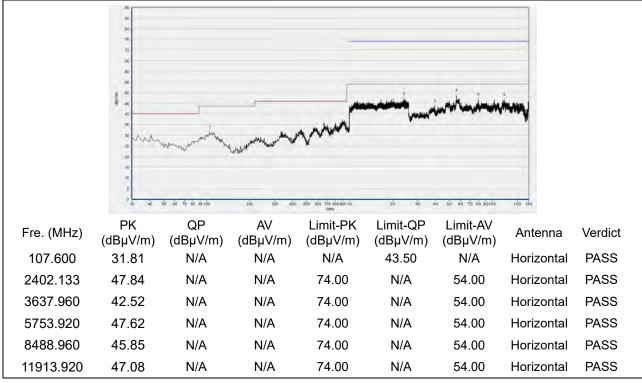

(Antenna Horizontal, 30MHz to 18GHz)

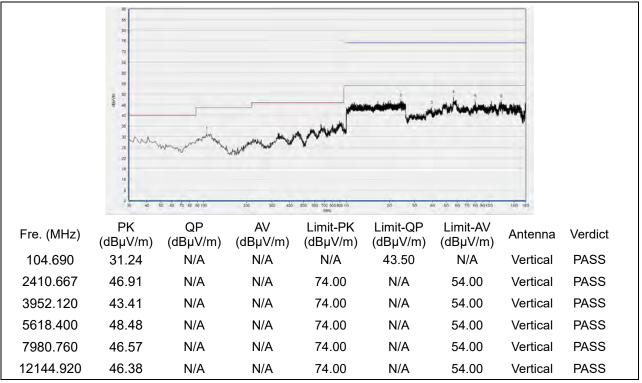

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn


E mail: comite Or 11



Plot for Channel 19

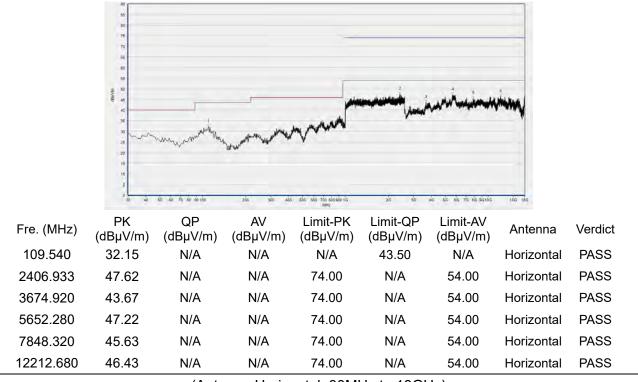

(Antenna Horizontal, 30MHz to 18GHz)

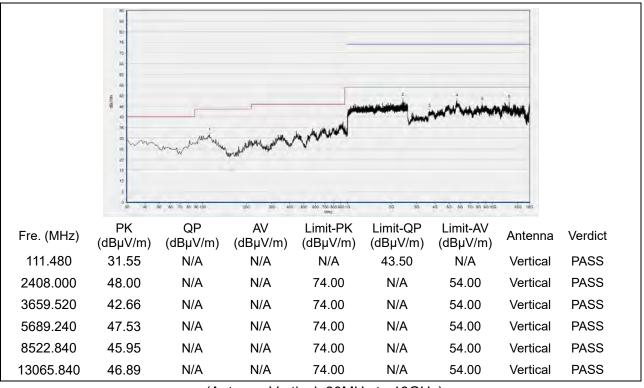

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn


E-mail: service@morlab.cn



Plot for Channel 39

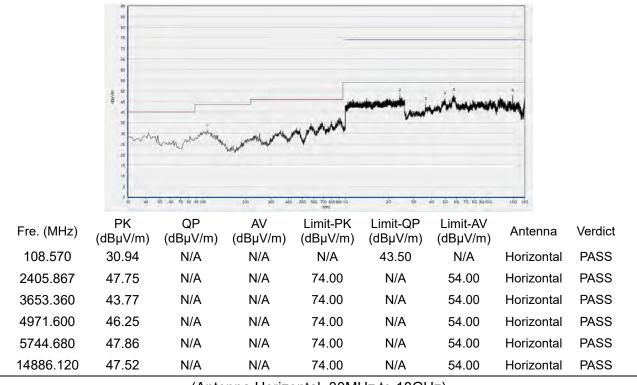

(Antenna Horizontal, 30MHz to 18GHz)

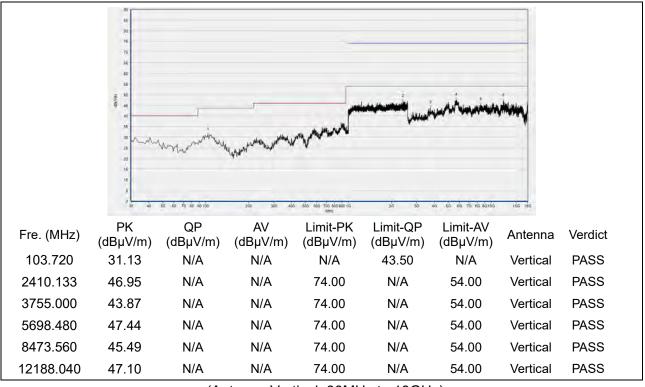

(Antenna Vertical, 30MHz to 18GHz)



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Fax: 86-755-36698525


Tel: 86-755-36698555


Http://www.morlab.cn

E-mail: service@morlab.cn




2Mbps



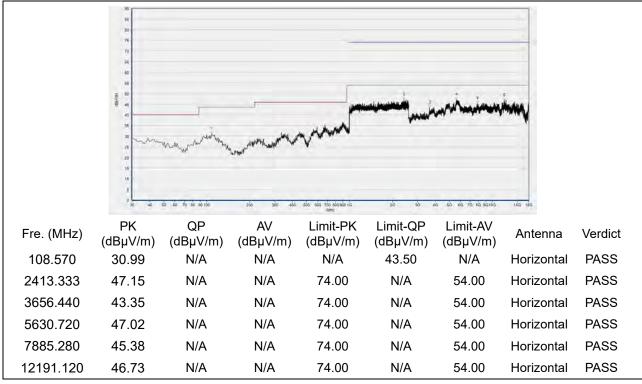

(Antenna Horizontal, 30MHz to 18GHz)

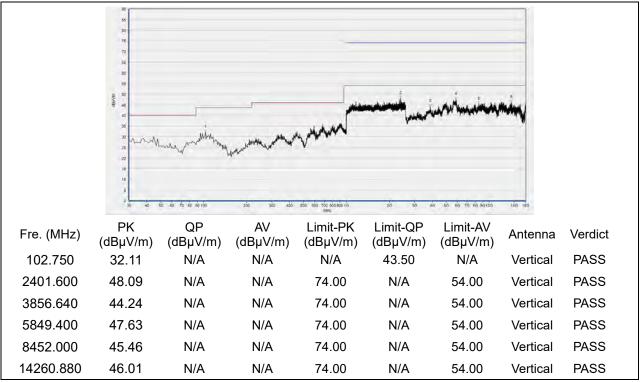

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525


Http://www.morlab.cn E-mail: service@morlab.cn



Plot for Channel 19

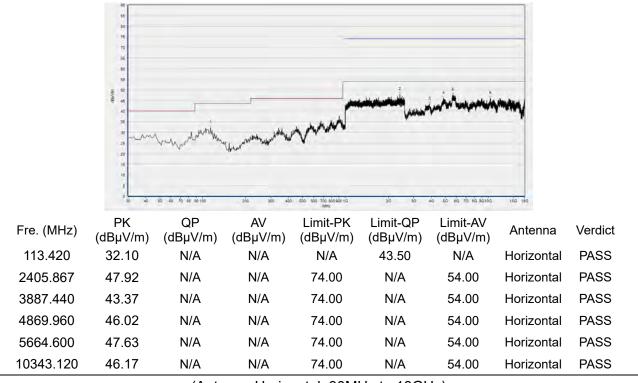

(Antenna Horizontal, 30MHz to 18GHz)

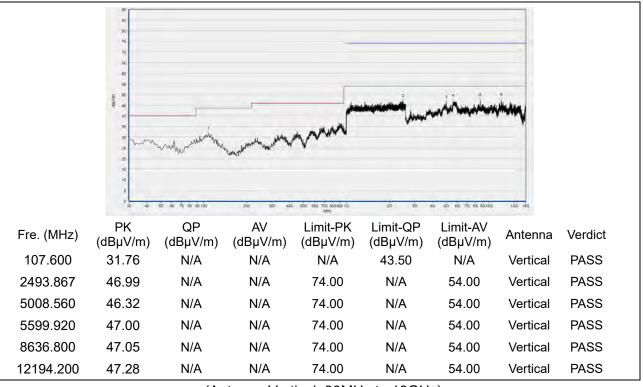

(Antenna Vertical, 30MHz to 18GHz)




Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525

Http://www.morlab.cn


E-mail: service@morlab.cn



Plot for Channel 39

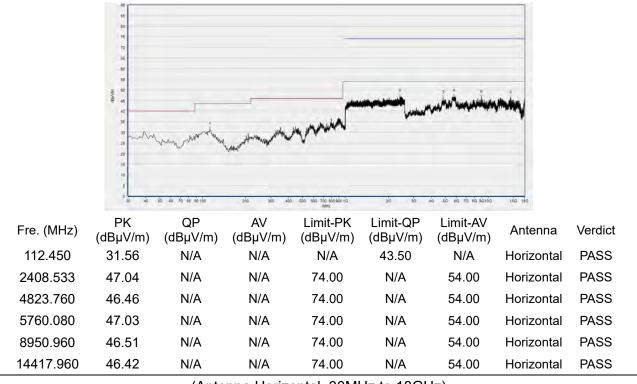

(Antenna Horizontal, 30MHz to 18GHz)

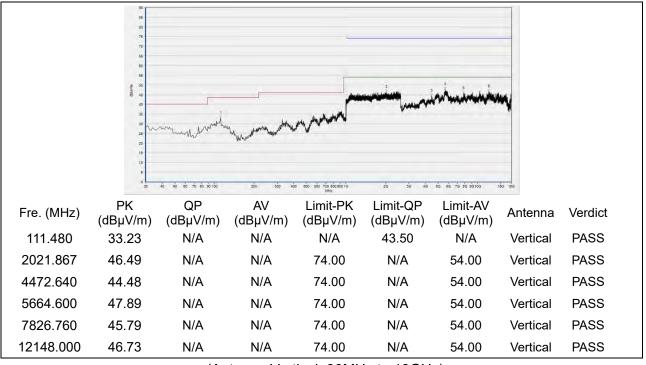

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT



Shenzhen Morlab Communications Technology Co., Ltd. FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China Tel: 86-755-36698555 Fax: 86-755-36698525 Http://www.morlab.cn