



# TEST REPORT

**APPLICANT** : Reliance Communications LLC

**PRODUCT NAME** : Orbic Trophy 5G

**MODEL NAME** : R667L5

**BRAND NAME** : Orbic

**FCC ID** : 2ABGH-R667L5

**STANDARD(S)** : 47 CFR Part 15 Subpart B

**RECEIPT DATE** : 2023-11-29

**TEST DATE** : 2024-02-28 to 2024-02-29

**ISSUE DATE** : 2024-04-22



Edited by: Chen Bilian  
Chen Bilian(Rapporteur)

Approved by: Xiao Xiong  
Xiao Xiong(Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 2. Test Results ..... 6**
- 2.1. Applied Reference Documents ..... 6**
- 2.2. EUT Setup and Operating Conditions ..... 7**
- 3. 47 CFR Part 15B Requirements ..... 10**
- 3.1. Conducted Emission ..... 10**
- 3.2. Radiated Emission ..... 14**
- Annex A Test Uncertainty ..... 21**
- Annex B Testing Laboratory Information ..... 22**

| Change History |            |                   |
|----------------|------------|-------------------|
| Version        | Date       | Reason for Change |
| 1.0            | 2024-04-22 | First edition     |
|                |            |                   |



# 1. Technical Information

**Note:** Provide by applicant

## 1.1. Applicant and Manufacturer Information

|                              |   |
|------------------------------|---|
| <b>Applicant:</b>            | Reliance Communications LLC   |
| <b>Applicant Address:</b>    | 555 Wireless Blvd. Hauppauge, NY 11788, USA   |
| <b>Manufacturer:</b>         | Unimaxcomm  |
| <b>Manufacturer Address:</b> | 35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110 |

## 1.2. Equipment Under Test (EUT) Description

|                          |  |
|--------------------------|--|
| <b>Product Name:</b>     | Orbic Trophy 5G  |
| <b>EUT No.:</b>          | 6#   |
| <b>Hardware Version:</b> | V1.0   |
| <b>Software Version:</b> | R667L5_v1.0.4_BLB  |
| <b>Tx Frequency:</b>     | GSM850: 824 MHz ~ 849 MHz<br>GSM1900: 1850 MHz ~ 1910 MHz<br>WCDMA Band II: 1850 MHz ~ 1910 MHz<br>WCDMA Band IV: 1710 MHz ~ 1755 MHz<br>WCDMA Band V: 824 MHz ~ 849 MHz<br>LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 5: 824 MHz ~ 849 MHz<br>LTE Band 7: 2500 MHz ~ 2570 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz<br>LTE Band 13: 777 MHz ~ 787 MHz<br>LTE Band 17: 704 MHz ~ 716 MHz<br>LTE Band 25: 1850 MHz ~ 1915 MHz<br>LTE Band 66: 1710 MHz ~ 1780 MHz<br>LTE Band 71: 663 MHz ~ 698 MHz<br>5G NR n2: 1850 MHz ~ 1910 MHz<br>5G NR n5: 824 MHz ~ 849 MHz<br>5G NR n66: 1710 MHz ~ 1780 MHz<br>5G NR n77: 3300 MHz ~ 4200 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz |



|                      |   |                               |
|----------------------|---|-------------------------------|
|                      | 802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5720 MHz; 5745 MHz ~ 5825 MHz<br>NFC: 13.56 MHz   |                               |
| <b>Rx Frequency:</b> | GSM850: 869 MHz ~ 894 MHz<br>GSM1900: 1930 MHz ~ 1990 MHz<br>WCDMA Band II: 1930 MHz ~ 1990 MHz<br>WCDMA Band IV: 2110 MHz ~ 2155 MHz<br>WCDMA Band V: 869 MHz ~ 894 MHz<br>LTE Band 2: 1930 MHz ~ 1990 MHz<br>LTE Band 4: 2110 MHz ~ 2155 MHz<br>LTE Band 5: 869 MHz ~ 894 MHz<br>LTE Band 7: 2620 MHz ~ 2690 MHz<br>LTE Band 12: 729 MHz ~ 746 MHz<br>LTE Band 13: 746 MHz ~ 756 MHz<br>LTE Band 17: 734 MHz ~ 746 MHz<br>LTE Band 25: 1930 MHz ~ 1995 MHz<br>LTE Band 66: 2110 MHz ~ 2200 MHz<br>LTE Band 71: 617 MHz ~ 652 MHz<br>5G NR n2: 1930 MHz ~ 1990 MHz<br>5G NR n5: 869 MHz ~ 894 MHz<br>5G NR n66: 2110 MHz ~ 2200 MHz<br>5G NR n77: 3300 MHz ~ 4200 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5720 MHz; 5745 MHz ~ 5825 MHz<br>NFC: 13.56 MHz |                               |
| <b>CA_UL:</b>        | CA_5B, CA_66B, CA_66C, CA_2A-4A, CA_2A-5A, CA_2A-13A,<br>CA_2A-66A, CA_4A-5A, CA_4A-13A, CA_5A-66A, CA_13A-66A,<br>CA_2A-12A, CA_4A-12A, CA_12A-66A   |                               |
| <b>EN_DC:</b>        | DC_5A_n2, DC_13A_n2, DC_66A_n2, DC_2A_n5, DC_66A_n5,<br>DC_2A_n66, DC_5A_n66, DC_13A_n66, DC_5A_n77,<br>DC_4A_n78, DC_12A_n2, DC_12A_n66  |                               |
| <b>Accessory:</b>    | <b>AC Adapter</b>   |                               |
|                      | Brand Name:   | Orbic                         |
|                      | Model No.:  | OACH023US1                    |
|                      | Serial No.:   | (N/A, marked #1 by test site) |
|                      | Rated Input:  | 100-240V~50/60Hz, 0.5A        |
|                      | Rated Output:   | 5V=3A, 9V=2A, 12V=1.5A        |



|  |                  |   |
|--|------------------|---|
|  | Manufacturer 1:  | WATAI ELECTRONICS PRIVATE LIMITED       |
|  | Manufacturer 2:  | KANGYIN ELECTRONIC TECHNOLOGY CO.,LTD   |
|  | <b>Battery</b>   |   |
|  | Brand Name:      | Shenbird                                |
|  | Model No.:       | BTE-5003                                |
|  | Serial No.:      | (N/A, marked #1 by test site)           |
|  | Capacity:        | 5000mAh                                 |
|  | Rated Voltage:   | 3.89V                                   |
|  | Charge Limit:    | 4.48V                                   |
|  | Manufacturer:    | Shenbird New Energy (Huizhou) Co., Ltd. |
|  | <b>USB Cable</b> |   |
|  | Model:           | HX-YLMK-06                              |
|  | Manufacturer:    | HUIZHOU WASHIN ELECTRONICS CO.,LTD      |

**Note:**

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

| No. | Identity       | Document Title          |
|-----|----------------|-------------------------|
| 1   | 47 CFR Part 15 | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description        | Test Date  | Test Engineer | Result | Method Determination Remark |
|-----|---------|--------------------|------------|---------------|--------|-----------------------------|
| 1   | 15.107  | Conducted Emission | 2024.02.29 | Wang Deyong   | PASS   | No deviation                |
| 2   | 15.109  | Radiated Emission  | 2024.02.28 | Zhang Bangyi  | PASS   | No deviation                |

**Note 1:**The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

**Note 2:**Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:**When the test result is a critical value,we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2.2. EUT Setup and Operating Conditions

Note: All of the following test modes are tested in all the test items.

| Test Item |  |
|-----------|--|
| Mode 1    | : EUT + GSM850 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card        |
| Mode 2    | : EUT + GSM1900 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card         |
| Mode 3    | : EUT + WCDMA Band II Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card |
| Mode 4    | : EUT + WCDMA Band IV Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card   |
| Mode 5    | : EUT + WCDMA Band V Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card  |
| Mode 6    | : EUT + LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card      |
| Mode 7    | : EUT + LTE Band 4 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card    |
| Mode 8    | : EUT + LTE Band 5 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card      |
| Mode 9    | : EUT + LTE Band 7 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card    |
| Mode 10   | : EUT + LTE Band 12 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card     |
| Mode 11   | : EUT + LTE Band 13 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card   |
| Mode 12   | : EUT + LTE Band 66 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card   |
| Mode 13   | : EUT + 5G NR n2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card        |
| Mode 14   | : EUT + 5G NR n5 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card      |
| Mode 15   | : EUT + 5G NR n66 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card     |
| Mode 16   | : EUT + 5G NR n77 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card       |
| Mode 17   | : EUT + CA_5B Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card           |



|                  |   |
|------------------|---|
| Mode 18 :        | EUT + CA_66B Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                               |
| Mode 19 :        | EUT + CA_66C Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                             |
| Mode 20 :        | EUT + CA_2A-4A Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                             |
| Mode 21 :        | EUT + CA_2A-5A Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                           |
| Mode 22 :        | EUT + CA_2A-13A Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                            |
| Mode 23 :        | EUT + CA_2A-66A Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                          |
| Mode 24 :        | EUT + DC_5A_n2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                             |
| Mode 25 :        | EUT + DC_2A_n5 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                           |
| Mode 26 :        | EUT + DC_2A_n66 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                            |
| Mode 27 :        | EUT + DC_5A_n77 Idle + Bluetooth Idle + 2.4G WLAN Idle + NFC + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                    |
| <b>Mode 28 :</b> | <b>EUT + LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card + Rear Camera Mode</b> |
| <b>Mode 29 :</b> | <b>EUT + LTE Band 13 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable + SIM Card + PC + PC Adapter + Data Transmission Mode</b>             |
| Mode 30 :        | EUT + LTE Band 2 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable + SIM Card + PC + PC Adapter + SIM Card + Rear Camera Mode              |
| Mode 31 :        | EUT + LTE Band 17 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                          |
| Mode 32 :        | EUT + LTE Band 25 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                        |
| Mode 33 :        | EUT + LTE Band 71 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                          |
| Mode 34 :        | EUT + CA_2A-12A Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                          |
| Mode 35 :        | EUT + DC_4A_n78 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + AC Adapter + USB Cable (Charging from Adapter) + SIM Card                            |
| <b>Remark:</b>   | <b>The above test mode in boldface (Mode 28) was the worst case of conducted emission test, only</b>  |





the test data of these modes were reported. The above test mode in boldface (Mode 29) was the worst case of radiated emission test, only the test data of these modes were reported.

During the measurement, the environmental conditions were within the listed ranges:

|                             |          |
|-----------------------------|----------|
| Temperature (°C):           | 15 - 35  |
| Relative Humidity (%):      | 30 - 60  |
| Atmospheric Pressure (kPa): | 86 - 106 |

## 3. 47 CFR Part 15B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency Range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quasi-peak                   | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

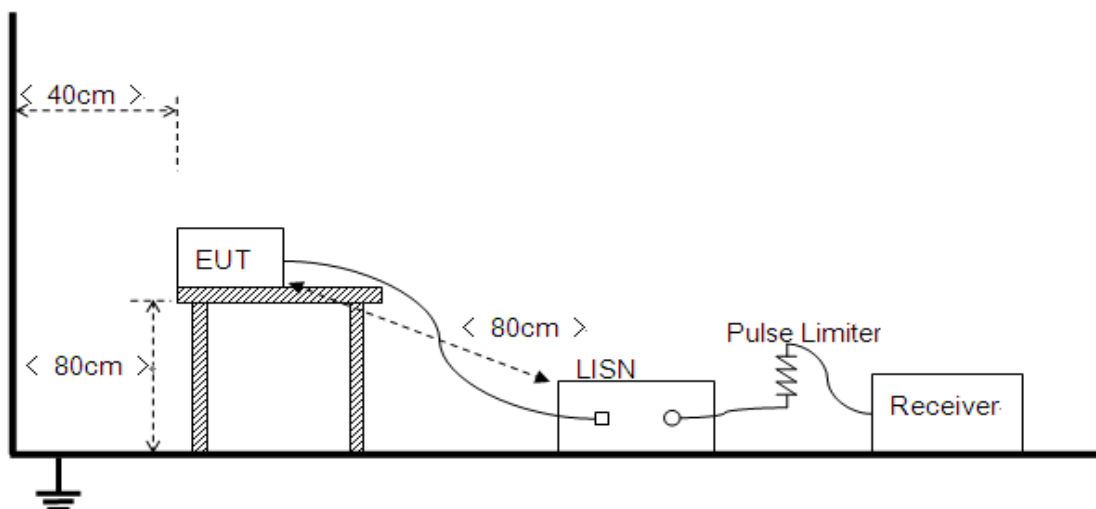



The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### 3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R [\text{dB}\mu\text{V}] + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}} [\text{dB}]$$


$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage Division Factor of LISN


$L_{\text{Cable loss}}$ : Correction Factor Contains Pulse Limiter and Cable

During the test, the total correction Factor  $L_{\text{Cable loss}}$  and  $A_{\text{Factor}}$  were built in test software.

**A. Test Plot and Suspicious Points:**

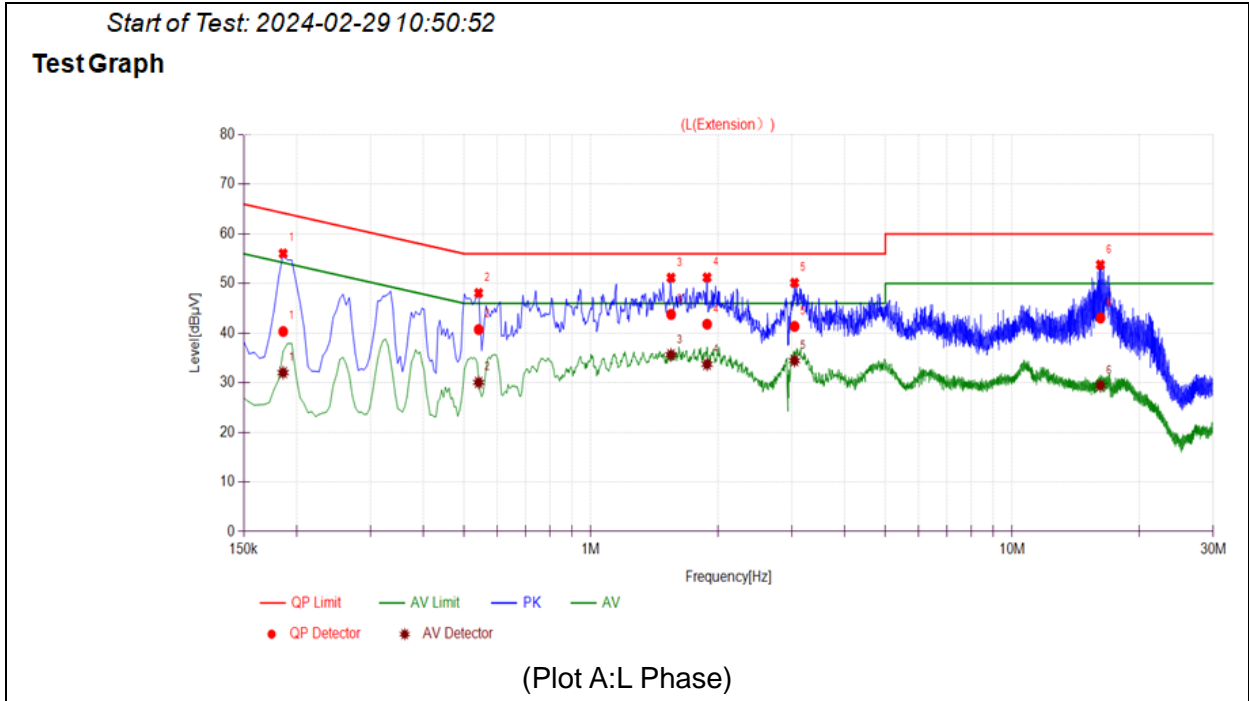

| No. | Fre. (MHz) | Emission Level (dBµV) |         | Limit (dBµV) |         | Power-line | Verdict |
|-----|------------|-----------------------|---------|--------------|---------|------------|---------|
|     |            | Quasi-peak            | Average | Quasi-peak   | Average |            |         |
| 1   | 0.1860     | 40.33                 | 32.03   | 64.21        | 54.21   | Line       | PASS    |
| 2   | 0.5415     | 40.72                 | 30.07   | 56.00        | 46.00   |            | PASS    |
| 3   | 1.5496     | 43.77                 | 35.64   | 56.00        | 46.00   |            | PASS    |
| 4   | 1.8868     | 41.80                 | 33.72   | 56.00        | 46.00   |            | PASS    |
| 5   | 3.0437     | 41.36                 | 34.45   | 56.00        | 46.00   |            | PASS    |
| 6   | 16.1928    | 43.04                 | 29.43   | 60.00        | 50.00   |            | PASS    |

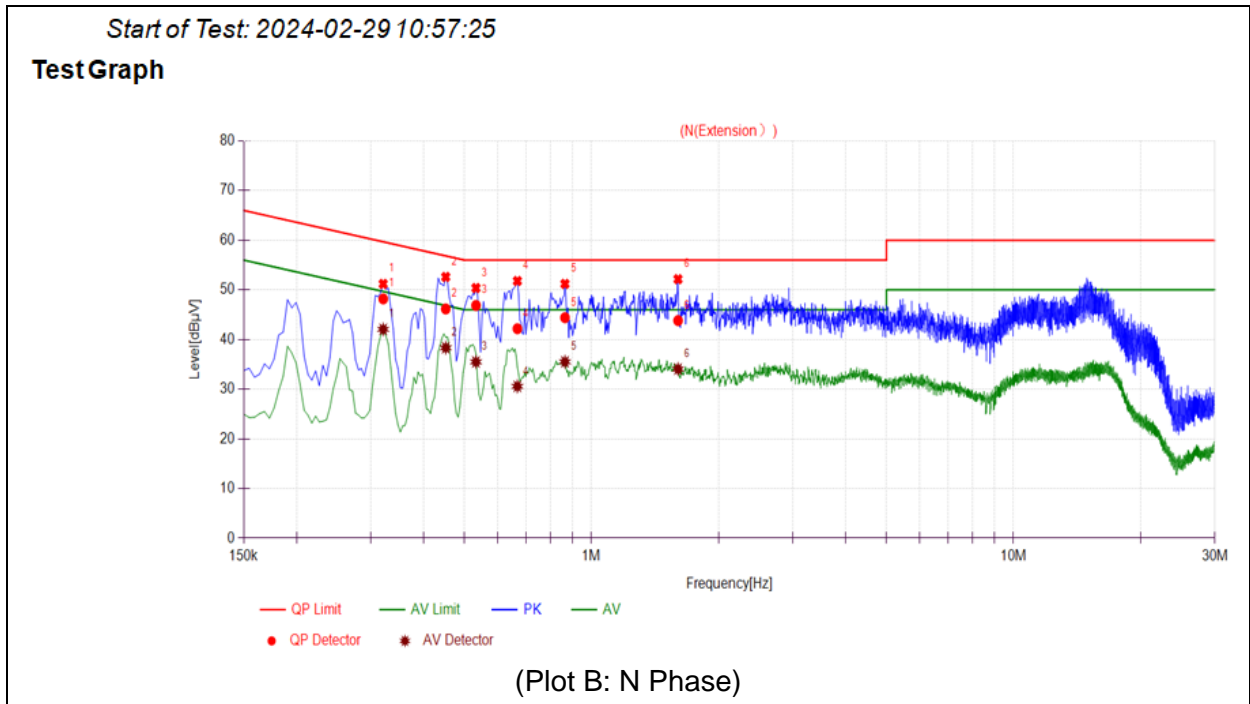

| No. | Fre. (MHz) | Emission Level (dBµV) |         | Limit (dBµV) |         | Power-line | Verdict |
|-----|------------|-----------------------|---------|--------------|---------|------------|---------|
|     |            | Quasi-peak            | Average | Quasi-peak   | Average |            |         |
| 1   | 0.3210     | 48.19                 | 42.06   | 59.68        | 49.68   | Neutral    | PASS    |
| 2   | 0.4515     | 46.16                 | 38.34   | 56.85        | 46.85   |            | PASS    |
| 3   | 0.5325     | 46.87                 | 35.49   | 56.00        | 46.00   |            | PASS    |
| 4   | 0.6674     | 42.19                 | 30.57   | 56.00        | 46.00   |            | PASS    |
| 5   | 0.8654     | 44.41                 | 35.51   | 56.00        | 46.00   |            | PASS    |
| 6   | 1.6036     | 43.82                 | 34.05   | 56.00        | 46.00   |            | PASS    |



### 3.2. Radiated Emission

#### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency Range (MHz) | Field Strength Limitation at 3m Measurement Dist |                              |
|-----------------------|--|------------------------------|
|                       | ( $\mu\text{V/m}$ )                              | ( $\text{dB}\mu\text{V/m}$ ) |
| 30.0 - 88.0           | 100  | 20log 100                    |
| 88.0 - 216.0          | 150  | 20log 150                    |
| 216.0 - 960.0         | 200  | 20log 200                    |
| Above 960.0           | 500  | 20log 500                    |

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dB}\mu\text{V/m}$  is calculated by  $20\log$  Emission Level( $\mu\text{V/m}$ ).


#### 3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz)                           |
|--|--|
| Below 1.705 .....  | 30.  |
| 1.705-108 .....  | 1000.  |
| 108-500 .....  | 2000.  |
| 500-1000 .....   | 5000.  |
| Above 1000 .....   | 5th harmonic of the highest frequency or 40 GHz, whichever is lower. |

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to1GHz

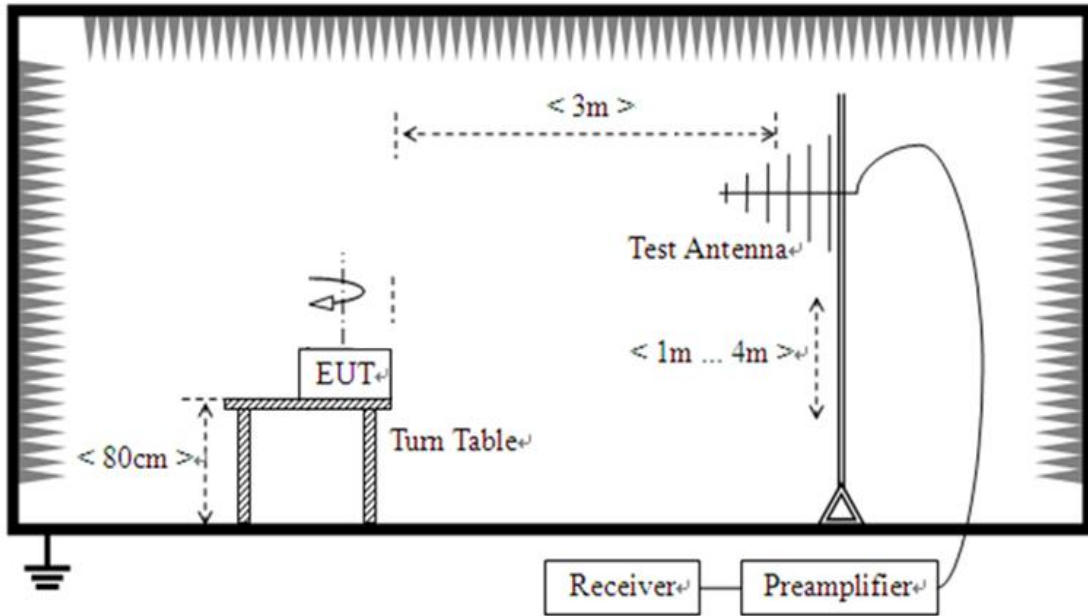

- 2) For radiated emissions above 1GHz

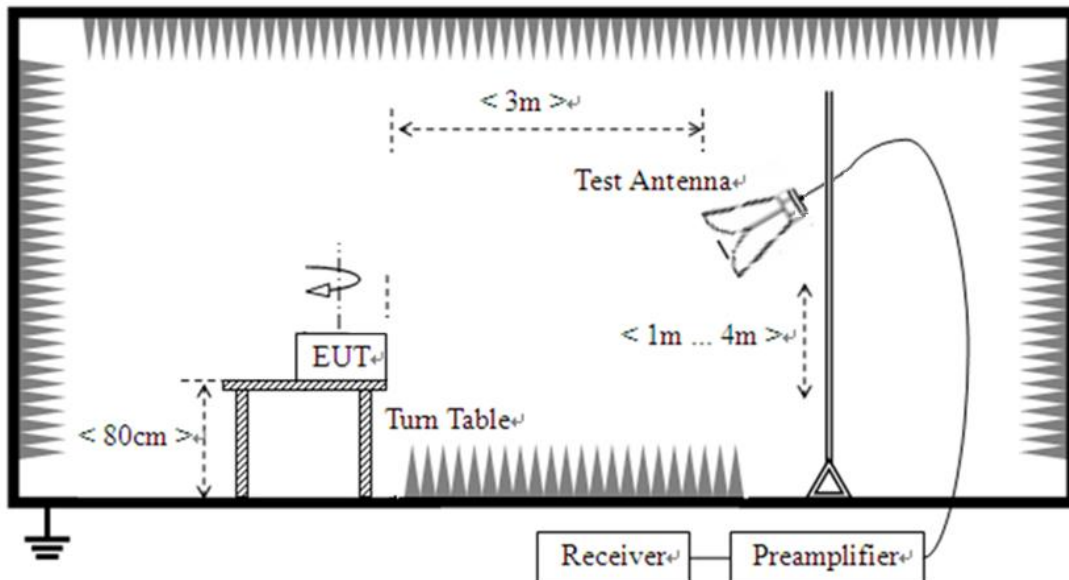



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.

### 3.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which (6GHz-40GHz) are attenuated more than 20 dB below the permissible value need not be reported.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R \text{ [dB}\mu\text{V]} + A_T \text{ [dB]} + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading


$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.




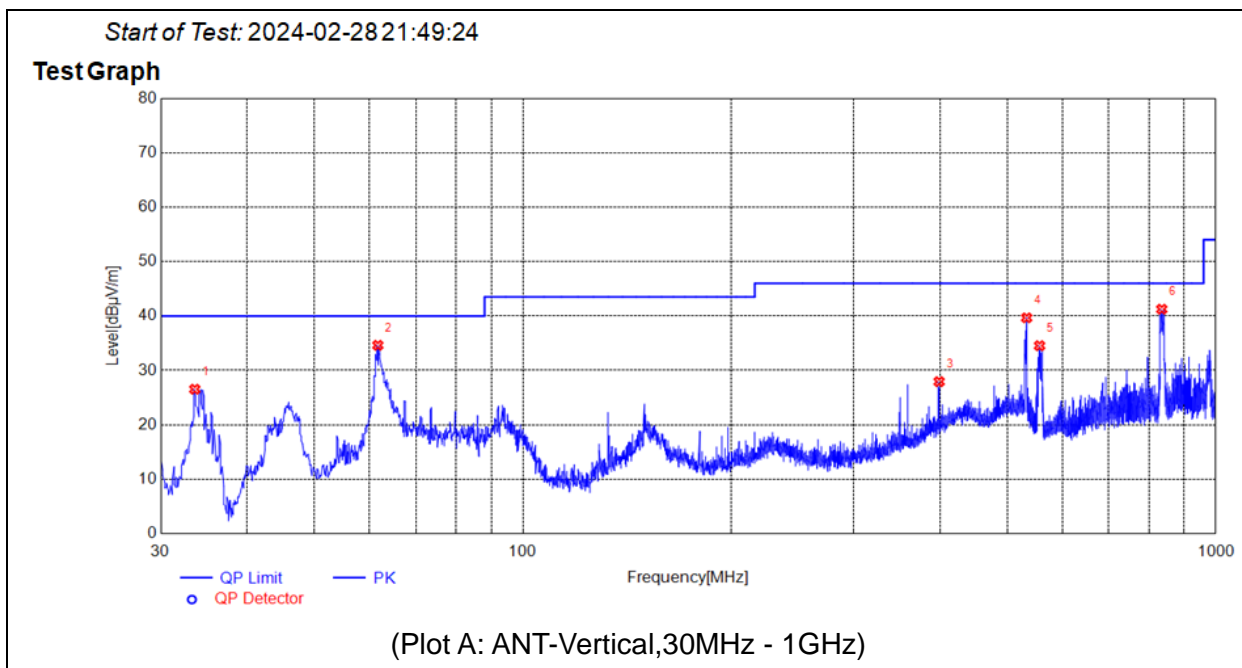


| No. | Fre. MHz | PK dBµV/m | QP dBµV/m | AV dBµV/m | Limit-PK dBµV/m | Limit-QP dBµV/m | Limit-AV dBµV/m | ANT | Verdict |
|-----|----------|-----------|-----------|-----------|-----------------|-----------------|-----------------|-----|---------|
| 1   | 33.5894  | 26.54     | N.A       | N.A       | N.A             | 40.00           | N.A             | V   | PASS    |
| 2   | 61.7222  | 34.61     | N.A       | N.A       | N.A             | 40.00           | N.A             | V   | PASS    |
| 3   | 398.6369 | 27.93     | N.A       | N.A       | N.A             | 46.00           | N.A             | V   | PASS    |
| 4   | 533.1893 | 39.66     | N.A       | N.A       | N.A             | 46.00           | N.A             | V   | PASS    |
| 5   | 556.5687 | 34.54     | N.A       | N.A       | N.A             | 46.00           | N.A             | V   | PASS    |
| 6   | 835.3745 | 41.25     | N.A       | N.A       | N.A             | 46.00           | N.A             | V   | PASS    |

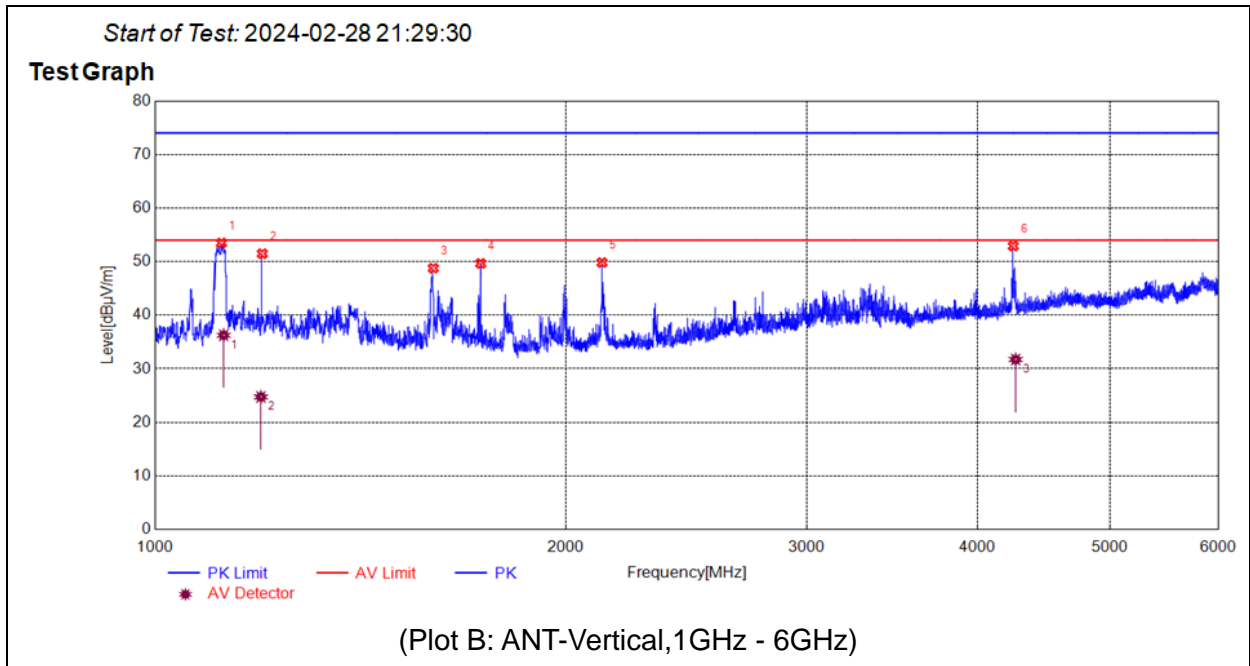

| No. | Fre. MHz  | PK dBµV/m | QP dBµV/m | AV dBµV/m | Limit-PK dBµV/m | Limit-QP dBµV/m | Limit-AV dBµV/m | ANT | Verdict |
|-----|-----------|-----------|-----------|-----------|-----------------|-----------------|-----------------|-----|---------|
| 1   | 1119.0000 | 53.49     | N.A       | 36.25     | 74.00           | N.A             | 54.00           | V   | PASS    |
| 2   | 1198.5000 | 51.48     | N.A       | 24.74     | 74.00           | N.A             | 54.00           | V   | PASS    |
| 3   | 1599.0000 | 48.77     | N.A       | N.A       | 74.00           | N.A             | 54.00           | V   | PASS    |
| 4   | 1732.0000 | 49.66     | N.A       | N.A       | 74.00           | N.A             | 54.00           | V   | PASS    |
| 5   | 2125.0000 | 49.83     | N.A       | N.A       | 74.00           | N.A             | 54.00           | V   | PASS    |
| 6   | 4249.5000 | 52.90     | N.A       | 31.72     | 74.00           | N.A             | 54.00           | V   | PASS    |

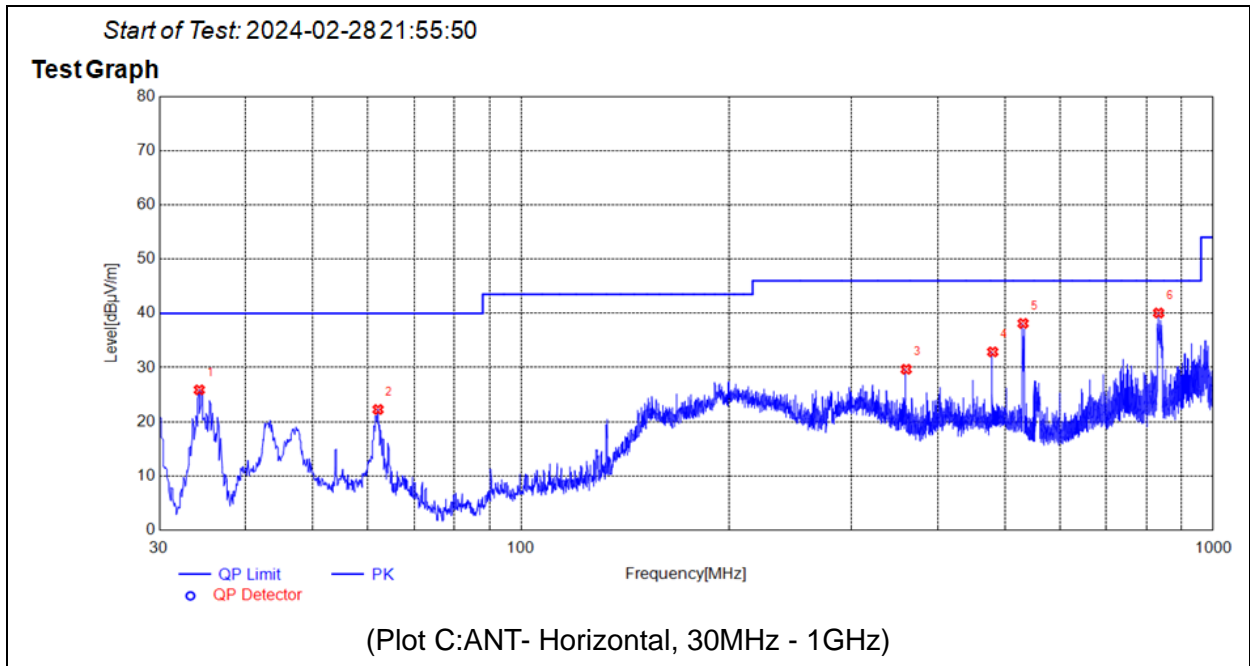

| No. | Fre. MHz | PK dBµV/m | QP dBµV/m | AV dBµV/m | Limit-PK dBµV/m | Limit-QP dBµV/m | Limit-AV dBµV/m | ANT | Verdict |
|-----|----------|-----------|-----------|-----------|-----------------|-----------------|-----------------|-----|---------|
| 1   | 34.2684  | 25.88     | N.A       | N.A       | N.A             | 40.00           | N.A             | H   | PASS    |
| 2   | 62.1102  | 22.26     | N.A       | N.A       | N.A             | 40.00           | N.A             | H   | PASS    |
| 3   | 360.0270 | 29.67     | N.A       | N.A       | N.A             | 46.00           | N.A             | H   | PASS    |
| 4   | 480.0280 | 32.88     | N.A       | N.A       | N.A             | 46.00           | N.A             | H   | PASS    |
| 5   | 531.0551 | 38.13     | N.A       | N.A       | N.A             | 46.00           | N.A             | H   | PASS    |
| 6   | 833.7254 | 40.06     | N.A       | N.A       | N.A             | 46.00           | N.A             | H   | PASS    |

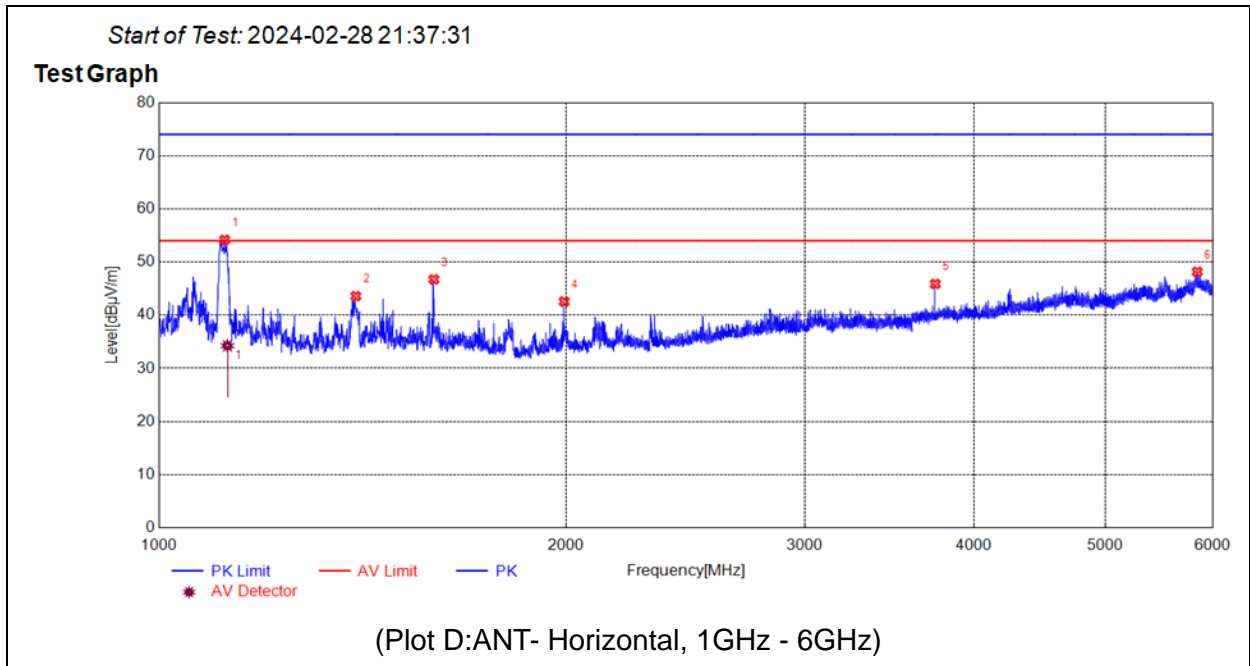

| No. | Fre. MHz  | PK dBµV/m | QP dBµV/m | AV dBµV/m | Limit-PK dBµV/m | Limit-QP dBµV/m | Limit-AV dBµV/m | ANT | Verdict |
|-----|-----------|-----------|-----------|-----------|-----------------|-----------------|-----------------|-----|---------|
| 1   | 1118.5000 | 54.17     | N.A       | 34.25     | 74.00           | N.A             | 54.00           | H   | PASS    |
| 2   | 1398.0000 | 43.58     | N.A       | N.A       | 74.00           | N.A             | 54.00           | H   | PASS    |
| 3   | 1596.5000 | 46.73     | N.A       | N.A       | 74.00           | N.A             | 54.00           | H   | PASS    |
| 4   | 1992.5000 | 42.56     | N.A       | N.A       | 74.00           | N.A             | 54.00           | H   | PASS    |
| 5   | 3745.5000 | 45.88     | N.A       | N.A       | 74.00           | N.A             | 54.00           | H   | PASS    |
| 6   | 5848.0000 | 48.16     | N.A       | N.A       | 74.00           | N.A             | 54.00           | H   | PASS    |



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

|  |              |        |
|--|--------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y)) | 9kHz-150kHz  | ±3.3dB |
|  | 150kHz-30MHz | ±2.8dB |

### Uncertainty of Radiated Emission Measurement

|  |                |         |
|--|----------------|---------|
| Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y)) | 30MHz-200MHz   | ±5.06dB |
|  | 200MHz-1000MHz | ±5.04dB |
|  | 1GHz-6GHz      | ±5.18dB |
|  | 6GHz-18GHz     | ±5.48dB |



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

|                            |  |
|----------------------------|--|
| <b>Laboratory Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.  |
| <b>Laboratory Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| <b>Telephone:</b>          | +86 755 36698555   |
| <b>Facsimile:</b>          | +86 755 36698525   |

### 2. Identification of the Responsible Testing Location

|                 |  |
|-----------------|--|
| <b>Name:</b>    | Shenzhen Morlab Communications Technology Co., Ltd.  |
| <b>Address:</b> | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

### 3. Accreditation Certificate

|                                       |  |
|---------------------------------------|--|
| <b>Accredited Testing Laboratory:</b> | The FCC designation number is CN1192.<br>Test firm registration number is 226174.<br>(Shenzhen Morlab Communications Technology Co., Ltd.) |
|---------------------------------------|--|

### 4. Test Software Utilized

| <b>Model</b>    | <b>Version Number</b> | <b>Producer</b> |
|-----------------|-----------------------|-----------------|
| TS+ -[JS32-RE]  | Version 2.5.0.6       | Tonscend        |
| TS+ -[ JS32-CE] | Version 2.5.0.0       | Tonscend        |



## 5. Test Equipments Utilized

| Description           | Model               | Serial No.               | Manufacturer  | Cal. Date | Due. Date |
|-----------------------|---------------------|--------------------------|---------------|-----------|-----------|
| Bi-Log Antenna        | VULB 9163           | 9163-519                 | SCHWARZBECK   | 2023/7/1  | 2024/6/30 |
| Horn Antenna          | BBHA 9120D          | 01774                    | SCHWARZBECK   | 2023/7/1  | 2024/6/30 |
| Receiver              | N9038A              | MY564000<br>93           | KEYSIGHT      | 2024/1/25 | 2025/1/23 |
| 6db Attenuator        | BW-N6W5+            | E191001                  | Mini-circuits | 2023/9/19 | 2024/9/18 |
| Preamplifier          | S020180L3203        | 61171/611<br>72          | LUCIX CORP.   | 2023/6/27 | 2024/6/26 |
| Preamplifier          | S10M100L3802        | 46732                    | LUCIX CORP.   | 2023/6/27 | 2024/6/26 |
| Preamplifier          | DCLNA0118-40<br>C-S | DS77209                  | Decentest     | 2023/7/4  | 2024/7/3  |
| RF Coaxial<br>Cable   | PE330               | MRE001                   | Pasternack    | N/A       | N/A       |
| RF Coaxial<br>Cable   | CLU18               | MRE002                   | Pasternack    | N/A       | N/A       |
| RF Coaxial<br>Cable   | CLU18               | MRE003                   | Pasternack    | N/A       | N/A       |
| RF Coaxial<br>Cable   | QA360-40-KK-<br>0.5 | 22290045                 | Qualwave      | N/A       | N/A       |
| RF Coaxial<br>Cable   | QA360-40-KKF<br>-2  | 22290046                 | Qualwave      | N/A       | N/A       |
| RF Coaxial<br>Cable   | QA500-18-NN-<br>5   | 22120181                 | Qualwave      | N/A       | N/A       |
| RF Coaxial<br>Cable   | BNC                 | MRE04                    | Qualwave      | N/A       | N/A       |
| Receiver              | ESPI                | 101052                   | R&S           | 2023/6/21 | 2024/6/20 |
| LISN                  | NSLK 8127           | 8127449                  | Schwarzbeck   | 2024/2/2  | 2025/2/1  |
| 10dB Pulse<br>Limiter | VTSD 9561-F         | VTSD<br>9561 F-B<br>#206 | SCHWARZBECK   | 2023/6/27 | 2024/6/26 |
| System<br>Simulator   | CMW500              | 152038                   | R&S           | 2023/9/19 | 2024/9/18 |

## 6. Ancillary Equipment Utilized

| Description | Manufacturer | Model     | Serial No. |
|-------------|--------------|-----------|------------|
| PC          | DELL         | P144G     | 20210357   |
| PC adapter  | DELL         | HA65NM190 | N/A        |
| PC          | APPLE        | A1370     | N/A        |



REPORT No.: SZ23110216E01

|            |       |       |     |
|------------|-------|-------|-----|
| PC Adapter | APPLE | A1374 | N/A |
|------------|-------|-------|-----|

————— END OF REPORT —————