



# TEST REPORT

**APPLICANT** : Reliance Communications LLC

**PRODUCT NAME** : Orbic Fun Pro 5G

**MODEL NAME** : R678L5SFP

**BRAND NAME** : Orbic

**FCC ID** : 2ABGH-R678L5SFP

**STANDARD(S)** : 47 CFR Part 15 Subpart B

**RECEIPT DATE** : 2023-12-21

**TEST DATE** : 2024-02-18

**ISSUE DATE** : 2024-04-23



Edited by: Chen Bilian  
Chen Bilian(Rapporteur)

Approved by: Xiao Xiong  
Xiao Xiong(Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 2. Test Results ..... 6**
- 2.1. Applied Reference Documents ..... 6**
- 2.2. EUT Setup and Operating Conditions ..... 7**
- 3. 47 CFR Part 15B Requirements ..... 10**
- 3.1. Conducted Emission ..... 10**
- 3.2. Radiated Emission ..... 14**
- Annex A Test Uncertainty ..... 21**
- Annex B Testing Laboratory Information ..... 22**

Change History		
Version	Date	Reason for Change
1.0	2024-04-23	First edition



# 1. Technical Information

**Note:** Provide by applicant

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Reliance Communications LLC
<b>Applicant Address:</b>	555 Wireless Blvd. Hauppauge, NY 11788, USA
<b>Manufacturer:</b>	Unimaxcomm
<b>Manufacturer Address:</b>	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Orbic Fun Pro 5G
<b>EUT No.:</b>	9#, 10#
<b>Hardware Version:</b>	V1.0
<b>Software Version:</b>	R678L5SFP_v1.0.18_LVZ
<b>Tx Frequency:</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n48: 3550 MHz ~ 3700 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz



	802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz NFC: 13.56 MHz																
<b>Rx Frequency:</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV: 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620 MHz ~ 2690 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 746 MHz ~ 756 MHz LTE Band 48: 3550MHz~3700MHz LTE Band 66: 2110 MHz ~ 2200 MHz 5G NR n2: 1930 MHz ~ 1990 MHz 5G NR n5: 869 MHz ~ 894 MHz 5G NR n48: 3550 MHz ~ 3700 MHz 5G NR n66: 2110 MHz ~ 2200 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz NFC: 13.56 MHz Wireless charging: 110kHz ~ 205kHz																
<b>CA_UL:</b>	5B, 48C, 66B, 66C, 2A-4A, 2A-5A, 4A-5A, 2A-13A, 4A-13A, 2A-66A, 5A-66A, 13A-66A																
<b>EN_DC:</b>	DC_5A_n2, DC_13A_n2, DC_66A_n2, DC_2A_n5, DC_48A_n5, DC_66A_n5, DC_2A_n66, DC_5A_n66, DC_13A_n66, DC_2A_n77, DC_5A_n77, DC_13A_n77, DC_66A_n77																
<b>Accessory:</b>	<table border="1"> <tr> <td colspan="2"><b>AC Adapter</b></td> </tr> <tr> <td>Brand Name:</td> <td>Orbic</td> </tr> <tr> <td>Model No.:</td> <td>OACH023US1</td> </tr> <tr> <td>Serial No.:</td> <td>(N/A, marked #1 by test site)</td> </tr> <tr> <td>Rated Input:</td> <td>100-240V~50/60Hz, 0.5A</td> </tr> <tr> <td>Rated Output:</td> <td>5V=3A, 9V=2A, 12V=1.5A</td> </tr> <tr> <td>Manufacturer 1:</td> <td>WATAI ELECTRONICS PRIVATE LIMITED</td> </tr> <tr> <td>Manufacturer 2:</td> <td>KANGYIN ELECTRONIC TECHNOLOGY</td> </tr> </table>	<b>AC Adapter</b>		Brand Name:	Orbic	Model No.:	OACH023US1	Serial No.:	(N/A, marked #1 by test site)	Rated Input:	100-240V~50/60Hz, 0.5A	Rated Output:	5V=3A, 9V=2A, 12V=1.5A	Manufacturer 1:	WATAI ELECTRONICS PRIVATE LIMITED	Manufacturer 2:	KANGYIN ELECTRONIC TECHNOLOGY
<b>AC Adapter</b>																	
Brand Name:	Orbic																
Model No.:	OACH023US1																
Serial No.:	(N/A, marked #1 by test site)																
Rated Input:	100-240V~50/60Hz, 0.5A																
Rated Output:	5V=3A, 9V=2A, 12V=1.5A																
Manufacturer 1:	WATAI ELECTRONICS PRIVATE LIMITED																
Manufacturer 2:	KANGYIN ELECTRONIC TECHNOLOGY																



		CO.,LTD
	<b>Battery</b>	
	Brand Name:	Orbic
	Model No.:	BTE-5004
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	4870mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd.
	<b>USB Cable</b>	
	Model:	HX-YLMK-06
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD

**Note:**

1. This test report is variant from the original report (Report No. : SZ23080316E01, model name: R678L5S) based on the similarity between before, it change product name, model name, software version, FCC ID, appearance and antenna. This test has been tested RE. For RE, only the worst case is recorded in this report. The others are the same as before.
2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.

## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.107	Conducted Emission	2024.01.17	Wang Deyong	PASS <sup>Note 4</sup>	No deviation
2	15.109	Radiated Emission	2024.02.18	Zhang Bangyi	PASS	No deviation

**Note 1:**The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

**Note 2:**Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 3:**When the test result is a critical value,we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

**Note 4:** The test results of these test items in this report refer to the test report (Report No.: SZ23080316E01).



## 2.2. EUT Setup and Operating Conditions

Note: All of the following test modes are tested in all the test items.

Test Item	
<b>Radiated Emission</b>	
Mode 1	EUT + GSM850 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 2	EUT + GSM1900 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 3	EUT + WCDMA Band II Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 4	EUT + WCDMA Band IV Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 5	EUT + WCDMA Band V Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 6	EUT + LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 7	EUT + LTE Band 4 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 8	EUT + LTE Band 5 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 9	EUT + LTE Band 7 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 10	EUT + LTE Band 12 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 11	EUT + LTE Band 13 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 12	EUT + LTE Band 48 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 13	EUT + LTE Band 66 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 14	EUT + 5G NR n2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 15	EUT + 5G NR n5 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 16	EUT + 5G NR n48 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 17	EUT + 5G NR n66 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable



	(Charging from Adapter) + AC Adapter + SIM Card
Mode 18 :	EUT + 5G NR n77 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 19 :	EUT + 5G NR n78 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 20 :	EUT + 5B Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 21 :	EUT + 48C Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 22 :	EUT + 66B Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 23 :	EUT + 66C Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 24 :	EUT + 2A-4A Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 25 :	EUT + 2A-5A Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 26 :	EUT + 2A-13A Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 27 :	EUT + 2A-66A Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 28 :	EUT + DC_5A_n2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 29 :	EUT + DC_2A_n5 Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 30 :	EUT + DC_2A_n66 Idle + Bluetooth Idle + 5G WLAN Idle + NFC + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
Mode 31 :	EUT + DC_2A_n77 Idle + Bluetooth Idle + 2.4G WLAN Idle + Wireless charging Rx + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card
<b>Mode 32 :</b>	<b>EUT + WCDMA Band II Idle + Bluetooth Idle + 2.4G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card + Rear Camera Recording Mode</b>
Mode 33 :	EUT + LTE Band 2 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable (Charging from Adapter) + AC Adapter + SIM Card + Front Camera Recording Mode
Mode 34 :	EUT + LTE Band 12 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable + SIM Card + PC + PC Adapter + Rear Camera Recording Mode
<b>Mode 35 :</b>	<b>EUT + EUT + 5G NR n66 Idle + Bluetooth Idle + 5G WLAN Idle + Battery + USB Cable + SIM Card + PC + PC Adapter + Data Transmission Mode</b>



**Remark:**

The above test mode in boldface (Mode 32) was the worst case of conducted emission test, only the test data of these modes were reported. The above test mode in boldface (Mode 35) was the worst case of radiated emission test, only the test data of these modes were reported.

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

## 3. 47 CFR Part 15B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

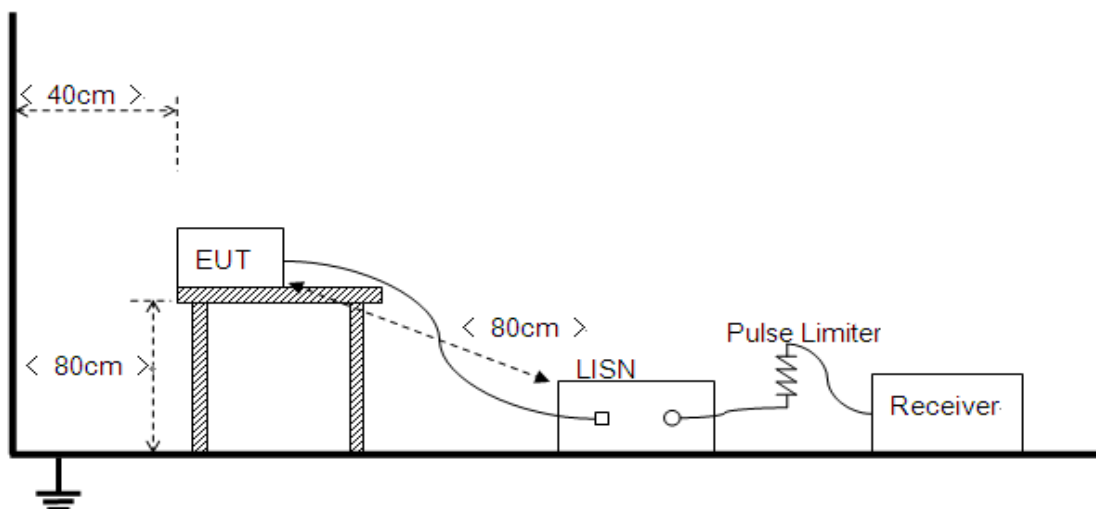



The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### 3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}] = U_R [\text{dB}\mu\text{V}] + L_{\text{Cable loss}} [\text{dB}] + A_{\text{Factor}} [\text{dB}]$$


$U_R$ : Receiver Reading

$A_{\text{Factor}}$ : Voltage Division Factor of LISN


$L_{\text{Cable loss}}$ : Correction Factor Contains Pulse Limiter and Cable

During the test, the total correction Factor  $L_{\text{Cable loss}}$  and  $A_{\text{Factor}}$  were built in test software.

**A. Test Plot and Suspicious Points:**

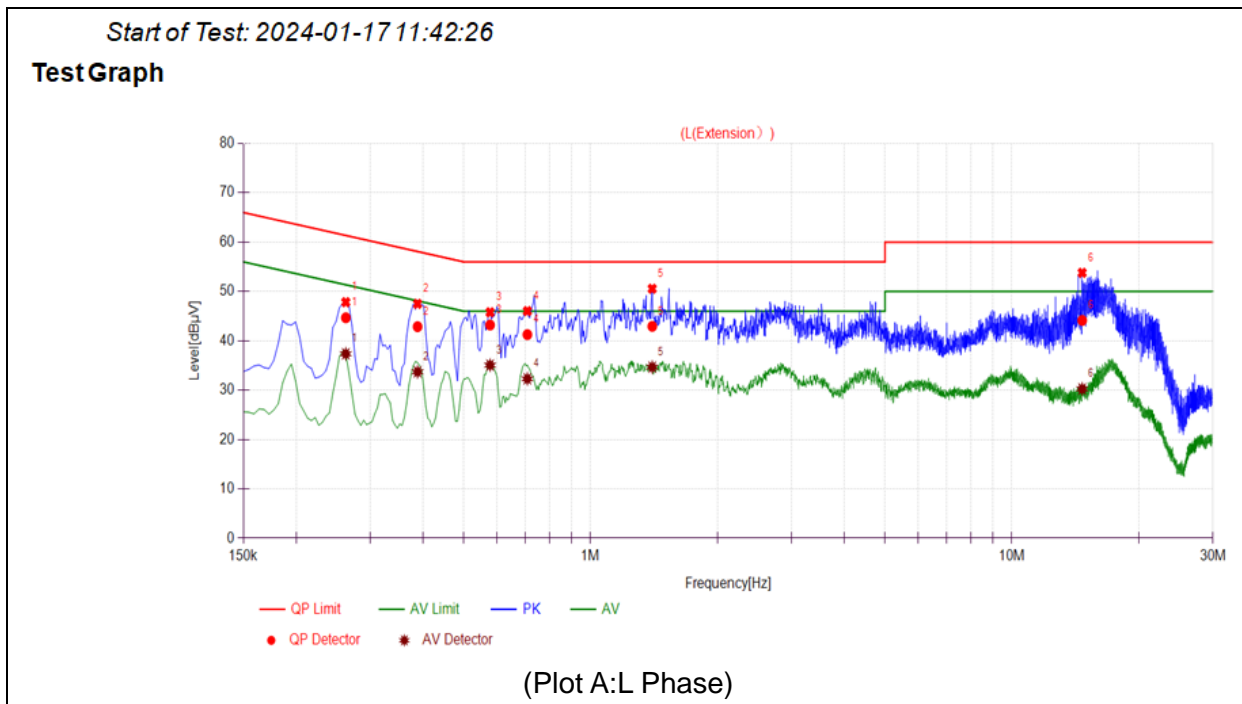

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.2625	44.68	37.36	61.35	51.35	Line	PASS
2	0.3885	42.87	33.71	58.10	48.10		PASS
3	0.5775	43.21	35.07	56.00	46.00		PASS
4	0.7080	41.26	32.30	56.00	46.00		PASS
5	1.4010	42.94	34.67	56.00	46.00		PASS
6	14.6860	44.14	30.26	60.00	50.00		PASS

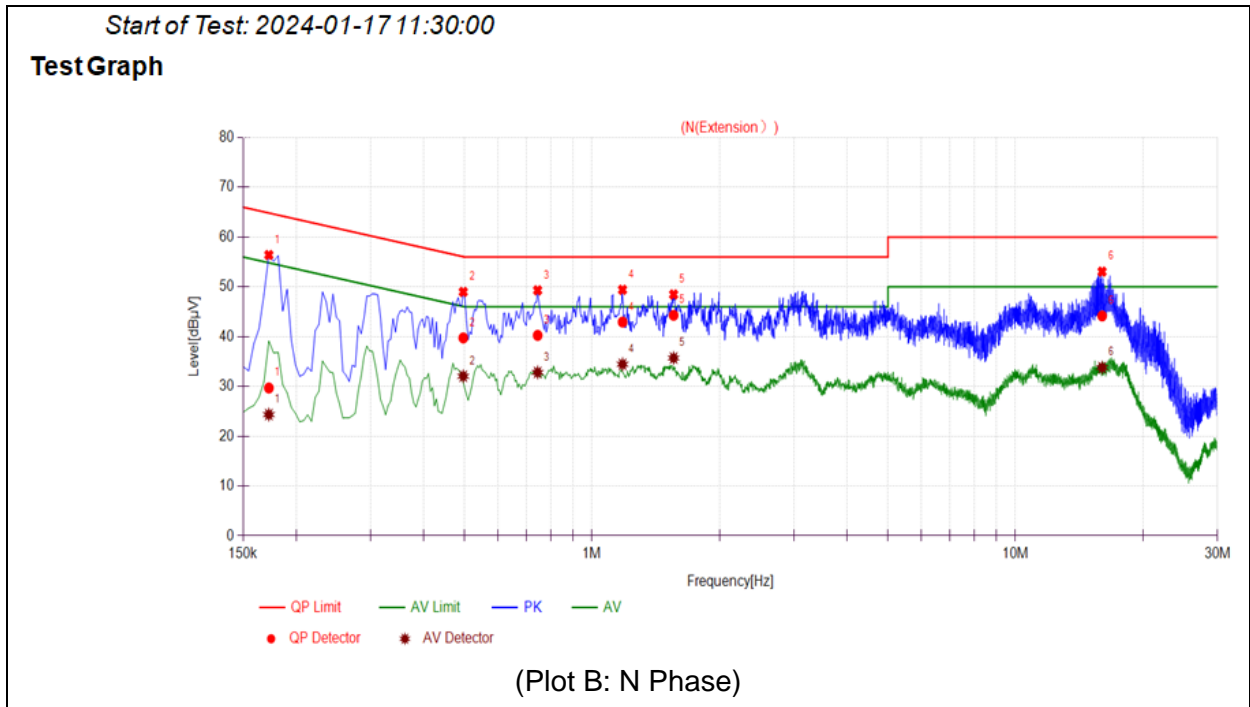

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quasi-peak	Average	Quasi-peak	Average		
1	0.1725	29.69	24.35	64.84	54.84	Neutral	PASS
2	0.4965	39.74	32.05	56.06	46.06		PASS
3	0.7440	40.26	32.81	56.00	46.00		PASS
4	1.1806	42.94	34.45	56.00	46.00		PASS
5	1.5586	44.29	35.71	56.00	46.00		PASS
6	16.0178	44.16	33.78	60.00	50.00		PASS



### 3.2. Radiated Emission

#### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in  $\text{dB}\mu\text{V/m}$  is calculated by  $20\log$  Emission Level( $\mu\text{V/m}$ ).


#### 3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705-108 .....	1000.
108-500 .....	2000.
500-1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to1GHz

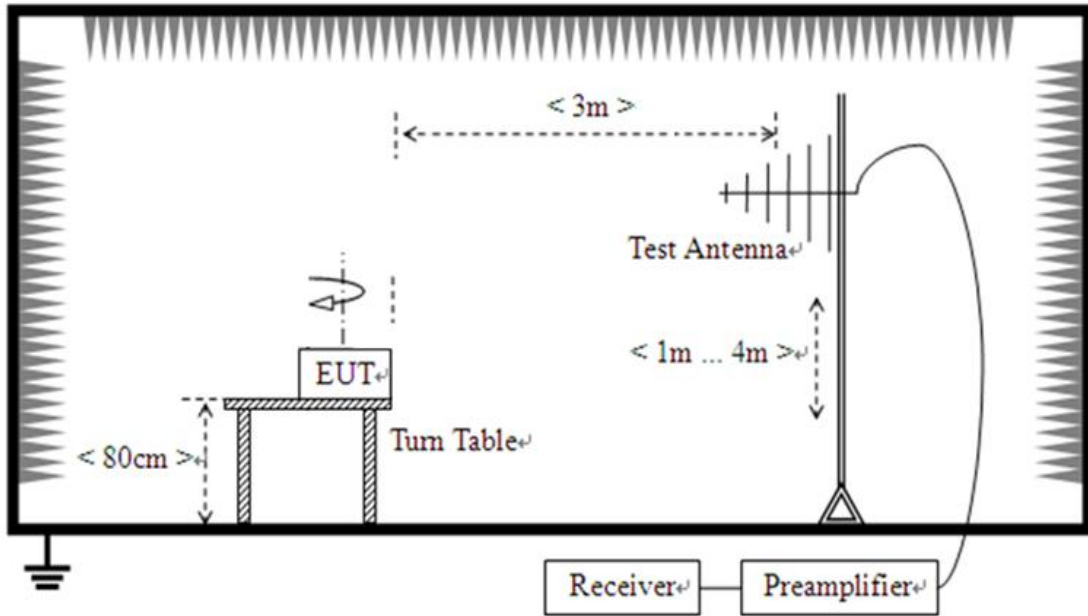

- 2) For radiated emissions above 1GHz

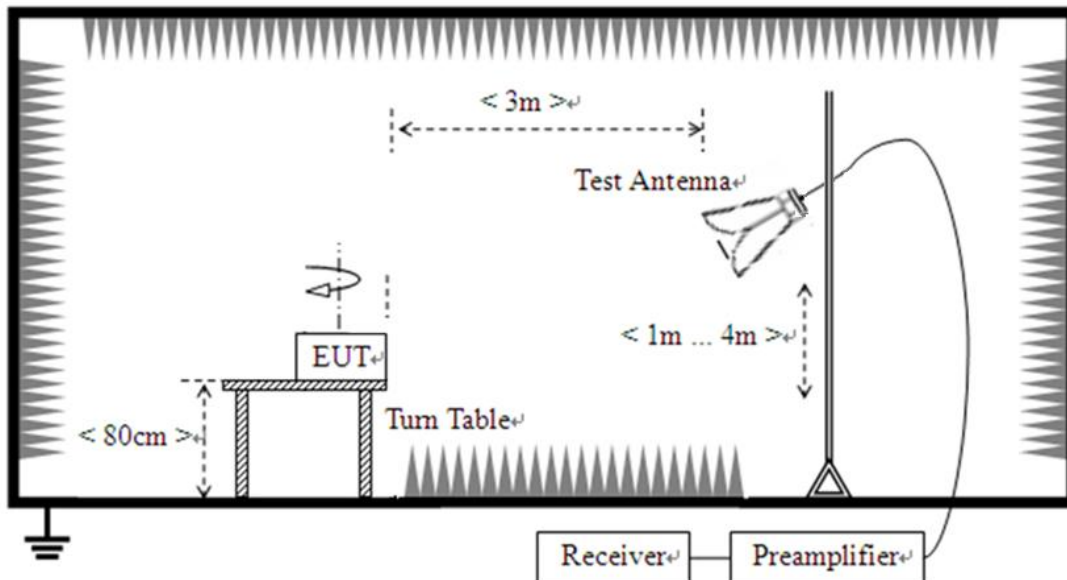



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.

### 3.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which (6GHz-30GHz) are attenuated more than 20 dB below the permissible value need not be reported.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R \text{ [dB}\mu\text{V]} + A_T \text{ [dB]} + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading


$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.




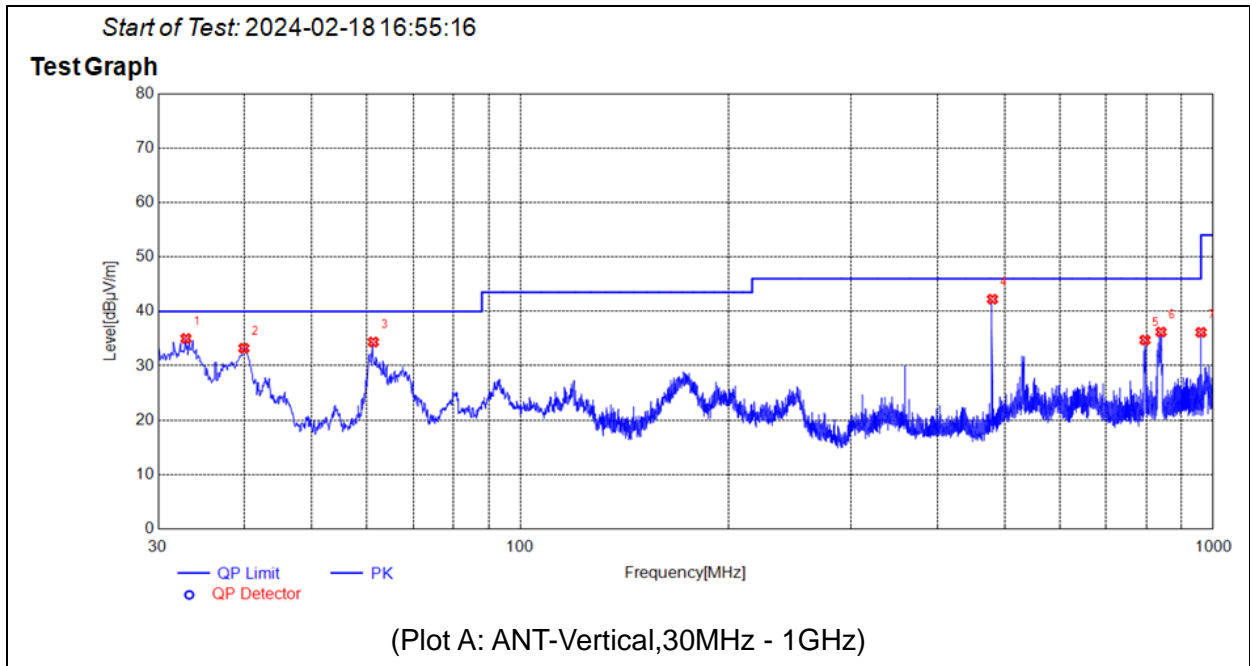


No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	32.9103	35.00	N.A	N.A	N.A	40.00	N.A	V	PASS
2	39.8950	33.21	N.A	N.A	N.A	40.00	N.A	V	PASS
3	61.3341	34.35	N.A	N.A	N.A	40.00	N.A	V	PASS
4	480.0280	42.23	N.A	N.A	N.A	46.00	N.A	V	PASS
5	797.1527	34.73	N.A	N.A	N.A	46.00	N.A	V	PASS
6	840.6131	36.20	N.A	N.A	N.A	46.00	N.A	V	PASS
7	960.0320	36.14	N.A	N.A	N.A	54.00	N.A	V	PASS

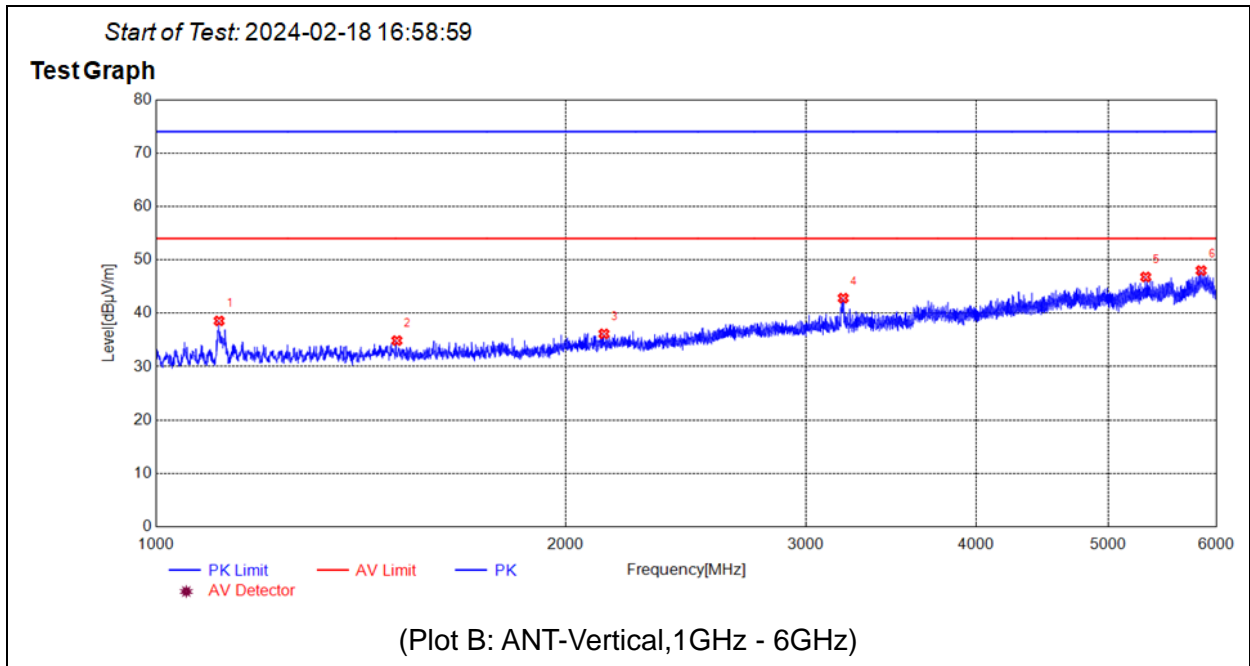

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1113.0000	38.57	N.A	N.A	74.00	N.A	54.00	V	PASS
2	1503.0000	34.88	N.A	N.A	74.00	N.A	54.00	V	PASS
3	2133.0000	36.15	N.A	N.A	74.00	N.A	54.00	V	PASS
4	3195.5000	42.83	N.A	N.A	74.00	N.A	54.00	V	PASS
5	5328.0000	46.80	N.A	N.A	74.00	N.A	54.00	V	PASS
6	5851.0000	47.99	N.A	N.A	74.00	N.A	54.00	V	PASS

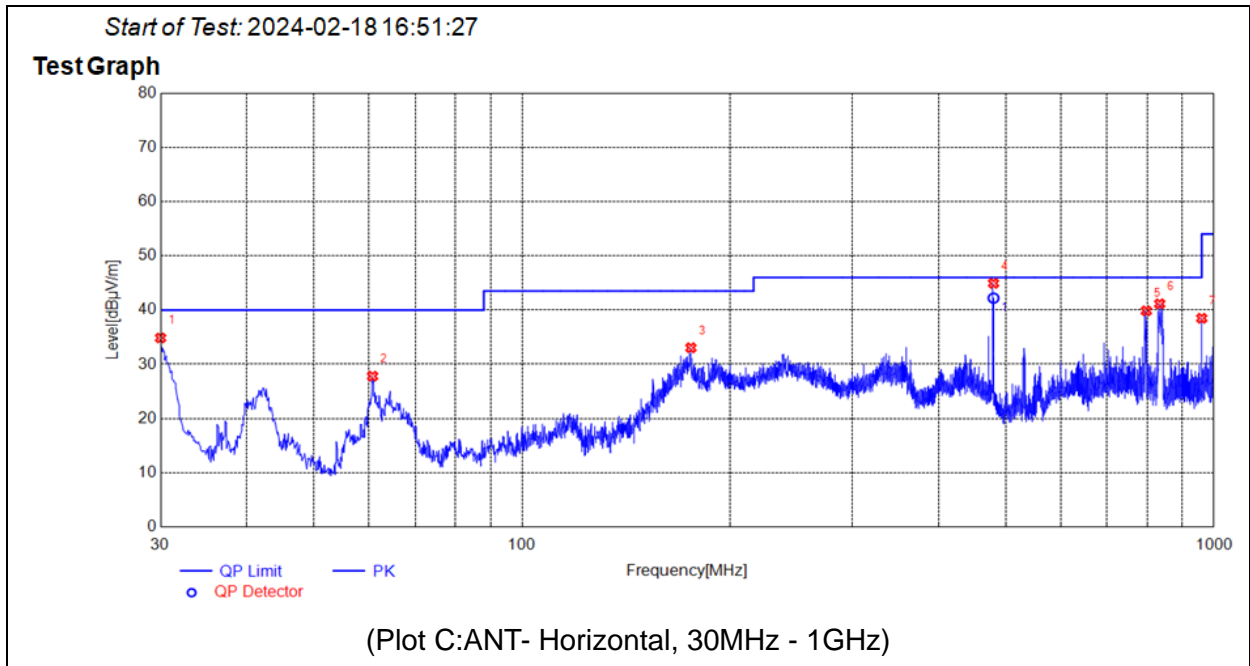

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	30.0000	34.85	N.A	N.A	N.A	40.00	N.A	H	PASS
2	60.7521	27.80	N.A	N.A	N.A	40.00	N.A	H	PASS
3	175.3205	33.04	N.A	N.A	N.A	43.50	N.A	H	PASS
4	480.0280	44.92	42.20	N.A	N.A	46.00	N.A	H	PASS
5	798.3168	39.85	N.A	N.A	N.A	46.00	N.A	H	PASS
6	834.6955	41.15	N.A	N.A	N.A	46.00	N.A	H	PASS
7	960.0320	38.48	N.A	N.A	N.A	54.00	N.A	H	PASS

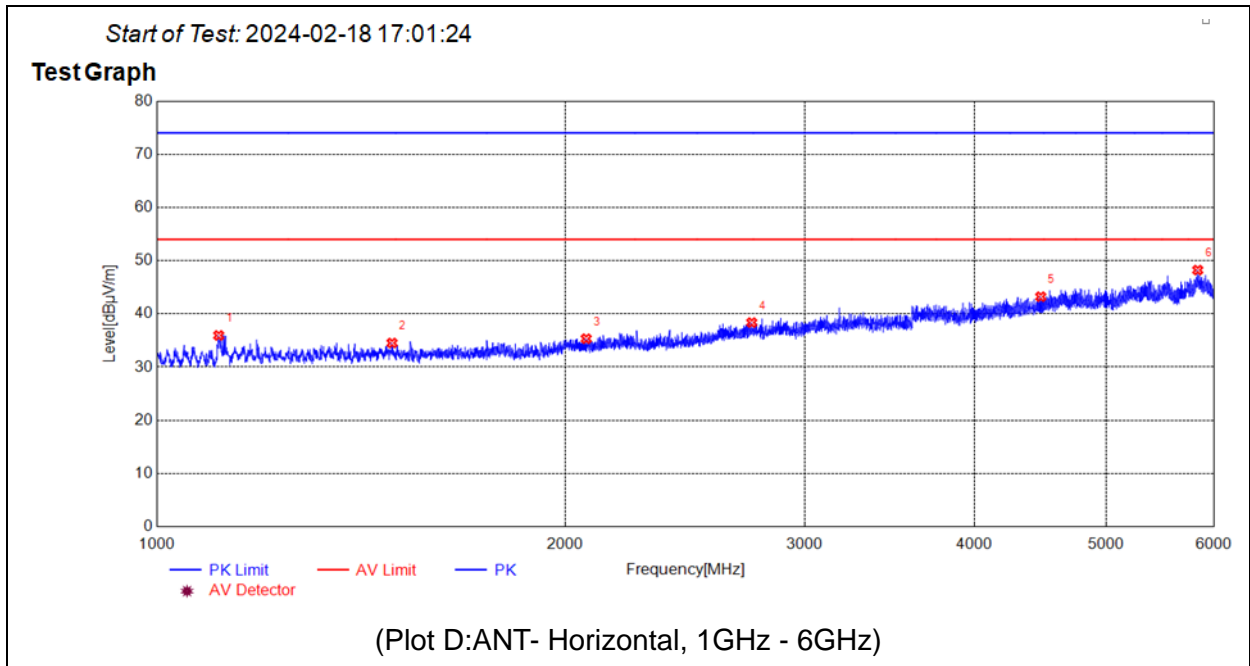

No.	Fre. MHz	PK dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1111.0000	35.95	N.A	N.A	74.00	N.A	54.00	H	PASS
2	1490.5000	34.53	N.A	N.A	74.00	N.A	54.00	H	PASS
3	2071.5000	35.34	N.A	N.A	74.00	N.A	54.00	H	PASS
4	2742.5000	38.37	N.A	N.A	74.00	N.A	54.00	H	PASS
5	4476.5000	43.23	N.A	N.A	74.00	N.A	54.00	H	PASS
6	5841.5000	48.24	N.A	N.A	74.00	N.A	54.00	H	PASS



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±3.3dB
	150kHz-30MHz	±2.8dB

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.04dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

### 4. Test Software Utilized

Model	Version Number	Producer
TS+ -[JS32-RE]	Version 2.5.0.6	Tonscend
TS+ -[ JS32-CE]	Version 2.5.0.0	Tonscend

### 5. Test Equipments Utilized

Description	Model	Serial No.	Manufacturer	Cal. Date	Due. Date
Bi-Log Antenna	VULB 9163	9163-519	SCHWARZBECK	2023/7/1	2024/6/30
Horn Antenna	BBHA 9120D	01774	SCHWARZBECK	2023/7/1	2024/6/30
Receiver	N9038A	MY541300 16	Agilent	2023/6/21	2024/6/20
6db Attenuator	BW-N6W5+	E191001	Mini-circuits	2023/9/19	2024/9/18
Preamplifier	S020180L3203	61171/611 72	LUCIX CORP.	2023/6/27	2024/6/26
Preamplifier	S10M100L3802	46732	LUCIX CORP.	2023/6/27	2024/6/26
Preamplifier	DCLNA0118-40	DS77209	Decentest	2023/7/4	2024/7/3



	C-S				
RF Coaxial Cable	PE330	MRE001	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE002	Pasternack	N/A	N/A
RF Coaxial Cable	CLU18	MRE003	Pasternack	N/A	N/A
RF Coaxial Cable	QA360-40-KK-0.5	22290045	Qualwave	N/A	N/A
RF Coaxial Cable	QA360-40-KKF-2	22290046	Qualwave	N/A	N/A
RF Coaxial Cable	QA500-18-NN-5	22120181	Qualwave	N/A	N/A
RF Coaxial Cable	BNC	MRE04	Qualwave	N/A	N/A
Receiver	ESPI	101052	R&S	2023/6/21	2024/6/20
LISN	NSLK 8127	8127449	Schwarzbeck	2023/2/21	2024/2/20
10dB Pulse Limiter	VTSD 9561-F	VTSD 9561 F-B #206	SCHWARZBECK	2023/6/27	2024/6/26
System Simulator	CMW500	152038	R&S	2023/9/19	2024/9/18

## 6. Ancillary Equipment Utilized

Description	Manufacturer	Model	Serial No.
PC	DELL	P144G	20210357
PC adapter	DELL	HA65NM190	N/A
PC	DELL	VOSTRO 5370	DF2DR A01 DPC
PC adapter	DELL	LA45NM140	OKXTTW

————— END OF REPORT —————