

TEST REPORT

Product Name Model Number FCC ID	 Waterproof Bluetooth Speaker SL479,CTEK062BK,25601 2ABHA0109 	
Prepared for : Address :	Ningbo Cstar Imp & Exp CO., LTD Floor 4,Building E, No. 655-90,Qiming Road, Yinzhou Investment &Innovation Center, Ningbo, China	

Prepared by: EMTEK (DONGGUAN) CO., LTD.Address: -1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology
Research and Development Base, No.9, Xincheng Avenue,
Songshanhu High-technology Industrial Development Zone,
Dongguan, Guangdong, China

Tel: (0755) 26954280 Fax: (0755) 26954282

Report Number:EDG2206290045E00101RDate(s) of Tests:July 01, 2022 to July 08, 2022Date of issue:July 08, 2022

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Manne Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Table of Contents

1 TEST RESULT CERTIFICATION	
2 EUT TECHNICAL DESCRIPTION	
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS 4.2 MEASUREMENT EQUIPMENT USED 4.3 DESCRIPTION OF TEST MODES 	7
5 FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES 5.2 EQUIPMENT 5.3 LABORATORY ACCREDITATIONS AND LISTINGS	9
6 TEST SYSTEM UNCERTAINTY	10
7 SETUP OF EQUIPMENT UNDER TEST	
 7.1 RADIO FREQUENCY TEST SETUP 1 7.2 RADIO FREQUENCY TEST SETUP 2 7.3 CONDUCTED EMISSION TEST SETUP 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 7.5 SUPPORT EQUIPMENT 	
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS	15
 8.1 Standard Applicable 8.2 EUT Pseudorandom Frequency Hopping Sequence 8.3 Equal Hopping Frequency Use 8.4 Frequency Hopping System 	
9 TEST REQUIREMENTS	
 9.1 20DB&99%BANDWIDTH 9.2 CARRIER FREQUENCY SEPARATION	
9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER	
9.6 CONDUCTED SUPRIOUS EMISSION 9.7 RADIATED SPURIOUS EMISSION 9.8 CONDUCTED EMISSION TEST	
9.9 ANTENNA APPLICATION	

 东莞市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK(Dongguan) Co., Ltd.

 dd: -182/F ...,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 congguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn

 congguan, Guangdong,China Http://www.emtek.com.cn



1 TEST RESULT CERTIFICATION

Applicant	:	Ningbo Cstar Imp & Exp CO., LTD
Address	:	Floor 4,Building E, No. 655-90,Qiming Road, Yinzhou Investment &Innovation Center, Ningbo, China
Manufacturer	:	Ningbo Cstar Imp & Exp CO., LTD
Address	:	Floor 4,Building E, No. 655-90,Qiming Road, Yinzhou Investment &Innovation Center, Ningbo, China
Factory		ShenZhen C-Star Electronic Tech. co., Ltd
Factory Address		ShenZhen C-Star Electronic Tech. co., Ltd 2, 3/F, building B, No. 2 Bada Industrial Park, Yongfu Road, Heping Community, Fuyong Town, Baoan District, Shenzhen
,	:	2, 3/F, building B, No. 2 Bada Industrial Park, Yongfu Road, Heping Community,
Address	:	2, 3/F, building B, No. 2 Bada Industrial Park, Yongfu Road, Heping Community, Fuyong Town, Baoan District, Shenzhen

Measurement Procedure Used:

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS			

The above equipment was tested by EMTEK (DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247.

The test results of this report relate only to the tested sample identified in this report

Date of Test :	July 01, 2022 to July 08, 2022
Prepared by :	Warren Deng
	Warren Deng /Editor
	Tim Vory
Reviewer :	V
	Tim Dong /Supervisor
Approve & Authorized Signer :	<u>Sam Lv / Manager</u>
Approve & Authorized Signer :	NONCOLAN COLLER

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Modified History

Version	Report No.	Revision Date	Summary
V1.0	EDG2206290045E00101R	/	Original Report



 东莞市信測科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ., Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description			
Product:	Waterproof Bluetooth Speaker			
Model Number:	SL479,CTEK062BK,25601			
Sample:	1#			
Data Rate:	1Mbps for GFSK modulation 2Mbps for π/4-DQPSK modulation 3Mbps for 8DPSK modulation			
Modulation:	GFSK, π/4-DQPSK, 8DPSK			
Operating Frequency Range(s) :	2402-2480MHz			
Number of Channels:	79 channels			
Transmit Power Max: -1.47 dBm				
Antenna Type:	PCB Antenna			
Antenna Gain: -0.58 dBi				
Power supply: DC 5.0V from Adapter 3.7V/1800mAh, 6.66Wh from battery				
Date of Received: July 01, 2022				
Temperature Range:	0°C ~ +40°C			

Note: for more details, please refer to the User's manual of the EUT.

 东宪市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.

 Add: -182F.,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base, No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn

 E-mail: project@emtek.com.cn



FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	RSS-247.5.1 RSS-Gen.6.7	Emission Bandwidth	PASS	
15.247(a)(1)	RSS-247.5.1	Carrier Frequency Separation	PASS	
15.247(a)(1)	RSS-247.5.1	Number of Hopping Frequencies	PASS	
15.247(a)(1)	RSS-247.5.1	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	RSS-247.5.4 RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emissions	PASS	
15.207	RSS-Gen 8.8	Conducted Emission	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
15.247 (a) (1)/g/h	-	Frequency Hopping System	PASS	

SUMMARY OF TEST RESULT 3

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2ABHA0109 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



4 **TEST METHODOLOGY**

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017) FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

For Spurious Emissions Test

Equipment	Manufacturer	Manufacturer Model No. Serial No.		Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101415	2022/5/19	1Year
Power Amplifier	HP	8447F	OPTH64	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Horn antenna	Schwarzbeck	BBHA9120D	1272	2022/5/22	1Year
Power Amplifier	LUNAR EM	LNA1G18-40	J1010000081	2022/5/19	1Year
Loop Antenna	Schwarzbeck	FMZB1513	1513-60	2022/05/22	2 Year
Signal Analyzer	R&S	FSV30	103039	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	2022/05/20	1 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	2022/6/21	1Year
Automatic Control Unit	Tonscend	JS0806-2	2118060480	2022/6/21	1Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	2022/6/21	1Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	2022/6/21	1Year
UP/DOWN-Converter	R&S	CMW-Z800A	100274	2022/6/21	1Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	2022/6/21	1Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	2022/6/21	1Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	2022/6/21	1 Year

东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-lechnology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for π /4-DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441		
1	2403	40	2442	76	2478
2	2404	41	2443	77	2479
				78	2480
Note: fc=2402MHz+(k-1)×1MHz k=1 to 79					

Test Frequency and channel for Bluetooth

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

 东寨市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (DONGGUAN) CO., LTD.

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	 Accredited by CNAS, 2020.08.27 The certificate is valid until 2024.07.05 The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2018 The Certificate Registration Number is L3150 Accredited by FCC Designation Number: CN1300 Test Firm Registration Number: 945551 Accredited by A2LA, April 05, 2021 The Certificate Registration Number is 4321.02
	The Certificate Registration Number is CN0109
Name of Firm	EMTEK (DONGGUAN) CO., LTD.
Site Location	: -1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Parameter	Measurement Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:


The EUT is placed on a turntable 0.8meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).



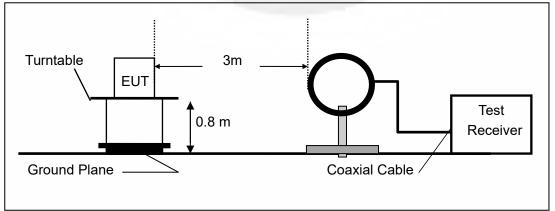


东莞市信源科技有限公司
地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn
EMTEK (Dongguan) Co., Ltd.
Add: -182/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,
Dongguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



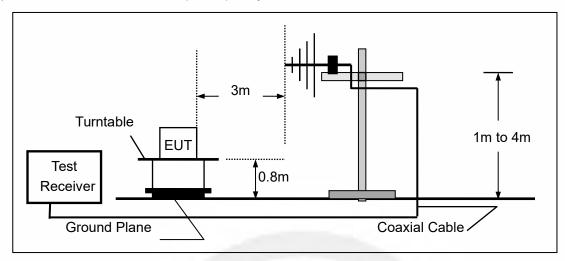

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

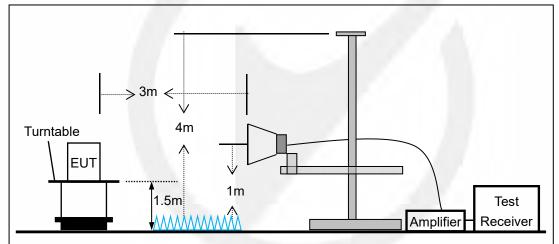




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

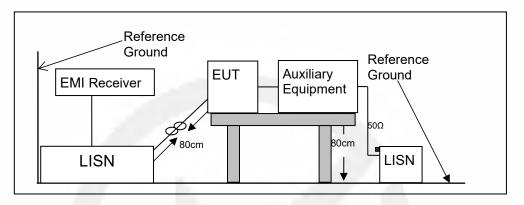


 家葉市信源科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong, China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

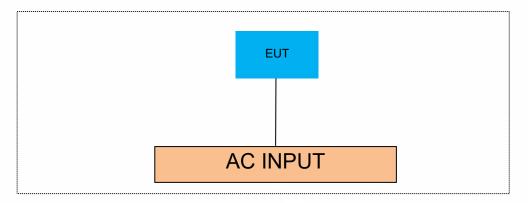

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
	1	/	1

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC cable	0.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	HUAWEI	1	1

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

 东莞市信測科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



FREQUENCY HOPPING SYSTEM REQUIREMENTS 8

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence


The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

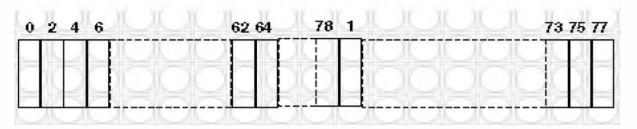

TEK (Dongguan) Co., Ltd.

东蒙市信调料转有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail; project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode: 35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

 东莞市信濃科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F , Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-lechnology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9 TEST REQUIREMENTS

9.1 20DB BANDWIDTH

9.1.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1 and RSS-Gen.6.7

9.1.2 Conformance Limit

No limit requirement.

9.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.1.4 Test Procedure

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
	Ant1	2402	0.939	2401.466	2402.405		
DH5	Ant1	2441	0.945	2440.463	2441.408		
	Ant1	2480	0.933	2479.466	2480.399		
	Ant1	2402	1.326	2401.259	2402.585		
2DH5	Ant1	2441	1.269	2440.292	2441.561		
	Ant1	2480	1.287	2479.289	2480.576		
	Ant1	2402	1.284	2401.277	2402.561		
3DH5	Ant1	2441	1.269	2440.277	2441.546		
	Ant1	2480	1.272	2479.277	2480.549		

20dB Emission Bandwidth



 东莞市信测科技有限公司

 地址: 广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址: Http://www.emtek.com.cn 邮箱: E-mail: project@emtek.com.cn


 EMTEK (Dongguan) Co., Ltd.

 Add: -182/F .,Building 2,Zone A,Zhongda Marine Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn

 E-mail: project@emtek.com.cn



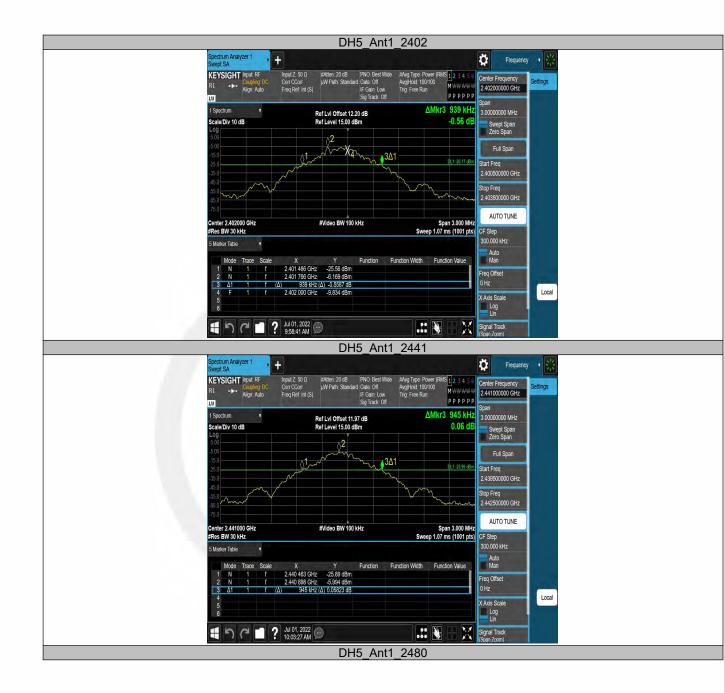

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn





 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn





 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn





 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Set the RBW =300kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: For Limit = 20dB bandwidth * 2/3

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F , Building 2, Zone A, Zhongda Manne Blotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-lechnology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
	Ant1	Hop_2402	0.84	≥0.632	PASS
DH5	Ant1	Hop_2441	0.795	≥0.632	PASS
	Ant1	Hop_2480	1.024	≥0.948	PASS
	Ant1	Hop_2402	1.32	≥0.886	PASS
2DH5	Ant1	Hop_2441	1.008	≥0.886	PASS
	Ant1	Hop_2480	0.958	≥0.886	PASS
	Ant1	Hop_2402	0.998	≥0.870	PASS
3DH5	Ant1	Hop_2441	0.994	≥0.870	PASS
	Ant1	Hop_2480	1.304	≥0.870	PASS



 东莞市信测科技有限公司

 地址: 广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址: Http://www.emtek.com.cn 邮箱: E-mail: project@emtek.com.cn


 EMTEK (Dongguan) Co., Ltd.

 Add: -182/F .,Building 2,Zone A,Zhongda Marine Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn

 E-mail: project@emtek.com.cn



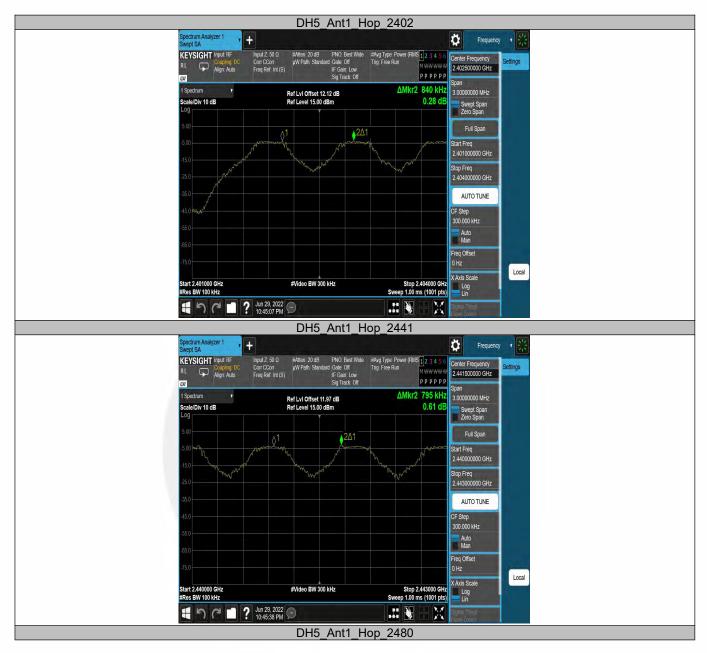

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Access to the World



东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层,第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn






 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn







东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.3.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.3.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2400-2483.5MHz) RBW = 300KHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Manne Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



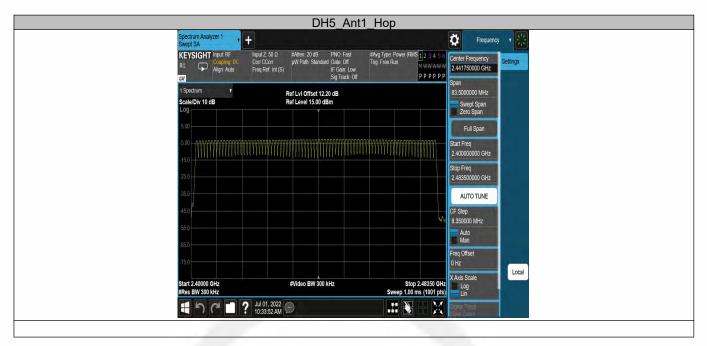



 东赛市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F ., Building 2, Zone A, Zhongda Manne Blotechnology Research and Development Base ,No.9, Xincheng Avenue, Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong, China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.4.2 **Conformance Limit**

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.4.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

9.4.5 **Test Results**

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar


Note: TotalHops(DH1)=(1600/2/79)*31.6 TotalHops(DH3)=(1600/4/79)*31.6 TotalHops(DH5)=(1600/6/79)*31.6 Dwell Time= BurstWidth* TotalHops

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
DH3	Ant1	Нор	1.62	160	0.259	≤0.4	PASS
DH5	Ant1	Нор	2.86	106.67	0.305	≤0.4	PASS
2DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
2DH3	Ant1	Нор	1.62	160	0.259	≤0.4	PASS
2DH5	Ant1	Нор	2.87	106.67	0.306	≤0.4	PASS
3DH1	Ant1	Нор	0.36	320	0.115	≤0.4	PASS
3DH3	Ant1	Нор	1.61	160	0.258	≤0.4	PASS
3DH5	Ant1	Нор	2.87	106.67	0.306	≤0.4	PASS

EMTEK (Dongguan) Co., Ltd.

东要市信调料持有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ...Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base .No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



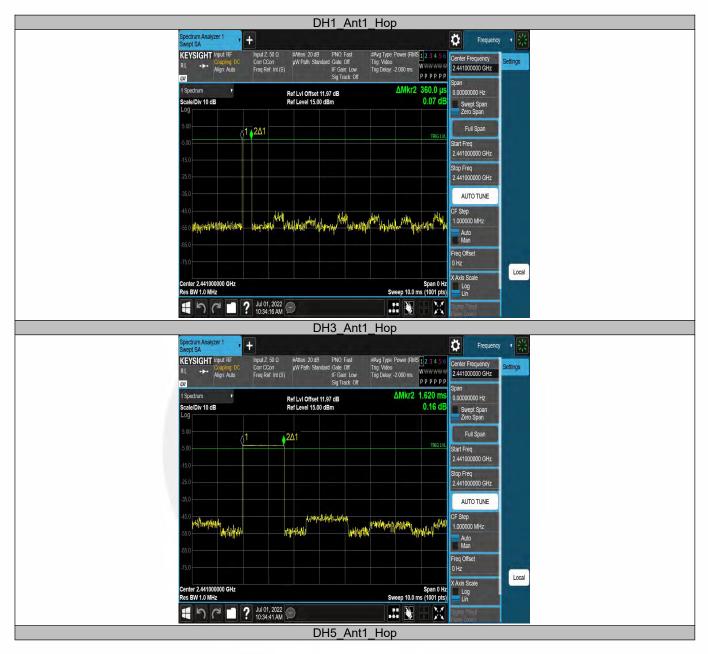

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn




Access to the World



东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地4区2号办公楼负一层,第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



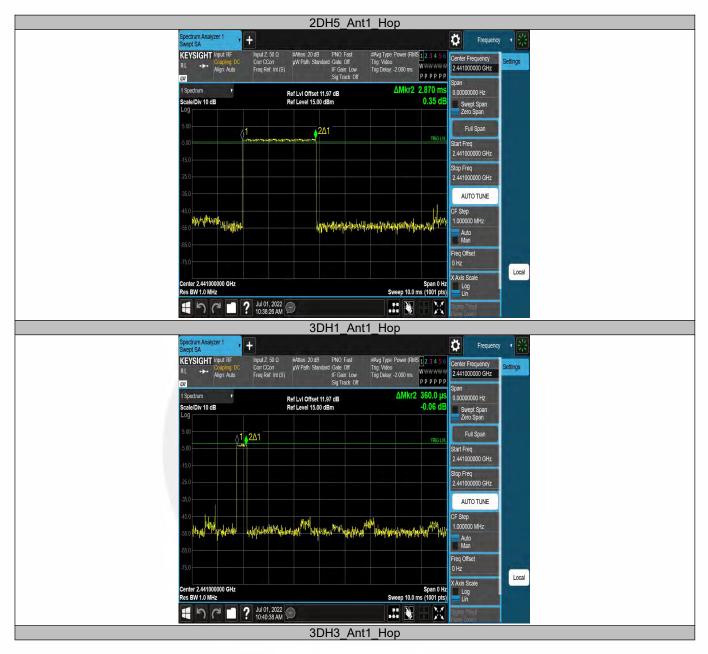

 东赛市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Access	to	the	World
--------	----	-----	-------

Spectrum Analyzer 1	+		Frequency	1 22
KEYSIGHT Input RF RL ++ Coupling DC Align Auto	Input Z 50 Ω #Atten: 20 dB PNO Fast Corr CCorr μW Path: Standard Gate Off Freq Ref. Int (S) Sig Track: Off Sig Track: Off	#Avg Type: Power (RMS 12 3 4 5 6 Trig: Video Trig Delay: -2.000 ms	Center Frequency Set 2.441000000 GHz	ettings
1 Spectrum • Scale/Div 10 dB Log	Ref LvI Offset 11.97 dB Ref Level 15.00 dBm	ΔMkr2 1.610 ms 0.28 dB	Span 0.00000000 Hz Swept Span Zero Span	
5.00 -5.00	2Δ1	TRUG LVL	Full Span Start Freq	
-15.0			2.441000000 GHz Stop Freq 2.441000000 GHz	
-35.0 -45.0 -55.0 <mark>1445-42/1442/1442/1442/1442/1442/1442/1442/1</mark>	h drawn trath by the strath here the		AUTO TUNE CF Step 1.000000 MHz	
-55.0			Auto Man Freq Offset 0 Hz	_
Center 2.441000000 GHz Res BW 1.0 MHz	64 01 0002	Span 0 Hz Sweep 10.0 ms (1001 pts)	X Axis Scale Log Lin	Local
45612) Jul 01, 2022 10:41:00 AM 3DH5_Ar	it1 Hop	signaí i rech ISaan Zoomi	
Spectrum Analyzer 1	ŧ		Frequency	· 22
KEYSIGHT Input RF RL ↔ Coupling: DC Align: Auto	Input Z 50 Ω #Atten: 20 dB PNO Fast Corr CCorr μW Path: Standard Gate: Off Freq Ref. Int (S) IF Gain: Low Sig Track: Off	#Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Video Trig Delay: -2.000 ms P P P P P P	Center Frequency 2.441000000 GHz Span	ettings
1 Spectrum v Scale/Div 10 dB Log	Ref Lvi Offset 11.97 dB Ref Level 15.00 dBm	ΔMkr2 2.870 ms 7.70 dB	0.00000000 Hz Swept Span Zero Span	
.5.00 .5.00	มหากร่างมากราชสารกรรรม มหากร่างมากราชสารกรรม	TRIG LVL	Full Span Start Freq 2.441000000 GHz	
-15.0			Stop Freq 2.441000000 GHz	
35.0 45.0 55.0 vertalski far og Hange	bol history observation	hispistarilleriskageters konfratsatation	AUTO TUNE CF Step 1.000000 MHz Auto	
-65.0			Man Freq Offset 0 Hz	Local
Center 2.441000000 GHz	Center 2.41100000 GHz Span 0 Hz Res BW 1.0 MHz Sweep 10.0 ms (1001 pts)		X Axis Scale Log Lin	LUUdi
Res Bay 1.0 WHZ				

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn EMTEK (Dongguan) Co., Ltd. Add: -1&2/F .,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.4 and RSS-Gen 6.12

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results

Temperature:	25° C		
Relative Humidity:	45%		
ATM Pressure:	1011 mbar		

Note: N/A

 东莞市信测科技有限公司
 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -182/F ,,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Test Mode	Antenna	Frequency[MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
	Ant1	2402	-3.22	≤20.97	PASS
DH5	Ant1	2441	-2.80	≤20.97	PASS
	Ant1	2480	-3.28	≤20.97	PASS
	Ant1	2402	-2.42	≤20.97	PASS
2DH5	Ant1	2441	-1.90	≤20.97	PASS
	Ant1	2480	-2.36	≤20.97	PASS
	Ant1	2402	-1.95	≤20.97	PASS
3DH5	Ant1	2441	-1.47	≤20.97	PASS
	Ant1	2480	-1.85	≤20.97	PASS



 东莞市信测科技有限公司

 地址: 广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址: Http://www.emtek.com.cn 邮箱: E-mail: project@emtek.com.cn


 EMTEK (Dongguan) Co., Ltd.

 Add: -182/F .,Building 2,Zone A,Zhongda Marine Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-lechnology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn E-mail: project@emtek.com.cn


 E-mail: project@emtek.com.cn



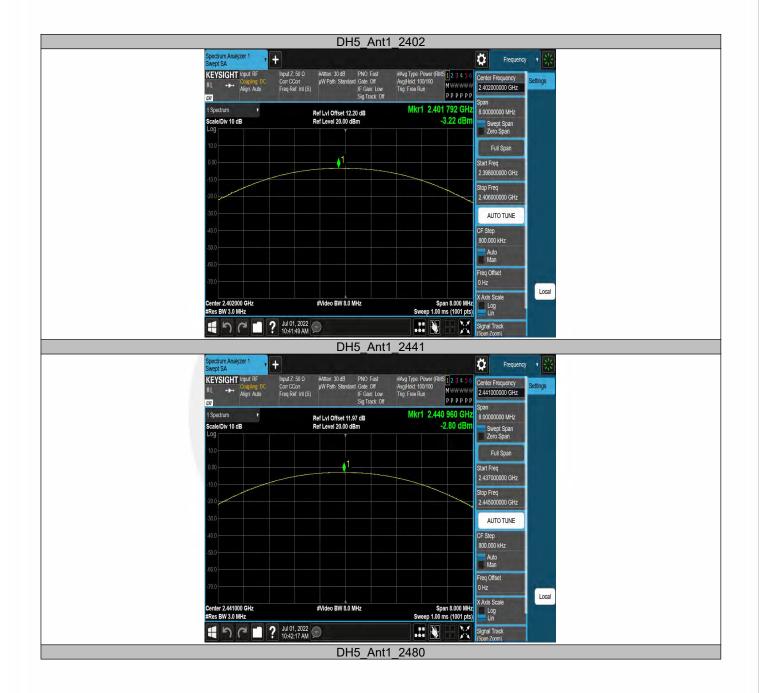




Access to the World

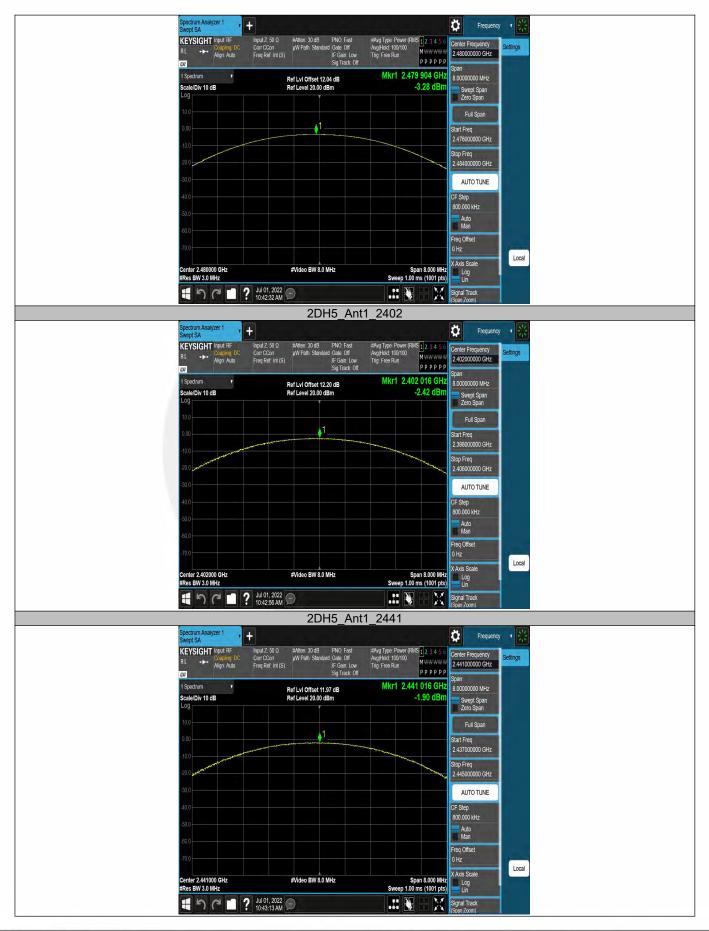




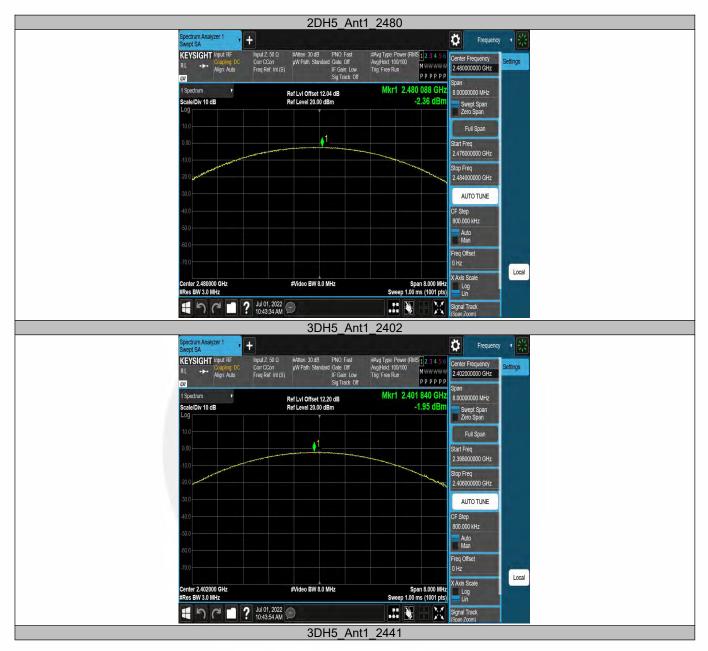



Access to the World

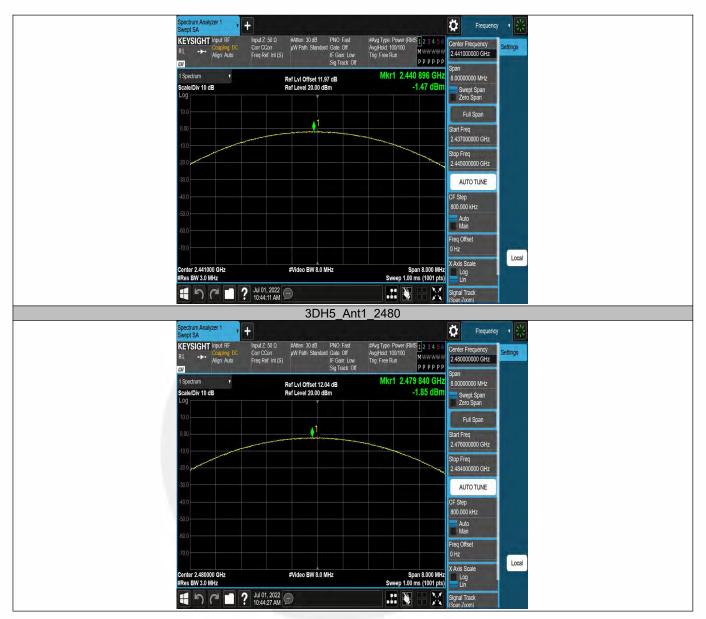



9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 **Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247 5.5

9.6.2 **Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.6.4 **Test Procedure**

The transmitter output (antenna port) was connected to the spectrum analyzer

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \ge 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW
$$\geq$$
 1% of the span=100kHz Set VBW \geq 3 x RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW ≥ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

EMTEK (Dongguan) Co., Ltd.



9.6.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
	Ant1	Low	2402	-4.21	-50.11	≤-24.21	PASS
DH5	Ant1	High	2480	-3.62	-55.04	≤-23.62	PASS
	Ant1	Low	Hop_2402	-5.02	-56.65	≤-25.02	PASS
	Ant1	High	Hop_2480	-4.13	-55.15	≤-24.13	PASS
2045	Ant1	Low	2402	-3.67	-51.03	≤-23.67	PASS
2005	2DH5 Ant1	High	2480	-3.66	-54.43	≤-23.66	PASS
3DH5	Ant1	Low	2402	-3.71	-49.69	≤-23.71	PASS
3003	Ant1	High	2480	-5.78	-54.95	≤-25.78	PASS

 东莞市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK(Dongguan) Co., Ltd.

 dd: -182/F ...,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,


 ponguan, Guangdong,China Http://www.emtek.com.cn

 E-mail: project@emtek.com.cn















	2DH5_Ant1_	High_2480		
Spectrum Analyzer 1 Swept SA	· +		Frequency 🔹	
KEYSIGHT Input RL →→ Align LVI	RF Input Z:50 Ω #Atten: 20 dB PNO Fast ngi BC Corr CCorr μW Path: Standard Gate: Off Auto Freq Ref. Int (S) Sig Track: Off	#Avg Type: Power (RMS 1 2 3 4 5 6 Avg Hold: 100/100 Trig: Free Run P P P P P	Center Frequency 2.51000000 GHz	
1 Spectrum Scale/Div 10 dB Log 5 00 	Ref Lvi Offset 12.04 dB Ref Level 15.00 dBm	Mkr4 2,499 84 GHz -54,43 dBm	Span 80.0000000 MHz Swept Span Zero Span Full Span	
25 0 35 0 45 0 55 0 45 0 56 0 45 0 56 0 45 0 56 0 45 0 56 0 45 0 56 0 45 0 56 0	2 		Start Freq 2.47000000 GHz Stop Freq 2.55000000 GHz AUTO TUNE	
Start 2.47000 GHz #Res BW 100 KHz 5 Marter Table 1 N 1 2 N 1 3 N 1	#Video BW 300 kHz	Stop 2.55000 GHz Sweep 3.00 ms (1001 pts) Function Width Function Value	CF Step 8.000000 MHz Auto Man Freq Offset 0 Hz	
	f 2.499 84 GHz -54.43 dBm	.:: 🖹 🗄 🗙	X Axis Scale Log Lin Signal Track (Span Zoom)	
Spectrum Analyzer 1	3DH5_Ant1_	Low_2402		
Swept SA KEYSIGHT Input RL →→ Align 201	T RF Input Z 50 Ω #Atten 20 dB PNO Fast grip DC Corr Corr Auto Freq Ref.Int.(S) ⊮W Path Stendard Gate Off ⊮F Gain Low Sig Track Off	#Avg Type Power (RMS 12 3 4 5 6 Avg Hold 100100 Trig: Free Run ррррр	Center Frequency Center Frequency Settings	
1 Spectrum Scale/Div 10 dB Log 5 00 5 00 5 00	Ref Lvi Offset 12.20 dB Ref Level 15.00 dBm	Mkr5 2.399 120 GHz -49.69 dBm	105.00000 MHz Swept Span Zero Span Full Span	
-25 0 -35 0 -45 0 -55 0 -44	tige all and a state of the sta	01 2371200	Start Freq 2.30000000 GHz Stop Freq 2.405000000 GHz	
Start 2.30000 GHz #Res BW 100 KHz 5 Marker Table	#Video BW 300 kHz	Stop 2.40500 GHz Sweep 3.87 ms (1001 pts)	AUTO TUNE CF Step 10.500000 MHz	
Mode Trace 1 N 1 2 N 1 3 N 1 4 N 1 5 N 1 6 1	f 2.401 745 GHz -3.710 dBm f 2.400 00 GHz -58.00 dBm f 2.890 000 GHz -58.20 dBm f 2.380 000 GHz -60.06 dBm f 2.398 120 GHz -40.69 dBm	Function Width Function Value	Auto Man Freq Offset 0 Hz X Avis Scale Log Lin	
- C	Jul 01, 2022 10:20:48 AM	# 🔡 - 🔀	Signal Track (Span Zoom)	
	3DH5_Ant1_	High_2480		






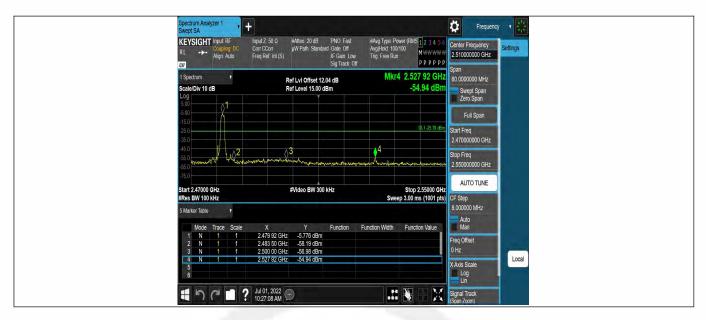




TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict								
			30~1000	-4.30	-4.30		PASS								
	Ant1	2402	1000~26500	-4.30	-60.15	≤-24.3	PASS								
			1000~26500	-4.30	-49.6	≤-24.3	PASS								
			30~1000	-3.81	-3.81		PASS								
DH5	Ant1	2441	1000~26500	-3.81	-59.4	≤-23.81	PASS								
			1000~26500	-3.81	-49.56	≤-23.81	PASS								
			30~1000	-3.79	-3.79		PASS								
	Ant1	2480	1000~26500	-3.79	-57.8	≤-23.79	PASS								
			1000~26500	-3.79	-48.27	≤-23.79	PASS								
			30~1000	-7.96	-7.96		PASS								
	Ant1	2402	1000~26500	-7.96	-57.64	≤-27.96	PASS								
	2DH5 Ant1 Ant1									1000~26500	-7.96	-49.34	≤-27.96	PASS	
			30~1000	-3.85	-3.85		PASS								
2DH5		Ant1 2441	1000~26500	-3.85	-59.54	≤-23.85	PASS								
			1000~26500	-3.85	-49.78	≤-23.85	PASS								
		Ant1	Ant1	Ant1		30~1000	-3.76	-3.76		PASS					
					Ant1	Ant1	Ant1	Ant1	Ant1	Ant1	Ant1	Ant1	2480	1000~26500	-3.76
			1000~26500	-3.76	-45.83	≤-23.76	PASS								
			30~1000	-7.17	-7.17		PASS								
	Ant1	2402	1000~26500	-7.17	-58.98	≤-27.17	PASS								
			1000~26500	-7.17	-49.2	≤-27.17	PASS								
			30~1000	-6.53	-6.53		PASS								
3DH5	Ant1	2441	1000~26500	-6.53	-58.25	≤-26.53	PASS								
			1000~26500	-6.53	-49.96	≤-26.53	PASS								
			30~1000	-4.72	-4.72		PASS								
	Ant1	2480	1000~26500	-4.72	-57.75	≤-24.72	PASS								
			1000~26500	-4.72	-47.07	≤-24.72	PASS								



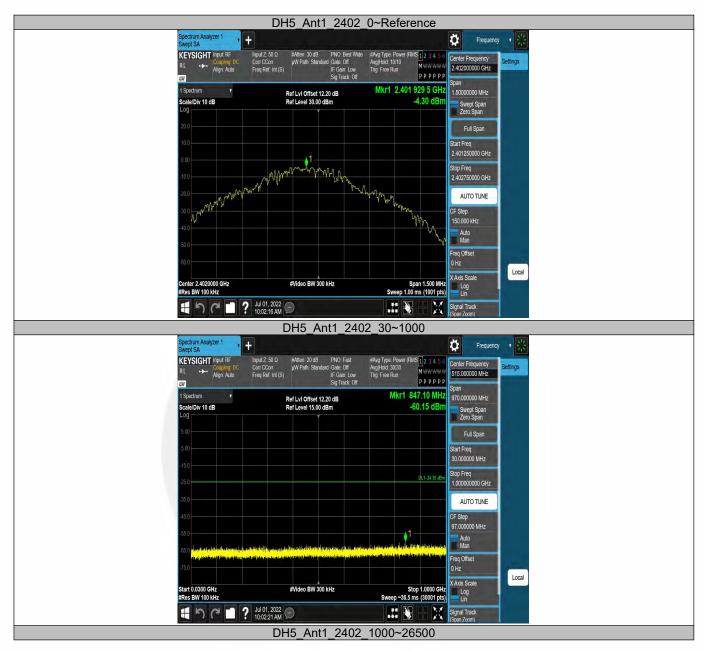





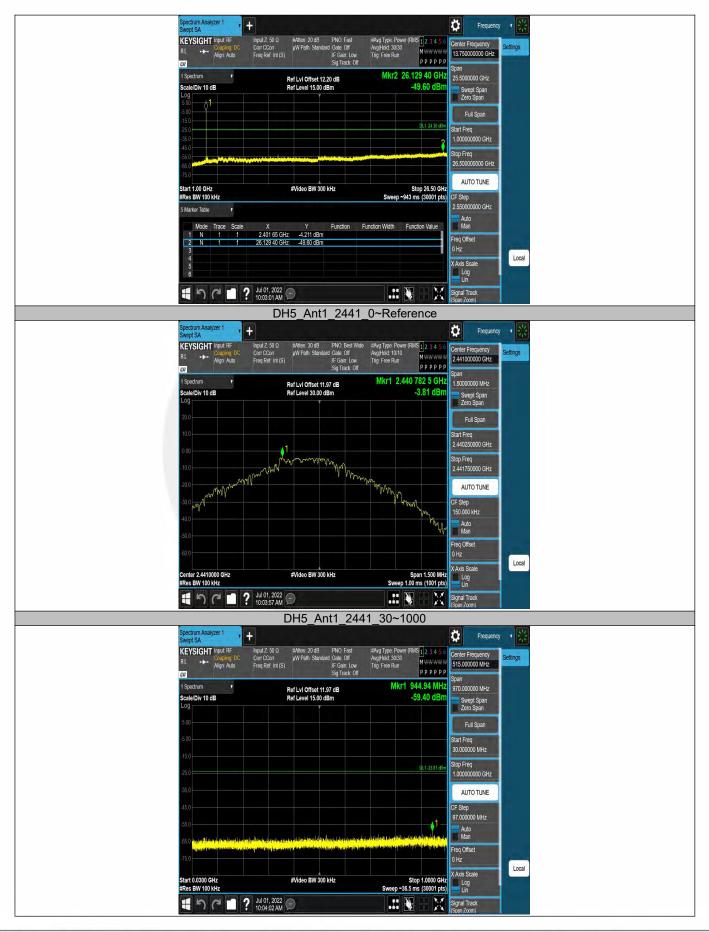





DH5_Ant1_2441_1000~26500 + Ö Frequency ctrum A pt SA KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Avg Type. Po Avg|Hold: 30/ Trig: Free Rur (RMS 1 2 3 4 #Atten: 20 dB µW Path: Sta Center Frequency M\#\#\#\# PPPPP ettings Align: Auto 13.750000000 GHz i⊦ Gain: Low Sig Track: Off LNI. Mkr2 26.185 50 GHz Spectrum Ref Lvi Offset 11.97 dB Ref Level 15.00 dBm 25.5000000 GHz -49.56 dE cale/Div 10 dB Swept Span Zero Span Full Span Start Freq 1.00000000 GHz Stop Freq 26.500000000 GHz AUTO TUNE Start 1.00 GHz #Res BW 100 kHz #Video BW 300 kHz Stop 26.50 GHz Sweep ~943 ms (30001 pts) CF Step 2.550000000 GHz Auto Man Mode Trace Scale Y -3.978 dBm -49.56 dBm Function Function Width Function Value X 2.440 75 GHz 26.185 50 GHz req Offse Local X Axis Scale Log Lin 1 つ ペ ロ ? Jul 01, 2022 の X Signal Track DH5 Ant1 2480 0~Reference pectrum Analyzer 1 wept SA Ö + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Atten: 30 dB µW Path: Stands PNO: Best Wide I Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (RMS 1 2 3 4 5 Avg|Hold: 10/10 Trig: Free Run KEYSIGHT Input RF Center Frequency 2.480000000 GHz Settings Align: Auto рррррр LNI Mkr1 2.479 775 0 GHz Spectrum Ref LvI Offset 12.04 dB Ref Level 30.00 dBm 1.50000000 MHz -3.79 dB ale/Div 10 dB Swept Span Zero Span Start Freq 2.479250000 GHz 1 mm Stop Freq 2.480750000 GHz " warden www. man and and an AUTO TUNE CF Step 150.000 kHz Auto Man Freq Offset Local X Axis Scale Center 2.4800000 GHz Res BW 100 kHz #Video BW 300 kHz Span 1.500 MHz Sweep 1.00 ms (1001 pts) Log Lin モッペロ? Jul 01, 2022 🗩 Signal Track DH5_Ant1_2480_30~1000




Access to the World

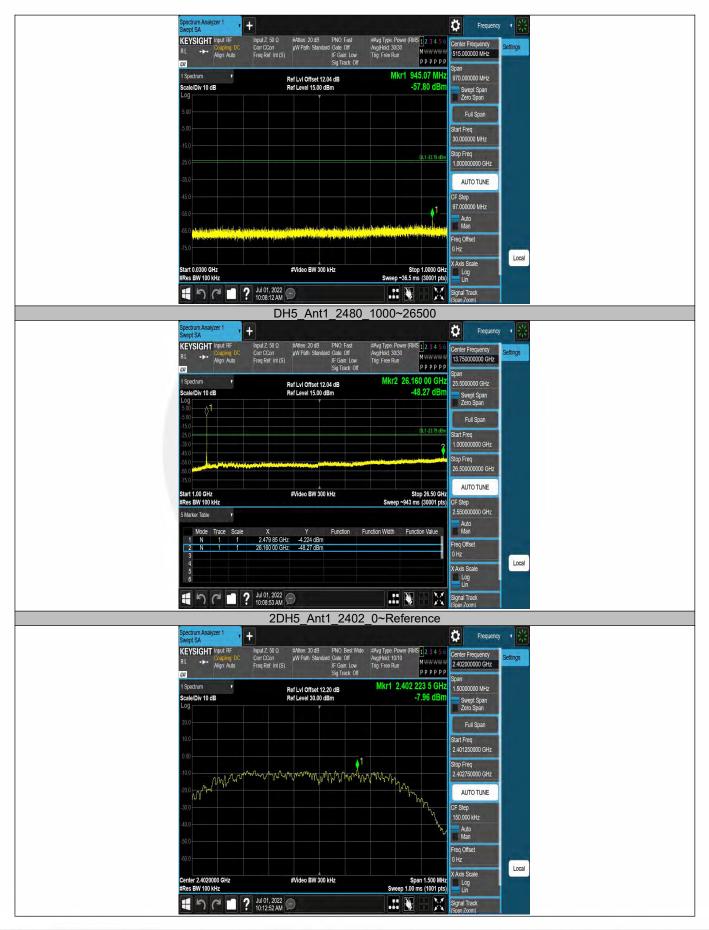



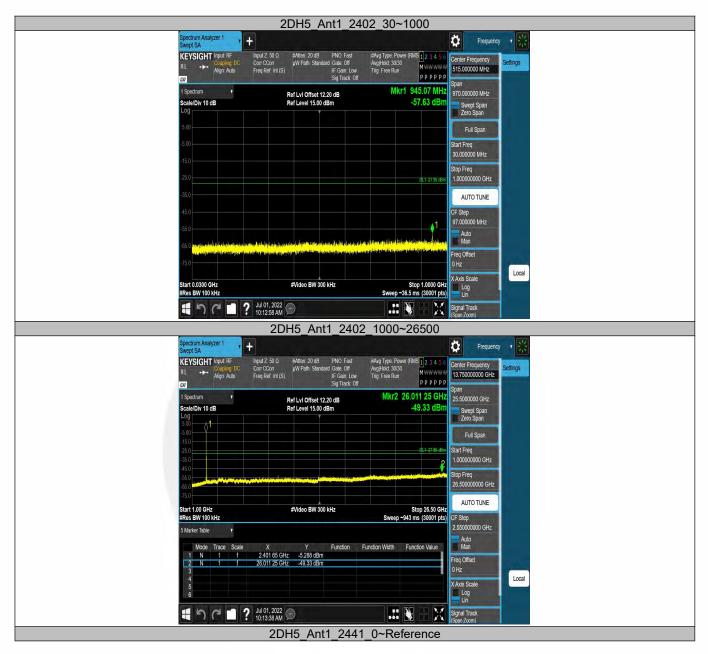










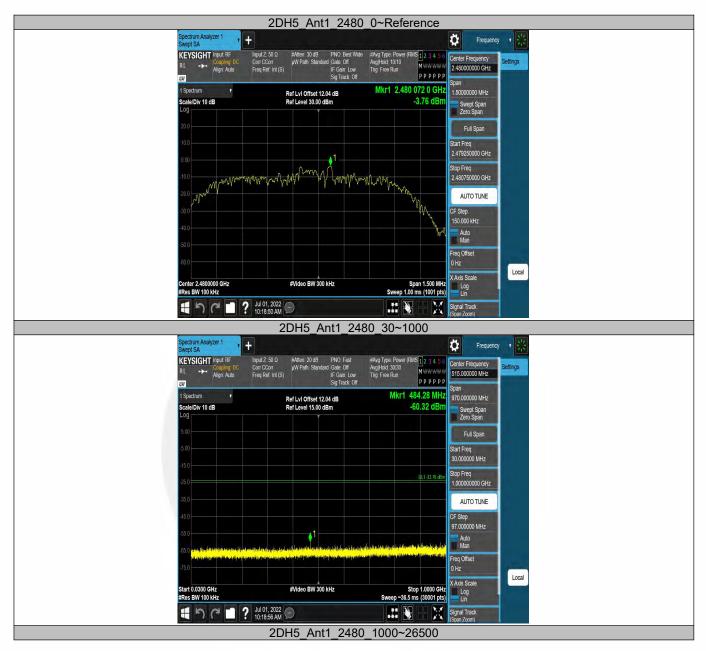



Access to the World





31	DH5_Ant1_2402	_1000~26500		
Spectrum Analyzer 1 +		and the second second	Frequency •	5/2 24
KEYSIGHT Input RF Input Z: 50 Ω RL ↔ Align: Auto Corr CCorr LWI ↓ ↓ Align: Auto Freq Ref: Int	µW Path Standard Gate: Off	#Avg Type: Power (RMS 1 2 3 4 5 6 Avg Hold: 30/30 Trig: Free Run P P	Center Frequency 13.750000000 GHz	ngs
1 Spectrum Scale/Div 10 dB Log 5.00 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Ref LvI Offset 12.20 dB Ref Level 15.00 dBm	Mkr2 26.141 30 GHz -49.20 dBm	Span 25.5000000 GHz Swept Span Zero Span	
150 250 350 450		й 1-27-17 аВт.	Full Span Start Freq 1.000000000 GHz Stop Freq	
85.0 75.0 Start 1.00 GHz #Res BW 100 KHz	#Video BW 300 kHz	Stop 26.50 GHz Sweep ~943 ms (30001 pts)	26.50000000 GHz AUTO TUNE CF Step 2.55000000 GHz	
5 Marker Table Mode Trace Scale X 1 N 1 f 2.40165 2 N 1 f 26.14130 3 20.14130	GHz -5.555 dBm	unction Width Function Value	Auto Man Freq Offset 0 Hz	
4 5 6 J JJ 01, 202 10:24:31 AJ	¹² 💬		X Axis Scale Log Lin Signal Track (Span Zoom)	Local
3[DH5_Ant1_2441	0~Reference		
Spectrum Analyzer 1			Frequency v	
KEYSIGHT Input RF Input Z: 50 Ω RL ↔ Align: Auto Corr CCorr LWI ↓ ↓ Align: Auto Freq Ref. Int.	µW Path. Standard Gate: Off	#Avg Type: Power (RMS 12 3 4 56 Avg Hold: 10/10 Trig: Free Run P P P P P P	Center Frequency 2.441000000 GHz	ngs
1 Spectrum Scale/Div 10 dB Log	Ref Lvi Offset 11.97 dB Ref Level 30.00 dBm	Mkr1 2.440 893 5 GHz -6.53 dBm	Span 1.50000000 MHz Swept Span Zero Span	
10.0	1		Full Span Start Freq 2.440250000 GHz	
-10.0 -20.0 Antwown of many property of the second	MANAMAMA	month	Stop Freq 2.441750000 GHz AUTO TUNE	
-30.0 -40.0 -50.0		Mondal	CF Step 150.000 kHz Auto Man	
-60.0 Center 2.4410000 GHz #Res BW 100 kHz	#Video BW 300 kHz	Span 1.500 MHz Sweep 1.00 ms (1001 pts)	X Axis Scale	Local
I D C I ? Jul 01, 202 10:25:26 Al	22 💬		Signal Track (Span Zoom)	
	3DH5_Ant1_244		H502012203(11)	



Access to the World





3DH5_Ant1_2480_30~1000 ectrum Ar ept SA + Ö Frequency KEYSIGHT Input RF Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) #Avg Type: Por Avg|Hold: 30/3 Trig: Free Run er (RMS 1 2 3 4 #Atten: 20 dB µW Path: Stand Center Frequency ettings MWWWWW Align: Auto 515.000000 MHz IF Gain: Low Sig Track: Off LNI. Mkr1 945.03 MHz 1 Spectrum Ref LvI Offset 12.04 dB Ref Level 15.00 dBm 970.000000 MHz -57.75 dB cale/Div 10 dB Swept Span Zero Span Full Span Start Freq 30.000000 MHz Stop Freq 1.000000000 GHz L1 -24.72 d AUTO TUNE CF Step 97.000000 MHz .↓1 Auto Man Freq Offse Local X Axis Scale Stop 1.0000 GHz Sweep ~36.5 ms (30001 pts) Start 0.0300 GHz #Res BW 100 kHz #Video BW 300 kHz Log Lin モッペロ? Jul 01, 2022 🗩 X Signal Track 3DH5 Ant1 2480 1000~26500 pectrum Analyzer 1 wept SA Ö + Frequency Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) PNO Fast d Gate: Off IF Gain: Low Sig Track: Off #Avg Type. Power (RMS 1 2 3 4 5 Avg|Hold: 30/30 Trig. Free Run KEYSIGHT Input RF #Atten: 20 dB µW Path: Stand Center Fred Center Frequency 13.750000000 GHz Settings Align: Auto PPPPPP UNI Mkr2 2.320 90 GHz Spectrum Ref LvI Offset 12.04 dB Ref Level 15.00 dBm 25.5000000 GHz -47.07 dE le/Div 10 dB Swept Span Zero Span -24 72 d Start Freq 1.000000000 GHz Stop Freq 26.50000000 GHz AUTO TUNE Start 1.00 GHz #Res BW 100 kHz #Video BW 300 kHz Stop 26.50 GHz Sweep ~943 ms (30001 pts) CF Step 2.550000000 GHz Marker Table Y Auto Man Function Function Width Function Value X Y 2.479 85 GHz -7.565 dBm 2.320 90 GHz -47.07 dBm Trace Scale req Offset Local X Axis Scale 6 Log Lin モッペロ? Jul 01, 2022 M Signal Trac



9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-Gen and RSS-247

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.	205, Restricted bands		
MHz MHz		MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

```
Span = wide enough to fully capture the emission being measured
```

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = auto



Detector function = peak Trace = max hold For Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	22° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Freq.	Ant.Pol.		Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK È	AV	PK	AV	PK	AV	

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor



Spurious Emission Above 1GHz (1GHz to 25GHz)

All the antenna (Antenna 1&2) and modes (GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1&2, GFSK) result recorded was report as below:

Test mode:	GFS	К	iency: Channel 0: 2402MHz				
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
8106	V	58.01	43.13	74	54	-15.99	-10.87
10078	V	58.42	43.51	74	54	-15.58	-10.49
15620	V	57.98	42.83	74	54	-16.02	-11.17
9024	Н	57.81	42.85	74	54	-16.19	-11.15
10724	Н	58.1	43.04	74	54	-15.90	-10.96
15654	Н	58.8	43.63	74	54	-15.20	-10.37

Channel 39: 2441MHz Test mode: **GFSK** Frequency:

Freq. Ant.F	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
6950	V	55.72	40.45	74	54	-18.28	-13.55
8140	V	58.12	43.34	74	54	-15.88	-10.66
14294	V	57.9	43.04	74	54	-16.10	-10.96
7766	Н	56.8	41.89	74	54	-17.20	-12.11
9942	Н	58.69	43.87	74	54	-15.31	-10.13
14362	Н	58.35	43.5	74	54	-15.65	-10.50

Test mode:

GFSK

Frequency:

Channel 78: 2480MHz

Freq.	Ant.Pol.	Emission Lev	el(dBuV/m)	Limit 3m	(dBuV/m)	Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
7120	V	56.42	41.58	74	54	-17.58	-12.42
9126	V	59.06	43.97	74	54	-14.94	-10.03
13886	V	58.64	43.45	74	54	-15.36	-10.55
8106	Н	58.08	43.34	74	54	-15.92	-10.66
11506	Н	57.17	42.33	74	54	-16.83	-11.67
13410	Н	59.46	44.58	74	54	-14.54	-9.42

Note:

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层。第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna (Antenna 1&2) and modes (GFSK, π /4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst (Antenna 1&2, GFSK, Hopping) result recorded was report as below:

Test mode: GFSK		Frequenc	cy: Ch	Channel 0: 2402MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2389.04	Н	47	74	32.51	54	
2389.36	V	45.87	74	31.79	54	

Test mode: GFSK		Frequenc	cy: Ch	Channel 78: 2480MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2483.764	Н	45.83	74	31.91	54	
2483.896	V	47.07	74	32.48	54	

Test mode:	GFSK	Frequenc	су: Но	pping	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2394.74	Н	50.56	74	36.16	54
2400.00	н	50.89	74	36.8	54
2483.50	Н	50.14	74	36.18	54
2400.00	V	50.84	74	37.2	54
2483.50	V	51.8	74	37.43	54
2490.50	V	49.95	74	36.69	54

Note:


(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.


(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



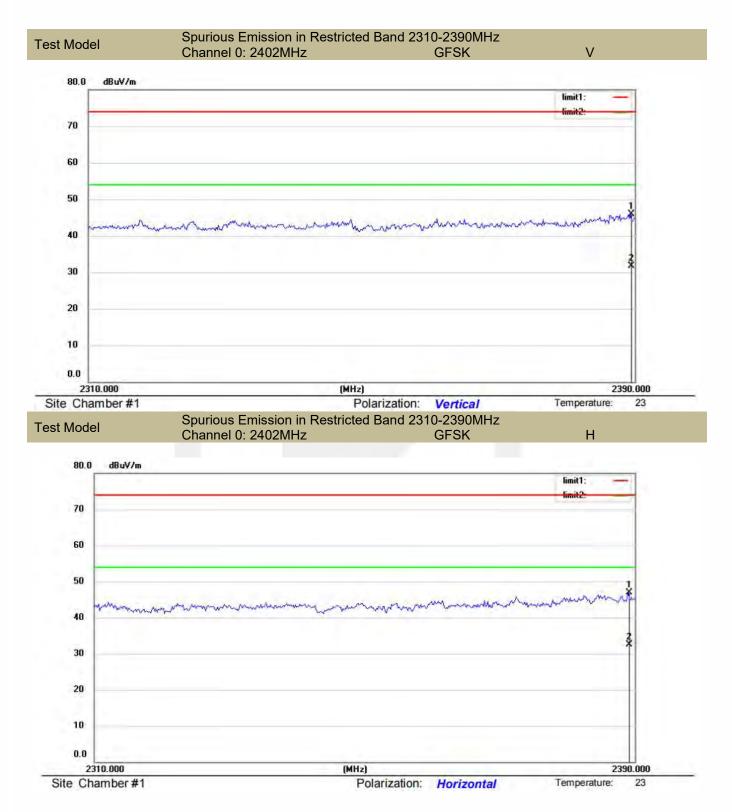



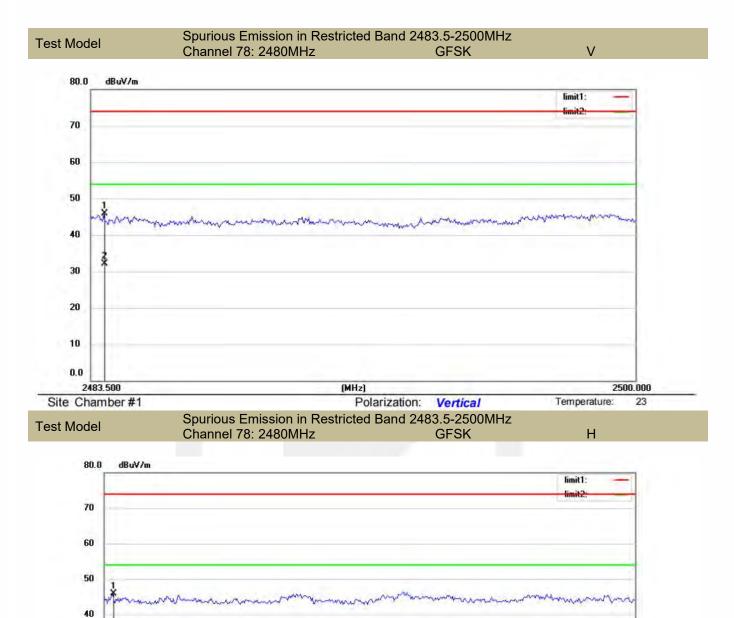

Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn

Report No. EDG2206290045E00101R

30

20

10

0.0

2483.500

Site Chamber #1

(MHz)

Polarization:

Horizontal


Ver.1.0

2500.000


23

Temperature:



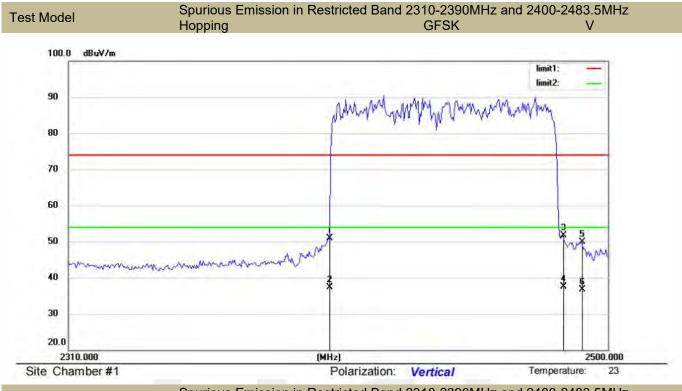




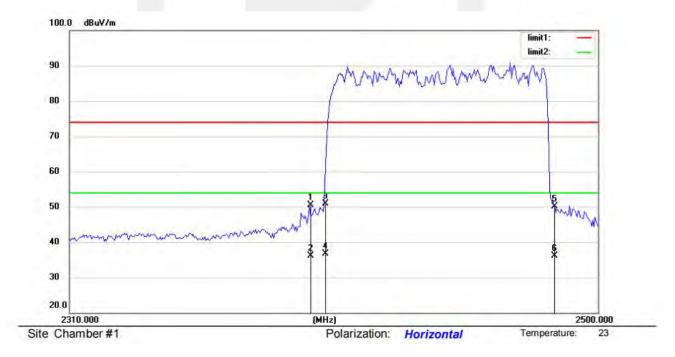



Spurious Emission below 1GHz (30MHz to 1GHz)

All the antenna(Antenna 1&2) and modes(GFSK, π/4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1&2, GFSK) result recorded was report as below:

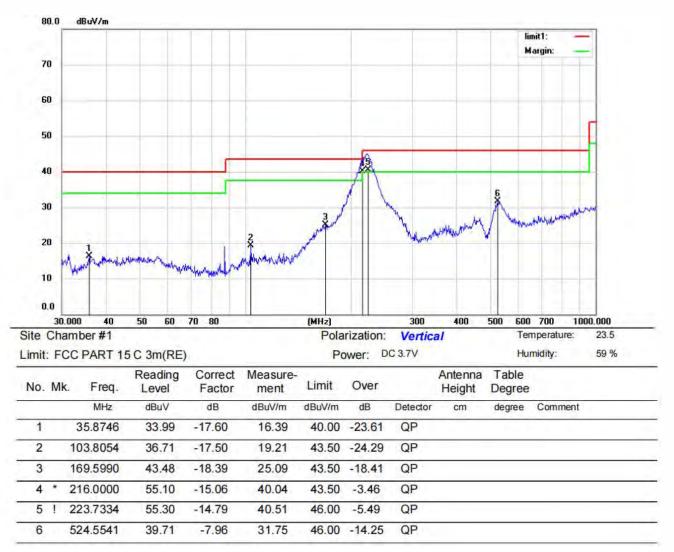


*:Maximum data x:Over limit !:over margin Operator: Ccyf

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



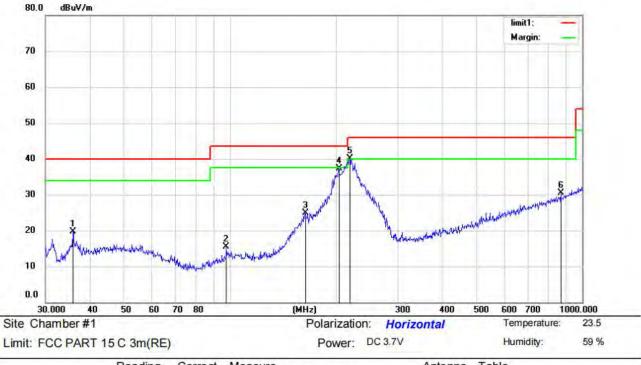

No. Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	35.8746	37.24	-17.60	19.64	40.00	-20.36	QP			
2	97.7983	33.38	-17.81	15.57	43.50	-27.93	QP			
3	163.1818	43.95	-18.95	25.00	43.50	-18.50	QP			
4	203.5228	52.88	-15.51	37.37	43.50	-6.13	QP			
5 *	218.3085	55.15	-14.98	40.17	46.00	-5.83	QP			
6	869.1302	32.92	-2.36	30.56	46.00	-15.44	QP			

*:Maximum data x:Over limit !:over margin

Operator: Ccyf



9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207 According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Conducted Emission Limit								
Frequency(MHz)	Quasi-peak	Average						
0.15-0.5	66-56	56-46						
0.5-5.0	56	46						
5.0-30.0	60	50						
Note: 1. The lower limit shall apply at	the transition frequencies	1						

Note: 1. The lower limit shall apply at the transition frequencies

 The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:



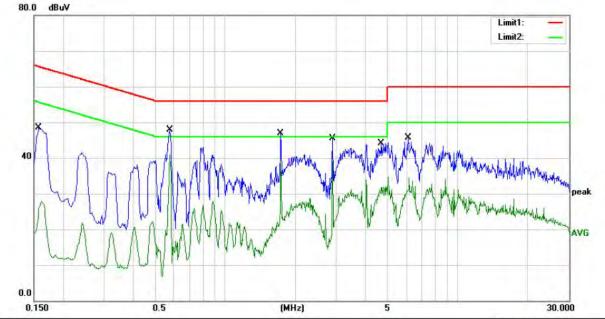

Site	site #	±1		2 I A		1.1	Phase	. N		Temperature:	25.8
Limit: FCC PART 15 C QP (CE)							Power: AC 230V/50Hz			Humidity:	52 %
No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over				
-		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment		
1		0.1580	37.89	10.52	48.41	65.57	-17.16	QP			
2		0.1580	17.28	10.52	27.80	55.57	-27.77	AVG			
3		0.5780	37.73	10.13	47.86	56.00	-8.14	QP			
4	*	0.5780	30.77	10.13	40.90	46.00	-5.10	AVG			
5	11.1	1.7340	36.77	10.11	46.88	56.00	-9.12	QP			
6	11.1.	1.7340	29.49	10.11	39.60	46.00	-6.40	AVG			
7		2.8900	35.48	10.09	45.57	56.00	-10.43	QP			
8		2.8900	28.98	10.09	39.07	46.00	-6.93	AVG			
9	1.1	4.6940	34.03	10.06	44.09	56.00	-11.91	QP			
10		4.6940	23.81	10.06	33.87	46.00	-12.13	AVG			
11		6.1180	35.67	10.05	45.72	60.00	-14.28	QP			
12	-	6.1180	24.48	10.05	34.53	50.00	-15.47	AVG			

*:Maximum data


x:Over limit !:over margin

Comment: Factor build in receiver. Operator:

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



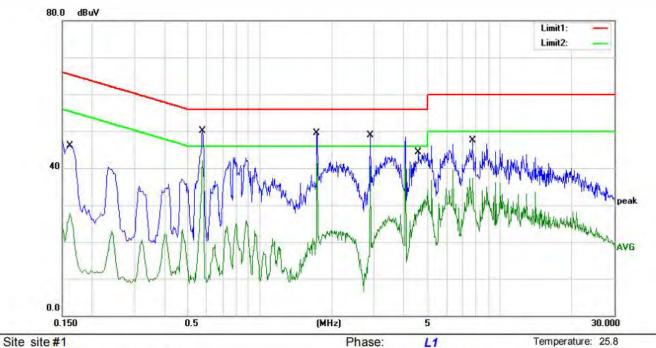

Limit: FCC PART 15 C_QP (CE)

Power: AC 230V/50Hz Humidity:

52 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1620	35.54	10.52	46.06	65.36	-19.30	QP	
2	1	0.1620	29.97	10.52	40.49	55.36	-14.87	AVG	
3		0.5780	39.99	10.13	50.12	56.00	-5.88	QP	
4		0.5780	30.92	10.13	41.05	46.00	-4.95	AVG	
5		1.7340	39.44	10.11	49.55	56.00	-6.45	QP	
6	*	1.7340	31.91	10.11	42.02	46.00	-3.98	AVG	
7		2.8940	38.86	10.09	48.95	56.00	-7.05	QP	
8		2.8940	31.87	10.09	41.96	46.00	-4.04	AVG	
9		4.5900	34.20	10.06	44.26	56.00	-11.74	QP	
10	-	4.5900	26.71	10.06	36.77	46.00	-9.23	AVG	
11		7.7060	37.41	10.05	47.46	60.00	-12.54	QP	
12		7.7060	27.35	10.05	37.40	50.00	-12.60	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

Operator:

EMTEK (Dongguan) Co., Ltd.

东赛市信测科技有限公司 地址;广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址;Http://www.emtek.com.cn 邮箱;E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.9 ANTENNA APPLICATION

9.9.1 **Antenna Requirement**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

9.9.2 Result

PASS.

Note:

- \checkmark Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	1	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

Detail of factor for radiated emission

*** End of Report ***

 东宪市信测科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.

 Add: -1&2F ...,Building 2,Zone A,Zhongda Manne Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China Http://www.emtek.com.cn

 E-mail: project@emtek.com.cn