



# DFS MEASUREMENT REPORT

## FCC PART 15 Subpart E / RSS-247 Issue 2

**FCC ID:** 2ABLK-844E-1

**IC:** 4009A-844E1

**APPLICANT:** Calix Inc.

**Application Type:** Certification

**Product:** WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB

**Model No.:** 844E-1

**Brand Name:** Calix

**FCC Classification:** Unlicensed National Information Infrastructure (NII)

**FCC Rule Part(s):** Part 15 Subpart E - 15.407 Section (h)(2)  
KDB 905462 D02v02, KDB 905462 D04v01

**Type of Device:**  Master Device  
 Client Device (No radar detection)  
 Client Device with radar detection

**Test Date:** August 19 ~ 31, 2018

Reviewed By: Sunny Sun  
( Sunny Sun )

Approved By: Robin Wu  
( Robin Wu )



The test results relate only to the samples tested.  
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462 D02v02. Test results reported herein relate only to the item(s) tested.  
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
1808RSU023-U1	Rev. 01	Initial Report	09-25-2018	Valid

# CONTENTS

Description	Page
<b>§2.1033 General Information</b> .....	<b>5</b>
<b>1. INTRODUCTION</b> .....	<b>6</b>
1.1. Scope .....	6
1.2. MRT Test Location .....	6
<b>2. PRODUCT INFORMATION</b> .....	<b>7</b>
2.1. Equipment Description .....	7
2.2. Description of Available Antennas .....	8
2.3. Description of Antenna RF Port.....	9
2.4. DFS Band Carrier Frequencies Operation .....	10
2.5. Test Mode .....	10
<b>3. DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS</b> .....	<b>11</b>
3.1. Applicability .....	11
3.2. DFS Devices Requirements .....	12
3.3. DFS Detection Threshold Values .....	13
3.4. Parameters of DFS Test Signals .....	14
3.5. Conducted Test Setup.....	17
<b>4. TEST EQUIPMENT CALIBRATION DATE</b> .....	<b>18</b>
<b>5. TEST RESULT</b> .....	<b>19</b>
5.1. Summary .....	19
5.2. Radar Waveform Calibration .....	20
5.2.1. Calibration Setup.....	20
5.2.2. Calibration Procedure.....	20
5.2.3. Calibration Result .....	21
5.2.4. Channel Loading Test Result .....	23
5.3. NII Detection Bandwidth Measurement.....	24
5.3.1. Test Limit .....	24
5.3.2. Test Procedure .....	24
5.3.3. Test Result.....	25
5.4. Initial Channel Availability Check Time Measurement.....	29
5.4.1. Test Limit .....	29
5.4.2. Test Procedure .....	29
5.4.3. Test Result.....	30
5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement ...	31

---

5.5.1. Test Limit .....	31
5.5.2. Test Procedure .....	31
5.5.3. Test Result.....	32
5.6. Radar Burst at the End of the Channel Availability Check Time Measurement .....	33
5.6.1. Test Limit .....	33
5.6.2. Test Procedure .....	33
5.6.3. Test Result.....	34
5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement.....	35
5.7.1. Test Limit .....	35
5.7.2. Test Procedure Used.....	35
5.7.3. Test Result.....	36
5.8. Statistical Performance Check Measurement .....	38
5.8.1. Test Limit .....	38
5.8.2. Test Procedure .....	38
5.8.3. Test Result.....	39
<b>6. CONCLUSION.....</b>	<b>126</b>
<b>Appendix A – Test Setup Photograph .....</b>	<b>127</b>
<b>Appendix B – EUT Photograph.....</b>	<b>128</b>

## §2.1033 General Information

<b>Applicant:</b>	Calix Inc.
<b>Applicant Address:</b>	2777 Orchard Pkwy, San Jose, CA 95131
<b>Manufacturer:</b>	Calix Inc.
<b>Manufacturer Address:</b>	2777 Orchard Pkwy, San Jose, CA 95131
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>FCC Registration No.:</b>	893164
<b>IC Registration No.:</b>	11384A-1
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB
Model No.:	844E-1
Brand Name:	Calix
Wi-Fi Specification:	802.11a/b/g/n/ac
Frequency Range	<p><b><u>2.4GHz:</u></b>            For 802.11b/g/n-HT20: 2412 ~ 2462 MHz            For 802.11n-HT40: 2422 ~ 2452 MHz</p> <p><b><u>5GHz:</u></b>            For 802.11a/n-HT20/ac-VHT20:5180~5320MHz, 5500~5720MHz,            5745~5825MHz            For 802.11n-HT40/ac-VHT40:5190~5310MHz, 5510~5710MHz,            5755~5795MHz            For 802.11ac-VHT80:5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz,            5775MHz</p>
Type of Modulation	802.11b: DSSS, 802.11a/g/n/ac: OFDM
Modulation Type	CCK, DQPSK, DBPSK for DSSS 16QAM, 64QAM, 256QAM, QPSK, BPSK for OFDM
Power-on cycle	<b>Requires 81.3 seconds to complete its power-on cycle</b>
Uniform Spreading (For DFS Frequency Band)	For the 5250-5350MHz, 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

## 2.2. Description of Available Antennas


Antenna Type	Frequency Band (GHz)	T <sub>x</sub> Paths	Directional Gain (dBi)	
			Beam Forming	CDD
PCB Antenna	5.2	4	8.04	8.04
	5.3	4	7.78	7.78
	5.6	4	8.38	8.38
	5.8	4	8.70	8.70

Note:

1. The EUT working on Beam Forming technology with 802.11n/ac mode, and 802.11a working on CDD mode.
2. Correlated signals include, but are not limited to, signals transmitted in any of the following modes:
  - Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).
3. Unequal antenna gains, with equal transmit powers. For antenna gains given by  $G_1, G_2, \dots, G_N$  dBi
  - transmit signals are correlated, then
  - Directional gain =  $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}]$  dBi [Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]



### 2.3. Description of Antenna RF Port

Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1
				

## 2.4. DFS Band Carrier Frequencies Operation

### 802.11 a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

### 802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--

### 802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--

## 2.5. Test Mode

Test Mode	Mode 1: Communication with Notebook
-----------	-------------------------------------

### 3. DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS

#### 3.1. Applicability

The following table from FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

**Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel**

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Table 3-2: Applicability of DFS Requirements during normal operation**

### 3.2. DFS Devices Requirements

**Per FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:**

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

**Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.**

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Table 3-3: DFS Response Requirements**

### 3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring. These detection thresholds are listed in the following table.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

**Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection**

### 3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

**Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6	$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

**Table 3-5: Parameters for Short Pulse Radar Waveforms**

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

**Table 3-6: Pulse Repetition Intervals Values for Test A**

### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 - 100	5 - 20	1000 - 2000	1 - 3	8 - 20	80%	30

**Table 3-7: Parameters for Long Pulse Radar Waveforms**

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

### Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

**Table 3-8: Parameters for Frequency Hopping Radar Waveforms**


For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.



### 3.5. Conducted Test Setup

The FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

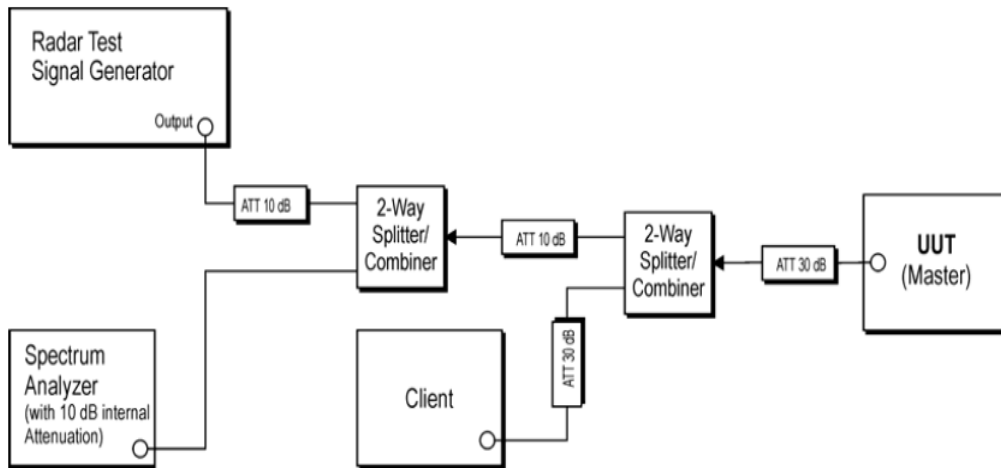

**Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters**

#### 4. TEST EQUIPMENT CALIBRATION DATE

Dynamic Frequency Selection (DFS) - TR4

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2019/04/20
Vector Signal Generator	Agilent	E4438C	MRTSUE06026	1 year	2018/12/08
Thermohygrometer	Testo	608-H1	MRTSUE06222	1 year	2018/11/21

Client Information

Instrument	Manufacturer	Type No.
Wireless Network Adapter	Intel	7260HMW

Software	Version	Manufacturer	Function
Pulse Building	N/A	Agilent	Radar Signal Generation Software
DFS Tool	V 6.9.2	Agilent	DFS Test Software

## 5. TEST RESULT

### 5.1. Summary


**Product Name:** WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB  
**FCC ID:** 2ABLK-844E-1  
**IC:** 4009A-844E1

Parameter	Limit	Test Result	Reference
NII Detection Bandwidth Measurement	Refer Table 3-3	Pass	Section 5.4
Initial Channel Availability Check Time	Refer Table 3-3	Pass	Section 5.5
Radar Burst at the Beginning of the Channel Availability Check Time	Refer Table 3-3	Pass	Section 5.6
Radar Burst at the End of the Channel Availability Check Time	Refer Table 3-3	Pass	Section 5.7
In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time	Refer Table 3-3	Pass	Section 5.8
Non-Occupancy Period	Refer Table 3-3	Pass	Section 5.8
Statistical Performance Check	Refer Table 3-3	Pass	Section 5.9

## 5.2. Radar Waveform Calibration

### 5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

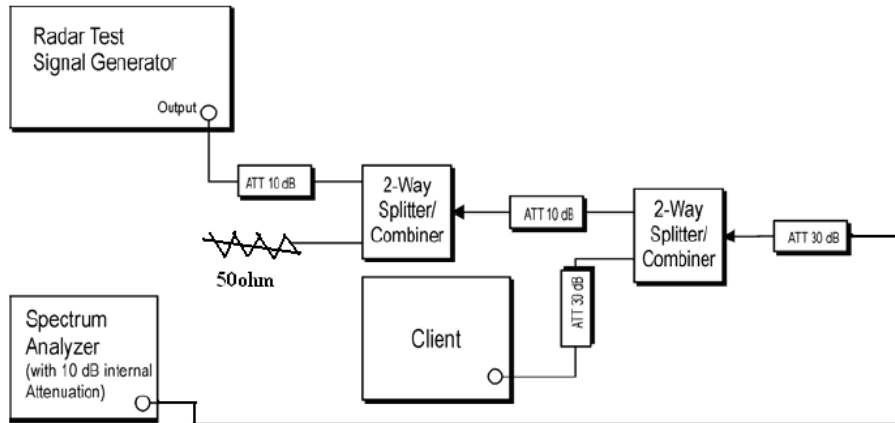


**Figure 3-2: Conducted Test Setup**


### 5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is  $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$  that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

### 5.2.3. Cablibration Result


Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	Radar Waveform Calibration		

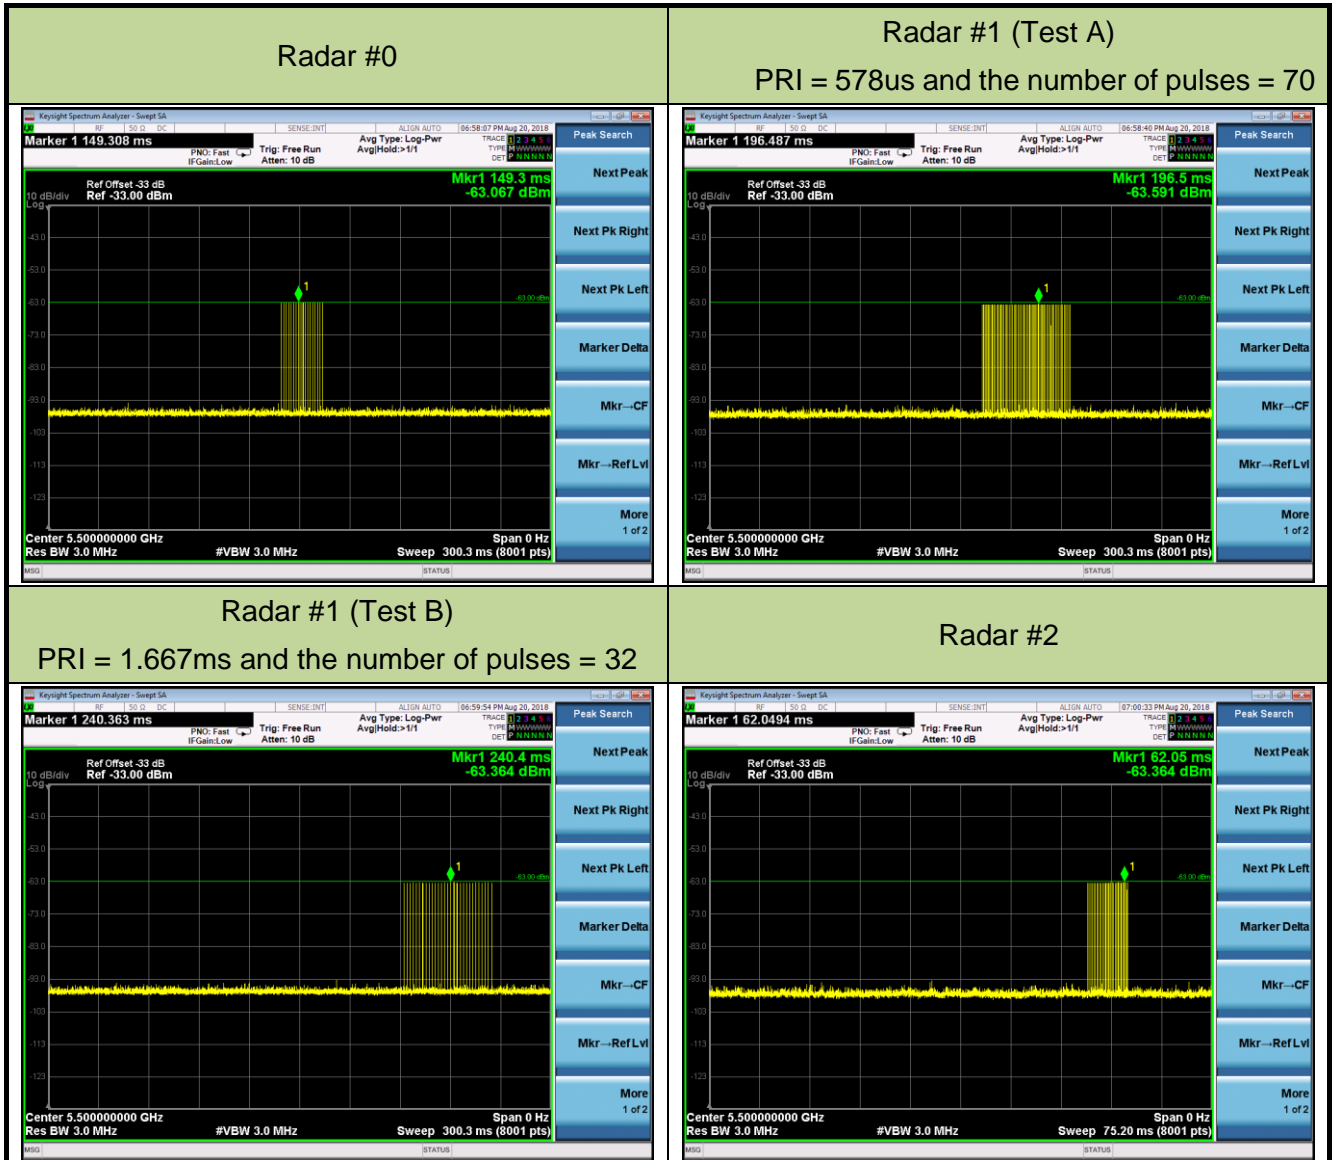

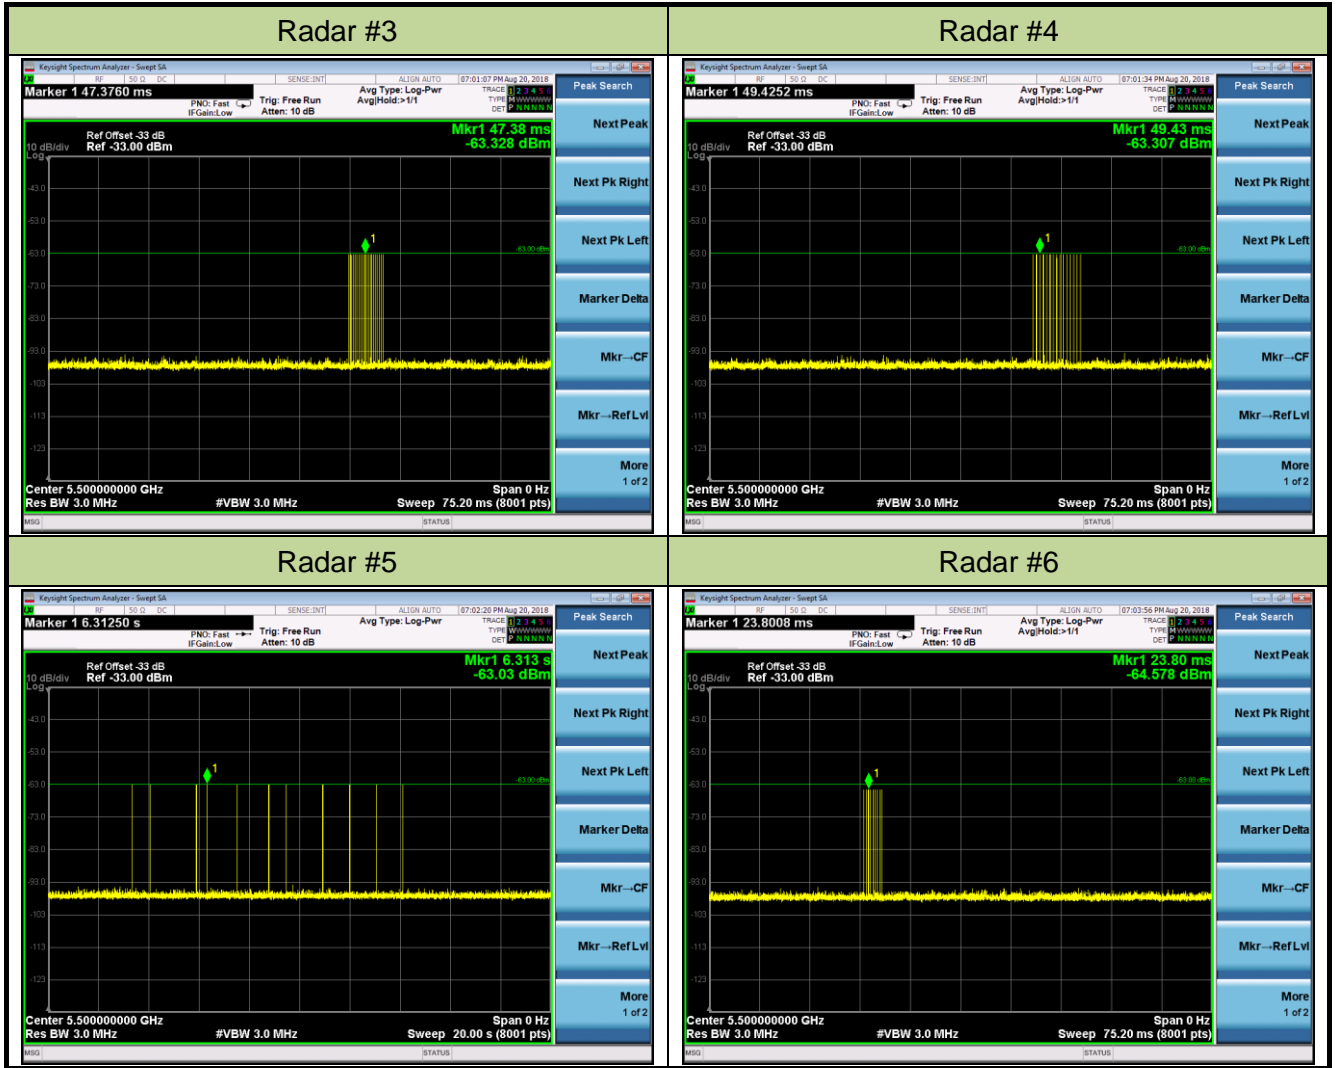

### 5.2.4. Channel Loading Test Result

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	Channel Loading		

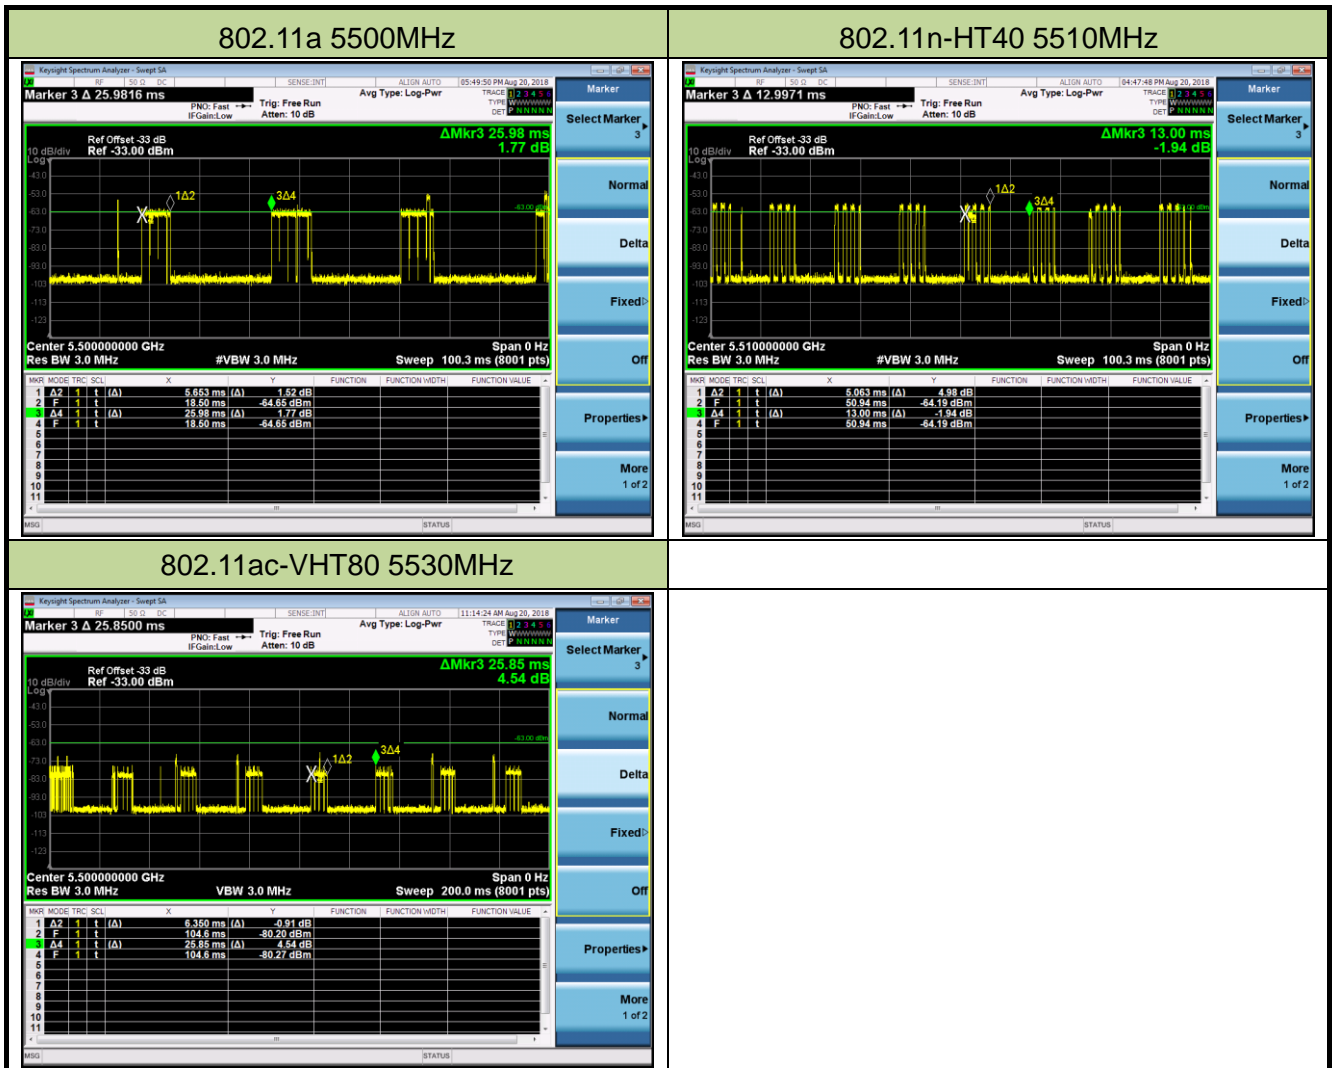

Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11a	5500 MHz	21.76%	≥ 17%	Pass
802.11n-HT40	5510 MHz	38.95%	≥ 17%	Pass
802.11ac-VHT80	5530 MHz	24.56%	≥ 17%	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device. Packet ratio = Time On / (Time On + Off Time).

### 5.3. NII Detection Bandwidth Measurement

#### 5.3.1. Test Limit

Minimum 100% of the NII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent.

Measurements are performed with no data traffic.

#### 5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as FH) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above FH is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as FL) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below FL is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows:  $U\text{-NII Detection Bandwidth} = FH - FL$
8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.



**5.3.3. Test Result**

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/27
Test Item	Detection Bandwidth (802.11a mode – 5500MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0%
5491 FL	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509 FH	1	1	1	1	1	1	1	1	1	1	100%
5510	0	0	0	0	0	0	0	0	0	0	0%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5500MHz. The 99% channel bandwidth is 16.82MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5309MHz - 5291MHz = 18MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 16.82MHz x 100% = 16.82MHz.

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/27
Test Item	Detection Bandwidth (802.11n-HT40 mode – 5510MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0%
5491	0	0	0	0	0	0	0	0	0	0	0%
5492 FL	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5526	1	1	1	1	1	1	1	1	1	1	100%
5527	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	1	1	1	1	1	1	1	1	100%
5529 FH	1	1	1	1	1	1	1	1	1	1	100%
5530	0	0	0	0	0	0	0	0	0	0	0%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5510MHz. The 99% channel bandwidth is 36.44MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5329MHz - 5292MHz = 37MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 36.444MHz x 100% = 36.44MHz.

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/28
Test Item	Detection Bandwidth (802.11ac-VHT80 mode – 5530MHz)		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	0	0	0	0	0	0	0	0	0	0%
5491 FL	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5545	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5555	1	1	1	1	1	1	1	1	1	1	100%
5560	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	1	1	1	1	100%
5566	1	1	1	1	1	1	1	1	1	1	100%
5567	1	1	1	1	1	1	1	1	1	1	100%
5568	1	1	1	1	1	1	1	1	1	1	100%
5569 FH	1	1	1	1	1	1	1	1	1	1	100%
5570	0	0	0	0	0	0	0	0	0	0	0%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530MHz. The 99% channel bandwidth is 75.42MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5329MHz - 5251MHz = 78MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz):  $75.42\text{MHz} \times 100\% = 75.42\text{MHz}$ .

## **5.4. Initial Channel Availability Check Time Measurement**

### **5.4.1. Test Limit**


The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute on the intended operating frequency.

### **5.4.2. Test Procedure**

1. The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
2. The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
3. Confirm that the EUT initiates transmission on the channel. Measurement system showing its nominal noise floor is marker1.

**5.4.3. Test Result**

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	Initial Channel Availability Check Time (802.11a mode – 5500MHz)		

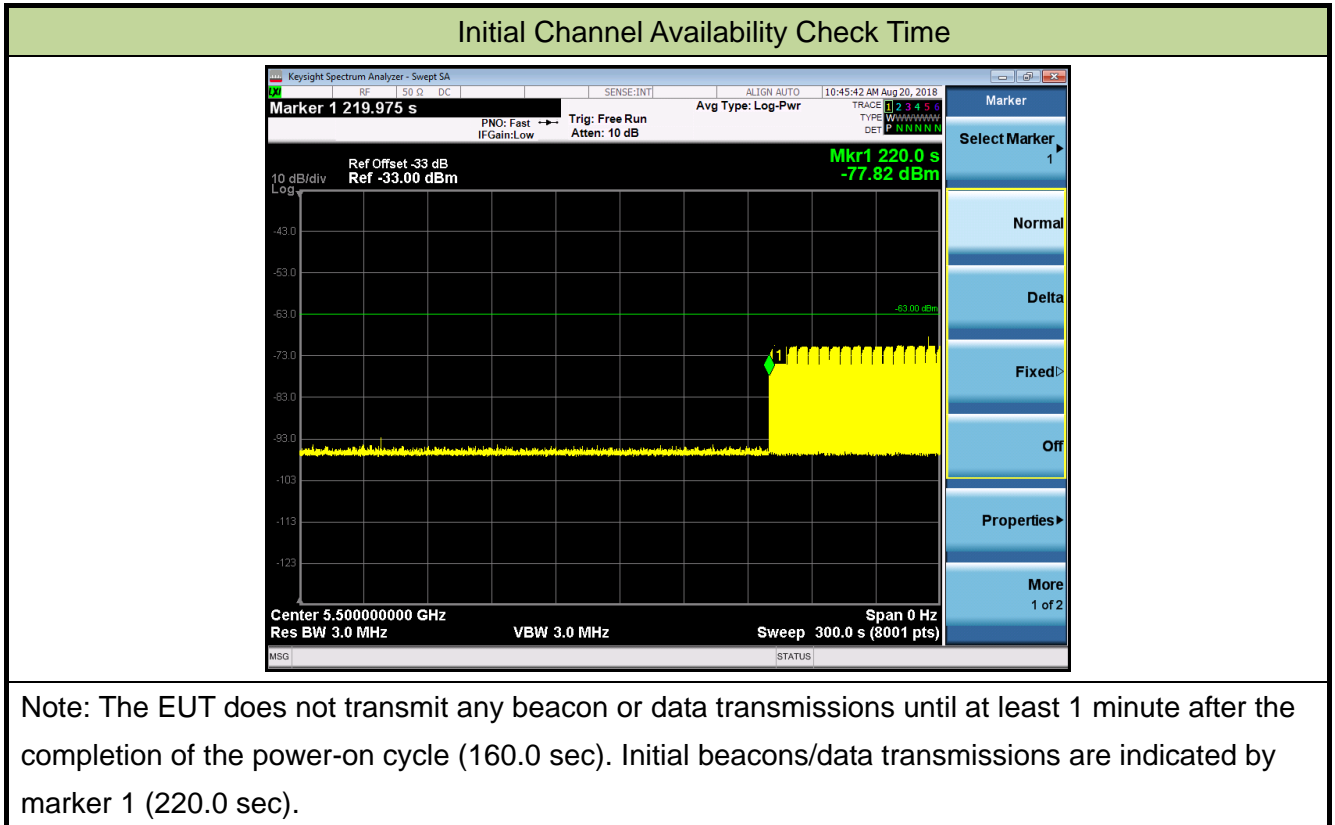

## **5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement**

### **5.5.1. Test Limit**


In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

### **5.5.2. Test Procedure**

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is in completion power-up cycle (from T0 to T1). T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.5.3. Test Result

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	Beginning of the Channel Availability Check Time (802.11a mode – 5500MHz)		

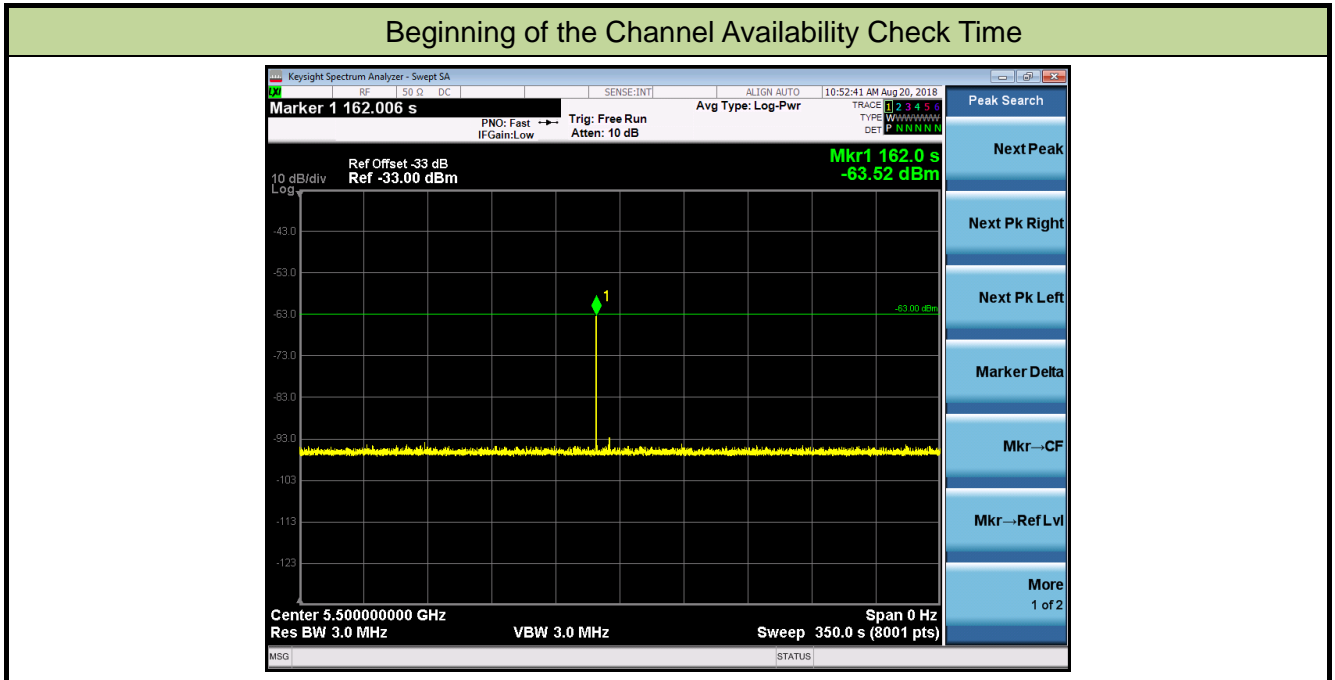



## **5.6. Radar Burst at the End of the Channel Availability Check Time Measurement**

### **5.6.1. Test Limit**


In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

### **5.6.2. Test Procedure**

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1+ 54 seconds.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

**5.6.3. Test Result**

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	End of the Channel Availability Check Time (802.11a mode – 5500MHz)		

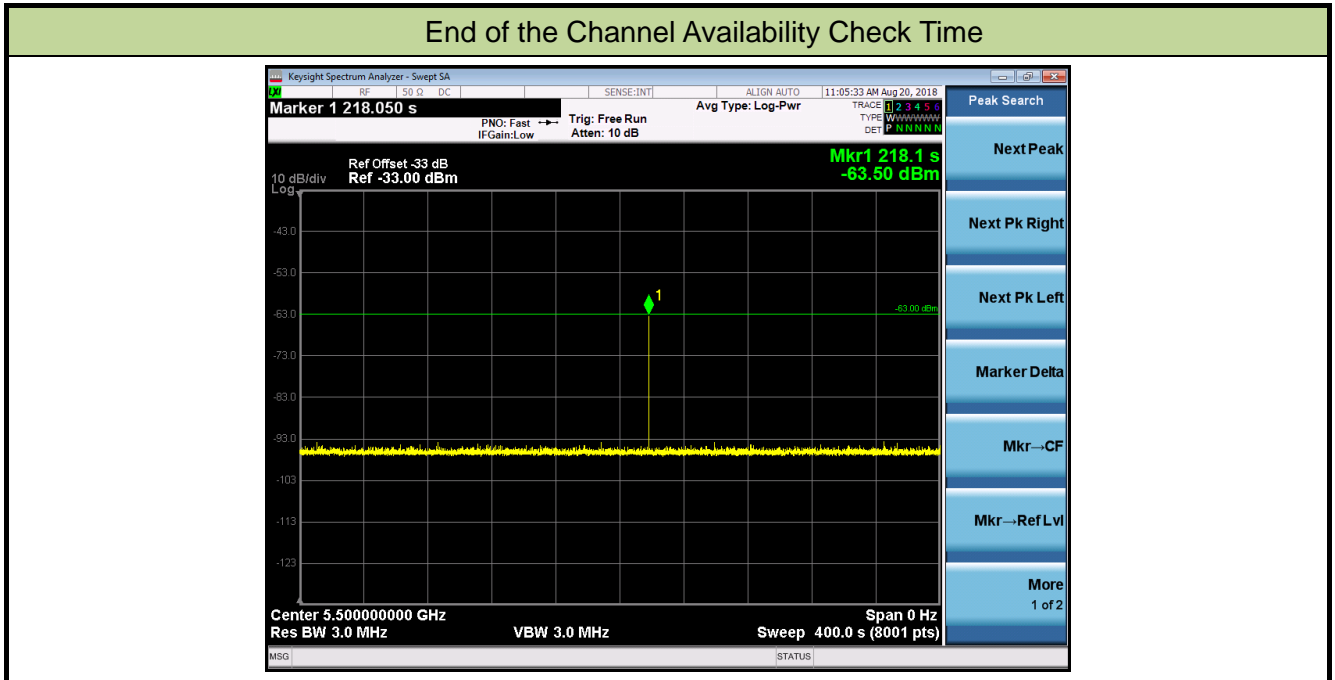

## **5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement**

### **5.7.1. Test Limit**

The EUT has In-Service Monitoring function to continuously monitor the radar signals. If the radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260ms, consisting of data signals and the aggregate of control signals, by a U-NII device during the Channel Move Time. The Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.


### **5.7.2. Test Procedure Used**

1. The test should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0.
2. When the radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Master Device will associate with the Client Device at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
3. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time).
4. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (1.5ms) = S (12 \text{ sec}) / B (8000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C = N \times Dwell$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and Dwell is the dwell time per bin.
5. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.

### 5.7.3. Test Result

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/20
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11ac-VHT80 mode – 5530MHz)		

#### Channel Move Time and Channel Closing Transmission Time

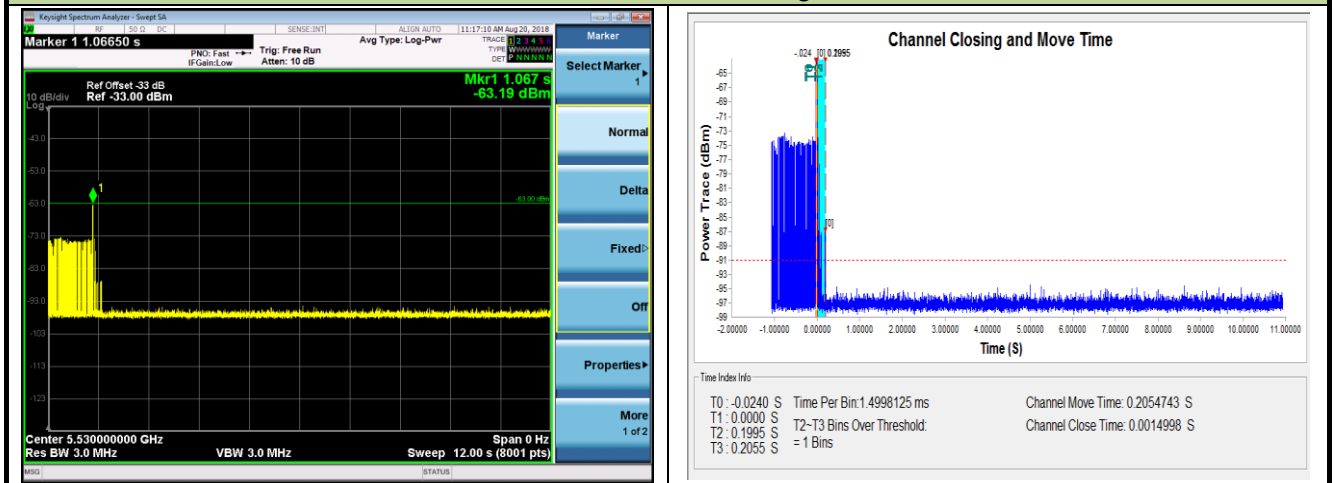

#### Non-Occupancy Period



Parameter	Test Result	Limit
	Type 0	
Channel Move Time (s)	0.205s	<10s
Channel Closing Transmission Time (ms) (Note)	1.5ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30 min
<p>Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>		

## 5.8. Statistical Performance Check Measurement

### 5.8.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

Radar Type	Minimum Number of Trails	Detection Probability
0	30	Pd > 60%
1	30(15 of test A and 15 of test B)	Pd > 60%
2	30	Pd > 60%
3	30	Pd > 60%
4	30	Pd > 60%
Aggregate (Radar Types 1-4)	120	Pd > 80%
5	30	Pd > 80%
6	30	Pd > 70%

Note: The percentage of successful detection is calculated by:  
 $(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar}$   
 Waveform In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:  $(Pd1 + Pd2 + Pd3 + Pd4) / 4$ .

### 5.8.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table.

### 5.8.3. Test Result

Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/28
Test Item	Radar Statistical Performance Check (802.11a mode – 5500MHz)		

#### Radar Type 1 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	1	798	67	1
2	5491	1	858	62	1
3	5491	1	938	57	1
4	5491	1	738	72	1
5	5491	1	718	74	1
6	5491	1	598	89	1
7	5491	1	578	92	1
8	5491	1	838	63	1
9	5491	1	518	102	1
10	5491	1	638	83	1
11	5500	1	878	61	1
12	5500	1	818	65	1
13	5500	1	758	70	1
14	5500	1	778	68	1
15	5500	1	618	86	1
16	5500	1	1030	52	1
17	5500	1	776	69	1
18	5500	1	1665	32	1
19	5500	1	2419	22	1
20	5500	1	2906	19	1
21	5509	1	2047	26	1
22	5509	1	1410	38	1
23	5509	1	1006	53	1
24	5509	1	1182	45	1
25	5509	1	851	63	1
26	5509	1	2998	18	1



Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
27	5509	1	1747	31	1
28	5509	1	2229	24	1
29	5509	1	1060	50	1
30	5509	1	2730	20	1
Detection Percentage (%)					100%





## Radar Type 2 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	2.4	205	26	1
2	5491	4.1	176	24	1
3	5491	4.5	212	25	1
4	5491	1.8	225	24	1
5	5491	5.0	163	29	1
6	5491	4.9	229	26	1
7	5491	2.6	225	25	1
8	5491	1.3	200	29	1
9	5491	3.9	166	28	1
10	5491	2.5	200	27	1
11	5500	4.5	225	29	1
12	5500	2.7	221	23	1
13	5500	1.4	172	27	1
14	5500	4.2	228	26	1
15	5500	4.3	210	25	1
16	5500	2.2	182	28	1
17	5500	2.1	218	25	1
18	5500	4.8	167	27	1
19	5500	1.5	209	23	1
20	5500	4.5	161	29	1
21	5509	1.2	159	26	1
22	5509	4.9	173	26	1
23	5509	3.6	228	29	1
24	5509	2.8	202	25	1
25	5509	2.3	188	27	1
26	5509	4.8	185	27	1
27	5509	1.7	228	29	1
28	5509	2.7	172	26	1
29	5509	3.6	194	23	1
30	5509	2.6	164	28	1
Detection Percentage (%)					100%



## Radar Type 3 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	7.5	263	17	1
2	5491	8.7	309	17	1
3	5491	6.6	435	18	1
4	5491	9.0	325	18	1
5	5491	8.9	492	17	1
6	5491	6.2	300	18	1
7	5491	6.8	309	17	1
8	5491	9.0	447	17	1
9	5491	9.6	431	16	1
10	5491	6.2	321	16	1
11	5500	8.2	424	16	1
12	5500	6.5	475	16	1
13	5500	8.1	475	16	1
14	5500	7.4	484	16	1
15	5500	7.5	489	16	1
16	5500	7.4	342	16	1
17	5500	6.9	360	16	1
18	5500	8.7	409	18	1
19	5500	8.2	381	18	1
20	5500	9.3	289	16	1
21	5509	7.7	466	18	1
22	5509	9.8	258	18	1
23	5509	9.4	438	18	1
24	5509	8.5	424	16	1
25	5509	8.7	350	16	1
26	5509	8.4	393	17	1
27	5509	8.3	294	16	1
28	5509	6.2	415	16	1
29	5509	8.9	262	17	1
30	5509	7.7	349	18	1
Detection Percentage (%)					100%



Radar Type 4 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	13.5	281	16	1
2	5491	14.4	253	16	1
3	5491	14.6	354	16	1
4	5491	14.9	378	16	1
5	5491	16.4	358	16	1
6	5491	19.8	422	13	1
7	5491	18.4	393	12	1
8	5491	11.9	490	16	1
9	5491	14.6	289	12	1
10	5491	14.5	491	15	1
11	5500	14.5	299	16	1
12	5500	19.5	298	15	1
13	5500	11.2	275	16	1
14	5500	16.8	280	15	1
15	5500	17.1	419	13	1
16	5500	13.2	470	14	1
17	5500	16.1	261	14	1
18	5500	11.5	284	14	1
19	5500	19.5	280	12	1
20	5500	15.4	368	14	1
21	5509	13.4	256	13	1
22	5509	19.9	250	16	1
23	5509	13.5	458	14	1
24	5509	19.7	492	12	1
25	5509	19.3	300	16	1
26	5509	15.8	251	14	1
27	5509	15.8	329	12	1
28	5509	12.4	372	16	1
29	5509	18.3	282	12	1
30	5509	13.4	453	16	1
Detection Percentage (%)					100%

Note: In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows:  $\frac{P_d1+P_d2+P_d3+P_d4}{4} = (100\%+100\%+100\%+100\%)/4 = 100\%$

(>80%)



Radar Type 5 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5494.6	1	16	5500.0	1
2	5498.2	1	17	5500.0	1
3	5497.8	1	18	5500.0	1
4	5493.0	1	19	5500.0	1
5	5495.0	1	20	5500.0	1
6	5494.2	1	21	5501.4	1
7	5496.6	1	22	5505.0	1
8	5493.4	1	23	5502.2	1
9	5498.6	1	24	5506.6	1
10	5495.8	1	25	5505.8	1
11	5500.0	1	26	5503.4	1
12	5500.0	1	27	5505.4	1
13	5500.0	1	28	5504.2	1
14	5500.0	1	29	5507.0	1
15	5500.0	1	30	5501.8	1
Detection Percentage (%)					100%

Type 5 Radar Waveform_1										
Num of Bursts = 11										
Burst Interval (us)= 1090909										
Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri(us)	Pulse 2 Pri(us)	Pulse 3 Pri(us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	322269	2	9	100	1245	1365	0	322269	0	1090908
2	1074034	3	9	60	1810	1841	1235	1398913	1090909	2181817
3	1766381	2	9	50	1161	1045	0	3170180	2181818	3272726
4	986465	1	9	95	1786	0	0	4158851	3272727	4363635
5	1261013	1	9	100	1509	0	0	5421650	4363636	5454544
6	486169	3	9	60	1703	1785	1598	5909328	5454545	6545453
7	858538	3	9	80	1875	1241	1625	6772952	6545454	7636362
8	1095329	3	9	70	1347	1780	1701	7873022	7636363	8727271
9	1747390	1	9	80	1114	0	0	9625240	8727272	9818180
10	1178357	2	9	90	1807	1515	0	10804711	9818181	10909089
11	1127891	1	9	85	1956	0	0	11935924	10909090	11999998
Total number of pulses in waveform = 22										
*****										



### Type 5 Radar Waveform\_2

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	616228	2	18	55	1292	1565	0	616228	0	631578
2	496379	3	18	100	1066	1839	1749	1115464	631579	1263157
3	617878	1	18	60	1557	0	0	1737996	1263158	1894736
4	609474	1	18	55	1196	0	0	2349027	1894737	2526315
5	562522	1	18	95	1515	0	0	2912745	2526316	3157894
6	575428	2	18	55	1053	1291	0	3489688	3157895	3789473
7	804896	3	18	50	1581	1023	1758	4296928	3789474	4421052
8	511331	2	18	80	1558	1132	0	4812621	4421053	5052631
9	275654	3	18	100	1761	1737	1052	5090965	5052632	5684210
10	988000	1	18	95	1233	0	0	6083515	5684211	6315789
11	262064	2	18	85	1942	1590	0	6346812	6315790	6947368
12	1108726	1	18	65	1070	0	0	7459070	6947369	7578947
13	444333	2	18	70	1053	1397	0	7904473	7578948	8210526
14	869631	1	18	60	1423	0	0	8576554	8210527	8842105
15	730382	2	18	85	1294	1258	0	9308359	8842106	9473684
16	198626	2	18	75	1259	1071	0	9509537	9473685	10105263
17	1095476	2	18	55	1970	1529	0	10607343	10105264	10736842
18	427979	1	18	50	1993	0	0	11038821	10736843	11368421
19	500156	3	18	50	1784	1057	1109	11540970	11368422	12000000

Total number of pulses in waveform = 35  
\*\*\*\*\*

### Type 5 Radar Waveform\_3

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	254958	3	17	70	1189	1040	1936	254958	0	749999
2	1160147	2	17	70	1334	1715	0	1419270	750000	1499999
3	614857	2	17	70	1969	1939	0	2037176	1500000	2249999
4	232257	3	17	70	1682	1509	1753	2273341	2250000	2999999
5	1365130	2	17	85	1364	1894	0	3643415	3000000	3749999
6	174044	1	17	100	1278	0	0	3820717	3750000	4499999
7	1333532	3	17	100	1447	1699	1348	5155527	4500000	5249999
8	153551	3	17	60	1213	1789	1982	5313572	5250000	5999999
9	1024553	2	17	75	1376	1350	0	6343109	6000000	6749999
10	485866	1	17	90	1880	0	0	6831701	6750000	7499999
11	763221	1	17	100	1330	0	0	7596802	7500000	8249999
12	890375	1	17	100	1363	0	0	8488507	8250000	8999999
13	1189437	3	17	75	1787	1701	1100	9679307	9000000	9749999
14	761253	1	17	90	1503	0	0	10445148	9750000	10499999
15	385377	2	17	65	1804	1575	0	10832028	10500000	11249999
16	1153624	3	17	65	1614	1571	1551	11989031	11250000	11999999

Total number of pulses in waveform = 33  
\*\*\*\*\*

### Type 5 Radar Waveform\_4

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	273428	1	5	95	1663	0	0	273428	0	599999
2	330629	2	5	50	1572	1350	0	605720	600000	1199999
3	677755	3	5	85	1062	1018	1960	1286397	1200000	1799999
4	869993	1	5	60	1942	0	0	2160430	1800000	2399999
5	580536	3	5	65	1809	1125	1353	2742908	2400000	2999999
6	589745	3	5	90	1683	1110	1888	3336940	3000000	3599999
7	580108	3	5	85	1158	1270	1203	3921729	3600000	4199999
8	682969	1	5	60	1528	0	0	4608329	4200000	4799999
9	358448	1	5	100	1340	0	0	4968305	4800000	5399999
10	539395	1	5	80	1092	0	0	5509040	5400000	5999999
11	765367	1	5	75	1076	0	0	6255489	6000000	6599999
12	654346	1	5	95	1909	0	0	6920911	6600000	7199999
13	625246	3	5	90	1533	1078	1984	7548066	7200000	7799999
14	385558	1	5	90	1846	0	0	7938219	7800000	8399999
15	490858	1	5	75	1425	0	0	8430923	8400000	8999999
16	753983	3	5	90	1732	1094	1035	9186331	9000000	9599999
17	430732	2	5	50	1489	1386	0	9620924	9600000	10199999
18	686137	1	5	55	1631	0	0	10309936	10200000	10799999
19	607052	2	5	60	1402	1666	0	10918619	10800000	11399999
20	523226	1	5	60	1720	0	0	11444913	11400000	11999999

Total number of pulses in waveform = 35  
\*\*\*\*\*



### Type 5 Radar Waveform\_5

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	113457	3	10	70	1999	1306	1181	113457	0	1199999
2	1456140	3	10	50	1774	1627	1092	1574083	1200000	2399999
3	909274	3	10	50	1019	1481	1820	2487850	2400000	3599999
4	1633177	1	10	75	1260	0	0	4125347	3600000	4799999
5	987010	1	10	55	1675	0	0	5113617	4800000	5999999
6	937010	3	10	50	1221	1333	1327	6052302	6000000	7199999
7	1693754	3	10	50	1175	1796	1033	7749937	7200000	8399999
8	1638484	2	10	95	1255	1428	0	9392425	8400000	9599999
9	852788	1	10	70	1788	0	0	10247896	9600000	10799999
10	744080	1	10	65	1011	0	0	10993764	10800000	11999999

Total number of pulses in waveform = 21

\*\*\*\*\*

### Type 5 Radar Waveform\_6

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	231138	1	8	55	1729	0	0	231138	0	1333332
2	2048873	3	8	55	1668	1898	1108	2281740	1333333	2666665
3	670282	2	8	95	1790	1665	0	2956696	2666666	3999998
4	1718086	3	8	75	1193	1476	1597	4678237	3999999	5333331
5	1109159	2	8	65	1221	1903	0	5791662	5333332	6666664
6	1697291	2	8	60	1823	1018	0	7492077	6666665	7999997
7	1295403	3	8	80	1742	1264	1245	8790321	7999998	9333330
8	775839	3	8	75	1426	1038	1246	9570411	9333331	10666663
9	1101944	2	8	60	1955	1797	0	10676065	10666664	11999996

Total number of pulses in waveform = 21

\*\*\*\*\*

### Type 5 Radar Waveform\_7

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	107920	2	14	100	1940	1021	0	107920	0	631578
2	630951	2	14	95	1937	1588	0	741832	631579	1263157
3	1146431	1	14	60	1140	0	0	1891788	1263158	1894736
4	60317	1	14	95	1582	0	0	1953245	1894737	2526315
5	762851	3	14	55	1776	1653	1231	2717678	2526316	3157894
6	1061141	2	14	100	1539	1600	0	3783479	3157895	3789473
7	29194	1	14	50	1185	0	0	3815812	3789474	4421052
8	1202573	2	14	95	1617	1959	0	5019570	4421053	5052631
9	78532	3	14	90	1127	1589	1949	5101678	5052632	5684210
10	837263	3	14	55	1946	1031	1238	5943606	5684211	6315789
11	537545	3	14	70	1110	1810	1647	6485366	6315790	6947368
12	935741	1	14	100	1249	0	0	7425674	6947369	7578947
13	247691	2	14	100	1955	1252	0	7674614	7578948	8210526
14	109833	1	14	100	1208	0	0	8770695	8210527	8842105
15	1092874	2	14	95	1091	1906	0	8881736	8842106	9473684
16	609802	2	14	95	1150	1968	0	9494535	9473685	10105263
17	1200396	2	14	55	1541	1376	0	10698049	10105264	10736842
18	565129	3	14	95	1764	1746	1596	11286095	10736843	11368421
19	685485	1	14	100	1999	0	0	11956686	11368422	12000000

Total number of pulses in waveform = 37

\*\*\*\*\*



### Type 5 Radar Waveform\_8

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	422	1	6	80	1249	0	0	422	0	1090908
2	1219337	1	6	70	1937	0	0	1221008	1090909	2181817
3	1326815	2	6	55	1289	1626	0	2549760	2181818	3272726
4	727635	1	6	65	1580	0	0	3280310	3272727	4363635
5	1447194	1	6	60	1786	0	0	4729084	4363636	5454544
6	1685865	2	6	75	1905	1445	0	6416735	5454545	6545453
7	220509	2	6	55	1432	1265	0	6640594	6545454	7636362
8	1974486	2	6	60	1243	1725	0	8617777	7636363	8727271
9	1025178	3	6	90	1063	1826	1788	9645923	8727272	9818180
10	1154381	3	6	70	1938	1658	1999	10804981	9818181	10909089
11	509478	1	6	90	1349	0	0	11320054	10909090	11999998

Total number of pulses in waveform = 19  
\*\*\*\*\*

### Type 5 Radar Waveform\_9

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	41173	3	19	85	1766	1845	1047	41173	0	749999
2	1053860	2	19	95	1546	1573	0	1099691	750000	1499999
3	573313	2	19	95	1067	1642	0	1676123	1500000	2249999
4	1137784	3	19	75	1559	1360	1376	2816616	2250000	2999999
5	578385	1	19	65	1146	0	0	3399296	3000000	3749999
6	943207	1	19	65	1697	0	0	4343649	3750000	4499999
7	804510	1	19	75	1883	0	0	5149856	4500000	5249999
8	113005	1	19	95	1554	0	0	5264744	5250000	5999999
9	1175847	2	19	75	1012	1196	0	6442145	6000000	6749999
10	942355	3	19	95	1019	1079	1604	7386708	6750000	7499999
11	535850	3	19	100	1999	1975	1234	7926260	7500000	8249999
12	895706	1	19	95	1044	0	0	8827174	8250000	8999999
13	686983	1	19	60	1571	0	0	9515201	9000000	9749999
14	320704	2	19	65	1235	1421	0	9837476	9750000	10499999
15	1271262	1	19	95	1390	0	0	11111394	10500000	11249999
16	518140	3	19	65	1197	1640	1206	11630924	11250000	11999999

Total number of pulses in waveform = 30  
\*\*\*\*\*

### Type 5 Radar Waveform\_10

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	841778	2	12	100	1417	1226	0	841778	0	1090908
2	960057	2	12	100	1425	1129	0	1804478	1090909	2181817
3	588883	1	12	80	1014	0	0	2395915	2181818	3272726
4	1240234	1	12	85	1430	0	0	3637163	3272727	4363635
5	1462926	2	12	95	1870	1791	0	5101519	4363636	5454544
6	1352904	1	12	60	1728	0	0	6458084	5454545	6545453
7	278979	2	12	50	1169	1103	0	6738791	6545454	7636362
8	1878672	1	12	70	1824	0	0	8619735	7636363	8727271
9	498503	2	12	55	1991	1059	0	9120062	8727272	9818180
10	1602692	2	12	80	1599	1297	0	10725804	9818181	10909089
11	1240414	1	12	100	1066	0	0	11969114	10909090	11999998

Total number of pulses in waveform = 17  
\*\*\*\*\*





### Type 5 Radar Waveform\_11

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	273470	3	14	75	1472	1649	1612	273470	0	1499999
2	1573194	1	14	70	1404	0	0	1851397	1500000	2999999
3	1745201	2	14	75	1445	1683	0	3598002	3000000	4499999
4	1678461	3	14	50	1471	1298	1853	5279591	4500000	5999999
5	947974	1	14	50	1725	0	0	6232187	6000000	7499999
6	2648315	3	14	100	1167	1208	1879	8882227	7500000	8999999
7	201249	1	14	90	1442	0	0	9087730	9000000	10499999
8	2519215	2	14	75	1813	1554	0	11608387	10500000	11999999

Total number of pulses in waveform = 16

\*\*\*\*\*

### Type 5 Radar Waveform\_12

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	256778	1	6	100	1456	0	0	256778	0	1499999
2	1573754	3	6	85	1548	1211	1803	1831988	1500000	2999999
3	2024257	2	6	60	1538	1234	0	3860807	3000000	4499999
4	1910198	3	6	85	1822	1546	1019	5773777	4500000	5999999
5	1201783	1	6	90	1151	0	0	6979947	6000000	7499999
6	1331961	3	6	85	1209	1010	1499	8313059	7500000	8999999
7	2082916	1	6	100	1316	0	0	10399693	9000000	10499999
8	735302	2	6	50	1916	1754	0	11136311	10500000	11999999

Total number of pulses in waveform = 16

\*\*\*\*\*

### Type 5 Radar Waveform\_13

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	335268	2	8	55	1165	1474	0	335268	0	799999
2	1211263	3	8	55	1945	1673	1595	1549170	800000	1599999
3	504559	1	8	90	1204	0	0	2058942	1600000	2399999
4	1088617	1	8	80	1536	0	0	3148763	2400000	3199999
5	386323	2	8	65	1407	1080	0	3536622	3200000	3999999
6	905171	1	8	55	1843	0	0	4444280	4000000	4799999
7	680026	2	8	60	1496	1502	0	5126149	4800000	5599999
8	873363	2	8	70	1578	1424	0	6002510	5600000	6399999
9	1158227	2	8	50	1069	1342	0	7163739	6400000	7199999
10	417972	1	8	75	1880	0	0	7584122	7200000	7999999
11	605290	1	8	100	1453	0	0	8191292	8000000	8799999
12	1197350	3	8	85	1663	1988	1739	9390095	8800000	9599999
13	483370	2	8	65	1152	1871	0	9878855	9600000	10399999
14	1257025	1	8	100	1158	0	0	11138903	10400000	11199999
15	642145	3	8	50	1082	1115	1320	11782206	11200000	11999999

Total number of pulses in waveform = 27

\*\*\*\*\*



### Type 5 Radar Waveform\_14

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	716269	1	9	70	1220	0	0	716269	0	799999
2	220535	3	9	95	1115	1370	1187	938024	800000	1599999
3	1304208	2	9	85	1306	1240	0	2245904	1600000	2399999
4	598601	3	9	65	1454	1796	1516	2847051	2400000	3199999
5	575911	2	9	80	1682	1545	0	3427728	3200000	3999999
6	768456	1	9	85	1467	0	0	4199411	4000000	4799999
7	623214	3	9	75	1124	1811	1520	4824092	4800000	5599999
8	1223843	3	9	95	1245	1935	1504	6052390	5600000	6399999
9	1079759	3	9	65	1743	1567	1298	7136833	6400000	7199999
10	760273	1	9	100	1160	0	0	7901714	7200000	7999999
11	706668	3	9	100	1417	1722	1051	8609542	8000000	8799999
12	792613	1	9	100	1226	0	0	9406345	8800000	9599999
13	586118	3	9	65	1802	1155	1738	9993689	9600000	10399999
14	713705	2	9	95	1358	1429	0	10712089	10400000	11199999
15	925902	1	9	65	1031	0	0	11640778	11200000	11999999

Total number of pulses in waveform = 32

\*\*\*\*\*

### Type 5 Radar Waveform\_15

Num of Bursts = 14  
Burst Interval (us)= 857143

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	214856	1	10	90	1113	0	0	214856	0	857142
2	1144956	2	10	80	1479	1246	0	1360925	857143	1714285
3	539943	1	10	95	1822	0	0	1903593	1714286	2571428
4	1326536	1	10	80	1333	0	0	3231951	2571429	3428571
5	350264	1	10	95	1200	0	0	3583548	3428572	4285714
6	1430640	2	10	80	1527	1912	0	5015388	4285715	5142857
7	271343	2	10	65	1313	1325	0	5290170	5142858	6000000
8	1394882	1	10	90	1582	0	0	6687690	6000001	6857143
9	485942	3	10	60	1677	1024	1516	7175214	6857144	7714286
10	941995	3	10	50	1472	1524	1177	8121426	7714287	8571429
11	965767	3	10	55	1496	1056	1825	9091366	8571430	9428572
12	508451	3	10	95	1569	1481	1933	9604194	9428573	10285715
13	1004292	3	10	55	1497	1265	1446	10613469	10285716	11142858
14	995685	1	10	75	1949	0	0	11613362	11142859	12000001

Total number of pulses in waveform = 27

\*\*\*\*\*

### Type 5 Radar Waveform\_16

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	380175	2	17	75	1373	1794	0	380175	0	666666
2	659656	1	17	100	1435	0	0	1042998	666667	1333333
3	326685	1	17	55	1912	0	0	1371118	1333334	2000000
4	739904	3	17	100	1603	1144	1401	2112994	2000001	2666667
5	1190382	3	17	80	1266	1590	1319	3307464	2666668	3333334
6	184237	3	17	100	1087	1821	1353	3495876	3333335	4000001
7	1037287	1	17	70	1739	0	0	4537424	4000002	4666668
8	663693	2	17	85	1902	1982	0	5202856	4666669	5333335
9	337475	3	17	85	1504	1459	1404	5544215	5333336	6000002
10	771571	3	17	90	1507	1423	1150	6320153	6000003	6666669
11	731456	1	17	60	1042	0	0	7055689	6666670	7333336
12	402408	1	17	85	1379	0	0	7459139	7333337	8000003
13	868656	2	17	100	1180	1512	0	8329174	8000004	8666670
14	950953	3	17	95	1017	1690	1769	9282819	8666671	9333337
15	180384	1	17	70	1398	0	0	9467679	9333338	10000004
16	1112747	1	17	90	1975	0	0	10581824	10000005	10666671
17	532997	3	17	50	1471	1892	1164	11116796	10666672	11333338
18	345695	1	17	80	1329	0	0	11467018	11333339	12000005

Total number of pulses in waveform = 35

\*\*\*\*\*



### Type 5 Radar Waveform\_17

Num of Bursts = 14  
Burst Interval (us)= 857143

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	222381	1	19	75	1951	0	0	222381	0	857142
2	1412586	1	19	65	1382	0	0	1636918	857143	1714285
3	129169	3	19	85	1421	1166	1783	1767469	1714286	2571428
4	1382417	3	19	85	1561	1857	1446	3154256	2571429	3428571
5	1018288	2	19	95	1641	1216	0	4177408	3428572	4285714
6	952953	3	19	55	1069	1506	1159	5133218	4285715	5142857
7	663117	1	19	60	1829	0	0	5800069	5142858	6000000
8	599744	3	19	80	1767	1193	1507	6401642	6000001	6857143
9	881890	3	19	85	1608	1755	1629	7287999	6857144	7714286
10	439821	1	19	90	1806	0	0	7732812	7714287	8571429
11	1505900	2	19	55	1227	1258	0	9240518	8571430	9428572
12	664774	3	19	50	1831	1428	1713	9907777	9428573	10285715
13	1088444	1	19	100	1991	0	0	11001193	10285716	11142858
14	857193	2	19	100	1292	1339	0	11860377	11142859	12000001

Total number of pulses in waveform = 29  
\*\*\*\*\*

### Type 5 Radar Waveform\_18

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	655760	3	5	90	1757	1476	1650	655760	0	799999
2	746999	1	5	60	1436	0	0	1407642	800000	1599999
3	955675	3	5	80	1836	1982	1661	2364753	1600000	2399999
4	534566	3	5	65	1758	1554	1992	2904798	2400000	3199999
5	680105	2	5	75	1336	1655	0	3590207	3200000	3999999
6	521588	3	5	70	1468	1250	1602	4114786	4000000	4799999
7	798043	2	5	75	1639	1915	0	4917149	4800000	5599999
8	1395045	3	5	70	1594	1692	1261	6315748	5600000	6399999
9	82313	1	5	55	1947	0	0	6402608	6400000	7199999
10	1056118	1	5	85	1862	0	0	7460673	7200000	7999999
11	757980	3	5	50	1054	1837	1178	8220515	8000000	8799999
12	1176693	1	5	55	1283	0	0	9401277	8800000	9599999
13	802881	1	5	50	1013	0	0	10205441	9600000	10399999
14	860651	3	5	50	1764	1465	1215	11067105	10400000	11199999
15	809926	1	5	90	1410	0	0	11881475	11200000	11999999

Total number of pulses in waveform = 31  
\*\*\*\*\*

### Type 5 Radar Waveform\_19

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	590225	1	18	65	1835	0	0	590225	0	1199999
2	1610961	3	18	55	1517	1033	1030	2203021	1200000	2399999
3	793412	3	18	90	1360	1030	1767	3000013	2400000	3599999
4	1528373	3	18	100	1845	1297	1373	4532543	3600000	4799999
5	1426680	3	18	95	1489	1693	1007	5963738	4800000	5999999
6	241006	1	18	95	1231	0	0	6208933	6000000	7199999
7	2015980	2	18	70	1085	1782	0	8226144	7200000	8399999
8	644709	3	18	100	1110	1859	1042	8873720	8400000	9599999
9	1102419	1	18	70	1794	0	0	9980150	9600000	10799999
10	1054716	3	18	95	1534	1848	1050	11036660	10800000	11999999

Total number of pulses in waveform = 23  
\*\*\*\*\*



### Type 5 Radar Waveform\_20

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	429432	3	12	85	1142	1241	1469	429432	0	1090908
2	701406	1	12	90	1518	0	0	1134690	1090909	2181817
3	1847442	3	12	100	1603	1509	1469	2983650	2181818	3272726
4	417565	3	12	60	1786	1751	1927	3405796	3272727	4363635
5	1187173	2	12	95	1605	1443	0	4598433	4363636	5454544
6	1259905	3	12	85	1589	1606	1258	5861386	5454545	6545453
7	691063	1	12	65	1859	0	0	6556902	6545454	7636362
8	1448829	3	12	60	1300	1839	1206	8007590	7636363	8727271
9	1069857	2	12	100	1555	1530	0	9081792	8727272	9818180
10	1055925	3	12	60	1752	1025	1966	10140802	9818181	10909089
11	1043074	2	12	90	1892	1652	0	11188619	10909090	11999998

Total number of pulses in waveform = 26  
\*\*\*\*\*

### Type 5 Radar Waveform\_21

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	347406	1	19	60	1251	0	0	347406	0	749999
2	879243	3	19	60	1891	1829	1766	1227900	750000	1499999
3	1008319	1	19	75	1638	0	0	2241705	1500000	2249999
4	436073	3	19	95	1442	1158	1574	2679416	2250000	2999999
5	571908	1	19	95	1507	0	0	3255498	3000000	3749999
6	555305	3	19	75	1995	1989	1368	3812310	3750000	4499999
7	1280513	2	19	65	1264	1982	0	5098175	4500000	5249999
8	541873	1	19	55	1590	0	0	5643294	5250000	5999999
9	895089	2	19	50	1160	1870	0	6539973	6000000	6749999
10	749770	2	19	55	1248	1465	0	7292773	6750000	7499999
11	208159	1	19	65	1210	0	0	7503645	7500000	8249999
12	793189	1	19	85	1532	0	0	8298044	8250000	8999999
13	721662	2	19	60	1523	1669	0	9021238	9000000	9749999
14	1343977	2	19	50	1154	1819	0	10368407	9750000	10499999
15	476091	1	19	80	1983	0	0	10847471	10500000	11249999
16	544224	3	19	90	1543	1635	1995	11393678	11250000	11999999

Total number of pulses in waveform = 29  
\*\*\*\*\*

### Type 5 Radar Waveform\_22

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	790517	2	10	70	1590	1880	0	790517	0	923076
2	656146	2	10	95	1680	1939	0	1450133	923077	1846153
3	948758	1	10	85	1913	0	0	2402510	1846154	2769230
4	786438	2	10	95	1333	1863	0	3190861	2769231	3692307
5	1101055	2	10	100	1694	1851	0	4295112	3692308	4615384
6	404049	2	10	85	1217	1054	0	4702706	4615385	5538461
7	849427	3	10	100	1963	1885	1786	5554404	5538462	6461538
8	948856	3	10	55	1853	1746	1415	6508894	6461539	7384615
9	1491268	1	10	70	1034	0	0	8005176	7384616	8307692
10	991975	1	10	60	1373	0	0	8998185	8307693	9230769
11	318440	2	10	90	1874	1215	0	9317998	9230770	10153846
12	1338007	3	10	50	1134	1927	1864	10659094	10153847	11076923
13	498486	3	10	95	1424	1915	1634	11162505	11076924	12000000

Total number of pulses in waveform = 27  
\*\*\*\*\*



### Type 5 Radar Waveform\_23

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	228754	2	17	60	1600	1677	0	228754	0	1333332
2	1962724	3	17	100	1440	1407	1605	2194755	1333333	2666665
3	691750	3	17	70	1324	1929	1330	2890957	2666666	3999998
4	1157459	2	17	90	1812	1756	0	4052999	3999999	5333331
5	1290838	1	17	75	1171	0	0	5347405	5333332	6666664
6	1989659	2	17	65	1212	1671	0	7338235	6666665	7999997
7	1076593	2	17	95	1264	1437	0	8417711	7999998	9333330
8	1050318	1	17	70	1111	0	0	9470730	9333331	10666663
9	1856864	2	17	75	1406	1913	0	11328705	10666664	11999996

Total number of pulses in waveform = 18

\*\*\*\*\*

### Type 5 Radar Waveform\_24

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	242200	2	6	95	1682	1491	0	242200	0	666666
2	562796	1	6	85	1727	0	0	808169	666667	1333333
3	1113583	2	6	90	1340	1384	0	1923479	1333334	2000000
4	416936	2	6	75	1956	1086	0	2343139	2000001	2666667
5	363366	1	6	55	1121	0	0	2709546	2666668	3333334
6	1004051	2	6	55	1672	1595	0	3714718	3333335	4000001
7	551077	2	6	60	1424	1975	0	4269062	4000002	4666668
8	969935	2	6	70	1092	1875	0	5242396	4666669	5333335
9	377436	1	6	60	1941	0	0	5622799	5333336	6000002
10	977108	3	6	100	1604	1671	1290	6601848	6000003	6666669
11	630482	3	6	50	1015	1303	1610	7236895	6666670	7333336
12	664320	2	6	75	1694	1587	0	7905143	7333337	8000003
13	307722	2	6	65	1381	1541	0	8216146	8000004	8666670
14	881752	1	6	75	1647	0	0	9100820	8666671	9333337
15	305322	2	6	60	1358	1455	0	9407789	9333338	10000004
16	907132	3	6	70	1095	1031	1895	10317734	10000005	10666671
17	527252	2	6	95	1532	1240	0	10849007	10666672	11333338
18	694002	3	6	65	1913	1558	0	11545781	11333339	12000005

Total number of pulses in waveform = 35

\*\*\*\*\*

### Type 5 Radar Waveform\_25

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	546232	2	8	60	1246	1040	0	546232	0	749999
2	925356	2	8	50	1816	1959	0	1473874	750000	1499999
3	64788	1	8	65	1186	0	0	1542437	1500000	2249999
4	952304	3	8	90	1966	1617	1990	2495927	2250000	2999999
5	677405	2	8	70	1605	1501	0	3178905	3000000	3749999
6	587073	3	8	60	1449	1256	1987	3769084	3750000	4499999
7	950600	1	8	60	1313	0	0	4724376	4500000	5249999
8	567307	1	8	90	1110	0	0	5292996	5250000	5999999
9	1374826	3	8	75	1539	1449	1709	6668932	6000000	6749999
10	240017	2	8	90	1714	1738	0	6913646	6750000	7499999
11	593471	3	8	60	1896	1785	1176	7510569	7500000	8249999
12	1198146	3	8	80	1925	1750	1678	8713572	8250000	8999999
13	834738	3	8	70	1049	1146	1991	9553663	9000000	9749999
14	195763	2	8	65	1147	1342	0	9753612	9750000	10499999
15	884944	3	8	95	1634	1401	1649	10641045	10500000	11249999
16	700650	3	8	85	1203	1121	1005	11346379	11250000	11999999

Total number of pulses in waveform = 37

\*\*\*\*\*



### Type 5 Radar Waveform\_26

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	475764	2	14	90	1315	1937	0	475764	0	705881
2	692930	1	14	70	1955	0	0	1171946	705882	1411763
3	929852	3	14	55	1882	1616	1057	2103753	1411764	2117645
4	695650	3	14	95	1087	1096	1892	2803958	2117646	2823527
5	288200	2	14	85	1675	1268	0	3096233	2823528	3529409
6	766576	1	14	50	1044	0	0	3865752	3529410	4235291
7	618679	3	14	95	1129	1550	1920	4485475	4235292	4941173
8	822400	1	14	85	1626	0	0	5312474	4941174	5647055
9	449865	3	14	90	1841	1295	1791	5763965	5647056	6352937
10	1225484	1	14	95	1613	0	0	6994376	6352938	7058819
11	712267	2	14	100	1021	1021	1794	7708256	7058820	7764701
12	683589	2	14	100	1499	1979	0	8394660	7764702	8470583
13	685082	1	14	55	1209	0	0	9083220	8470584	9176465
14	578664	2	14	80	1470	1565	0	9663093	9176466	9882347
15	377744	3	14	75	1563	1653	1212	10043872	9882348	10588229
16	1000991	2	14	100	1054	1769	0	11049291	10588230	11294111
17	538847	3	14	55	1924	1548	1536	11590961	11294112	11999993

Total number of pulses in waveform = 35  
\*\*\*\*\*

### Type 5 Radar Waveform\_27

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	488022	3	9	90	1501	1753	1041	488022	0	666666
2	258764	3	9	55	1577	1266	1340	751081	666667	1333333
3	1176159	2	9	85	1545	1272	0	1931423	1333334	2000000
4	79286	3	9	95	1534	1745	1047	2013526	2000001	2666667
5	862412	2	9	75	1901	1159	0	2880264	2666668	3333334
6	734499	2	9	50	1325	1567	0	3617823	3333335	4000001
7	411643	1	9	90	1309	0	0	4032358	4000002	4666668
8	1102730	1	9	50	1870	0	0	5136397	4666669	5333335
9	212445	3	9	95	1865	1413	1491	5350712	5333336	6000002
10	871605	1	9	80	1705	0	0	6227086	6000003	6666669
11	1102559	1	9	95	1961	0	0	7331350	6666670	7333336
12	163265	3	9	55	1738	1433	1456	7496576	7333337	8000003
13	1008321	3	9	50	1267	1211	1587	8509524	8000004	8666670
14	596332	2	9	50	1832	1987	0	9109921	8666671	9333337
15	826838	3	9	60	1587	1251	1159	9940578	9333338	10000004
16	117081	2	9	65	1907	1875	0	10061656	10000005	10666671
17	922076	1	9	80	1657	0	0	10987514	10666672	11333338
18	758174	1	9	55	1153	0	0	11747345	11333339	12000005

Total number of pulses in waveform = 37  
\*\*\*\*\*

### Type 5 Radar Waveform\_28

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	279060	2	12	80	1780	1338	0	279060	0	705881
2	819359	1	12	60	1687	0	0	1101537	705882	1411763
3	757509	3	12	100	1336	1104	1602	1860733	1411764	2117645
4	824530	1	12	75	1517	0	0	2689305	2117646	2823527
5	414987	2	12	85	1138	1393	0	3105809	2823528	3529409
6	916610	3	12	70	1176	1765	1205	4024950	3529410	4235291
7	518708	2	12	70	1322	1891	0	4547804	4235292	4941173
8	1059684	1	12	70	1255	0	0	5610701	4941174	5647055
9	88508	2	12	65	1745	1287	0	5700464	5647056	6352937
10	1179292	2	12	60	1470	1650	0	6882788	6352938	7058819
11	630169	3	12	60	1153	1943	1175	7516077	7058820	7764701
12	445944	3	12	90	1112	1810	1196	7966297	7764702	8470583
13	861462	1	12	50	1229	0	0	8831877	8470584	9176465
14	430657	3	12	65	1235	1031	1517	9263763	9176466	9882347
15	799304	1	12	65	1957	0	0	10066850	9882348	10588229
16	855996	3	12	55	1207	1535	1493	10924803	10588230	11294111
17	1019407	3	12	50	1868	1807	1979	11948445	11294112	11999993

Total number of pulses in waveform = 36  
\*\*\*\*\*



### Type 5 Radar Waveform\_29

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	42622	2	5	80	1643	1913	0	42622	0	799999
2	1459413	2	5	100	1808	1673	0	1505591	800000	1599999
3	505939	1	5	90	1849	0	0	2015011	1600000	2399999
4	1002248	1	5	75	1645	0	0	3019108	2400000	3199999
5	708320	2	5	50	1025	1717	0	3729073	3200000	3999999
6	838191	3	5	100	1055	1495	1597	4570006	4000000	4799999
7	702547	1	5	60	1689	0	0	5276700	4800000	5599999
8	327144	2	5	75	1365	1921	0	5605533	5600000	6399999
9	1088650	1	5	50	1600	0	0	6697469	6400000	7199999
10	563874	1	5	85	1327	0	0	7262943	7200000	7999999
11	1470308	3	5	70	1525	1332	1099	8734578	8000000	8799999
12	689191	1	5	70	1818	0	0	9427725	8800000	9599999
13	434194	3	5	55	1116	1230	1141	9863737	9600000	10399999
14	937366	3	5	75	1020	1708	1199	10804590	10400000	11199999
15	568869	3	5	95	1311	1035	1932	11377386	11200000	11999999

Total number of pulses in waveform = 29

\*\*\*\*\*

### Type 5 Radar Waveform\_30

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	265897	1	18	80	1562	0	0	265897	0	1333332
2	1424601	3	18	60	1243	1764	1612	1692060	1333333	2666665
3	1596571	2	18	85	1066	1104	0	3293250	2666666	3999998
4	1034611	1	18	85	1463	0	0	4330031	3999999	5333331
5	1659138	3	18	85	1222	1076	1043	5990632	5333332	6666664
6	1070353	1	18	70	1530	0	0	7064326	6666665	7999997
7	998014	3	18	70	1707	1971	1068	8063870	7999998	9333330
8	1921595	2	18	55	1947	1509	0	9990211	9333331	10666663
9	1653360	1	18	55	1626	0	0	11647027	10666664	11999996

Total number of pulses in waveform = 17

\*\*\*\*\*

## Radar Type 6 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5491	1	16	5500	1
2	5491	1	17	5500	1
3	5491	1	18	5500	1
4	5491	1	19	5500	1
5	5491	1	20	5500	1
6	5491	1	21	5509	1
7	5491	1	22	5509	1
8	5491	1	23	5509	1
9	5491	1	24	5509	1
10	5491	1	25	5509	1
11	5500	1	26	5509	1
12	5500	1	27	5509	1
13	5500	1	28	5509	1
14	5500	1	29	5509	1
15	5500	1	30	5509	1
Detection Percentage (%)					100%





Radar waveform #1			Radar waveform #2		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5503	9	0	5503	0
6	5504	18	7	5461	21
7	5511	21	15	5495	45
8	5467	24	16	5501	48
16	5498	48	20	5521	60
22	5502	66	21	5504	63
28	5483	84	22	5519	66
40	5486	120	32	5475	96
41	5487	123	34	5516	102
44	5497	132	37	5508	111
46	5521	138	42	5490	126
47	5495	141	46	5513	138
67	5465	201	47	5465	141
80	5505	240	53	5471	159
90	5499	270	61	5502	183
--	--	--	62	5498	186
--	--	--	75	5469	225
--	--	--	88	5517	264
--	--	--	91	5488	273
--	--	--	94	5474	282

Radar waveform #3			Radar waveform #4		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5478	9	30	5483	90
7	5492	21	34	5495	102
9	5462	27	60	5471	180
12	5493	36	90	5468	270
20	5510	60	94	5493	282
22	5468	66	--	--	--
28	5473	84	--	--	--
61	5464	183	--	--	--
72	5467	216	--	--	--
89	5477	267	--	--	--

---

94	5518	282	--	--	--
----	------	-----	----	----	----



Radar waveform #5			Radar waveform #6		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
8	5503	24	7	5465	21
16	5478	48	13	5486	39
22	5480	66	24	5491	72
40	5476	120	30	5519	90
53	5468	159	37	5471	111
58	5470	174	40	5499	120
59	5518	177	43	5490	129
60	5477	180	58	5521	174
62	5501	186	59	5501	177
67	5502	201	70	5507	210
86	5483	258	75	5511	225
88	5521	264	77	5484	231
89	5500	267	78	5474	234
90	5498	270	83	5476	249
95	5516	285	87	5468	261

Radar waveform #7			Radar waveform #8		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5479	0	1	5501	3
17	5517	51	5	5508	15
21	5480	63	11	5509	33
23	5482	69	21	5473	63
27	5466	81	37	5499	111
32	5475	96	39	5475	117
42	5514	126	55	5464	165
50	5470	150	79	5521	237
58	5494	174	80	5516	240
59	5500	177	81	5497	243
61	5461	183	85	5465	255
68	5513	204	--	--	--
71	5497	213	--	--	--
77	5469	231	--	--	--
98	5518	294	--	--	--

Radar waveform #9			Radar waveform #10		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5477	15	4	5476	12
35	5487	105	12	5497	36
44	5516	132	32	5507	96
46	5500	138	34	5471	102
51	5463	153	42	5468	126
52	5494	156	43	5506	129
62	5520	186	44	5482	132
63	5462	189	49	5474	147
68	5497	204	69	5520	207
74	5509	222	70	5475	210
75	5518	225	92	5489	276
95	5491	285	94	5500	282



Radar waveform #11			Radar waveform #12		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Frequency (MHz)	Hopping Number	Pulse Start (ms)
5	5490	15	0	5521	0
31	5486	93	2	5497	6
42	5507	126	5	5501	15
47	5508	141	6	5485	18
49	5520	147	7	5522	21
58	5503	174	23	5473	69
64	5478	192	28	5495	84
74	5479	222	31	5528	93
81	5510	243	48	5513	144
83	5529	249	50	5480	150
97	5475	291	51	5520	153
98	5472	294	60	5511	180
--	--	--	61	5516	183
--	--	--	64	5475	192
--	--	--	74	5529	222
--	--	--	75	5498	225
--	--	--	83	5470	249
--	--	--	86	5503	258
--	--	--	89	5502	267
--	--	--	96	5524	288
--	--	--	99	5508	297

Radar waveform #13			Radar waveform #14		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5492	9	1	5515	3
11	5470	33	19	5513	57
14	5495	42	20	5525	60
15	5502	45	30	5497	90
24	5512	72	32	5527	96
36	5483	108	37	5528	111
41	5501	123	41	5488	123
43	5472	129	48	5484	144
75	5499	225	49	5492	147



---

84	5504	252	62	5507	186
96	5494	288	64	5526	192
97	5493	291	70	5486	210
--	--	--	79	5501	237
--	--	--	80	5494	240
--	--	--	81	5512	243
--	--	--	90	5530	270



Radar waveform #15			Radar waveform #16		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
6	5498	18	8	5474	24
11	5520	33	11	5488	33
30	5490	90	15	5522	45
34	5530	102	20	5481	60
45	5516	135	27	5499	81
61	5491	183	69	5530	207
64	5513	192	79	5510	237
65	5496	195	86	5496	258
71	5521	213	90	5490	270
--	--	--	94	5470	282
--	--	--	98	5504	294

Radar waveform #17			Radar waveform #18		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5478	0	2	5488	6
11	5498	33	4	5509	12
12	5491	36	11	5474	33
19	5509	57	15	5481	45
29	5504	87	22	5475	66
30	5490	90	30	5527	90
36	5521	108	65	5515	195
42	5510	126	69	5508	207
52	5494	156	83	5471	249
54	5500	162	92	5484	276
59	5511	177	--	--	--
62	5492	186	--	--	--
77	5484	231	--	--	--
81	5528	243	--	--	--
92	5522	276	--	--	--
95	5497	285	--	--	--
96	5487	288	--	--	--



Radar waveform #19			Radar waveform #20		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5490	0	7	5486	21
10	5500	30	12	5507	36
45	5529	135	16	5513	48
46	5498	138	26	5516	78
48	5474	144	32	5473	96
62	5497	186	37	5470	111
66	5524	198	40	5504	120
69	5511	207	42	5511	126
81	5485	243	57	5523	171
94	5476	282	65	5471	195
96	5475	288	66	5520	198
--	--	--	68	5510	204
--	--	--	69	5524	207
--	--	--	72	5478	216
--	--	--	80	5502	240
--	--	--	88	5492	264
--	--	--	98	5497	294

Radar waveform #21			Radar waveform #22		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
1	5507	3	9	5494	27
2	5496	6	23	5520	69
9	5531	27	27	5484	81
10	5502	30	28	5496	84
37	5479	111	43	5498	129
41	5488	123	46	5508	138
42	5522	126	64	5483	192
43	5519	129	72	5528	216
50	5481	150	98	5514	294
52	5480	156	--	--	--
73	5524	219	--	--	--
80	5510	240	--	--	--



Radar waveform #23			Radar waveform #24		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
1	5533	3	4	5502	12
12	5498	36	18	5496	54
19	5484	57	23	5537	69
29	5497	87	31	5493	93
31	5509	93	48	5485	144
35	5535	105	57	5520	171
37	5495	111	61	5513	183
42	5525	126	67	5525	201
43	5513	129	73	5483	219
44	5538	132	77	5482	231
50	5528	150	81	5539	243
61	5521	183	85	5519	255
67	5527	201	87	5510	261
73	5526	219	94	5523	282
74	5486	222	99	5518	297
83	5534	249	--	--	--
91	5517	273	--	--	--



Radar waveform #25			Radar waveform #26		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5492	9	0	5532	0
10	5520	30	6	5490	18
18	5505	54	15	5502	45
19	5493	57	20	5483	60
25	5522	75	23	5516	69
27	5497	81	54	5497	162
29	5536	87	56	5510	168
31	5538	93	66	5521	198
35	5525	105	74	5517	222
37	5535	111	82	5488	246
42	5529	126	90	5481	270
59	5491	177	98	5519	294
67	5496	201	--	--	--
90	5489	270	--	--	--
91	5499	273	--	--	--
93	5479	279	--	--	--

Radar waveform #27			Radar waveform #28		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
10	5487	30	1	5504	3
15	5507	45	11	5514	33
18	5509	54	12	5531	36
33	5523	99	19	5506	57
44	5539	132	32	5528	96
53	5486	159	41	5496	123
57	5529	171	50	5539	150
71	5508	213	54	5530	162
73	5522	219	63	5524	189
88	5481	264	74	5483	222
94	5524	282	81	5509	243
96	5538	288	83	5480	249
--	--	--	85	5500	255

Radar waveform #29			Radar waveform #30		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
10	5482	30	12	5537	36
17	5515	51	15	5526	45
21	5517	63	29	5483	87
23	5490	69	36	5482	108
24	5496	72	42	5491	126
28	5531	84	61	5529	183
38	5534	114	63	5518	189
58	5479	174	68	5506	204
72	5481	216	70	5505	210
75	5494	225	78	5514	234
80	5492	240	83	5520	249
89	5518	267	92	5522	276
92	5523	276	95	5481	285
--	--	--	97	5504	291
--	--	--	99	5492	297



Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/28
Test Item	Radar Statistical Performance Check (802.11n-HT40 mode – 5510MHz)		

## Radar Type 1 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5492	1	598	89	1
2	5492	1	578	92	1
3	5492	1	538	99	1
4	5492	1	818	65	1
5	5500	1	618	86	1
6	5500	1	3066	18	1
7	5500	1	658	81	1
8	5500	1	878	61	1
9	5508	1	698	76	1
10	5508	1	758	70	1
11	5508	1	778	68	1
12	5508	1	918	58	1
13	5510	1	678	78	1
14	5510	1	898	59	1
15	5510	1	558	95	1
16	5510	1	2915	19	1
17	5510	1	3044	18	1
18	5510	1	1803	30	1
19	5512	1	579	92	1
20	5512	1	2407	22	1
21	5512	1	2725	20	1
22	5512	1	2188	25	1
23	5520	1	2637	21	1
24	5520	1	1117	48	1
25	5520	1	689	77	1
26	5520	1	2609	21	1



Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
27	5529	1	2464	22	1
28	5529	1	1061	50	1
29	5529	1	862	62	1
30	5529	1	1568	34	1
Detection Percentage (%)					100%



## Radar Type 2 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5492	4.6	195	24	1
2	5492	4.8	230	27	1
3	5492	2.3	158	29	1
4	5492	4.1	213	28	1
5	5500	2.0	221	29	1
6	5500	4.2	187	28	1
7	5500	3.6	171	29	1
8	5500	5.0	222	28	1
9	5508	3.2	152	23	1
10	5508	2.8	174	27	1
11	5508	2.9	206	26	1
12	5508	2.2	157	27	1
13	5510	3.0	226	28	1
14	5510	4.7	153	27	1
15	5510	1.0	189	28	1
16	5510	4.9	181	27	1
17	5510	2.2	223	25	1
18	5510	2.2	208	29	1
19	5512	2.6	203	29	1
20	5512	1.8	221	24	1
21	5512	3.2	217	25	1
22	5512	1.2	189	24	1
23	5520	3.8	222	27	1
24	5520	3.8	189	28	1
25	5520	1.9	219	29	1
26	5520	1.0	184	28	1
27	5529	2.3	200	25	1
28	5529	1.1	199	28	1
29	5529	2.5	188	27	1
30	5529	1.1	179	28	1
Detection Percentage (%)					100%



## Radar Type 3 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5492	6.1	304	16	1
2	5492	7.6	306	18	1
3	5492	6.2	382	18	1
4	5492	9.9	312	18	1
5	5500	7.7	402	16	1
6	5500	7.9	388	18	1
7	5500	9.4	336	18	1
8	5500	9.1	351	17	1
9	5508	8.2	321	17	1
10	5508	9.9	288	17	1
11	5508	7.7	459	16	1
12	5508	7.9	469	18	1
13	5510	6.6	406	18	1
14	5510	8.1	281	17	1
15	5510	6.0	424	18	1
16	5510	9.4	364	18	1
17	5510	6.2	400	17	1
18	5510	6.6	339	18	1
19	5512	9.3	338	16	1
20	5512	8.4	345	16	1
21	5512	6.3	396	16	1
22	5512	9.3	492	16	1
23	5520	6.3	435	16	1
24	5520	6.9	265	16	1
25	5520	7.1	394	16	1
26	5520	8.9	321	18	1
27	5529	7.2	396	18	1
28	5529	7.1	385	18	1
29	5529	7.8	370	16	1
30	5529	7.5	374	17	1
Detection Percentage (%)					100%

## Radar Type 4 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5492	12.3	411	15	1
2	5492	17.0	306	16	1
3	5492	15.0	487	12	1
4	5492	16.6	484	14	1
5	5500	15.6	296	12	1
6	5500	16.2	250	15	1
7	5500	11.1	377	14	1
8	5500	11.5	460	15	1
9	5508	18.1	258	12	1
10	5508	19.4	377	13	1
11	5508	15.8	459	14	1
12	5508	12.7	313	16	1
13	5510	19.0	489	14	1
14	5510	16.6	356	15	1
15	5510	15.4	442	15	1
16	5510	18.6	322	14	1
17	5510	17.1	383	15	1
18	5510	17.2	442	15	1
19	5512	13.3	476	13	1
20	5512	13.8	305	13	1
21	5512	19.2	315	15	1
22	5512	16.2	278	16	1
23	5520	16.8	426	13	1
24	5520	16.9	324	14	1
25	5520	11.6	320	16	1
26	5520	12.7	469	14	1
27	5529	15.3	283	16	1
28	5529	19.3	412	15	1
29	5529	11.5	450	15	1
30	5529	16.6	308	13	1
Detection Percentage (%)					100%

Note: In addition an average minimum percentage of successful detection across all four Short pulse

radar test waveforms is as follows:  $\frac{P_d1+P_d2+P_d3+P_d4}{4} = (100\%+100\%+100\%+100\%)/4 = 100\%$

4



(>80%)



Radar Type 5 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5495.6	1	16	5510.0	1
2	5494.0	1	17	5510.0	1
3	5499.2	1	18	5510.0	1
4	5495.2	1	19	5510.0	1
5	5499.6	1	20	5510.0	1
6	5498.8	1	21	5523.4	1
7	5496.8	1	22	5522.2	1
8	5494.4	1	23	5525.8	1
9	5497.6	1	24	5525.0	1
10	5496.0	1	25	5521.8	1
11	5510.0	1	26	5526.6	1
12	5510.0	1	27	5525.4	1
13	5510.0	1	28	5521.4	1
14	5510.0	1	29	5524.2	1
15	5510.0	1	30	5527.0	1
Detection Percentage (%)					5296.8

Type 5 Radar Waveform_1										
Num of Bursts = 11										
Burst Interval (us)= 1090909										
Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri(us)	Pulse 2 Pri(us)	Pulse 3 Pri(us)	Start Loc (us)	Start Burst Interval(us)	End Burst Interval(us)
1	298238	3	9	80	1086	1669	1587	298238	0	1090908
2	1800499	2	9	65	1333	1628	0	2103079	1090909	2181817
3	521341	2	9	90	1503	1773	0	2627381	2181818	3272726
4	1723049	3	9	60	1720	1265	1374	4353706	3272727	4363635
5	677901	3	9	85	1249	1861	1596	5035966	4363636	5454544
6	940805	1	9	80	1235	0	0	5981477	5454545	6545453
7	901310	3	9	50	1986	1665	1900	6884022	6545454	7636362
8	1140243	3	9	75	1326	1367	1431	8029816	7636363	8727271
9	1135379	1	9	95	1936	0	0	9169319	8727272	9818180
10	1521409	3	9	60	1540	1651	1557	10692664	9818181	10909089
11	667348	1	9	95	1343	0	0	11364760	10909090	11999998
Total number of pulses in waveform = 25										
*****										



### Type 5 Radar Waveform\_2

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	254066	1	5	50	1498	0	0	254066	0	631578
2	635278	1	5	65	1451	0	0	635278	631579	1263157
3	505629	2	5	75	1941	1919	0	1397922	1263158	1894736
4	765561	3	5	75	1001	1927	1496	2168343	1894737	2526315
5	469669	2	5	50	1118	1981	0	2642436	2526316	3157894
6	579046	2	5	90	1637	1946	0	3224581	3157895	3789473
7	917327	1	5	55	1181	0	0	4145491	3789474	4421052
8	588145	3	5	85	1761	1095	1148	4734817	4421053	5052631
9	877958	3	5	80	1080	1492	1957	5616779	5052632	5684210
10	117195	3	5	70	1808	1704	1451	5738503	5684211	6315789
11	1151469	3	5	100	1572	1728	1995	6894935	6315790	6947368
12	301926	1	5	90	1476	0	0	7202156	6947369	7578947
13	814620	2	5	50	1239	1901	0	8018252	7578948	8210526
14	647017	3	5	70	1651	1196	1595	8688409	8210527	8842105
15	659939	1	5	85	1174	0	0	9332790	8842106	9473684
16	675764	3	5	95	1907	1679	1141	10009728	9473685	10105263
17	538474	1	5	90	1784	0	0	10552929	10105264	10736842
18	563208	2	5	75	1970	1967	0	11117921	10736843	11368421
19	715980	1	5	80	1933	0	0	11837838	11368422	12000000

Total number of pulses in waveform = 38  
\*\*\*\*\*

### Type 5 Radar Waveform\_3

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	997823	1	18	95	1315	0	0	997823	0	1499999
2	1666155	2	18	95	1248	1811	0	2665293	1500000	2999999
3	1043747	2	18	65	1990	1812	0	3712099	3000000	4499999
4	2070020	1	18	50	1060	0	0	5785921	4500000	5999999
5	979512	3	18	55	1828	1026	1709	6766493	6000000	7499999
6	1585392	2	18	80	1169	1547	0	8356448	7500000	8999999
7	1961575	2	18	90	1742	1699	0	10320739	9000000	10499999
8	319860	1	18	80	1984	0	0	10644040	10500000	11999999

Total number of pulses in waveform = 14  
\*\*\*\*\*

### Type 5 Radar Waveform\_4

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	118695	1	8	65	1889	0	0	118695	0	1090908
2	1111208	3	8	60	1910	1319	1407	1231792	1090909	2181817
3	1464191	1	8	75	1778	0	0	2700619	2181818	3272726
4	994771	2	8	50	1159	1071	0	3697168	3272727	4363635
5	1442958	1	8	65	1104	0	0	5142356	4363636	5454544
6	1353979	2	8	100	1420	1095	0	6497439	5454545	6545453
7	442633	2	8	95	1900	1289	0	6942587	6545454	7636362
8	1678399	2	8	60	1982	1387	0	8624175	7636363	8727271
9	626331	3	8	100	1325	1534	1807	9253875	8727272	9818180
10	1570452	2	8	85	1799	1565	0	10828993	9818181	10909089
11	624349	3	8	75	1349	1948	1047	11456706	10909090	11999998

Total number of pulses in waveform = 22  
\*\*\*\*\*



### Type 5 Radar Waveform\_5

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	228407	2	19	85	1437	1208	0	228407	0	705881
2	749750	2	19	80	1420	1952	0	980802	705882	1411763
3	972682	2	19	100	1708	1351	0	1956856	1411764	2117645
4	368474	2	19	85	1436	1901	0	2328389	2117646	2823527
5	875401	1	19	85	1943	0	0	3207127	2823528	3529409
6	515306	1	19	85	1875	0	0	3724376	3529410	4235291
7	939319	2	19	65	1144	1453	0	4665570	4235292	4941173
8	660330	1	19	85	1393	0	0	5328497	4941174	5647055
9	327509	1	19	80	1757	0	0	5657399	5647056	6352937
10	1311076	1	19	65	1249	0	0	6970232	6352938	7058819
11	448325	1	19	50	1459	0	0	7419806	7058820	7764701
12	344163	1	19	80	1030	0	0	7765428	7764702	8470583
13	914891	3	19	85	1957	1804	1016	8681349	8470584	9176465
14	611354	1	19	80	1319	0	0	9297480	9176466	9882347
15	866907	1	19	70	1863	0	0	10165706	9882348	10588229
16	1105423	1	19	90	1106	0	0	11272992	10588230	11294111
17	522472	3	19	75	1988	1084	1922	11796570	11294112	11999993

Total number of pulses in waveform = 26  
\*\*\*\*\*

### Type 5 Radar Waveform\_6

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	590225	1	17	65	1835	0	0	590225	0	1199999
2	1610961	3	17	55	1517	1033	1030	2203021	1200000	2399999
3	793412	3	17	90	1360	1030	1767	3000013	2400000	3599999
4	1528373	3	17	100	1845	1297	1373	4532543	3600000	4799999
5	1426680	3	17	95	1489	1693	1007	5963738	4800000	5999999
6	241006	1	17	95	1231	0	0	6208933	6000000	7199999
7	2015980	2	17	70	1085	1782	0	8226144	7200000	8399999
8	644709	3	17	100	1110	1859	1042	8873720	8400000	9599999
9	1102419	1	17	70	1794	0	0	9980150	9600000	10799999
10	1054716	3	17	95	1534	1848	1050	11036660	10800000	11999999

Total number of pulses in waveform = 23  
\*\*\*\*\*

### Type 5 Radar Waveform\_7

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	549439	2	12	65	1324	1519	0	549439	0	705881
2	309594	1	12	100	1122	0	0	861876	705882	1411763
3	1072731	1	12	60	1233	0	0	1935729	1411764	2117645
4	279067	2	12	75	1403	1675	0	2216029	2117646	2823527
5	1303451	2	12	75	1521	1501	0	3522558	2823528	3529409
6	371965	2	12	80	1504	1418	0	3897545	3529410	4235291
7	960342	2	12	100	1726	1671	0	4860809	4235292	4941173
8	108095	1	12	60	1484	0	0	4972301	4941174	5647055
9	881040	3	12	60	1272	1145	1932	5854825	5647056	6352937
10	1066628	1	12	70	1151	0	0	6925802	6352938	7058819
11	342545	3	12	70	1235	1359	1735	7269498	7058820	7764701
12	618111	3	12	75	1431	1641	1092	7891938	7764702	8470583
13	744811	2	12	60	1646	1637	0	8640913	8470584	9176465
14	713109	1	12	75	1588	0	0	9357305	9176466	9882347
15	774810	2	12	80	1256	1463	0	10133703	9882348	10588229
16	865011	1	12	65	1371	0	0	11001433	10588230	11294111
17	689033	2	12	95	1963	1004	0	11691837	11294112	11999993

Total number of pulses in waveform = 31  
\*\*\*\*\*



### Type 5 Radar Waveform\_8

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	347408	3	6	60	1844	1729	1917	347408	0	1333332
2	1653404	1	6	85	1224	0	0	2006302	1333333	2666665
3	679776	1	6	85	1492	0	0	2687302	2666666	3999998
4	1552227	1	6	55	1406	0	0	4241021	3999999	5333331
5	1491825	2	6	55	1659	1003	0	5734252	5333332	6666664
6	1809257	2	6	70	1324	1009	0	7546171	6666665	7999997
7	1686865	1	6	70	1286	0	0	9235369	7999998	9333330
8	670108	3	6	100	1379	1619	1063	9906763	9333331	10666663
9	1534333	2	6	80	1294	1087	0	11445157	10666664	11999996

Total number of pulses in waveform = 16  
\*\*\*\*\*

### Type 5 Radar Waveform\_9

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	258362	3	14	70	1065	1683	1381	258362	0	799999
2	857689	1	14	50	1998	0	0	1120180	800000	1599999
3	1138858	3	14	85	1852	1193	1989	2261036	1600000	2399999
4	491050	2	14	60	1106	1914	0	2757120	2400000	3199999
5	1123764	2	14	60	1320	1752	0	3883904	3200000	3999999
6	403913	1	14	65	1517	0	0	4290889	4000000	4799999
7	1109415	3	14	65	1296	1283	1951	5401821	4800000	5599999
8	334275	3	14	85	1493	1409	1493	5740626	5600000	6399999
9	1101349	1	14	80	1968	0	0	6846370	6400000	7199999
10	744397	2	14	55	1427	1299	0	7592735	7200000	7999999
11	853953	3	14	50	1317	1594	1089	8449414	8000000	8799999
12	835151	2	14	85	1309	1654	0	9288565	8800000	9599999
13	461226	2	14	75	1566	1318	0	9752754	9600000	10399999
14	1303957	2	14	95	1403	1769	0	11059595	10400000	11199999
15	794594	3	14	100	1370	1978	1751	11857361	11200000	11999999

Total number of pulses in waveform = 33  
\*\*\*\*\*

### Type 5 Radar Waveform\_10

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	194400	3	10	70	1786	1540	1448	194400	0	1333332
2	2423662	3	10	60	1950	1215	1724	2622836	1333333	2666665
3	621890	3	10	100	1807	1615	1683	3249615	2666666	3999998
4	1203167	3	10	95	1409	1955	1532	4457887	3999999	5333331
5	1062287	3	10	70	1789	1338	1376	5525070	5333332	6666664
6	2368616	2	10	65	1280	1478	0	7898189	6666665	7999997
7	627141	1	10	75	1275	0	0	8528088	7999998	9333330
8	1234338	2	10	50	1238	1860	0	9763701	9333331	10666663
9	904879	2	10	50	1894	1659	0	10671678	10666664	11999996

Total number of pulses in waveform = 22  
\*\*\*\*\*



### Type 5 Radar Waveform\_11

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	617223	1	18	70	1262	0	0	617223	0	631578
2	270470	2	18	50	1813	1171	0	888955	631579	1263157
3	489783	3	18	100	1313	1871	1090	1381722	1263158	1894736
4	899092	1	18	85	1784	0	0	2285088	1894737	2526315
5	434738	3	18	95	1277	1160	1427	2721610	2526316	3157894
6	511727	1	18	55	1127	0	0	3237201	3157895	3789473
7	772129	1	18	65	1390	0	0	4010457	3789474	4421052
8	614525	1	18	90	1731	0	0	4626372	4421053	5052631
9	558077	3	18	85	1692	1193	1874	5186180	5052632	5684210
10	650738	1	18	80	1889	0	0	5841677	5684211	6315789
11	918203	2	18	50	1741	1271	0	6761769	6315790	6947368
12	620288	1	18	85	1788	0	0	7385069	6947369	7578947
13	460522	1	18	70	1382	0	0	7847479	7578948	8210526
14	968641	1	18	50	1942	0	0	8817502	8210527	8842105
15	348638	3	18	90	1976	1356	1276	9168082	8842106	9473684
16	570387	1	18	55	1504	0	0	9743077	9473685	10105263
17	509247	2	18	70	1303	1162	0	10253828	10105264	10736842
18	528539	1	18	65	1743	0	0	10784832	10736843	11368421
19	593859	3	18	95	1691	1020	1415	11380434	11368422	12000000

Total number of pulses in waveform = 32  
\*\*\*\*\*

### Type 5 Radar Waveform\_12

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	20227	1	6	100	1799	0	0	20227	0	599999
2	672100	1	6	100	1418	0	0	694126	600000	1199999
3	513313	2	6	95	1785	1123	0	1208857	1200000	1799999
4	667347	1	6	55	1259	0	0	1879112	1800000	2399999
5	1030710	2	6	80	1104	1055	0	2911081	2400000	2999999
6	401025	3	6	100	1693	1692	1114	3314266	3000000	3599999
7	641243	2	6	75	1980	1149	0	3960008	3600000	4199999
8	644569	1	6	55	1176	0	0	4607706	4200000	4799999
9	424494	2	6	65	1478	1990	0	5033376	4800000	5399999
10	514928	3	6	60	1455	1917	1406	5551772	5400000	5999999
11	859830	3	6	60	1635	1622	1367	6416380	6000000	6599999
12	606203	3	6	70	1983	1098	1453	7027207	6600000	7199999
13	695649	2	6	50	1660	1062	0	7727390	7200000	7799999
14	457677	2	6	65	1724	1318	0	8187789	7800000	8399999
15	497856	3	6	85	1446	1368	1723	8688687	8400000	8999999
16	604418	1	6	50	1483	0	0	9297642	9000000	9599999
17	461860	1	6	70	1905	0	0	9760985	9600000	10199999
18	483011	3	6	90	1567	1395	1656	10245901	10200000	10799999
19	880323	3	6	70	1930	1273	1436	11130842	10800000	11399999
20	407617	3	6	100	1043	1703	1395	11643098	11400000	11999999

Total number of pulses in waveform = 42  
\*\*\*\*\*

### Type 5 Radar Waveform\_13

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	429647	2	8	50	1563	1971	0	429647	0	705881
2	529314	1	8	60	1024	0	0	962495	705882	1411763
3	686460	2	8	75	1133	1004	0	1649979	1411764	2117645
4	595338	1	8	75	1455	0	0	2247454	2117646	2823527
5	978007	1	8	90	1311	0	0	3226916	2823528	3529409
6	331405	2	8	70	1852	1477	0	3559632	3529410	4235291
7	1337061	3	8	80	1071	1670	1776	4900022	4235292	4941173
8	714880	2	8	60	1375	1277	0	5619419	4941174	5647055
9	536559	2	8	85	1716	1701	0	6158630	5647056	6352937
10	655537	1	8	75	1624	0	0	6817584	6352938	7058819
11	261868	2	8	85	1078	1368	0	7081136	7058820	7764701
12	836544	2	8	75	1708	1038	0	7920126	7764702	8470583
13	1139874	3	8	70	1458	1162	1595	9062746	8470584	9176465
14	197687	3	8	85	1716	1066	1411	9264648	9176466	9882347
15	1307101	3	8	70	1036	1135	1926	10575942	9882348	10588229
16	600569	2	8	55	1628	1606	0	11180608	10588230	11294111
17	779536	1	8	90	1033	0	0	11963378	11294112	11999993

Total number of pulses in waveform = 33  
\*\*\*\*\*



### Type 5 Radar Waveform\_14

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	576164	2	19	70	1834	1488	0	576164	0	705881
2	169137	3	19	75	1804	1977	1536	748623	705882	1411763
3	1046233	2	19	65	1652	1086	0	1800173	1411764	2117645
4	626408	1	19	85	1835	0	0	2429319	2117646	2823527
5	551955	2	19	100	1572	1229	0	2983109	2823528	3529409
6	1039382	1	19	75	1001	0	0	4025292	3529410	4235291
7	771520	3	19	50	1218	1681	1762	4797813	4235292	4941173
8	410696	3	19	75	1019	1455	1973	5213170	4941174	5647055
9	495465	3	19	75	1680	1710	1816	5713082	5647056	6352937
10	1138856	3	19	50	1355	1124	1809	6857144	6352938	7058819
11	315898	1	19	90	1301	0	0	7177330	7058820	7764701
12	1101273	3	19	85	1576	1415	1829	8279904	7764702	8470583
13	729769	3	19	85	1717	1222	1539	9014493	8470584	9176465
14	348500	2	19	80	1097	1038	0	9367471	9176466	9882347
15	764112	3	19	90	1715	1541	1077	10133718	9882348	10588229
16	665464	1	19	65	1026	0	0	10803515	10588230	11294111
17	692336	2	19	75	1575	1007	0	11496877	11294112	11999993

Total number of pulses in waveform = 38  
\*\*\*\*\*

### Type 5 Radar Waveform\_15

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	1490876	3	9	75	1574	1479	1835	1490876	0	1499999
2	952046	2	9	55	1638	1136	0	2447810	1500000	2999999
3	991442	2	9	70	1986	1650	0	3442026	3000000	4499999
4	2114789	1	9	55	1951	0	0	5560451	4500000	5999999
5	1001152	1	9	95	1046	0	0	6563554	6000000	7499999
6	1708354	3	9	50	1619	1657	1555	8272954	7500000	8999999
7	939724	2	9	55	1553	1501	0	9217509	9000000	10499999
8	2674043	1	9	80	1401	0	0	11894606	10500000	11999999

Total number of pulses in waveform = 15  
\*\*\*\*\*

### Type 5 Radar Waveform\_16

Num of Bursts = 14  
Burst Interval (us)= 857143

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	28831	1	14	60	1034	0	0	28831	0	857142
2	1377815	2	14	70	1866	1564	0	1407680	857143	1714285
3	786620	2	14	100	1788	1172	0	2197730	1714286	2571428
4	782795	3	14	95	1316	1835	1709	2983485	2571429	3428571
5	1190773	3	14	60	1217	1476	1817	4179118	3428572	4285714
6	567602	1	14	80	1536	0	0	4751230	4285715	5142857
7	921596	3	14	65	1520	1149	1809	5674362	5142858	6000000
8	368586	2	14	95	1020	1241	0	6047426	6000001	6857143
9	1146621	2	14	55	1881	1708	0	7196308	6857144	7714286
10	847312	2	14	55	1277	1426	0	8047209	7714287	8571429
11	1149347	2	14	85	1298	1317	0	9199259	8571430	9428572
12	880244	3	14	65	1180	1660	1612	10082118	9428573	10285715
13	769896	3	14	50	1422	1211	1686	10856466	10285716	11142858
14	701226	3	14	95	1510	1634	1176	11562011	11142859	12000001

Total number of pulses in waveform = 32  
\*\*\*\*\*



### Type 5 Radar Waveform\_17

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	521640	2	5	100	1389	1240	0	521640	0	599999
2	227904	1	5	95	1132	0	0	752173	600000	1199999
3	466315	3	5	55	1453	1660	1100	1219620	1200000	1799999
4	1162660	1	5	60	1693	0	0	2386493	1800000	2399999
5	592710	1	5	55	1633	0	0	2980896	2400000	2999999
6	403593	2	5	55	1131	1123	0	3386122	3000000	3599999
7	367882	1	5	60	1148	0	0	3756258	3600000	4199999
8	743911	2	5	100	1778	1729	0	4501317	4200000	4799999
9	410007	3	5	95	1207	1641	1538	4914831	4800000	5399999
10	760891	2	5	60	1704	1210	0	5679908	5400000	5999999
11	759716	1	5	70	1217	0	0	6442538	6000000	6599999
12	162743	2	5	75	1466	1696	0	6806498	6600000	7199999
13	630868	2	5	55	1272	1873	0	7240528	7200000	7799999
14	636443	2	5	65	1761	1191	0	7880116	7800000	8399999
15	688659	1	5	50	1802	0	0	8551727	8400000	8999999
16	1038298	3	5	70	1512	1690	1947	9591827	9000000	9599999
17	236268	3	5	50	1391	1208	1487	9833244	9600000	10199999
18	372322	2	5	55	1663	1181	0	10209652	10200000	10799999
19	1110939	1	5	70	1582	0	0	11323435	10800000	11399999
20	484759	2	5	60	1808	1904	0	11809776	11400000	11999999

Total number of pulses in waveform = 37  
\*\*\*\*\*

### Type 5 Radar Waveform\_18

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	666143	2	17	60	1768	1368	0	666143	0	705881
2	37174	3	17	60	1155	1078	1070	706453	705882	1411763
3	1354655	3	17	95	1264	1417	1626	2064411	1411764	2117645
4	520288	2	17	90	1334	1273	0	2589006	2117646	2823527
5	261802	2	17	100	1360	1819	0	2853415	2823528	3529409
6	1294194	3	17	70	1232	1852	1868	4150788	3529410	4235291
7	118145	2	17	60	1153	1949	0	4273885	4235292	4941173
8	1205362	3	17	80	1029	1585	1735	5482349	4941174	5647055
9	179139	2	17	80	1257	1162	0	5665837	5647056	6352937
10	1361232	2	17	60	1460	1348	0	7029488	6352938	7058819
11	77861	2	17	60	1896	1990	0	7110157	7058820	7764701
12	717940	2	17	90	1501	1890	0	7831983	7764702	8470583
13	780726	2	17	100	1028	1726	0	8616100	8470584	9176465
14	661510	3	17	95	1137	1260	1899	9280364	9176466	9882347
15	825515	2	17	60	1329	1495	0	10110175	9882348	10588229
16	893827	3	17	75	1218	1538	1438	11006826	10588230	11294111
17	770006	1	17	60	1500	0	0	11781026	11294112	11999993

Total number of pulses in waveform = 39  
\*\*\*\*\*

### Type 5 Radar Waveform\_19

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	62612	2	10	95	1757	1338	0	62612	0	1499999
2	2135931	1	10	90	1014	0	0	2201638	1500000	2999999
3	2176748	1	10	100	1157	0	0	4379400	3000000	4499999
4	190324	2	10	75	1622	1373	0	4570881	4500000	5999999
5	2404976	3	10	85	1216	1049	1015	6978852	6000000	7499999
6	1220073	1	10	70	1574	0	0	8202205	7500000	8999999
7	2197751	1	10	50	1037	0	0	10401530	9000000	10499999
8	1001172	1	10	70	1106	0	0	11403739	10500000	11999999

Total number of pulses in waveform = 12  
\*\*\*\*\*





### Type 5 Radar Waveform\_20

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	356408	3	12	60	1868	1071	1925	356408	0	631578
2	429819	3	12	90	1633	1344	1369	791081	631579	1263157
3	541878	2	12	95	1431	1407	0	1337305	1263158	1894736
4	798274	1	12	85	1344	0	0	2138417	1894737	2526315
5	701218	3	12	50	1649	1289	1681	2840979	2526316	3157894
6	603556	1	12	60	1311	0	0	3449154	3157895	3789473
7	712165	2	12	75	1272	1160	0	4162630	3789474	4421052
8	532330	3	12	60	1496	1969	1110	4697392	4421053	5052631
9	763799	3	12	55	1686	1404	1098	5465766	5052632	5684210
10	268352	2	12	75	1426	1389	0	5738306	5684211	6315789
11	659768	1	12	90	1536	0	0	6400889	6315790	6947368
12	747707	3	12	70	1041	1815	1058	7150132	6947369	7578947
13	458204	2	12	60	1941	1644	0	7612250	7578948	8210526
14	903092	3	12	60	1983	1269	1296	8518927	8210527	8842105
15	922640	1	12	85	1816	0	0	9446115	8842106	9473684
16	350733	2	12	55	1166	1248	0	9798664	9473685	10105263
17	845901	1	12	55	1884	0	0	10646979	10105264	10736842
18	491042	3	12	60	1742	1621	1171	11139905	10736843	11368421
19	369678	3	12	90	1677	1681	1451	11514117	11368422	12000000

Total number of pulses in waveform = 42  
\*\*\*\*\*

### Type 5 Radar Waveform\_21

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	676334	2	14	55	1389	1586	0	676334	0	923076
2	245861	1	14	50	1152	0	0	925170	923077	1846153
3	1639421	3	14	100	1368	1269	1883	2565743	1846154	2769230
4	207571	3	14	60	1555	1557	1550	2777834	2769231	3692307
5	1788859	1	14	100	1885	0	0	4571355	3692308	4615384
6	894385	2	14	90	1084	1824	0	5467625	4615385	5538461
7	836990	1	14	90	1810	0	0	6307523	5538462	6461538
8	595592	3	14	80	1231	1547	1830	6904925	6461539	7384615
9	922906	2	14	90	1043	1646	0	7832439	7384616	8307692
10	605088	3	14	55	1191	1259	1849	8440216	8307693	9230769
11	1324637	3	14	70	1196	1852	1563	9769152	9230770	10153846
12	965543	2	14	95	1403	1958	0	10739306	10153847	11076923
13	882902	2	14	95	1816	1407	0	11625569	11076924	12000000

Total number of pulses in waveform = 28  
\*\*\*\*\*

### Type 5 Radar Waveform\_22

Num of Bursts = 12  
Burst Interval (us)= 1000000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	866338	2	17	85	1613	1884	0	866338	0	999999
2	376573	3	17	60	1642	1545	1517	1246408	1000000	1999999
3	1734801	1	17	70	1860	0	0	2985913	2000000	2999999
4	405365	3	17	95	1206	1747	1982	3393138	3000000	3999999
5	621858	3	17	55	1201	1541	1322	4019931	4000000	4999999
6	1823934	2	17	55	1901	1789	0	5847929	5000000	5999999
7	994185	3	17	60	1073	1817	1009	6845804	6000000	6999999
8	667744	1	17	85	1529	0	0	7517447	7000000	7999999
9	1285243	3	17	90	1465	1504	1110	8804219	8000000	8999999
10	935942	1	17	65	1428	0	0	9744240	9000000	9999999
11	676593	1	17	65	1598	0	0	10422261	10000000	10999999
12	1204042	1	17	100	1513	0	0	11627901	11000000	11999999

Total number of pulses in waveform = 24  
\*\*\*\*\*



### Type 5 Radar Waveform\_23

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	180114	3	8	100	1237	1298	1137	180114	0	749999
2	578114	1	8	60	1684	0	0	761900	750000	1499999
3	1443602	3	8	70	1277	1940	1683	2207186	1500000	2249999
4	311627	2	8	85	1126	1729	0	2523713	2250000	2999999
5	527145	2	8	90	1351	1670	0	3053713	3000000	3749999
6	1424112	3	8	55	1388	1583	1641	4480846	3750000	4499999
7	679208	1	8	75	1067	0	0	5164666	4500000	5249999
8	282860	1	8	100	1719	0	0	5448593	5250000	5999999
9	871841	1	8	80	1288	0	0	6322153	6000000	6749999
10	801265	3	8	70	1419	1924	1688	7124706	6750000	7499999
11	488302	3	8	95	1414	1266	1492	7618039	7500000	8249999
12	986207	1	8	80	1048	0	0	8608418	8250000	8999999
13	477245	2	8	70	1208	1929	0	9086711	9000000	9749999
14	1289686	1	8	95	1210	0	0	10379534	9750000	10499999
15	683949	2	8	65	1488	1788	0	11064693	10500000	11249999
16	888447	3	8	65	1447	1745	1756	11956416	11250000	11999999

Total number of pulses in waveform = 32  
\*\*\*\*\*

### Type 5 Radar Waveform\_24

Num of Bursts = 17  
Burst Interval (us)= 705882

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	566228	3	10	60	1760	1048	1815	566228	0	705881
2	690321	2	10	95	1574	1759	0	1261172	705882	1411763
3	229409	3	10	75	1102	1428	1391	1493914	1411764	2117645
4	978176	3	10	100	1320	1112	1644	2476011	2117646	2823527
5	1025637	3	10	100	1810	1966	1672	3505724	2823528	3529409
6	319190	3	10	70	1989	1600	1071	3830362	3529410	4235291
7	545889	3	10	55	1945	1700	1927	4380911	4235292	4941173
8	961134	1	10	80	1702	0	0	5347617	4941174	5647055
9	744687	1	10	70	1326	0	0	6094006	5647056	6352937
10	695644	2	10	100	1824	1839	0	6790976	6352938	7058819
11	930426	2	10	100	1061	1240	0	7725065	7058820	7764701
12	290938	1	10	90	1648	0	0	8018304	7764702	8470583
13	549901	3	10	55	1004	1842	1663	8569853	8470584	9176465
14	747425	1	10	80	1808	0	0	9321787	9176466	9882347
15	737852	1	10	65	1972	0	0	10061447	9882348	10588229
16	617029	1	10	55	1741	0	0	10680448	10588230	11294111
17	943473	1	10	80	1975	0	0	11625662	11294112	11999993

Total number of pulses in waveform = 34  
\*\*\*\*\*

### Type 5 Radar Waveform\_25

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	64003	3	18	75	1964	1019	1591	64003	0	666666
2	1183775	2	18	85	1825	1731	0	1252352	666667	1333333
3	107539	1	18	90	1800	0	0	1363447	1333334	2000000
4	1195324	1	18	85	1805	0	0	2560571	2000001	2666667
5	296710	1	18	55	1902	0	0	2859086	2666668	3333334
6	670968	3	18	65	1007	1226	1706	3531956	3333335	4000001
7	664123	1	18	65	1195	0	0	4200018	4000002	4666668
8	605349	3	18	65	1207	1777	1352	4806562	4666669	5333335
9	1045931	2	18	60	1355	1702	0	5856829	5333336	6000002
10	773699	1	18	60	1829	0	0	6633585	6000003	6666669
11	500994	3	18	80	1587	1300	1923	7136408	6666670	7333336
12	346805	2	18	75	1051	1187	0	7488023	7333337	8000003
13	840250	2	18	50	1806	1825	0	8330511	8000004	8666670
14	520763	2	18	90	1462	1687	0	8854905	8666671	9333337
15	733975	2	18	75	1801	1808	0	9592029	9333338	10000004
16	918848	1	18	100	1851	0	0	10514486	10000005	10666671
17	758569	1	18	55	1955	0	0	11274906	10666672	11333338
18	314947	1	18	65	1740	0	0	11591808	11333339	12000005

Total number of pulses in waveform = 32  
\*\*\*\*\*



### Type 5 Radar Waveform\_26

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	849735	3	6	55	1606	1517	1325	849735	0	1199999
2	669750	3	6	90	1872	1110	1687	1523933	1200000	2399999
3	1422622	1	6	70	1329	0	0	2951224	2400000	3599999
4	807109	1	6	65	1768	0	0	3759662	3600000	4799999
5	1432428	1	6	60	1950	0	0	5193858	4800000	5999999
6	1514943	3	6	80	1635	1481	1472	6710751	6000000	7199999
7	1520563	3	6	85	1100	1914	1747	8235902	7200000	8399999
8	492049	1	6	100	1453	0	0	8732712	8400000	9599999
9	1750864	3	6	50	1663	1922	1380	10485029	9600000	10799999
10	1197540	1	6	60	1254	0	0	11687534	10800000	11999999

Total number of pulses in waveform = 20

\*\*\*\*\*

### Type 5 Radar Waveform\_27

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	187066	1	9	60	1448	0	0	187066	0	631578
2	956160	3	9	55	1898	1996	1892	1143674	631579	1263157
3	310799	2	9	95	1239	1673	0	1460259	1263158	1894736
4	976833	2	9	90	1855	1387	0	2440004	1894737	2526315
5	440576	2	9	90	1742	1167	0	2883822	2526316	3157894
6	733855	1	9	80	1462	0	0	3620586	3157895	3789473
7	414183	1	9	90	1395	0	0	4036231	3789474	4421052
8	823471	2	9	60	1672	1252	0	4861097	4421053	5052631
9	481394	3	9	100	1445	1523	1482	5345415	5052632	5684210
10	686839	2	9	75	1945	1647	0	6036704	5684211	6315789
11	473127	3	9	75	1256	1403	1093	6513423	6315790	6947368
12	530432	3	9	85	1438	1277	1276	7047607	6947369	7578947
13	620283	2	9	55	1324	1187	0	7671881	7578948	8210526
14	927445	3	9	70	1413	1813	1469	8601837	8210527	8842105
15	279946	3	9	60	1146	1792	1062	8886478	8842106	9473684
16	686507	1	9	65	1389	0	0	9576985	9473685	10105263
17	942738	3	9	50	1788	1300	1993	10521112	10105264	10736842
18	512730	1	9	95	1879	0	0	11038923	10736843	11368421
19	602989	2	9	70	1495	1956	0	11643791	11368422	12000000

Total number of pulses in waveform = 40

\*\*\*\*\*

### Type 5 Radar Waveform\_28

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	149998	1	19	75	1349	0	0	149998	0	1199999
2	1147126	2	19	60	1099	1213	0	1298473	1200000	2399999
3	1278172	3	19	100	1102	1531	1523	2578957	2400000	3599999
4	1809644	1	19	90	1602	0	0	4392757	3600000	4799999
5	537947	2	19	80	1231	1365	0	4932306	4800000	5999999
6	2228786	3	19	100	1512	1524	1000	7163688	6000000	7199999
7	785606	1	19	80	1165	0	0	7953330	7200000	8399999
8	842928	1	19	95	1253	0	0	8797423	8400000	9599999
9	1934376	1	19	60	1306	0	0	10733052	9600000	10799999
10	350624	1	19	65	1094	0	0	11084982	10800000	11999999

Total number of pulses in waveform = 16

\*\*\*\*\*



**Type 5 Radar Waveform\_29**

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	536985	3	12	75	1646	1572	1262	536985	0	749999
2	475343	3	12	95	1557	1933	1708	1016808	750000	1499999
3	948518	2	12	70	1044	1893	0	1970524	1500000	2249999
4	830153	1	12	80	1802	0	0	2803614	2250000	2999999
5	398241	1	12	75	1735	0	0	3203657	3000000	3749999
6	1185526	3	12	65	1859	1109	1996	4390918	3750000	4499999
7	523953	2	12	90	1714	1284	0	4919835	4500000	5249999
8	1069309	3	12	55	1258	1562	1867	5992142	5250000	5999999
9	486784	2	12	85	1332	1165	0	6483613	6000000	6749999
10	878316	3	12	100	1613	1364	1306	7364426	6750000	7499999
11	383109	2	12	100	1365	1699	0	7751818	7500000	8249999
12	580427	1	12	65	1819	0	0	8335309	8250000	8999999
13	795345	2	12	80	1528	1367	0	9132473	9000000	9749999
14	1246434	1	12	85	1076	0	0	10381802	9750000	10499999
15	744021	3	12	100	1456	1240	1146	11126899	10500000	11249999
16	517465	3	12	55	1137	1758	1474	11648206	11250000	11999999

Total number of pulses in waveform = 35  
\*\*\*\*\*

**Type 5 Radar Waveform\_30**

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	186758	2	5	95	1879	1207	0	186758	0	1090908
2	1945487	1	5	90	1379	0	0	2135331	1090909	2181817
3	392197	1	5	50	1957	0	0	2528907	2181818	3272726
4	1288467	1	5	80	1567	0	0	3819331	3272727	4363635
5	1533144	1	5	80	1415	0	0	5354042	4363636	5454544
6	335661	1	5	50	1756	0	0	5691118	5454545	6545453
7	1651832	2	5	55	1096	1880	0	7344706	6545454	7636362
8	431692	3	5	65	1282	1305	1886	7779374	7636363	8727271
9	1435824	2	5	75	1422	1803	0	9219671	8727272	9818180
10	826582	3	5	55	1712	1159	1580	10049478	9818181	10909089
11	1194171	1	5	55	1595	0	0	11248100	10909090	11999998

Total number of pulses in waveform = 18  
\*\*\*\*\*



Radar Type 6 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5492	1	16	5510	1
2	5492	1	17	5510	1
3	5492	1	18	5510	1
4	5492	1	19	5512	1
5	5500	1	20	5512	1
6	5500	1	21	5512	1
7	5500	1	22	5512	1
8	5500	1	23	5520	1
9	5508	1	24	5520	1
10	5508	1	25	5520	1
11	5508	1	26	5520	1
12	5508	1	27	5529	1
13	5510	1	28	5529	1
14	5510	1	29	5529	1
15	5510	1	30	5529	1
Detection Percentage (%)					100%



Radar waveform #1			Radar waveform #2		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
4	5490	12	7	5515	21
6	5467	18	12	5474	36
22	5520	66	25	5505	75
35	5470	105	41	5477	123
44	5511	132	47	5481	141
45	5503	135	58	5479	174
61	5517	183	59	5513	177
62	5486	186	62	5470	186
64	5475	192	63	5463	189
65	5476	195	75	5512	225
66	5474	198	82	5518	246
84	5465	252	92	5488	276
93	5497	279	93	5520	279

Radar waveform #3			Radar waveform #4		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5513	0	11	5490	33
3	5466	9	45	5508	135
6	5497	18	59	5509	177
15	5522	45	60	5512	180
32	5470	96	62	5478	186
41	5500	123	71	5484	213
44	5473	132	85	5486	255
48	5493	144	89	5518	267
61	5516	183	99	5465	297
72	5515	216	--	--	--
81	5475	243	--	--	--
82	5494	246	--	--	--
86	5517	258	--	--	--
89	5488	267	--	--	--



Radar waveform #5			Radar waveform #6		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5515	9	5	5516	15
8	5512	24	12	5490	36
10	5497	30	19	5482	57
11	5525	33	34	5480	102
39	5518	117	36	5519	108
54	5513	162	40	5520	120
62	5491	186	45	5503	135
64	5517	192	58	5521	174
66	5471	198	59	5518	177
67	5523	201	62	5484	186
83	5526	249	78	5502	234
91	5474	273	88	5486	264
94	5510	282	97	5506	291

Radar waveform #7			Radar waveform #8		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5523	0	25	5502	75
22	5495	66	26	5517	78
34	5494	102	39	5525	117
37	5525	111	51	5478	153
46	5517	138	55	5527	165
58	5478	174	57	5482	171
68	5524	204	73	5524	219
70	5520	210	83	5470	249
79	5489	237	85	5479	255
90	5507	270	86	5487	258
97	5508	291	93	5528	279
--	--	--	96	5505	288
--	--	--	98	5486	294
--	--	--	99	5526	297





Radar waveform #9			Radar waveform #10		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5537	9	3	5517	9
10	5511	30	19	5486	57
21	5512	63	26	5509	78
23	5527	69	31	5515	93
26	5491	78	33	5521	99
37	5534	111	37	5532	111
42	5531	126	41	5495	123
45	5528	135	44	5508	132
47	5494	141	45	5487	135
50	5508	150	49	5529	147
53	5489	159	59	5498	177
66	5506	198	65	5500	195
78	5523	234	73	5501	219
--	--	--	82	5526	246
--	--	--	87	5506	261
--	--	--	90	5535	270
--	--	--	97	5512	291

Radar waveform #11			Radar waveform #12		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5497	15	3	5538	9
8	5513	24	23	5510	69
18	5506	54	29	5522	87
20	5489	60	39	5512	117
25	5537	75	51	5528	153
28	5484	84	62	5507	186
35	5511	105	64	5526	192
51	5491	153	65	5506	195
56	5512	168	91	5504	273
72	5535	216	95	5519	285
73	5531	219	98	5495	294
82	5528	246	--	--	--
85	5522	255	--	--	--



---

92	5482	276	--	--	--
97	5534	291	--	--	--
99	5498	297	--	--	--



Radar waveform #13			Radar waveform #14		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5523	15	17	5511	51
13	5493	39	26	5513	78
23	5522	69	28	5497	84
32	5515	96	32	5522	96
48	5513	144	36	5489	108
52	5504	156	51	5536	153
57	5498	171	52	5486	156
66	5530	198	54	5505	162
76	5489	228	55	5515	165
77	5481	231	79	5480	237
91	5520	273	83	5509	249
93	5512	279	85	5482	255
--	--	--	93	5528	279
--	--	--	94	5493	282
--	--	--	96	5520	288
--	--	--	98	5516	294

Radar waveform #15			Radar waveform #16		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
13	5486	39	1	5506	3
29	5496	87	17	5504	51
33	5489	99	21	5486	63
42	5504	126	28	5515	84
52	5533	156	38	5531	114
57	5532	171	41	5499	123
59	5510	177	51	5538	153
64	5520	192	54	5539	162
79	5506	237	59	5527	177
81	5519	243	81	5490	243
--	--	--	82	5525	246
--	--	--	83	5513	249
--	--	--	87	5532	261
--	--	--	95	5523	285



Radar waveform #17			Radar waveform #18		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
13	5499	39	0	5494	0
20	5490	60	2	5486	6
22	5496	66	5	5485	15
41	5535	123	15	5496	45
42	5480	126	20	5521	60
45	5540	135	29	5533	87
46	5530	138	31	5530	93
49	5503	147	32	5514	96
50	5512	150	39	5515	117
52	5484	156	60	5538	180
60	5513	180	74	5507	222
68	5501	204	--	--	--
69	5533	207	--	--	--
78	5505	234	--	--	--
79	5529	237	--	--	--
85	5489	255	--	--	--
90	5516	270	--	--	--

Radar waveform #19			Radar waveform #20		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
7	5491	21	4	5498	12
8	5517	24	22	5516	66
27	5496	81	27	5500	81
52	5514	156	37	5533	111
57	5515	171	43	5491	129
79	5531	237	47	5514	141
99	5492	297	48	5541	144
--	--	--	59	5529	177
--	--	--	61	5524	183
--	--	--	62	5496	186
--	--	--	73	5537	219
--	--	--	77	5507	231
--	--	--	87	5526	261



---

--	--	--	98	5505	294
----	----	----	----	------	-----



Radar waveform #21			Radar waveform #22		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
1	5503	3	1	5499	3
11	5497	33	4	5513	12
32	5527	96	27	5483	81
34	5502	102	34	5514	102
42	5512	126	38	5535	114
49	5525	147	41	5486	123
65	5490	195	55	5541	165
87	5495	261	60	5517	180
88	5485	264	80	5506	240
89	5504	267	82	5516	246
97	5537	291	86	5542	258
98	5482	294	91	5494	273
99	5506	297	93	5520	279
--	--	--	96	5490	288

Radar waveform #23			Radar waveform #24		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
4	5538	12	2	5506	6
5	5513	15	9	5542	27
13	5533	39	14	5549	42
14	5500	42	16	5539	48
19	5535	57	25	5493	75
27	5547	81	31	5494	93
46	5537	138	99	5538	297
56	5541	168	--	--	--
60	5544	180	--	--	--
66	5506	198	--	--	--
67	5522	201	--	--	--
69	5531	207	--	--	--
87	5505	261	--	--	--
89	5502	267	--	--	--
92	5517	276	--	--	--
93	5496	279	--	--	--



---

98	5514	294	--	--	--
----	------	-----	----	----	----



Radar waveform #25			Radar waveform #26		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5518	15	0	5533	0
14	5521	42	19	5524	57
15	5520	45	28	5495	84
17	5509	51	63	5537	189
27	5523	81	70	5532	210
30	5538	90	76	5547	228
32	5502	96	77	5536	231
49	5519	147	82	5542	246
60	5497	180	--	--	--
62	5539	186	--	--	--
63	5533	189	--	--	--
71	5490	213	--	--	--
77	5527	231	--	--	--
78	5526	234	--	--	--
79	5547	237	--	--	--
86	5532	258	--	--	--
90	5529	270	--	--	--
91	5513	273	--	--	--

Radar waveform #27			Radar waveform #28		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
7	5538	21	9	5555	27
13	5532	39	14	5534	42
39	5535	117	16	5528	48
46	5502	138	20	5506	60
52	5518	156	40	5509	120
62	5516	186	43	5553	129
75	5506	225	44	5530	132
80	5524	240	45	5503	135
--	--	--	59	5541	177
--	--	--	70	5549	210
--	--	--	82	5547	246
--	--	--	84	5502	252





Radar waveform #29			Radar waveform #30		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5520	9	0	5548	0
7	5521	21	7	5551	21
13	5507	39	15	5524	45
15	5531	45	18	5498	54
21	5526	63	33	5502	99
22	5557	66	41	5522	123
24	5532	72	46	5523	138
37	5542	111	48	5517	144
39	5525	117	52	5558	156
46	5503	138	67	5504	201
61	5535	183	69	5543	207
70	5540	210	82	5515	246
71	5523	213	84	5514	252
74	5511	222	--	--	--
77	5498	231	--	--	--



Product	WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB	Temperature	27°C
Test Engineer	Amy Zhang	Relative Humidity	65%
Test Site	TR5	Test Date	2018/08/29
Test Item	Radar Statistical Performance Check (802.11ac-VHT80 mode – 5530MHz)		

## Radar Type 1 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	1	578	92	1
2	5491	1	878	61	1
3	5500	1	538	99	1
4	5500	1	818	65	1
5	5509	1	918	58	1
6	5509	1	838	63	1
7	5510	1	858	62	1
8	5510	1	518	102	1
9	5511	1	738	72	1
10	5511	1	638	83	1
11	5520	1	798	67	1
12	5520	1	938	57	1
13	5529	1	678	78	1
14	5529	1	558	95	1
15	5530	1	718	74	1
16	5530	1	793	67	1
17	5531	1	2220	24	1
18	5531	1	2423	22	1
19	5540	1	1357	39	1
20	5540	1	1877	29	1
21	5549	1	681	78	1
22	5549	1	703	76	1
23	5550	1	2979	18	1
24	5550	1	1196	45	1
25	5551	1	2482	22	1
26	5551	1	2299	23	1



Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
27	5560	1	1375	39	1
28	5560	1	2613	21	1
29	5569	1	1407	38	1
30	5569	1	1719	31	1
Detection Percentage (%)					100%



## Radar Type 2 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	4.4	229	29	1
2	5491	4.5	187	29	1
3	5500	3.2	209	23	1
4	5500	3.9	161	26	1
5	5509	3.6	208	24	1
6	5509	3.0	218	27	1
7	5510	3.8	190	29	1
8	5510	2.5	173	26	1
9	5511	5.0	158	26	1
10	5511	2.2	193	29	1
11	5520	5.0	222	27	1
12	5520	2.2	161	27	1
13	5529	3.7	187	29	1
14	5529	1.2	168	27	1
15	5530	4.0	194	27	1
16	5530	3.9	222	23	1
17	5531	3.3	215	26	1
18	5531	4.9	170	23	1
19	5540	3.5	216	29	1
20	5540	2.2	183	26	1
21	5549	1.2	166	25	1
22	5549	2.7	186	26	1
23	5550	2.7	182	29	1
24	5550	1.1	195	29	1
25	5551	1.9	179	28	1
26	5551	2.7	225	26	1
27	5560	2.3	230	23	1
28	5560	5.0	178	24	1
29	5569	2.1	202	26	1
30	5569	1.2	163	23	1
Detection Percentage (%)					100%



## Radar Type 3 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	7.9	424	17	1
2	5491	8.5	359	18	1
3	5500	9.1	383	17	1
4	5500	9.4	467	17	1
5	5509	7.8	419	16	1
6	5509	7.8	497	18	1
7	5510	6.8	369	17	1
8	5510	7.2	269	18	1
9	5511	7.2	296	17	1
10	5511	9.4	413	16	1
11	5520	6.7	302	16	1
12	5520	8.7	409	16	1
13	5529	9.8	467	17	1
14	5529	7.9	304	18	1
15	5530	8.5	279	17	1
16	5530	8.7	371	17	1
17	5531	8.9	398	17	1
18	5531	8.6	485	17	1
19	5540	8.1	483	16	1
20	5540	8.2	277	18	1
21	5549	6.0	397	18	1
22	5549	8.4	352	18	1
23	5550	7.2	300	17	1
24	5550	8.0	455	18	1
25	5551	7.5	265	17	1
26	5551	7.3	254	17	1
27	5560	8.7	381	18	1
28	5560	7.1	282	17	1
29	5569	9.1	287	16	1
30	5569	7.0	470	17	1
Detection Percentage (%)					100%



Radar Type 4 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	Pulse Width (us)	PRI (us)	Pulses / Burst	1=Detection 0=No Detection
1	5491	16.0	392	12	1
2	5491	14.5	472	16	1
3	5500	18.8	275	15	1
4	5500	19.3	258	12	1
5	5509	16.2	313	15	1
6	5509	16.0	464	13	1
7	5510	15.8	290	12	1
8	5510	14.6	474	13	1
9	5511	19.0	475	15	1
10	5511	16.8	283	15	1
11	5520	18.4	352	15	1
12	5520	18.5	257	13	1
13	5529	17.9	355	14	1
14	5529	14.9	327	12	1
15	5530	16.4	482	13	1
16	5530	16.5	477	16	1
17	5531	15.7	330	12	1
18	5531	11.6	386	16	1
19	5540	16.5	272	16	1
20	5540	13.7	345	15	1
21	5549	12.3	367	13	1
22	5549	13.3	287	13	1
23	5550	15.5	446	14	1
24	5550	18.5	445	12	1
25	5551	15.2	278	13	1
26	5551	17.8	349	12	1
27	5560	11.5	305	15	1
28	5560	18.6	496	14	1
29	5569	18.6	328	14	1
30	5569	14.2	413	16	1
Detection Percentage (%)					100%

Note: In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is as follows:  $\frac{P_d1+P_d2+P_d3+P_d4}{4} = (100\%+100\%+100\%+100\%)/4 = 100\%$

(>80%)



Radar Type 5 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5498.6	1	16	5530	1
2	5497.8	1	17	5530	1
3	5493.4	1	18	5530	1
4	5494.6	1	19	5530	1
5	5495.0	1	20	5530	1
6	5498.2	1	21	5562.2	1
7	5493.0	1	22	5566.6	1
8	5495.8	1	23	5561.8	1
9	5494.2	1	24	5561.4	1
10	5496.6	1	25	5565.8	1
11	5530.0	1	26	5567.0	1
12	5530.0	1	27	5565.0	1
13	5530.0	1	28	5565.4	1
14	5530.0	1	29	5563.4	1
15	5530.0	1	30	5564.2	1
Detection Percentage (%)					100%

Type 5 Radar Waveform_1										
Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	563502	3	19	60	1706	1556	1885	563502	0	569999
2	602485	2	19	75	1906	1820	0	1171134	600000	1199999
3	567204	3	19	80	1676	1204	1699	1741464	1200000	1799999
4	604984	2	19	65	1716	1576	0	2351027	1800000	2399999
5	512664	3	19	100	1551	1232	1334	2866983	2400000	2999999
6	518661	2	19	90	1144	1051	0	3389761	3000000	3599999
7	358488	3	19	95	1832	1409	1688	3750444	3600000	4199999
8	707461	1	19	80	1599	0	0	4462834	4200000	4799999
9	489523	3	19	65	1554	1400	1994	4953956	4800000	5399999
10	723545	1	19	60	1186	0	0	5682449	5400000	5999999
11	565593	1	19	80	1842	0	0	6249228	6000000	6599999
12	606790	1	19	85	1238	0	0	6857860	6600000	7199999
13	777445	1	19	100	1778	0	0	7636543	7200000	7799999
14	436257	2	19	70	1330	1418	0	8074578	7800000	8399999
15	733880	2	19	55	1372	1796	0	8811206	8400000	8999999
16	714003	1	19	90	1513	0	0	9528377	9000000	9599999
17	247607	3	19	85	1342	1519	1933	9777697	9600000	10199999
18	761190	1	19	60	1637	0	0	10543681	10200000	10799999
19	795725	1	19	70	1342	0	0	11341043	10800000	11399999
20	418588	2	19	50	1318	1851	0	11760973	11400000	11999999
Total number of pulses in waveform = 38										
*****										





### Type 5 Radar Waveform\_2

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	624353	3	17	65	1797	1148	1448	624353	0	1499999
2	2125257	1	17	70	1610	0	0	2754003	1500000	2999999
3	852235	3	17	95	1169	1689	1598	3607848	3000000	4499999
4	1822322	2	17	80	1521	1125	0	5434626	4500000	5999999
5	1019762	3	17	60	1848	1817	1412	6457034	6000000	7499999
6	1455911	1	17	95	1907	0	0	7918022	7500000	8999999
7	2403628	3	17	50	1311	1235	1480	10323557	9000000	10499999
8	674956	3	17	60	1303	1345	1458	11002539	10500000	11999999

Total number of pulses in waveform = 19

\*\*\*\*\*

### Type 5 Radar Waveform\_3

Num of Bursts = 20

Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	18660	3	6	65	1073	1019	1603	18660	0	599999
2	864139	3	6	90	1037	1213	1080	886494	600000	1199999
3	577274	3	6	100	1308	1746	1005	1467098	1200000	1799999
4	385017	2	6	60	1016	1804	0	1856174	1800000	2399999
5	796472	3	6	85	1490	1203	1312	2654466	2400000	2999999
6	911300	1	6	55	1825	0	0	3569771	3000000	3599999
7	78815	2	6	65	1132	1069	0	3650411	3600000	4199999
8	812199	3	6	100	1698	1144	1418	4464811	4200000	4799999
9	647879	3	6	60	1221	1344	1573	5116950	4800000	5399999
10	504467	2	6	80	1057	1675	0	5625555	5400000	5999999
11	850672	3	6	85	1473	1432	1969	6478959	6000000	6599999
12	400810	3	6	100	1097	1822	1074	6884643	6600000	7199999
13	616643	2	6	100	1415	1157	0	7505179	7200000	7799999
14	584653	3	6	70	1418	1355	1178	8092404	7800000	8399999
15	757774	1	6	75	1790	0	0	8854129	8400000	8999999
16	508922	2	6	70	1414	1581	0	9364841	9000000	9599999
17	574806	2	6	80	1439	1204	0	9942642	9600000	10199999
18	714299	2	6	65	1156	1399	0	10659578	10200000	10799999
19	252143	1	6	55	1364	0	0	10914276	10800000	11399999
20	790909	1	6	50	1101	0	0	11706549	11400000	11999999

Total number of pulses in waveform = 45

\*\*\*\*\*

### Type 5 Radar Waveform\_4

Num of Bursts = 13

Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	879606	1	9	50	1563	0	0	879606	0	923076
2	805192	2	9	80	1103	1583	0	1686361	923077	1846153
3	941823	3	9	75	1472	1782	1697	2630870	1846154	2769230
4	361762	2	9	70	1800	1249	0	2997583	2769231	3692307
5	1555304	2	9	50	1680	1294	0	4555936	3692308	4615384
6	311146	1	9	95	1519	0	0	4870056	4615385	5538461
7	745233	2	9	90	1422	1374	0	5616808	5538462	6461538
8	1094681	3	9	100	1512	1861	1738	6714285	6461539	7384615
9	1502430	2	9	70	1187	1787	0	8221826	7384616	8307692
10	708383	2	9	60	1582	1546	0	8933183	8307693	9230769
11	567467	2	9	90	1325	1474	0	9503778	9230770	10153846
12	843707	3	9	100	1877	1311	1185	10350284	10153847	11076923
13	1152676	2	9	90	1819	1779	0	11507333	11076924	12000000

Total number of pulses in waveform = 27

\*\*\*\*\*



### Type 5 Radar Waveform\_5

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	324278	1	10	55	1635	0	0	324278	0	599999
2	838761	2	10	90	1454	1705	0	1164674	600000	1199999
3	297070	1	10	70	1921	0	0	1464903	1200000	1799999
4	663340	3	10	90	1321	1968	1624	2130164	1800000	2399999
5	399948	3	10	85	1933	1753	1469	2535025	2400000	2999999
6	475256	3	10	55	1444	1828	1734	3015436	3000000	3599999
7	756872	2	10	65	1416	1500	0	3907384	3600000	4199999
8	656188	2	10	85	1431	1828	0	4667172	4200000	4799999
9	86833	3	10	65	1488	1839	1585	5326619	4800000	5399999
10	954346	2	10	85	1767	1647	0	5418364	5400000	5999999
11	330387	2	10	50	1027	1970	0	6376124	6000000	6599999
12	909007	2	10	55	1266	1165	0	6709508	6600000	7199999
13	516000	3	10	60	1877	1422	1020	7620946	7200000	7799999
14	502593	2	10	85	1948	1484	0	8141265	7800000	8399999
15	741011	1	10	90	1969	0	0	8647290	8400000	8999999
16	514467	1	10	90	1695	0	0	9390270	9000000	9599999
17	610074	3	10	80	1735	1478	1520	9906432	9600000	10199999
18	713678	2	10	65	1218	1220	0	10521239	10200000	10799999
19	294104	1	10	55	1167	0	0	11237355	10800000	11399999
20	547105	3	10	55	1923	1578	1367	11532626	11400000	11999999

Total number of pulses in waveform = 42  
\*\*\*\*\*

### Type 5 Radar Waveform\_6

Num of Bursts = 12  
Burst Interval (us)= 1000000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	547105	1	18	60	1216	0	0	547105	0	999999
2	995646	2	18	65	1572	1708	0	1543967	1000000	1999999
3	633427	2	18	70	1101	1286	0	2180674	2000000	2999999
4	963564	3	18	70	1668	1197	1492	3146625	3000000	3999999
5	1324593	1	18	100	1387	0	0	4475575	4000000	4999999
6	1437532	3	18	75	1635	1876	1471	5914494	5000000	5999999
7	951162	1	18	55	1352	0	0	6870638	6000000	6999999
8	1017045	2	18	100	1755	1085	0	7889035	7000000	7999999
9	605607	1	18	95	1414	0	0	8497482	8000000	8999999
10	1489297	2	18	75	1201	1367	0	9988193	9000000	9999999
11	740952	3	18	50	1398	1989	1865	10731713	10000000	10999999
12	699509	1	18	50	1920	0	0	11436474	11000000	11999999

Total number of pulses in waveform = 22  
\*\*\*\*\*

### Type 5 Radar Waveform\_7

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	314585	3	5	85	1159	1643	1210	314585	0	799999
2	610712	2	5	75	1554	1695	0	929309	800000	1599999
3	842864	3	5	65	1432	1692	1155	1775422	1600000	2399999
4	1296528	1	5	100	1408	0	0	3076229	2400000	3199999
5	509241	1	5	80	1342	0	0	3586878	3200000	3999999
6	799885	3	5	90	1441	1821	1491	4388105	4000000	4799999
7	484353	1	5	85	1267	0	0	4877211	4800000	5599999
8	1511655	3	5	65	1067	1539	1287	6390133	5600000	6399999
9	695797	3	5	55	1378	1203	1823	7089823	6400000	7199999
10	868335	2	5	75	1455	1326	0	7962562	7200000	7999999
11	150622	1	5	85	1002	0	0	8115965	8000000	8799999
12	1130283	2	5	80	1536	1948	0	9247250	8800000	9599999
13	349506	3	5	55	1763	1827	1114	9600240	9600000	10399999
14	934949	2	5	55	1254	1174	0	10539893	10400000	11199999
15	924159	3	5	100	1002	1191	1710	11466480	11200000	11999999

Total number of pulses in waveform = 33  
\*\*\*\*\*



### Type 5 Radar Waveform\_8

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	244946	3	12	50	1692	1022	1266	244946	0	923076
2	1532100	3	12	75	1391	1049	1125	1781026	923077	1846153
3	258982	3	12	80	1048	1859	1916	2043573	1846154	2769230
4	1284555	1	12	80	1390	0	0	3332951	2769231	3692307
5	747390	1	12	80	1257	0	0	4081731	3692308	4615384
6	539849	2	12	95	1630	1627	0	4622837	4615385	5538461
7	1299224	3	12	50	1902	1876	1951	5925318	5538462	6461538
8	906307	3	12	95	1843	1755	1269	6837354	6461539	7384615
9	1191874	2	12	100	1104	1175	0	8034095	7384616	8307692
10	1183435	1	12	60	1066	0	0	9219809	8307693	9230769
11	482893	1	12	100	1051	0	0	9703768	9230770	10153846
12	656852	3	12	90	1368	1987	1462	10361671	10153847	11076923
13	1625824	3	12	85	1310	1317	1557	11992312	11076924	12000000

Total number of pulses in waveform = 29  
\*\*\*\*\*

### Type 5 Radar Waveform\_9

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	249947	1	8	50	1062	0	0	249947	0	599999
2	892263	1	8	100	1472	0	0	1143272	600000	1199999
3	507623	3	8	75	1133	1685	1565	1652367	1200000	1799999
4	506782	2	8	65	1516	1657	0	2163532	1800000	2399999
5	245368	3	8	65	1019	1319	1977	2412073	2400000	2999999
6	1011237	3	8	60	1649	1218	1981	3427625	3000000	3599999
7	705771	1	8	60	1220	0	0	4138244	3600000	4199999
8	467214	1	8	80	1903	0	0	4606678	4200000	4799999
9	380720	3	8	55	1921	1250	1780	4989391	4800000	5399999
10	692389	1	8	90	1340	0	0	5686731	5400000	5999999
11	784187	3	8	100	1795	1882	1880	6472258	6000000	6599999
12	362861	1	8	85	1241	0	0	6840676	6600000	7199999
13	893770	3	8	90	1111	1390	1724	7736687	7200000	7799999
14	603915	3	8	90	1766	1710	1072	8243827	7800000	8399999
15	372431	1	8	100	1797	0	0	8620796	8400000	8999999
16	711195	1	8	90	1309	0	0	9333788	9000000	9599999
17	542134	3	8	75	1992	1038	1407	9877231	9600000	10199999
18	904448	3	8	85	1808	1670	1343	10786116	10200000	10799999
19	248026	3	8	70	1485	1583	1079	11038963	10800000	11399999
20	862709	2	8	60	1902	1091	0	11905819	11400000	11999999

Total number of pulses in waveform = 42  
\*\*\*\*\*

### Type 5 Radar Waveform\_10

Num of Bursts = 15  
Burst Interval (us)= 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	451451	1	14	95	1443	0	0	451451	0	799999
2	713824	2	14	65	1225	1076	0	1166718	800000	1599999
3	1186070	3	14	60	1144	1650	1618	2355089	1600000	2399999
4	220277	1	14	80	1527	0	0	2579778	2400000	3199999
5	1224178	3	14	70	1167	1440	1422	3805483	3200000	3999999
6	816242	3	14	50	1144	1842	1284	4625754	4000000	4799999
7	553294	2	14	50	1232	1228	0	5183318	4800000	5599999
8	552376	1	14	95	1877	0	0	5738154	5600000	6399999
9	1165737	3	14	85	1857	1786	1331	6905768	6400000	7199999
10	697561	1	14	85	1874	0	0	7608303	7200000	7999999
11	956124	2	14	80	1691	1597	0	8566301	8000000	8799999
12	515000	3	14	75	1456	1767	1176	9084589	8800000	9599999
13	539232	1	14	60	1506	0	0	9628220	9600000	10399999
14	1439119	2	14	50	1935	1564	0	11068845	10400000	11199999
15	155892	3	14	65	1839	1475	1606	11228236	11200000	11999999

Total number of pulses in waveform = 31  
\*\*\*\*\*



### Type 5 Radar Waveform\_11

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	962356	3	9	60	1136	1410	1259	962356	0	1090908
2	924251	3	9	70	1399	1139	1075	1890412	1090909	2181817
3	977078	2	9	90	1587	1734	0	2871103	2181818	3272726
4	1310691	2	9	95	1731	1463	0	4185115	3272727	4363635
5	200191	1	9	90	1086	0	0	4388500	4363636	5454544
6	1661553	1	9	75	1986	0	0	6051139	5454545	6545453
7	663136	3	9	100	1511	1568	1185	6716261	6545454	7636362
8	1800594	1	9	70	1459	0	0	8521119	7636363	8727271
9	1151154	3	9	100	1820	1338	1536	9673732	8727272	9818180
10	818982	2	9	85	1472	1773	0	10497408	9818181	10909089
11	1104221	3	9	50	1480	1433	1964	11604874	10909090	11999998

Total number of pulses in waveform = 24  
\*\*\*\*\*

### Type 5 Radar Waveform\_12

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	299616	2	17	75	1510	1646	0	299616	0	631578
2	808342	2	17	100	1616	1919	0	1111114	631579	1263157
3	218223	2	17	95	1884	1271	0	1332872	1263158	1894736
4	859198	3	17	50	1568	1999	1464	2195225	1894737	2526315
5	597403	1	17	50	1700	0	0	2797659	2526316	3157894
6	787519	3	17	90	1701	1805	1180	3586878	3157895	3789473
7	542255	1	17	75	1925	0	0	4355476	3789474	4421052
8	682910	2	17	55	1235	1364	0	4899656	4421053	5052631
9	658021	3	17	65	1779	1383	1639	5585165	5052632	5684210
10	295383	3	17	100	1053	1022	1891	6247987	5684211	6315789
11	924413	1	17	95	1858	0	0	6547336	6315790	6947368
12	116686	2	17	65	1074	1292	0	7473607	6947369	7578947
13	116686	2	17	75	1389	1517	0	7592659	7578948	8210526
14	746175	1	17	100	1193	0	0	8341740	8210527	8842105
15	888119	1	17	60	1751	0	0	8860749	8842106	9473684
16	388149	1	17	50	1141	0	0	9750619	9473685	10105263
17	1072886	3	17	85	1967	1324	1673	10139909	10105264	10736842
18	163940	2	17	95	1616	1846	0	11217759	10736843	11368421
19	163940	2	17	60	1537	1483	0	11385161	11368422	12000000

Total number of pulses in waveform = 37  
\*\*\*\*\*

### Type 5 Radar Waveform\_13

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	185711	2	18	80	1508	1450	0	185711	0	631578
2	967031	2	18	90	1521	1320	0	1155700	631579	1263157
3	204185	3	18	75	1760	1557	1138	1362726	1263158	1894736
4	1092234	3	18	70	1630	1828	1745	2459415	1894737	2526315
5	227425	2	18	60	1027	1863	0	2692043	2526316	3157894
6	598390	2	18	85	1153	1329	0	3293323	3157895	3789473
7	795451	1	18	95	1380	0	0	4091256	3789474	4421052
8	678832	1	18	55	1955	0	0	4771468	4421053	5052631
9	453979	3	18	90	1713	1775	1500	5227402	5052632	5684210
10	1027573	1	18	50	1387	0	0	6259963	5684211	6315789
11	292229	2	18	85	1048	1584	0	6553579	6315790	6947368
12	486505	2	18	100	1257	1454	0	7042716	6947369	7578947
13	995342	2	18	55	1130	1359	0	8040769	7578948	8210526
14	746105	1	18	70	1001	0	0	8789363	8210527	8842105
15	573893	2	18	90	1764	1946	0	9364257	8842106	9473684
16	541210	1	18	95	1216	0	0	9909177	9473685	10105263
17	675813	2	18	95	1674	1519	0	10586206	10105264	10736842
18	639646	3	18	85	1933	1512	1352	11229045	10736843	11368421
19	275737	2	18	95	1915	1570	0	11509579	11368422	12000000

Total number of pulses in waveform = 37  
\*\*\*\*\*



### Type 5 Radar Waveform\_14

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	314616	2	5	50	1285	1620	0	314616	0	923076
2	1045518	2	5	65	1203	1116	0	1363039	923077	1846153
3	640967	1	5	70	1106	0	0	2006325	1846154	2769230
4	900172	2	5	60	1277	1904	0	2907603	2769231	3692307
5	1152450	3	5	55	1860	1241	1759	4063234	3692308	4615384
6	1224126	1	5	100	1110	0	0	5292220	4615385	5538461
7	385490	1	5	75	1372	0	0	5678820	5538462	6461538
8	1696207	2	5	90	1807	1145	0	7376399	6461539	7384615
9	790039	1	5	55	1242	0	0	8169390	7384616	8307692
10	826806	1	5	90	1979	0	0	8997438	8307693	9230769
11	468593	2	5	50	1600	1913	0	9468010	9230770	10153846
12	1118669	3	5	70	1169	1144	1111	10590192	10153847	11076923
13	755595	3	5	55	1098	1217	1126	11349211	11076924	12000000

Total number of pulses in waveform = 24

\*\*\*\*\*

### Type 5 Radar Waveform\_15

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	490324	2	6	75	1100	1683	0	490324	0	599999
2	228473	2	6	50	1814	1528	0	721580	600000	1199999
3	821625	3	6	75	1423	1180	1675	1546547	1200000	1799999
4	735382	2	6	50	1277	1720	0	2286207	1800000	2399999
5	118805	3	6	50	1437	1945	1404	2408009	2400000	2999999
6	1112756	2	6	85	1337	1317	0	3525551	3000000	3599999
7	518562	2	6	75	1552	1329	0	4046767	3600000	4199999
8	691963	2	6	50	1436	1966	0	4741611	4200000	4799999
9	211403	1	6	100	1257	0	0	4956406	4800000	5399999
10	679081	2	6	75	1482	1358	0	5636744	5400000	5999999
11	752623	3	6	85	1896	1209	1942	6392207	6000000	6599999
12	522300	3	6	90	1071	1421	1906	6919614	6600000	7199999
13	827630	1	6	90	1560	0	0	7751642	7200000	7799999
14	71067	2	6	95	1096	1151	0	7824269	7800000	8399999
15	926487	3	6	70	1416	1607	1304	8753003	8400000	8999999
16	362381	1	6	85	1542	0	0	9119711	9000000	9599999
17	1073751	1	6	85	1329	0	0	10195004	9600000	10199999
18	69109	2	6	95	1056	1210	0	10265442	10200000	10799999
19	1097087	3	6	85	1663	1648	1402	11364795	10800000	11399999
20	579224	1	6	80	1896	0	0	11948732	11400000	11999999

Total number of pulses in waveform = 41

\*\*\*\*\*

### Type 5 Radar Waveform\_16

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	190762	3	14	75	1732	1121	1625	190762	0	666666
2	971685	1	14	100	1028	0	0	1166925	666667	1333333
3	292058	3	14	75	1745	1565	1601	1460011	1333334	2000000
4	1027144	3	14	90	1883	1053	1995	2492066	2000001	2666667
5	410200	3	14	95	1374	1660	1742	2907197	2666668	3333334
6	993942	3	14	60	1372	1852	1673	3905915	3333335	4000001
7	320305	1	14	55	1878	0	0	4231117	4000002	4666668
8	926298	2	14	70	1396	1428	0	5169293	4666669	5333335
9	772015	1	14	60	1243	0	0	5994132	5333336	6000002
10	457264	2	14	80	1979	1508	0	6392639	6000003	6666669
11	510631	2	14	50	1291	1890	0	6906757	6666670	7333336
12	935380	3	14	70	1670	1420	1637	7845318	7333337	8000003
13	726124	2	14	55	1884	1655	0	8576169	8000004	8666670
14	284266	2	14	85	1733	1207	0	8863974	8666671	9333337
15	896686	3	14	80	1354	1336	1294	9763600	9333338	10000004
16	581723	1	14	90	1715	0	0	10349307	10000005	10666671
17	359313	3	14	100	1196	1660	1531	10710335	10666672	11333338
18	1002464	1	14	90	1017	0	0	11717186	11333339	12000005

Total number of pulses in waveform = 39

\*\*\*\*\*



### Type 5 Radar Waveform\_17

Num of Bursts = 12  
Burst Interval (us)= 1000000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	180750	1	12	75	1256	0	0	180750	0	999999
2	1529752	1	12	70	1087	0	0	1711758	1000000	1999999
3	662809	3	12	85	1751	1111	1145	2375654	2000000	2999999
4	1404962	2	12	80	1419	1512	0	3784623	3000000	3999999
5	1156629	3	12	75	1484	1848	1561	4944183	4000000	4999999
6	209164	2	12	85	1094	1802	0	5158240	5000000	5999999
7	1509509	2	12	80	1447	1666	0	6670645	6000000	6999999
8	1286431	3	12	65	1441	1604	1977	7960189	7000000	7999999
9	638380	2	12	60	1982	1365	0	8603591	8000000	8999999
10	1299556	1	12	95	1931	0	0	9906494	9000000	9999999
11	597049	1	12	65	1299	0	0	10505474	10000000	10999999
12	999982	2	12	70	1658	1700	0	11506755	11000000	11999999

Total number of pulses in waveform = 23  
\*\*\*\*\*

### Type 5 Radar Waveform\_18

Num of Bursts = 18  
Burst Interval (us)= 666667

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	431537	3	10	75	1501	1522	1746	431537	0	666666
2	596453	3	10	55	1132	1062	1127	1032759	666667	1333333
3	578464	3	10	90	1095	1653	1482	1614544	1333334	2000000
4	584621	2	10	90	1356	1593	0	2203395	2000001	2666667
5	725316	2	10	100	1638	1800	0	2931660	2666668	3333334
6	864815	2	10	90	1341	1007	0	3799913	3333335	4000001
7	719774	1	10	95	1689	0	0	4522035	4000002	4666668
8	239888	3	10	75	1638	1218	1077	4757612	4666669	5333335
9	995824	3	10	70	1163	1549	1674	5757369	5333336	6000002
10	746915	1	10	50	1397	0	0	6508670	6000003	6666669
11	280101	3	10	80	1245	1730	1605	6790168	6666670	7333336
12	1099967	1	10	65	1859	0	0	7894715	7333337	8000003
13	147125	3	10	65	1742	1094	1702	8043699	8000004	8666670
14	879421	3	10	65	1887	1039	1281	8927658	8666671	9333337
15	610122	3	10	70	1113	1522	1165	9541987	9333338	10000004
16	744895	2	10	100	1152	1595	0	10290672	10000005	10666671
17	400584	3	10	85	1720	1630	1497	10694003	10666672	11333338
18	1111587	1	10	85	1048	0	0	11810437	11333339	12000005

Total number of pulses in waveform = 42  
\*\*\*\*\*

### Type 5 Radar Waveform\_19

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	1451932	3	8	65	1231	1927	1303	1451932	0	1499999
2	221105	1	8	80	1258	0	0	1677498	1500000	2999999
3	2123723	2	8	55	1498	1780	0	3802479	3000000	4499999
4	2007406	2	8	80	1190	1996	0	5813163	4500000	5999999
5	397037	1	8	65	1528	0	0	6213386	6000000	7499999
6	2693098	3	8	75	1506	1800	1529	8908012	7500000	8999999
7	203737	2	8	65	1322	1203	0	9116584	9000000	10499999
8	1784866	1	8	55	1159	0	0	10903975	10500000	11999999

Total number of pulses in waveform = 15  
\*\*\*\*\*



### Type 5 Radar Waveform\_20

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	640953	1	19	100	1717	0	0	640953	0	923076
2	1133594	2	19	70	1658	1963	0	1776264	923077	1846153
3	747820	3	19	90	1690	1391	1446	2527705	1846154	2769230
4	722219	2	19	90	1203	1076	0	3254451	2769231	3692307
5	1000663	2	19	50	1608	1435	0	4257393	3692308	4615384
6	942886	1	19	95	1750	0	0	5203322	4615385	5538461
7	939964	3	19	90	1473	1099	1648	6145036	5538462	6461538
8	1068511	3	19	85	1009	1082	1741	7217767	6461539	7384615
9	444617	2	19	70	1597	1784	0	7666216	7384616	8307692
10	729682	3	19	100	1176	1423	1630	8399279	8307693	9230769
11	1736184	2	19	100	1488	1865	0	10139692	9230770	10153846
12	249195	2	19	60	1073	1087	0	10392240	10153847	11076923
13	1265664	1	19	65	1295	0	0	11660064	11076924	12000000

Total number of pulses in waveform = 27  
\*\*\*\*\*

### Type 5 Radar Waveform\_21

Num of Bursts = 16  
Burst Interval (us)= 750000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	200329	2	17	65	1467	1661	0	200329	0	749999
2	895201	1	17	85	1358	0	0	1098658	750000	1499999
3	499630	1	17	55	1972	0	0	1599646	1500000	2249999
4	1341466	3	17	90	1108	1263	1888	2943084	2250000	2999999
5	309218	2	17	95	1351	1750	0	3256561	3000000	3749999
6	924493	1	17	100	1289	0	0	4184155	3750000	4499999
7	437519	1	17	50	1988	0	0	4622963	4500000	5249999
8	1365636	1	17	70	1828	0	0	5990587	5250000	5999999
9	535470	2	17	80	1187	1133	0	6527885	6000000	6749999
10	886673	3	17	55	1413	1231	1964	7416878	6750000	7499999
11	480290	2	17	100	1002	1261	0	7901776	7500000	8249999
12	542402	3	17	70	1792	1782	1690	8446441	8250000	8999999
13	1240309	3	17	55	1576	1880	1860	9692014	9000000	9749999
14	240156	2	17	95	1842	1092	0	9937486	9750000	10499999
15	959076	2	17	95	1938	1464	0	10899496	10500000	11249999
16	651900	1	17	55	1071	0	0	11554798	11250000	11999999

Total number of pulses in waveform = 30  
\*\*\*\*\*

### Type 5 Radar Waveform\_22

Num of Bursts = 11  
Burst Interval (us)= 1090909

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	844141	2	6	70	1259	1243	0	844141	0	1090908
2	1079486	2	6	60	1851	1504	0	1926129	1090909	2181817
3	1287714	2	6	50	1381	1990	0	3217198	2181818	3272726
4	272303	2	6	70	1721	1083	0	3492872	3272727	4363635
5	1512405	2	6	90	1304	1790	0	5008081	4363636	5454544
6	1325577	1	6	55	1935	0	0	6336752	5454545	6545453
7	669802	3	6	80	1363	1901	1715	7008489	6545454	7636362
8	1409808	2	6	95	1345	1310	0	8423276	7636363	8727271
9	1375337	3	6	65	1141	1538	1071	9801268	8727272	9818180
10	868325	2	6	85	1501	1056	0	10673343	9818181	10909089
11	964698	3	6	75	1470	1830	1801	11640598	10909090	11999998

Total number of pulses in waveform = 24  
\*\*\*\*\*



### Type 5 Radar Waveform\_23

Num of Bursts = 13  
Burst Interval (us)= 923077

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	620466	3	18	90	1974	1729	1368	620466	0	923076
2	581963	1	18	90	1871	0	0	1207500	923077	1846153
3	787450	2	18	80	1655	1533	0	1996821	1846154	2769230
4	1298508	2	18	80	1049	1435	0	3298517	2769231	3692307
5	1269708	3	18	55	1665	1042	1767	4570709	3692308	4615384
6	825507	2	18	85	1827	1253	0	5400690	4615385	5538461
7	577560	1	18	95	1554	0	0	5981330	5538462	6461538
8	1184982	3	18	60	1950	1803	1762	7167866	6461539	7384615
9	340857	3	18	100	1202	1084	1122	7514238	7384616	8307692
10	1486345	1	18	50	1644	0	0	9003991	8307693	9230769
11	249815	3	18	80	1510	1194	1434	9255450	9230770	10153846
12	1179391	3	18	100	1554	1786	1051	10438979	10153847	11076923
13	867758	2	18	95	1011	1202	0	11311128	11076924	12000000

Total number of pulses in waveform = 29  
\*\*\*\*\*

### Type 5 Radar Waveform\_24

Num of Bursts = 9  
Burst Interval (us)= 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	120654	1	19	95	1723	0	0	120654	0	1333332
2	2166728	2	19	100	1186	1321	0	2289105	1333333	2666665
3	1326964	3	19	50	1575	1423	1476	3618576	2666666	3999998
4	1285877	1	19	70	1284	0	0	4908927	3999999	5333331
5	797423	1	19	60	1266	0	0	5707634	5333332	6666664
6	1418979	3	19	60	1112	1694	1203	7127879	6666665	7999997
7	1291659	2	19	85	1207	1752	0	8423547	7999998	9333330
8	1645219	1	19	95	1780	0	0	10071725	9333331	10666663
9	987756	1	19	80	1600	0	0	11061261	10666664	11999996

Total number of pulses in waveform = 15  
\*\*\*\*\*

### Type 5 Radar Waveform\_25

Num of Bursts = 8  
Burst Interval (us)= 1500000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	1217190	2	8	70	1269	1712	0	1217190	0	1499999
2	728030	1	8	70	1971	0	0	1948201	1500000	2999999
3	2236681	2	8	85	1156	1227	0	4186853	3000000	4499999
4	1338012	2	8	60	1412	1174	0	5527248	4500000	5999999
5	638789	3	8	95	1277	1150	1924	6168623	6000000	7499999
6	1852056	3	8	80	1202	1884	1252	8025030	7500000	8999999
7	1581986	1	8	75	1632	0	0	9611354	9000000	10499999
8	1864699	2	8	55	1279	1661	0	11477685	10500000	11999999

Total number of pulses in waveform = 16  
\*\*\*\*\*





### Type 5 Radar Waveform\_26

Num of Bursts = 10  
Burst Interval (us)= 1200000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	342443	1	5	50	1879	0	0	342443	0	1199999
2	923960	2	5	70	1825	1192	0	1268282	1200000	2399999
3	1177980	3	5	50	1981	1895	1808	2449279	2400000	3599999
4	1614420	2	5	80	1793	1049	0	4069383	3600000	4799999
5	904789	3	5	65	1124	1804	1749	4977014	4800000	5999999
6	2199810	3	5	75	1415	1923	1983	7181501	6000000	7199999
7	1194524	2	5	60	1276	1933	0	8381346	7200000	8399999
8	857802	2	5	100	1001	1038	0	9242357	8400000	9599999
9	586285	2	5	55	1946	1687	0	9830681	9600000	10799999
10	1040990	1	5	100	1961	0	0	10875304	10800000	11999999

Total number of pulses in waveform = 21

\*\*\*\*\*

### Type 5 Radar Waveform\_27

Num of Bursts = 19  
Burst Interval (us)= 631579

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	374745	2	10	65	1201	1996	0	374745	0	631578
2	820048	1	10	50	1950	0	0	1197990	631579	1263157
3	180369	3	10	55	1840	1830	1413	1380309	1263158	1894736
4	985304	3	10	65	1270	1954	1350	2370696	1894737	2526315
5	719124	3	10	65	1787	1679	1165	3094394	2526316	3157894
6	93071	1	10	55	1476	0	0	3192096	3157895	3789473
7	878073	3	10	60	1438	1795	1358	4071645	3789474	4421052
8	398256	3	10	50	1507	1107	1920	4474492	4421053	5052631
9	847195	2	10	75	1408	1722	0	5326221	5052632	5684210
10	384741	2	10	100	1852	1288	0	5714092	5684211	6315789
11	1185845	1	10	70	1309	0	0	6903057	6315790	6947368
12	78325	3	10	50	1580	1350	1310	6982691	6947369	7578947
13	1156643	2	10	80	1796	1236	0	8143574	7578948	8210526
14	77093	2	10	95	1718	1390	0	8223639	8210527	8842105
15	752766	3	10	80	1098	1599	1212	8979503	8842106	9473684
16	1034486	1	10	65	1178	0	0	10017898	9473685	10105263
17	444006	2	10	80	1834	1896	0	10463082	10105264	10736842
18	528601	1	10	60	1060	0	0	10995413	10736843	11368421
19	971397	1	10	80	1919	0	0	11967870	11368422	12000000

Total number of pulses in waveform = 39

\*\*\*\*\*

### Type 5 Radar Waveform\_28

Num of Bursts = 20  
Burst Interval (us)= 600000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	275624	2	9	70	1896	1320	0	275624	0	599999
2	451483	3	9	85	1096	1960	1691	730323	600000	1199999
3	563868	2	9	80	1062	1111	0	1288938	1200000	1799999
4	812723	3	9	65	1104	1878	1548	2103834	1800000	2399999
5	828745	3	9	85	1267	1134	1357	2937109	2400000	2999999
6	527816	2	9	80	1409	1860	0	3468683	3000000	3599999
7	207105	2	9	55	1968	1194	0	3679057	3600000	4199999
8	1074036	2	9	85	1378	1174	0	4756255	4200000	4799999
9	450764	2	9	75	1978	1379	0	5209571	4800000	5399999
10	647194	1	9	80	1161	0	0	5880122	5400000	5999999
11	154941	1	9	60	1711	0	0	6016224	6000000	6599999
12	911700	1	9	100	1888	0	0	6929635	6600000	7199999
13	630359	2	9	95	1222	1722	0	7561882	7200000	7799999
14	280097	3	9	70	1213	1035	1685	7844923	7800000	8399999
15	591815	3	9	90	1435	1242	1512	8440671	8400000	8999999
16	615699	3	9	100	1620	1275	1968	9060559	9000000	9599999
17	1117268	2	9	70	1942	1885	0	10182690	9600000	10199999
18	115659	3	9	65	1394	1819	1671	10302176	10200000	10799999
19	971714	1	9	80	1522	0	0	11278774	10800000	11399999
20	345780	3	9	50	1700	1021	1458	11626076	11400000	11999999

Total number of pulses in waveform = 44

\*\*\*\*\*



### Type 5 Radar Waveform\_29

Num of Bursts = 20  
Burst Interval (us) = 800000

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	475458	2	14	100	1593	1000	0	475458	0	599999
2	705052	3	14	50	1190	1491	1840	1183103	800000	1199999
3	313929	1	14	75	2000	0	0	1501553	1200000	1799999
4	320585	1	14	60	1754	0	0	1824138	1800000	2399999
5	662119	1	14	80	1168	0	0	2488011	2400000	2999999
6	542056	1	14	75	1512	0	0	3031235	3000000	3599999
7	1115429	3	14	85	1599	1064	1792	4148176	3600000	4199999
8	621724	2	14	95	1731	1349	0	4774355	4200000	4799999
9	212904	1	14	60	1798	0	0	4990339	4800000	5399999
10	465468	3	14	65	1301	1653	1568	5457605	5400000	5999999
11	1076929	1	14	100	1722	0	0	6539056	6000000	6599999
12	252085	3	14	65	1102	1678	1951	6792863	6600000	7199999
13	872539	1	14	50	1735	0	0	7670133	7200000	7799999
14	209760	1	14	60	1881	0	0	7881628	7800000	8399999
15	1026019	3	14	95	1691	1622	1186	8909528	8400000	8999999
16	610769	2	14	70	1909	1397	0	9524796	9000000	9599999
17	593757	3	14	95	1020	1618	1428	10121859	9600000	10199999
18	556638	3	14	85	1228	1886	1005	10682563	10200000	10799999
19	338546	2	14	90	1302	1266	0	11025228	10800000	11399999
20	394299	1	14	70	1067	0	0	11422095	11400000	11999999

Total number of pulses in waveform = 38  
\*\*\*\*\*

### Type 5 Radar Waveform\_30

Num of Bursts = 9  
Burst Interval (us) = 1333333

Burst #	Off Time (us)	# Pulses	Chirp (MHz)	PW (us)	Pulse 1 Pri (us)	Pulse 2 Pri (us)	Pulse 3 Pri (us)	Start Loc (us)	Start Burst Interval (us)	End Burst Interval (us)
1	1152080	1	12	55	1074	0	0	1152080	0	1333332
2	282592	3	12	90	1838	1658	1835	1435746	1333333	2666665
3	2251574	3	12	55	1915	1550	1850	3692651	2666666	3999998
4	1305956	1	12	85	1702	0	0	5003922	3999999	5333331
5	1089454	3	12	95	1331	1478	1282	6095078	5333332	6666664
6	736319	1	12	85	1604	0	0	6835488	6666665	7999997
7	1575526	1	12	95	1583	0	0	8412618	7999998	9333330
8	1469114	3	12	85	1659	1740	1197	9883315	9333331	10666663
9	878754	3	12	60	1094	1210	1517	10766665	10666664	11999996

Total number of pulses in waveform = 19  
\*\*\*\*\*

## Radar Type 6 - Radar Statistical Performance

Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
1	5491	1	16	5530	1
2	5491	1	17	5531	1
3	5500	1	18	5531	1
4	5500	1	19	5540	1
5	5509	1	20	5540	1
6	5509	1	21	5549	1
7	5510	1	22	5549	1
8	5510	1	23	5550	1
9	5511	1	24	5550	1
10	5511	1	25	5551	1
11	5520	1	26	5551	1
12	5520	1	27	5560	1
13	5529	1	28	5560	1
14	5529	1	29	5569	1
15	5530	1	30	5569	1
Detection Percentage (%)					100%



Radar waveform #1			Radar waveform #2		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
3	5512	9	1	5520	3
5	5476	15	7	5477	21
17	5505	51	11	5481	33
24	5471	72	22	5513	66
30	5515	90	25	5491	75
41	5520	123	30	5502	90
58	5503	174	37	5479	111
60	5479	180	44	5475	132
67	5511	201	48	5472	144
97	5516	291	59	5521	177
--	--	--	62	5512	186
--	--	--	79	5519	237
--	--	--	80	5508	240
--	--	--	98	5473	294

Radar waveform #3			Radar waveform #4		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
2	5487	6	3	5510	9
3	5509	9	11	5526	33
30	5499	90	20	5512	60
36	5515	108	22	5480	66
40	5488	120	41	5524	123
43	5492	129	44	5529	132
50	5486	150	45	5513	135
56	5496	168	50	5519	150
60	5524	180	57	5500	171
90	5525	270	63	5487	189
97	5470	291	67	5474	201
--	--	--	78	5489	234
--	--	--	80	5484	240
--	--	--	88	5479	264
--	--	--	95	5476	285
--	--	--	96	5523	288



Radar waveform #5			Radar waveform #6		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
7	5527	21	2	5513	6
23	5501	69	8	5503	24
28	5521	84	15	5522	45
29	5522	87	19	5511	57
37	5531	111	20	5508	60
45	5529	135	41	5496	123
46	5490	138	42	5481	126
55	5514	165	46	5485	138
63	5512	189	50	5532	150
69	5483	207	56	5501	168
89	5478	267	62	5497	186
90	5538	270	68	5527	204
96	5498	288	76	5489	228
--	--	--	79	5523	237

Radar waveform #7			Radar waveform #8		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
11	5513	33	3	5506	9
38	5527	114	22	5523	66
41	5517	123	33	5490	99
54	5515	162	39	5502	117
70	5500	210	40	5522	120
91	5514	273	41	5500	123
--	--	--	65	5524	195
--	--	--	69	5489	207
--	--	--	72	5498	216
--	--	--	84	5486	252
--	--	--	86	5492	258



Radar waveform #9			Radar waveform #10		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
4	5492	12	1	5506	3
8	5502	24	2	5494	6
12	5541	36	6	5540	18
17	5533	51	24	5495	72
19	5504	57	37	5487	111
39	5490	117	44	5517	132
40	5495	120	45	5537	135
60	5542	180	47	5539	141
75	5503	225	60	5524	180
95	5496	285	73	5499	219
96	5506	288	--	--	--

Radar waveform #11			Radar waveform #12		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
17	5539	51	4	5513	12
18	5533	54	6	5494	18
19	5512	57	11	5492	33
33	5507	99	24	5550	72
43	5493	129	35	5524	105
46	5514	138	61	5526	183
69	5518	207	71	5537	213
84	5497	252	80	5527	240
92	5529	276	82	5490	246
94	5532	282	87	5534	261
--	--	--	90	5507	270
--	--	--	95	5512	285



Radar waveform #13			Radar waveform #14		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
4	5498	12	10	5527	30
8	5547	24	15	5542	45
9	5524	27	22	5522	66
18	5523	54	23	5508	69
39	5504	117	24	5507	72
53	5520	159	30	5529	90
59	5537	177	42	5531	126
68	5554	204	65	5536	195
77	5544	231	71	5545	213
96	5548	288	75	5535	225
--	--	--	83	5546	249
--	--	--	92	5553	276
--	--	--	98	5537	294

Radar waveform #15			Radar waveform #16		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
7	5532	21	15	5552	45
17	5501	51	20	5541	60
31	5529	93	26	5531	78
32	5500	96	29	5508	87
65	5530	195	39	5507	117
69	5548	207	40	5548	120
72	5527	216	44	5501	132
93	5545	279	46	5538	138
96	5514	288	56	5506	168
99	5531	297	66	5533	198
--	--	--	78	5500	234
--	--	--	80	5534	240
--	--	--	90	5522	270
--	--	--	91	5509	273
--	--	--	92	5524	276
--	--	--	94	5520	282



Radar waveform #17			Radar waveform #18		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
2	5526	6	6	5544	18
18	5541	54	13	5543	39
35	5527	105	16	5537	48
52	5502	156	26	5539	78
54	5525	162	28	5541	84
63	5560	189	31	5525	93
68	5535	204	33	5510	99
80	5515	240	40	5551	120
82	5521	246	42	5555	126
--	--	--	57	5529	171
--	--	--	61	5556	183
--	--	--	63	5506	189
--	--	--	64	5513	192
--	--	--	83	5520	249
--	--	--	94	5528	282

Radar waveform #19			Radar waveform #20		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
0	5535	0	0	5570	0
2	5562	6	7	5521	21
13	5541	39	9	5561	27
26	5510	78	23	5557	69
28	5551	84	25	5529	75
33	5520	99	33	5545	99
43	5511	129	36	5537	108
56	5556	168	40	5520	120
61	5563	183	41	5548	123
74	5533	222	43	5530	129
77	5568	231	58	5564	174
93	5536	279	71	5517	213
--	--	--	74	5536	222
--	--	--	79	5532	237
--	--	--	81	5556	243





---

--	--	--	84	5565	252
--	--	--	87	5567	261
--	--	--	93	5554	279
--	--	--	98	5543	294



Radar waveform #21			Radar waveform #22		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
18	5544	54	1	5550	3
22	5543	66	6	5520	18
35	5533	105	12	5545	36
48	5552	144	14	5529	42
52	5539	156	16	5539	48
53	5554	159	45	5562	135
58	5575	174	57	5542	171
68	5542	204	61	5533	183
72	5545	216	70	5560	210
88	5566	264	73	5527	219
95	5558	285	75	5522	225
97	5578	291	77	5530	231
--	--	--	78	5531	234
--	--	--	84	5578	252
--	--	--	91	5561	273

Radar waveform #23			Radar waveform #24		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5580	15	3	5553	9
10	5547	30	9	5524	27
11	5571	33	10	5526	30
17	5574	51	19	5548	57
22	5536	66	41	5525	123
26	5533	78	44	5562	132
31	5554	93	55	5577	165
34	5570	102	79	5571	237
57	5562	171	82	5545	246
64	5552	192	89	5579	267
68	5520	204	--	--	--
71	5549	213	--	--	--
73	5555	219	--	--	--
78	5576	234	--	--	--
85	5556	255	--	--	--



88	5539	264	--	--	--
99	5540	297	--	--	--

Radar waveform #25			Radar waveform #26		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
18	5543	54	6	5524	18
19	5528	57	14	5539	42
23	5582	69	24	5549	72
25	5547	75	33	5551	99
26	5569	78	39	5546	117
27	5541	81	44	5580	132
29	5572	87	53	5570	159
40	5553	120	60	5541	180
57	5537	171	77	5528	231
67	5561	201	83	5552	249
70	5533	210	86	5566	258
72	5544	216	87	5579	261
82	5552	246	92	5548	276
--	--	--	94	5564	282

Radar waveform #27			Radar waveform #28		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
1	5538	3	0	5551	0
5	5545	15	19	5530	57
14	5573	42	24	5532	72
19	5532	57	29	5533	87
24	5574	72	34	5547	102
26	5579	78	45	5583	135
30	5582	90	56	5541	168
34	5583	102	78	5546	234
44	5565	132	95	5578	285
54	5570	162	96	5576	288
63	5562	189	--	--	--
69	5531	207	--	--	--
71	5530	213	--	--	--



---

73	5546	219	--	--	--
76	5590	228	--	--	--
82	5561	246	--	--	--
89	5575	267	--	--	--

Radar waveform #29			Radar waveform #30		
Hopping Number	Frequency (MHz)	Pulse Start (ms)	Hopping Number	Frequency (MHz)	Pulse Start (ms)
5	5542	15	0	5575	0
23	5560	69	8	5548	24
28	5594	84	25	5542	75
29	5545	87	35	5555	105
31	5553	93	45	5538	135
39	5579	117	53	5550	159
41	5539	123	70	5560	210
42	5573	126	85	5583	255
45	5567	135	86	5561	258
55	5565	165	87	5577	261
57	5590	171	92	5574	276
61	5584	183	96	5582	288
62	5571	186	--	--	--
65	5577	195	--	--	--
66	5587	198	--	--	--
75	5541	225	--	--	--
78	5597	234	--	--	--
81	5586	243	--	--	--
90	5546	270	--	--	--
91	5555	273	--	--	--

## 6. CONCLUSION

The data collected relate only the item(s) tested and show that the **WiFi Concurrent 4 Port GE LAN VoIP Ethernet Gateway with USB, FCC ID: 2ABLK-844E-1** is in compliance with FCC Rules & ISED Rules.

\_\_\_\_\_ The End \_\_\_\_\_

## Appendix A – Test Setup Photograph

Refer to “1808RSU023-UT” file.

## Appendix B – EUT Photograph

Refer to “1808RSU023-UE” file.