

# Torino Tec Enterprise

**English User Manual  
For Ultra Portable Wireless Coffee Cup speaker**

**MODEL: F5**



**PLEASE READ THIS USER MANUAL CAREFULLY BEFORE YOU USE THIS PRODUCT**

Thank you for choosing our portable Bluetooth speaker. In order to maintain the designed performance for this unit, please read this manual carefully before using and make sure to operate it as instructed.


## **IMPORTANT SAFETY INSTRUCTION**

- Read all of these safety and operating instructions before the unit is operated.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not expose the unit to water or excessive moisture.
- Do not throw or trample the unit.
- Do not use the unit near any heat source such as stove, radiators or any apparatus that can produce heat.
- To turn off the unit before cleaning. Clean by only using a soft anti-static dry cloth.
- Do not disassemble the unit; there are no user serviceable parts inside.

## **FEATURES**

- CSR Bluetooth 3.0, high speed Bluetooth version, to carry the best sound performance.
- High efficiency Neo 1.5" full range driver design.
- Optimum acoustic box design with enhanced bass technology for surround sound with deep bass.
- Works for iPhone, Android phone and any Bluetooth-enabled devices. Bluetooth 2.1 or above
- 5W output produces powerful great sound.
- Internal rechargeable Lithium battery 900mAh, up to 6 - hour operating lifetime at single fully charge
- Connectivity:
  - Audio Connections: 3.5mm Line in
  - Bluetooth profiles: A2DP, AVRCP
  - Bluetooth range: Line of sight, 33 FT(10M) .

## PANEL DESCRIPTION

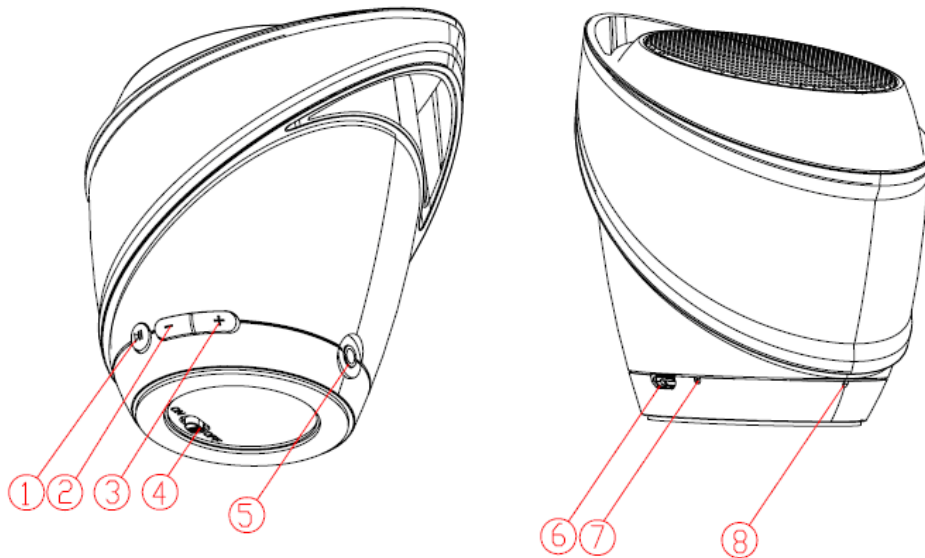

1. Press once for Play/Pause (NOTE: Holding button down too long will disconnect the Bluetooth connection)
2. Press to reduce volume
3. Press to increase volume
4. Slide button for power on/power off
5. AUX-in
6. Micro USB charging port
7. Charging indication LED
8. Mode indication LED

**Light Indication:**

- Charging LED: Charging-- Solid red;  
Fully charged-- LED off.
- Mode LED:  
Bluetooth mode: Pairing-- blue fast flashing;  
Paired and connected--blue slow flashing.  
AUX-in mode: Solid red.

**Charging the Coffee cup F5 speaker before using:**

Connect the speaker to a 5V USB charger by using the USB cable (included) or connect to a PC/laptop. The battery can be fully charged in approximately 4 hours.

**SUPPLIED ACCESSORIES**

1. Micro USB-USB cable 1
2. 3.5 mm audio cable 1
3. Manual 1

**TROUBLE SHOOTING**

<b>Problem</b>	<b>Possible cause</b>	<b>Suggested solution</b>
No sound	Battery fully discharged	Charge the battery
	Audio input cable loose	Check connections and insert fully into slots/jacks
Weak sound	Low battery	Recharge the battery
Sound is distorted	Low battery	Recharge the battery

## SPECIFICATIONS

Output Power	5W x1
Driver	1.5" @ 4Ohm x1, Neo full range speaker
System Frequency	80Hz-18KHz
S/N Ratio	≥ 75dB
Sensitivity	≥85dB
Distortion, THD	≤ 1%
Recharge Voltage	USB DC5V
Dimensions	φ2.9x3.03X3.43 inch (φ74x77x87mm) Without Ring
Weight	6.4 OZ (180g) With Ring

### FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## **TORINO TEC ENTERPRISE LIMITED WARRANTY POLICY**

Limited Warranty – 1 year from original date of purchase

Torino Tec Enterprise warrants the Coffee Cup F5 speaker against defects in materials and workmanship for a period of one (1) year from the date of original purchase. If a defect arises and a valid claim is received within the Warranty Period, Torino Tec Enterprise will, at its option, repair the Coffee Cup F5 or exchange it for a functionally equivalent new unit. This warranty does not apply to damage caused by accident, abuse, misuse, or modification of the product. To return the product, pack it carefully and remember to print or type your name and address clearly along with instruction for repair. Insurance, handling and transportation charges to our service center shall be borne by person desiring service.

Service Address for USA:

Torino Tec Enterprise

6735 Conroy Rd, Suite 330

Orlando, FL 32835

[www.torinotecenterprise.com](http://www.torinotecenterprise.com)

[info@torinotecenterprise.com](mailto:info@torinotecenterprise.com)