

# TEST REPORT

Product Name: SMART GLASSES  
FCC ID: 2ABME-GS11  
Trademark: N/A  
Model Number: GS11, K18, K28  
Prepared For: SHENZHEN GONBES TECHNOLOGY CO., LTD  
Address: 501, Building 3, Mengliyuan Industrial Park, Yousong Road, Longhua Street, Longhua District, Shenzhen, Guangdong, 518000, China  
Manufacturer: SHENZHEN GONBES TECHNOLOGY CO., LTD  
Address: 501, Building 3, Mengliyuan Industrial Park, Yousong Road, Longhua Street, Longhua District, Shenzhen, Guangdong, 518000, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: May. 30, 2024  
Sample tested Date: May. 30, 2024 to Jun. 12, 2024  
Issue Date: Jun. 12, 2024  
Report No.: CTB240612014RFX  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	11
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION</b> .....	15
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	35
8.1 Block Diagram Of Test Setup .....	35
8.2 Limit .....	35
8.3 Test procedure .....	35
8.4 Test Result .....	36
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	43
9.1 Block Diagram Of Test Setup .....	43
9.2 Limit .....	43
9.3 Test procedure .....	43
9.4 Test Result .....	44
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	48
10.1 Block Diagram Of Test Setup .....	48
10.2 Limit .....	48
10.3 Test procedure .....	48
10.4 Test Result .....	48
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	52
11.1 Block Diagram Of Test Setup .....	52
11.2 Limit .....	52
11.3 Test procedure .....	52
11.4 Test Result .....	52
<b>12. HOPPING CHANNEL NUMBER</b> .....	56
12.1 Block Diagram Of Test Setup .....	56
12.2 Limit .....	56
12.3 Test procedure .....	56
12.4 Test Result .....	56



**13. DWELL TIME ..... 58**

13.1 Block Diagram Of Test Setup ..... 58

13.2 Limit ..... 58

13.3 Test procedure ..... 58

13.4 Test Result ..... 59

**14. PSEUDORANDOM FREQUENCY ..... 63**

14.1 Limit ..... 63

14.2 Test procedure ..... 63

14.3 Test Result ..... 64

**15. ANTENNA REQUIREMENT ..... 65**

**16. EUT TEST SETUP PHOTOGRAPHS ..... 66**

*(Note: N/A means not applicable)*



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240612014RFX	Jun. 12, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s): GS11, K18, K28

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: GS11.

Bluetooth Version: Bluetooth 5.0

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 2.241dBm

Type of Modulation: Bluetooth: GFSK,  $\pi/4$  DQPSK, 8DPSK

Antenna installation: Bluetooth: Cip antenna

Antenna Gain: Bluetooth: 2.67dBi

Ratings: DC 5V charging from adapter  
DC 3.7V by battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05

### Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/


### Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/



## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

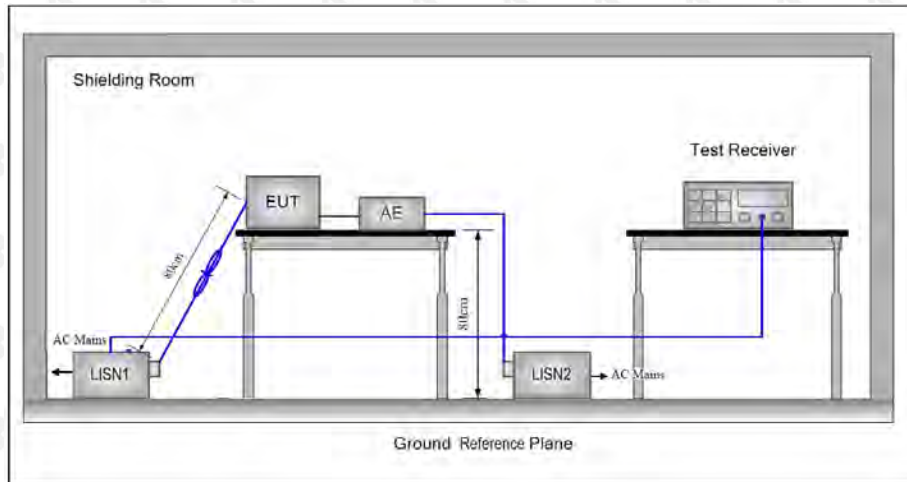

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.




This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

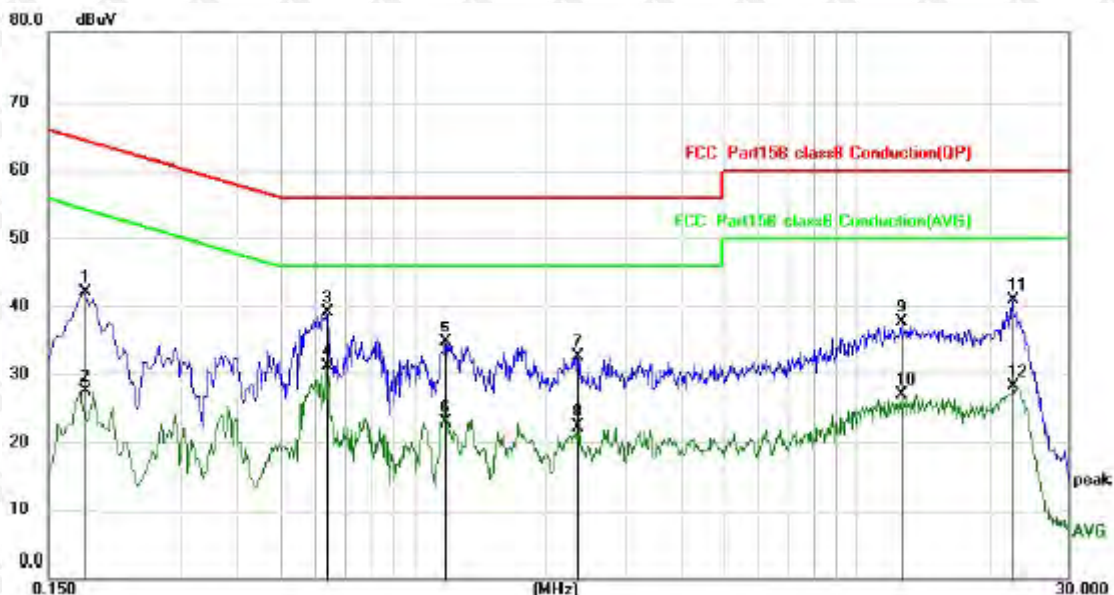


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	32.11	9.95	42.06	64.40	-22.34	QP
2		0.1819	17.47	9.95	27.42	54.40	-26.98	AVG
3		0.6380	29.10	10.01	39.11	56.00	-16.89	QP
4	*	0.6380	20.84	10.01	30.85	46.00	-15.15	AVG
5		1.1820	24.50	10.02	34.52	56.00	-21.48	QP
6		1.1820	12.63	10.02	22.65	46.00	-23.35	AVG
7		2.3340	22.19	10.12	32.31	56.00	-23.69	QP
8		2.3340	11.93	10.12	22.05	46.00	-23.95	AVG
9		12.6059	27.04	10.66	37.70	60.00	-22.30	QP
10		12.6059	15.98	10.66	26.64	50.00	-23.36	AVG
11		22.5260	30.02	10.92	40.94	60.00	-19.06	QP
12		22.5260	17.07	10.92	27.99	50.00	-22.01	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

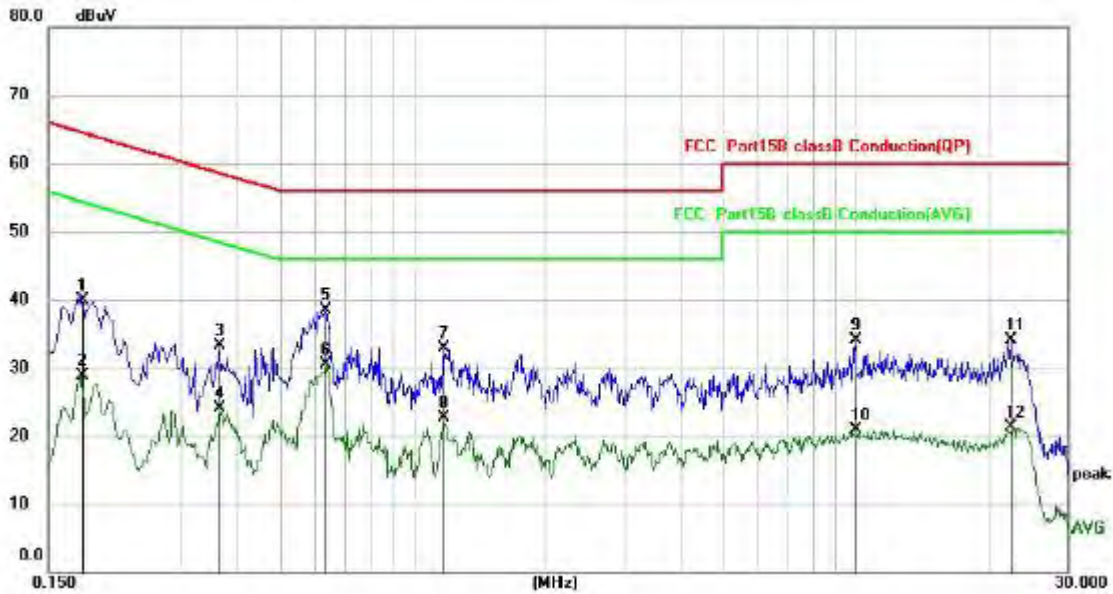

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1787	29.94	9.95	39.89	64.55	-24.66	QP
2		0.1787	19.02	9.95	28.97	54.55	-25.58	AVG
3		0.3660	23.29	9.97	33.26	58.59	-25.33	QP
4		0.3660	14.13	9.97	24.10	48.59	-24.49	AVG
5		0.6340	28.47	10.01	38.48	56.00	-17.52	QP
6	*	0.6340	20.53	10.01	30.54	46.00	-15.46	AVG
7		1.1780	22.92	10.02	32.94	56.00	-23.06	QP
8		1.1780	12.75	10.02	22.77	46.00	-23.23	AVG
9		9.9780	23.44	10.58	34.02	60.00	-25.98	QP
10		9.9780	10.24	10.58	20.82	50.00	-29.18	AVG
11		22.3580	23.26	10.91	34.17	60.00	-25.83	QP
12		22.3580	10.38	10.91	21.29	50.00	-28.71	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

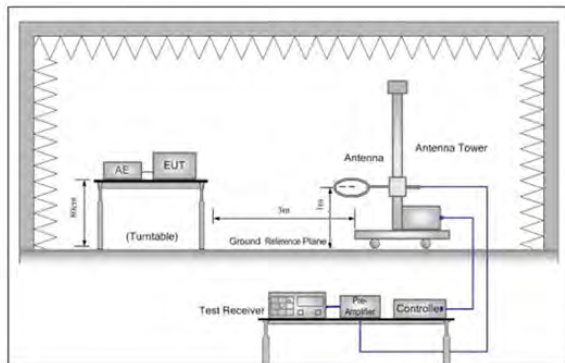


Figure 1. Below 30MHz

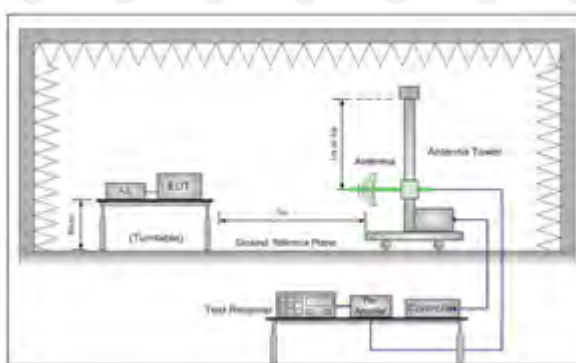


Figure 2. 30MHz to 1GHz

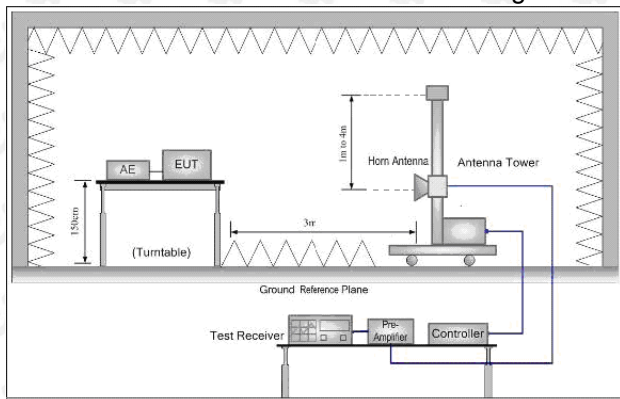


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Left eye:  
 Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)

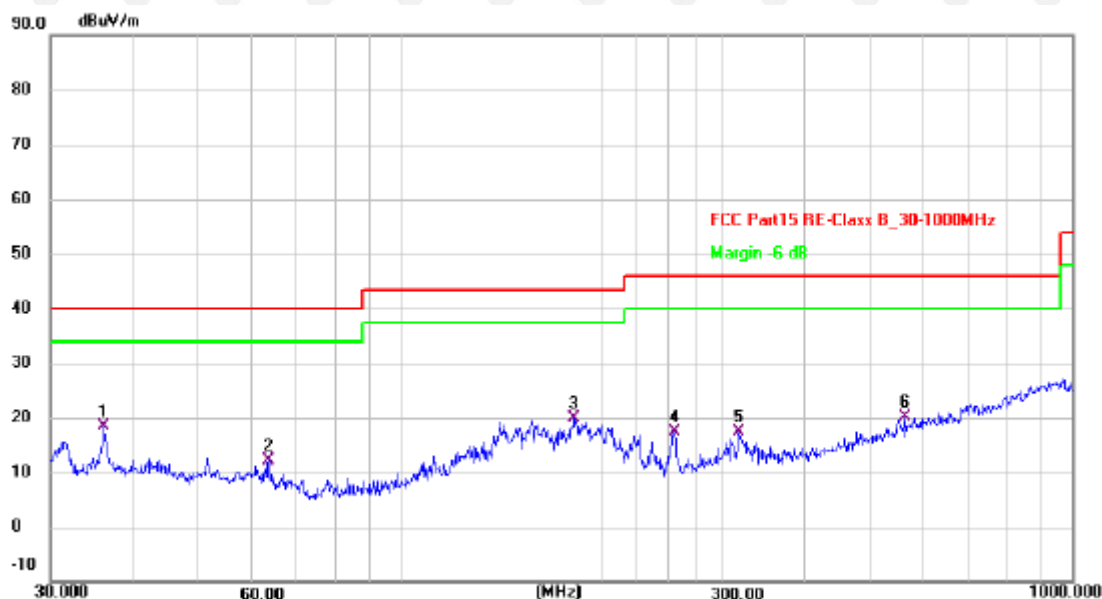


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	36.1272	32.39	-14.07	18.32	40.00	-21.68	QP
2	63.5356	28.54	-16.29	12.25	40.00	-27.75	QP
3	181.2834	35.18	-15.36	19.82	43.50	-23.68	QP
4	255.6231	32.72	-15.35	17.37	46.00	-28.63	QP
5	318.8170	30.17	-12.72	17.45	46.00	-28.55	QP
6	562.6624	26.53	-6.44	20.09	46.00	-25.91	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit




Antenna polarity: V  
Worst case-GFSK(low channel)

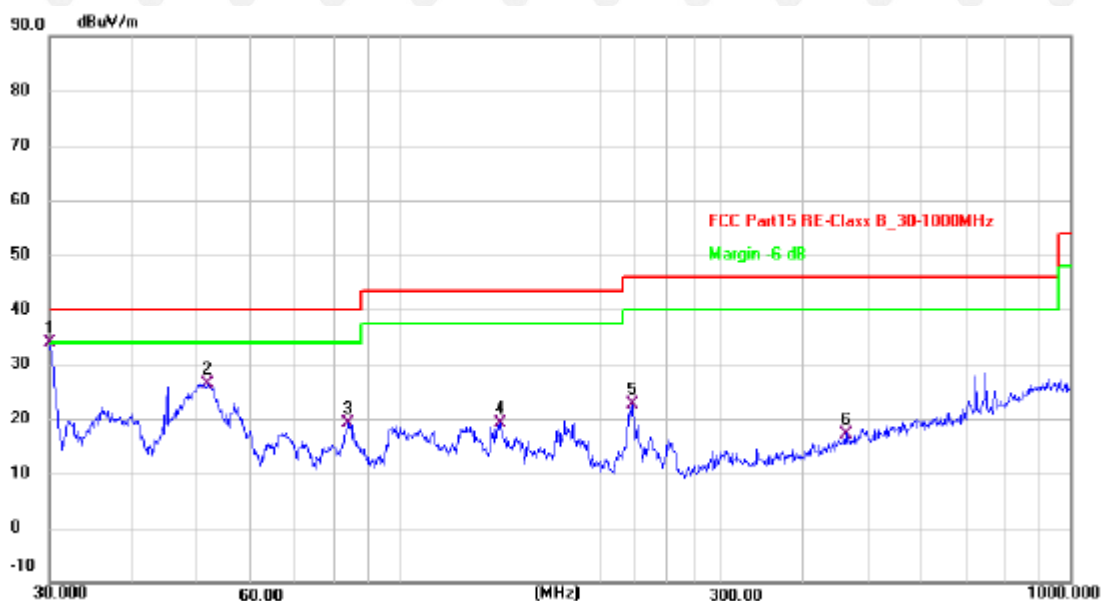

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	30.0000	47.99	-14.00	33.99	40.00	-6.01	QP
2	51.6616	41.74	-15.35	26.39	40.00	-13.61	QP
3	83.8156	37.71	-18.50	19.21	40.00	-20.79	QP
4	141.3298	32.67	-13.61	19.06	43.50	-24.44	QP
5	222.1698	38.71	-16.03	22.68	46.00	-23.32	QP
6	462.3455	26.74	-9.49	17.25	46.00	-28.75	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Right eye:  
 Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)

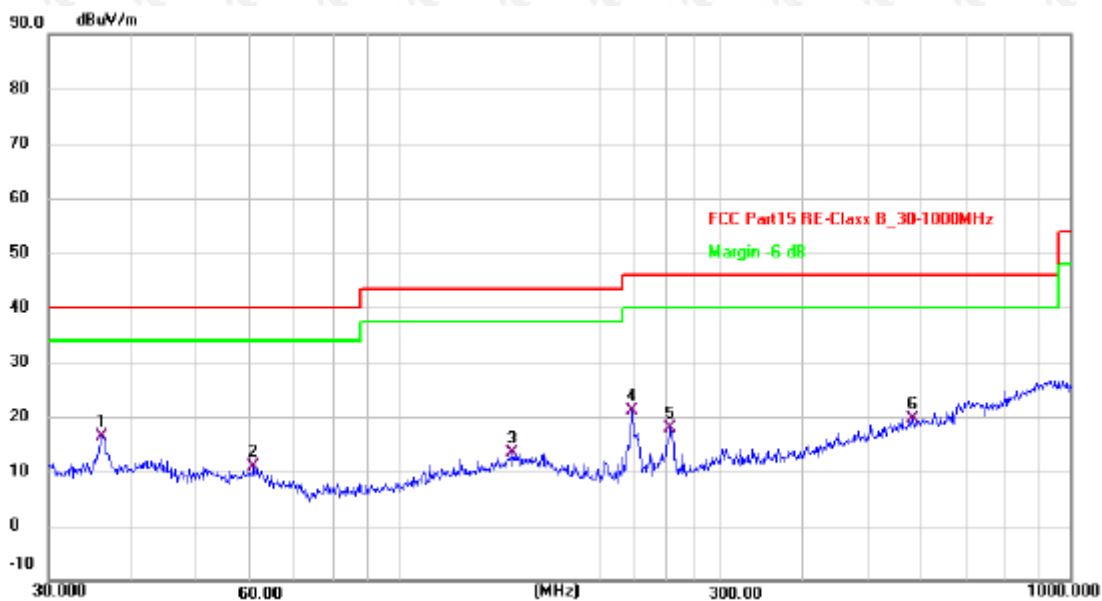

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	36.1272	30.48	-14.07	16.41	40.00	-23.59	QP
2	60.7044	26.22	-15.45	10.77	40.00	-29.23	QP
3	147.4036	26.28	-12.86	13.42	43.50	-30.08	QP
4	222.1698	37.28	-16.03	21.25	46.00	-24.75	QP
5	253.8367	33.23	-15.45	17.78	46.00	-28.22	QP
6	582.7425	25.40	-5.84	19.56	46.00	-26.44	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V  
Worst case-GFSK(low channel)

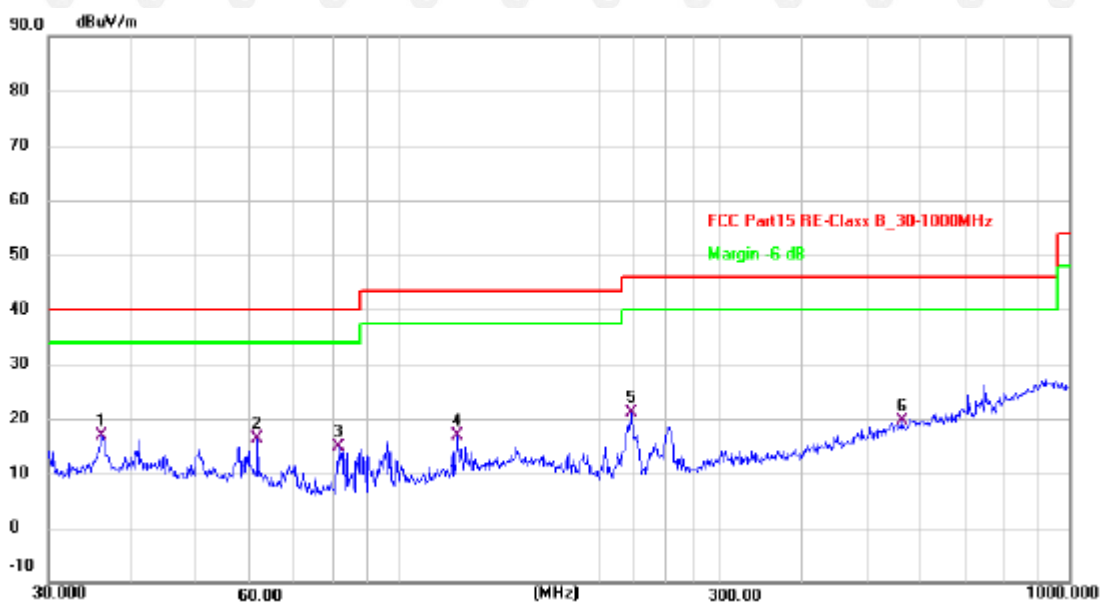

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	36.1272	31.07	-14.07	17.00	40.00	-23.00	QP
2	61.5618	32.14	-15.70	16.44	40.00	-23.56	QP
3	81.4970	33.50	-18.55	14.95	40.00	-25.05	QP
4	121.9755	32.00	-15.22	16.78	43.50	-26.72	QP
5	222.1698	37.28	-16.03	21.25	46.00	-24.75	QP
6	562.6624	26.00	-6.44	19.56	46.00	-26.44	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit



Left eye:  
Above 1 GHz Test Results:

CH Low (2402MHz)  
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	56.66	-3.65	53.01	74.00	-20.99	peak
4804	50.44	-3.65	46.79	54.00	-7.21	AVG
7206	61.08	-0.95	60.13	74.00	-13.87	peak
7206	42.77	-0.95	41.82	54.00	-12.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.91	-3.65	55.26	74.00	-18.74	peak
4804	49.14	-3.65	45.49	54.00	-8.51	AVG
7206	60.03	-0.95	59.08	74.00	-14.92	peak
7206	40.46	-0.95	39.51	54.00	-14.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.99	-3.54	56.45	74.00	-17.55	peak
4882.00	47.29	-3.54	43.75	54.00	-10.25	AVG
7323.00	57.89	-0.81	57.08	74.00	-16.92	peak
7323.00	42.41	-0.81	41.60	54.00	-12.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.42	-3.54	53.88	74.00	-20.12	peak
4882.00	48.52	-3.54	44.98	54.00	-9.02	AVG
7323.00	57.70	-0.81	56.89	74.00	-17.11	peak
7323.00	42.46	-0.81	41.65	54.00	-12.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)  
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	59.18	-3.43	55.75	74.00	-18.25	peak
4960	50.15	-3.44	46.71	54.00	-7.29	AVG
7440	59.23	-0.77	58.46	74.00	-15.54	peak
7440	40.39	-0.77	39.62	54.00	-14.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4960	56.51	-3.43	53.08	74.00	-20.92	peak
4960	49.13	-3.44	45.69	54.00	-8.31	AVG
7440	60.25	-0.77	59.48	74.00	-14.52	peak
7440	41.14	-0.77	40.37	54.00	-13.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report



**Restricted bands around fundamental frequency (Radiated)**

hopping  
 Operation Mode: TX CH Low (2402MHz)  
 Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	58.27	-5.81	52.46	74.00	-21.54	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.33	-5.84	50.49	74.00	-23.51	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.17	-5.81	51.36	74.00	-22.64	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.86	-5.84	50.02	74.00	-23.98	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.88	-5.81	50.07	74.00	-23.93	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.42	-6.06	47.36	74.00	-26.64	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.42	-5.81	50.61	74.00	-23.39	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.95	-6.06	47.89	74.00	-26.11	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.55	-5.81	50.74	74.00	-23.26	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.48	-5.84	47.64	74.00	-26.36	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.44	-5.81	48.63	74.00	-25.37	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.15	-5.84	47.31	74.00	-26.69	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.02	-5.81	50.21	74.00	-23.79	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.58	-6.06	50.52	74.00	-23.48	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.09	-5.81	50.28	74.00	-23.72	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.77	-6.06	48.71	74.00	-25.29	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right eye:  
Above 1 GHz Test Results:

CH Low (2402MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.57	-3.65	53.92	74.00	-20.08	peak
4804	48.86	-3.65	45.21	54.00	-8.79	AVG
7206	59.38	-0.95	58.43	74.00	-15.57	peak
7206	40.38	-0.95	39.43	54.00	-14.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.73	-3.65	53.08	74.00	-20.92	peak
4804	48.17	-3.65	44.52	54.00	-9.48	AVG
7206	61.03	-0.95	60.08	74.00	-13.92	peak
7206	42.34	-0.95	41.39	54.00	-12.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4882.00	58.12	-3.54	54.58	74.00	-19.42	peak
4882.00	48.45	-3.54	44.91	54.00	-9.09	AVG
7323.00	56.21	-0.81	55.40	74.00	-18.60	peak
7323.00	44.38	-0.81	43.57	54.00	-10.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4882.00	56.69	-3.54	53.15	74.00	-20.85	peak
4882.00	48.58	-3.54	45.04	54.00	-8.96	AVG
7323.00	58.46	-0.81	57.65	74.00	-16.35	peak
7323.00	41.30	-0.81	40.49	54.00	-13.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



CH High (2480MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	58.88	-3.43	55.45	74.00	-18.55	peak
4960	48.91	-3.44	45.47	54.00	-8.53	AVG
7440	60.73	-0.77	59.96	74.00	-14.04	peak
7440	41.61	-0.77	40.84	54.00	-13.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	57.62	-3.43	54.19	74.00	-19.81	peak
4960	47.51	-3.44	44.07	54.00	-9.93	AVG
7440	61.46	-0.77	60.69	74.00	-13.31	peak
7440	40.53	-0.77	39.76	54.00	-14.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

**Restricted bands around fundamental frequency (Radiated)**

hopping  
 Operation Mode: TX CH Low (2402MHz)  
 Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.42	-5.81	50.61	74.00	-23.39	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.21	-5.84	49.37	74.00	-24.63	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.94	-5.81	50.13	74.00	-23.87	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.32	-5.84	49.48	74.00	-24.52	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	54.68	-5.81	48.87	74.00	-25.13	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.05	-6.06	46.99	74.00	-27.01	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	56.20	-5.81	50.39	74.00	-23.61	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.44	-6.06	48.38	74.00	-25.62	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.



NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.70	-5.81	48.89	74.00	-25.11	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.23	-5.84	50.39	74.00	-23.61	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.86	-5.81	51.05	74.00	-22.95	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.77	-5.84	48.93	74.00	-25.07	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.39	-5.81	50.58	74.00	-23.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.93	-6.06	49.87	74.00	-24.13	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.90	-5.81	51.09	74.00	-22.91	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.09	-6.06	48.03	74.00	-25.97	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

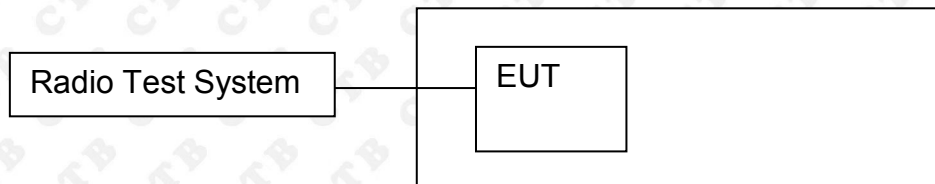

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold



## 8.4 Test Result

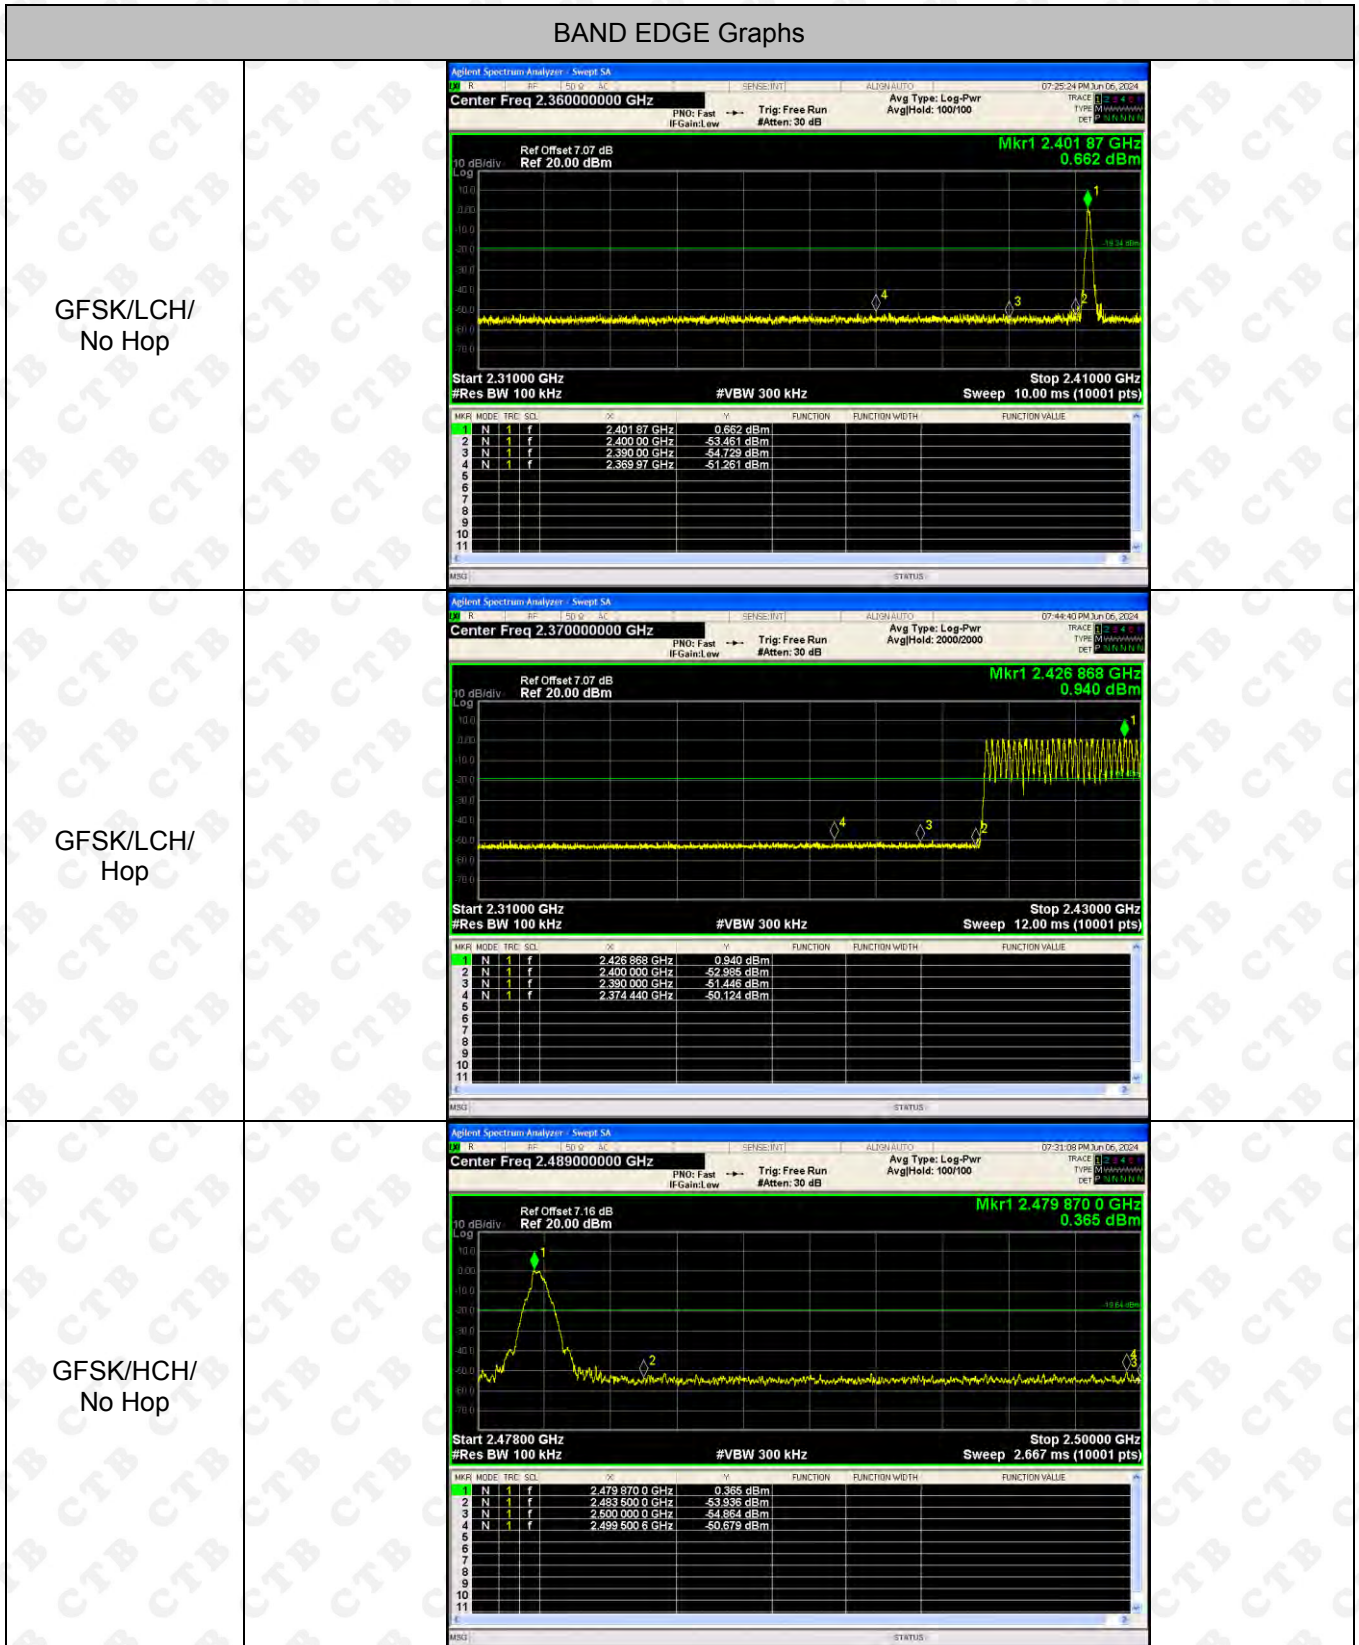

<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.43887500 GHz 1.285 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.43887500 GHz</td> <td>1.285 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-52.808 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49000000 GHz</td> <td>-51.843 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48498750 GHz</td> <td>-49.692 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.43887500 GHz	1.285 dBm				2	N	1	f	2.48350000 GHz	-52.808 dBm				3	N	1	f	2.49000000 GHz	-51.843 dBm				4	N	1	f	2.48498750 GHz	-49.692 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.43887500 GHz	1.285 dBm																																									
2	N	1	f	2.48350000 GHz	-52.808 dBm																																									
3	N	1	f	2.49000000 GHz	-51.843 dBm																																									
4	N	1	f	2.48498750 GHz	-49.692 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>Mkr1 2.40201 GHz -0.711 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40201 GHz</td> <td>-0.711 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-54.271 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-51.263 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.37087 GHz</td> <td>-50.906 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40201 GHz	-0.711 dBm				2	N	1	f	2.40000 GHz	-54.271 dBm				3	N	1	f	2.39000 GHz	-51.263 dBm				4	N	1	f	2.37087 GHz	-50.906 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40201 GHz	-0.711 dBm																																									
2	N	1	f	2.40000 GHz	-54.271 dBm																																									
3	N	1	f	2.39000 GHz	-51.263 dBm																																									
4	N	1	f	2.37087 GHz	-50.906 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>Mkr1 2.419188 GHz 0.879 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.419188 GHz</td> <td>0.879 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-53.025 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-51.484 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.351712 GHz</td> <td>-49.756 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.419188 GHz	0.879 dBm				2	N	1	f	2.40000 GHz	-53.025 dBm				3	N	1	f	2.39000 GHz	-51.484 dBm				4	N	1	f	2.351712 GHz	-49.756 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.419188 GHz	0.879 dBm																																									
2	N	1	f	2.40000 GHz	-53.025 dBm																																									
3	N	1	f	2.39000 GHz	-51.484 dBm																																									
4	N	1	f	2.351712 GHz	-49.756 dBm																																									




<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 026 2 GHz -0.059 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.480 026 2 GHz</td><td></td><td></td><td>-0.059 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.483 500 0 GHz</td><td></td><td></td><td>-53.855 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.490 000 0 GHz</td><td></td><td></td><td>-54.832 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.495 414 8 GHz</td><td></td><td></td><td>-50.572 dBm</td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.480 026 2 GHz			-0.059 dBm	2	N	1	f		2.483 500 0 GHz			-53.855 dBm	3	N	1	f		2.490 000 0 GHz			-54.832 dBm	4	N	1	f		2.495 414 8 GHz			-50.572 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.480 026 2 GHz			-0.059 dBm																																						
2	N	1	f		2.483 500 0 GHz			-53.855 dBm																																						
3	N	1	f		2.490 000 0 GHz			-54.832 dBm																																						
4	N	1	f		2.495 414 8 GHz			-50.572 dBm																																						
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.439 187 50 GHz 1.054 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.439 187 50 GHz</td><td></td><td></td><td>1.054 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.463 500 00 GHz</td><td></td><td></td><td>-52.747 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.480 000 00 GHz</td><td></td><td></td><td>-52.865 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.495 800 00 GHz</td><td></td><td></td><td>-50.129 dBm</td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.439 187 50 GHz			1.054 dBm	2	N	1	f		2.463 500 00 GHz			-52.747 dBm	3	N	1	f		2.480 000 00 GHz			-52.865 dBm	4	N	1	f		2.495 800 00 GHz			-50.129 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.439 187 50 GHz			1.054 dBm																																						
2	N	1	f		2.463 500 00 GHz			-52.747 dBm																																						
3	N	1	f		2.480 000 00 GHz			-52.865 dBm																																						
4	N	1	f		2.495 800 00 GHz			-50.129 dBm																																						
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 20 GHz 0.248 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.402 20 GHz</td><td></td><td></td><td>0.248 dBm</td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>2.400 00 GHz</td><td></td><td></td><td>-52.575 dBm</td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>2.390 00 GHz</td><td></td><td></td><td>-54.839 dBm</td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>2.348 73 GHz</td><td></td><td></td><td>-50.073 dBm</td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.402 20 GHz			0.248 dBm	2	N	1	f		2.400 00 GHz			-52.575 dBm	3	N	1	f		2.390 00 GHz			-54.839 dBm	4	N	1	f		2.348 73 GHz			-50.073 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.402 20 GHz			0.248 dBm																																						
2	N	1	f		2.400 00 GHz			-52.575 dBm																																						
3	N	1	f		2.390 00 GHz			-54.839 dBm																																						
4	N	1	f		2.348 73 GHz			-50.073 dBm																																						




<p>8DPSK /LCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.428 020 GHz</td> <td>0.912 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-52.869 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.778 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.316 060 GHz</td> <td>-50.615 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428 020 GHz	0.912 dBm				2	N	1	f	2.400 000 GHz	-52.869 dBm				3	N	1	f	2.390 000 GHz	-52.778 dBm				4	N	1	f	2.316 060 GHz	-50.615 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.428 020 GHz	0.912 dBm																																										
2	N	1	f	2.400 000 GHz	-52.869 dBm																																										
3	N	1	f	2.390 000 GHz	-52.778 dBm																																										
4	N	1	f	2.316 060 GHz	-50.615 dBm																																										
<p>8DPSK /HCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 032 8 GHz</td> <td>-2.082 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.834 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-52.851 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.481 327 6 GHz</td> <td>-50.866 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 032 8 GHz	-2.082 dBm				2	N	1	f	2.483 500 0 GHz	-52.834 dBm				3	N	1	f	2.500 000 0 GHz	-52.851 dBm				4	N	1	f	2.481 327 6 GHz	-50.866 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.480 032 8 GHz	-2.082 dBm																																										
2	N	1	f	2.483 500 0 GHz	-52.834 dBm																																										
3	N	1	f	2.500 000 0 GHz	-52.851 dBm																																										
4	N	1	f	2.481 327 6 GHz	-50.866 dBm																																										
<p>8DPSK /HCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.445 031 25 GHz</td> <td>1.023 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-52.297 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-52.869 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 228 00 GHz</td> <td>-49.614 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.445 031 25 GHz	1.023 dBm				2	N	1	f	2.483 500 00 GHz	-52.297 dBm				3	N	1	f	2.500 000 00 GHz	-52.869 dBm				4	N	1	f	2.489 228 00 GHz	-49.614 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.445 031 25 GHz	1.023 dBm																																										
2	N	1	f	2.483 500 00 GHz	-52.297 dBm																																										
3	N	1	f	2.500 000 00 GHz	-52.869 dBm																																										
4	N	1	f	2.489 228 00 GHz	-49.614 dBm																																										

## RF Conducted Spurious Emissions Graphs


GFSK/LCH

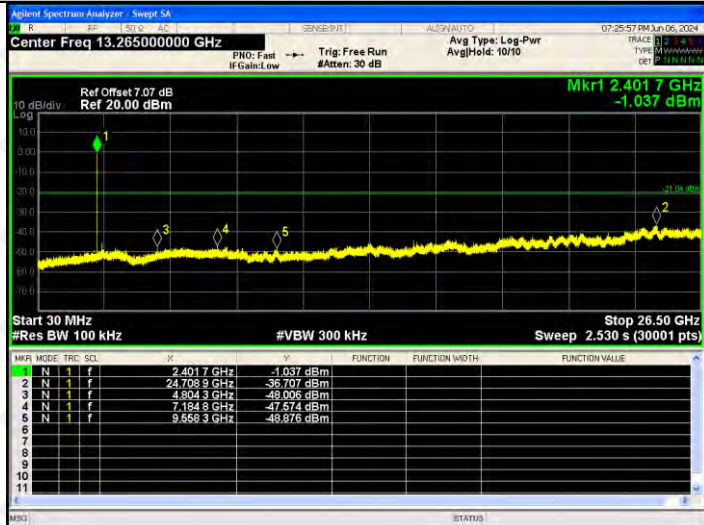


GFSK/MCH

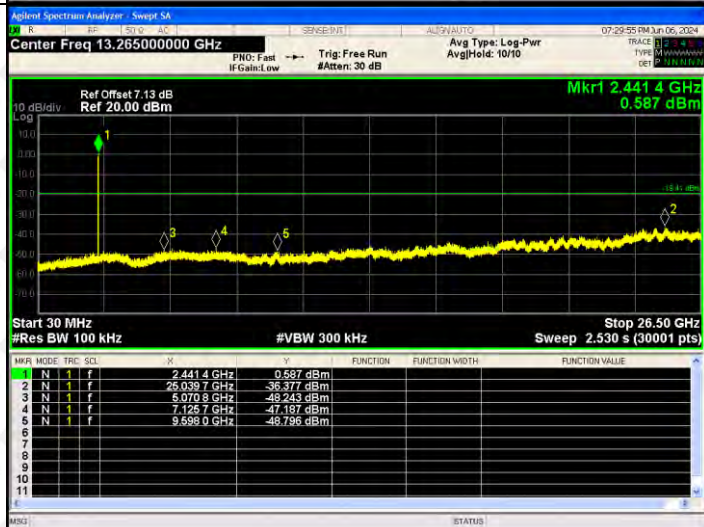


GFSK/HCH

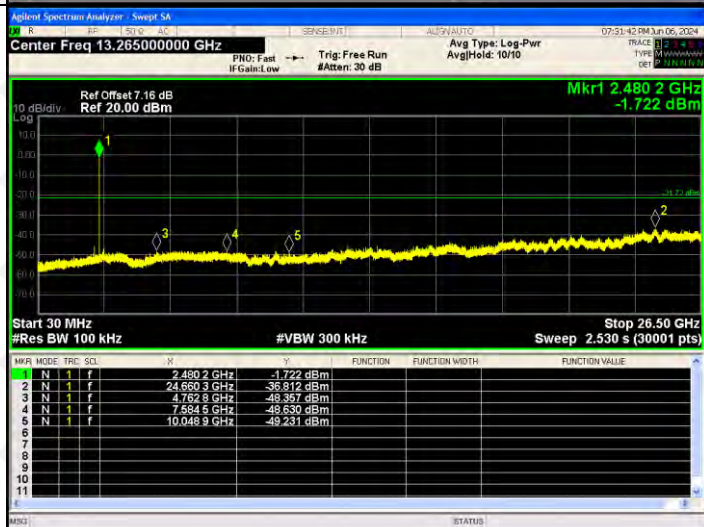

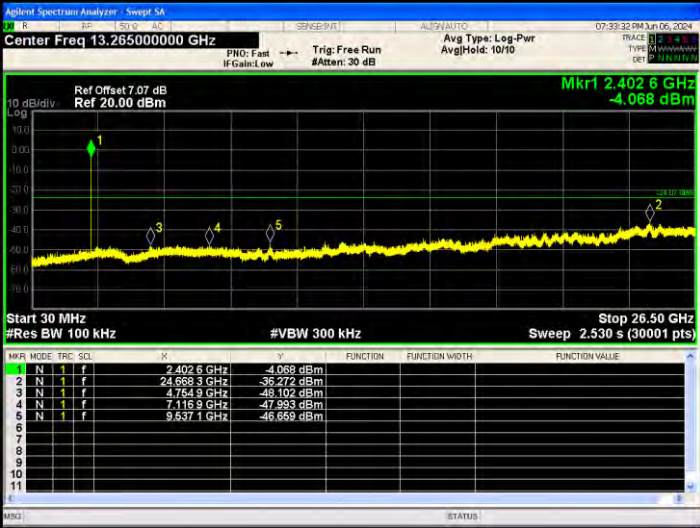


<p><math>\pi/4</math>DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4026 GHz</td> <td>-4.068 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6683 GHz</td> <td>-35.272 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7619 GHz</td> <td>-45.102 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1169 GHz</td> <td>-47.993 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6371 GHz</td> <td>-46.659 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	-4.068 dBm				2	N	1	f	24.6683 GHz	-35.272 dBm				3	N	1	f	4.7619 GHz	-45.102 dBm				4	N	1	f	7.1169 GHz	-47.993 dBm				5	N	1	f	9.6371 GHz	-46.659 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	-4.068 dBm																																																		
2	N	1	f	24.6683 GHz	-35.272 dBm																																																		
3	N	1	f	4.7619 GHz	-45.102 dBm																																																		
4	N	1	f	7.1169 GHz	-47.993 dBm																																																		
5	N	1	f	9.6371 GHz	-46.659 dBm																																																		
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>0.817 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.6224 GHz</td> <td>-35.302 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8892 GHz</td> <td>-47.694 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3040 GHz</td> <td>-47.621 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6839 GHz</td> <td>-49.245 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	0.817 dBm				2	N	1	f	25.6224 GHz	-35.302 dBm				3	N	1	f	4.8892 GHz	-47.694 dBm				4	N	1	f	7.3040 GHz	-47.621 dBm				5	N	1	f	9.6839 GHz	-49.245 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	0.817 dBm																																																		
2	N	1	f	25.6224 GHz	-35.302 dBm																																																		
3	N	1	f	4.8892 GHz	-47.694 dBm																																																		
4	N	1	f	7.3040 GHz	-47.621 dBm																																																		
5	N	1	f	9.6839 GHz	-49.245 dBm																																																		
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-3.744 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6321 GHz</td> <td>-36.190 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0258 GHz</td> <td>-49.189 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5698 GHz</td> <td>-47.552 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9518 GHz</td> <td>-49.583 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-3.744 dBm				2	N	1	f	24.6321 GHz	-36.190 dBm				3	N	1	f	5.0258 GHz	-49.189 dBm				4	N	1	f	7.5698 GHz	-47.552 dBm				5	N	1	f	9.9518 GHz	-49.583 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-3.744 dBm																																																		
2	N	1	f	24.6321 GHz	-36.190 dBm																																																		
3	N	1	f	5.0258 GHz	-49.189 dBm																																																		
4	N	1	f	7.5698 GHz	-47.552 dBm																																																		
5	N	1	f	9.9518 GHz	-49.583 dBm																																																		

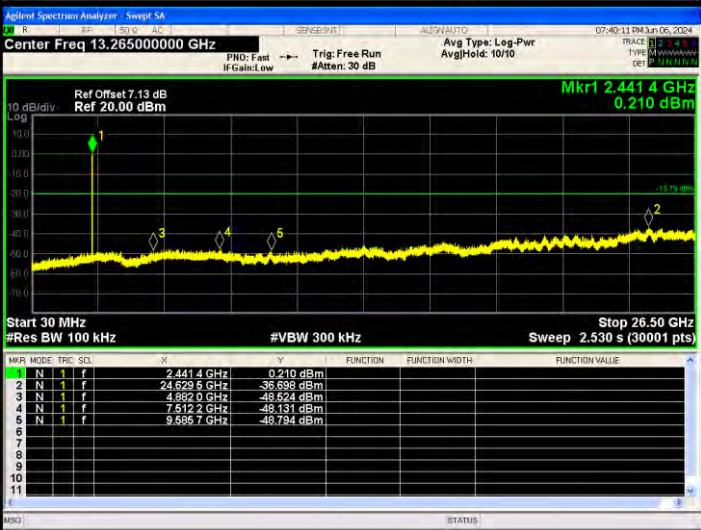

<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4026 GHz</td> <td>-0.335 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6268 GHz</td> <td>-36.736 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.3023 GHz</td> <td>-47.759 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0137 GHz</td> <td>-47.927 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.4966 GHz</td> <td>-48.506 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	-0.335 dBm				2	N	1	f	24.6268 GHz	-36.736 dBm				3	N	1	f	4.3023 GHz	-47.759 dBm				4	N	1	f	7.0137 GHz	-47.927 dBm				5	N	1	f	9.4966 GHz	-48.506 dBm			
MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4026 GHz	-0.335 dBm																																																		
2	N	1	f	24.6268 GHz	-36.736 dBm																																																		
3	N	1	f	4.3023 GHz	-47.759 dBm																																																		
4	N	1	f	7.0137 GHz	-47.927 dBm																																																		
5	N	1	f	9.4966 GHz	-48.506 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>0.210 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6295 GHz</td> <td>-36.698 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.3892 GHz</td> <td>-48.524 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5122 GHz</td> <td>-48.131 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6867 GHz</td> <td>-48.794 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	0.210 dBm				2	N	1	f	24.6295 GHz	-36.698 dBm				3	N	1	f	4.3892 GHz	-48.524 dBm				4	N	1	f	7.5122 GHz	-48.131 dBm				5	N	1	f	9.6867 GHz	-48.794 dBm			
MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	0.210 dBm																																																		
2	N	1	f	24.6295 GHz	-36.698 dBm																																																		
3	N	1	f	4.3892 GHz	-48.524 dBm																																																		
4	N	1	f	7.5122 GHz	-48.131 dBm																																																		
5	N	1	f	9.6867 GHz	-48.794 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-1.365 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6621 GHz</td> <td>-36.391 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.1334 GHz</td> <td>-43.243 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.6687 GHz</td> <td>-47.632 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0930 GHz</td> <td>-49.667 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-1.365 dBm				2	N	1	f	24.6621 GHz	-36.391 dBm				3	N	1	f	5.1334 GHz	-43.243 dBm				4	N	1	f	7.6687 GHz	-47.632 dBm				5	N	1	f	10.0930 GHz	-49.667 dBm			
MNR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-1.365 dBm																																																		
2	N	1	f	24.6621 GHz	-36.391 dBm																																																		
3	N	1	f	5.1334 GHz	-43.243 dBm																																																		
4	N	1	f	7.6687 GHz	-47.632 dBm																																																		
5	N	1	f	10.0930 GHz	-49.667 dBm																																																		

## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

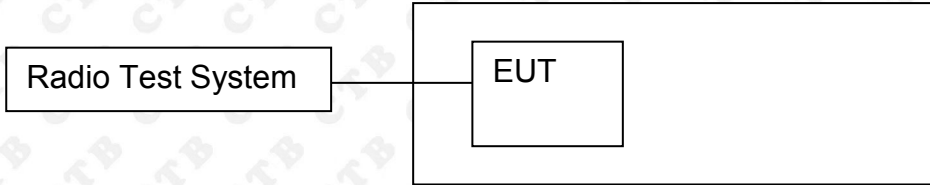

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure


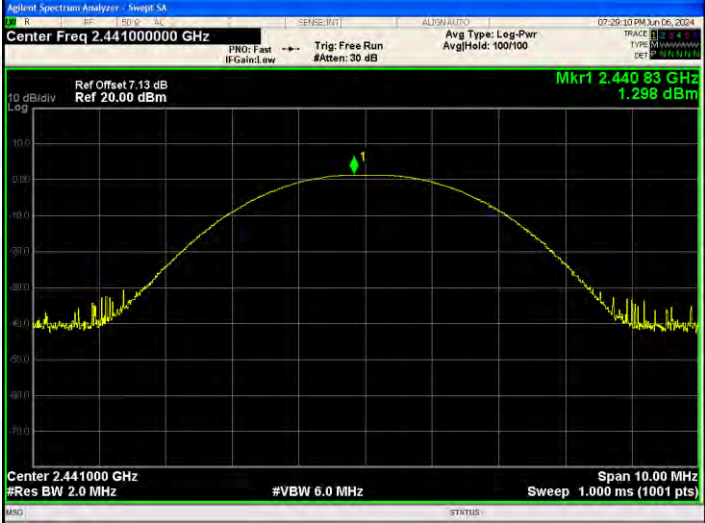

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.811	20.97	PASS
	MCH	1.298	20.97	PASS
	HCH	0.54	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	1.608	20.97	PASS
	MCH	1.945	20.97	PASS
	HCH	1.237	20.97	PASS
EDR mode (8DPSK)	LCH	1.906	20.97	PASS
	MCH	2.241	20.97	PASS
	HCH	1.493	20.97	PASS



Test Graph:

Graphs	
GFSK/LCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 7.07 dB          Ref 20.00 dBm          Mkr1 2.40194 GHz          0.811 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.441000000 GHz          Ref Offset 7.13 dB          Ref 20.00 dBm          Mkr1 2.44093 GHz          1.298 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.480000000 GHz          Ref Offset 7.16 dB          Ref 20.00 dBm          Mkr1 2.48007 GHz          0.540 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 7.07 dB          Ref 20.00 dBm          Mkr1 2.40192 GHz          1.608 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.44100000 GHz          Ref Offset 7.13 dB          Ref 20.00 dBm          Mkr1 2.44083 GHz          1.945 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.48000000 GHz          Ref Offset 7.16 dB          Ref 20.00 dBm          Mkr1 2.48010 GHz          1.237 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>




<p>8DPSK/LCH</p>		
<p>8DPSK /MCH</p>		
<p>8DPSK /HCH</p>		



### 10. 20DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

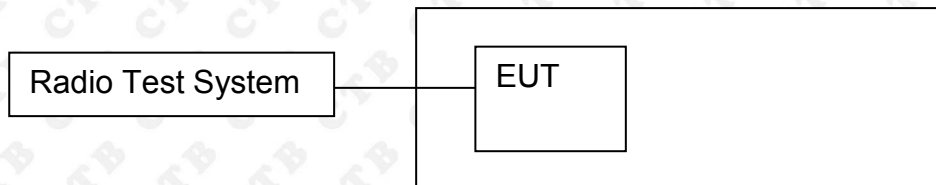

#### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

#### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.854	<b>PASS</b>
	Mid channel	0.867	<b>PASS</b>
	High channel	0.871	<b>PASS</b>
π/4DQPSK	Low channel	1.272	<b>PASS</b>
	Mid channel	1.274	<b>PASS</b>
	High channel	1.279	<b>PASS</b>
8DPSK	Low channel	1.289	<b>PASS</b>
	Mid channel	1.311	<b>PASS</b>
	High channel	1.288	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.402445 GHz -21.342 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 823.70 kHz Total Power 7.21 dBm</p> <p>Transmit Freq Error 18.386 kHz OBW Power 99.00 % x dB Bandwidth 854.0 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.13 dB Ref 27.13 dBm Mkr3 2.44145 GHz -20.284 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 819.64 kHz Total Power 7.95 dBm</p> <p>Transmit Freq Error 16.145 kHz OBW Power 99.00 % x dB Bandwidth 867.0 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.16 dB Ref 27.16 dBm Mkr3 2.480455 GHz -22.229 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 846.11 kHz Total Power 6.94 dBm</p> <p>Transmit Freq Error 19.187 kHz OBW Power 99.00 % x dB Bandwidth 871.3 kHz x dB -20.00 dB</p>




<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Mkr3: 2.402657 GHz -20.416 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.86 dBm</td> </tr> <tr> <td>1.1898 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>21.263 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.272 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.86 dBm	1.1898 MHz			Transmit Freq Error	OBW Power	99.00 %	21.263 kHz	x dB	-20.00 dB	x dB Bandwidth			1.272 MHz		
Occupied Bandwidth	Total Power	6.86 dBm																	
1.1898 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
21.263 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.272 MHz																			
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Mkr3: 2.441659 GHz -19.628 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.71 dBm</td> </tr> <tr> <td>1.1806 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>21.847 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.274 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.71 dBm	1.1806 MHz			Transmit Freq Error	OBW Power	99.00 %	21.847 kHz	x dB	-20.00 dB	x dB Bandwidth			1.274 MHz		
Occupied Bandwidth	Total Power	7.71 dBm																	
1.1806 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
21.847 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.274 MHz																			
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Mkr3: 2.480663 GHz -20.802 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.69 dBm</td> </tr> <tr> <td>1.1827 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>22.969 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.279 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.69 dBm	1.1827 MHz			Transmit Freq Error	OBW Power	99.00 %	22.969 kHz	x dB	-20.00 dB	x dB Bandwidth			1.279 MHz		
Occupied Bandwidth	Total Power	6.69 dBm																	
1.1827 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
22.969 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.279 MHz																			



<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Mkr3: 2.402662 GHz -22.685 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.84 dBm</td> </tr> <tr> <td>1.1930 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>17.464 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.289 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.84 dBm	1.1930 MHz			Transmit Freq Error	OBW Power	99.00 %	17.464 kHz	x dB	-20.00 dB	x dB Bandwidth			1.289 MHz		
Occupied Bandwidth	Total Power	6.84 dBm																	
1.1930 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
17.464 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.289 MHz																			
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Mkr3: 2.441674 GHz -21.004 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.03 dBm</td> </tr> <tr> <td>1.2099 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>18.684 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.311 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.03 dBm	1.2099 MHz			Transmit Freq Error	OBW Power	99.00 %	18.684 kHz	x dB	-20.00 dB	x dB Bandwidth			1.311 MHz		
Occupied Bandwidth	Total Power	7.03 dBm																	
1.2099 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
18.684 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.311 MHz																			
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Mkr3: 2.480662 GHz -21.157 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.67 dBm</td> </tr> <tr> <td>1.2074 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>18.145 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.288 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.67 dBm	1.2074 MHz			Transmit Freq Error	OBW Power	99.00 %	18.145 kHz	x dB	-20.00 dB	x dB Bandwidth			1.288 MHz		
Occupied Bandwidth	Total Power	6.67 dBm																	
1.2074 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
18.145 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.288 MHz																			

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

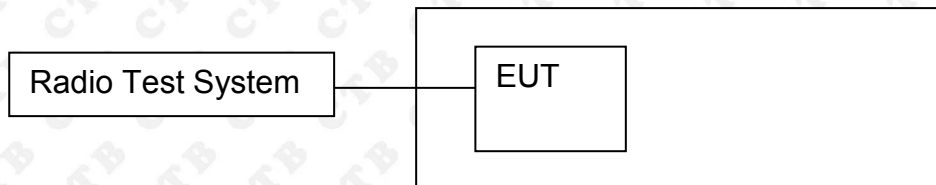

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result


Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.569	PASS
GFSK	MCH	1.004	0.578	PASS
GFSK	HCH	1.002	0.581	PASS
$\pi/4$ DQPSK	LCH	1.004	0.848	PASS
$\pi/4$ DQPSK	MCH	1.000	0.849	PASS
$\pi/4$ DQPSK	HCH	0.996	0.853	PASS
8DPSK	LCH	0.994	0.859	PASS
8DPSK	MCH	1.004	0.874	PASS
8DPSK	HCH	1.002	0.859	PASS



Test Graph

Graphs																												
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 998.000000 kHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 998 kHz -0.041 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>998 kHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>-0.041 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401868 GHz</td> <td></td> <td></td> <td>-0.766 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz ( $\Delta$ )			-0.041 dB	2	F	1	f		2.401868 GHz			-0.766 dBm
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz ( $\Delta$ )			-0.041 dB																				
2	F	1	f		2.401868 GHz			-0.766 dBm																				
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.004000000 MHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.004 MHz -0.247 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.004 MHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>-0.247 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440868 GHz</td> <td></td> <td></td> <td>-0.438 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz ( $\Delta$ )			-0.247 dB	2	F	1	f		2.440868 GHz			-0.438 dBm
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz ( $\Delta$ )			-0.247 dB																				
2	F	1	f		2.440868 GHz			-0.438 dBm																				
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.002000000 MHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz 0.227 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>0.227 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478862 GHz</td> <td></td> <td></td> <td>-2.062 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz ( $\Delta$ )			0.227 dB	2	F	1	f		2.478862 GHz			-2.062 dBm
MNR	MODE	FREQ	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz ( $\Delta$ )			0.227 dB																				
2	F	1	f		2.478862 GHz			-2.062 dBm																				

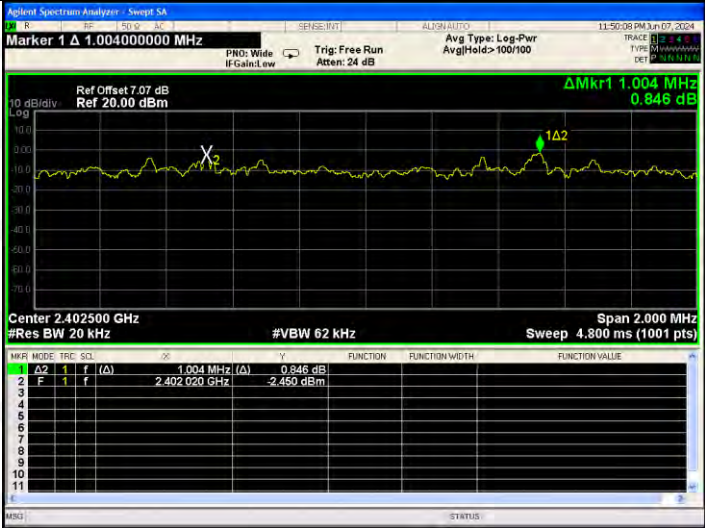


<p><math>\pi/4</math>DQPSK/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.004 MHz (Δ)</td> <td></td> <td></td> <td>0.846 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 020 GHz</td> <td></td> <td></td> <td>-2.450 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.004 MHz (Δ)			0.846 dB	2	F	1	f		2.402 020 GHz			-2.450 dBm
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)		1.004 MHz (Δ)			0.846 dB																				
2	F	1	f		2.402 020 GHz			-2.450 dBm																				
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.000 MHz (Δ)</td> <td></td> <td></td> <td>0.122 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 014 GHz</td> <td></td> <td></td> <td>-1.456 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.000 MHz (Δ)			0.122 dB	2	F	1	f		2.441 014 GHz			-1.456 dBm
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)		1.000 MHz (Δ)			0.122 dB																				
2	F	1	f		2.441 014 GHz			-1.456 dBm																				
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>996 kHz (Δ)</td> <td></td> <td></td> <td>-0.507 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 016 GHz</td> <td></td> <td></td> <td>-2.208 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		996 kHz (Δ)			-0.507 dB	2	F	1	f		2.479 016 GHz			-2.208 dBm
MNR	MODE	TRC	SCN	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ2	1	f (Δ)		996 kHz (Δ)			-0.507 dB																				
2	F	1	f		2.479 016 GHz			-2.208 dBm																				

<p>8DPSK/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>994 kHz (Δ)</td> <td>-0.187 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.402 018 GHz</td> <td>-2.226 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	994 kHz (Δ)	-0.187 dB				2	F	1	f	2.402 018 GHz	-2.226 dBm				
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	994 kHz (Δ)	-0.187 dB																								
2	F	1	f	2.402 018 GHz	-2.226 dBm																								
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.004 MHz (Δ)</td> <td>0.190 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.441 010 GHz</td> <td>-1.640 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	1.004 MHz (Δ)	0.190 dB				2	F	1	f	2.441 010 GHz	-1.640 dBm				
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	1.004 MHz (Δ)	0.190 dB																								
2	F	1	f	2.441 010 GHz	-1.640 dBm																								
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz (Δ)</td> <td>0.720 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.479 014 GHz</td> <td>-2.963 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	ΔZ	1	f (Δ)	1.002 MHz (Δ)	0.720 dB				2	F	1	f	2.479 014 GHz	-2.963 dBm				
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	ΔZ	1	f (Δ)	1.002 MHz (Δ)	0.720 dB																								
2	F	1	f	2.479 014 GHz	-2.963 dBm																								



## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

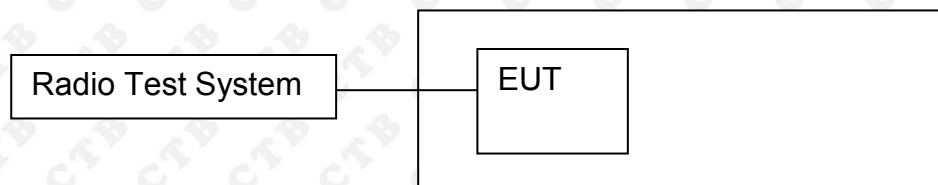

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS
8DPSK	Hop	79	$\geq 15$	PASS


Test Graph

Graphs


GFSK/Hop

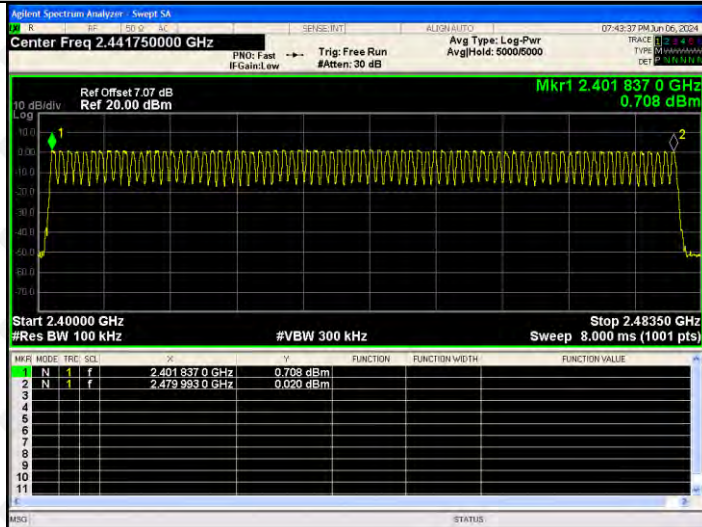

$\pi/4$ DQPSK/Hop

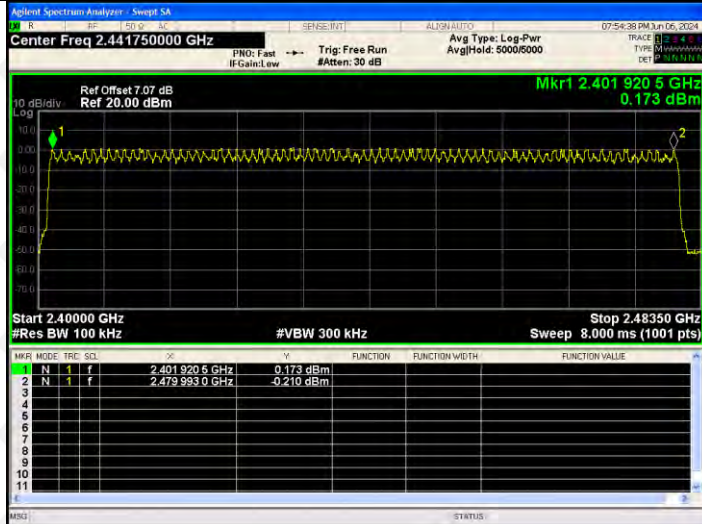


8DPSK/Hop

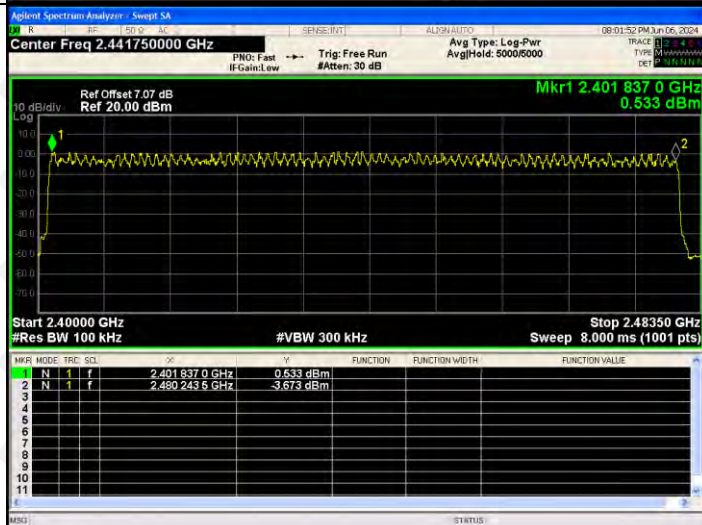



### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

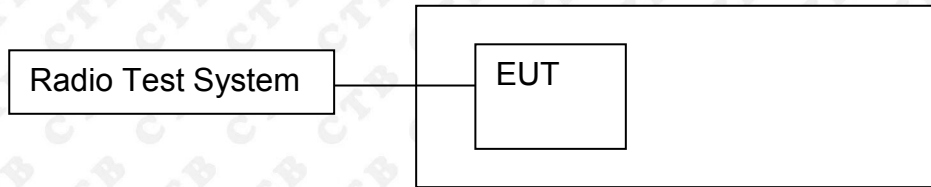

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.636	261.76	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

$$DH5: 1600/79/6 * 0.4 * 79 * (MkrDelta) / 1000$$


$$DH3: 1600/79/4 * 0.4 * 79 * (MkrDelta) / 1000$$

$$DH1: 1600/79/2 * 0.4 * 79 * (MkrDelta) / 1000$$


Remark: Mkr Delta is once pulse time.




## Test Graph

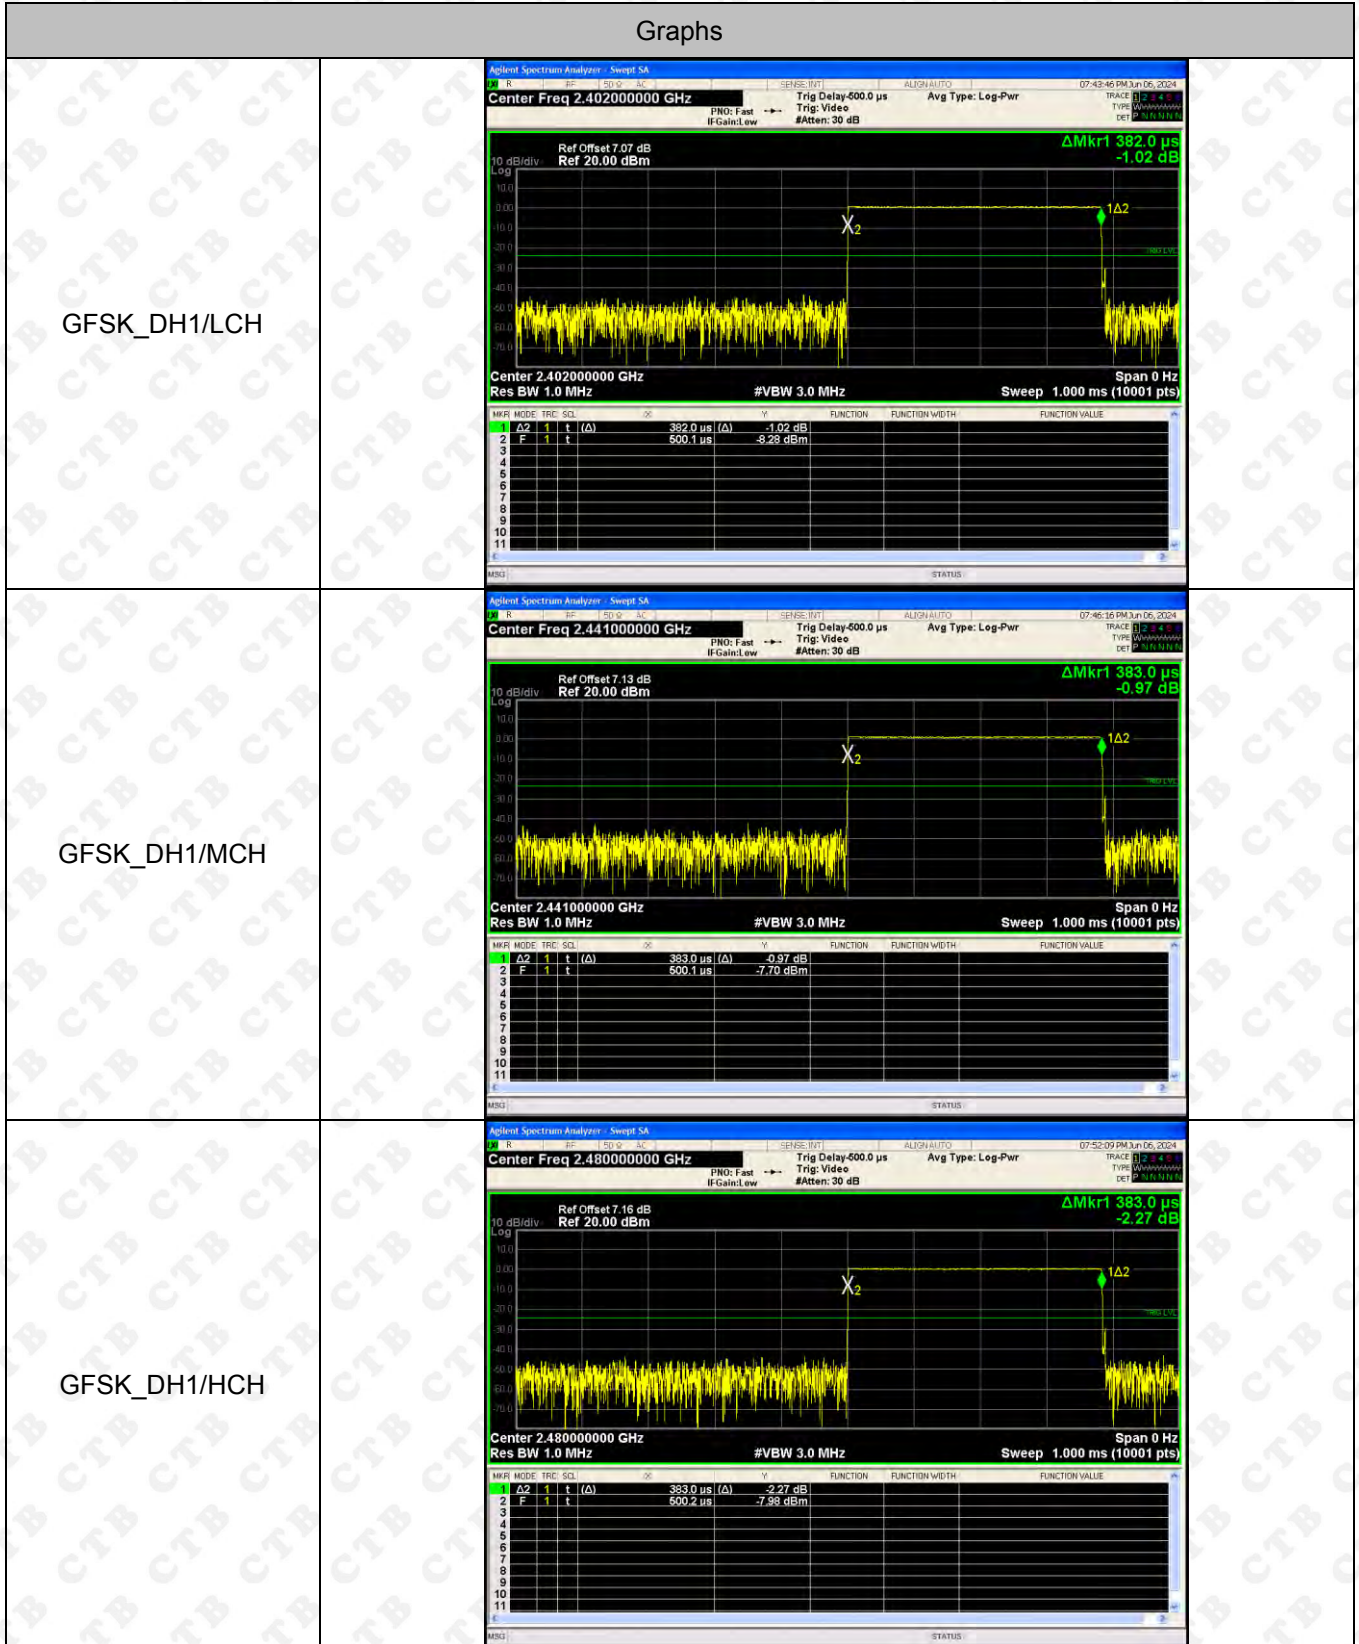


GFSK\_DH3/LCH

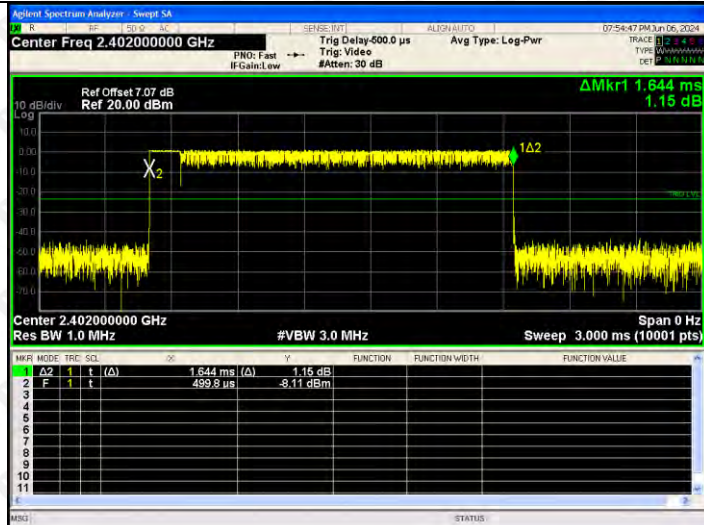

GFSK\_DH3/MCH

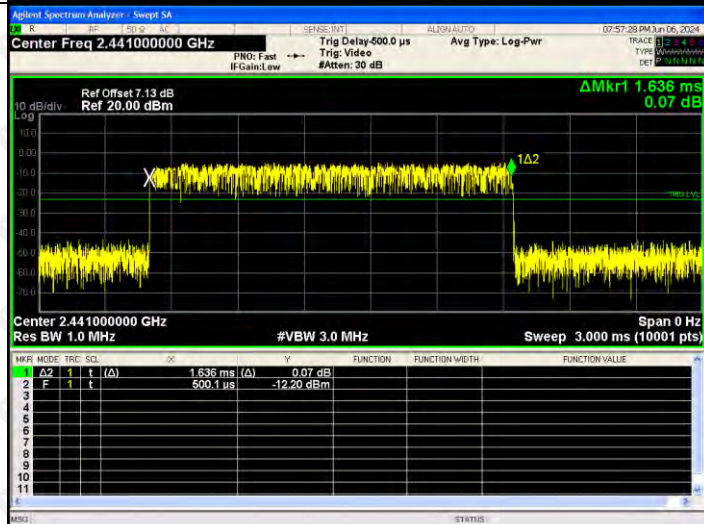


GFSK\_DH3/HCH

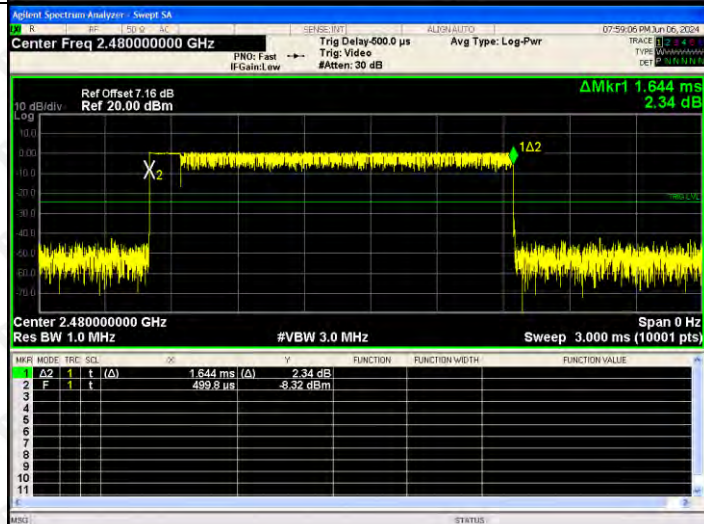





GFSK\_DH5/LCH

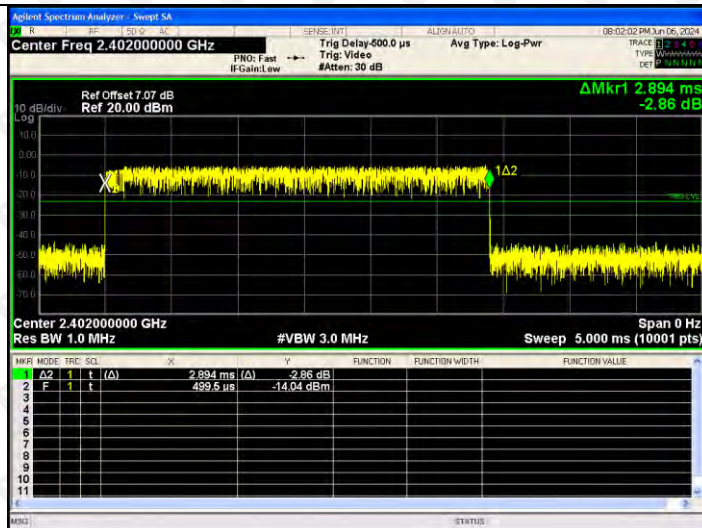

GFSK\_DH5/MCH

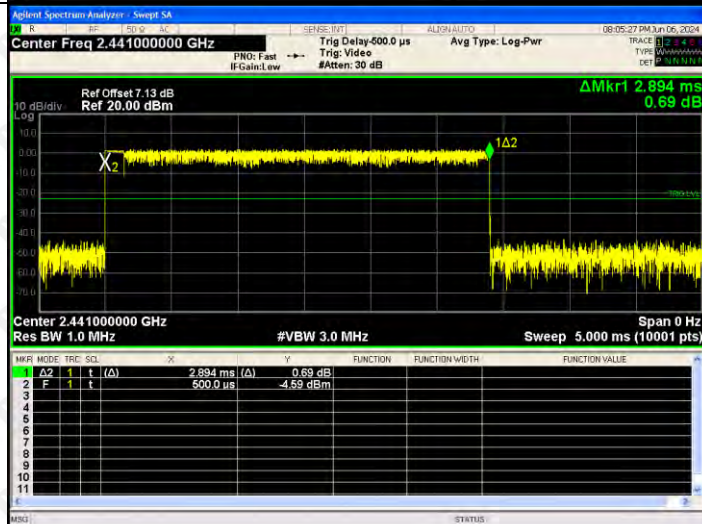

GFSK\_DH5/HCH

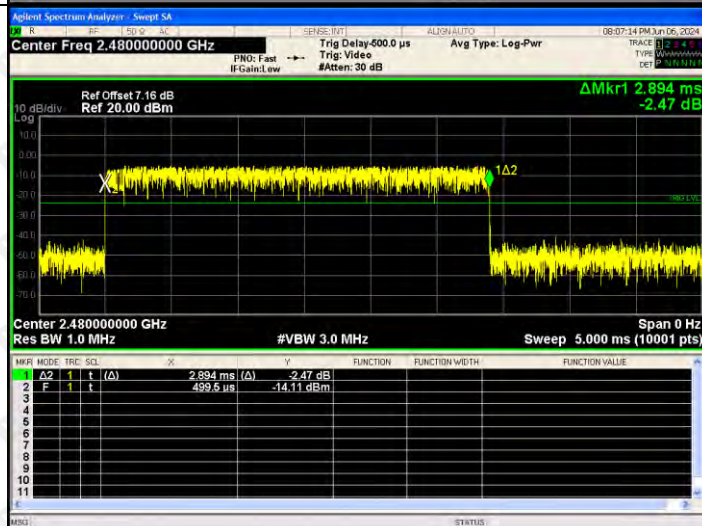

### 14. PSEUDORANDOM FREQUENCY

#### 14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


#### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

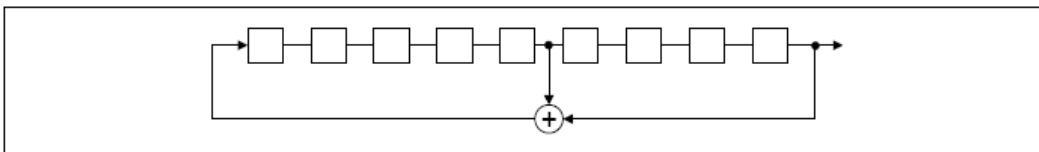

An example of Pseudorandom Frequency Hopping Sequence as follow:

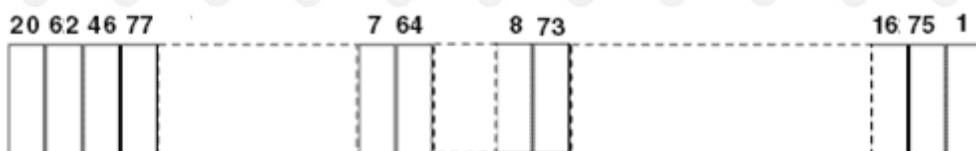

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:


The antenna is Chip antenna. The best case gain of the antenna is 2.67dBi.



## 16. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G

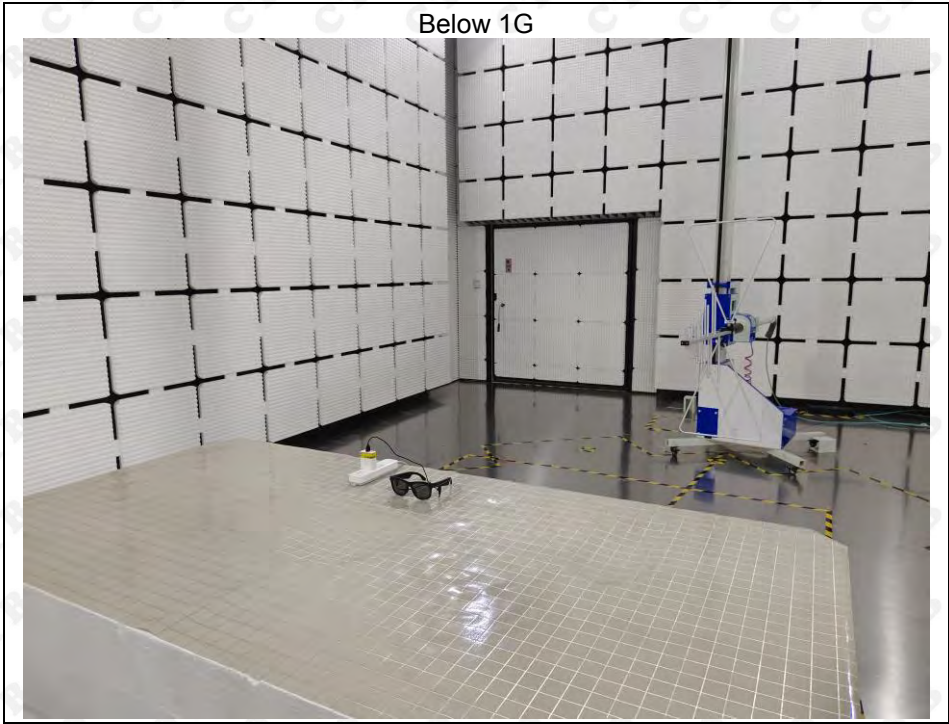

Above 1G



## Conducted emissions



\*\*\*\*\* END OF REPORT \*\*\*\*\*