



**Guangdong Changhong Electronics Co., Ltd.**

Application  
For  
Certification  
**FCC ID: 2ABNO49YD1100UA**  
Computer Peripheral

Report No.: 140909035SZN-001

Prepared and Checked by:

Approved by:

Sign on file

Hardy Suo  
Assistant Engineer

---

Andy Yan  
Project Engineer  
Date: September 16, 2014

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_PC\_b  
FCC ID: 2ABNO49YD1100UA

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**  
6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

# INTERTEK TESTING SERVICES

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

## MEASUREMENT / TECHNICAL REPORT

Guangdong Changhong Electronics Co., Ltd.

MODEL: LED49YD1100UA

FCC ID: 2ABNO49YD1100UA

September 16, 2014

This report concerns (check one:) Original Grant ☒ Class II Change ☐

Equipment Type: JBP-Class B Computing Device Peripheral

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart B for unintentional radiator – the new 47 CFR [10-01-13 Edition] provision.

Report prepared by:

Hardy Suo  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, D Block, Huahan Building, Langshan Road  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0743  
Fax: (86 755) 8601 6751

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0</b>	<b><u>General Description</u></b> .....	2
1.1	Product Description.....	2
1.2	Related Submittal(s) Grants.....	2
1.3	Test Methodology.....	3
1.4	Test Facility.....	3
<b>2.0</b>	<b><u>System Test Configuration</u></b> .....	5
2.1	Justification.....	5
2.2	EUT Exercising Software.....	5
2.3	Special Accessories.....	5
2.4	Equipment Modification.....	5
2.5	Measurement Uncertainty.....	6
2.6	Support Equipment List and Description.....	6
<b>3.0</b>	<b><u>Emission Results</u></b> .....	8
3.1	Field Strength Calculation.....	9
3.2	Radiated Emission Configuration Photograph.....	11
3.3	Radiated Emission Data.....	12
3.4	Conducted Emission Configuration Photograph.....	15
3.5	Conducted Emission Data.....	16
<b>4.0</b>	<b><u>Equipment Photographs</u></b> .....	22
<b>5.0</b>	<b><u>Product Labelling</u></b> .....	24
<b>6.0</b>	<b><u>Technical Specifications</u></b> .....	26
<b>7.0</b>	<b><u>Instruction Manual</u></b> .....	28
<b>8.0</b>	<b><u>Miscellaneous Information</u></b> .....	30
<b>9.0</b>	<b><u>Test Equipment List</u></b> .....	34

---

## INTERTEK TESTING SERVICES

---

List of attached file

Exhibit Type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated photos	radiated photos.pdf
Test Setup Photo	Conducted photos	conducted photos.pdf
External Photo	External Photos	external photos.pdf
Internal Photo	Internal Photos	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidential Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 1**

### **GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

---

### 1.0 **General Description**

#### 1.1 Product Description

The Equipment Under Test (EUT) is a LED TV. The device can be used to connect PC by HDMI and VGA port. The EUT is powered by AC 120V/60Hz.

#### 1.2 Related Submittal(s) Grants

This is an application for certification of a computer peripheral. Other digital functions were reported in the verification report: 140909034SZN-001.

## INTERTEK TESTING SERVICES

---

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).



---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 2**

### **SYSTEM TEST CONFIGURATION**

---

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by AC 120V/60Hz during the test. The worst case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 1GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

#### 2.2 EUT Exercising Software

N/A

#### 2.3 Special Accessories

N/A

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Guangdong Changhong Electronics Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

---

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Laptop	Lenovo	T420
Hard Disk	Smart.drive	HD-003
USB Memory	TOSHIBA	UHYBS-004G-BL
1394 Cable	Smart.drive	Unshielded, Length 180cm
USB Cable	Smart.drive	Unshielded, Length 155cm
Dummy Load	N/A	N/A
VGA Cable	HP	Unshielded, Length 180cm
HDMI Cable*3	N/A	Unshielded, Length 110cm
Component In Cable	N/A	Unshielded, Length 120cm
PC Audio Input Cable	N/A	Unshielded, Length 150cm
Digital Audio Out Cable	N/A	Unshielded, Length 120cm
Audio Cable (RL)	N/A	Unshielded, Length 120cm
Audio Output Cable	N/A	Unshielded, Length 120cm
Tuner Resister	N/A	75ohm
Remote controller	CHANGHONG	N/A

---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 3**

### **EMISSION RESULTS**

## INTERTEK TESTING SERVICES

---

### 3.0 **Emission Results**

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

---

## INTERTEK TESTING SERVICES

---

### 3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

---

## INTERTEK TESTING SERVICES

---

### 3.1 Field Strength Calculation (cont'd)

#### Example

Assume a receiver reading of 62.0dB $\mu$ V is obtained. The antenna factor of 7.4dB/m and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB/m}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$PD = 0\text{dB}$$

$$AV = -10\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$

## **INTERTEK TESTING SERVICES**

---

### 3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
At  
109.080MHz (VGA Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.



## INTERTEK TESTING SERVICES

---

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 4.9dB margin (VGA Mode)

#### **TEST PERSONNEL:**

*Sign on file*

Hardy Suo, Assistant Engineer  
*Typed/Printed Name*

September 15, 2014  
*Date*

---

## INTERTEK TESTING SERVICES

---

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: HDMI In

**Table 1**

**Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	65.890	45.6	20.0	6.9	32.5	40.0	-7.5
Horizontal	111.480	36.0	20.0	14.8	30.8	43.5	-12.7
Horizontal	143.982	35.0	20.0	21.9	36.9	43.5	-6.6
Vertical	30.970	33.1	20.0	16.8	29.9	40.0	-10.1
Vertical	65.890	41.4	20.0	11.3	32.7	40.0	-7.3
Vertical	74.160	46.1	20.0	7.1	33.2	40.0	-6.8

**NOTES:**

1. Quasi-Peak detector is used for frequency up to 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 0.3- meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.

Test Engineer: Hardy Suo

## INTERTEK TESTING SERVICES

---

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: VGA

**Table 1**

### **Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	65.890	36.8	20.0	14.6	31.4	40.0	-8.6
Horizontal	109.080	38.9	20.0	19.7	38.6	43.5	-4.9
Horizontal	274.440	35.6	20.0	22.1	37.7	46.0	-8.3
Vertical	65.880	36.6	20.0	16.6	33.2	40.0	-6.8
Vertical	73.165	45.2	20.0	7.3	32.5	40.0	-7.5
Vertical	143.975	38.6	20.0	15.3	33.9	43.5	-9.6

**NOTES:**

1. Quasi-Peak detector is used for frequency up to 1GHz.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 0.3- meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.

Test Engineer: Hardy Suo

## **INTERTEK TESTING SERVICES**

---

### 3.4 Conducted Emission Configuration Photograph

Worst Case Conducted Configuration  
at  
0.194 MHz (HDMI In Mode)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

## INTERTEK TESTING SERVICES

---

### 3.5 Conducted Emission Data

Judgement: Passed by 9.1 dB margin (HDMI In Mode)

#### ***TEST PERSONNEL:***

*Sign on file*


Hardy Suo, Assistant Engineer  
*Typed/Printed Name*

September 15, 2014  
*Date*

## INTERTEK TESTING SERVICES

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: HDMI In  
Phase: Live

### Conducted Emission Test - FCC

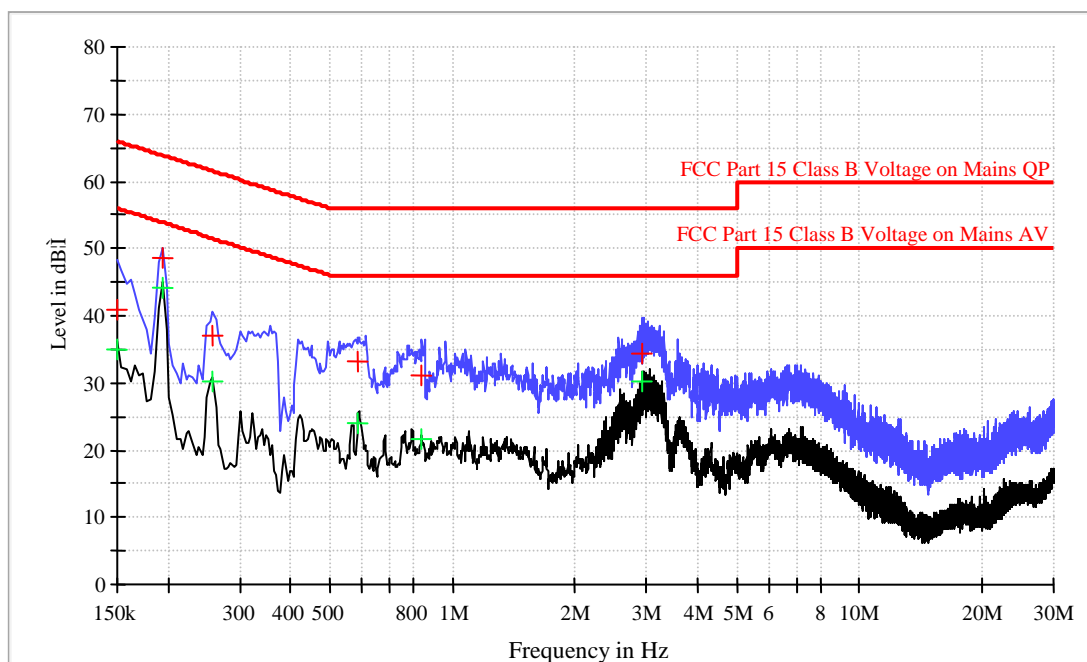

### Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	40.8	L1	9.8	25.2	66.0
0.194	48.7	L1	9.8	15.2	63.9
0.258	37.0	L1	9.8	24.5	61.5
0.586	33.1	L1	9.9	22.9	56.0
0.842	31.1	L1	9.9	24.9	56.0
2.938	34.5	L1	9.9	21.5	56.0

### Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150	35.1	L1	9.8	20.9	56.0
0.194	44.3	L1	9.8	9.6	53.9
0.258	30.2	L1	9.8	21.3	51.5
0.586	24.1	L1	9.9	21.9	46.0
0.842	21.5	L1	9.9	24.5	46.0
2.938	30.2	L1	9.9	15.8	46.0


Test Engineer: Hardy Suo

TRF No.: FCC 15C\_PC\_b  
FCC ID: 2ABNO49YD1100UA

## INTERTEK TESTING SERVICES

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: HDMI In  
Phase: Neutral

### Conducted Emission Test - FCC

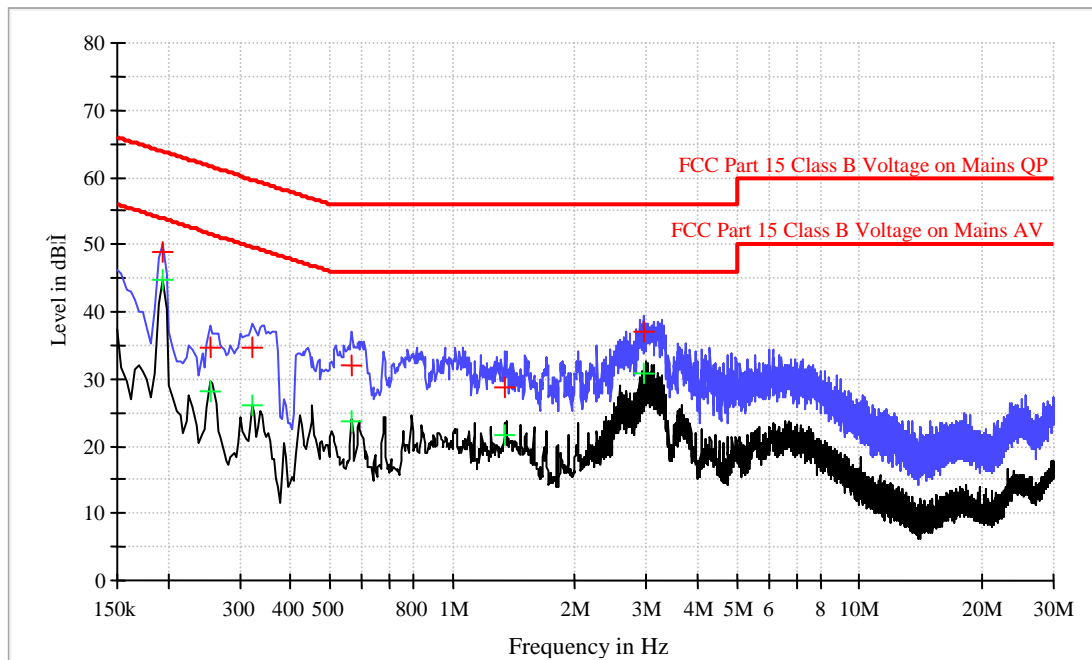

### Result Table QP

Frequency (MHz)	QuasiPeak (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.194	48.9	N	10.0	15.0	63.9
0.254	34.7	N	10.1	26.9	61.6
0.322	34.7	N	10.1	25.0	59.7
0.566	32.1	N	10.2	23.9	56.0
1.346	28.9	N	10.2	27.1	56.0
2.970	37.0	N	10.3	19.0	56.0

### Result Table AV

Frequency (MHz)	Average (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.194	44.8	N	10.0	9.1	53.9
0.254	28.0	N	10.1	23.6	51.6
0.322	25.9	N	10.1	23.8	49.7
0.566	23.7	N	10.2	22.3	46.0
1.346	21.6	N	10.2	24.4	46.0
2.970	30.8	N	10.3	15.2	46.0


Test Engineer: Hardy Suo

TRF No.: FCC 15C\_PC\_b  
FCC ID: 2ABNO49YD1100UA

## INTERTEK TESTING SERVICES

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: VGA  
Phase: Live

### Conducted Emission Test - FCC

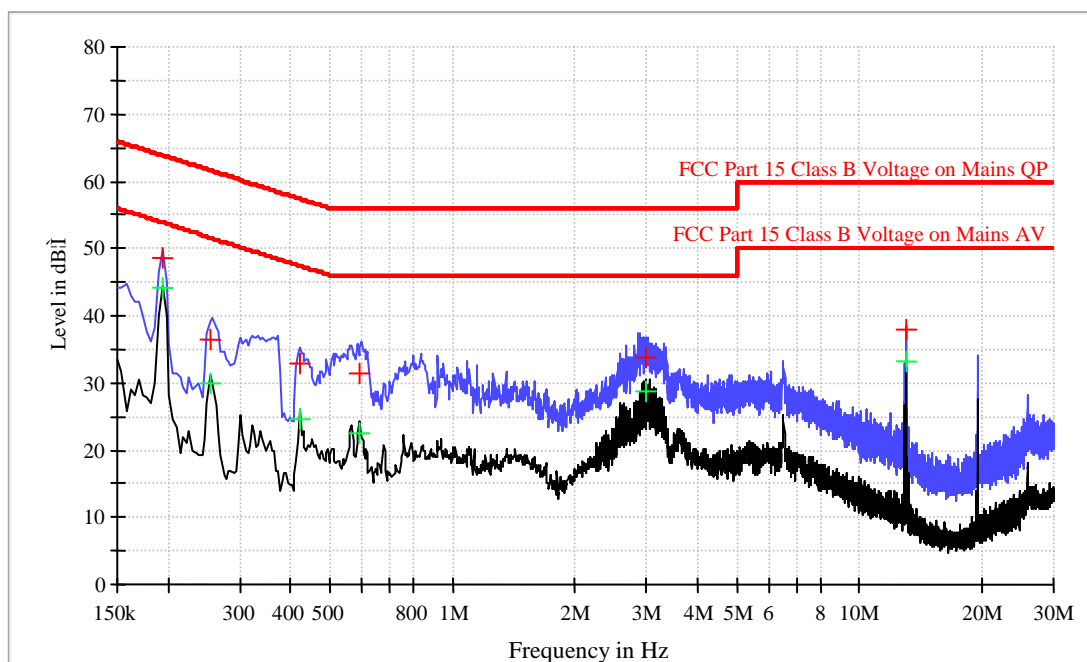

### Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.194	48.5	L1	9.8	15.4	63.9
0.254	36.5	L1	9.8	25.1	61.6
0.422	32.8	L1	9.8	24.6	57.4
0.590	31.4	L1	9.9	24.6	56.0
3.002	33.8	L1	9.9	22.2	56.0
13.010	37.9	L1	10.2	22.1	60.0

### Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.194	44.1	L1	9.8	9.8	53.9
0.254	30.0	L1	9.8	21.6	51.6
0.422	24.6	L1	9.8	22.8	47.4
0.590	22.4	L1	9.9	23.6	46.0
3.002	28.8	L1	9.9	17.2	46.0
13.010	33.3	L1	10.2	16.7	50.0

Test Engineer: Hardy Suo


TRF No.: FCC 15C\_PC\_b  
FCC ID: 2ABNO49YD1100UA



## INTERTEK TESTING SERVICES

Company: Guangdong Changhong Electronics Co., Ltd. Date of Test: September 15, 2014  
Model: LED49YD1100UA  
Operating Mode: VGA  
Phase: Neutral

### Conducted Emission Test - FCC

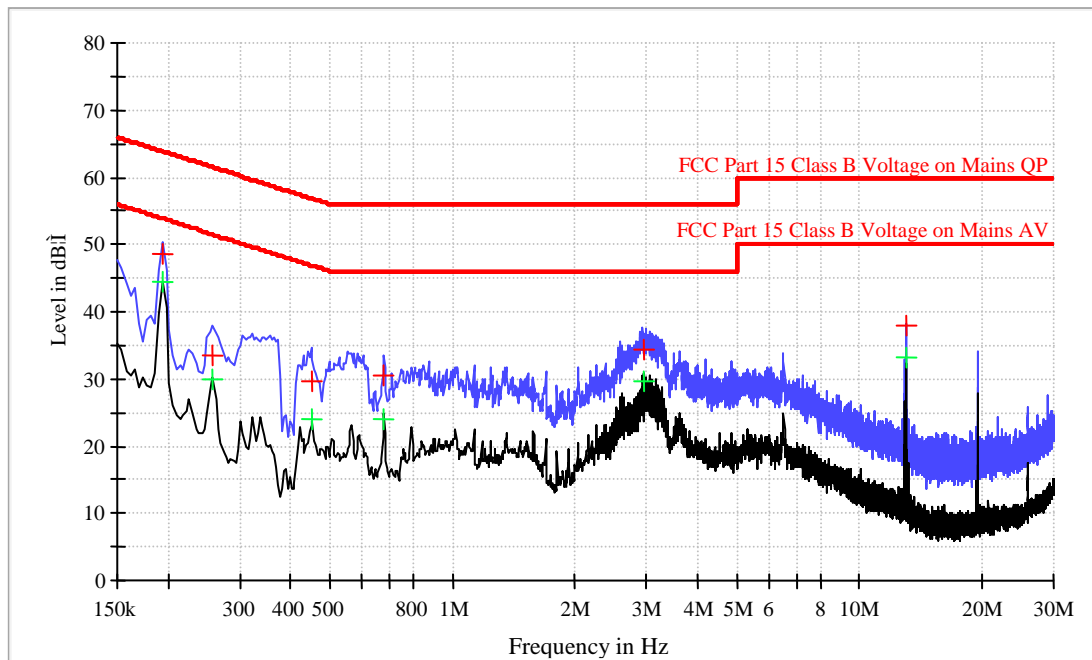

### Result Table QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.194	48.7	N	10.0	15.2	63.9
0.258	33.4	N	10.1	28.1	61.5
0.450	29.5	N	10.1	27.4	56.9
0.678	30.4	N	10.2	25.6	56.0
2.954	34.5	N	10.3	21.5	56.0
13.010	37.9	N	10.5	22.1	60.0

### Result Table AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.194	44.6	N	10.0	9.3	53.9
0.258	29.8	N	10.1	21.7	51.5
0.450	23.9	N	10.1	23.0	46.9
0.678	23.9	N	10.2	22.1	46.0
2.954	29.8	N	10.3	16.2	46.0
13.010	33.3	N	10.5	16.7	50.0

Test Engineer: Hardy Suo

TRF No.: FCC 15C\_PC\_b  
FCC ID: 2ABNO49YD1100UA

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 4**

### **EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 4.0 **Equipment Photographs**

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 5**

### **PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 6**

### **TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 6.0 **Technical Specifications**

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 7**

### **INSTRUCTION MANUAL**



## INTERTEK TESTING SERVICES

---

### 7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 8**

### **MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

### 8.0 **Miscellaneous Information**

This miscellaneous information includes emission measuring procedure.

---

## INTERTEK TESTING SERVICES

---

### 8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2009.

The computer peripheral equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 1GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

## **INTERTEK TESTING SERVICES**

---

### **8.1 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2009.

---

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 9**

### **TEST EQUIPMENT LIST**

---

## INTERTEK TESTING SERVICES

---

### 9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	Biconilog Antenna	ETS	3142C	00078828	28-Jun-2014	28-Jun-2015
SZ185-01	EMI Receiver	R & S	ESCI	100547	10-Mar-2014	10-Mar-2015
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-2014	19-Apr-2015
SZ062-04	RF Cable	RADIAL	RG 213U	--	03-Jul-2014	03-Jan-2015
SZ062-06	RF Cable	RADIAL	0.04-26.5GHz	083388	09-Nov-2013	09-Nov-2014
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	09-Nov-2013	09-Nov-2014
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	09-Nov-2013	09-Nov-2014
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	16-Jun-2014	16-Jun-2015
SZ188-03	Shielding Room	ETS	RFD-100	4100	22-Aug-2014	22-Aug-2015