



FCC RF Test Report

(Bluetooth)

Applicant: SKY PHONE LLC
Address of Applicant: 1348 Washington Av. Suite 350, Miami Beach, FL33139

Equipment Under Test (EUT)


Product Name: Tablet
Model No.: SKY PAD10
Trade Mark: SKY DEVICES

FCC ID: 2ABOSSKYPAD10

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 01 Dec., 2022
Date of Test: 02 Dec., 2022 to 04 Jan., 2023
Date of Report Issued: 05 Jan., 2023
Test Result: PASS

Tested by: Mike OU **Date:** 05 Jan., 2023
Reviewed by: Wenwen Zhang **Date:** 05 Jan., 2023
Approved by: Wenwen Zhang **Date:** 05 Jan., 2023
Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 05 Jan., 2023 | Original |
| | | |
| | | |
| | | |
| | | |
| | | |

2 Contents

Page

| | |
|--|----|
| Cover Page | 1 |
| 1 Version | 2 |
| 2 Contents | 3 |
| 3 General Information | 4 |
| 3.1 Client Information | 4 |
| 3.2 General Description of E.U.T. | 4 |
| 3.3 Test Mode and Test Environment | 5 |
| 3.4 Description of Test Auxiliary Equipment | 5 |
| 3.5 Measurement Uncertainty | 5 |
| 3.6 Additions to, Deviations, or Exclusions From the Method..... | 5 |
| 3.7 Laboratory Facility | 5 |
| 3.8 Laboratory Location..... | 6 |
| 3.9 Test Instruments List | 6 |
| 4 Measurement Setup and Procedure | 8 |
| 4.1 Test Channel | 8 |
| 4.2 Test Setup | 8 |
| 4.3 Test Procedure | 10 |
| 5 Test Results..... | 11 |
| 5.1 Summary | 11 |
| 5.1.1 Clause and data summary | 11 |
| 5.1.2 Test Limit..... | 12 |
| 5.2 Antenna Requirement | 13 |
| 5.3 AC Power Line Conducted Emission | 14 |
| 5.4 Emissions in Restricted Frequency Bands..... | 16 |
| 5.5 Emissions in Non-restricted Frequency Bands | 28 |

3 General Information

3.1 Client Information

| | |
|---------------|---|
| Applicant: | SKY PHONE LLC |
| Address: | 1348 Washington Av. Suite 350, Miami Beach, FL33139 |
| Manufacturer: | SKY PHONE LLC |
| Address: | 1348 Washington Av. Suite 350, Miami Beach, FL33139 |

3.2 General Description of E.U.T.

| | |
|------------------------|---|
| Product Name: | Tablet |
| Model No.: | SKY PAD10 |
| Operation Frequency: | 2402 MHz - 2480 MHz |
| Transfer Rate: | 1/2/3 Mbits/s |
| Number of Channel: | 79 |
| Modulation Type: | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Modulation Technology: | FHSS |
| Antenna Type: | Internal Antenna |
| Antenna Gain: | 1.3 dBi (declare by applicant) |
| Antenna transmit mode: | SISO (1TX, 1RX) |
| Power Supply: | Rechargeable Li-ion Battery DC3.85V, 5000mAh |
| AC Adapter: | Input: AC100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2000mA |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

3.3 Test Mode and Test Environment

| Test Modes: | |
|--|---|
| Non-hopping mode: | Keep the EUT in continuous transmitting mode. |
| Hopping mode: | Keep the EUT in hopping mode. |
| <i>Remark: For AC power line conducted emission and radiated spurious emission, pre-scan GFSK, $\pi/4$-DQPSK, 8DPSK modulation mode, found GFSK modulation was worse case mode. The report only reflects the test data of worst mode.</i> | |
| Operating Environment: | |
| Temperature: | 15°C ~ 35°C |
| Humidity: | 20 % ~ 75 % RH |
| Atmospheric Pressure: | 1008 mbar |

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

| Parameter | Expanded Uncertainty (Confidence of 95%(U = 2Uc(y))) |
|---|---|
| Conducted Emission for LISN (9kHz ~ 10MHz) | 1.9 dB |
| Conducted Emission for LISN (10MHz ~ 30MHz) | 2.6 dB |
| Radiated Emission (30MHz ~ 1GHz) (3m SAC) | 3.8 dB |
| Radiated Emission (1GHz ~ 18GHz) (3m SAC) | 3.6 dB |
| Radiated Emission (18GHz ~ 40GHz) (3m SAC) | 5.34 dB |
| Radiated Emission (30MHz ~ 1GHz) (10m SAC) | 3.7 dB |

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.6 Additions to, Deviations, or Exclusions From the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

| Radiated Emission(3m SAC): | | | | | |
|-------------------------------|-----------------|-----------------|------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | ETS | 9m*6m*6m | WXJ001-1 | 04-14-2021 | 04-13-2024 |
| Loop Antenna | Schwarzbeck | FMZB 1519 B | WXJ002-4 | 03-07-2022 | 03-06-2023 |
| BiConiLog Antenna | Schwarzbeck | VULB9163 | WXJ002 | 03-08-2022 | 03-07-2023 |
| Horn Antenna | Schwarzbeck | BBHA9120D | WXJ002-2 | 03-08-2022 | 03-07-2023 |
| Horn Antenna | Schwarzbeck | BBHA9170 | WXJ002-5 | 04-07-2022 | 04-06-2023 |
| Pre-amplifier (30MHz ~ 1GHz) | Schwarzbeck | BBV9743B | WXJ001-2 | 01-20-2022 | 01-19-2023 |
| Pre-amplifier (1GHz ~ 18GHz) | SKET | LNPA_0118G-50 | WXJ001-3 | 01-20-2022 | 01-19-2023 |
| Pre-amplifier (18GHz ~ 40GHz) | RF System | TRLA-180400G45B | WXJ002-7 | 03-30-2022 | 03-29-2023 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | WXJ003-1 | 03-05-2022 | 03-04-2023 |
| Spectrum Analyzer | Rohde & Schwarz | FSP 30 | WXJ004 | 01-20-2022 | 01-19-2023 |
| Spectrum Analyzer | KEYSIGHT | N9010B | WXJ004-2 | 10-17-2022 | 10-16-2023 |
| Coaxial Cable (30MHz ~ 1GHz) | JYTSZ | JYT3M-1G-NN-8M | WXG001-4 | 01-20-2022 | 01-19-2023 |
| Coaxial Cable (1GHz ~ 18GHz) | JYTSZ | JYT3M-18G-NN-8M | WXG001-5 | 01-20-2022 | 01-19-2023 |
| Coaxial Cable (18GHz ~ 40GHz) | JYTSZ | JYT3M-40G-SS-8M | WXG001-7 | 01-20-2022 | 01-19-2023 |
| Band Reject Filter Group | Tonscend | JS0806-F | WXJ089 | N/A | |
| Test Software | Tonscend | TS+ | Version: 3.0.0.1 | | |

| Radiated Emission(10m SAC): | | | | | |
|-----------------------------|--------------|------------------|-------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 10m SAC | ETS | RFSD-100-F/A | WXJ090 | 04-28-2021 | 04-27-2024 |
| BiConiLog Antenna | SCHWARZBECK | VULB 9168 | WXJ090-1 | 04-01-2022 | 03-31-2023 |
| BiConiLog Antenna | SCHWARZBECK | VULB 9168 | WXJ090-2 | 03-31-2022 | 03-30-2023 |
| EMI Test Receiver | R&S | ESR 3 | WXJ090-3 | 03-30-2022 | 03-29-2023 |
| EMI Test Receiver | R&S | ESR 3 | WXJ090-4 | 03-30-2022 | 03-29-2023 |
| Low Pre-amplifier | Bost | LNA 0920N | WXJ090-6 | 01-20-2022 | 01-19-2023 |
| Low Pre-amplifier | Bost | LNA 0920N | WXJ090-7 | 01-20-2022 | 01-19-2023 |
| Cable | Bost | JYT10M-1G-NN-10M | WXG002-7 | 01-20-2022 | 01-19-2023 |
| Cable | Bost | JYT10M-1G-NN-10M | WXG002-8 | 01-20-2022 | 01-19-2023 |
| Test Software | R&S | EMC32 | Version: 10.50.40 | | |

| Conducted Emission: | | | | | |
|-----------------------------------|---------------------|------------------|--------------------|-----------------------------|---------------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| EMI Test Receiver | Rohde & Schwarz | ESR3 | WXJ003-2 | 07-12-2022 | 07-11-2023 |
| LISN | Schwarzbeck | NSLK 8127 | QCJ001-13 | 02-24-2022 | 02-23-2023 |
| LISN | Rohde & Schwarz | ESH3-Z5 | WXJ005-1 | 03-30-2022 | 03-29-2023 |
| LISN Coaxial Cable (9kHz ~ 30MHz) | JYTSZ | JYTCE-1G-NN-2M | WXG003-1 | 02-24-2022 | 02-23-2023 |
| RF Switch | TOP PRECISION | RSU0301 | WXG003 | N/A | |
| Test Software | AUDIX | E3 | Version: 6.110919b | | |

| Conducted Method: | | | | | |
|------------------------------|---------------------|------------------|-------------------|-----------------------------|---------------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| Spectrum Analyzer | Keysight | N9010B | WXJ004-3 | 10-17-2022 | 10-16-2023 |
| Temperature Humidity Chamber | ZHONG ZHI | CZ-A-80D | WXJ032-3 | 03-19-2021 | 03-18-2023 |
| Power Detector Box | MWRFTTEST | MW100-PSB | WXJ007-4 | 10-17-2022 | 10-16-2023 |
| DC Power Supply | Keysight | E3642A | WXJ025-2 | N/A | |
| RF Control Unit | MWRFTTEST | MW100-RFCB | WXG006 | N/A | |
| Test Software | MWRFTTEST | MTS 8310 | Version: 2.0.0.0 | | |

4 Measurement Setup and Procedure

4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

| Lowest channel | | Middle channel | | Highest channel | |
|----------------|-----------------|----------------|-----------------|-----------------|-----------------|
| Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) | Channel No. | Frequency (MHz) |
| 0 | 2402 | 39 | 2441 | 78 | 2480 |

4.2 Test Setup


1) Conducted emission measurement:




Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:

Below 1GHz (10m SAC)

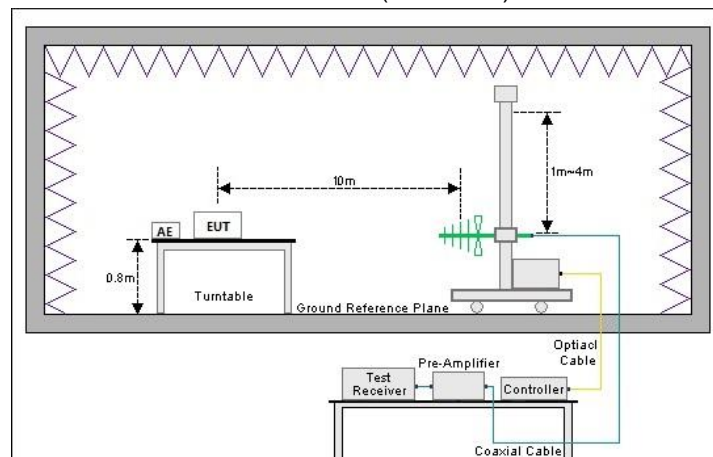

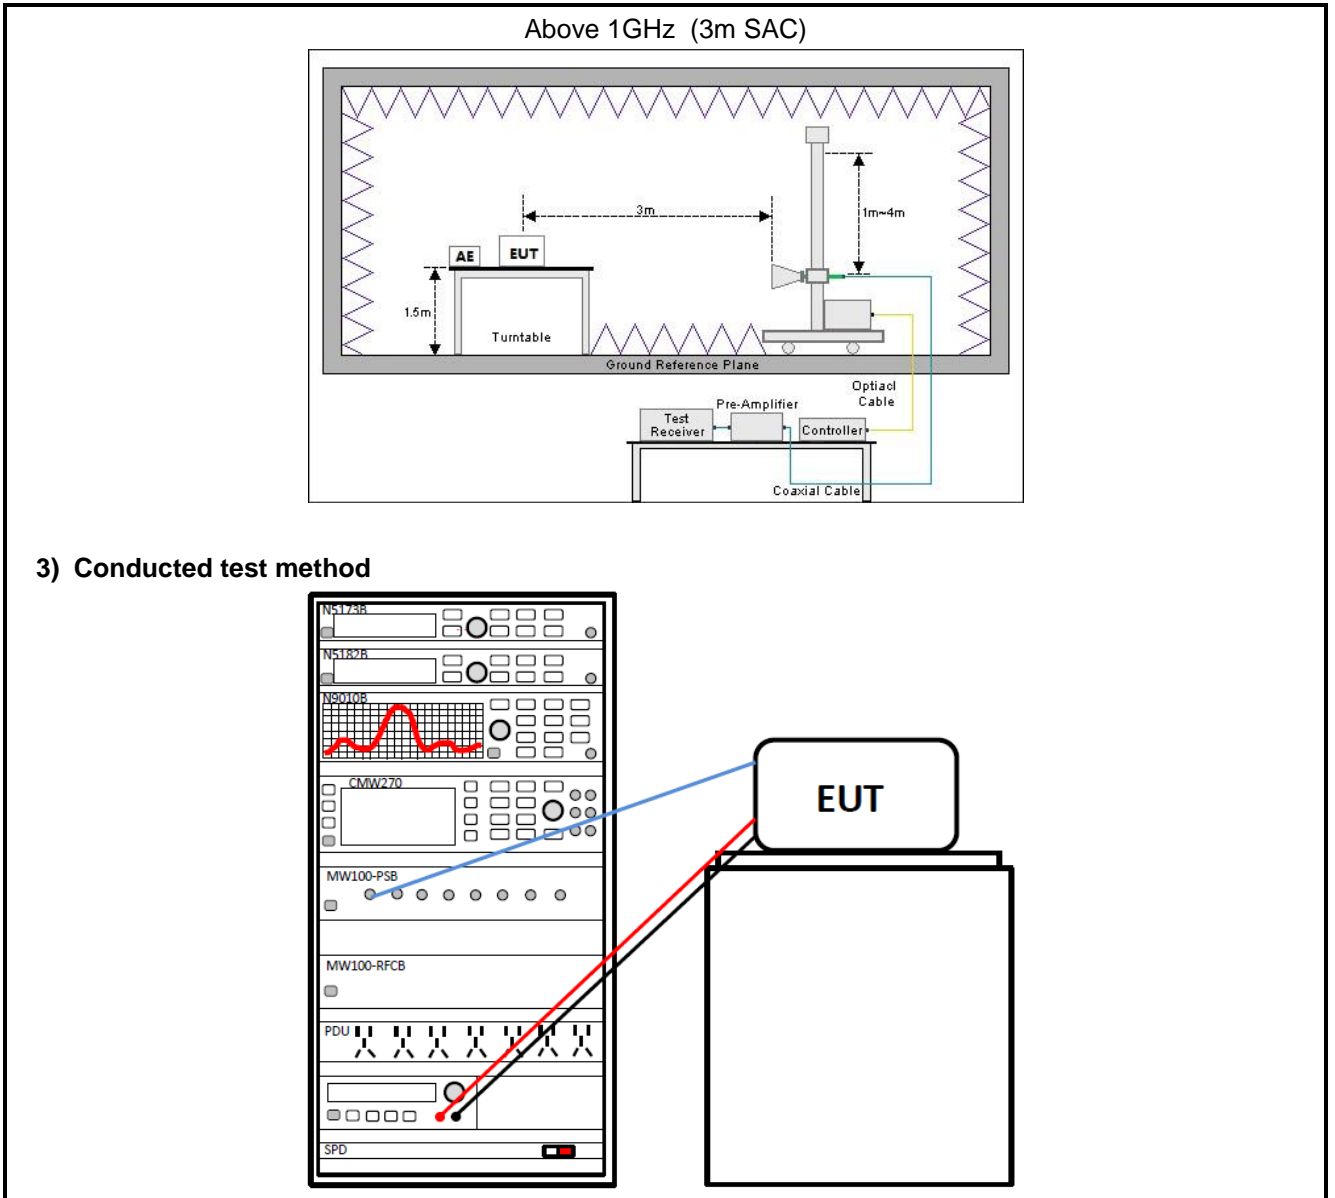

4.3 Test Procedure

| Test method | Test step |
|-----------------------|---|
| Conducted emission | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. |
| Radiated emission | <p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. |
| Conducted test method | <ol style="list-style-type: none"> 1. The Bluetooth antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software. |

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

| Test items | Standard clause | Test data | Result |
|---|--|-----------------|--------|
| Antenna Requirement | 15.203 15.247 (b)(4) | See Section 5.2 | Pass |
| AC Power Line Conducted Emission | 15.207 | See Section 5.3 | Pass |
| Conducted Output Power | 15.247 (b)(1) | Appendix A– BT | Pass |
| 20dB Occupied Bandwidth | 15.247 (a)(1) | Appendix A– BT | Pass |
| Carrier Frequencies Separation | 15.247 (a)(1) | Appendix A– BT | Pass |
| Hopping Channel Number | 5.247 (a)(1)(iii) | Appendix A– BT | Pass |
| Dwell Time | 15.247 (a)(1)(iii) | Appendix A– BT | Pass |
| Band-edge Emission Conduction Spurious Emission | 15.247 (d) | Appendix A– BT | Pass |
| Emissions in Restricted Frequency Bands | 15.205 15.247 (d) | See Section 5.4 | Pass |
| Emissions in Non-restricted Frequency Bands | 15.209 15.247(d) | See Section 5.5 | Pass |
| Remark: 1. <i>Pass: The EUT complies with the essential requirements in the standard.</i> 2. <i>N/A: Not Applicable.</i> 3. <i>The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).</i> | | | |
| Test Method: | ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02 | | |

5.1.2 Test Limit


| Test items | Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|--|--------------------------------|----------------|--|------------|---------|------------|--------------------------------|--------------------------------|---------|------------|----------|--------|------|------------|-----------|------|------|------------|------------|------|------|------------|-----------|---------------------|--|---------|-------|-------------|------|------|
| AC Power Line Conducted Emission | <table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>Quasi-Peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 – 0.5</td> <td>66 to 56 <small>Note 1</small></td> <td>56 to 46 <small>Note 1</small></td> </tr> <tr> <td>0.5 – 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p><small>Note 1: The limit level in dBµV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.</small></p> | Frequency (MHz) | Limit (dBµV) | | Quasi-Peak | Average | 0.15 – 0.5 | 66 to 56 <small>Note 1</small> | 56 to 46 <small>Note 1</small> | 0.5 – 5 | 56 | 46 | 5 – 30 | 60 | 50 | | | | | | | | | | | | | | | | |
| Frequency (MHz) | Limit (dBµV) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Quasi-Peak | Average | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.15 – 0.5 | 66 to 56 <small>Note 1</small> | 56 to 46 <small>Note 1</small> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.5 – 5 | 56 | 46 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 – 30 | 60 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Conducted Output Power | For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20dB Occupied Bandwidth | Within authorization band | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Carrier Frequencies Separation | a) 0.025MHz or the 20dB bandwidth (whichever is greater). b) 0.025MHz or two-thirds of the 20dB bandwidth (whichever is greater). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Hopping Channel Number | At least 15 channels. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dwell Time | Not be greater than 0.4 seconds. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Band-edge Emission Conduction Spurious Emission | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Emissions in Restricted Frequency Bands Emissions in Non-restricted Frequency Bands | <table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dBµV/m)</th> <th rowspan="2">Detector</th> </tr> <tr> <th>@ 3m</th> <th>@ 10m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>40.0</td> <td>30.0</td> <td>Quasi-peak</td> </tr> <tr> <td>88 – 216</td> <td>43.5</td> <td>33.5</td> <td>Quasi-peak</td> </tr> <tr> <td>216 – 960</td> <td>46.0</td> <td>36.0</td> <td>Quasi-peak</td> </tr> <tr> <td>960 – 1000</td> <td>54.0</td> <td>44.0</td> <td>Quasi-peak</td> </tr> </tbody> </table> <p><small>Note: The more stringent limit applies at transition frequencies.</small></p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="2">Limit (dBµV/m) @ 3m</th> </tr> <tr> <th>Average</th> <th>Peake</th> </tr> </thead> <tbody> <tr> <td>Above 1 GHz</td> <td>54.0</td> <td>74.0</td> </tr> </tbody> </table> <p><small>Note: The measurement bandwidth shall be 1 MHz or greater.</small></p> | Frequency (MHz) | Limit (dBµV/m) | | Detector | @ 3m | @ 10m | 30 – 88 | 40.0 | 30.0 | Quasi-peak | 88 – 216 | 43.5 | 33.5 | Quasi-peak | 216 – 960 | 46.0 | 36.0 | Quasi-peak | 960 – 1000 | 54.0 | 44.0 | Quasi-peak | Frequency | Limit (dBµV/m) @ 3m | | Average | Peake | Above 1 GHz | 54.0 | 74.0 |
| Frequency (MHz) | Limit (dBµV/m) | | Detector | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | @ 3m | @ 10m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 – 88 | 40.0 | 30.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 88 – 216 | 43.5 | 33.5 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 216 – 960 | 46.0 | 36.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 960 – 1000 | 54.0 | 44.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency | Limit (dBµV/m) @ 3m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Average | Peake | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Above 1 GHz | 54.0 | 74.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

5.2 Antenna Requirement

| | |
|--|---------------------------------------|
| Standard requirement: | FCC Part 15 C Section 15.203 & 247(b) |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> | |
| E.U.T Antenna: | |
| <p>The Bluetooth antenna is an Internal antenna which permanently attached, and the best case gain of the antenna is 1.3 dBi. See product internal photos for details.</p> | |

5.3 AC Power Line Conducted Emission

| | | | |
|-----------------|------------------|----------------|------------|
| Product name: | Tablet | Product model: | SKY PAD10 |
| Test by: | Mike | Test mode: | BT Tx mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Line |
| Test voltage: | AC 120 V/60 Hz | | |

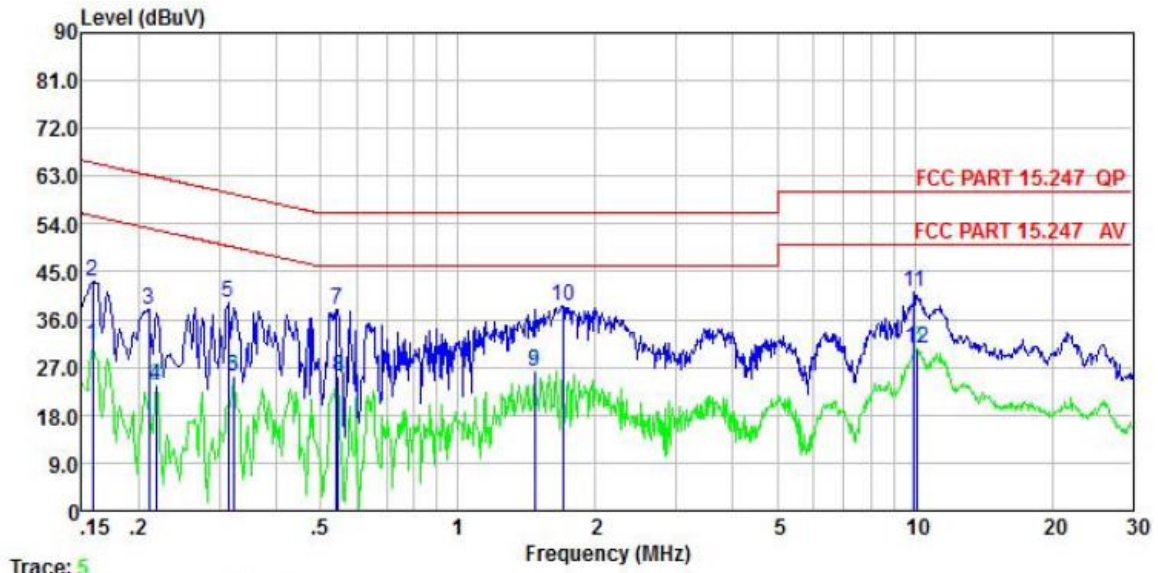


Trace: 5

| | Freq | Read Level | LISN Factor | Aux2 Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.158 | 20.51 | 0.04 | 10.50 | 0.01 | 31.06 | 55.56 | -24.50 | Average |
| 2 | 0.158 | 32.62 | 0.04 | 10.50 | 0.01 | 43.17 | 65.56 | -22.39 | QP |
| 3 | 0.211 | 27.15 | 0.05 | 10.50 | 0.03 | 37.73 | 63.18 | -25.45 | QP |
| 4 | 0.219 | 12.89 | 0.05 | 10.50 | 0.03 | 23.47 | 52.88 | -29.41 | Average |
| 5 | 0.313 | 28.45 | 0.06 | 10.50 | 0.03 | 39.04 | 59.88 | -20.84 | QP |
| 6 | 0.322 | 14.54 | 0.06 | 10.50 | 0.03 | 25.13 | 49.66 | -24.53 | Average |
| 7 | 0.541 | 27.38 | 0.05 | 10.50 | 0.03 | 37.96 | 56.00 | -18.04 | QP |
| 8 | 0.546 | 14.65 | 0.06 | 10.50 | 0.03 | 25.24 | 46.00 | -20.76 | Average |
| 9 | 1.472 | 15.58 | 0.08 | 10.50 | 0.14 | 26.30 | 46.00 | -19.70 | Average |
| 10 | 1.698 | 27.87 | 0.08 | 10.50 | 0.17 | 38.62 | 56.00 | -17.38 | QP |
| 11 | 9.966 | 30.41 | 0.22 | 10.50 | 0.13 | 41.26 | 60.00 | -18.74 | QP |
| 12 | 10.125 | 19.71 | 0.22 | 10.50 | 0.13 | 30.56 | 50.00 | -19.44 | Average |

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

| | | | |
|-----------------|------------------|----------------|------------|
| Product name: | Tablet | Product model: | SKY PAD10 |
| Test by: | Mike | Test mode: | BT Tx mode |
| Test frequency: | 150 kHz ~ 30 MHz | Phase: | Neutral |
| Test voltage: | AC 120 V/60 Hz | | |

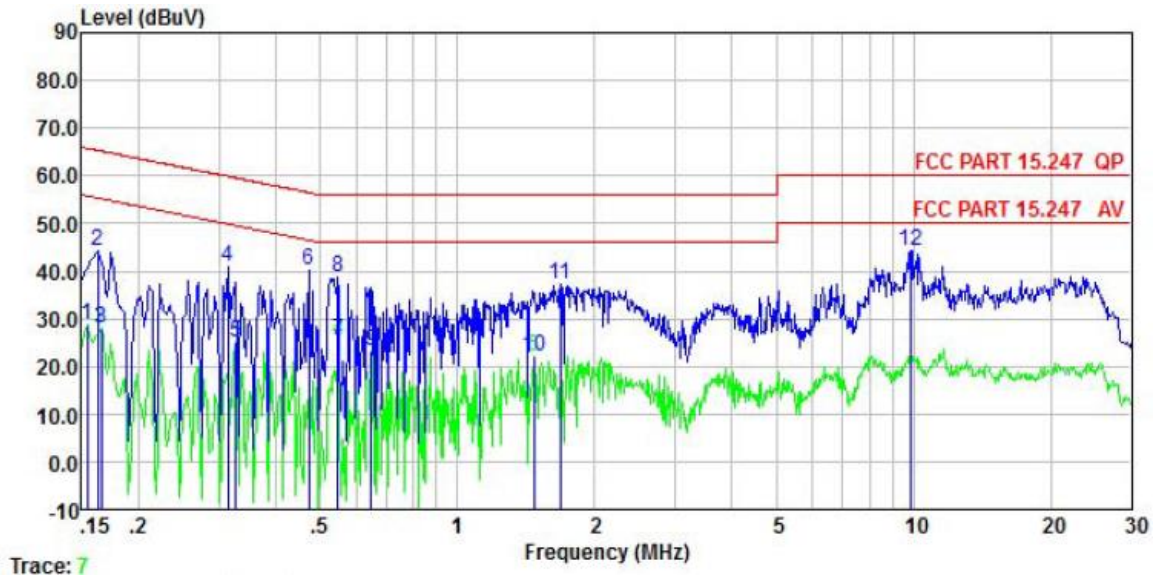


| | Freq | Read Level | LISN Factor | Aux2 Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|-------|------------|-------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.154 | 17.99 | 0.06 | 10.50 | 0.01 | 28.56 | 55.78 | -27.22 | Average |
| 2 | 0.162 | 33.59 | 0.06 | 10.50 | 0.01 | 44.16 | 65.34 | -21.18 | QP |
| 3 | 0.166 | 17.42 | 0.06 | 10.50 | 0.01 | 27.99 | 55.16 | -27.17 | Average |
| 4 | 0.313 | 30.45 | 0.05 | 10.50 | 0.03 | 41.03 | 59.88 | -18.85 | QP |
| 5 | 0.327 | 14.56 | 0.05 | 10.50 | 0.02 | 25.13 | 49.53 | -24.40 | Average |
| 6 | 0.471 | 29.79 | 0.04 | 10.50 | 0.03 | 40.36 | 56.49 | -16.13 | QP |
| 7 | 0.546 | 14.81 | 0.05 | 10.50 | 0.03 | 25.39 | 46.00 | -20.61 | Average |
| 8 | 0.546 | 28.30 | 0.05 | 10.50 | 0.03 | 38.88 | 56.00 | -17.12 | QP |
| 9 | 0.647 | 12.49 | 0.06 | 10.50 | 0.02 | 23.07 | 46.00 | -22.93 | Average |
| 10 | 1.472 | 11.56 | 0.07 | 10.50 | 0.14 | 22.27 | 46.00 | -23.73 | Average |
| 11 | 1.680 | 26.35 | 0.07 | 10.50 | 0.17 | 37.09 | 56.00 | -18.91 | QP |
| 12 | 9.861 | 33.42 | 0.21 | 10.50 | 0.13 | 44.26 | 60.00 | -15.74 | QP |

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.4 Emissions in Restricted Frequency Bands

| | | | |
|----------------------|----------------|-----------------------|-------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

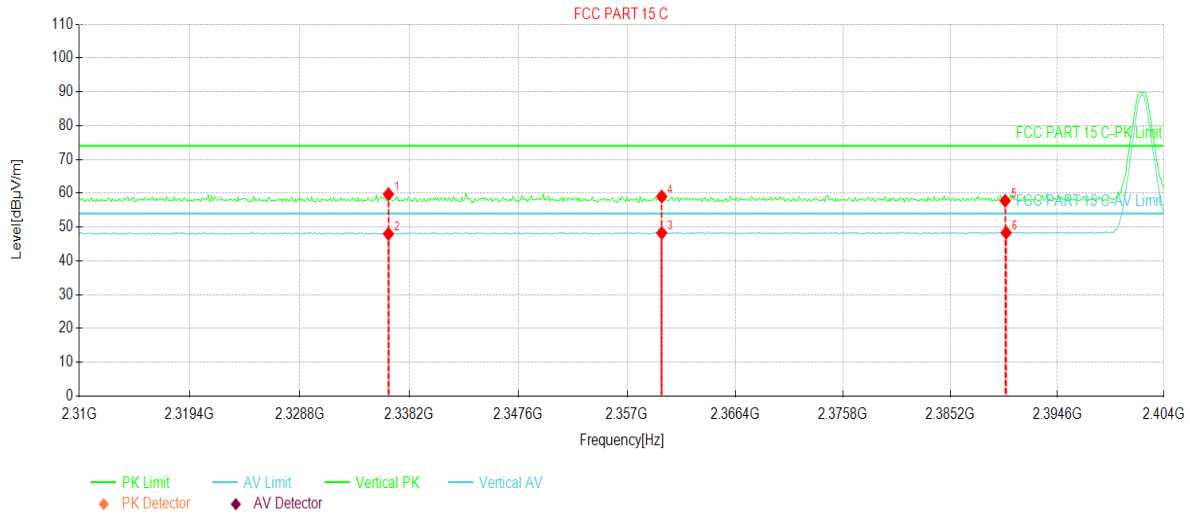


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2336.41 | 24.52 | 35.19 | 59.71 | 74.00 | 14.29 | PK | Vertical |
| 2 | 2336.41 | 12.80 | 35.19 | 47.99 | 54.00 | 6.01 | AV | Vertical |
| 3 | 2360.00 | 12.86 | 35.37 | 48.23 | 54.00 | 5.77 | AV | Vertical |
| 4 | 2360.00 | 23.65 | 35.37 | 59.02 | 74.00 | 14.98 | PK | Vertical |
| 5 | 2390.00 | 22.17 | 35.60 | 57.77 | 74.00 | 16.23 | PK | Vertical |
| 6 | 2390.08 | 12.72 | 35.60 | 48.32 | 54.00 | 5.68 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|----------------|-----------------------|-------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

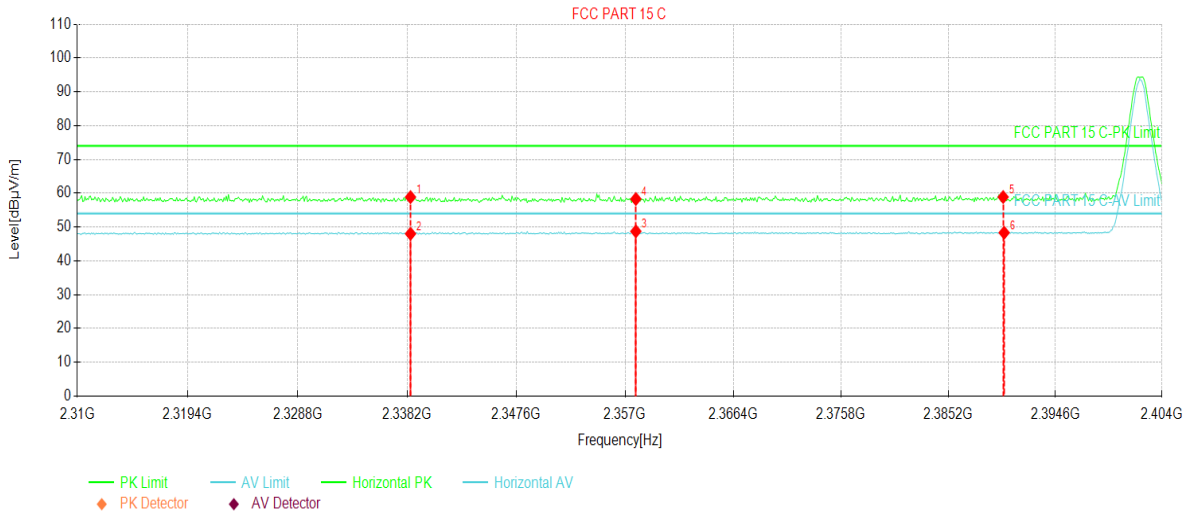


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2338.48 | 23.65 | 35.21 | 58.86 | 74.00 | 15.14 | PK | Horizontal |
| 2 | 2338.48 | 12.81 | 35.21 | 48.02 | 54.00 | 5.98 | AV | Horizontal |
| 3 | 2357.94 | 13.38 | 35.35 | 48.73 | 54.00 | 5.27 | AV | Horizontal |
| 4 | 2357.94 | 22.95 | 35.35 | 58.30 | 74.00 | 15.70 | PK | Horizontal |
| 5 | 2390.00 | 23.29 | 35.60 | 58.89 | 74.00 | 15.11 | PK | Horizontal |
| 6 | 2390.08 | 12.72 | 35.60 | 48.32 | 54.00 | 5.68 | AV | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|-------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

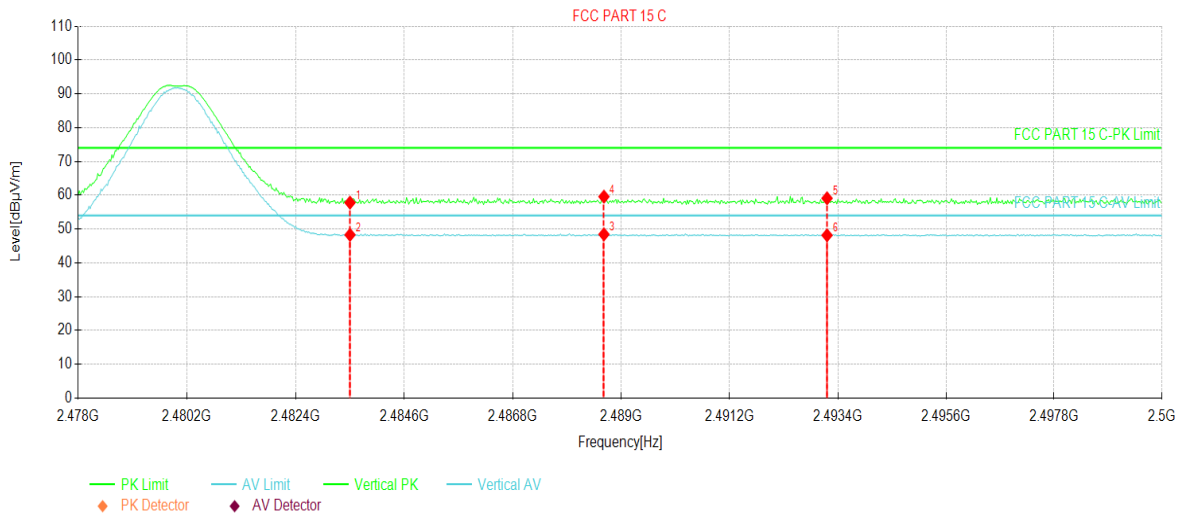


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 22.31 | 35.51 | 57.82 | 74.00 | 16.18 | PK | Vertical |
| 2 | 2483.50 | 12.77 | 35.51 | 48.28 | 54.00 | 5.72 | AV | Vertical |
| 3 | 2488.64 | 12.93 | 35.50 | 48.43 | 54.00 | 5.57 | AV | Vertical |
| 4 | 2488.64 | 24.09 | 35.50 | 59.59 | 74.00 | 14.41 | PK | Vertical |
| 5 | 2493.18 | 23.60 | 35.49 | 59.09 | 74.00 | 14.91 | PK | Vertical |
| 6 | 2493.18 | 12.68 | 35.49 | 48.17 | 54.00 | 5.83 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|-------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

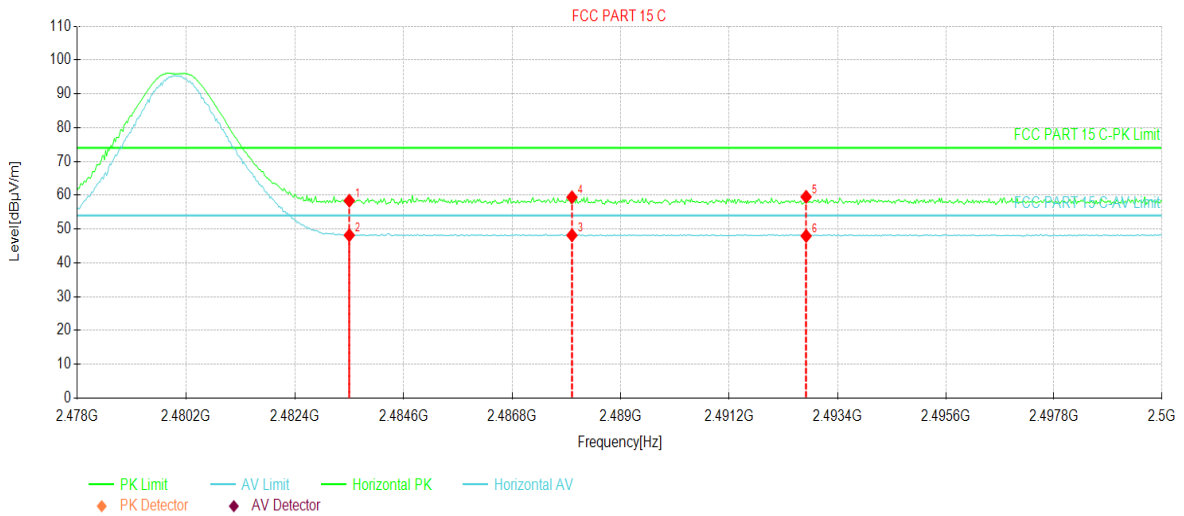


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 22.86 | 35.51 | 58.37 | 74.00 | 15.63 | PK | Horizontal |
| 2 | 2483.50 | 12.67 | 35.51 | 48.18 | 54.00 | 5.82 | AV | Horizontal |
| 3 | 2488.01 | 12.65 | 35.50 | 48.15 | 54.00 | 5.85 | AV | Horizontal |
| 4 | 2488.01 | 23.91 | 35.50 | 59.41 | 74.00 | 14.59 | PK | Horizontal |
| 5 | 2492.76 | 24.04 | 35.49 | 59.53 | 74.00 | 14.47 | PK | Horizontal |
| 6 | 2492.76 | 12.47 | 35.49 | 47.96 | 54.00 | 6.04 | AV | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

π/4-DQPSK mode

| | | | |
|----------------------|----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 2DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

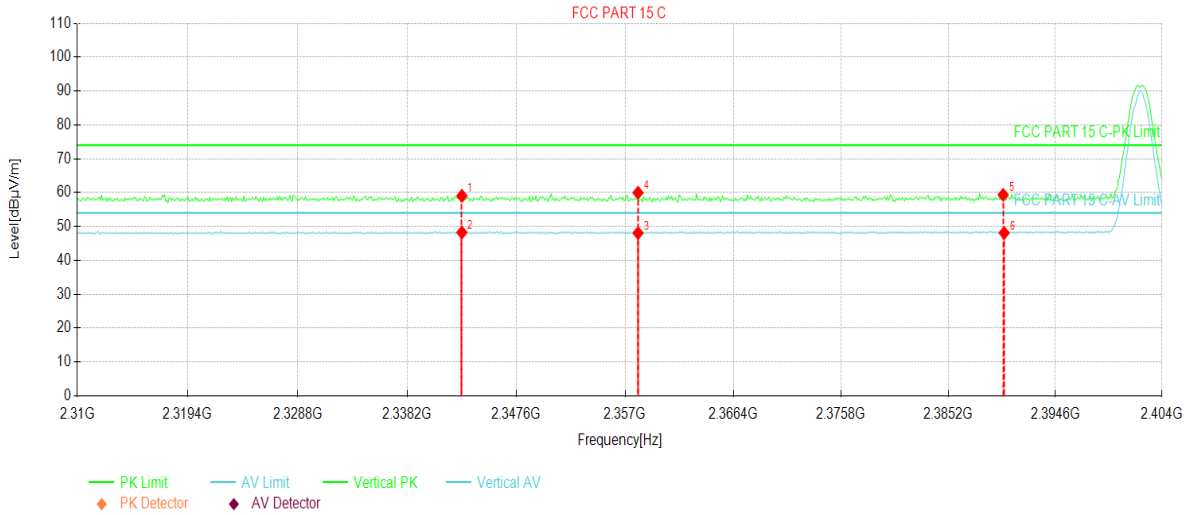


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2342.90 | 23.83 | 35.24 | 59.07 | 74.00 | 14.93 | PK | Vertical |
| 2 | 2342.90 | 13.00 | 35.24 | 48.24 | 54.00 | 5.76 | AV | Vertical |
| 3 | 2358.12 | 12.71 | 35.36 | 48.07 | 54.00 | 5.93 | AV | Vertical |
| 4 | 2358.12 | 24.62 | 35.36 | 59.98 | 74.00 | 14.02 | PK | Vertical |
| 5 | 2390.00 | 23.75 | 35.60 | 59.35 | 74.00 | 14.65 | PK | Vertical |
| 6 | 2390.08 | 12.52 | 35.60 | 48.12 | 54.00 | 5.88 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 2DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

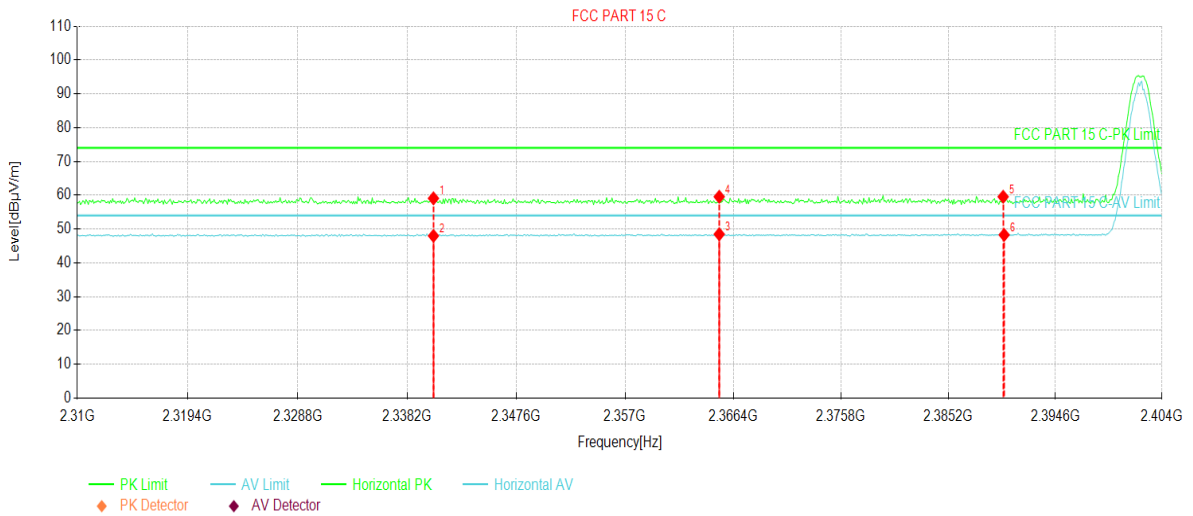


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2340.45 | 23.86 | 35.22 | 59.08 | 74.00 | 14.92 | PK | Horizontal |
| 2 | 2340.45 | 12.77 | 35.22 | 47.99 | 54.00 | 6.01 | AV | Horizontal |
| 3 | 2365.17 | 13.06 | 35.41 | 48.47 | 54.00 | 5.53 | AV | Horizontal |
| 4 | 2365.17 | 24.15 | 35.41 | 59.56 | 74.00 | 14.44 | PK | Horizontal |
| 5 | 2390.00 | 23.95 | 35.60 | 59.55 | 74.00 | 14.45 | PK | Horizontal |
| 6 | 2390.08 | 12.67 | 35.60 | 48.27 | 54.00 | 5.73 | AV | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 2DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

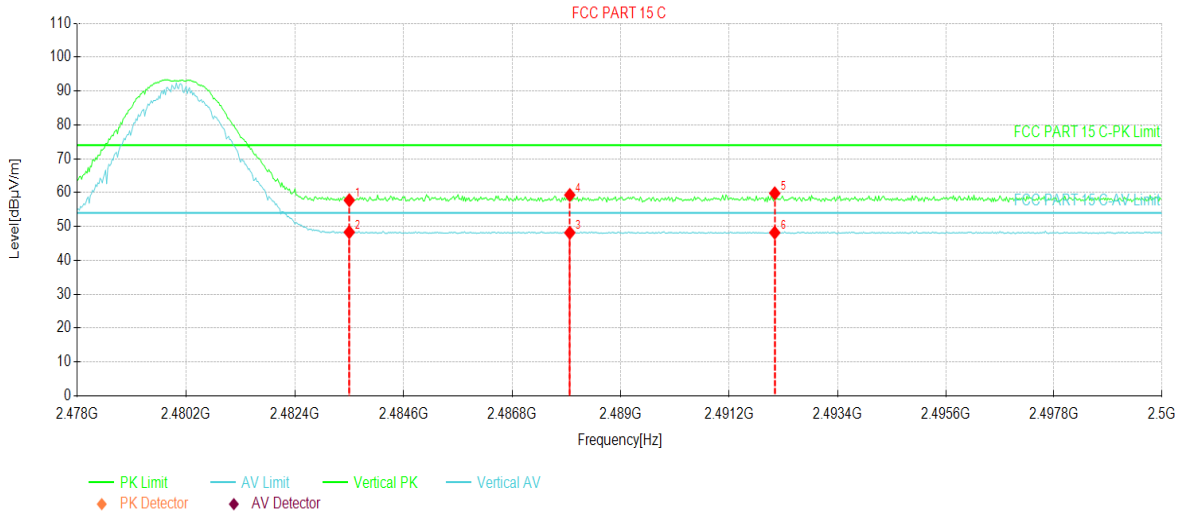


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 22.24 | 35.51 | 57.75 | 74.00 | 16.25 | PK | Vertical |
| 2 | 2483.50 | 12.82 | 35.51 | 48.33 | 54.00 | 5.67 | AV | Vertical |
| 3 | 2487.96 | 12.66 | 35.50 | 48.16 | 54.00 | 5.84 | AV | Vertical |
| 4 | 2487.96 | 23.80 | 35.50 | 59.30 | 74.00 | 14.70 | PK | Vertical |
| 5 | 2492.12 | 24.30 | 35.49 | 59.79 | 74.00 | 14.21 | PK | Vertical |
| 6 | 2492.12 | 12.68 | 35.49 | 48.17 | 54.00 | 5.83 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 2DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

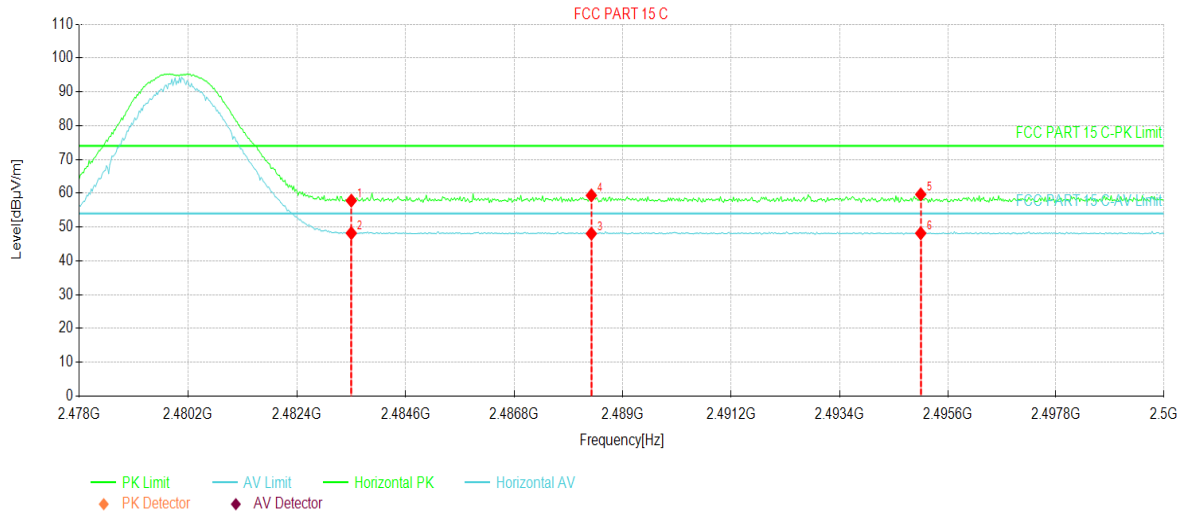


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 22.30 | 35.51 | 57.81 | 74.00 | 16.19 | PK | Horizontal |
| 2 | 2483.50 | 12.68 | 35.51 | 48.19 | 54.00 | 5.81 | AV | Horizontal |
| 3 | 2488.36 | 12.55 | 35.50 | 48.05 | 54.00 | 5.95 | AV | Horizontal |
| 4 | 2488.36 | 23.86 | 35.50 | 59.36 | 74.00 | 14.64 | PK | Horizontal |
| 5 | 2495.05 | 24.16 | 35.49 | 59.65 | 74.00 | 14.35 | PK | Horizontal |
| 6 | 2495.05 | 12.68 | 35.49 | 48.17 | 54.00 | 5.83 | AV | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

8DPSK mode

| | | | |
|---------------|----------------|----------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 3DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

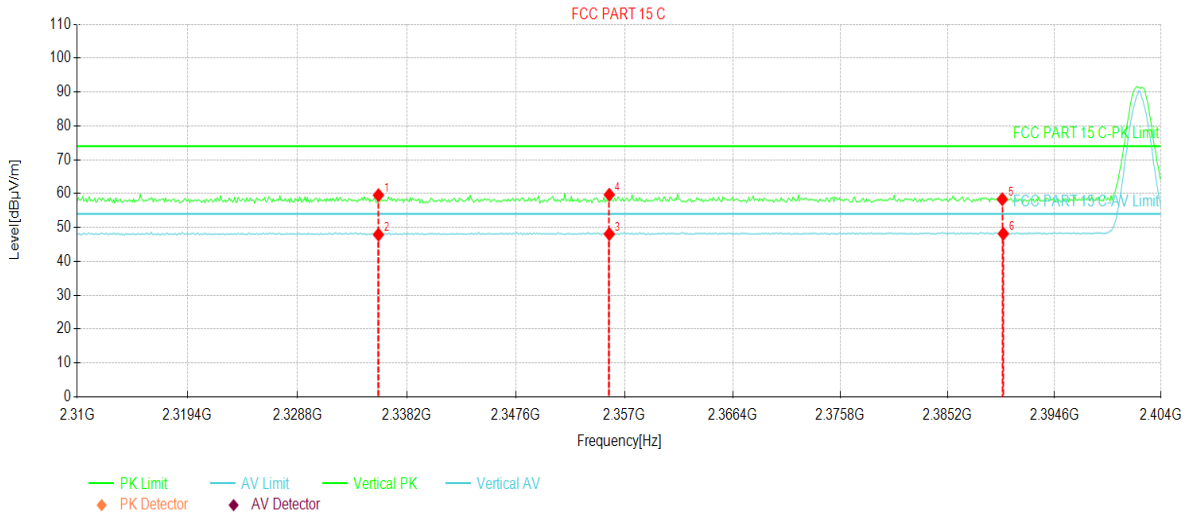


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2335.75 | 24.35 | 35.19 | 59.54 | 74.00 | 14.46 | PK | Vertical |
| 2 | 2335.75 | 12.71 | 35.19 | 47.90 | 54.00 | 6.10 | AV | Vertical |
| 3 | 2355.68 | 12.74 | 35.34 | 48.08 | 54.00 | 5.92 | AV | Vertical |
| 4 | 2355.68 | 24.33 | 35.34 | 59.67 | 74.00 | 14.33 | PK | Vertical |
| 5 | 2390.00 | 22.75 | 35.60 | 58.35 | 74.00 | 15.65 | PK | Vertical |
| 6 | 2390.08 | 12.56 | 35.60 | 48.16 | 54.00 | 5.84 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 3DH1 Tx mode |
| Test Channel: | Lowest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

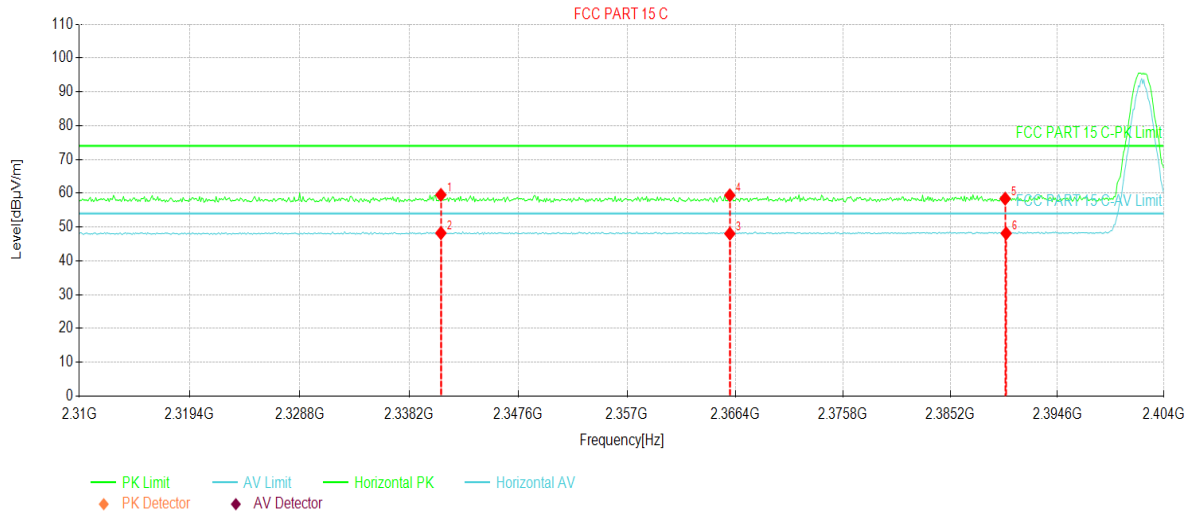


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2340.92 | 24.29 | 35.23 | 59.52 | 74.00 | 14.48 | PK | Horizontal |
| 2 | 2340.92 | 12.99 | 35.23 | 48.22 | 54.00 | 5.78 | AV | Horizontal |
| 3 | 2365.93 | 12.63 | 35.41 | 48.04 | 54.00 | 5.96 | AV | Horizontal |
| 4 | 2365.93 | 24.00 | 35.41 | 59.41 | 74.00 | 14.59 | PK | Horizontal |
| 5 | 2390.00 | 22.79 | 35.60 | 58.39 | 74.00 | 15.61 | PK | Horizontal |
| 6 | 2390.08 | 12.55 | 35.60 | 48.15 | 54.00 | 5.85 | AV | Horizontal |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 3DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Vertical |
| Test Voltage: | DC 3.85V | | |

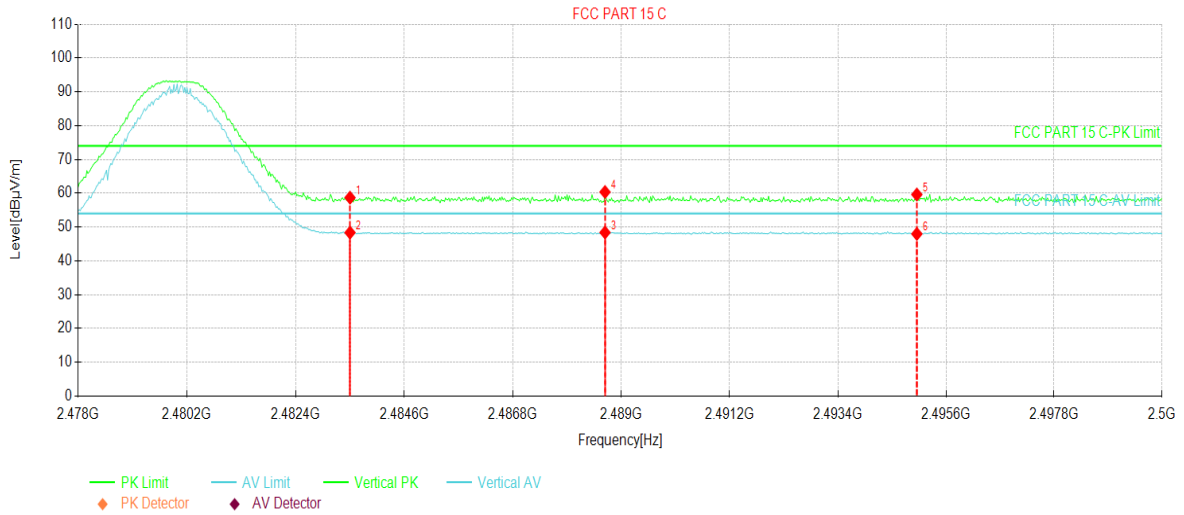


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dBµV/m] | Factor [dB] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 23.18 | 35.51 | 58.69 | 74.00 | 15.31 | PK | Vertical |
| 2 | 2483.50 | 12.85 | 35.51 | 48.36 | 54.00 | 5.64 | AV | Vertical |
| 3 | 2488.67 | 12.89 | 35.50 | 48.39 | 54.00 | 5.61 | AV | Vertical |
| 4 | 2488.67 | 24.86 | 35.50 | 60.36 | 74.00 | 13.64 | PK | Vertical |
| 5 | 2495.00 | 24.13 | 35.49 | 59.62 | 74.00 | 14.38 | PK | Vertical |
| 6 | 2495.00 | 12.48 | 35.49 | 47.97 | 54.00 | 6.03 | AV | Vertical |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

| | | | |
|----------------------|-----------------|-----------------------|--------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | 3DH1 Tx mode |
| Test Channel: | Highest channel | Polarization: | Horizontal |
| Test Voltage: | DC 3.85V | | |

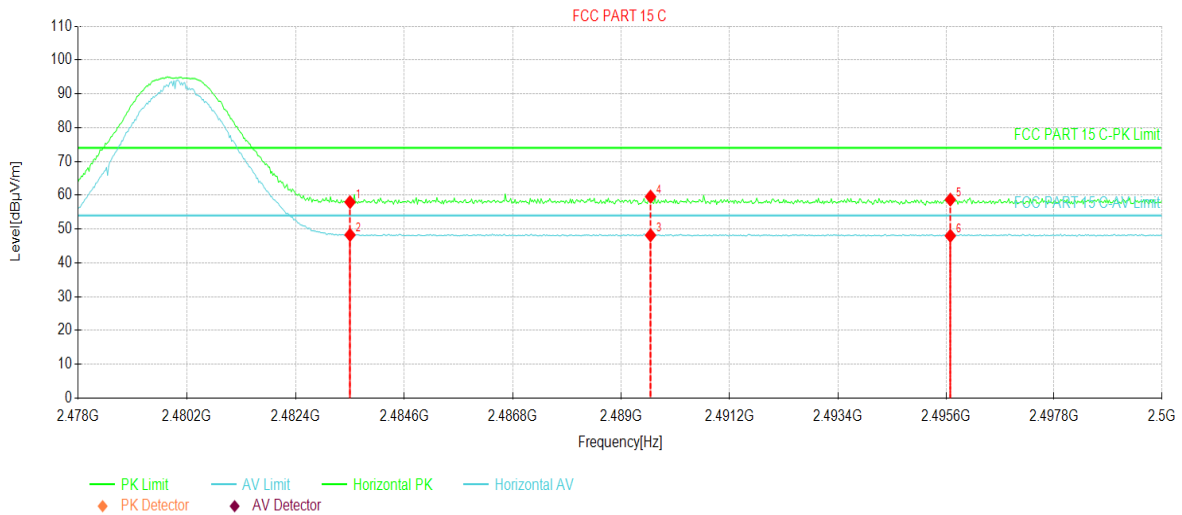

| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|-------------|----------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBμV/m] | Factor [dB] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity |
| 1 | 2483.50 | 22.47 | 35.51 | 57.98 | 74.00 | 16.02 | PK | Horizontal |
| 2 | 2483.50 | 12.76 | 35.51 | 48.27 | 54.00 | 5.73 | AV | Horizontal |
| 3 | 2489.59 | 12.66 | 35.50 | 48.16 | 54.00 | 5.84 | AV | Horizontal |
| 4 | 2489.59 | 24.08 | 35.50 | 59.58 | 74.00 | 14.42 | PK | Horizontal |
| 5 | 2495.68 | 23.22 | 35.49 | 58.71 | 74.00 | 15.29 | PK | Horizontal |
| 6 | 2495.68 | 12.52 | 35.49 | 48.01 | 54.00 | 5.99 | AV | Horizontal |


Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

| | | | |
|------------------------|----------------|-----------------------|-----------------------|
| Product Name: | Tablet | Product model: | SKY PAD10 |
| Test By: | Mike | Test mode: | BT Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical & Horizontal |
| Test Voltage: | DC 3.85V | | |

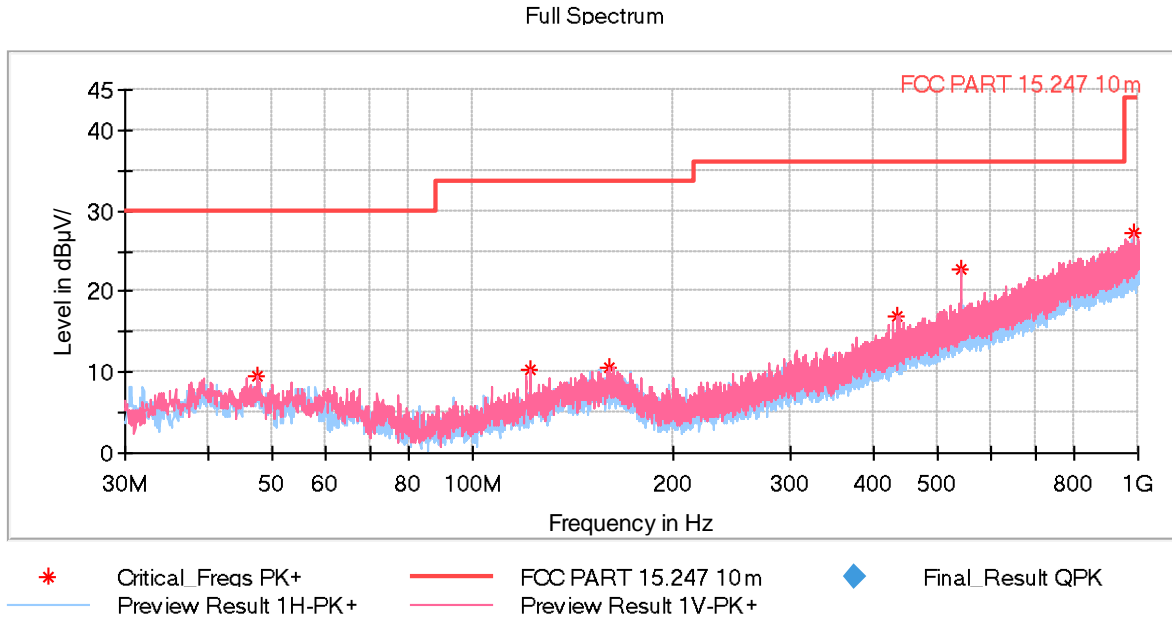

| Frequency (MHz) | MaxPeak (dB µ V/m) | Limit (dB µ V/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|------------------|-------------|-------------|-----|---------------|--------------|
| 47.508500 | 9.42 | 30.00 | 20.58 | 100.0 | V | 264.0 | -16.1 |
| 122.053000 | 10.38 | 33.50 | 23.12 | 100.0 | V | 230.0 | -17.3 |
| 160.174000 | 10.67 | 33.50 | 22.83 | 100.0 | V | 283.0 | -15.1 |
| 433.083500 | 16.98 | 36.00 | 19.02 | 100.0 | V | 176.0 | -10.8 |
| 539.977500 | 22.72 | 36.00 | 13.28 | 100.0 | V | 295.0 | -8.3 |
| 985.110500 | 27.24 | 44.00 | 16.76 | 100.0 | V | 353.0 | 0.2 |

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

| Test channel: Lowest channel | | | | | | |
|---|-------------------|------------|----------------|----------------|-------------|--------------|
| Detector: Peak Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4804.00 | 56.11 | -9.60 | 46.51 | 74.00 | 27.49 | Vertical |
| 4804.00 | 55.09 | -9.60 | 45.49 | 74.00 | 28.51 | Horizontal |
| Detector: Average Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4804.00 | 48.02 | -9.60 | 38.42 | 54.00 | 15.58 | Vertical |
| 4804.00 | 48.18 | -9.60 | 38.58 | 54.00 | 15.42 | Horizontal |
| Test channel: Middle channel | | | | | | |
| Detector: Peak Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4882.00 | 56.17 | -9.05 | 47.12 | 74.00 | 26.88 | Vertical |
| 4882.00 | 54.71 | -9.05 | 45.66 | 74.00 | 28.34 | Horizontal |
| Detector: Average Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4882.00 | 48.07 | -9.05 | 39.02 | 54.00 | 14.98 | Vertical |
| 4882.00 | 48.43 | -9.05 | 39.38 | 54.00 | 14.62 | Horizontal |
| Test channel: Highest channel | | | | | | |
| Detector: Peak Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4960.00 | 56.17 | -8.45 | 47.72 | 74.00 | 26.28 | Vertical |
| 4960.00 | 54.71 | -8.45 | 46.26 | 74.00 | 27.74 | Horizontal |
| Detector: Average Value | | | | | | |
| Frequency (MHz) | Read Level (dBuV) | Factor(dB) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Polarization |
| 4960.00 | 48.49 | -8.45 | 40.04 | 54.00 | 13.96 | Vertical |
| 4960.00 | 47.98 | -8.45 | 39.53 | 54.00 | 14.47 | Horizontal |
| Remark: | | | | | | |
| 1. Level = Reading + Factor. | | | | | | |
| 2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report. | | | | | | |

-----End of report-----