

FCC&IC Radio Test Report

FCC ID: 2ABZ2-A2005

IC: 12739A-A2005

This report concerns (check one): Original Grant Class II Change

Project No. : 1506C242
Equipment : Mobile Phone
Model Name : ONE A2005
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road,
Shenzhen, China

Date of Receipt : Jun. 13, 2015
Date of Test : Jun. 13, 2015 ~ Jul. 03, 2015
Issued Date : Jul. 06, 2015
Tested by : BTL Inc.

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents | Page |
|---|-------------|
| REPORT ISSUED HISTORY | 6 |
| 1 . CERTIFICATION | 7 |
| 2 . SUMMARY OF TEST RESULTS | 8 |
| 2.1 TEST FACILITY | 9 |
| 2.2 MEASUREMENT UNCERTAINTY | 9 |
| 3 . GENERAL INFORMATION | 10 |
| 3.1 GENERAL DESCRIPTION OF EUT | 10 |
| 3.2 DESCRIPTION OF TEST MODES | 11 |
| 3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 12 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 12 |
| 4 . TEST RESULT | 13 |
| 4.1 RADIATEDRF OUTPUT POWER MEASUREMENT | 13 |
| 4.1.1 LIMIT | 13 |
| 4.1.2 MEASURING INSTRUMENTS AND SETTING | 13 |
| 4.1.3 TEST PROCEDURE | 13 |
| EIRP/ERP: | 13 |
| 4.1.4 TESTSETUP LAYOUT | 14 |
| 4.1.5 TESTDEVIATION | 14 |
| 4.1.6 EUT OPERATIONDURING TEST | 14 |
| 4.1.7 EUT TEST CONDITIONS | 14 |
| 4.1.8 TEST RESULTS | 14 |
| 4.2 99% OCCUPIED BANDWIDTH MEASUREMENT | 15 |
| 4.2.1 LIMIT | 15 |
| 4.2.2 MEASURING INSTRUMENTS AND SETTING | 15 |
| 4.2.3 TEST PROCEDURE | 15 |
| 4.2.4 TESTSETUP LAYOUT | 15 |
| 4.2.5 TESTDEVIATION | 15 |
| 4.2.6 EUT OPERATIONDURING TEST | 15 |
| 4.2.7 EUT TEST CONDITIONS | 15 |
| 4.2.8 TEST RESULTS | 16 |
| 4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT | 17 |
| 4.3.1 LIMIT | 17 |
| 4.3.2 MEASURING INSTRUMENTS AND SETTING | 17 |
| 4.3.3 TEST PROCEDURES | 17 |
| 4.3.4 TESTSETUP LAYOUT | 17 |
| 4.3.5 TESTDEVIATION | 17 |
| 4.3.6 EUT OPERATIONDURING TEST | 17 |

| Table of Contents | Page |
|--|-------------|
| 4.3.7 EUT TEST CONDITIONS | 18 |
| 4.3.8 TEST RESULTS | 18 |
| 4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT | 19 |
| 4.4.1 LIMIT | 19 |
| 4.4.2 MEASURING INSTRUMENTS AND SETTING | 19 |
| 4.4.3 TEST PROCEDURES | 19 |
| 4.4.4 TESTSETUP LAYOUT | 20 |
| 4.4.5 TESTDEVIATION | 20 |
| 4.4.6 EUT OPERATIONDURING TEST | 20 |
| 4.4.7 EUT TEST CONDITIONS | 20 |
| 4.4.8 TEST RESULTS | 20 |
| 4.5 BAND EDGE MEASUREMENT | 21 |
| 4.5.1 LIMIT | 21 |
| 4.5.2 MEASURING INSTRUMENTS AND SETTING | 21 |
| 4.5.3 TEST PROCEDURES | 21 |
| 4.5.4 TESTSETUP LAYOUT | 21 |
| 4.5.5 TESTDEVIATION | 21 |
| 4.5.6 EUT OPERATIONDURING TEST | 21 |
| 4.5.7 EUT TEST CONDITIONS | 21 |
| 4.5.8 TEST RESULTS | 22 |
| 4.6 FREQUENCY STABILITY MEASUREMENT | 23 |
| 4.6.1 LIMIT | 23 |
| 4.6.2 MEASURING INSTRUMENTS AND SETTING | 23 |
| 4.6.3 TEST PROCEDURES | 23 |
| 4.6.4 TESTSETUP LAYOUT | 23 |
| 4.6.5 TESTDEVIATION | 23 |
| 4.6.6 EUT OPERATIONDURING TEST | 23 |
| 4.6.7 EUT TEST CONDITIONS | 24 |
| 4.6.8 TEST RESULTS | 24 |
| 4.7 PEAK TO AVERAGE RATIO | 25 |
| 4.7.1 LIMIT | 25 |
| 4.7.2 TEST PROCEDURES | 25 |
| 4.7.3 TESTSETUP LAYOUT | 25 |
| 4.7.4 TESTDEVIATION | 25 |
| 4.7.5 EUT OPERATIONDURING TEST | 25 |
| 4.7.6 EUT TEST CONDITIONS | 25 |
| 4.7.7 TEST RESULTS | 25 |
| 5. LIST OF MEASUREMENT EQUIPMENTS | 26 |
| 6. EUT TEST PHOTO | 29 |
| ATTACHMENT A -RADIATED RF OUTPUT POWER | 32 |
| ATTACHMENT B - 99% OCCUPIED BANDWIDTH | 36 |

| Table of Contents | Page |
|---|-------------|
| ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS | 53 |
| ATTACHMENTD - SPURIOUS RADIATED EMISSION | 56 |
| ATTACHMENTE - BAND EDGE | 73 |
| ATTACHMENTF - FREQUENCY STABILITY | 82 |
| ATTACHMENTG - PEAK TO AVERAGE RATIO | 87 |

REPORT ISSUED HISTORY

| Issued No. | Description | Issued Date |
|----------------------|-----------------|---------------|
| BTL-FICP-14-1506C242 | Original Issue. | Jul. 06, 2015 |

1. CERTIFICATION

Equipment : Mobile Phone
Brand Name : 
Model Name : ONE A2005
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.
Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China
Factory : OnePlus Technology (Shenzhen) Co., Ltd.
Address : 18/F, Tower C, Tai Ran Building, No.8 Tai Ran Road, Shenzhen, China
Date of Test : Jun. 13, 2015 ~ Jul. 03, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : 47 CFR FCC Part 27
47 CFR FCC Part 2 &ANSI/TIA-603-C-2004
RSS-199 Issue 2 October 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FICP-14-1506C242) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the LTE BANDVII approval part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part 27 & Part 2/ RSS-199 Issue 2 | | | | |
|---------------------------------------|-----|---|----------|--------|
| Standard(s) Section | | Test Item | Judgment | Remark |
| FCC | IC | | | |
| 2.1047(d) | 4.1 | Modulation Characteristics | PASS | |
| 2.1046(a) 27.50(d)(4) | 4.4 | Radiated RF Output | PASS | |
| 2.1049(h) 27.53(h) | 4.2 | 99% Occupied Bandwidth | PASS | |
| 2.1051 27.53(h) | 4.6 | Spurious Emissions at Antenna Terminal | PASS | |
| 2.1053 27.53(h) | 4.6 | Spurious Radiated Emissions | PASS | |
| 27.53(h) | 4.6 | Band Edge Emissions | PASS | |
| 2.1055 27.54 | 4.3 | Frequency Stability | PASS | |
| 2.1046(d) 27.50(d)(5) | - | Peak to Average Ratio | PASS | |

NOTE:

(1) "N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

BTL's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%** ◦




A. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U_1 (dB) | Note |
|-----------------|--------|-----------------------------|------------|------------|------|
| DG-CB03 (3m) | CISPR | 9KHz~30MHz | V | 3.79 | |
| | | 9KHz~30MHz | H | 3.57 | |
| | | 30MHz ~ 200MHz | V | 3.82 | |
| | | 30MHz ~ 200MHz | H | 3.78 | |
| | | 200MHz ~ 1,000MHz | V | 4.10 | |
| | | 200MHz ~ 1,000MHz | H | 4.06 | |
| | | 1GHz~18GHz | V | 3.12 | |
| | | 1GHz~18GHz | H | 3.68 | |
| | | 18GHz~40GHz | V | 4.15 | |
| | | 18GHz~40GHz | H | 4.14 | |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | | |
|---------------------|---|--|
| Equipment | Mobile Phone | |
| Brand Name |  | |
| Model Name | ONE A2005 | |
| Model Difference | N/A | |
| Product Description | Operation Frequency | LTE Band VII: TX:2502.5MHz~2567.5MHz RX:2622.5MHz~2687.5MHz |
| | Modulation Type | QPSK;16QAM |
| | Bandwidth | 5M/10M/15M/20M |
| | EIRP Output Power | 20.99dBm |
| PowerSource | #1 DC Voltage supplied from AC/DC adapter. 1) Brand / Model:  / YJ1100 2) Brand / Model:  / AY0520 #2 Supplied from battery. Model: BLP597 | |
| Power Rating | #1 1) I/P: 100-240V~ 50-60Hz 0.4A O/P: DC 5V 2A 2) I/P: 100-240V~ 50-60Hz 0.3A O/P: DC 5V 2A #2 DC 3.8V 3200mAh/3300mAh (min/typ) | |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Table for Filed Antenna @LTE Band VII

| Ant. | Manufacture | Model Name | Antenna Type | Connector | Gain (dBi) |
|------|-------------|------------|--------------|-----------|------------|
| 1 | N/A | N/A | Internal | N/A | -1.01 |

3.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Test Items | Worst TX Mode | Channel |
|--|---------------|-----------------------|
| Radiated RF Output | QPSK/16QAM | Lowest/Middle/Highest |
| Spurious Radiated Emissions | QPSK | Middle |
| Band Edge Emissions | QPSK/16QAM | Lowest/Highest |
| Frequency Stability | QPSK | Middle |
| 99% Occupied Bandwidth | QPSK/16QAM | Lowest/Middle/Highest |
| Spurious Emissions at Antenna Terminal | QPSK | Lowest/Middle/Highest |
| Peak to Average Ratio | QPSK/16QAM | Middle |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (3) Both adapter and battery are evaluated, operated the battery is the worst and recorded as below test data

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. | Note |
|------|-----------|-----------|----------------|--------|------------|------|
| - | - | - | - | - | - | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| - | - | - | - | - |

4. TEST RESULT

4.1 RADIATEDRF OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part 27.50(c)(9)& 27.50(d)(4)&27.50(h)(2)& RSS-199 section 4.1 that “Mobile/Portable station are limited to 1 watts e.i.r.p.” and 27.50(c)(9)&27.50(d)(4)&27.50(h)(2) RSS-199 section 4.1 specified that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

4.1.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.


| Spectrum Parameters | Setting |
|---------------------|------------------------------|
| Attenuation | Auto |
| Center Frequency | Low / middle / high channels |
| Span Frequency | 10MHz |
| RB / VB | 3MHz / 3MHz for Peak |

4.1.3 TEST PROCEDURE

EIRP/ERP:

1. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1MHz for GSM, GPRS & EDGE, 5MHz for WCDMA & CDMA, and 10MHz for LTE mode.
2. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
3. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value“ of step b. Record the power level of S.G
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of Integral, E.R.P power=E.I.P.R power-2.15dBi.

4.1.4 TESTSETUP LAYOUT EIRP Power Measurement

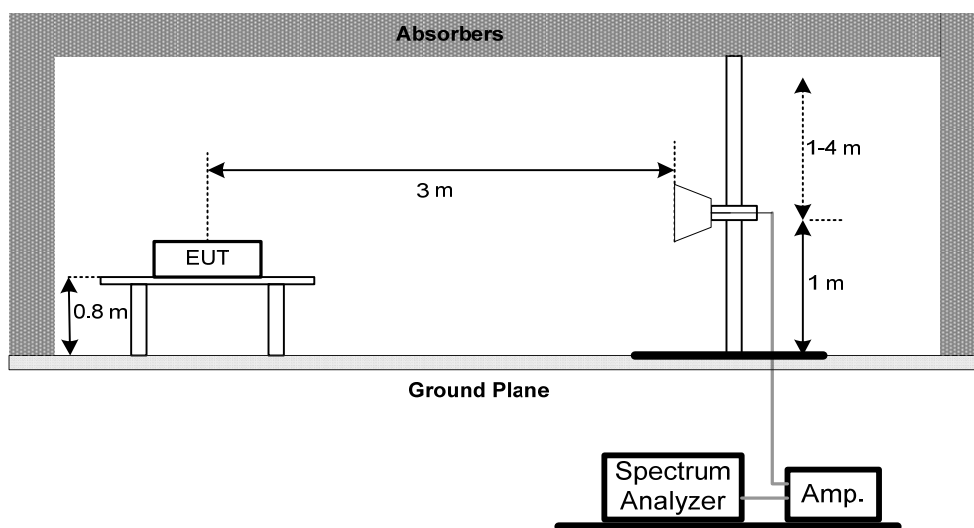

4.1.5 TESTDEVIATION

There is no deviation with the original standard.

4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.1.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.1.8 TEST RESULTS

Please refer to the Attachment A.

4.2 99% OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 LIMIT

According to FCC 27.53(h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting |
|---------------------|--|
| Attenuation | Auto |
| Span Frequency | Encompass the entire emissions bandwidth (EBW) of the signal |
| RB | 30 kHz |
| VB | 100 kHz |
| Trace | Max Hold |

4.2.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

4.2.4 TEST SETUP LAYOUT

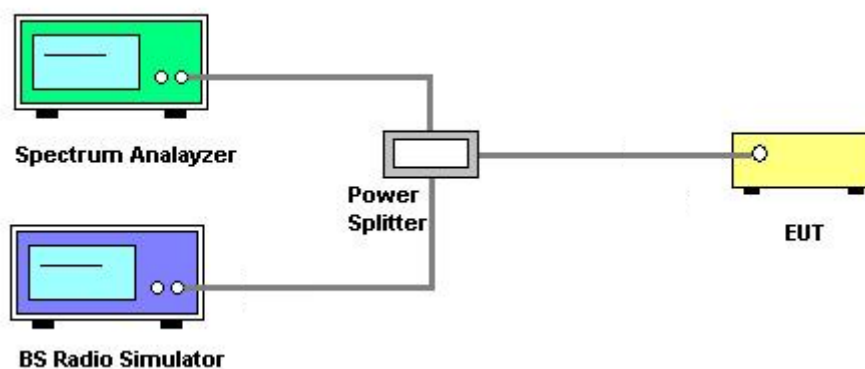

4.2.5 TEST DEVIATION

There is no deviation with the original standard.

4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.2.7 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: DC 3.8V

4.2.8 TEST RESULTS

Please refer to the Attachment B.

4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT

4.3.1 LIMIT

In the FCC 27.53(h)& RSS-199 section 4.6, on any frequency outside a licensee’s frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm .

4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting |
|---------------------|-----------------------|
| Attenuation | Auto |
| Start Frequency | 30MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB | 1 MHz / 1MHz for Peak |

4.3.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, Lowest, Middle, Highest (low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4.5dB in the transmitted path track.
3. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.3.4 TEST SETUP LAYOUT

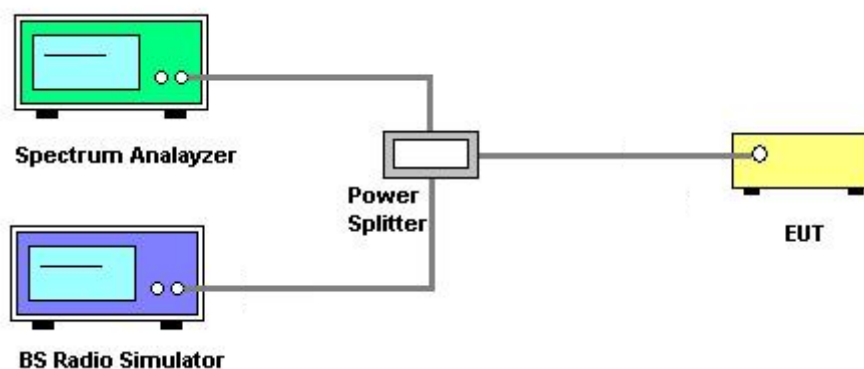

4.3.5 TEST DEVIATION

There is no deviation with the original standard.

4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.3.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage:DC 3.8V

4.3.8 TEST RESULTS

Please refer to the Attachment C.

4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

In the FCC 27.53(h) & RSS-199 section 4.6, On any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line.

4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting |
|---------------------|-----------------------|
| Attenuation | Auto |
| Start Frequency | 30 MHz |
| Stop Frequency | 10th carrier harmonic |
| Detector | Positive Peak |
| Span | 100 MHz |
| Sweep Time | 1s |
| RB / VB | 1 MHz / 1MHz |
| Attenuation | Positive Peak |

4.4.3 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.4 TESTSETUP LAYOUT

This test setup layout is the same as that shown in **section 4.1.3**.

4.4.5 TESTDEVIATION

There is no deviation with the original standard.

4.4.6 EUT OPERATIONDURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.4.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.4.8 TEST RESULTS

Please refer to the Attachment D.

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

According to FCC 27.53(h) & RSS-199 section 4.6 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB . In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameters | Setting |
|---------------------|----------------|
| Attenuation | Auto |
| Span Frequency | 5 MHz |
| RB / VB | 10 kHz /30 kHz |
| Trace | Sample |
| Sweep Time | Auto |

4.5.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, Lowest and Highest(low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30KHz.
4. Record the Sample trace plot into the test report.

4.5.4 TESTSETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.5.5 TESTDEVIATION

There is no deviation with the original standard.

4.5.6 EUT OPERATIONDURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.5.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.5.8 TEST RESULTS

Please refer to the Attachment E.

4.6 FREQUENCY STABILITY MEASUREMENT

4.6.1 LIMIT

According to the FCC part 27.54& RSS-199 section 4.3 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.6.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

| Spectrum Parameters | Setting |
|---------------------|---|
| Frequency Error | The maximum of transmit frequency error |

4.6.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error.
Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Reduced operating temperature range of $-10^{\circ} \sim +45^{\circ} \text{C}$ as defined in Operational description and declared in User Manual.

4.6.4 TESTSETUP LAYOUT

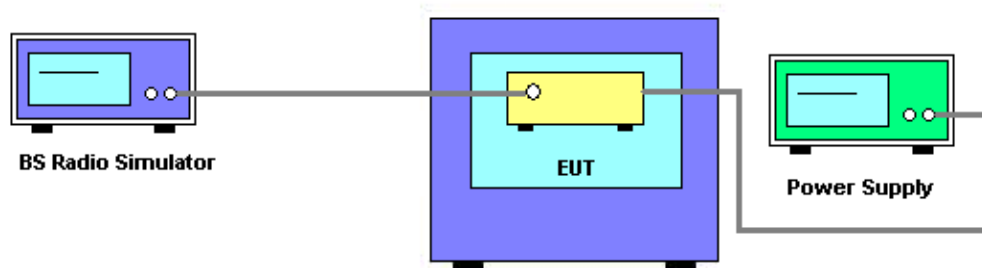

4.6.5 TESTDEVIATION

There is no deviation with the original standard.

4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.6.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.8V

4.6.8 TEST RESULTS

Please refer to the Attachment F.

4.7 PEAK TO AVERAGE RATIO

4.7.1 LIMIT

In the FCC 27.50) Peak transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

4.7.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;

4.7.3 TESTSETUP LAYOUT

Please refer to section 3.4 in this report.

4.7.4 TESTDEVIATION

There is no deviation with the original standard.

4.7.5EUT OPERATIONDURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.7.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage:DC 3.8V

4.7.7 TEST RESULTS

Please refer to the Attachment G.

5. LIST OF MEASUREMENT EQUIPMENTS

| Radiated Emission & ERP or EIRP Measurement | | | | | |
|---|--------------------------------------|----------------|----------------------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Antenna | Schwarzbeck | VULB9160 | 9160-3232 | Mar. 28, 2016 |
| 2 | Amplifier | HP | 8447D | 2944A09673 | Nov. 17, 2015 |
| 3 | Receiver | AGILENT | N9038A | MY52130039 | Sep. 30, 2015 |
| 4 | Test Cable | emci | LMR-400(30MHz-1GHz) | C-01 | Jun. 28, 2016 |
| 5 | Controller | CT | SC100 | N/A | N/A |
| 6 | Antenna | ETS | 3115 | 00075789 | Mar. 28, 2016 |
| 7 | Amplifier | Agilent | 8449B | 3008A02274 | Nov. 02, 2015 |
| 8 | Receiver | AGILENT | N9038A | MY52130039 | Sep. 30, 2015 |
| 9 | Test Cable | emci | EMC104-SM-SM-10000(1GHz-26.5GHz) | C-68 | Jun. 28, 2016 |
| 10 | Controller | CT | SC100 | N/A | N/A |
| 11 | Broad-Band Horn Antenna | Schwarzbeck | BBHA 9170 | 9170319 | Mar. 28, 2016 |
| 12 | Microwave Pre-amplifier With Adaptor | EMC INSTRUMENT | EMC2654045 | 980039 & HA01 | Mar. 28, 2016 |
| 13 | Double Ridged Guide Antenna | ETS-LINDGREN | 3115 | 00075846 | Mar. 28, 2016 |
| 14 | Antenna | SCHWARZBECK | VULB 9160 | 9160-3231 | Mar. 28, 2016 |
| 15 | MXG Analog Signal Generator | Agilent | N5181A | MY49060710 | Nov. 02, 2015 |
| 16 | Signal Generator | R&S | SMR40 | 100504 | Mar. 28, 2016 |
| 17 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |

Antenna Conducted Spurious Emission Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------------------------|---------------|-----------------|-------------|------------------|
| 1 | EXA Spectrum Analyzer | Agilent | N9010A | MY50520044 | Mar. 28, 2016 |
| 2 | wideband radio communication tester | R&S | CMW500 | 152372 | Jan. 30, 2016 |
| 3 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | 331000910-1 | Mar. 17, 2016 |
| 4 | Test Cable | N/A | CL-CB12-00 1 | N/A | Oct. 22, 2015 |
| 5 | Test Cable | N/A | CL-CB12-00 4 | N/A | Oct. 22, 2015 |

Band Edge Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------------------------|---------------|-----------------|-------------|------------------|
| 1 | EXA Spectrum Analyzer | Agilent | N9010A | MY50520044 | Mar. 28, 2016 |
| 2 | wideband radio communication tester | R&S | CMW500 | 152372 | Jan. 30, 2016 |
| 3 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | 331000910-1 | Mar. 17, 2016 |
| 4 | Test Cable | N/A | CL-CB12-00 1 | N/A | Oct. 22, 2015 |
| 5 | Test Cable | N/A | CL-CB12-00 4 | N/A | Oct. 22, 2015 |

99% Occupied Bandwidth Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------------------------|---------------|-----------------|-------------|------------------|
| 1 | EXA Spectrum Analyzer | Agilent | N9010A | MY50520044 | Mar. 28, 2016 |
| 2 | wideband radio communication tester | R&S | CMW500 | 152372 | Jan. 30, 2016 |
| 3 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | 331000910-1 | Mar. 17, 2016 |
| 4 | Test Cable | N/A | CL-CB12-00 1 | N/A | Oct. 22, 2015 |
| 5 | Test Cable | N/A | CL-CB12-00 4 | N/A | Oct. 22, 2015 |

| Frequency Stability Measurement | | | | | |
|---------------------------------|-------------------------------------|---------------|-------------------|-------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | wideband radio communication tester | R&S | CMW500 | 152372 | Jan.30,2016 |
| 2 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | 331000910-1 | Mar. 17, 2016 |
| 3 | Test Cable | N/A | CL-CB12-00 1 | N/A | Oct. 22, 2015 |
| 4 | Const Temp. & Humidity Chamber | GIANT FORCE | ITH-1200-40-CP-AR | IAA1210-003 | Aug. 01, 2015 |
| 5 | DC power supply | GW Instek | GPC-30300N | EK880675 | Oct.12, 2015 |

| Peak to Average Ratio | | | | | |
|-----------------------|-------------------------------------|---------------|-----------------|-------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | EXA Spectrum Analyzer | Agilent | N9010A | MY50520044 | Mar. 28, 2016 |
| 2 | wideband radio communication tester | R&S | CMW500 | 152372 | Jan. 30, 2016 |
| 3 | POWER SPLITTER | Mini-Circuits | ZFRSC-123-S+ | 331000910-1 | Mar. 17, 2016 |
| 4 | Test Cable | N/A | CL-CB12-00 1 | N/A | Oct. 22, 2015 |
| 5 | Test Cable | N/A | CL-CB12-00 4 | N/A | Oct. 22, 2015 |

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

6. EUT TEST PHOTO

Radiated Measurement Photos

9KHz to 30MHz



Radiated Measurement Photos

30MHz to 1000MHz



Radiated Measurement Photos

Above 1000MHz



ATTACHMENTA -RADIATED RF OUTPUT POWER

| | |
|------------|---------|
| Test Mode: | TX Mode |
|------------|---------|

| LTE Band VII | | | | Radiated Power (dBm) | | | Max. Limit (dBm) | Result |
|--------------|------------|---------|-----|----------------------|--------|---------|------------------|----------|
| BW | Modulation | RB Size | V/H | Lowest | Middle | Highest | | |
| 5M | QPSK | 1RB | H | 20.45 | 20.73 | 20.88 | 33 | Complies |
| 10M | | | H | 20.99 | 20.56 | 20.74 | 33 | Complies |
| 15M | | | H | 20.25 | 20.63 | 20.03 | 33 | Complies |
| 20M | | | H | 20.89 | 20.12 | 19.46 | 33 | Complies |
| 5M | 16-QAM | 1RB | H | 19.71 | 20.72 | 20.05 | 33 | Complies |
| 10M | | | H | 20.14 | 20.52 | 20.01 | 33 | Complies |
| 15M | | | H | 20.57 | 20.30 | 20.61 | 33 | Complies |
| 20M | | | H | 20.71 | 20.57 | 20.36 | 33 | Complies |

| | |
|------------|---------|
| Test Mode: | TX Mode |
|------------|---------|

| Bandwidth | Modulation | RB size | Conducted Power | | |
|-----------|------------|---------|-----------------|--------|---------|
| | | | Lowest | Middle | Highest |
| 5MHz | QPSK | 1 | 22.96 | 23.07 | 23.45 |
| | | 1 | 22.84 | 23.20 | 23.50 |
| | | 1 | 22.72 | 22.90 | 23.38 |
| | | 12 | 21.60 | 21.97 | 22.22 |
| | | 12 | 21.57 | 21.97 | 22.24 |
| | | 12 | 21.56 | 21.92 | 22.20 |
| | | 25 | 21.63 | 21.95 | 22.20 |
| | 16-QAM | 1 | 22.49 | 22.17 | 22.44 |
| | | 1 | 22.40 | 22.26 | 22.63 |
| | | 1 | 22.38 | 22.05 | 22.42 |
| | | 12 | 20.81 | 21.05 | 21.34 |
| | | 12 | 20.80 | 21.04 | 21.33 |
| | | 12 | 20.82 | 20.96 | 21.24 |
| | | 25 | 20.79 | 20.90 | 21.18 |

| Bandwidth | Modulation | RB size | Conducted Power | | |
|-----------|------------|---------|-----------------|--------|---------|
| | | | Lowest | Middle | Highest |
| 10MHz | QPSK | 1 | 23.20 | 22.89 | 23.33 |
| | | 1 | 23.08 | 22.90 | 23.30 |
| | | 1 | 22.76 | 22.66 | 23.14 |
| | | 25 | 21.78 | 21.85 | 22.31 |
| | | 25 | 21.76 | 21.86 | 22.20 |
| | | 25 | 21.56 | 21.80 | 22.10 |
| | | 50 | 21.68 | 21.83 | 22.18 |
| | 16-QAM | 1 | 22.08 | 21.88 | 22.80 |
| | | 1 | 22.12 | 21.44 | 22.29 |
| | | 1 | 21.90 | 21.75 | 22.23 |
| | | 25 | 20.79 | 20.91 | 21.35 |
| | | 25 | 20.77 | 20.94 | 21.22 |
| | | 25 | 20.50 | 20.86 | 21.13 |
| | | 50 | 20.66 | 20.88 | 21.20 |

| Bandwidth | Modulation | RB size | Conducted Power | | |
|-----------|------------|---------|-----------------|--------|---------|
| | | | Lowest | Middle | Highest |
| 15MHz | QPSK | 1 | 23.33 | 23.30 | 23.38 |
| | | 1 | 23.14 | 23.28 | 23.42 |
| | | 1 | 22.77 | 22.91 | 23.30 |
| | | 36 | 21.93 | 22.14 | 22.50 |
| | | 36 | 21.94 | 22.22 | 22.50 |
| | | 36 | 21.80 | 22.11 | 22.43 |
| | | 75 | 21.89 | 22.05 | 22.37 |
| | 16-QAM | 1 | 22.40 | 22.20 | 22.23 |
| | | 1 | 22.33 | 22.19 | 22.20 |
| | | 1 | 22.03 | 22.20 | 22.07 |
| | | 36 | 21.10 | 21.20 | 21.54 |
| | | 36 | 21.08 | 21.19 | 21.55 |
| | | 36 | 20.86 | 21.20 | 21.33 |
| | | 75 | 21.02 | 21.05 | 21.39 |

| Bandwidth | Modulation | RB size | Conducted Power | | |
|-----------|------------|---------|-----------------|--------|---------|
| | | | Lowest | Middle | Highest |
| 20MHz | QPSK | 1 | 22.87 | 23.28 | 23.45 |
| | | 1 | 22.86 | 23.19 | 23.44 |
| | | 1 | 22.50 | 22.70 | 23.00 |
| | | 50 | 21.97 | 22.25 | 22.42 |
| | | 50 | 21.90 | 22.09 | 22.51 |
| | | 50 | 21.70 | 22.05 | 22.40 |
| | | 100 | 21.82 | 22.11 | 22.31 |
| | 16-QAM | 1 | 22.60 | 22.51 | 23.18 |
| | | 1 | 22.58 | 22.58 | 23.61 |
| | | 1 | 22.40 | 22.10 | 22.50 |
| | | 50 | 21.11 | 21.29 | 21.53 |
| | | 50 | 20.97 | 21.20 | 21.50 |
| | | 50 | 20.80 | 20.93 | 21.30 |
| | | 100 | 20.96 | 21.08 | 21.40 |

REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
2. Correction Factor(dB) = Power SplitterLoss(dB) + Cable Loss(dB)
3. The antenna gain is -1.01dBi
4. Tests have been conducted for both vertical and horizontal plane and the worst case was found in horizontal plane and the results were selected and recorded in the report


ATTACHMENT B - 99% OCCUPIED BANDWIDTH

| Test Mode : TX Mode Configuration QPSK-5M/25RB | | | |
|--|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 4.498 | 4.869 | Complies |
| Middle | 4.509 | 4.861 | Complies |
| Highest | 4.503 | 4.898 | Complies |


99% Occupied Bandwidth channel Lowest



99% Occupied Bandwidth channel Middle

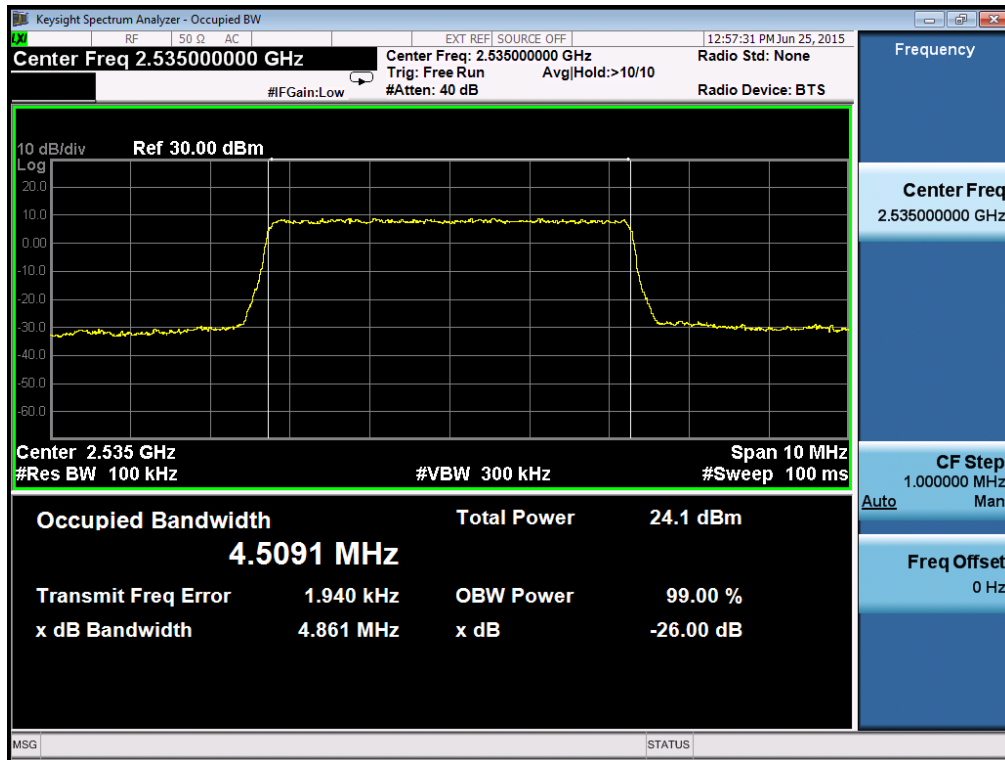


99% Occupied Bandwidth channel Highest

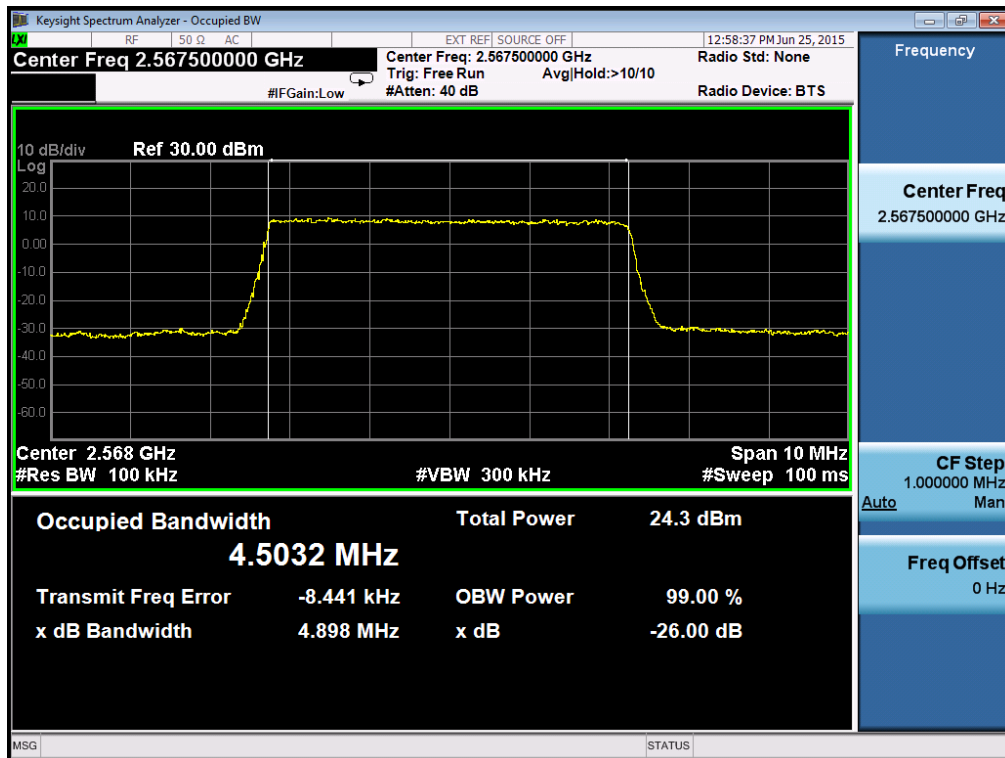


| Test Mode : TX Mode Configuration QPSK-10M/50RB | | | |
|---|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 8.982 | 9.625 | Complies |
| Middle | 8.998 | 9.587 | Complies |
| Highest | 8.991 | 9.583 | Complies |


99% Occupied Bandwidth channel Lowest

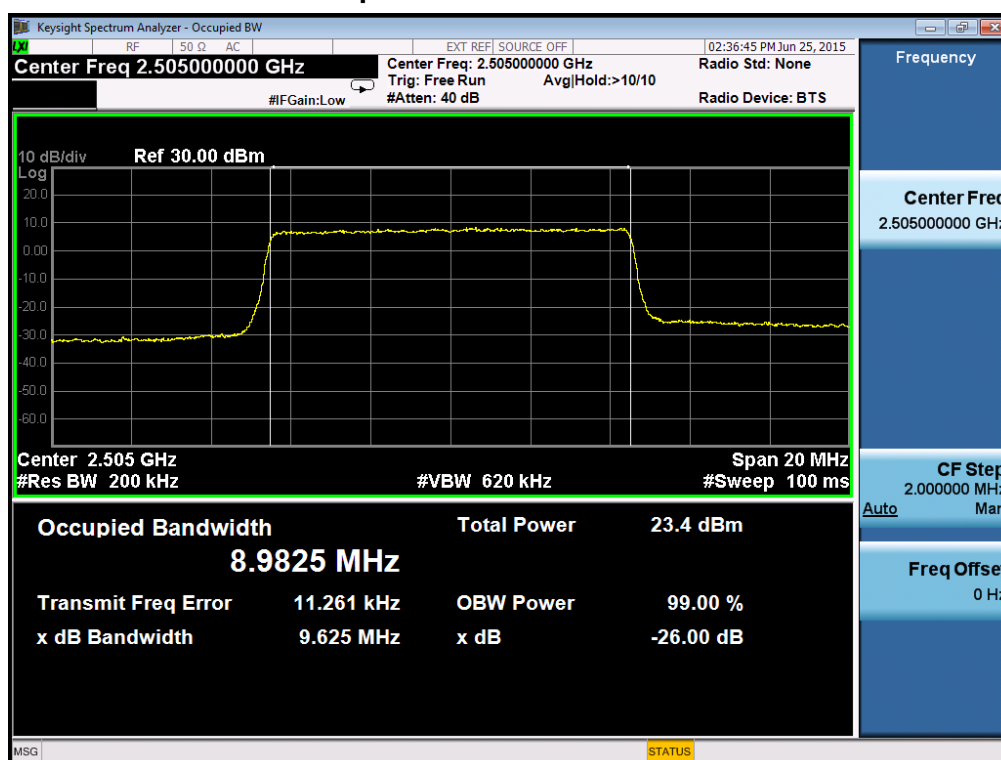

99% Occupied Bandwidth channel Middle

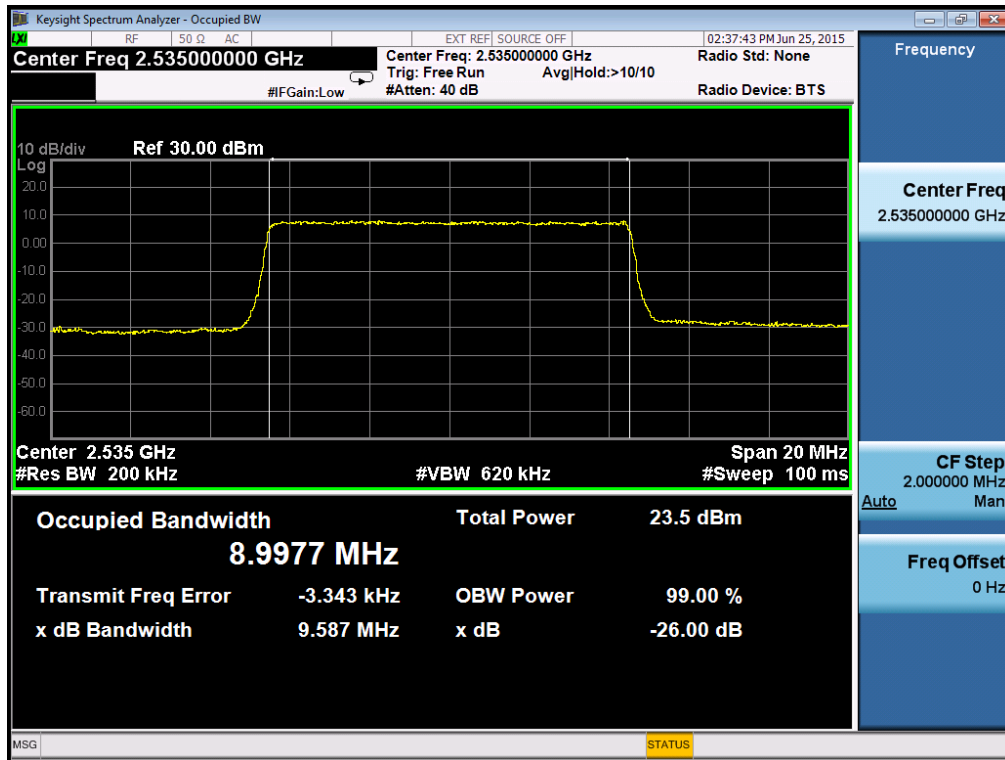


99% Occupied Bandwidth channel Highest

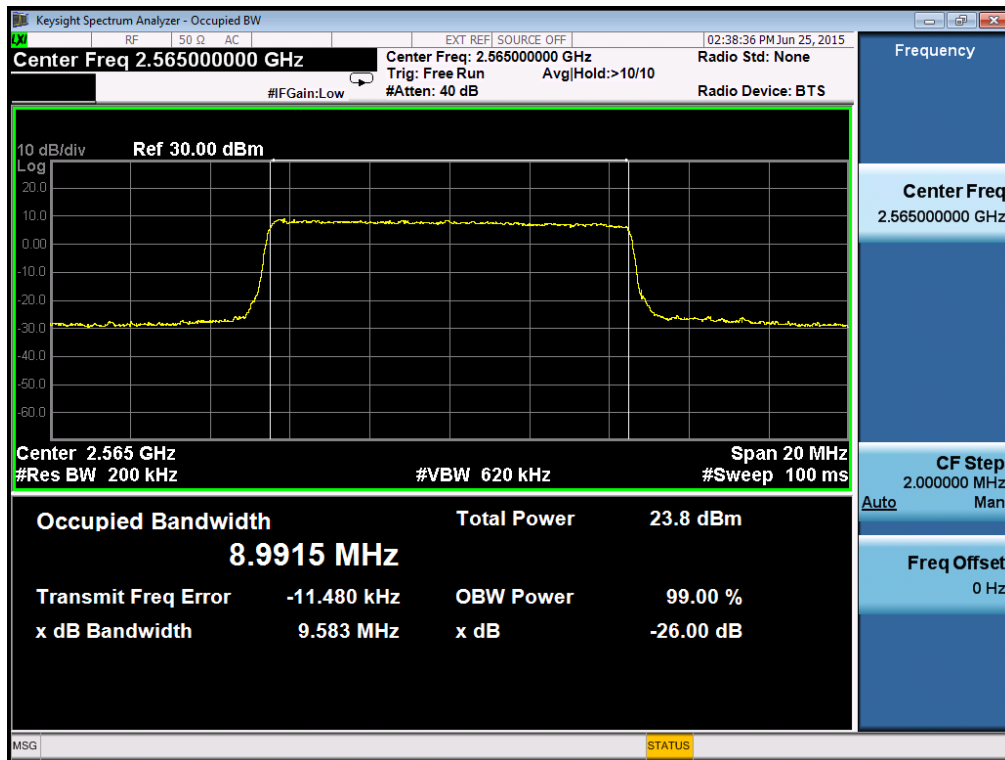


| Test Mode : TX Mode Configuration QPSK-15M/75RB | | | |
|---|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 13.483 | 14.350 | Complies |
| Middle | 13.507 | 14.310 | Complies |
| Highest | 13.496 | 14.290 | Complies |


99% Occupied Bandwidth channel Lowest

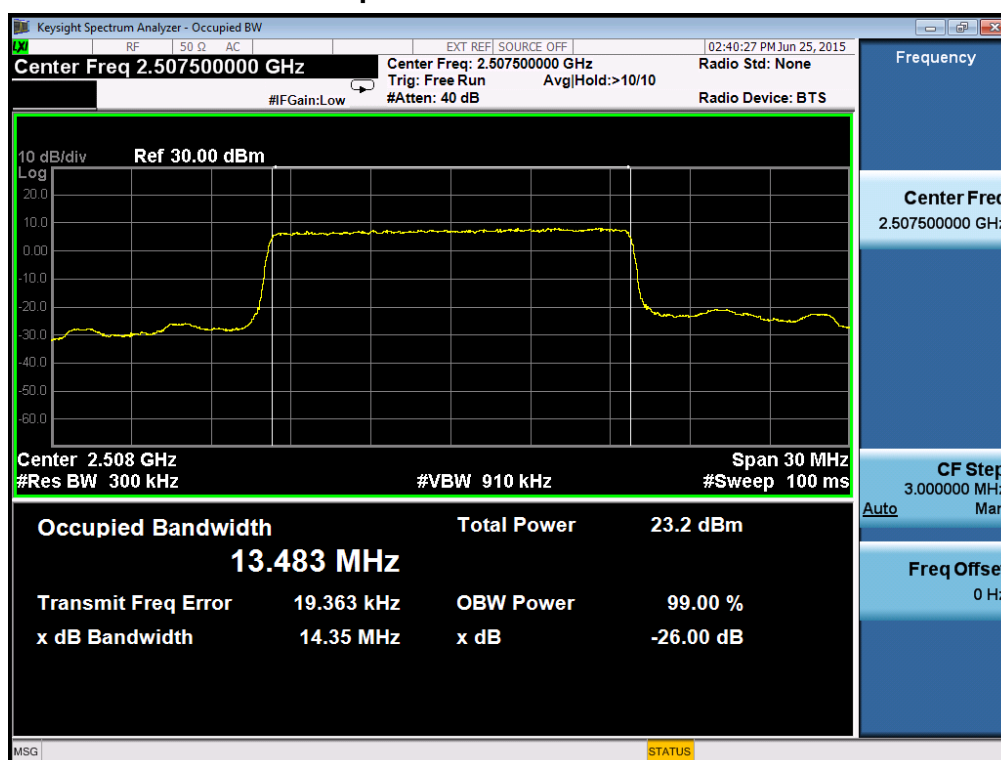

99% Occupied Bandwidth channel Middle

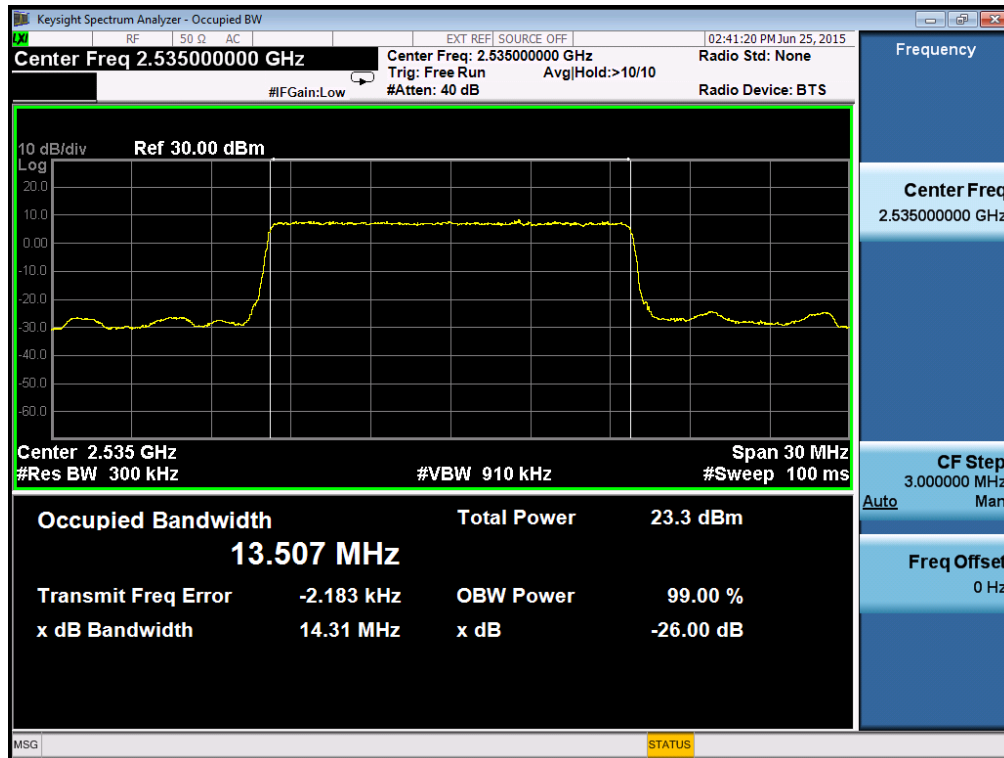


99% Occupied Bandwidth channel Highest

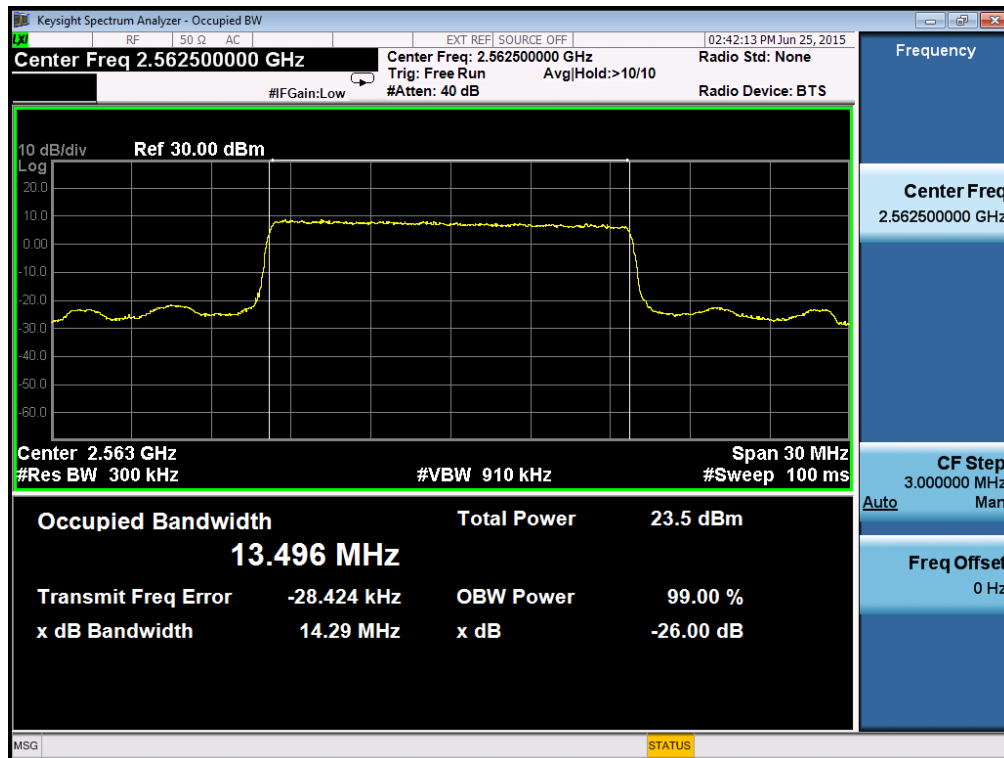


| Test Mode : TX Mode Configuration QPSK-20M/100RB | | | |
|--|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 17.945 | 19.020 | Complies |
| Middle | 17.999 | 19.020 | Complies |
| Highest | 17.972 | 19.030 | Complies |


99% Occupied Bandwidth channel Lowest

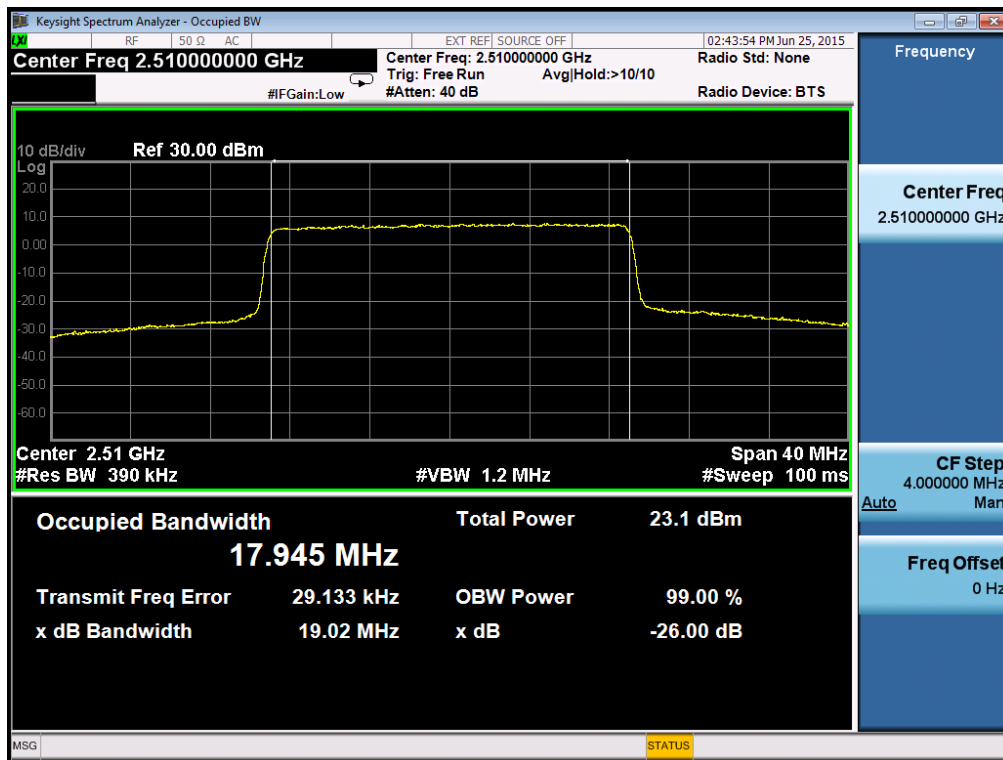

99% Occupied Bandwidth channel Middle

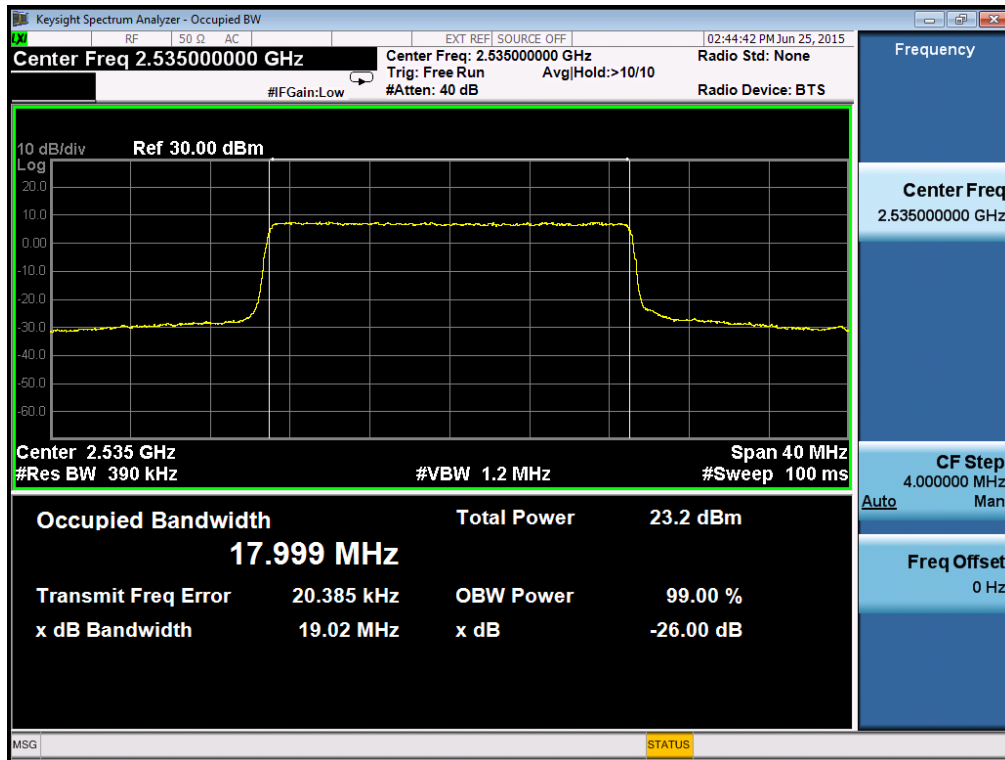


99% Occupied Bandwidth channel Highest

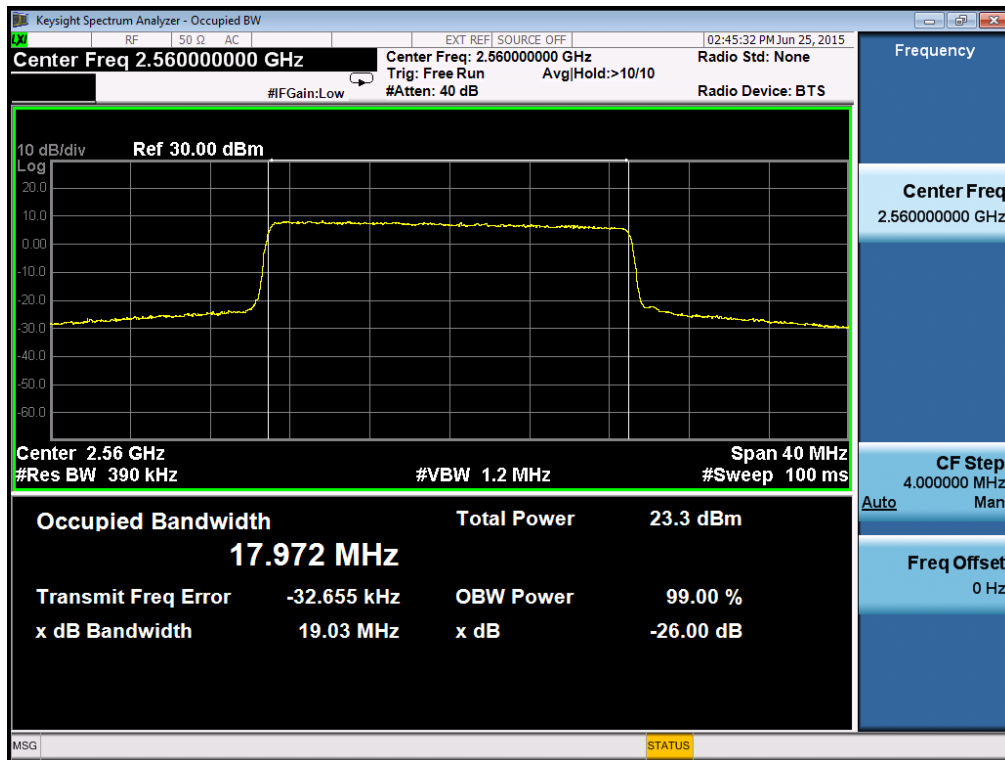


| Test Mode : TX Mode Configuration16-QAM-5M//25RB | | | |
|--|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 4.500 | 4.862 | Complies |
| Middle | 4.503 | 4.811 | Complies |
| Highest | 4.508 | 4.866 | Complies |


99% Occupied Bandwidth channel Lowest

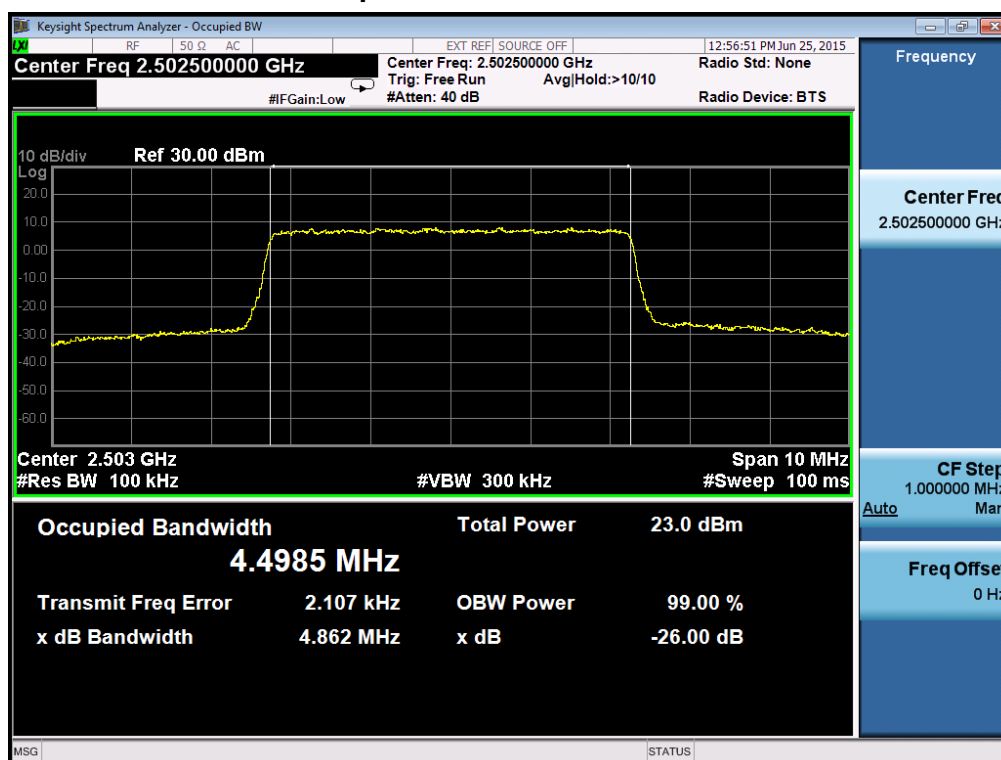

99% Occupied Bandwidth channel Middle

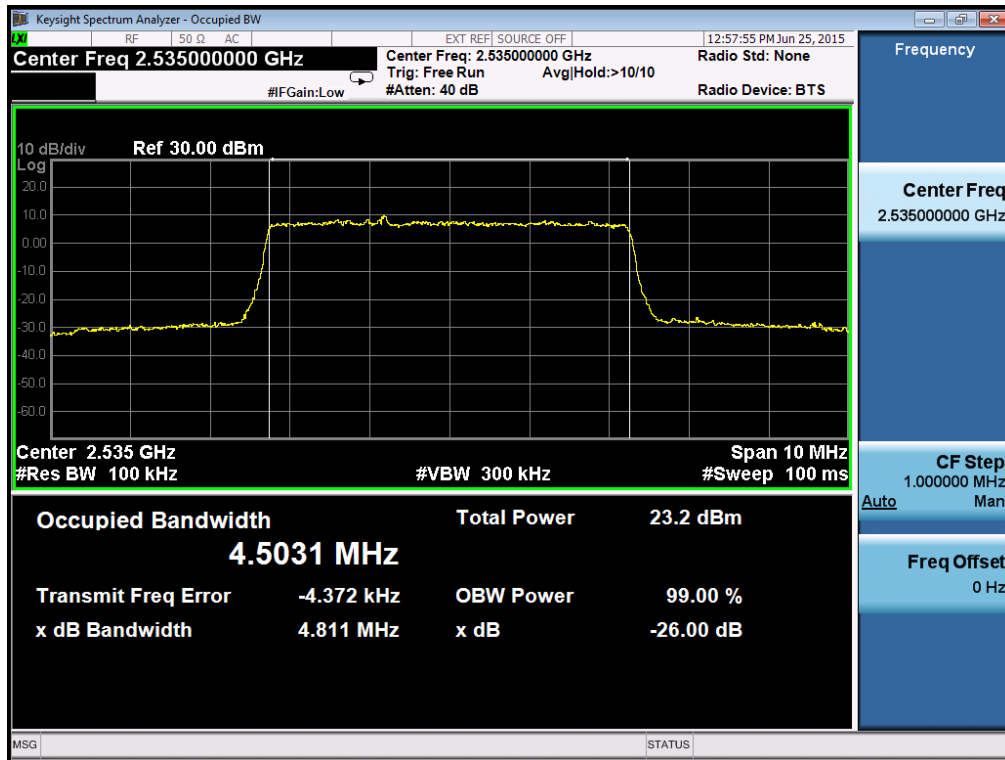


99% Occupied Bandwidth channel Highest

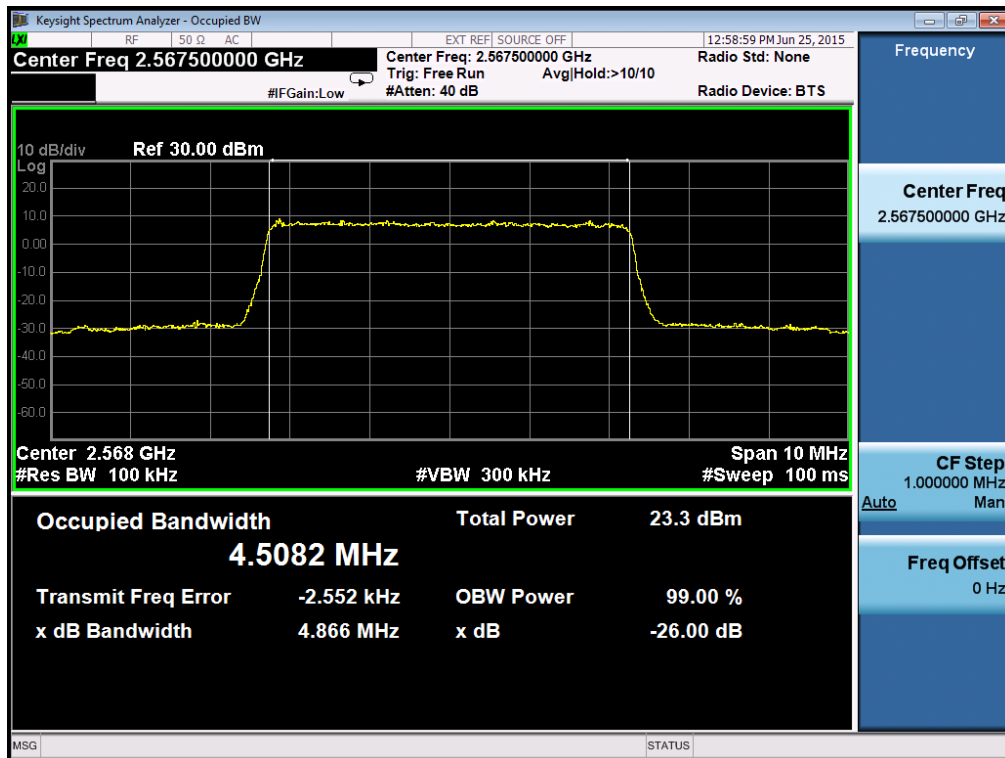


| Test Mode : TX Mode Configuration16-QAM-10M/50RB | | | |
|--|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 8.988 | 9.610 | Complies |
| Middle | 8.972 | 9.551 | Complies |
| Highest | 8.994 | 9.581 | Complies |


99% Occupied Bandwidth channel Lowest

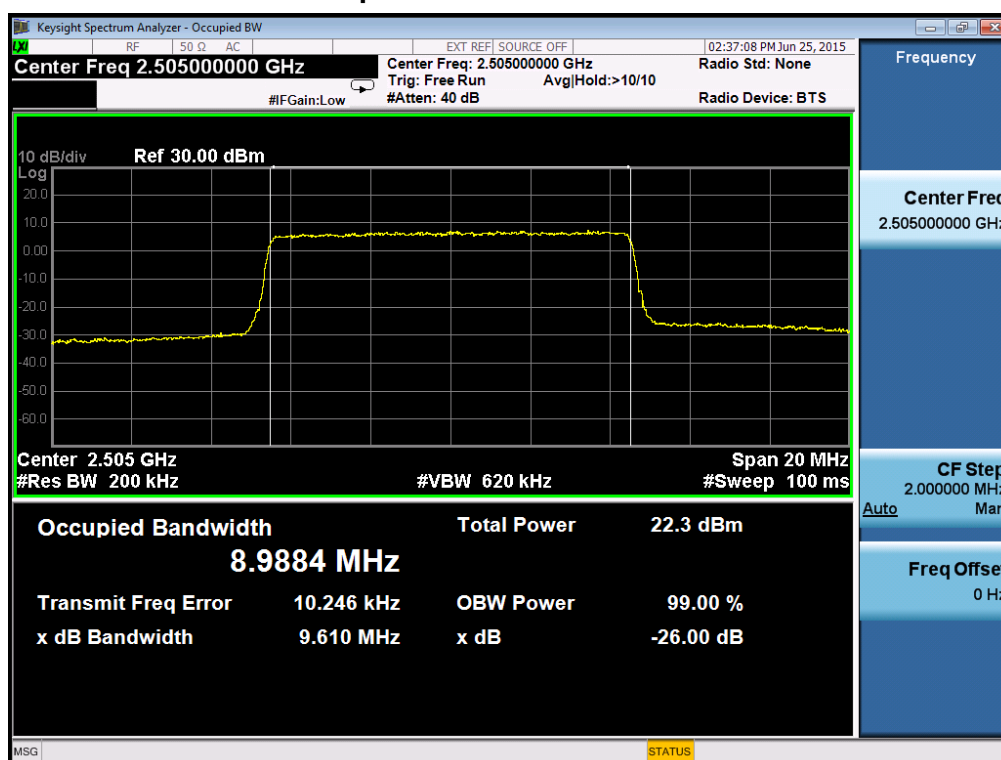

99% Occupied Bandwidth channel Middle

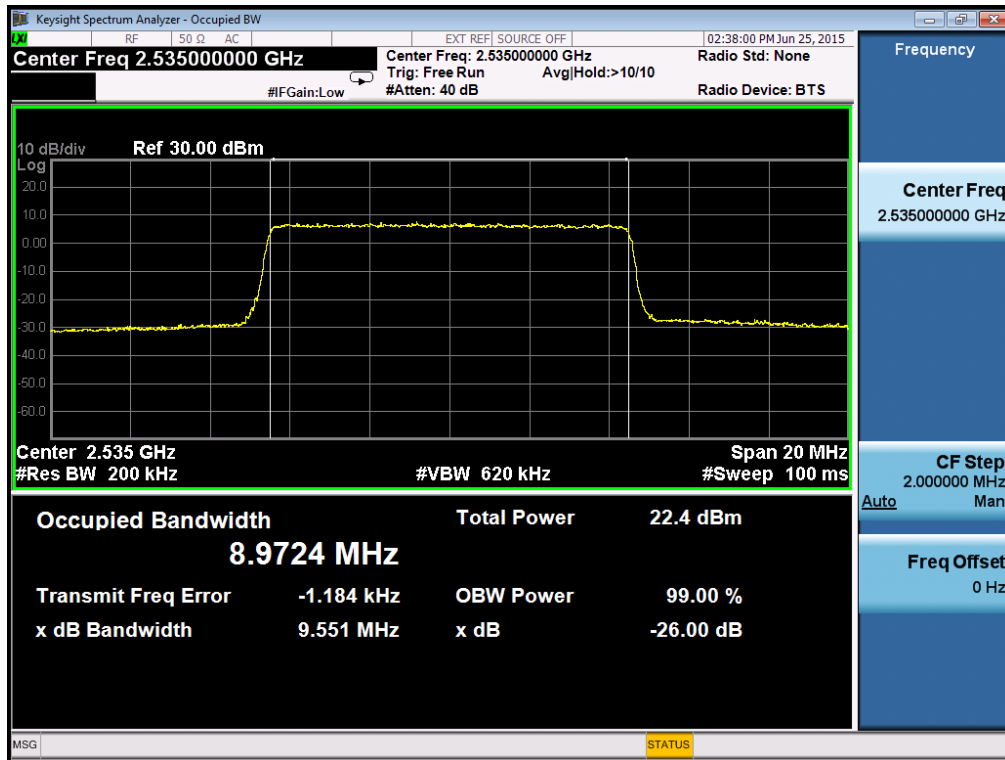


99% Occupied Bandwidth channel Highest

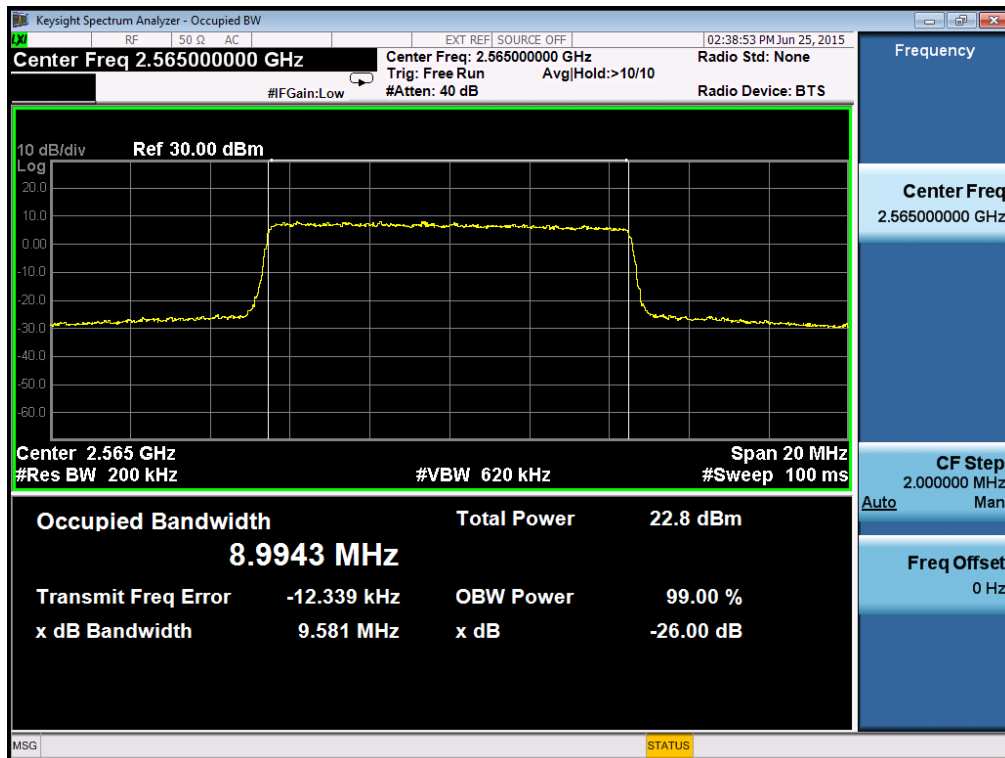


| Test Mode : TX Mode Configuration16-QAM-15M/75RB | | | |
|--|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 13.481 | 14.360 | Complies |
| Middle | 13.489 | 14.330 | Complies |
| Highest | 13.496 | 14.290 | Complies |


99% Occupied Bandwidth channel Lowest

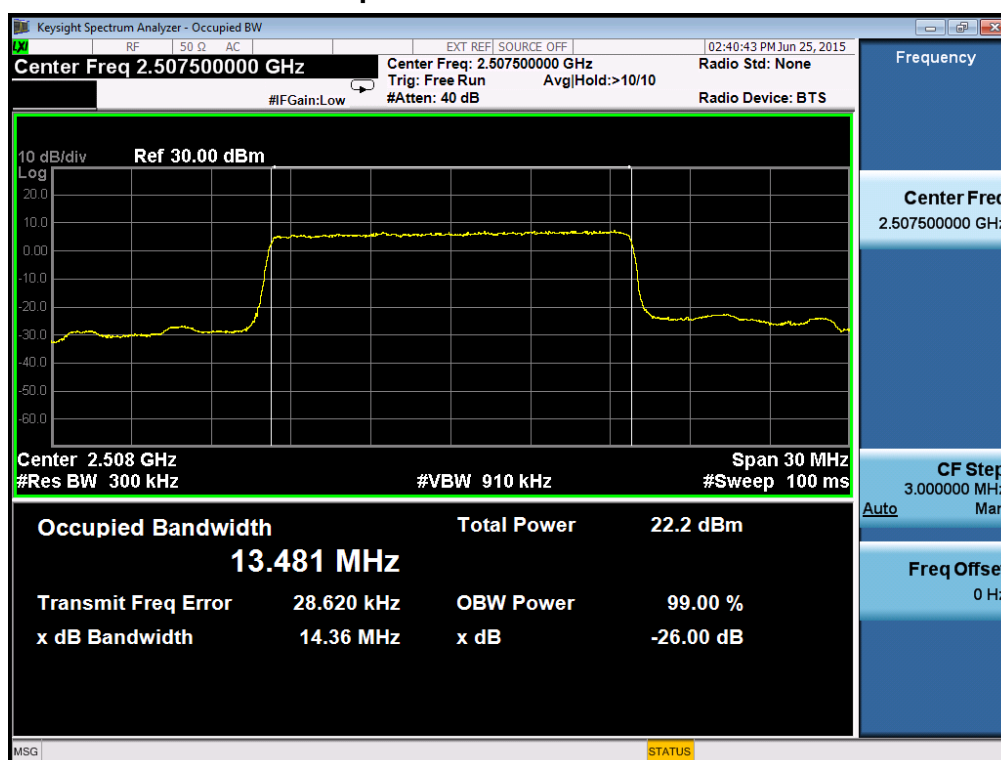

99% Occupied Bandwidth channel Middle

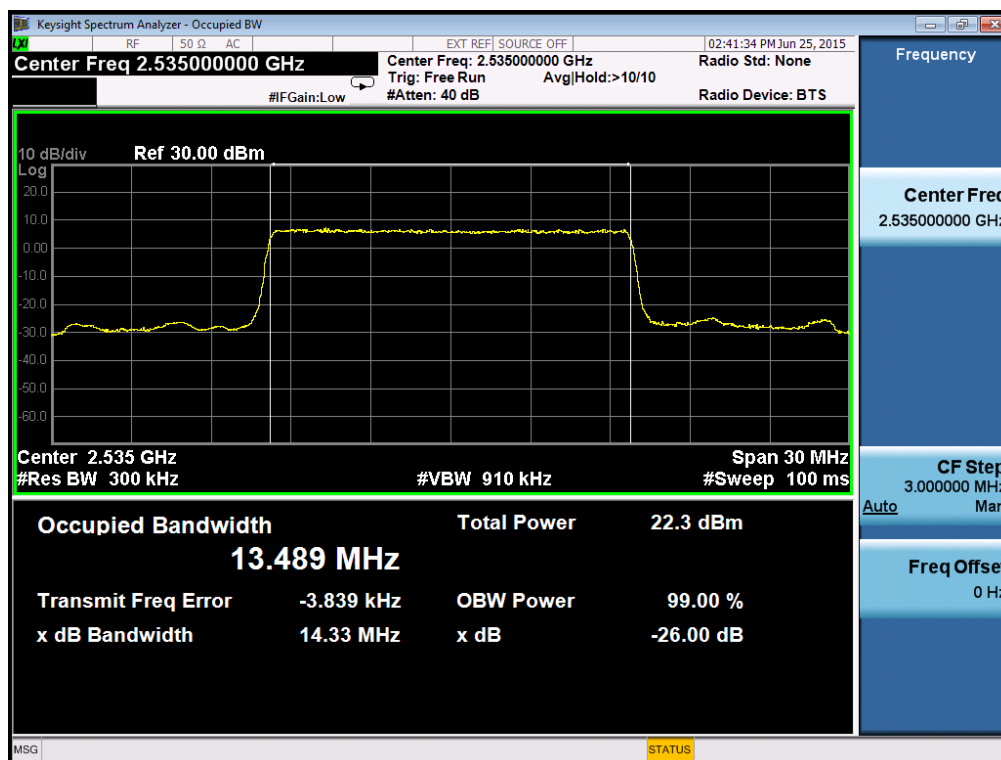


99% Occupied Bandwidth channel Highest

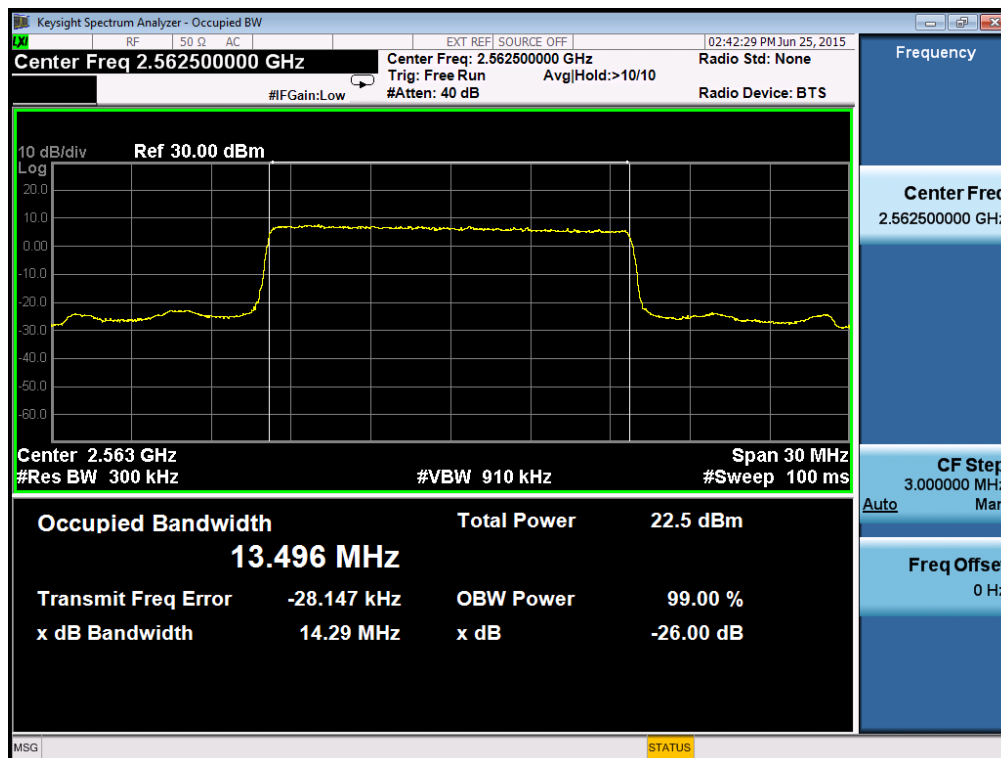


| Test Mode : TX Mode Configuration16-QAM-20M/100RB | | | |
|---|---------------|------------------|----------|
| Channel | 99% OBW (MHz) | -26dBc Bandwidth | Result |
| Lowest | 17.949 | 19.000 | Complies |
| Middle | 17.996 | 19.040 | Complies |
| Highest | 17.960 | 19.000 | Complies |


99% Occupied Bandwidth channel Lowest

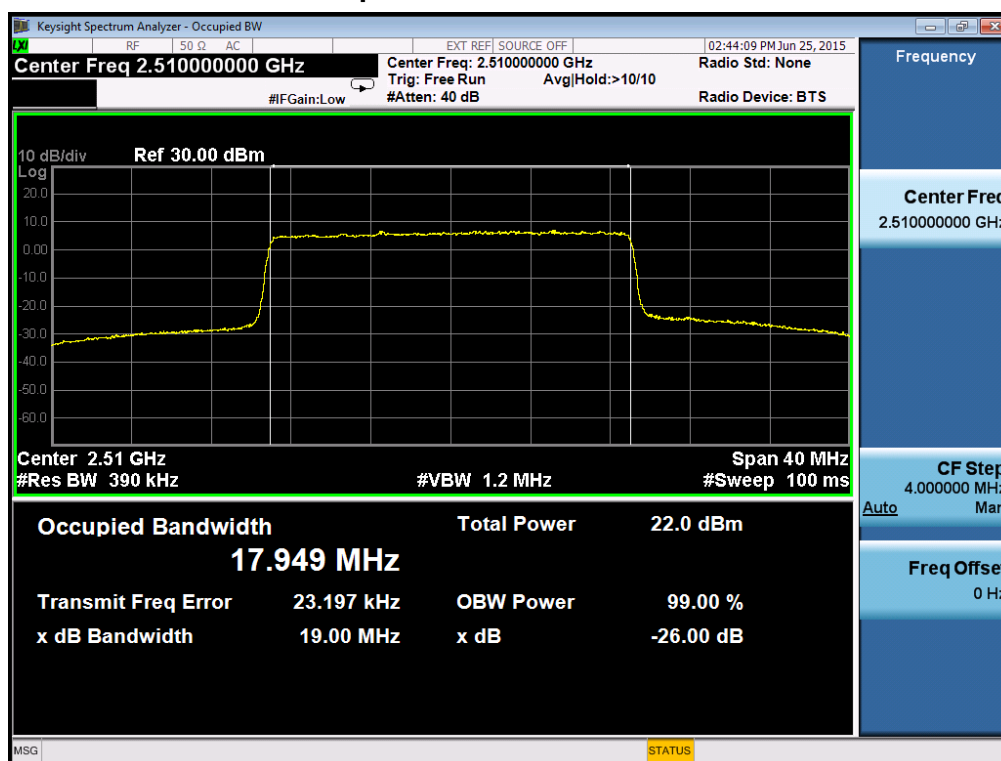

99% Occupied Bandwidth channel Middle

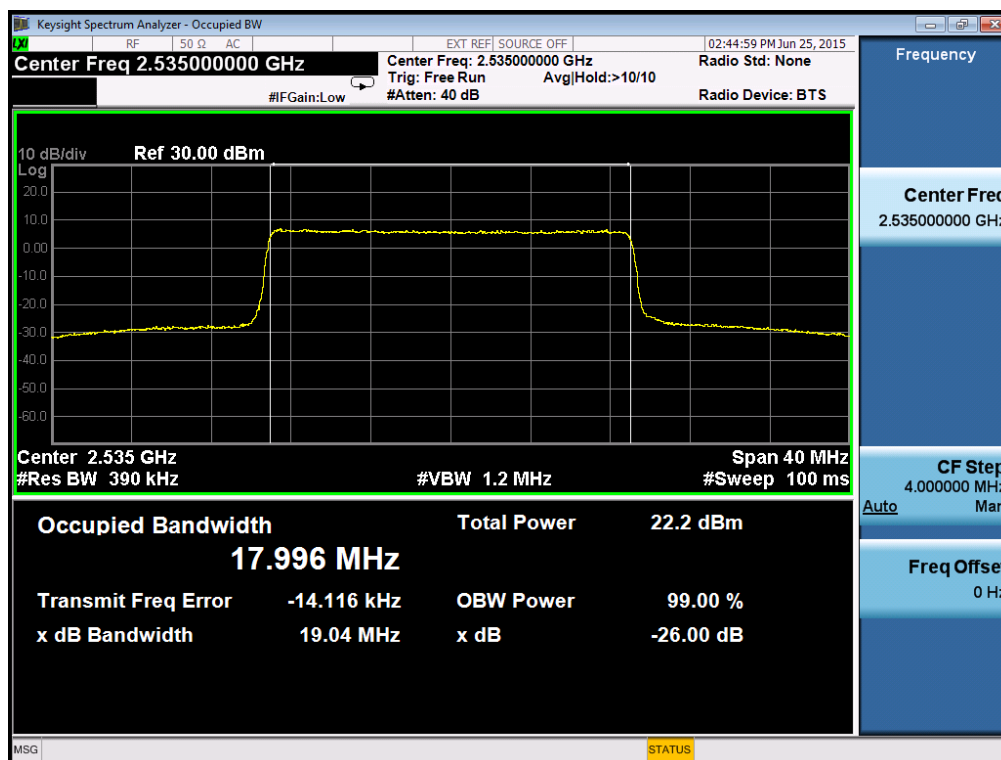

99% Occupied Bandwidth channel Highest

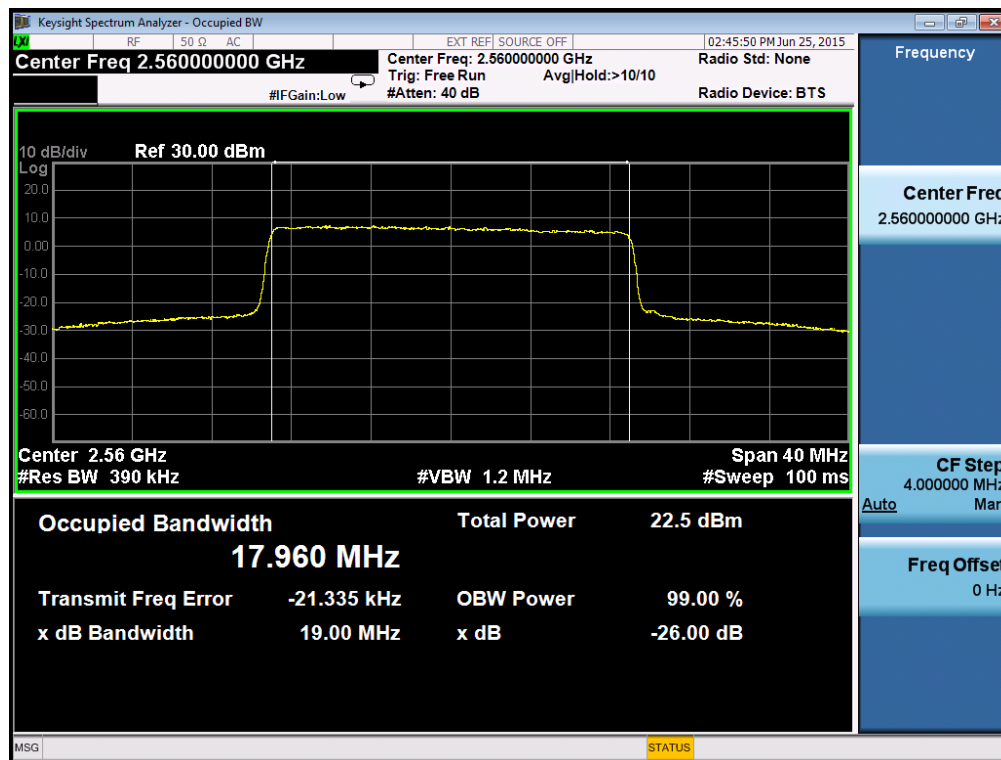

ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Conducted Spurious of Configuration-QPSK-5M/1RB



Conducted Spurious of Configuration-QPSK-10M/1RB



Conducted Spurious of Configuration-QPSK-15M/1RB




Conducted Spurious of Configuration-QPSK-20M/1RB



ATTACHMENTD - SPURIOUS RADIATED EMISSION

Test Mode: TX Channel Middle-QPSK 5M/1RB


Vertical

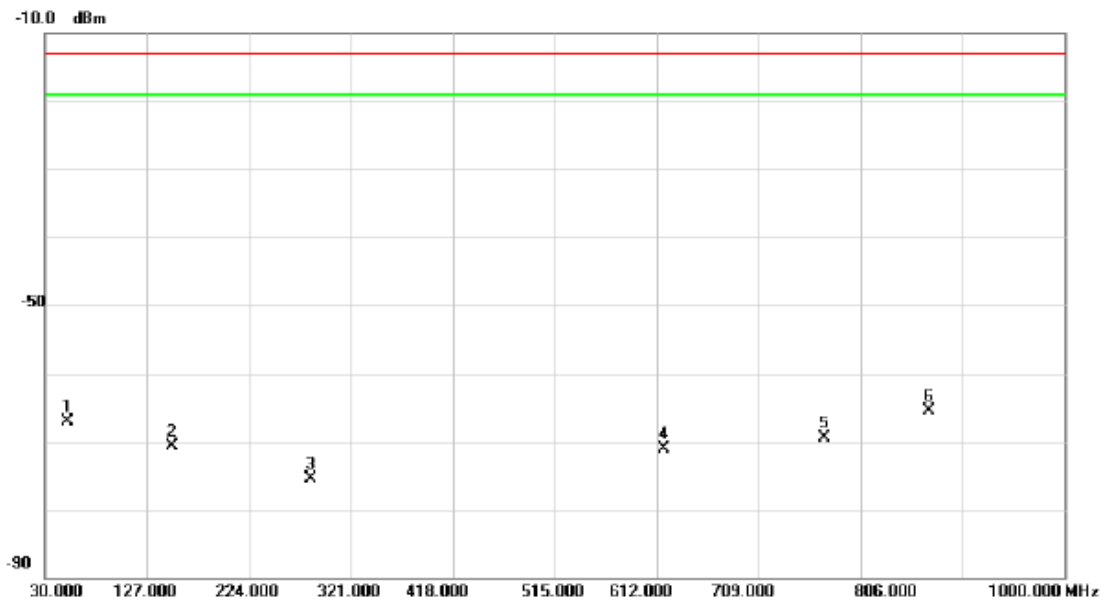

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 51.3400 | -68.33 | 1.17 | -67.16 | -13.00 | -54.16 | peak | |
| 2 | | 151.2500 | -73.85 | 3.15 | -70.70 | -13.00 | -57.70 | peak | |
| 3 | | 283.1700 | -78.01 | 2.51 | -75.50 | -13.00 | -62.50 | peak | |
| 4 | | 618.7900 | -80.31 | 9.23 | -71.08 | -13.00 | -58.08 | peak | |
| 5 | | 772.0500 | -81.72 | 12.22 | -69.50 | -13.00 | -56.50 | peak | |
| 6 | * | 870.9900 | -79.17 | 13.72 | -65.45 | -13.00 | -52.45 | peak | |

Test Mode: TX Channel Middle-QPSK 5M/1RB


Horizontal

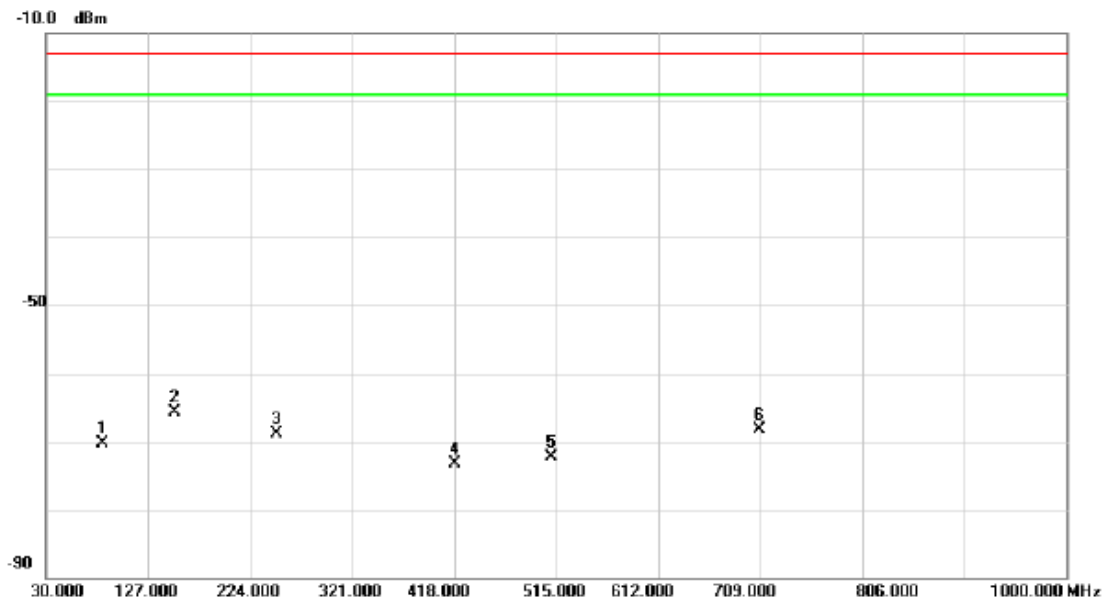

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 83.3500 | -62.55 | -7.76 | -70.31 | -13.00 | -57.31 | peak | |
| 2 | * | 152.2200 | -69.52 | 3.91 | -65.61 | -13.00 | -52.61 | peak | |
| 3 | | 249.2200 | -70.90 | 1.91 | -68.99 | -13.00 | -55.99 | peak | |
| 4 | | 418.0000 | -80.04 | 6.78 | -73.26 | -13.00 | -60.26 | peak | |
| 5 | | 510.1500 | -80.36 | 8.07 | -72.29 | -13.00 | -59.29 | peak | |
| 6 | | 708.0300 | -81.99 | 13.79 | -68.20 | -13.00 | -55.20 | peak | |

Test Mode: TX Channel Middle-QPSK 10M/1RB

Vertical

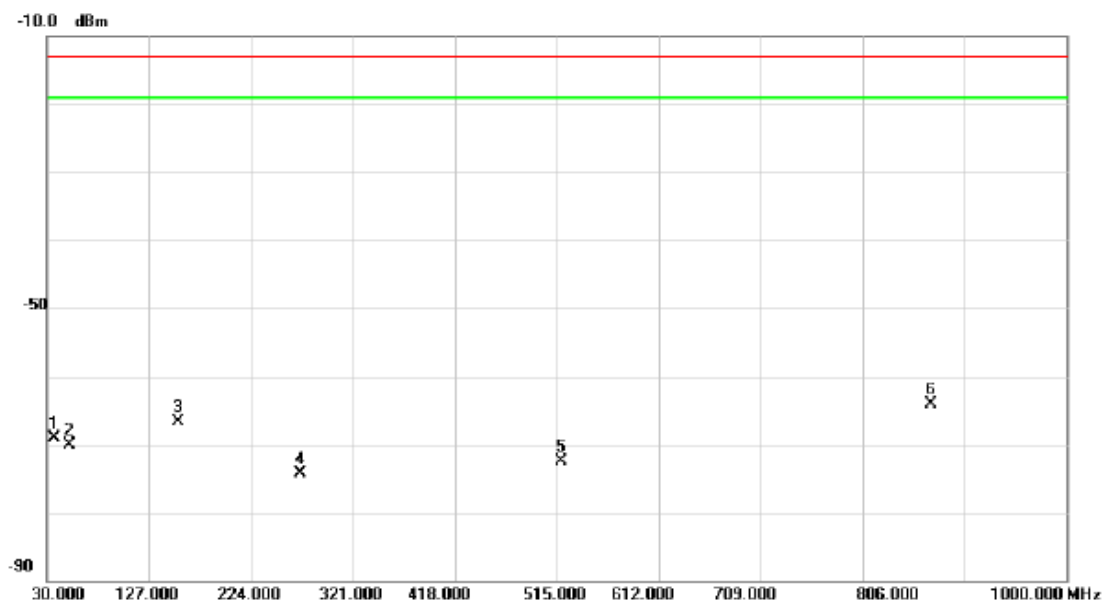

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 36.7900 | -68.82 | -0.18 | -69.00 | -13.00 | -56.00 | peak | |
| 2 | | 51.3400 | -71.21 | 1.17 | -70.04 | -13.00 | -57.04 | peak | |
| 3 | | 154.1600 | -69.77 | 3.16 | -66.61 | -13.00 | -53.61 | peak | |
| 4 | | 270.5600 | -76.49 | 2.22 | -74.27 | -13.00 | -61.27 | peak | |
| 5 | | 519.8500 | -80.08 | 7.51 | -72.57 | -13.00 | -59.57 | peak | |
| 6 | * | 870.9900 | -77.81 | 13.72 | -64.09 | -13.00 | -51.09 | peak | |

Test Mode: TX Channel Middle-QPSK 10M/1RB

Horizontal



| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 83.3500 | -60.54 | -7.76 | -68.30 | -13.00 | -55.30 | peak | |
| 2 | * | 153.1900 | -66.11 | 3.76 | -62.35 | -13.00 | -49.35 | peak | |
| 3 | | 250.1900 | -70.03 | 1.87 | -68.16 | -13.00 | -55.16 | peak | |
| 4 | | 412.1800 | -79.67 | 6.49 | -73.18 | -13.00 | -60.18 | peak | |
| 5 | | 565.4400 | -80.29 | 8.42 | -71.87 | -13.00 | -58.87 | peak | |
| 6 | | 695.4200 | -82.18 | 13.67 | -68.51 | -13.00 | -55.51 | peak | |

Test Mode: TX Channel Middle-QPSK 15M/1RB


Vertical



| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 35.8200 | -67.99 | -0.88 | -68.87 | -13.00 | -55.87 | peak | |
| 2 | | 53.2800 | -72.23 | 1.99 | -70.24 | -13.00 | -57.24 | peak | |
| 3 | | 92.0800 | -66.91 | -3.93 | -70.84 | -13.00 | -57.84 | peak | |
| 4 | | 154.1600 | -70.31 | 3.16 | -67.15 | -13.00 | -54.15 | peak | |
| 5 | | 551.8600 | -79.87 | 7.50 | -72.37 | -13.00 | -59.37 | peak | |
| 6 | * | 870.9900 | -79.39 | 13.72 | -65.67 | -13.00 | -52.67 | peak | |

Test Mode: TX Channel Middle-QPSK 15M/1RB

Horizontal

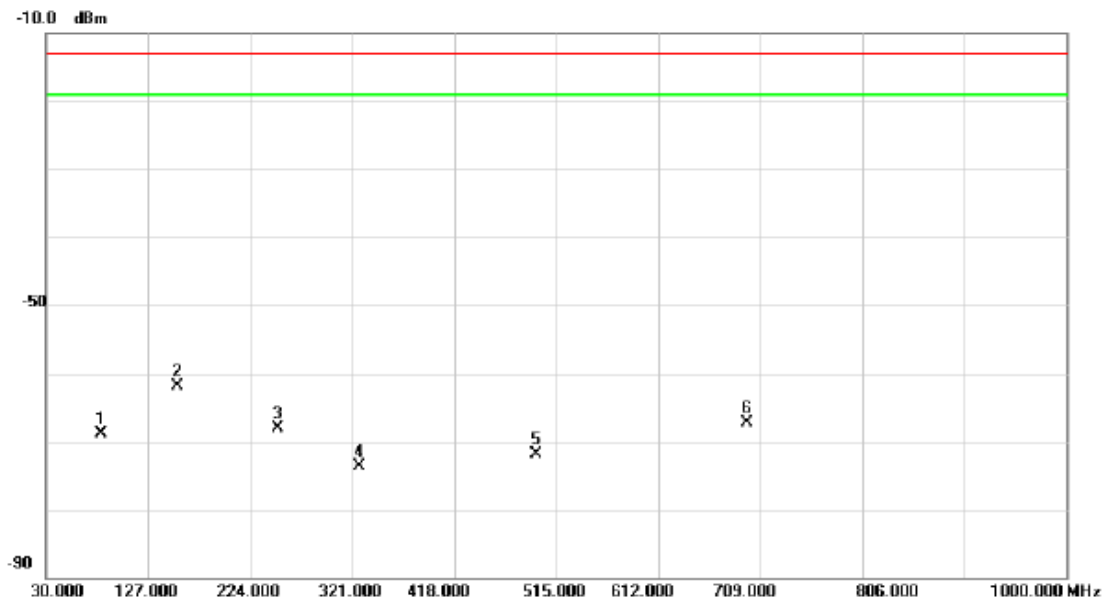

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 82.3800 | -61.22 | -7.64 | -68.86 | -13.00 | -55.86 | peak | |
| 2 | * | 154.1600 | -65.58 | 3.62 | -61.96 | -13.00 | -48.96 | peak | |
| 3 | | 250.1900 | -70.00 | 1.87 | -68.13 | -13.00 | -55.13 | peak | |
| 4 | | 327.7900 | -76.11 | 2.38 | -73.73 | -13.00 | -60.73 | peak | |
| 5 | | 496.5700 | -79.78 | 7.81 | -71.97 | -13.00 | -58.97 | peak | |
| 6 | | 696.3900 | -81.05 | 13.73 | -67.32 | -13.00 | -54.32 | peak | |

Test Mode: TX Channel Middle-QPSK 20M/1RB


Vertical



| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 36.7900 | -69.13 | -0.18 | -69.31 | -13.00 | -56.31 | peak | |
| 2 | | 52.3100 | -71.75 | 1.58 | -70.17 | -13.00 | -57.17 | peak | |
| 3 | | 152.2200 | -70.60 | 3.16 | -67.44 | -13.00 | -54.44 | peak | |
| 4 | | 274.4400 | -74.66 | 2.39 | -72.27 | -13.00 | -59.27 | peak | |
| 5 | | 495.6000 | -80.13 | 7.29 | -72.84 | -13.00 | -59.84 | peak | |
| 6 | * | 870.9900 | -79.20 | 13.72 | -65.48 | -13.00 | -52.48 | peak | |

Test Mode: TX Channel Middle-QPSK 20M/1RB


Horizontal

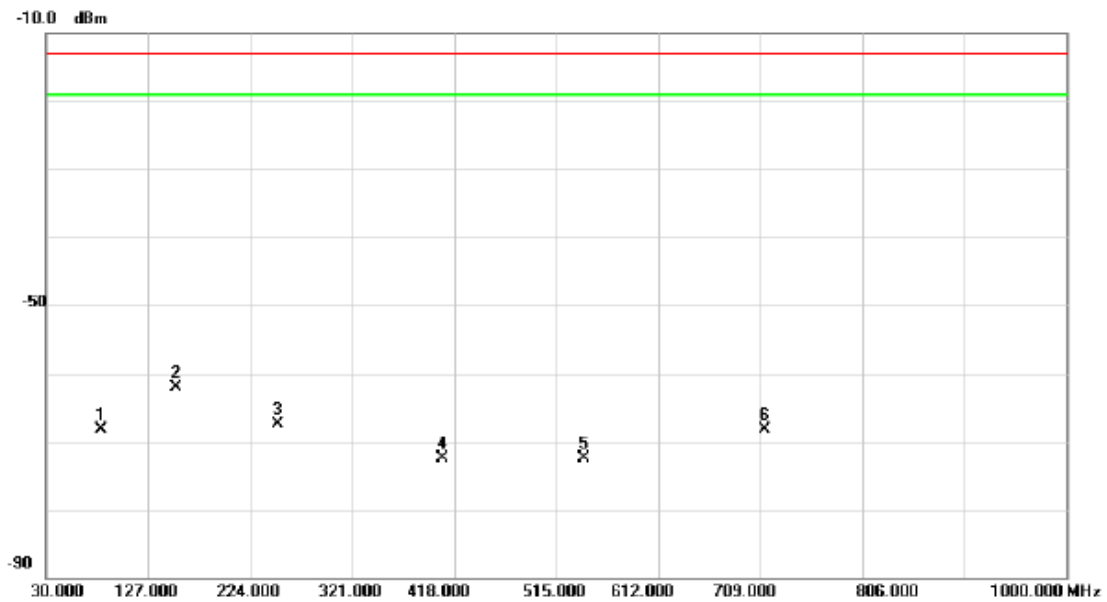

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | | 82.3800 | -60.74 | -7.64 | -68.38 | -13.00 | -55.38 | peak | |
| 2 | * | 153.1900 | -65.93 | 3.76 | -62.17 | -13.00 | -49.17 | peak | |
| 3 | | 250.1900 | -69.27 | 1.87 | -67.40 | -13.00 | -54.40 | peak | |
| 4 | | 407.3300 | -78.71 | 6.25 | -72.46 | -13.00 | -59.46 | peak | |
| 5 | | 541.1900 | -80.66 | 8.09 | -72.57 | -13.00 | -59.57 | peak | |
| 6 | | 712.8800 | -82.00 | 13.67 | -68.33 | -13.00 | -55.33 | peak | |

Test Mode: TX Channel Middle-QPSK 5M/1RB


Vertical

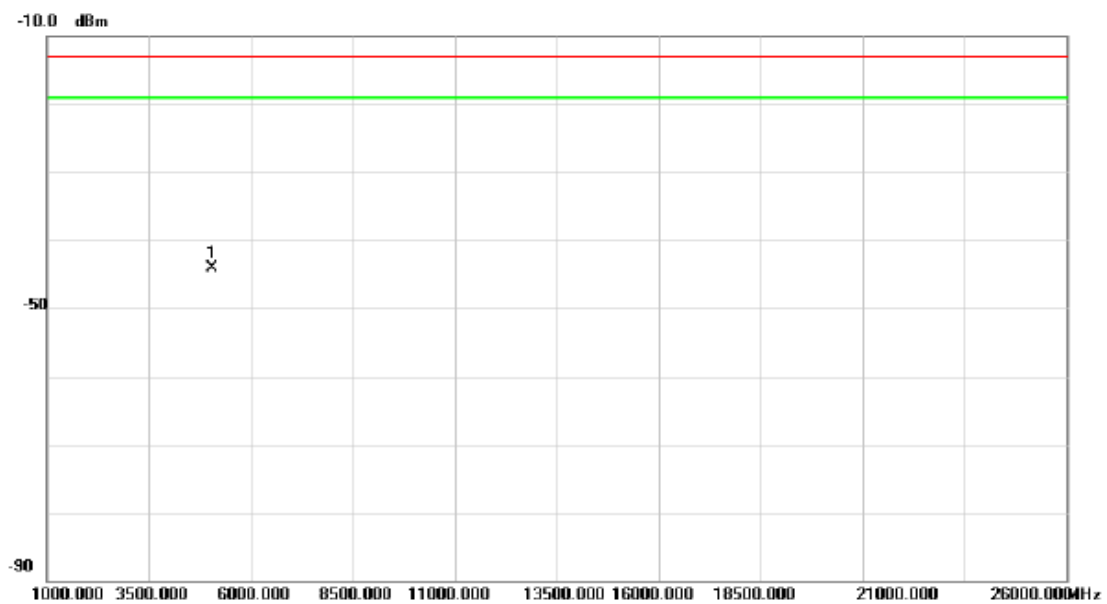

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5066.280 | -58.35 | 14.34 | -44.01 | -13.00 | -31.01 | peak | |

Test Mode: TX Channel Middle-QPSK 5M/1RB


Horizontal

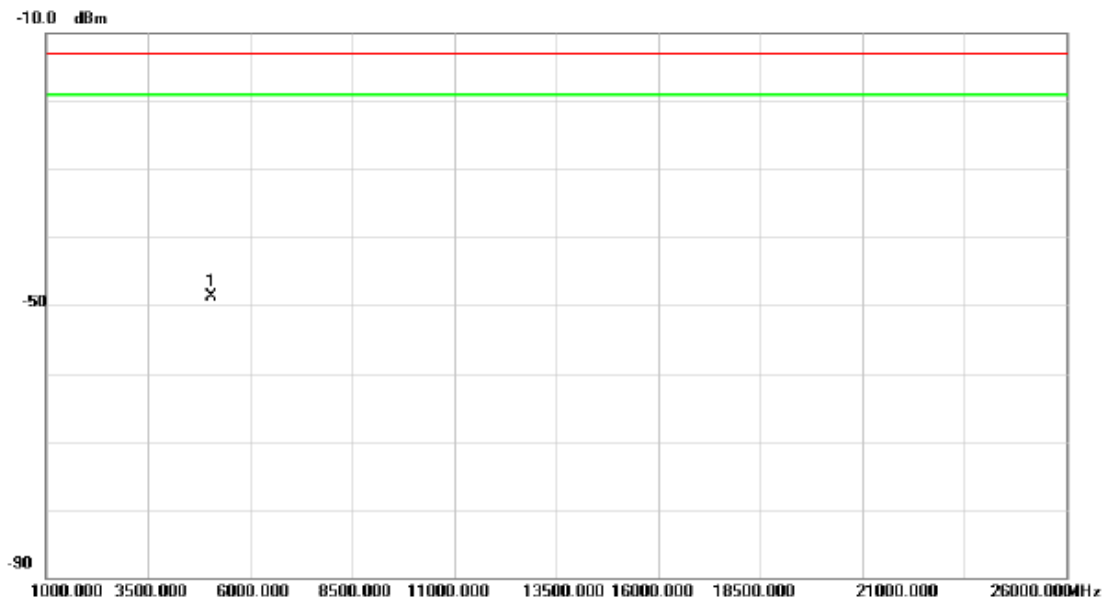

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5065.680 | -58.62 | 9.90 | -48.72 | -13.00 | -35.72 | peak | |

Test Mode: TX Channel Middle-QPSK 10M/1RB


Vertical

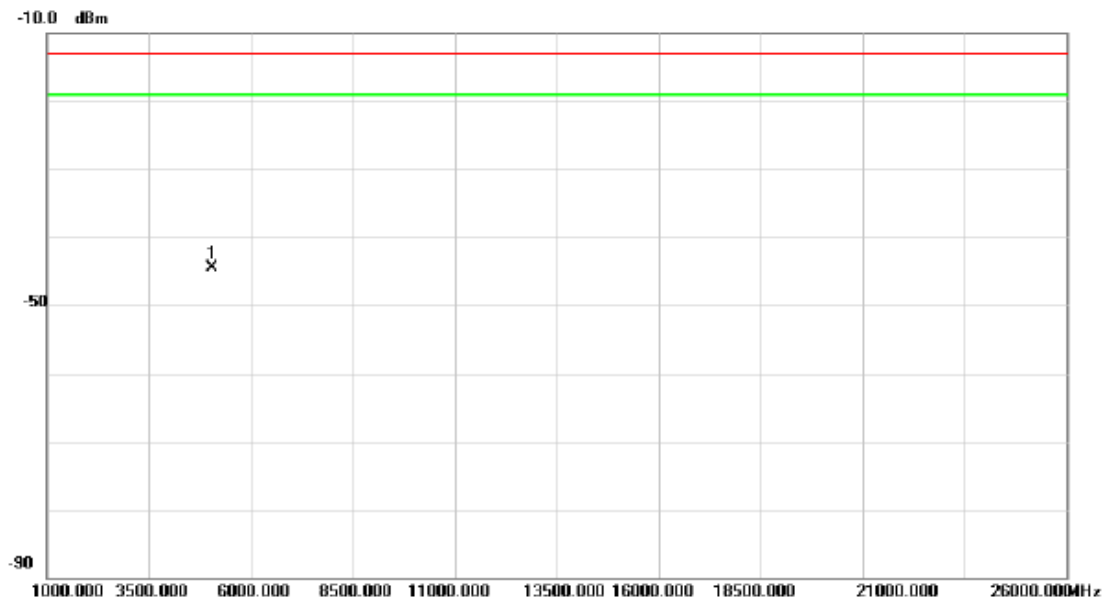

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5062.400 | -58.81 | 14.32 | -44.49 | -13.00 | -31.49 | peak | |

Test Mode: TX Channel Middle-QPSK 10M/1RB


Horizontal

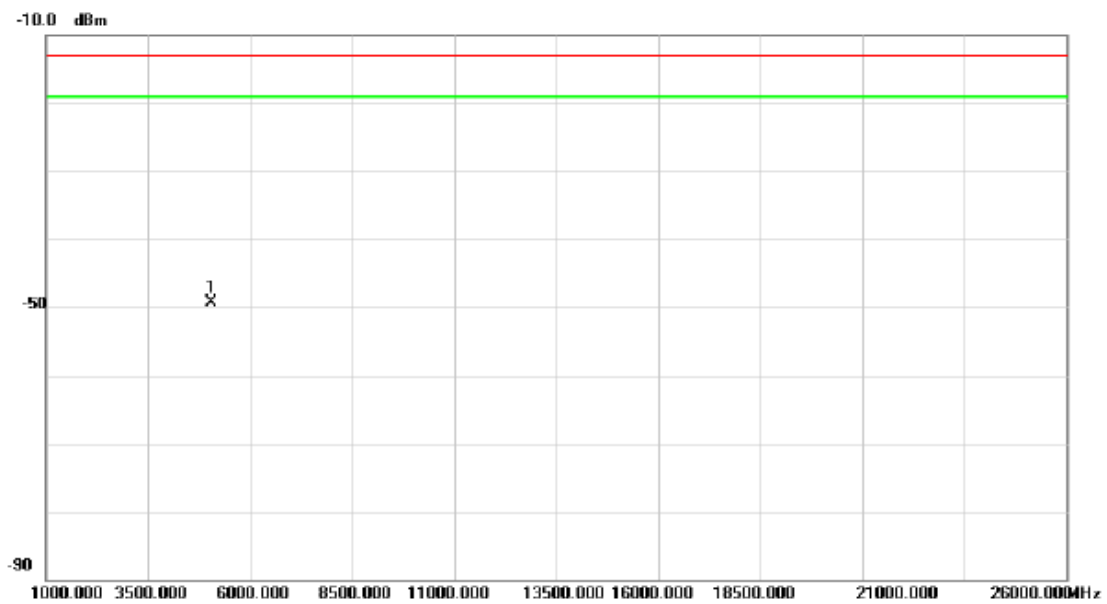

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5061.220 | -59.18 | 9.88 | -49.30 | -13.00 | -36.30 | peak | |

Test Mode: TX Channel Middle-QPSK 15M/1RB


Vertical

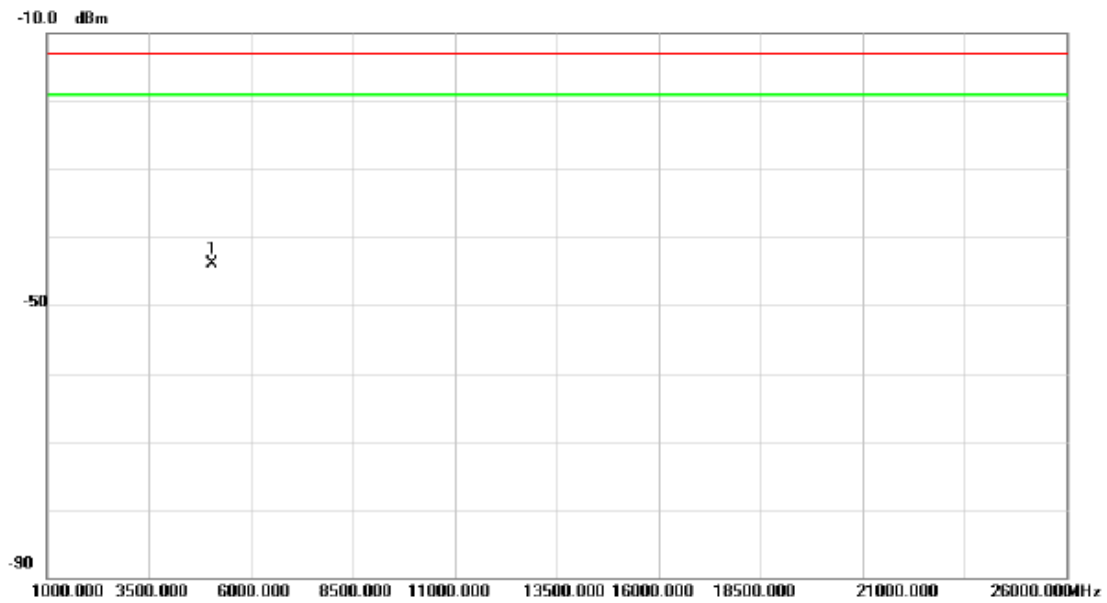

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5056.020 | -58.23 | 14.27 | -43.96 | -13.00 | -30.96 | peak | |

Test Mode: TX Channel Middle-QPSK 15M/1RB


Horizontal

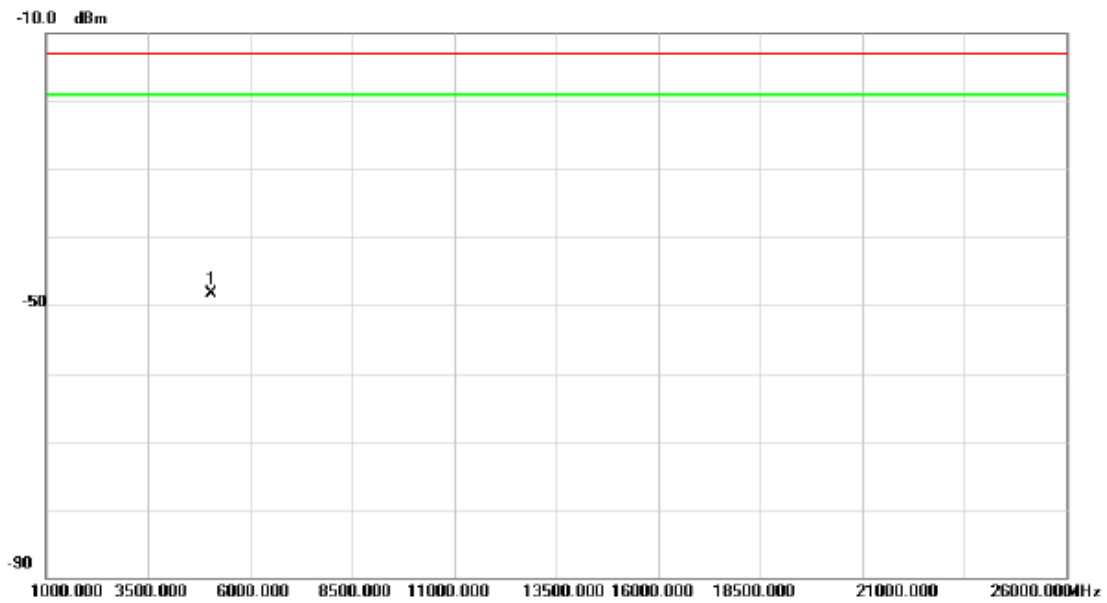

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5057.640 | -58.07 | 9.87 | -48.20 | -13.00 | -35.20 | peak | |

Test Mode: TX Channel Middle-QPSK 20M/1RB


Vertical

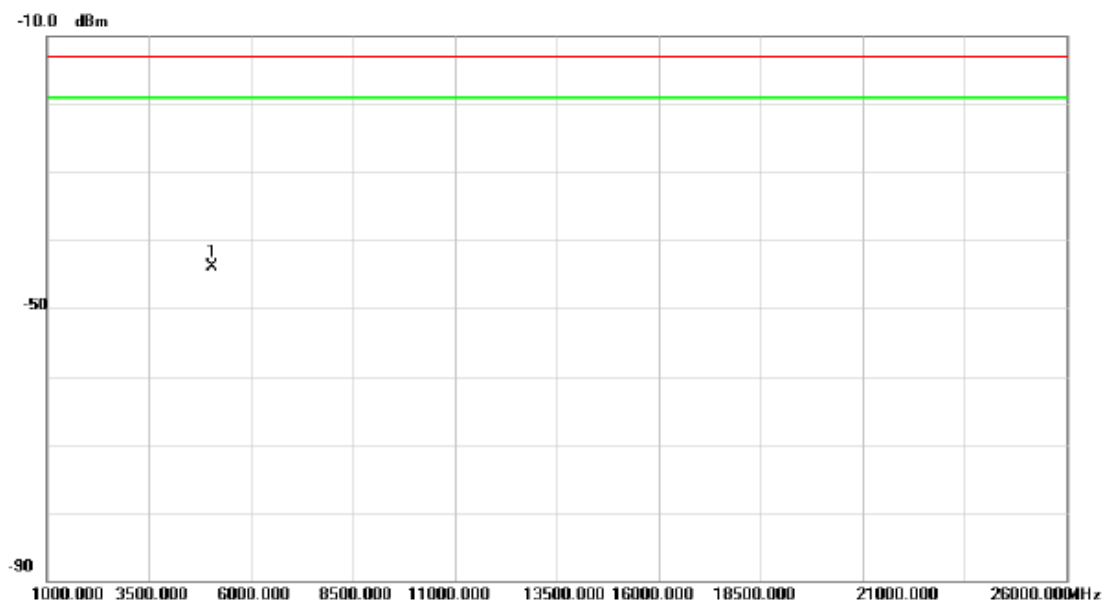

| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5052.400 | -58.13 | 14.25 | -43.88 | -13.00 | -30.88 | peak | |

Test Mode: TX Channel Middle-QPSK 20M/1RB


Horizontal

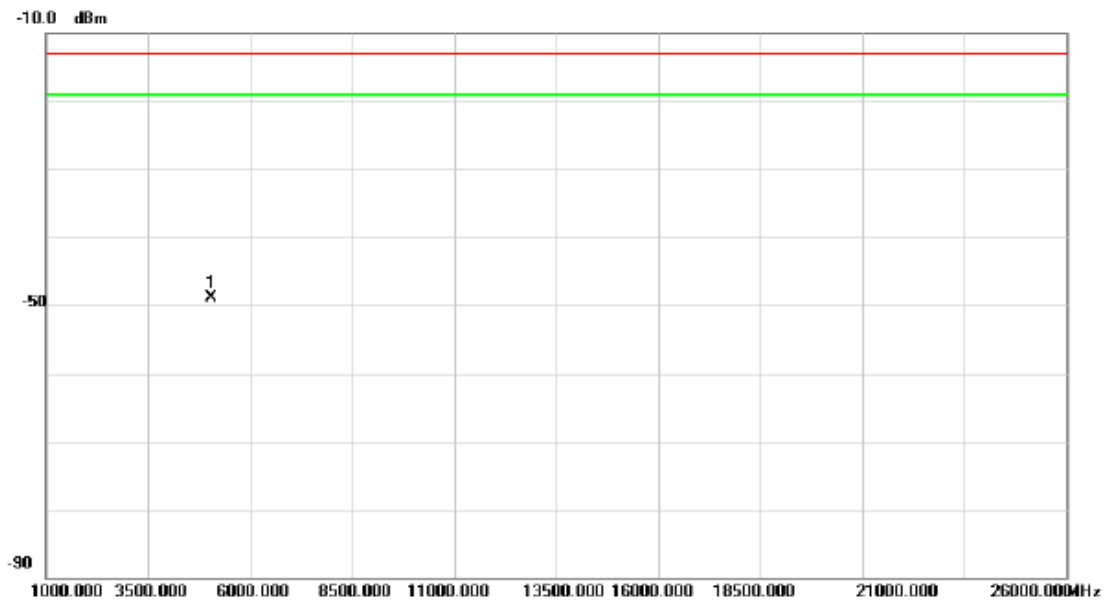


| No. | Mk. | Freq. MHz | Reading Level dBm | Correct Factor dB | Measure- ment dBm | Limit dBm | Margin dB | Detector | Comment |
|-----|-----|--------------|-------------------------|-------------------------|-------------------------|--------------|--------------|----------|---------|
| 1 | * | 5052.200 | -58.71 | 9.85 | -48.86 | -13.00 | -35.86 | peak | |

ATTACHMENTE - BAND EDGE


Band Edge on Configuration QPSK-5M / 1RB Channel Lowest-CONDUCTED MODE

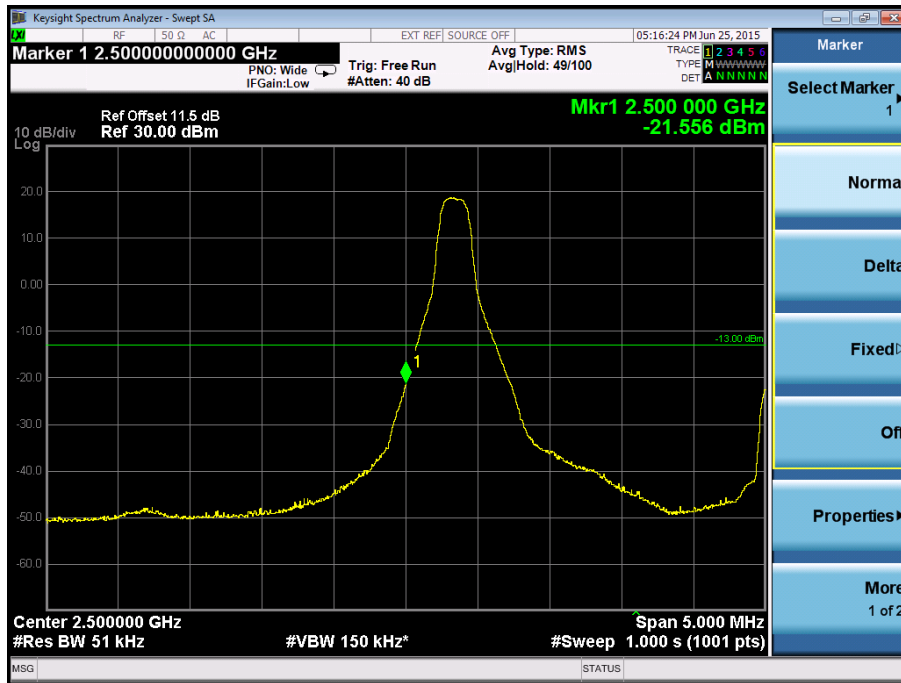


Band Edge on Configuration QPSK-5M / 1RB Channel Highest-CONDUCTED MODE

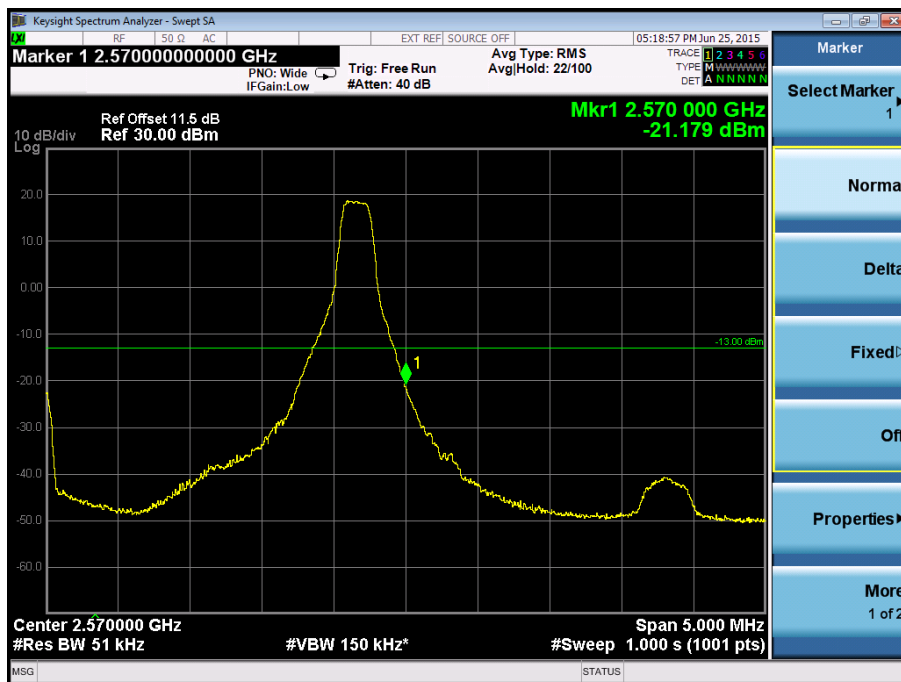


Band Edge on Configuration QPSK-5M / 25RB Channel Lowest-CONDUCTED MODE

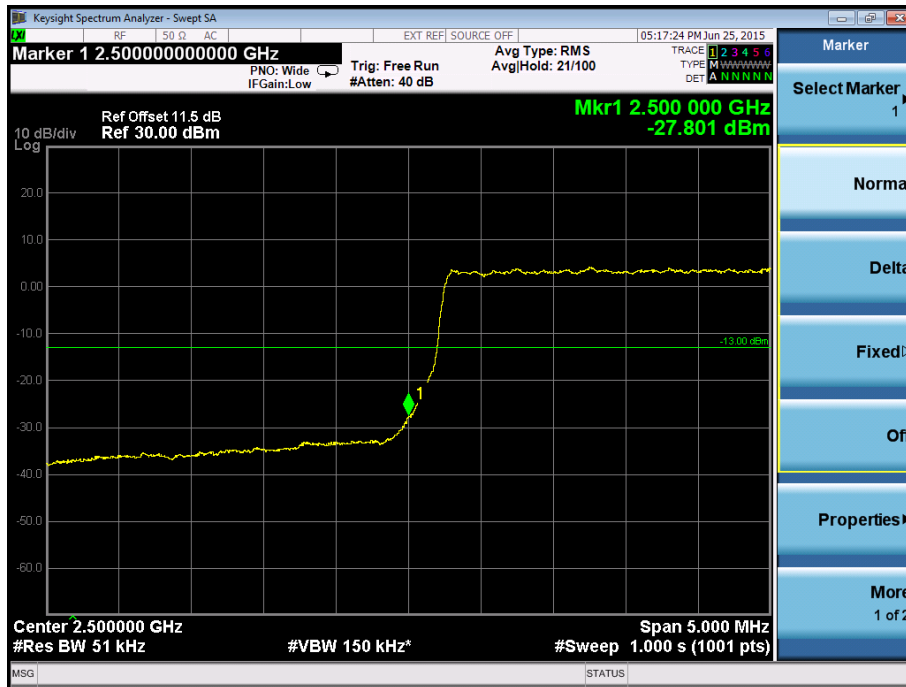


Band Edge on Configuration QPSK-5M / 25RB Channel Highest-CONDUCTED MODE

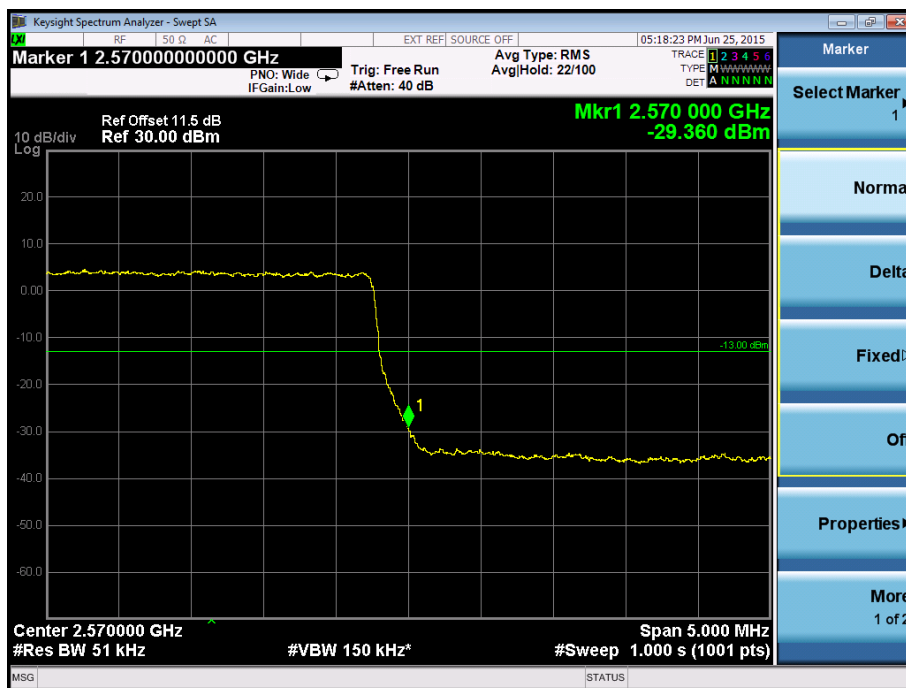


Band Edge on Configuration QPSK-10M / 1RB Channel Lowest-CONDUCTED MODE

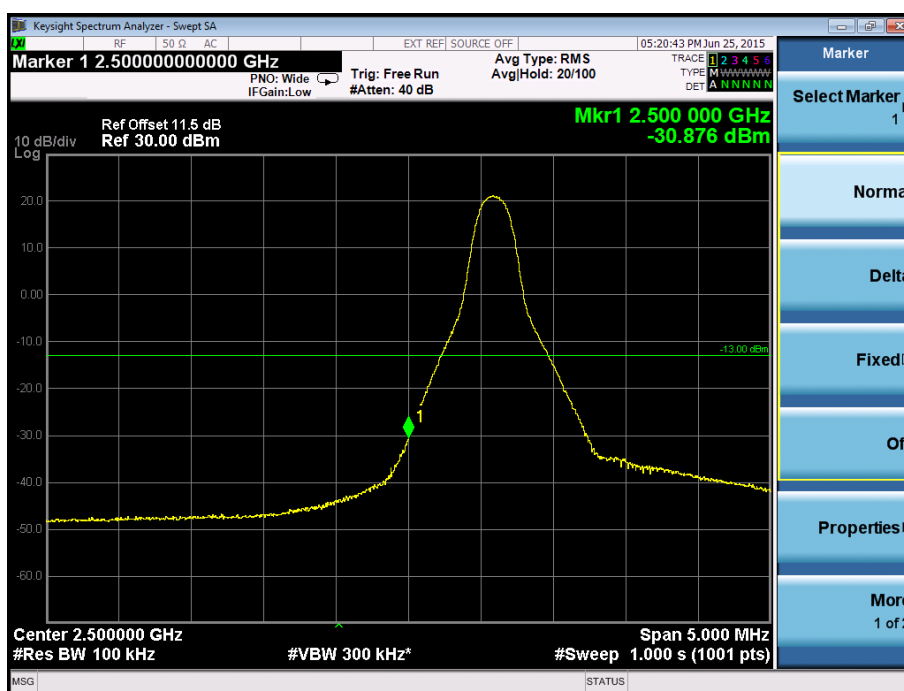

Band Edge on Configuration QPSK-10M / 1RB Channel Highest-CONDUCTED MODE

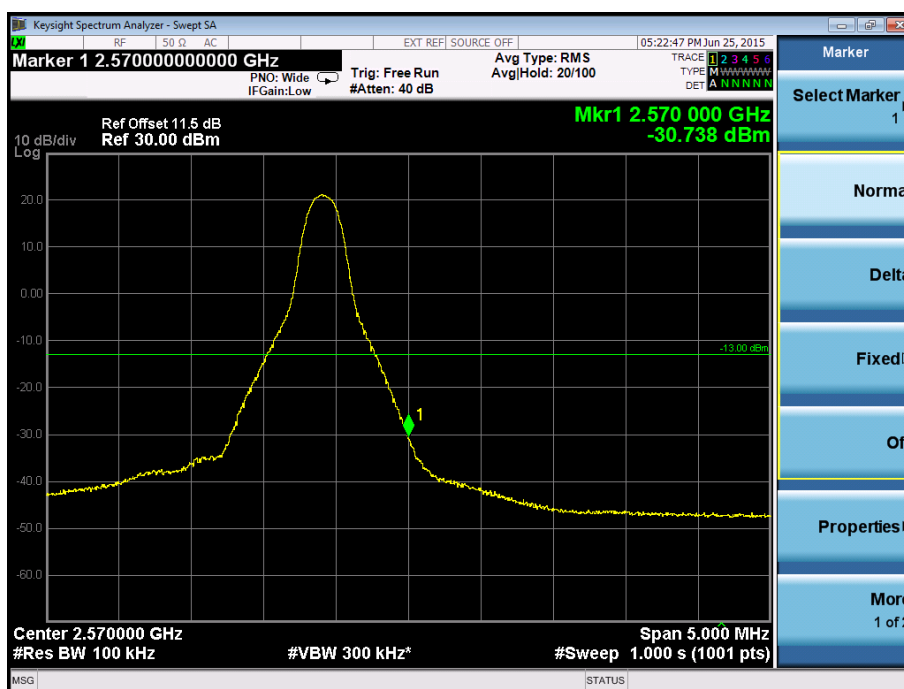


Band Edge on Configuration QPSK-10M / 50RB Channel Lowest-CONDUCTED MODE

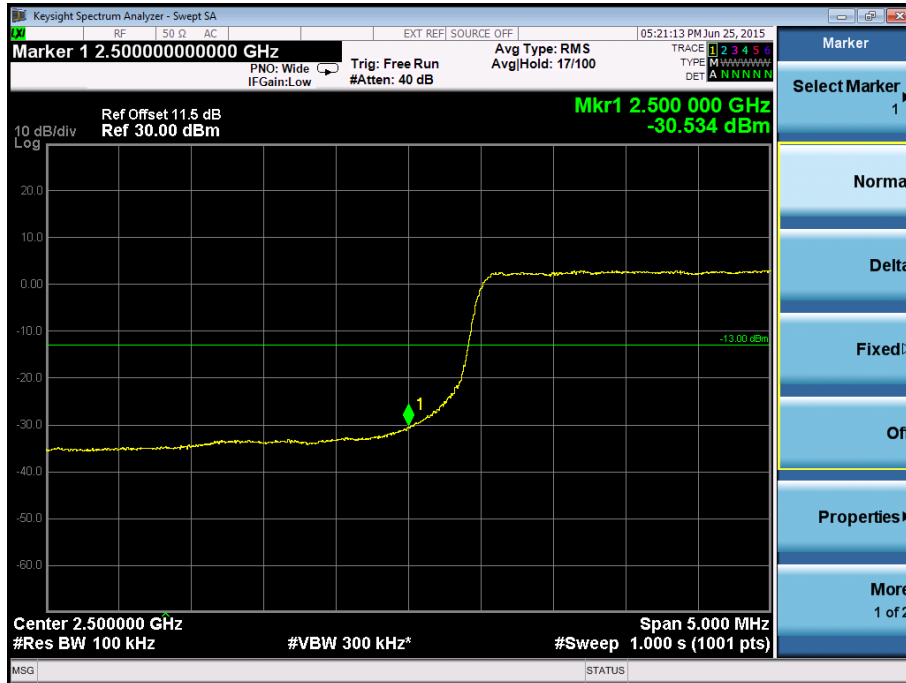


Band Edge on Configuration QPSK-10M / 50RB Channel Highest-CONDUCTED MODE




Band Edge on Configuration QPSK-15M / 1RB Channel Lowest-CONDUCTED MODE

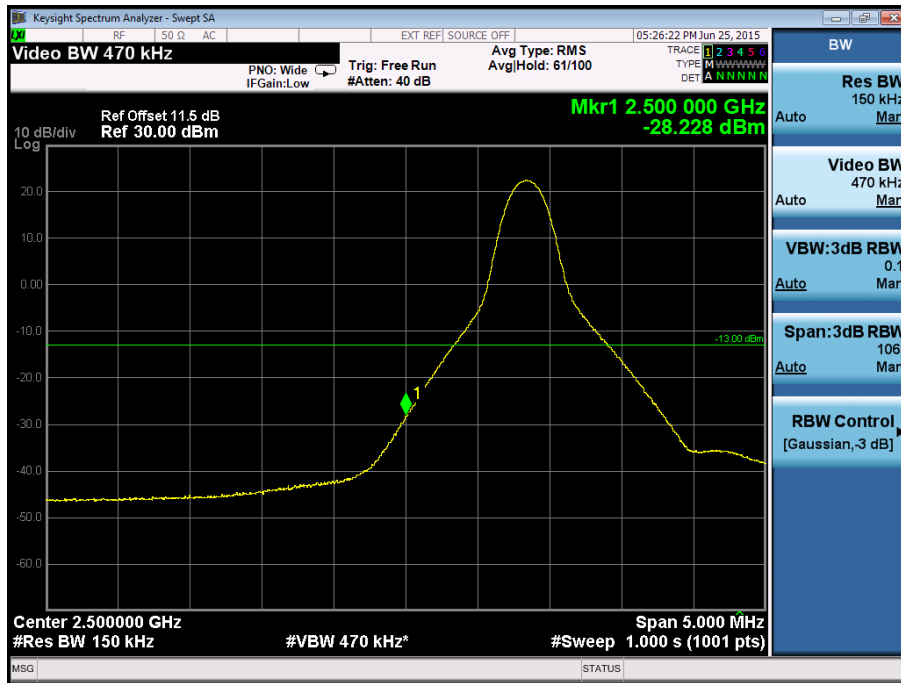

Band Edge on Configuration QPSK-15M / 1RB Channel Highest-CONDUCTED MODE

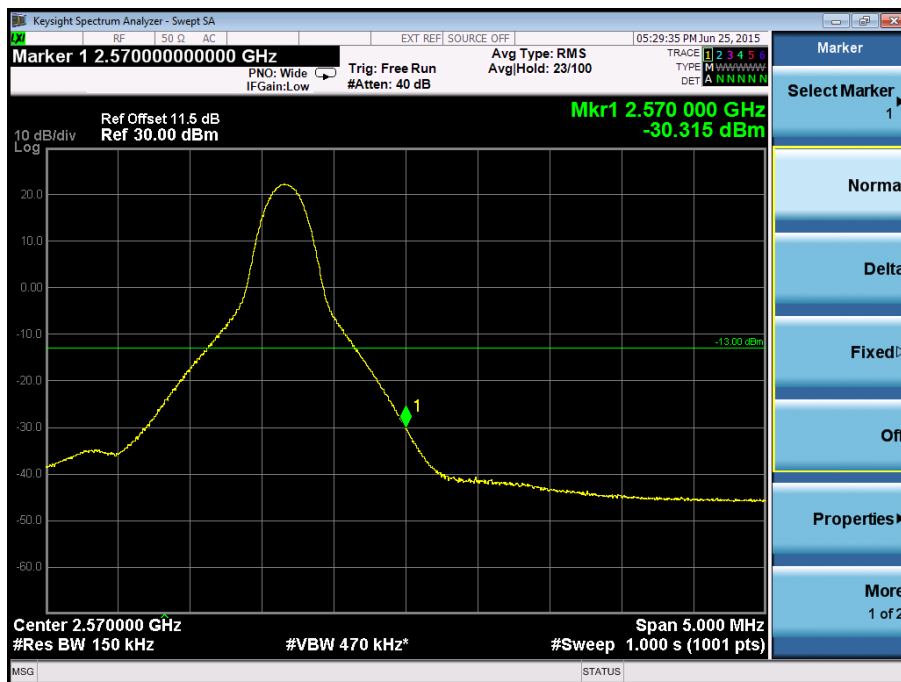


Band Edge on Configuration QPSK-15M / 75RB Channel Lowest-CONDUCTED MODE

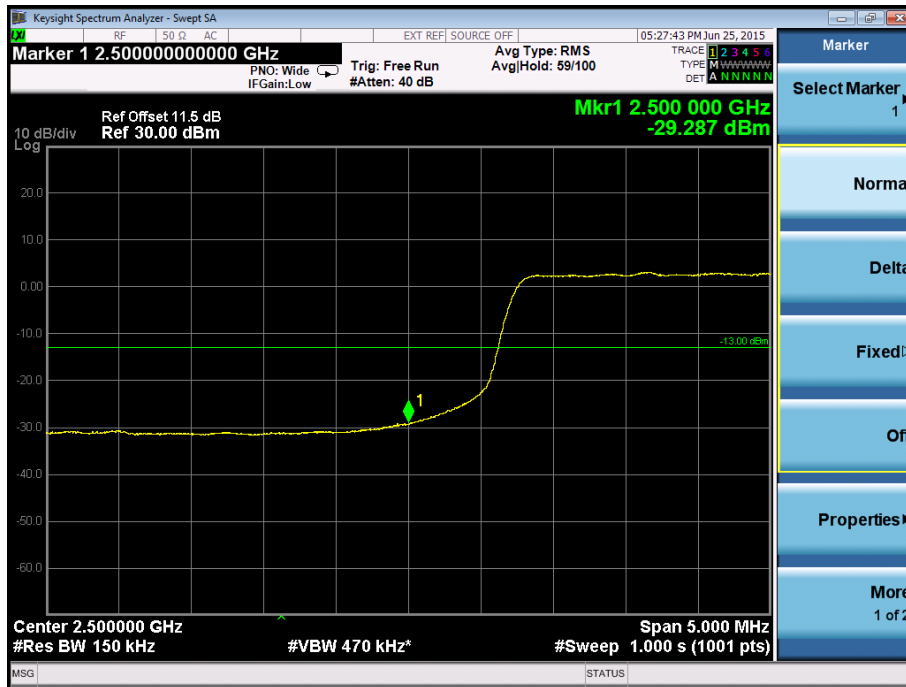


Band Edge on Configuration QPSK-15M / 75RB Channel Highest-CONDUCTED MODE




Band Edge on Configuration QPSK-20M / 1RB Channel Lowest-CONDUCTED MODE

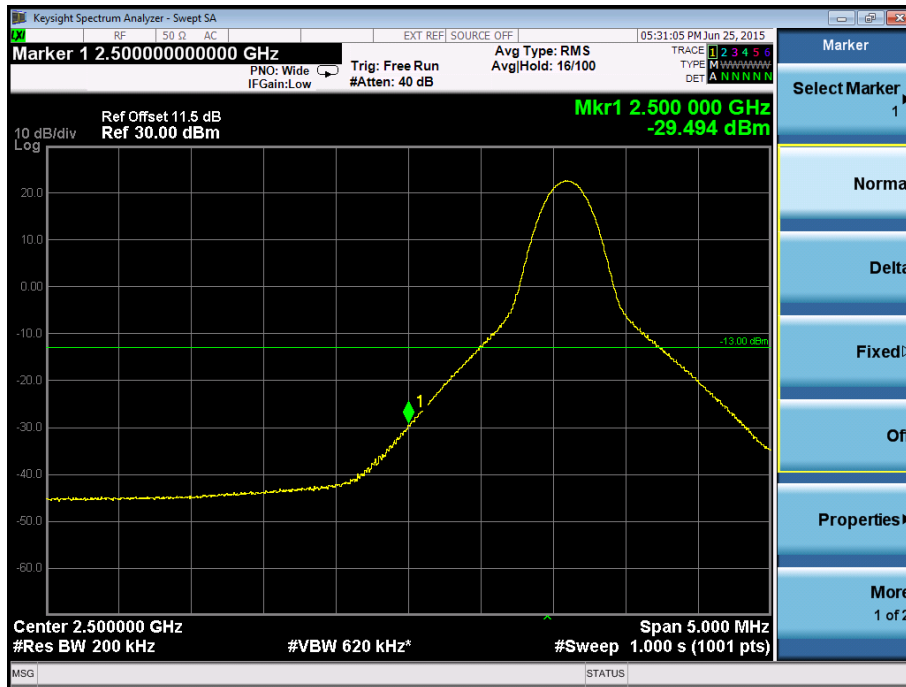

Band Edge on Configuration QPSK-20M / 1RB Channel Highest-CONDUCTED MODE

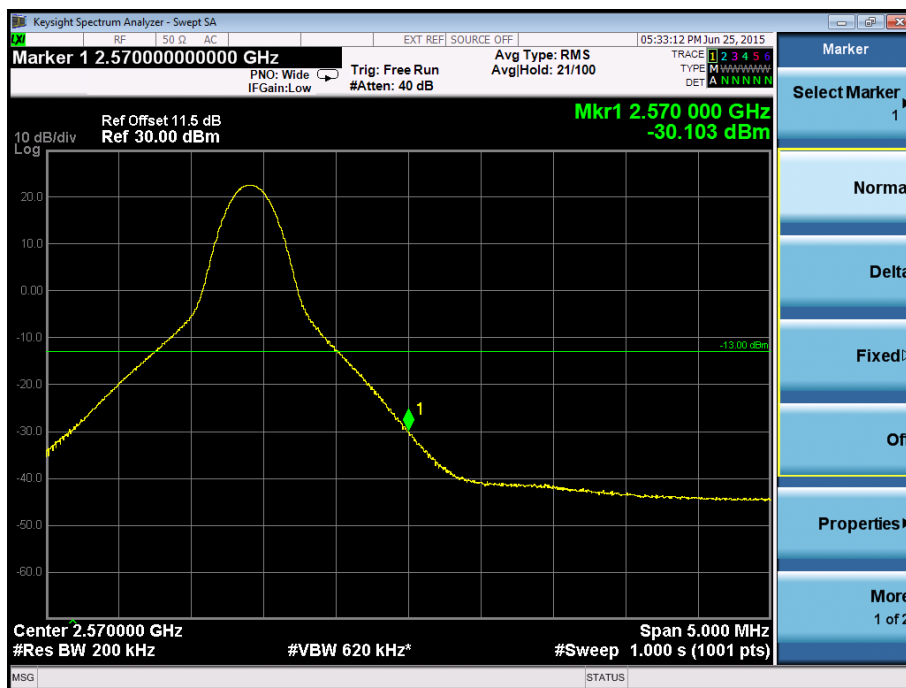

Band Edge on Configuration QPSK-20M / 100RB Channel Lowest-CONDUCTED MODE

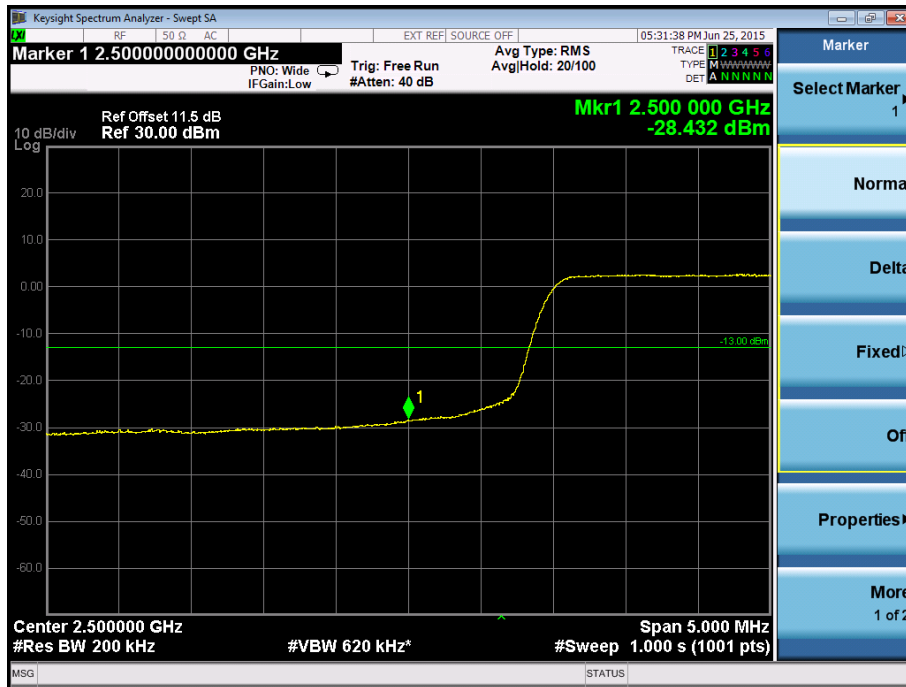

Band Edge on Configuration QPSK-20M / 100RB Channel Highest-CONDUCTED MODE



ATTACHMENTF - FREQUENCY STABILITY

| | |
|------------|------------------------------------|
| Test Mode: | QPSKChannel Middle 5M/1RB 0 offset |
|------------|------------------------------------|

Voltage vs. Frequency Stability

| Temperature(°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| -10 | -2.29 | 0.000903353 | 2.5 |
| 0 | 1.94 | 0.000765286 | 2.5 |
| 10 | 2.30 | 0.000907298 | 2.5 |
| 20 | -4.66 | 0.001838264 | 2.5 |
| 30 | 0.53 | 0.000209073 | 2.5 |
| 40 | -2.83 | 0.001116371 | 2.5 |
| 45 | 1.54 | 0.000607495 | 2.5 |
| Max. Deviation (ppm) | 4.66 | 0.001838264 | 2.5 |

Voltage vs. Frequency Stability

| Voltage(Volts) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| 3.8 | 1.33 | 0.000524655 | 2.5 |
| 3.5 | -4.66 | 0.001838264 | 2.5 |
| 4.35 | 2.84 | 0.001120316 | 2.5 |
| Max. Deviation (ppm) | 4.66 | 0.001838264 | 2.5 |

| | |
|------------|-------------------------------------|
| Test Mode: | QPSKChannel Middle 10M/1RB 0 offset |
|------------|-------------------------------------|

Voltage vs. Frequency Stability

| Temperature(°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| -10 | -4.36 | 0.001719921 | 2.5 |
| 0 | 1.05 | 0.000414201 | 2.5 |
| 10 | -2.84 | 0.001120316 | 2.5 |
| 20 | -1.93 | 0.000761341 | 2.5 |
| 30 | -2.28 | 0.000899408 | 2.5 |
| 40 | 1.57 | 0.000619329 | 2.5 |
| 45 | -2.20 | 0.00086785 | 2.5 |
| Max. Deviation (ppm) | 1.57 | 0.001719921 | 2.5 |

Voltage vs. Frequency Stability

| Voltage(Volts) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| 3.8 | -3.68 | 0.001451677 | 2.5 |
| 3.5 | -4.43 | 0.001747535 | 2.5 |
| 4.35 | 1.25 | 0.000493097 | 2.5 |
| Max. Deviation (ppm) | 4.43 | 0.001747535 | 2.5 |

| | |
|------------|-------------------------------------|
| Test Mode: | QPSKChannel Middle 15M/1RB 0 offset |
|------------|-------------------------------------|

Voltage vs. Frequency Stability

| Temperature(°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| -10 | -1.75 | 0.000690335 | 2.5 |
| 0 | 0.69 | 0.000272189 | 2.5 |
| 10 | 1.48 | 0.000583826 | 2.5 |
| 20 | -4.56 | 0.001798817 | 2.5 |
| 30 | -3.17 | 0.001250493 | 2.5 |
| 40 | -2.88 | 0.001136095 | 2.5 |
| 45 | 1.26 | 0.000497041 | 2.5 |
| Max. Deviation (ppm) | 4.56 | 0.001798817 | 2.5 |

Voltage vs. Frequency Stability

| Voltage(Volts) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| 3.8 | -2.89 | 0.001140039 | 2.5 |
| 3.5 | -1.63 | 0.000642998 | 2.5 |
| 4.35 | 0.95 | 0.000374753 | 2.5 |
| Max. Deviation (ppm) | 2.89 | 0.001140039 | 2.5 |

| | |
|------------|-------------------------------------|
| Test Mode: | QPSKChannel Middle 20M/1RB 0 offset |
|------------|-------------------------------------|

Voltage vs. Frequency Stability


| Temperature(°C) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| -10 | -4.58 | 0.001806706 | 2.5 |
| 0 | 0.66 | 0.000260355 | 2.5 |
| 10 | -2.53 | 0.000998028 | 2.5 |
| 20 | 1.42 | 0.000560158 | 2.5 |
| 30 | -4.35 | 0.001715976 | 2.5 |
| 40 | -1.93 | 0.000761341 | 2.5 |
| 45 | 1.67 | 0.000658777 | 2.5 |
| Max. Deviation (ppm) | 8.56 | 0.012056338 | 2.5 |

Voltage vs. Frequency Stability


| Voltage(Volts) | Frequency Error (Hz) | Frequency Error (ppm) | Limit(ppm) |
|----------------------|----------------------|-----------------------|------------|
| 3.8 | 0.93 | 0.000366864 | 2.5 |
| 3.5 | -3.67 | 0.001447732 | 2.5 |
| 4.35 | -4.84 | 0.00190927 | 2.5 |
| Max. Deviation (ppm) | 4.84 | 0.00190927 | 2.5 |

ATTACHMENTG - PEAK TO AVERAGE RATIO


Peak to Average Ratio of Configuration-QPSK-5M/1RB channel Lowest

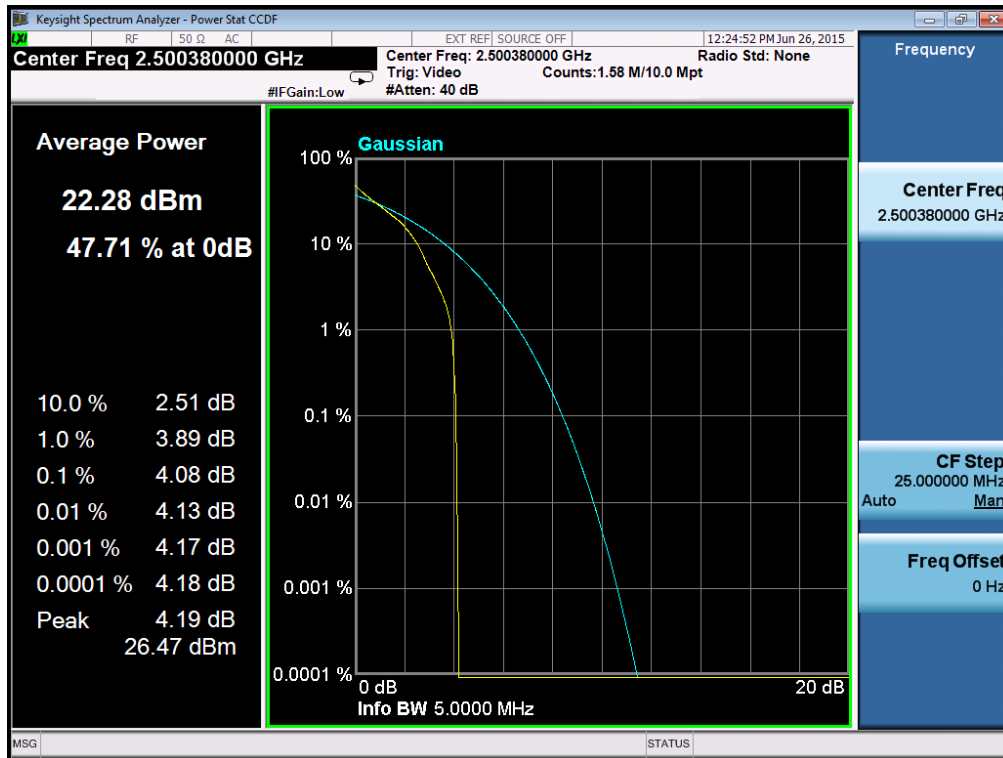


Peak to Average Ratio of Configuration-QPSK-5M/1RB channel Middle

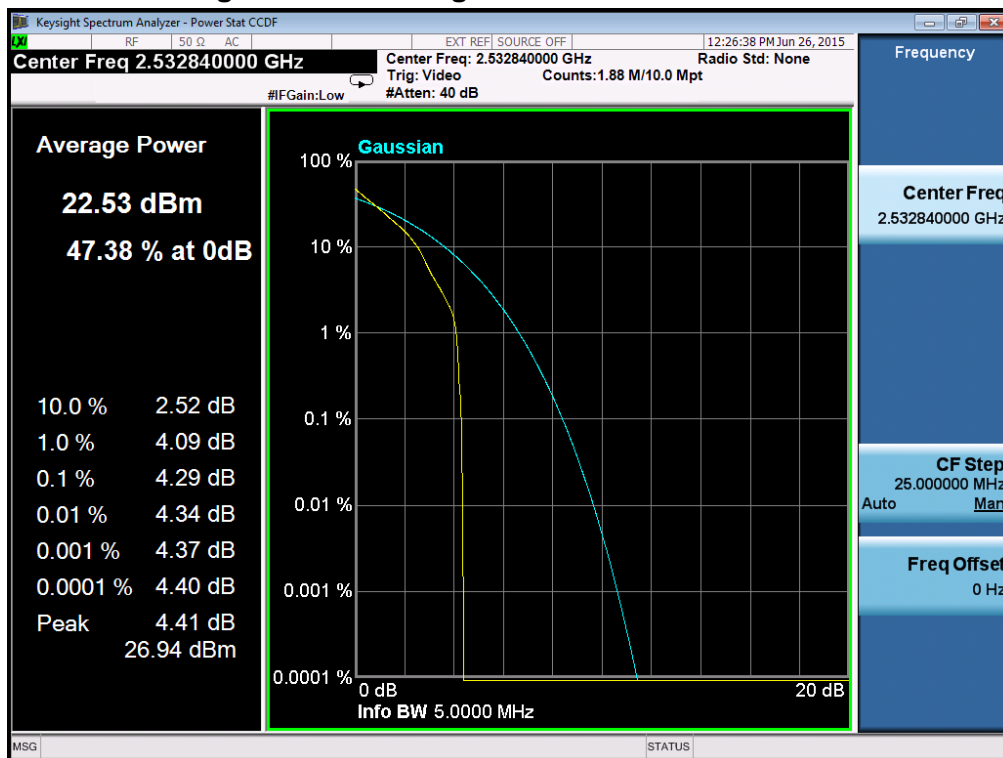


Peak to Average Ratio of Configuration-QPSK-5M/1RB channel Highest

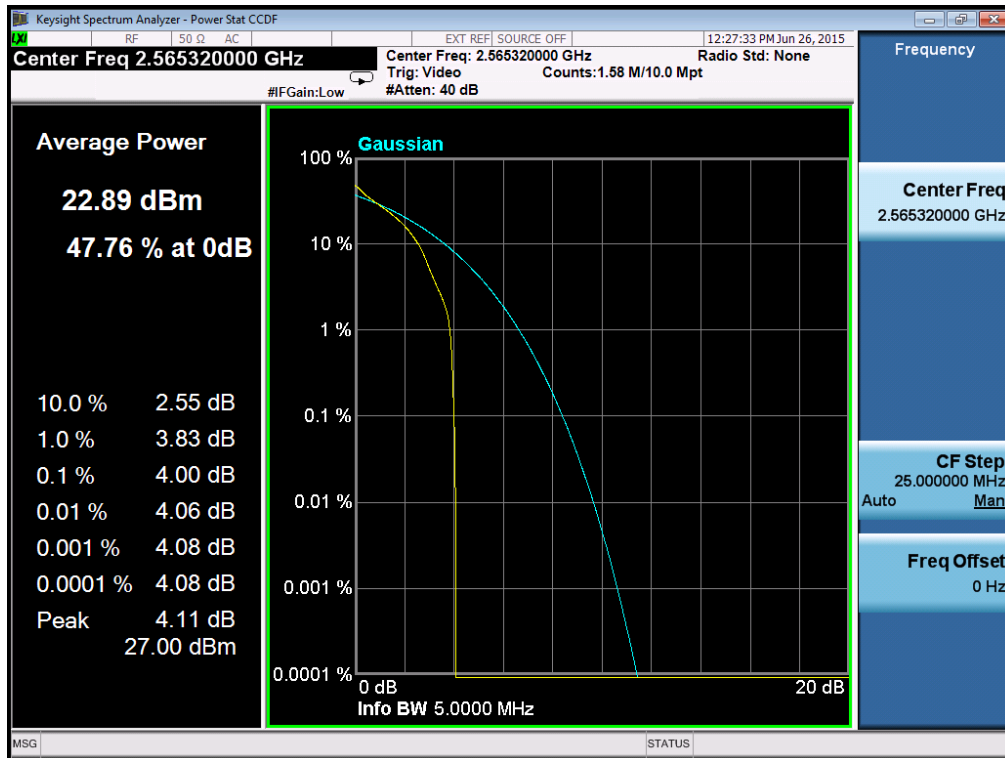


Peak to Average Ratio of Configuration-QPSK-10M/1RB channel Lowest

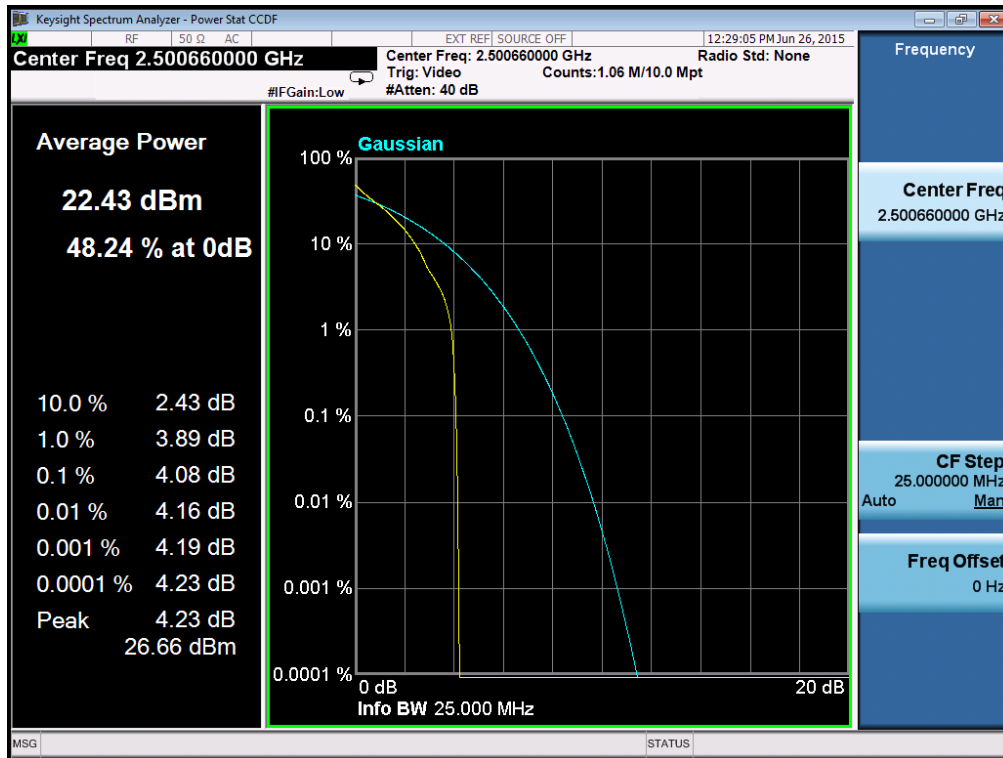


Peak to Average Ratio of Configuration-QPSK-10M/1RB channel Middle

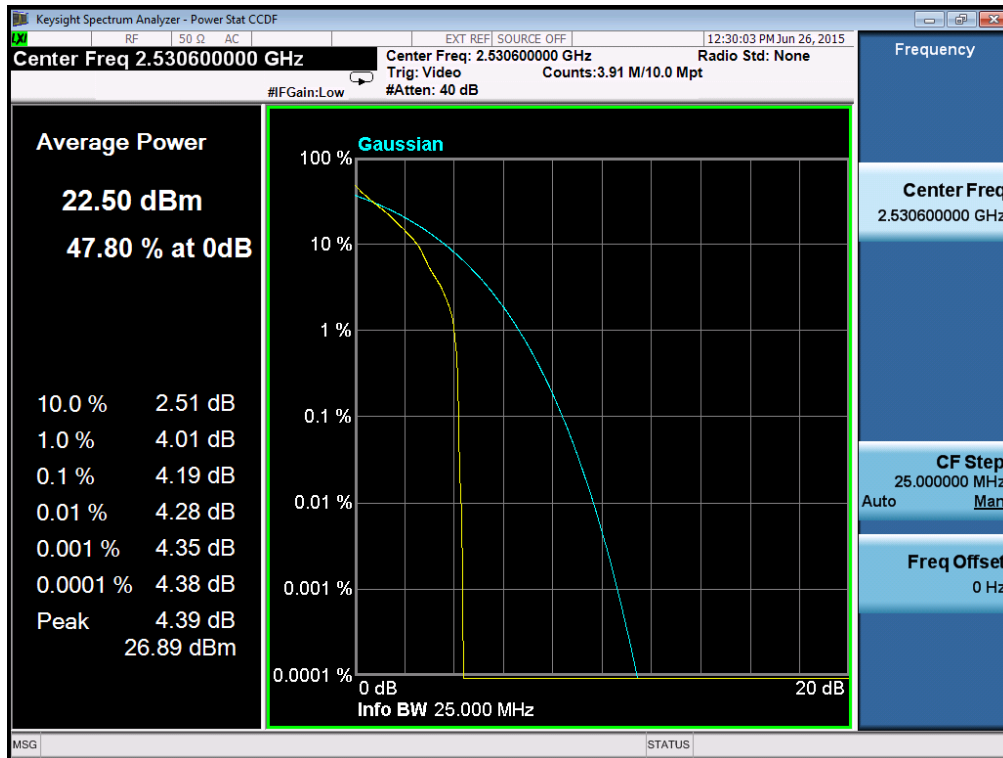


Peak to Average Ratio of Configuration-QPSK-10M/1RB channel Highest

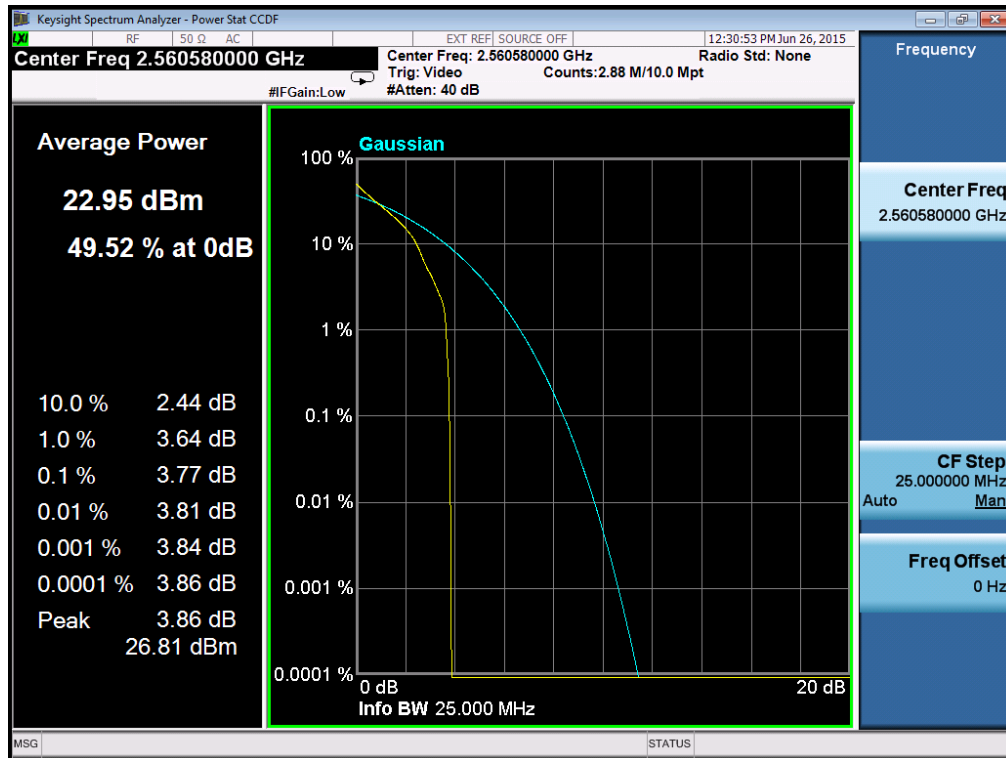


Peak to Average Ratio of Configuration-QPSK-15M/1RB channel Lowest

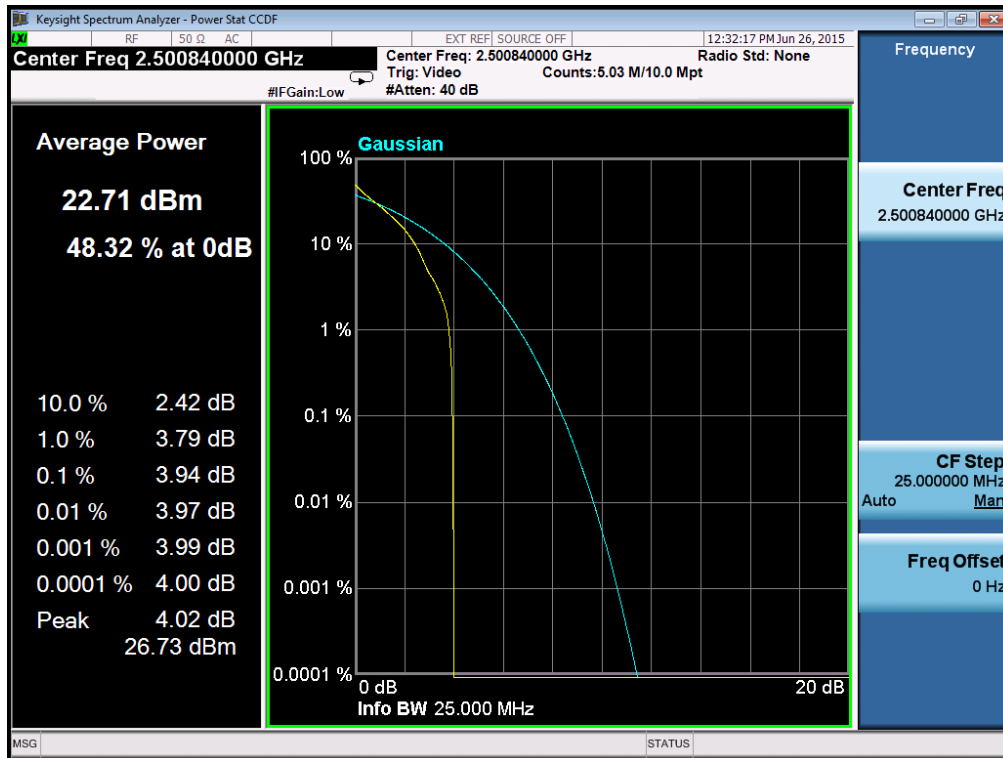


Peak to Average Ratio of Configuration-QPSK-15M/1RB channel Middle

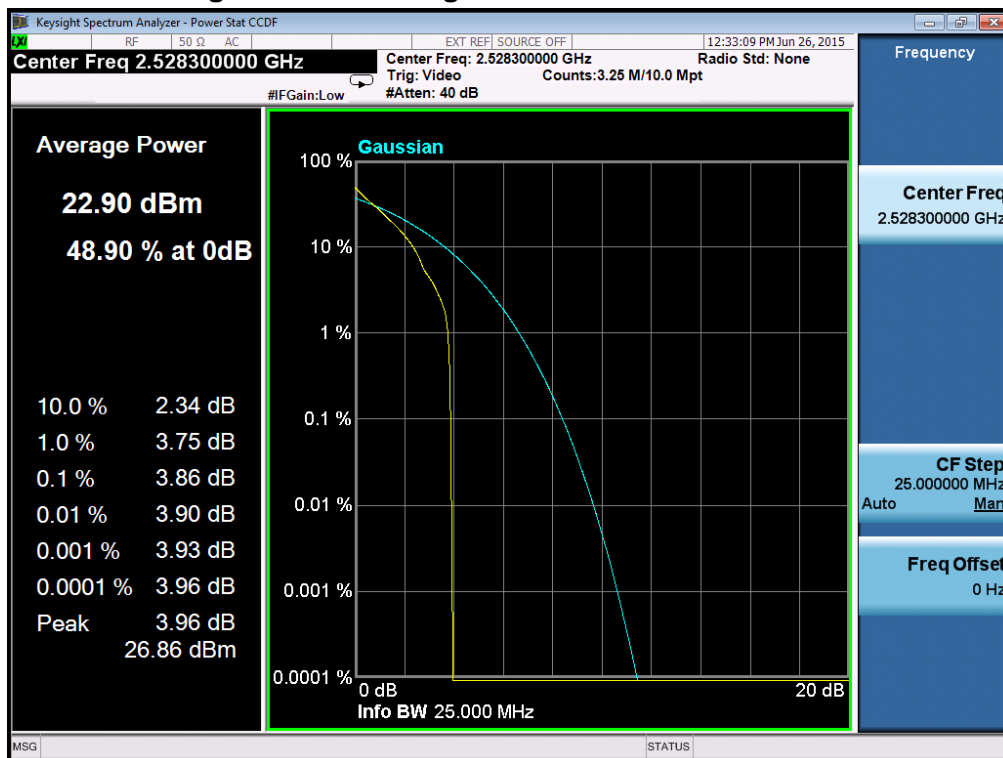


Peak to Average Ratio of Configuration-QPSK-15M/1RB channel Highest

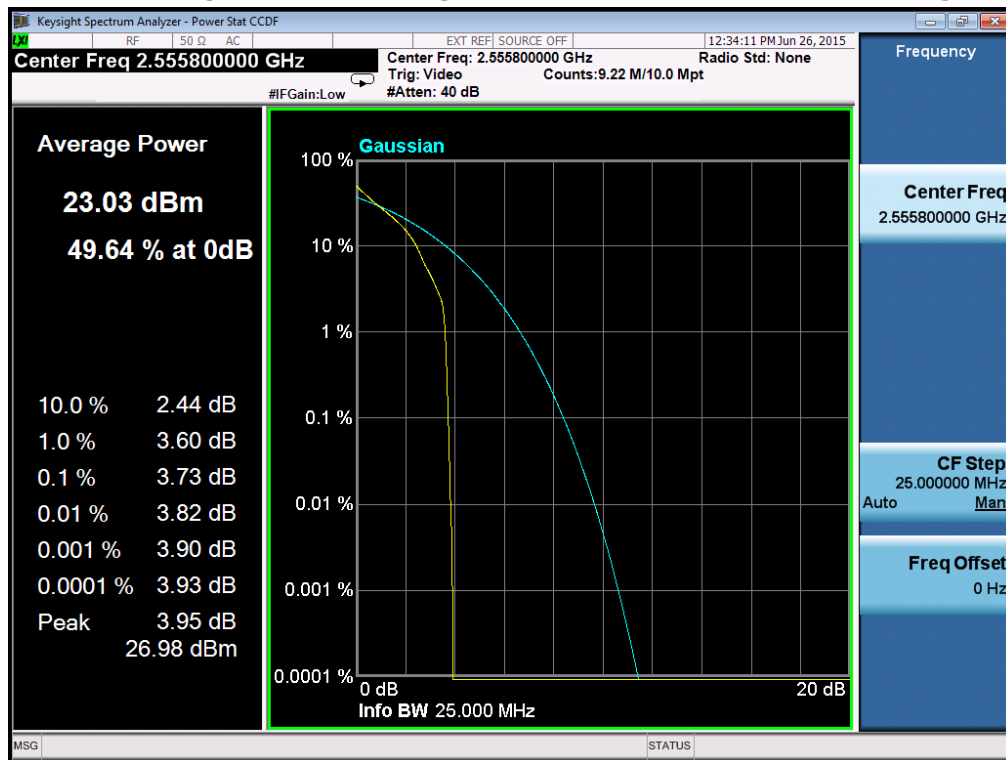


Peak to Average Ratio of Configuration-QPSK-20M/1RB channel Lowest

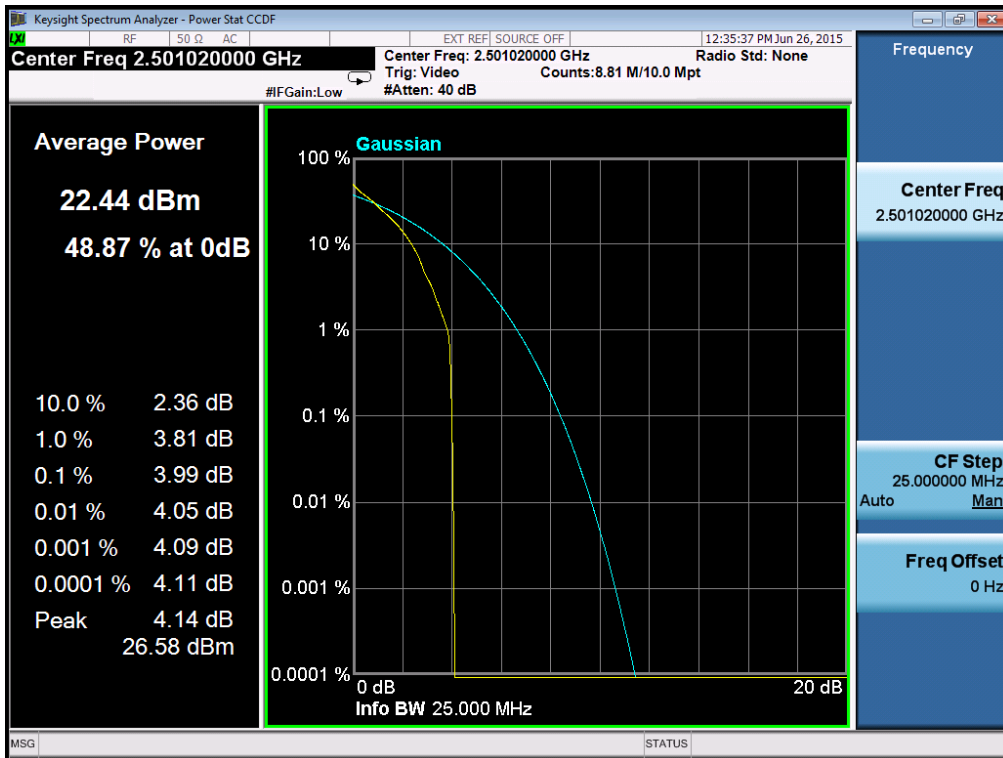


Peak to Average Ratio of Configuration-QPSK-20M/1RB channel Middle

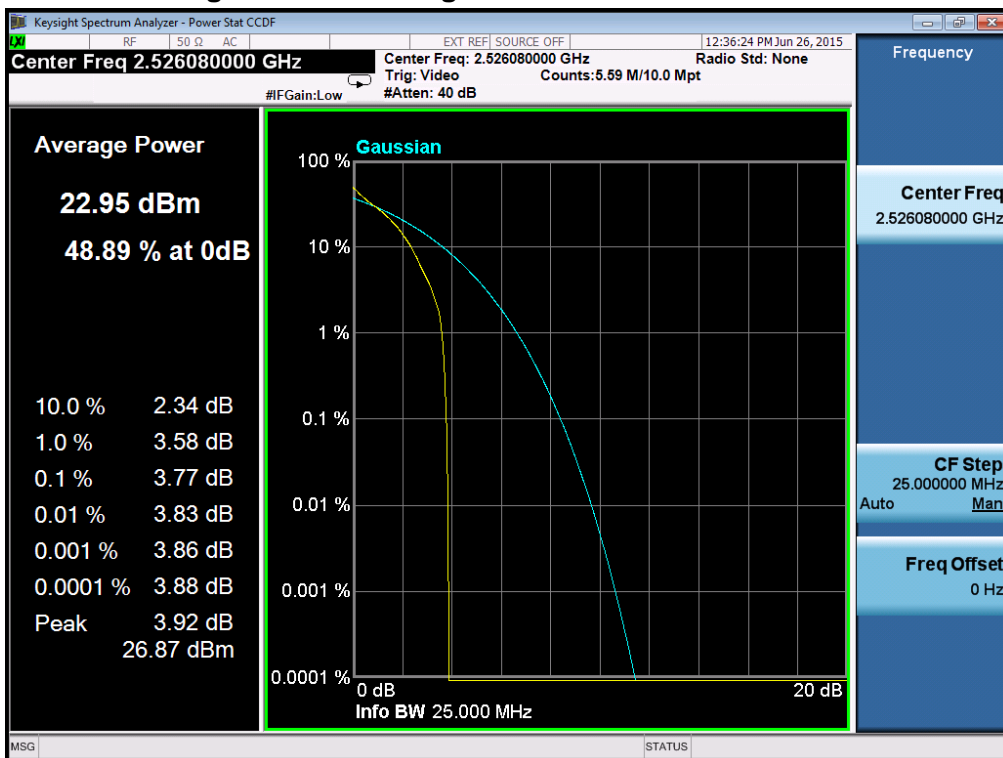


Peak to Average Ratio of Configuration-QPSK-20M/1RB channel Highest

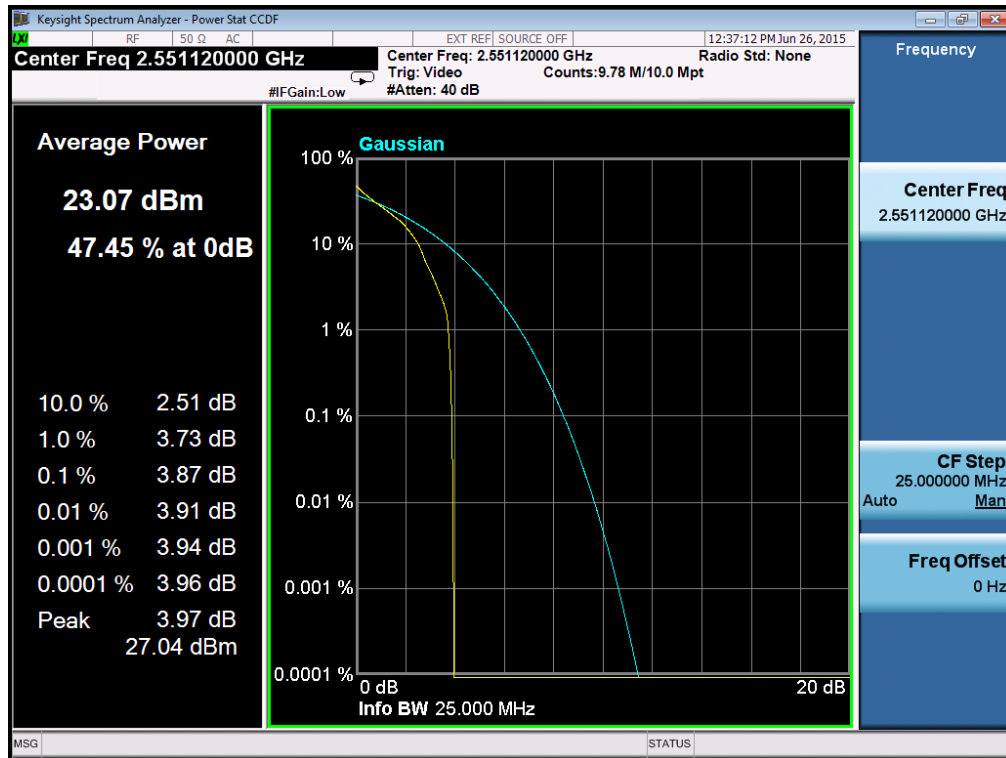


Peak to Average Ratio of Configuration-16-QAM-5M/1RB channel Lowest

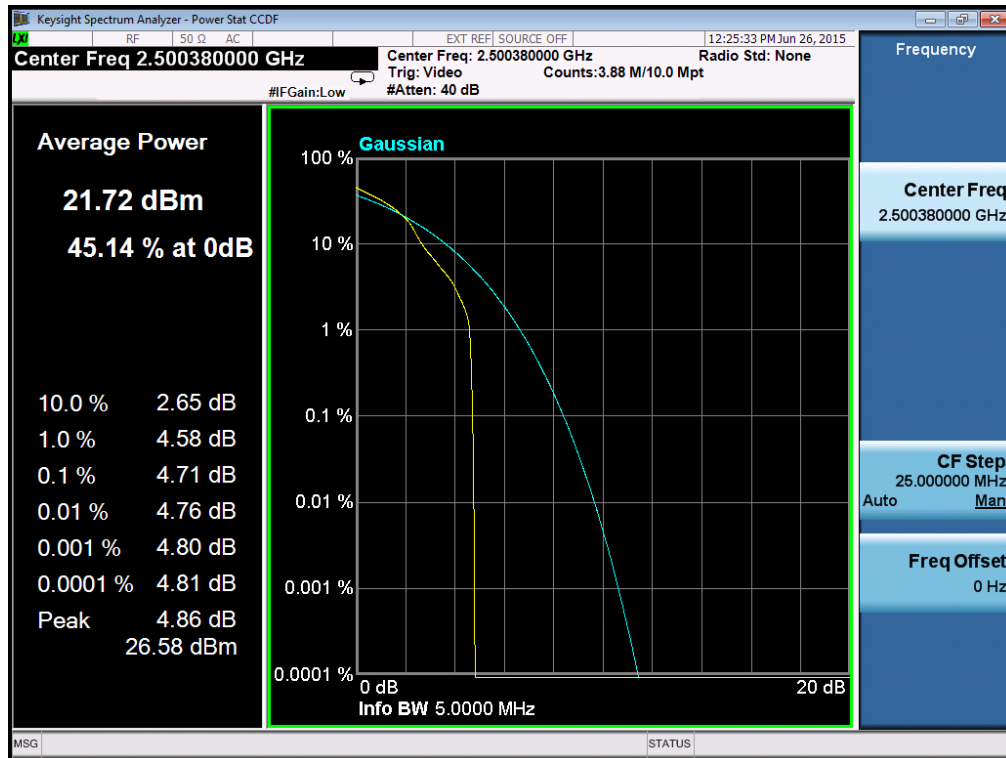


Peak to Average Ratio of Configuration-16-QAM-5M/1RB channel Middle

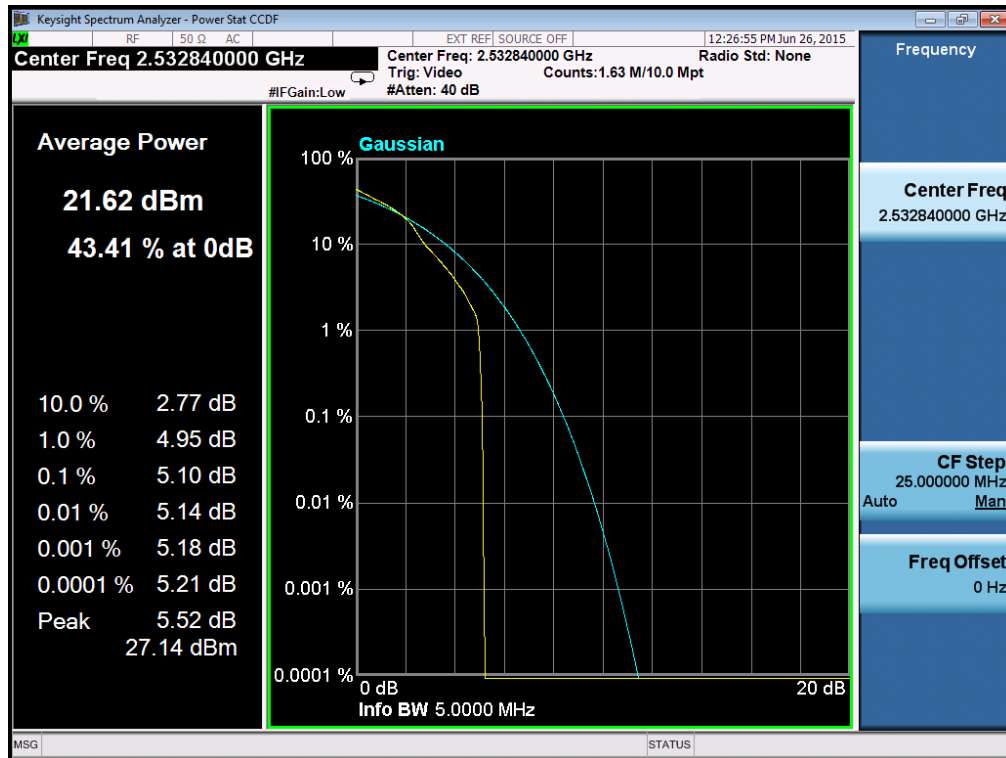


Peak to Average Ratio of Configuration-16-QAM-5M/1RB channel Highest

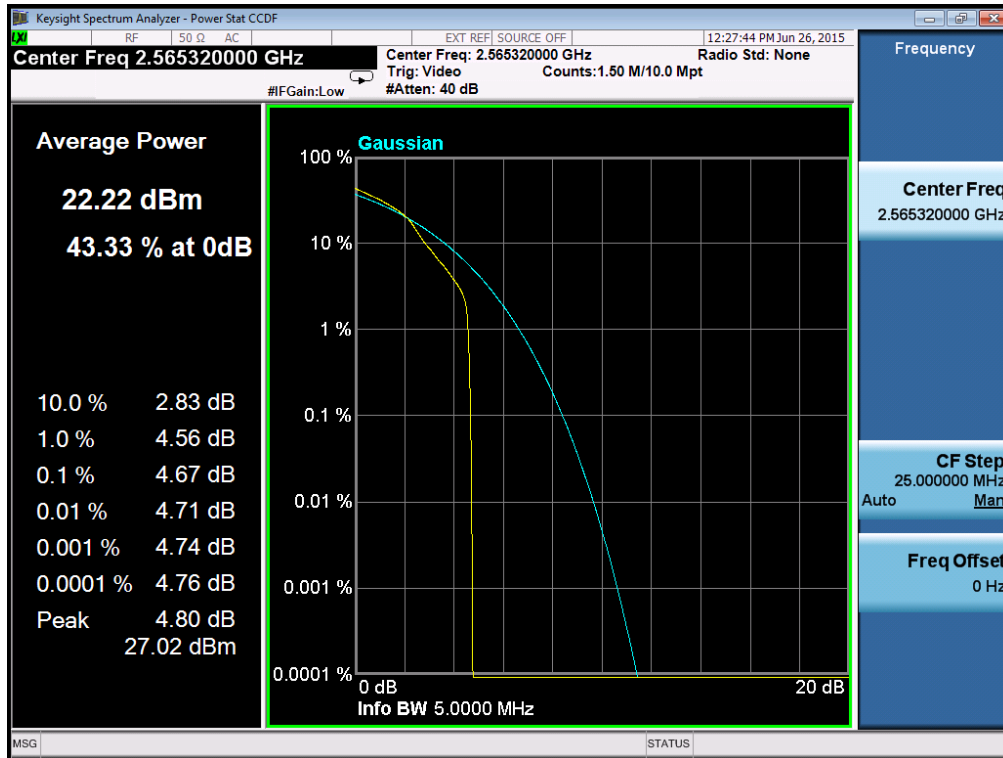


Peak to Average Ratio of Configuration-16-QAM-10M/1RB channel
Lowest

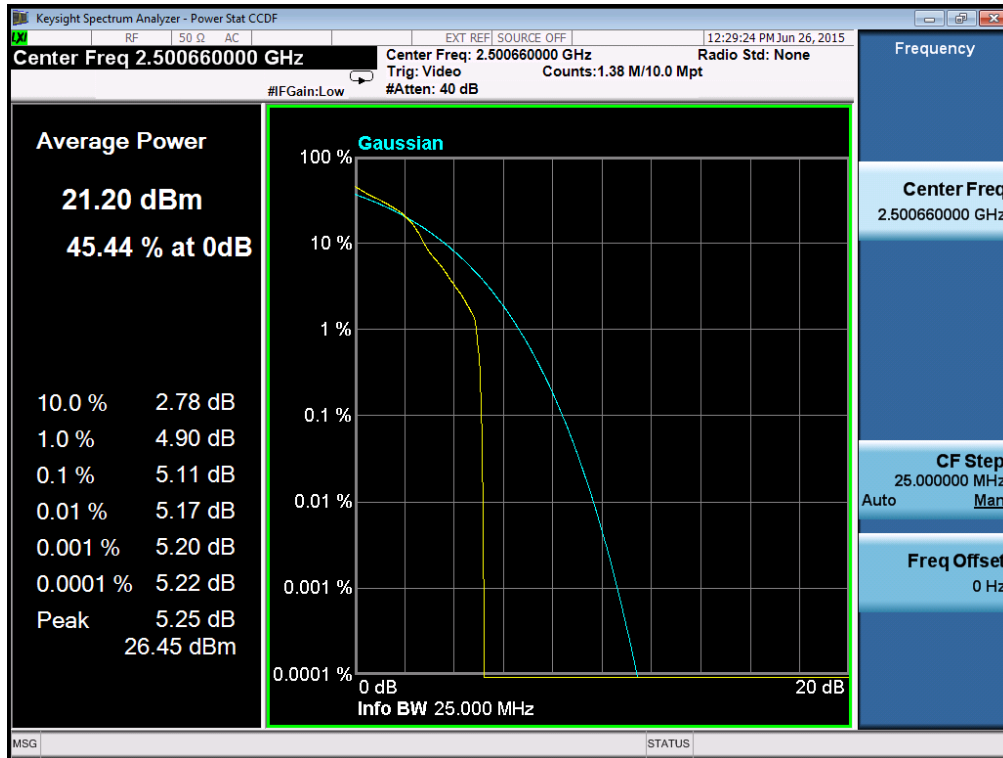


Peak to Average Ratio of Configuration-16-QAM-10M/1RB channel
Middle

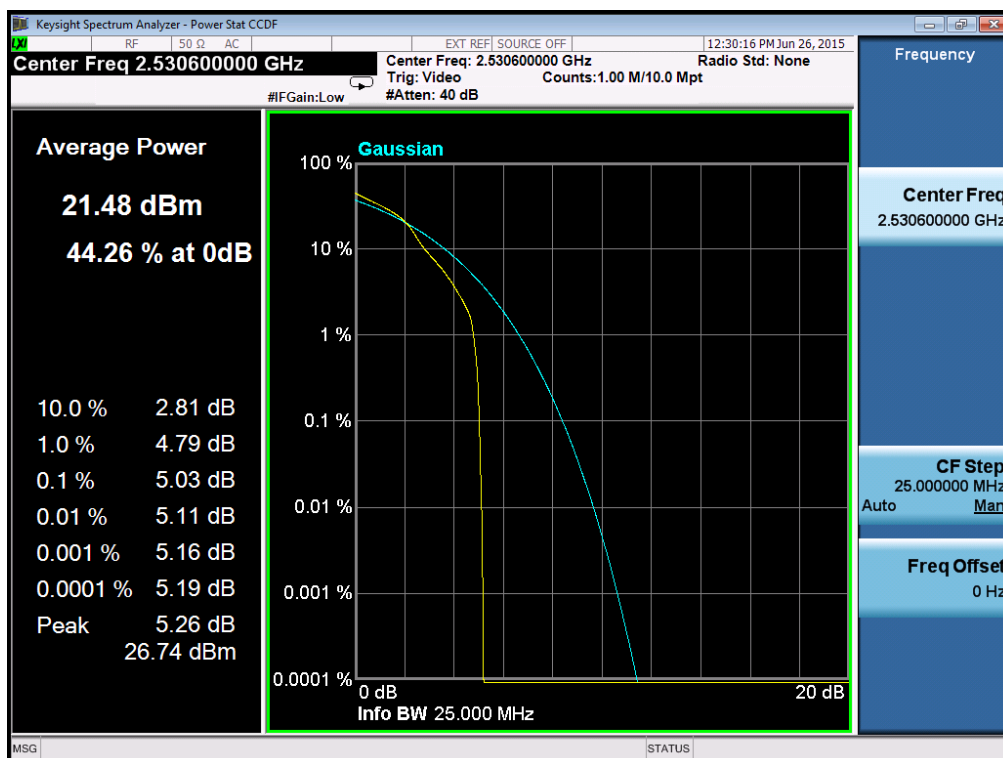


Peak to Average Ratio of Configuration-16-QAM-10M/1RB channel Highest

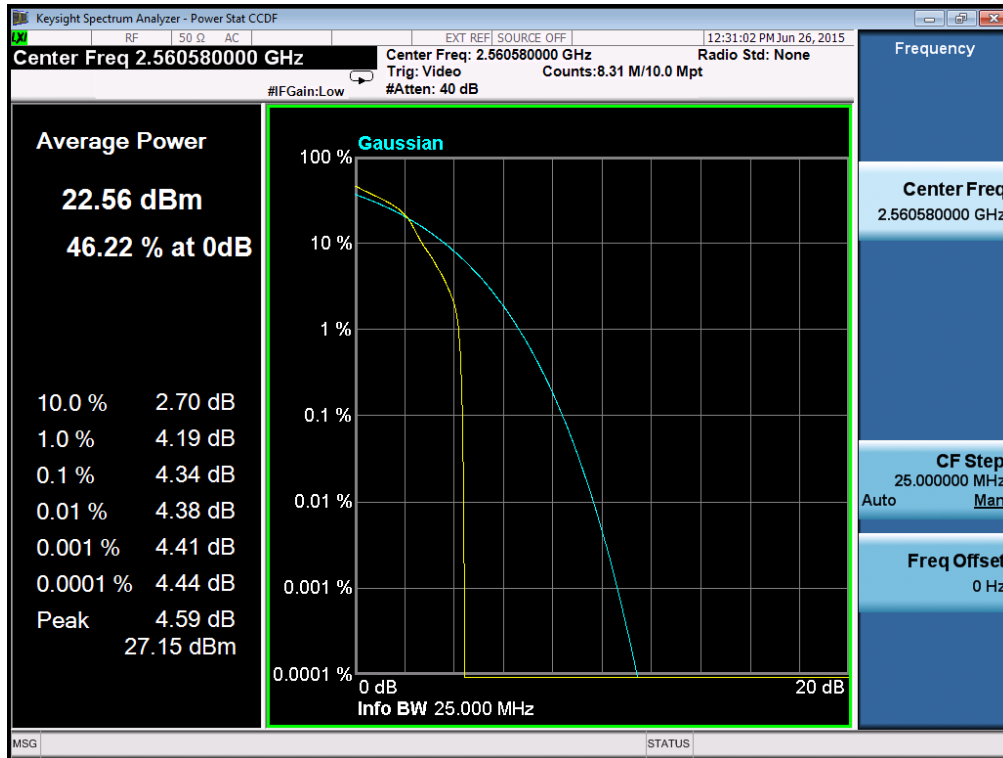


Peak to Average Ratio of Configuration-16-QAM-15M/1RB channel
Lowest

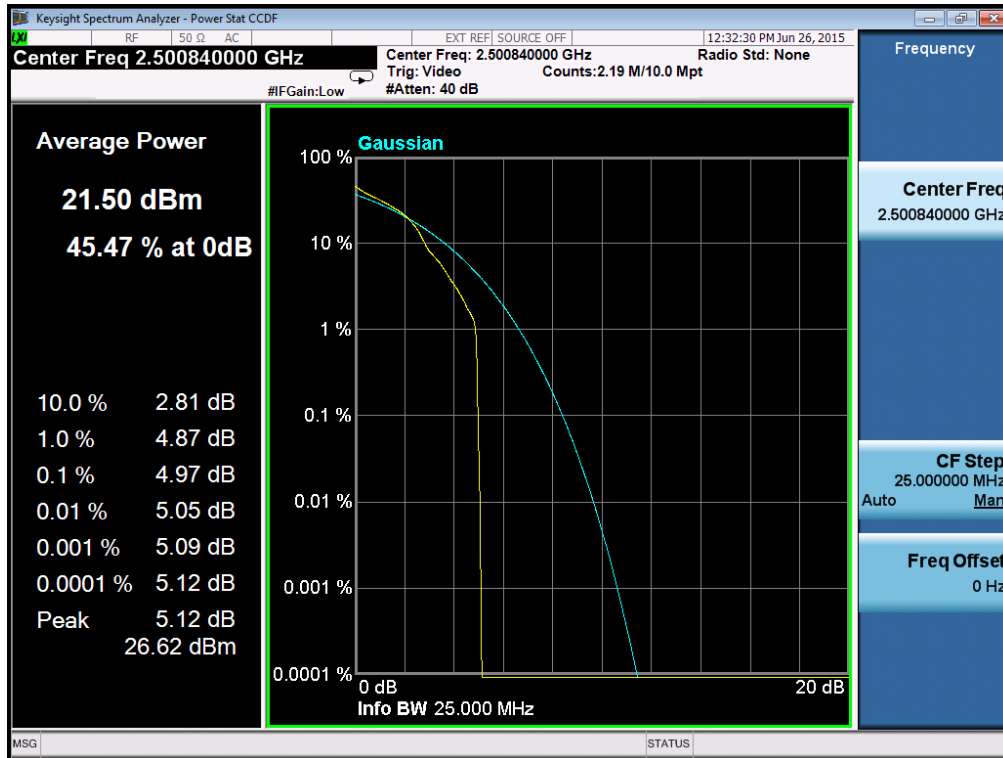


Peak to Average Ratio of Configuration-16-QAM-15M/1RB channel
Middle

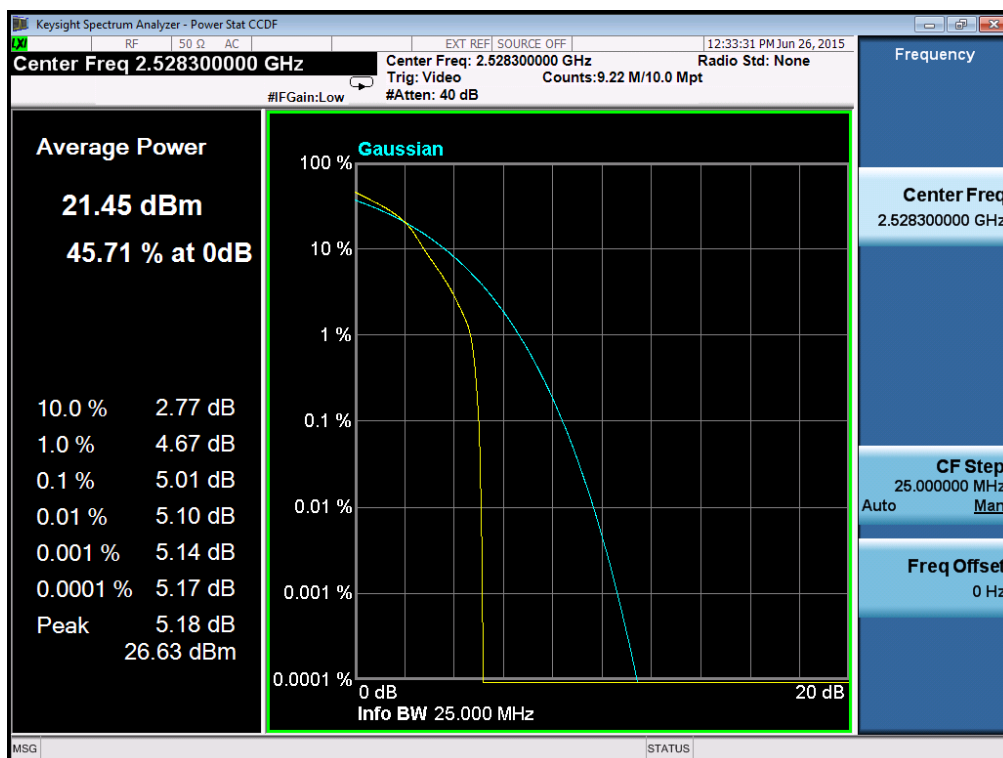


Peak to Average Ratio of Configuration-16-QAM-15M/1RB channel Highest

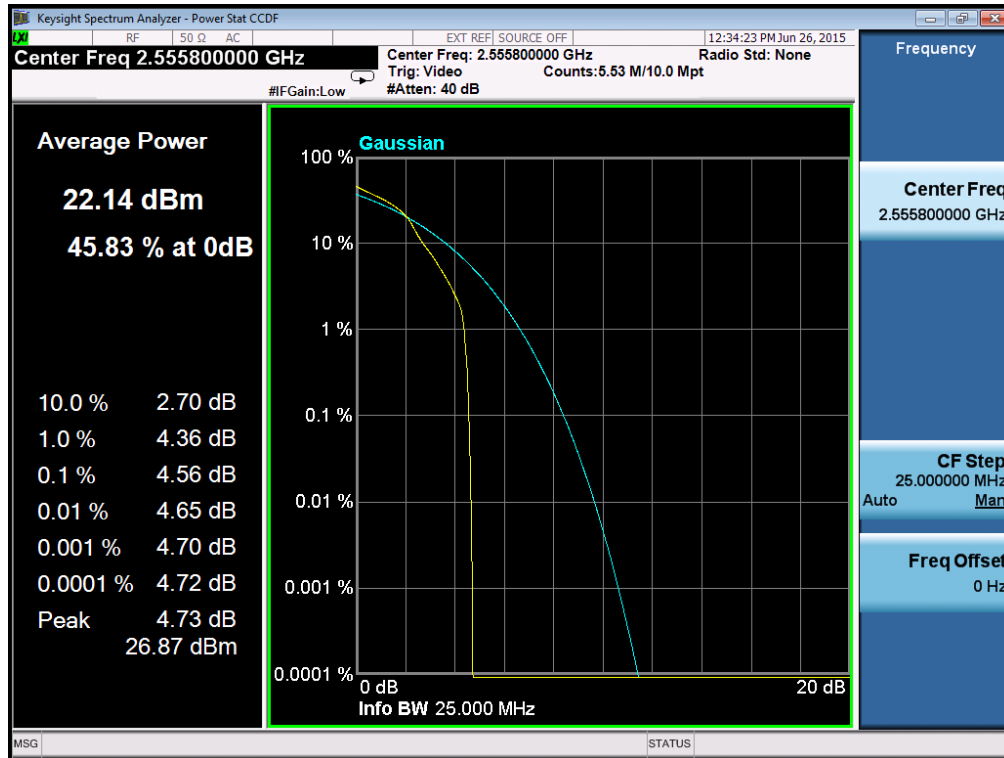

Peak to Average Ratio of Configuration-16-QAM-20M/1RB channel
Lowest

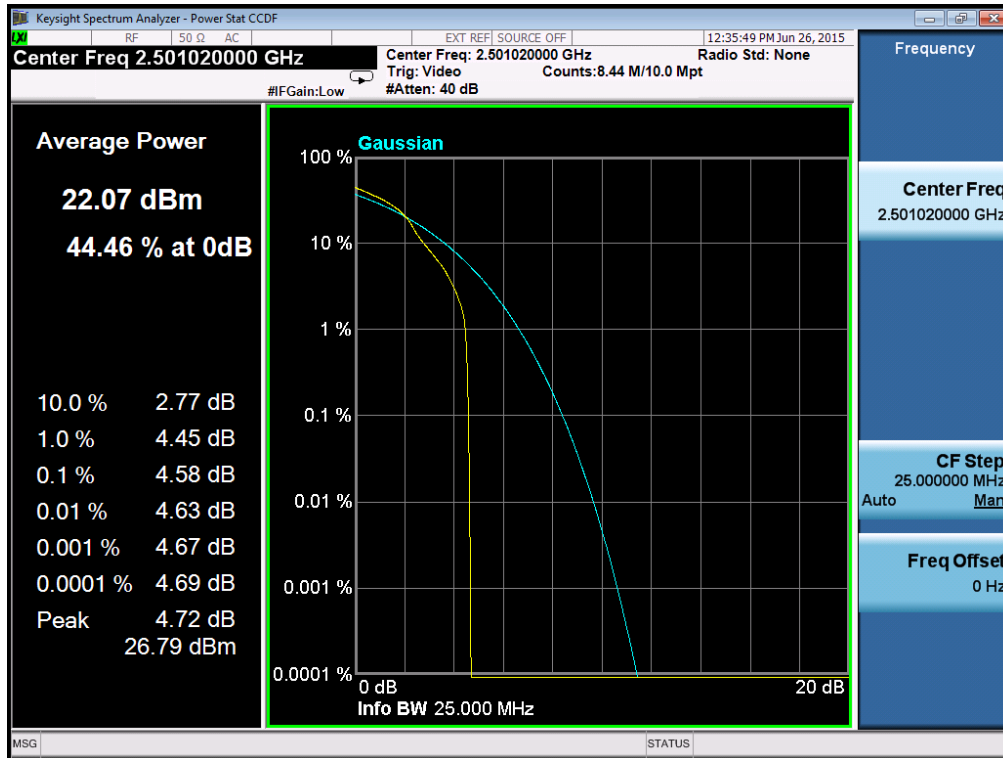

Peak to Average Ratio of Configuration-16-QAM-20M/1RB channel
Middle

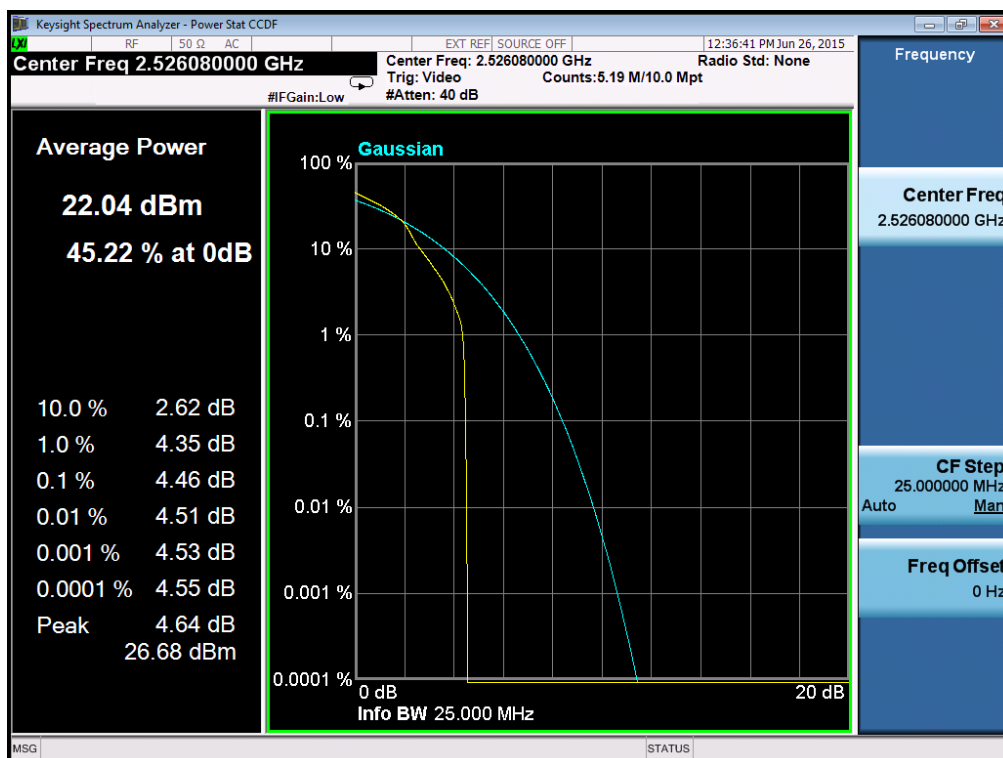

Peak to Average Ratio of Configuration-16-QAM-20M/1RB channel Highest

