



PART 0 SAR CHAR REPORT

No. I21Z62312-SEM08

For

OnePlus Technology (Shenzhen) Co., Ltd.

Smart Phone

Model Name: GN2200

with

Hardware Version: 11

Software Version: GN2200_11_A.02

FCC ID: 2ABZ2-AA455

Issued Date: 2022-3-4

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



No.I21Z62312-SEM08

REPORT HISTORY

Report Number	Revision	Issue Date	Description
I21Z62312-SEM08	Rev.0	2022-2-21	Initial creation of test report
I21Z62312-SEM08	Rev.1	2022-3-4	Update the information on section 4.3



TABLE OF CONTENT

1 TEST LABORATORY	4
1.1 TESTING LOCATION	4
1.2 TESTING ENVIRONMENT.....	4
1.3 PROJECT DATA	4
1.4 SIGNATURE.....	4
2 INTRODUCTION.....	5
3 EQUIPMENT UNDER TEST (EUT) OVERVIEW.....	6
4 SAR CHARACTERIZATION	7
4.1 DSI AND SAR DETERMINATION	7
4.2 SAR DESIGN TARGET AND UNCERTAINTY.....	8
4.2 SAR CHAR.....	9
5 MEASUREMENT UNCERTAINTY	10

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data


Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	December 6,2021
Testing End Date:	February 15,2022

1.4 Signature




Lin Xiaojun

(Prepared this test report)

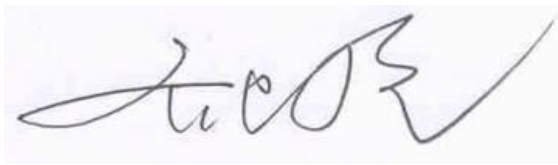

Qi Dianyuan

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2 Introduction

The equipment under test (EUT) is a smart phone. It contains the Qualcomm modem supporting 2G/3G/4G technologies and 5G NR Sub-6 GHz technologies. These modems enable Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement.

In the Part 0 report, the EUT SAR are characterized for WWAN radios (2G/3G/4G/Sub6 NR) to determine the power limit that corresponds to the exposure design target after accounting for all device design related uncertainties, i.e., SAR_design_target (< FCC SAR limit) for sub-6. The SAR characterization are denoted as SAR Char. SAR Char will be used as input for Qualcomm Smart Transmit to operate. SAR Char will be loaded and store in the EUT via the Embedded File System (EFS).

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time- varying) transmission scenario for WWAN technologies are reported in Part 2 report.

The EUT supports WLAN/BT radio as well but WLAN/BT modem is not enabled with Smart Transmit.

Nomenclature for Part 0 Report

Term	Description
P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory power density limit to account for all device design related uncertainties.
SAR Char	P_{limit} for all the technologies/bands for all applicable DSI

3 Equipment Under Test (EUT) Overview

Description:	Smart Phone
Model name:	GN2200
Operating mode(s):	GSM850/900/1800/1900, WCDMA B1/B2/4/B5/B8 LTE Band1/2/3/4/5/7/8/12/13/17/20/25/26/28/38/39/41/66/71 5G NR N2/25/41/66/71 BT, Wi-Fi(2.4G), Wi-Fi(5G)
Tested Tx Frequency:	824 – 849 MHz (GSM 850)
	1850 – 1910 MHz (GSM 1900)
	824–849 MHz (WCDMA 850 Band V)
	1710 – 1755 MHz (WCDMA 1700 Band IV)
	1850–1910 MHz (WCDMA1900 Band II)
	1850 – 1910 MHz(LTE Band 2)
	2500 – 2570 MHz(LTE Band 7)
	699 – 716 MHz (LTE Band 12)
	777 –787 MHz (LTE Band 13)
	1850 – 1915 MHz (LTE Band 25)
	814 – 849 MHz (LTE Band 26)
	2570 – 2620 MHz (LTE Band 38)
	2496 – 2690 MHz (LTE Band 41)
	1710 – 1780 MHz (LTE Band 66)
	663 – 698 MHz (LTE Band 71)
	2412 – 2462 MHz (Wi-Fi 2.4G)
	5180 – 5240 MHz (Wi-Fi 5.2G)
	5260 – 5320 MHz (Wi-Fi 5.3G)
	5500 – 5720 MHz (Wi-Fi 5.5G)
	5745 – 5825 MHz (Wi-Fi 5.8G)
2400 – 2483.5 MHz (Bluetooth)	
1850 – 1915 MHz (n25)	
2496 – 2690 MHz (n41)	
1710– 1780 MHz (n66)	
663 – 698 MHz (n71)	
GPRS/EGPRS Multislot Class:	12
Test device production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support

4 SAR Characterization

4.1 DSI and SAR Determination

This device uses different Device State Index (DSI) to configure different time averaged power levels based on certain exposure scenarios. Depending on the detection scheme implemented in the smartphone, the worst-case SAR is further grouped and determined for each or combined exposure scenario

DSI and Corresponding Exposure Scenarios

Scenario	Description
DSI 0	Pmax
DSI 5	Receiver on(Standalone)
DSI 4	Receiver off(Standalone)
DSI 10	Receiver on (WWAN+WLAN/BT)
DSI 9	Receiver off(WWAN+WLAN/BT)
DSI 19	Hotspot on
DSI 1	Sensor on ANT1(Standalone)
DSI 2	Sensor on ANT0(Standalone)
DSI 6	Sensor on ANT1(WWAN+WLAN/BT)
DSI 7	Sensor on ANT0(WWAN+WLAN/BT)

4.2 SAR Design Target and Uncertainty

SAR_design_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer.

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_design_target < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

Exposure conditions	Trigger Conditions	DSI	SAR design target	W/kg
Head	Receiver On	DSI5	1g SAR design target	1.2
Head	Receiver On+Wifi5G+BT	DSI10	1g SAR design target	0.8
Body Worn	Receiver Off	DSI4	1g SAR design target	1.2
Body Worn	Receiver Off+Wifi5G+BT	DSI9	1g SAR design target	0.8
Hotspot	Hotspot on	DSI19	1g SAR design target	1.2
Extremity	Sensor On	DSI1/2	10g SAR design target	2.8
Extremity	Sensor On +Wifi5G+BT	DSI6/7	10g SAR design target	2.0

	Uncertainty dB 2/3/4G	Uncertainty dB NR
Total uncertainty	1	1.2

4.3 SAR Char

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating. Plimit is calculated by linearly scaling with the measured SAR at the Ppart0 to correspond to the SAR_design_target. When Plimit < Pmax, Ppart0 was used as Plimit in the Smart Transmit EFS. When Plimit >Pmax and Ppart0=Pmax, calculated Pmax was used in the Smart Transmit EFS. All reported SAR obtained from the Ppart0 SAR tests was less than SAR_Design_target+ device uncertainty.

DSI		0	1	2	4	5	6	7	9	10	19
Band	Antenna	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)	Tx power (dBm)
GSM_B850	1	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	29.5	32.5
GSM_B1900	1	29.8	28.8	29.8	28.5	25	27	29.8	26.5	23	25.5
WCDMA_B2	1	23.8	18.8	23.8	21.8	15.8	16.8	23.8	19.8	13.8	17.3
WCDMA_B4	1	23.8	20.8	23.8	22.8	15.8	18.8	23.8	19.8	13.8	18.3
WCDMA_B5	1	24	24	24	24	23	24	24	24	21	24
LTE_B2	1	23.8	20.3	23.8	22.8	16.3	18.8	23.8	20.8	14.3	17.3
LTE_B4	1	23.8	21.8	23.8	23.8	16.3	19.3	23.8	21.3	15.3	19.3
LTE_B7	1	22.8	22.8	22.8	22.8	16.8	20.8	22.8	21.8	14.8	20.3
LTE_B12	1	24	24	24	24	24	24	24	24	22.5	24
LTE_B13	1	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
LTE_B17	1	24	24	24	24	24	24	24	24	22.5	24
LTE_B25	1	23.8	20.8	23.8	22.8	15.8	18.8	23.8	19.8	14.3	18.3
LTE_B26	1	24	24	24	24	24	24	24	24	23	24
LTE_B38	1	23	23	23	23	18	23	23	22	16	20
LTE_B41(PC2)	1	26	26	26	26	16.6	24.5	26	20.9	14.9	19.4
LTE_B41(PC3)	1	24	24	24	24	14.2	24	18.5	18.5	12.5	17
LTE_B66	1	23.8	21.8	23.8	23.8	16.3	19.3	23.8	21.3	15.3	19.3
LTE_B71	1	24	24	24	24	22.5	24	24	24	21	24
NR5G_N2	1	23.8	20.8	23.8	22.8	15.3	18.8	23.8	19.8	12.8	14.8
NR5G_N25	1	23.8	20.8	23.8	22.8	15.3	18.8	23.8	19.8	12.8	14.8
NR5G_N41	1	26	22.5	26	24	16	21	26	22	15	15
NR5G_N66	1	23.8	21.3	23.8	22.3	15.8	20.3	23.8	19.8	13.8	13.8
NR5G_N71	1	24	24	24	24	24	24	24	24	24	24
GSM_B850	0	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5
GSM_B1900	0	29.8	29.8	29.8	29.8	29.8	29.8	28.5	29.8	29.8	29
WCDMA_B2	0	23.8	23.8	21.8	23.8	23.8	23.8	19.8	23.3	23.8	20.8
WCDMA_B4	0	23.8	23.8	22.3	23.8	23.8	23.8	21.3	23.3	23.8	20.3
WCDMA_B5	0	24	24	24	24	24.0	24.0	24	24.0	24.0	24
LTE_B2	0	23.8	23.8	22.8	23.8	23.8	23.8	20.3	23.8	23.8	20.8
LTE_B4	0	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.3	23.8	22.3
LTE_B7	0	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8	22.8
LTE_B12	0	24	24	24	24	24.0	24.0	24	24.0	24.0	24
LTE_B13	0	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5	23.5
LTE_B17	0	24	24	24	24	24.0	24.0	24	24.0	24.0	24
LTE_B25	0	23.8	23.8	23.8	23.8	23.8	23.8	20.8	23.8	23.8	20.3
LTE_B26	0	24	24	24	24	24.0	24.0	24	24.0	24.0	24
LTE_B38	0	23	23	23	23	23.0	23.0	23.0	23.0	23.0	23.0
LTE_B41(PC2)	0	26	26	26	26	26.0	26.0	26.0	26.0	26.0	26.0
LTE_B41(PC3)	0	24	24	24	24	24	24	24	24	24	24
LTE_B66	0	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.3	23.8	22.3
LTE_B71	0	24	24	24	24	24.0	24.0	24.0	24.0	24.0	24.0
NR5G_N2	0	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8	21.8
NR5G_N25	0	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8	23.8	21.8
NR5G_N41	0	26	26	23.5	26	26.0	26.0	26.0	25.0	26.0	23.5
NR5G_N66	0	23.8	23.8	23.8	23.8	23.8	23.8	23.8	22.8	23.8	20.8
NR5G_N71	0	24	24	24	24	24.0	24.0	24.0	24.0	24.0	24.0
LTE_B2	4	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
LTE_B25	4	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
LTE_B66	4	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2
NR5G_N2	4	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
NR5G_N25	4	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1	23.1
NR5G_N66	4	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2	23.2
NR5G_N41	4	25.1	24	24	25.1	19.6	20.5	20.5	21.6	17.6	17.6

Note:

- 1 When Pmax < Plimit, the DUT will operate at a power level up to Pmax.
- 2 Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax + device uncertainty.
- 3 The device have similar frequency in some LTE bands : LTEB5/26,12/17,4/66, since the supported frequency spans for the smaller LTE bands are completely cover by the larger LTE bands, therefore, only larger LTE bands were required to be tested for SAR.



The device have similar frequency in some NR bands : N2/N25, since the supported frequency spans for the smaller MR bands are completely cover by the larger NR bands and the channel bandwidth and other operating parameters for the smaller band be fully supported by the larger band, therefore, only larger NR bands were required to be tested for SAR.

5 Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.