




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

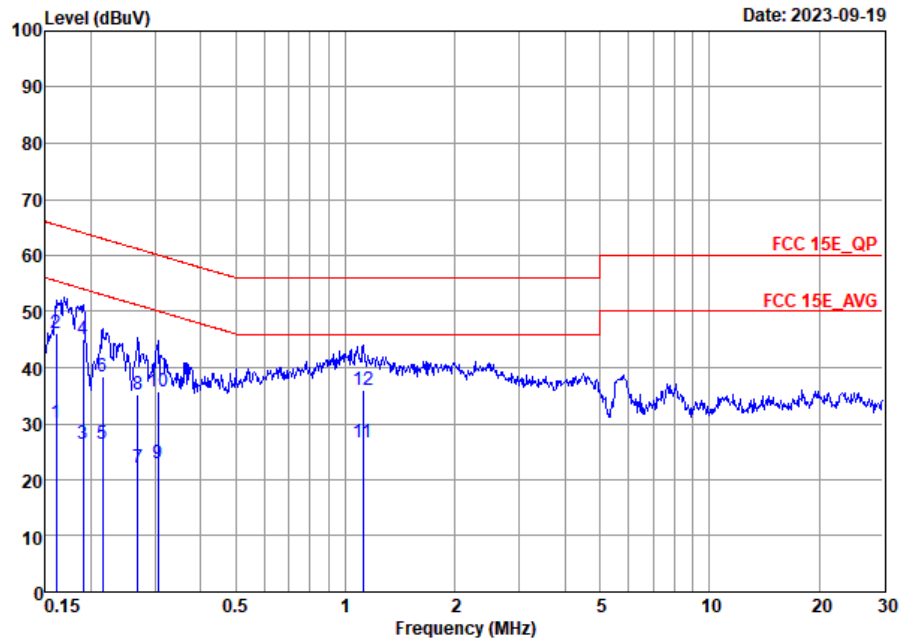


Site : CO01-SZ  
 Condition: FCC 15E\_QP LISN\_20230420\_L LINE  
 Project : 382311  
 Mode : Mode 1  
 IMEI : 865154060025771/865154060025763

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	30.01	-25.42	55.43	9.39	10.48	10.14	Average
2	0.16	46.11	-19.32	65.43	25.49	10.48	10.14	QP
3	0.19	26.28	-27.74	54.02	5.70	10.43	10.15	Average
4 *	0.19	45.08	-18.94	64.02	24.50	10.43	10.15	QP
5	0.22	26.45	-26.56	53.01	5.90	10.40	10.15	Average
6	0.22	38.45	-24.56	63.01	17.90	10.40	10.15	QP
7	0.27	22.23	-28.93	51.16	1.70	10.38	10.15	Average
8	0.27	35.33	-25.83	61.16	14.80	10.38	10.15	QP
9	0.31	22.82	-27.28	50.10	2.31	10.36	10.15	Average
10	0.31	35.62	-24.48	60.10	15.11	10.36	10.15	QP
11	1.12	26.60	-19.40	46.00	6.20	10.23	10.17	Average
12	1.12	35.90	-20.10	56.00	15.50	10.23	10.17	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

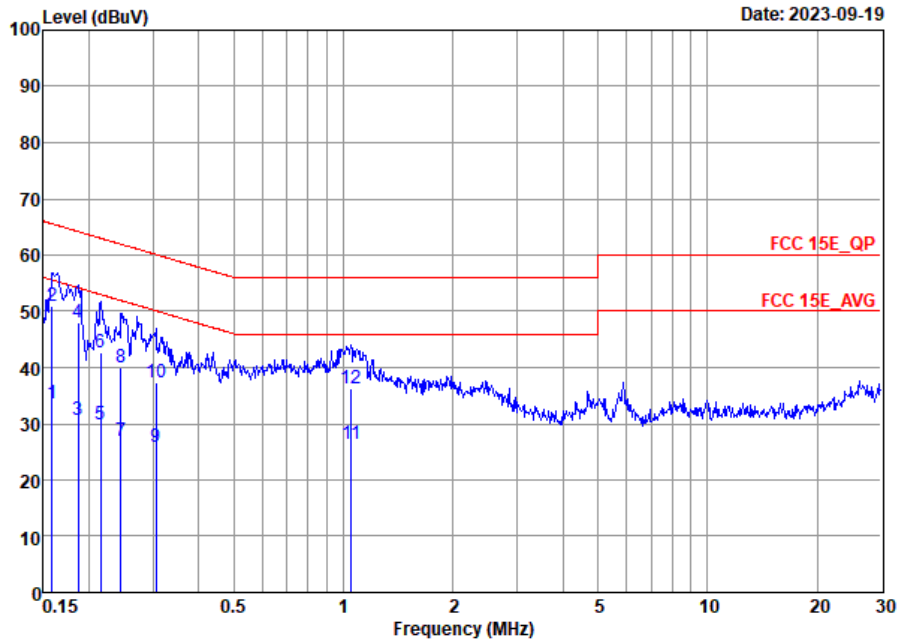

Site : CO01-SZ  
 Condition: FCC 15E\_QP LISN\_20230420\_N NEUTRAL  
 Project : 382311  
 Mode : Mode 1  
 IMEI : 865154060025771/865154060025763

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	33.68	-21.88	55.56	13.09	10.45	10.14	Average
2 *	0.16	50.98	-14.58	65.56	30.39	10.45	10.14	QP
3	0.19	30.63	-23.57	54.20	10.10	10.38	10.15	Average
4	0.19	48.13	-16.07	64.20	27.60	10.38	10.15	QP
5	0.22	29.99	-23.02	53.01	9.50	10.34	10.15	Average
6	0.22	42.79	-20.22	63.01	22.30	10.34	10.15	QP
7	0.24	26.88	-25.07	51.95	6.41	10.32	10.15	Average
8	0.24	39.98	-21.97	61.95	19.51	10.32	10.15	QP
9	0.31	25.96	-24.14	50.10	5.51	10.30	10.15	Average
10	0.31	37.36	-22.74	60.10	16.91	10.30	10.15	QP
11	1.05	26.32	-19.68	46.00	5.91	10.25	10.16	Average
12	1.05	36.32	-19.68	56.00	15.91	10.25	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### Appendix C. Radiated Spurious Emission

Test Engineer :	Wenbo Xiao/Jia Kuang	Relative Humidity :	50%
		Temperature :	20-22°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	UNII-5	5925-6425	CDD 9+15	802.11a	1	5955	6Mbps	-	-
Mode 2	UNII-5	5925-6425	CDD 9+15	802.11a	45	6175	6Mbps	-	-
Mode 3	UNII-5	5925-6425	CDD 9+15	802.11a	93	6415	6Mbps	-	-
Mode 4	UNII-5	5925-6425	CDD 9+15	802.11a	97	6435	6Mbps	-	-
Mode 5	UNII-6	6425-6525	CDD 9+15	802.11a	105	6475	6Mbps	-	-
Mode 6	UNII-6	6425-6525	CDD 9+15	802.11a	113	6515	6Mbps	-	-
Mode 7	UNII-7	6525-6875	CDD 9+15	802.11a	117	6535	6Mbps	-	-
Mode 8	UNII-7	6525-6875	CDD 9+15	802.11a	149	6695	6Mbps	-	-
Mode 9	UNII-7	6525-6875	CDD 9+15	802.11a	181	6855	6Mbps	-	-
Mode 10	UNII-8	6875-7125	CDD 9+15	802.11a	189	6895	6Mbps	-	-
Mode 11	UNII-8	6875-7125	CDD 9+15	802.11a	209	6995	6Mbps	-	-
Mode 12	UNII-8	6875-7125	CDD 9+15	802.11a	229	7095	6Mbps	-	-
Mode 13	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	-	-
Mode 14	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	45	6175	MCS0	-	-
Mode 15	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	93	6415	MCS0	-	-
Mode 16	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	97	6435	MCS0	-	-
Mode 17	UNII-6	6425-6525	CDD 9+15	802.11be EHT20	105	6475	MCS0	-	-
Mode 18	UNII-6	6425-6525	CDD 9+15	802.11be EHT20	113	6515	MCS0	-	-
Mode 19	UNII-7	6525-6875	CDD 9+15	802.11be EHT20	117	6535	MCS0	Full	-
Mode 20	UNII-7	6525-6875	CDD 9+15	802.11be EHT20	149	6695	MCS0	Full	-
Mode 21	UNII-7	6525-6875	CDD 9+15	802.11be EHT20	181	6855	MCS0	Full	-
Mode 22	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	189	6895	MCS0	Full	-
Mode 23	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	209	6995	MCS0	Full	-
Mode 24	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Full	-
Mode 25	UNII-5	5925-6425	CDD 9+15	802.11be EHT40	3	5965	MCS0	Full	-
Mode 26	UNII-8	6875-7125	CDD 9+15	802.11be EHT40	227	7085	MCS0	Full	-
Mode 27	UNII-5	5925-6425	CDD 9+15	802.11be EHT80	7	5985	MCS0	Full	-
Mode 28	UNII-8	6875-7125	CDD 9+15	802.11be EHT80	215	7025	MCS0	Full	-
Mode 29	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	15	6025	MCS0	Full	-
Mode 30	UNII-8	6875-7125	CDD 9+15	802.11be EHT160	207	6985	MCS0	Full	-
Mode 31	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6105	MCS0	Full	-
Mode 32	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	63	6265	MCS0	Full	-
Mode 33	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT20	185	6875	MCS0	Full	-
Mode 34	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT40	187	6885	MCS0	Full	-
Mode 35	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT80	183	6865	MCS0	Full	-





Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 36	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT160	175	6825	MCS0	Full	-
Mode 37	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	159	6745	MCS0	Full	-
Mode 38	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Full	-
Mode 39	UNII-6-7	6425-6875	CDD 9+15	802.11be EHT40	115	6525	MCS0	Full	-
Mode 40	UNII-6-7	6425-6875	CDD 9+15	802.11be EHT80	119	6545	MCS0	Full	-
Mode 41	UNII-6-7	6425-6875	CDD 9+15	802.11be EHT160	111	6505	MCS0	Full	-
Mode 42	UNII-6-7	5925-6425	CDD 9+15	802.11be EHT320	95	6425	MCS0	Full	-
Mode 43	UNII-6-7	6425-6875	CDD 9+15	802.11be EHT320	127	6585	MCS0	Full	-
Mode 44	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	Single RU 26/0	-
Mode 45	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	Single RU 52/37	-
Mode 46	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	Single RU 106/53	-
Mode 47	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Single RU 26/8	-
Mode 48	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Single RU 52/40	-
Mode 49	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Single RU 106/54	-
Mode 50	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	Small RU 52+ 26 38+1	-
Mode 51	UNII-5	5925-6425	CDD 9+15	802.11be EHT20	1	5955	MCS0	Small RU 106+ 26 53+4	-
Mode 52	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Small RU 52+ 26 39+7	-
Mode 53	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	229	7095	MCS0	Small RU 106+ 26 54+4	-
Mode 54	UNII-5	5925-6425	CDD 9+15	802.11be EHT80	7	5985	MCS0	Large RU 484+242④	-
Mode 55	UNII-8	6875-7125	CDD 9+15	802.11be EHT80	215	7025	MCS0	Large RU 484+242①	-
Mode 56	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	15	6025	MCS0	Large RU 996+484④	-
Mode 57	UNII-8	6875-7125	CDD 9+15	802.11be EHT160	207	6985	MCS0	Large RU 996+484①	-
Mode 58	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6025	MCS0	Large RU 996*2+ 484⑥	-
Mode 59	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Large RU 996*2+ 484⑦	-
Mode 60	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6025	MCS0	Large RU 996*3④	-
Mode 61	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Large RU 996*3①	-
Mode 62	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6025	MCS0	Large RU 996*3+ 484③	-
Mode 63	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Large RU 996*3+484①	-
Mode 64	UNII-5	5925-6425	CDD 9+15	802.11be EHT80	7	5985	MCS0	Puncturing 20M④	-
Mode 65	UNII-8	6875-7125	CDD 9+15	802.11be EHT80	215	7025	MCS0	Puncturing 20M①	-
Mode 66	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	15	6025	MCS0	Puncturing 40M④	-
Mode 67	UNII-8	6875-7125	CDD 9+15	802.11be EHT160	207	6985	MCS0	Puncturing 40M①	-
Mode 68	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	15	6025	MCS0	Puncturing 20M⑧	-
Mode 69	UNII-8	6875-7125	CDD 9+15	802.11be EHT160	207	6985	MCS0	Puncturing 20M①	-
Mode 70	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6105	MCS0	Puncturing 80M+ 40M⑥	-
Mode 71	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Puncturing 80M+ 40M⑦	-
Mode 72	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6105	MCS0	Puncturing 80M④	-
Mode 73	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Puncturing 80M①	-
Mode 74	UNII-5	5925-6425	CDD 9+15	802.11be EHT320	31	6105	MCS0	Puncturing 40M⑧	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 75	UNII-7-8	6525-7125	CDD 9+15	802.11be EHT320	191	6905	MCS0	Puncturing 40M①	-
Mode 76	UNII-8	6875-7125	CDD 9+15	802.11a	233	7115	6Mbps	LF	-
Mode 77	UNII-8	6875-7125	CDD 9+15	802.11a	233	7115	6Mbps	-	-
Mode 78	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Full RU	-
Mode 79	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Single RU RU 26/8	-
Mode 80	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Single RU RU 52/40	-
Mode 81	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Single RU 106/54	-
Mode 82	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Small RU 52+ 26 39+7	-
Mode 83	UNII-8	6875-7125	CDD 9+15	802.11be EHT20	233	7115	MCS0	Small RU 106+ 26 54+4	-
Mode 87	UNII-5	5925-6425	CDD 9+15	802.11be EHT40	43	6165	MCS0	Full	-
Mode 88	UNII-5	5925-6425	CDD 9+15	802.11be EHT40	91	6405	MCS0	Full	-
Mode 89	UNII-6	6425-6525	CDD 9+15	802.11be EHT40	99	6445	MCS0	Full	-
Mode 90	UNII-6	6425-6525	CDD 9+15	802.11be EHT40	107	6485	MCS0	Full	-
Mode 91	UNII-7	6525-6875	CDD 9+15	802.11be EHT40	123	6565	MCS0	Full	-
Mode 92	UNII-7	6525-6875	CDD 9+15	802.11be EHT40	147	6685	MCS0	Full	-
Mode 93	UNII-7	6525-6875	CDD 9+15	802.11be EHT40	179	6845	MCS0	Full	-
Mode 94	UNII-8	6875-7125	CDD 9+15	802.11be EHT40	195	6925	MCS0	Full	-
Mode 95	UNII-8	6875-7125	CDD 9+15	802.11be EHT40	203	6965	MCS0	Full	-
Mode 96	UNII-5	5925-6425	CDD 9+15	802.11be EHT80	39	6145	MCS0	Full	-
Mode 97	UNII-5	5925-6425	CDD 9+15	802.11be EHT80	87	6385	MCS0	Full	-
Mode 98	UNII-6	6425-6525	CDD 9+15	802.11be EHT80	103	6465	MCS0	Full	-
Mode 99	UNII-7	6525-6875	CDD 9+15	802.11be EHT80	135	6625	MCS0	Full	-
Mode 100	UNII-7	6525-6875	CDD 9+15	802.11be EHT80	151	6705	MCS0	Full	-
Mode 101	UNII-7	6525-6875	CDD 9+15	802.11be EHT80	167	6785	MCS0	Full	-
Mode 102	UNII-8	6875-7125	CDD 9+15	802.11be EHT80	199	6945	MCS0	Full	-
Mode 103	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	47	6185	MCS0	Full	-
Mode 104	UNII-5	5925-6425	CDD 9+15	802.11be EHT160	79	6345	MCS0	Full	-
Mode 105	UNII-7	6525-6875	CDD 9+15	802.11be EHT160	143	6665	MCS0	Full	-
Mode 106	UNII-7-8	6525-7125	CDD 9+15	802.11a	185	6875	6Mbps	Full	-



### Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	1	-	-	-	-	-	-	-	Band Edge
1	802.11a	1	11910.00	47.94	74.00	-26.06	H	Peak	Pass	Harmonic
2	802.11a	45	-	-	-	-	-	-	-	Band Edge
2	802.11a	45	12350.00	46.91	74.00	-27.09	V	Peak	Pass	Harmonic
3	802.11a	93	-	-	-	-	-	-	-	Band Edge
3	802.11a	93	12830.00	47.48	88.20	-40.72	V	Peak	Pass	Harmonic
4	802.11a	97	-	-	-	-	-	-	-	Band Edge
4	802.11a	97	12870.00	47.66	88.20	-40.54	V	Peak	Pass	Harmonic
5	802.11a	105	-	-	-	-	-	-	-	Band Edge
5	802.11a	105	12950.00	47.91	88.20	-40.29	V	Peak	Pass	Harmonic
6	802.11a	113	-	-	-	-	-	-	-	Band Edge
6	802.11a	113	13030.00	47.62	88.20	-40.58	V	Peak	Pass	Harmonic
7	802.11a	117	-	-	-	-	-	-	-	Band Edge
7	802.11a	117	13070.00	47.76	88.20	-40.44	H	Peak	Pass	Harmonic
8	802.11a	149	-	-	-	-	-	-	-	Band Edge
8	802.11a	149	13390.00	47.80	74.00	-26.20	H	Peak	Pass	Harmonic
9	802.11a	181	-	-	-	-	-	-	-	Band Edge
9	802.11a	181	13710.00	47.63	88.20	-40.57	V	Peak	Pass	Harmonic
10	802.11a	189	-	-	-	-	-	-	-	Band Edge
10	802.11a	189	13790.00	47.95	88.20	-40.25	V	Peak	Pass	Harmonic
11	802.11a	209	-	-	-	-	-	-	-	Band Edge
11	802.11a	209	13990.00	47.72	88.20	-40.48	V	Peak	Pass	Harmonic
12	802.11a	229	-	-	-	-	-	-	-	Band Edge
12	802.11a	229	14190.00	47.56	88.20	-40.64	H	Peak	Pass	Harmonic
13	802.11be EHT20	1	5923.42	42.39	68.20	-25.81	V	Average	Pass	Band Edge
13	802.11be EHT20	1	17865.00	47.60	74.00	-26.40	H	Peak	Pass	Harmonic
14	802.11be EHT20	45	-	-	-	-	-	-	-	Band Edge
14	802.11be EHT20	45	12350.00	47.95	74.00	-26.05	V	Peak	Pass	Harmonic
15	802.11be EHT20	93	-	-	-	-	-	-	-	Band Edge
15	802.11be EHT20	93	12830.00	47.82	88.20	-40.38	V	Peak	Pass	Harmonic
16	802.11be EHT20	97	-	-	-	-	-	-	-	Band Edge
16	802.11be EHT20	97	12870.00	47.73	88.20	-40.47	H	Peak	Pass	Harmonic
17	802.11be EHT20	105	-	-	-	-	-	-	-	Band Edge
17	802.11be EHT20	105	12950.00	46.69	88.20	-41.51	V	Peak	Pass	Harmonic
18	802.11be EHT20	113	-	-	-	-	-	-	-	Band Edge
18	802.11be EHT20	113	13030.00	47.86	88.20	-40.34	H	Peak	Pass	Harmonic
19	802.11be EHT20	117	-	-	-	-	-	-	-	Band Edge
19	802.11be EHT20	117	13070.00	47.89	88.20	-40.31	H	Peak	Pass	Harmonic
20	802.11be EHT20	149	-	-	-	-	-	-	-	Band Edge
20	802.11be EHT20	149	13390.00	47.51	74.00	-26.49	H	Peak	Pass	Harmonic
21	802.11be EHT20	181	-	-	-	-	-	-	-	Band Edge
21	802.11be EHT20	181	13710.00	47.85	88.20	-40.35	H	Peak	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
22	802.11be EHT20	189	-	-	-	-	-	-	-	Band Edge
22	802.11be EHT20	189	13790.00	47.93	88.20	-40.27	V	Peak	Pass	Harmonic
23	802.11be EHT20	209	-	-	-	-	-	-	-	Band Edge
23	802.11be EHT20	209	13990.00	47.53	88.20	-40.67	H	Peak	Pass	Harmonic
24	802.11be EHT20	229	7268.63	40.95	54.00	-13.05	V	Average	Pass	Band Edge
24	802.11be EHT20	229	14190.00	47.50	88.20	-40.70	H	Peak	Pass	Harmonic
25	802.11be EHT40	3	5922.12	44.94	68.20	-23.26	H	Average	Pass	Band Edge
25	802.11be EHT40	3	11930.00	47.32	74.00	-26.68	H	Peak	Pass	Harmonic
26	802.11be EHT40	227	7269.09	41.11	54.00	-12.89	H	Average	Pass	Band Edge
26	802.11be EHT40	227	14170.00	50.67	88.20	-37.53	H	Peak	Pass	Harmonic
27	802.11be EHT80	7	5919.88	42.50	68.20	-25.70	H	Average	Pass	Band Edge
27	802.11be EHT80	7	11970.00	47.58	74.00	-26.42	H	Peak	Pass	Harmonic
28	802.11be EHT80	215	7268.16	40.80	54.00	-13.20	H	Average	Pass	Band Edge
28	802.11be EHT80	215	14050.00	50.38	88.20	-37.82	H	Peak	Pass	Harmonic
29	802.11be EHT160	15	5924.12	42.63	68.20	-25.57	H	Average	Pass	Band Edge
29	802.11be EHT160	15	12050.00	47.74	74.00	-26.26	H	Peak	Pass	Harmonic
30	802.11be EHT160	207	7266.77	40.61	54.00	-13.39	H	Average	Pass	Band Edge
30	802.11be EHT160	207	13970.00	50.67	88.20	-37.53	H	Peak	Pass	Harmonic
31	802.11be EHT320	31	5625.03	55.55	68.20	-12.65	H	Average	Pass	Band Edge
31	802.11be EHT320	31	12210.00	47.60	74.00	-26.40	H	Peak	Pass	Harmonic
32	802.11be EHT320	63	-	-	-	-	-	-	-	Band Edge
32	802.11be EHT320	63	12530.00	47.50	74.00	-26.50	V	Peak	Pass	Harmonic
33	802.11be EHT20	185	-	-	-	-	-	-	-	Band Edge
33	802.11be EHT20	185	13750.00	50.30	88.20	-37.90	H	Peak	Pass	Harmonic
34	802.11be EHT40	187	-	-	-	-	-	-	-	Band Edge
34	802.11be EHT40	187	13770.00	50.01	88.20	-38.19	H	Peak	Pass	Harmonic
35	802.11be EHT80	183	-	-	-	-	-	-	-	Band Edge
35	802.11be EHT80	183	13730.00	50.30	88.20	-37.90	V	Peak	Pass	Harmonic
36	802.11be EHT160	175	-	-	-	-	-	-	-	Band Edge
36	802.11be EHT160	175	13650.00	50.46	88.20	-37.74	V	Peak	Pass	Harmonic
37	802.11be EHT320	159	-	-	-	-	-	-	-	Band Edge
37	802.11be EHT320	159	13490.00	48.40	88.20	-39.80	V	Peak	Pass	Harmonic
38	802.11be EHT320	191	7250.31	40.88	54.00	-13.12	H	Average	Pass	Band Edge
38	802.11be EHT320	191	13810.00	49.62	88.20	-38.58	H	Peak	Pass	Harmonic
39	802.11be EHT40	115	-	-	-	-	-	-	-	Band Edge
39	802.11be EHT40	115	13050.00	49.11	88.20	-39.09	H	Peak	Pass	Harmonic
40	802.11be EHT80	119	-	-	-	-	-	-	-	Band Edge
40	802.11be EHT80	119	13090.00	49.70	88.20	-38.50	H	Peak	Pass	Harmonic
41	802.11be EHT160	111	-	-	-	-	-	-	-	Band Edge
41	802.11be EHT160	111	13010.00	49.81	88.20	-38.39	V	Peak	Pass	Harmonic
42	802.11be EHT320	95	-	-	-	-	-	-	-	Band Edge
42	802.11be EHT320	95	12850.00	48.78	88.20	-39.42	V	Peak	Pass	Harmonic
43	802.11be EHT320	127	-	-	-	-	-	-	-	Band Edge
43	802.11be EHT320	127	13170.00	50.07	88.20	-38.13	V	Peak	Pass	Harmonic
44	802.11be EHT20	1	5908.16	42.55	68.20	-25.65	H	Average	Pass	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
44	802.11be EHT20	1	-	-	-	-	-	-	-	Harmonic
45	802.11be EHT20	1	5910.26	42.34	68.20	-25.86	H	Average	Pass	Band Edge
45	802.11be EHT20	1	-	-	-	-	-	-	-	Harmonic
46	802.11be EHT20	1	5909.84	42.38	68.20	-25.82	H	Average	Pass	Band Edge
46	802.11be EHT20	1	-	-	-	-	-	-	-	Harmonic
47	802.11be EHT20	229	7264.91	41.43	54.00	-12.57	H	Average	Pass	Band Edge
47	802.11be EHT20	229	-	-	-	-	-	-	-	Harmonic
48	802.11be EHT20	229	7265.84	41.20	54.00	-12.80	V	Average	Pass	Band Edge
48	802.11be EHT20	229	-	-	-	-	-	-	-	Harmonic
49	802.11be EHT20	229	7263.98	41.61	54.00	-12.39	H	Average	Pass	Band Edge
49	802.11be EHT20	229	-	-	-	-	-	-	-	Harmonic
50	802.11be EHT20	1	5910.96	42.71	68.20	-25.49	H	Average	Pass	Band Edge
50	802.11be EHT20	1	-	-	-	-	-	-	-	Harmonic
51	802.11be EHT20	1	5909.98	42.69	68.20	-25.51	H	Average	Pass	Band Edge
51	802.11be EHT20	1	-	-	-	-	-	-	-	Harmonic
52	802.11be EHT20	229	7266.30	41.09	54.00	-12.91	H	Average	Pass	Band Edge
52	802.11be EHT20	229	-	-	-	-	-	-	-	Harmonic
53	802.11be EHT20	229	7265.84	41.14	54.00	-12.86	H	Average	Pass	Band Edge
53	802.11be EHT20	229	-	-	-	-	-	-	-	Harmonic
54	802.11be EHT80	7	5914.32	47.07	68.20	-21.13	H	Average	Pass	Band Edge
54	802.11be EHT80	7	-	-	-	-	-	-	-	Harmonic
55	802.11be EHT80	215	7264.91	41.18	54.00	-12.82	H	Average	Pass	Band Edge
55	802.11be EHT80	215	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT160	15	5867.00	47.73	68.20	-20.47	H	Average	Pass	Band Edge
56	802.11be EHT160	15	-	-	-	-	-	-	-	Harmonic
57	802.11be EHT160	207	7266.30	41.21	54.00	-12.79	H	Average	Pass	Band Edge
57	802.11be EHT160	207	-	-	-	-	-	-	-	Harmonic
58	802.11be EHT320	31	5907.58	55.03	68.20	-13.17	H	Average	Pass	Band Edge
58	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT320	191	7250.03	41.35	54.00	-12.65	H	Average	Pass	Band Edge
59	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT320	31	5625.03	49.55	68.20	-18.65	H	Average	Pass	Band Edge
60	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
61	802.11be EHT320	191	7252.35	41.28	54.00	-12.72	H	Average	Pass	Band Edge
61	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
62	802.11be EHT320	31	5625.03	72.85	88.20	-15.35	H	Peak	Pass	Band Edge
62	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
63	802.11be EHT320	191	7262.58	41.36	54.00	-12.64	H	Average	Pass	Band Edge
63	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
64	802.11be EHT80	7	5923.28	43.79	68.20	-24.41	H	Average	Pass	Band Edge
64	802.11be EHT80	7	-	-	-	-	-	-	-	Harmonic
65	802.11be EHT80	215	7266.77	41.10	54.00	-12.90	H	Average	Pass	Band Edge
65	802.11be EHT80	215	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT160	15	5924.12	53.57	68.20	-14.63	H	Average	Pass	Band Edge
66	802.11be EHT160	15	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
67	802.11be EHT160	207	7266.30	40.95	54.00	-13.05	H	Average	Pass	Band Edge
67	802.11be EHT160	207	-	-	-	-	-	-	-	Harmonic
68	802.11be EHT160	15	5922.16	47.25	68.20	-20.95	H	Average	Pass	Band Edge
68	802.11be EHT160	15	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT160	207	7265.37	41.01	54.00	-12.99	H	Average	Pass	Band Edge
69	802.11be EHT160	207	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT320	31	5918.05	54.80	68.20	-13.40	H	Average	Pass	Band Edge
70	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT320	191	7250.03	41.56	54.00	-12.44	H	Average	Pass	Band Edge
71	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT320	31	5625.03	48.56	68.20	-19.64	H	Average	Pass	Band Edge
72	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT320	191	7250.49	41.20	54.00	-12.80	H	Average	Pass	Band Edge
73	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT320	31	5625.03	48.56	68.20	-19.64	H	Average	Pass	Band Edge
74	802.11be EHT320	31	-	-	-	-	-	-	-	Harmonic
75	802.11be EHT320	191	7250.49	41.37	54.00	-12.63	H	Average	Pass	Band Edge
75	802.11be EHT320	191	-	-	-	-	-	-	-	Harmonic
76	802.11a	31	941.80	32.71	40	-13.29	V	PEAK	PASS	LF
77	802.11a	233	7125.00	62.87	68.20	-5.33	H	Peak	Pass	Band Edge
77	802.11a	233	14230.00	47.92	88.20	-40.28	H	Peak	Pass	Harmonic
78	802.11be EHT20	233	7125.00	62.75	68.20	-5.45	H	Average	Pass	Band Edge
78	802.11be EHT20	233	14230.00	47.70	88.20	-40.50	V	Peak	Pass	Harmonic
79	802.11be EHT20	233	7125.00	62.54	68.20	-5.66	H	Average	Pass	Band Edge
79	802.11be EHT20	233	-	-	-	-	-	-	-	Harmonic
80	802.11be EHT20	233	7125.00	62.75	68.20	-5.45	H	Average	Pass	Band Edge
80	802.11be EHT20	233	-	-	-	-	-	-	-	Harmonic
81	802.11be EHT20	233	7125.00	62.68	68.20	-5.52	H	Average	Pass	Band Edge
81	802.11be EHT20	233	-	-	-	-	-	-	-	Harmonic
82	802.11be EHT20	233	7125.00	58.36	68.20	-9.84	H	Average	Pass	Band Edge
82	802.11be EHT20	233	-	-	-	-	-	-	-	Harmonic
83	802.11be EHT20	233	7125.00	62.60	68.20	-5.60	H	Average	Pass	Band Edge
83	802.11be EHT20	233	-	-	-	-	-	-	-	Harmonic
87	802.11be EHT40	43	-	-	-	-	-	-	-	Band Edge
87	802.11be EHT40	43	12330.00	47.92	74.00	-26.08	H	Peak	Pass	Harmonic
88	802.11be EHT40	91	-	-	-	-	-	-	-	Band Edge
88	802.11be EHT40	91	12810.00	48.89	88.20	-39.31	H	Peak	Pass	Harmonic
89	802.11be EHT40	99	-	-	-	-	-	-	-	Band Edge
89	802.11be EHT40	99	12890.00	48.31	88.20	-39.89	H	Peak	Pass	Harmonic
90	802.11be EHT40	107	-	-	-	-	-	-	-	Band Edge
90	802.11be EHT40	107	12970.00	48.40	88.20	-39.80	H	Peak	Pass	Harmonic
91	802.11be EHT40	123	-	-	-	-	-	-	-	Band Edge
91	802.11be EHT40	123	13130.00	49.24	88.20	-38.96	H	Peak	Pass	Harmonic
92	802.11be EHT40	147	-	-	-	-	-	-	-	Band Edge
92	802.11be EHT40	147	13370.00	48.79	74.00	-25.21	H	Peak	Pass	Harmonic





Mode	Modulation	Ch.	Freq. (MHz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
93	802.11be EHT40	179	-	-	-	-	-	-	-	Band Edge
93	802.11be EHT40	179	13690.00	50.63	88.20	-37.57	H	Peak	Pass	Harmonic
94	802.11be EHT40	195	-	-	-	-	-	-	-	Band Edge
94	802.11be EHT40	195	13850.00	49.96	88.20	-38.24	V	Peak	Pass	Harmonic
95	802.11be EHT40	203	-	-	-	-	-	-	-	Band Edge
95	802.11be EHT40	203	13930.00	50.41	88.20	-37.79	H	Peak	Pass	Harmonic
96	802.11be EHT80	39	-	-	-	-	-	-	-	Band Edge
96	802.11be EHT80	39	12290.00	49.06	74.00	-24.94	H	Peak	Pass	Harmonic
97	802.11be EHT80	87	-	-	-	-	-	-	-	Band Edge
97	802.11be EHT80	87	12770.00	48.49	88.20	-39.71	V	Peak	Pass	Harmonic
98	802.11be EHT80	103	-	-	-	-	-	-	-	Band Edge
98	802.11be EHT80	103	12930.00	48.77	88.20	-39.43	V	Peak	Pass	Harmonic
99	802.11be EHT80	135	-	-	-	-	-	-	-	Band Edge
99	802.11be EHT80	135	13250.00	49.11	74.00	-24.89	V	Peak	Pass	Harmonic
100	802.11be EHT80	151	-	-	-	-	-	-	-	Band Edge
100	802.11be EHT80	151	13410.00	48.04	88.20	-40.16	H	Peak	Pass	Harmonic
101	802.11be EHT80	167	-	-	-	-	-	-	-	Band Edge
101	802.11be EHT80	167	13570.00	48.90	88.20	-39.30	V	Peak	Pass	Harmonic
102	802.11be EHT80	199	-	-	-	-	-	-	-	Band Edge
102	802.11be EHT80	199	13890.00	49.16	88.20	-39.04	H	Peak	Pass	Harmonic
103	802.11be EHT160	47	-	-	-	-	-	-	-	Band Edge
103	802.11be EHT160	47	12370.00	47.40	74.00	-26.60	V	Peak	Pass	Harmonic
104	802.11be EHT160	79	-	-	-	-	-	-	-	Band Edge
104	802.11be EHT160	79	12690.00	47.48	74.00	-26.52	V	Peak	Pass	Harmonic
105	802.11be EHT160	143	-	-	-	-	-	-	-	Band Edge
105	802.11be EHT160	143	13330.00	48.15	74.00	-25.85	V	Peak	Pass	Harmonic
106	802.11a	185	-	-	-	-	-	-	-	Band Edge
106	802.11a	185	13750.00	50.15	88.20	-38.05	H	Peak	Pass	Harmonic



Mode	1																																																																																																
	Harmonic																																																																																																
	UNII-5_5925-6425_802.11a_CH1_5955MHz																																																																																																
ANT	CDD 9+15																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>47.94</td> <td>74.00</td> <td>-26.06</td> <td>45.77</td> <td>39.44</td> <td>13.18</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17865.00</td> <td>47.79</td> <td>74.00</td> <td>-26.21</td> <td>39.07</td> <td>44.87</td> <td>16.20</td> <td>52.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11910.00	47.94	74.00	-26.06	45.77	39.44	13.18	50.45	---	---	Peak	2	17865.00	47.79	74.00	-26.21	39.07	44.87	16.20	52.35	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>47.89</td> <td>74.00</td> <td>-26.11</td> <td>45.72</td> <td>39.44</td> <td>13.18</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17865.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>38.88</td> <td>44.87</td> <td>16.20</td> <td>52.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11910.00	47.89	74.00	-26.11	45.72	39.44	13.18	50.45	---	---	Peak	2	17865.00	47.60	74.00	-26.40	38.88	44.87	16.20	52.35	---	---
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11910.00	47.94	74.00	-26.06	45.77	39.44	13.18	50.45	---	---	Peak																																																																																						
2	17865.00	47.79	74.00	-26.21	39.07	44.87	16.20	52.35	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11910.00	47.89	74.00	-26.11	45.72	39.44	13.18	50.45	---	---	Peak																																																																																						
2	17865.00	47.60	74.00	-26.40	38.88	44.87	16.20	52.35	---	---	Peak																																																																																						





Mode	2																																																																								
	Harmonic																																																																								
	UNII-5_5925-6425_802.11a_CH45_6175MHz																																																																								
ANT	CDD 9+15																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>46.35</td> <td>74.00</td> <td>-27.65</td> <td>43.79</td> <td>39.75</td> <td>13.35</td> <td>50.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	12350.00	46.35	74.00	-27.65	43.79	39.75	13.35	50.54	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12350.00</td> <td>46.91</td> <td>74.00</td> <td>-27.09</td> <td>44.35</td> <td>39.75</td> <td>13.35</td> <td>50.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	12350.00	46.91	74.00	-27.09	44.35	39.75	13.35	50.54	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	12350.00	46.35	74.00	-27.65	43.79	39.75	13.35	50.54	---	---	Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	12350.00	46.91	74.00	-27.09	44.35	39.75	13.35	50.54	---	---	Peak																																																														



Mode	3																																																																		
	Harmonic																																																																		
	UNII-5_5925-6425_802.11a_CH93_6415MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>47.37</td> <td>88.20</td> <td>-40.83</td> <td>44.57</td> <td>40.16</td> <td>13.50</td> <td>50.86</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12830.00	47.37	88.20	-40.83	44.57	40.16	13.50	50.86	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>47.48</td> <td>88.20</td> <td>-40.72</td> <td>44.68</td> <td>40.16</td> <td>13.50</td> <td>50.86</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12830.00	47.48	88.20	-40.72	44.68	40.16	13.50	50.86
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12830.00	47.37	88.20	-40.83	44.57	40.16	13.50	50.86	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12830.00	47.48	88.20	-40.72	44.68	40.16	13.50	50.86	--- --- Peak																																																											



Mode	4																																																																		
	Harmonic																																																																		
	UNII-5_5925-6425_802.11a_CH97_6435MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>47.52</td> <td>88.20</td> <td>-40.68</td> <td>44.70</td> <td>40.20</td> <td>13.52</td> <td>50.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12870.00	47.52	88.20	-40.68	44.70	40.20	13.52	50.90	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>47.66</td> <td>88.20</td> <td>-40.54</td> <td>44.84</td> <td>40.20</td> <td>13.52</td> <td>50.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12870.00	47.66	88.20	-40.54	44.84	40.20	13.52	50.90
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12870.00	47.52	88.20	-40.68	44.70	40.20	13.52	50.90	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12870.00	47.66	88.20	-40.54	44.84	40.20	13.52	50.90	--- --- Peak																																																											



Mode	5																																																																									
	Harmonic																																																																									
	UNII-6_6425-6525_802.11a_CH105_6475MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>46.40</td> <td>88.20</td> <td>-41.80</td> <td>43.56</td> <td>40.26</td> <td>13.54</td> <td>50.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	12950.00	46.40	88.20	-41.80	43.56	40.26	13.54	50.96	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12950.00</td> <td>47.91</td> <td>88.20</td> <td>-40.29</td> <td>45.07</td> <td>40.26</td> <td>13.54</td> <td>50.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	12950.00	47.91	88.20	-40.29	45.07	40.26	13.54	50.96	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	12950.00	46.40	88.20	-41.80	43.56	40.26	13.54	50.96	---	---	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	12950.00	47.91	88.20	-40.29	45.07	40.26	13.54	50.96	---	---	Peak																																																															



Mode	6																																																																		
	Harmonic																																																																		
	UNII-6_6425-6525_802.11a_CH113_6515MHZ																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>47.25</td> <td>88.20</td> <td>-40.95</td> <td>44.35</td> <td>40.32</td> <td>13.57</td> <td>50.99</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13030.00	47.25	88.20	-40.95	44.35	40.32	13.57	50.99	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>47.62</td> <td>88.20</td> <td>-40.58</td> <td>44.72</td> <td>40.32</td> <td>13.57</td> <td>50.99</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13030.00	47.62	88.20	-40.58	44.72	40.32	13.57	50.99
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13030.00	47.25	88.20	-40.95	44.35	40.32	13.57	50.99	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13030.00	47.62	88.20	-40.58	44.72	40.32	13.57	50.99	--- --- Peak																																																											



Mode	7																																																																			
	Harmonic																																																																			
	UNII-7_6525-6875_802.11a_CH117_6535MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>47.76</td> <td>88.20</td> <td>-40.44</td> <td>44.81</td> <td>40.34</td> <td>13.58</td> <td>50.97</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13070.00	47.76	88.20	-40.44	44.81	40.34	13.58	50.97	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>47.53</td> <td>88.20</td> <td>-40.67</td> <td>44.58</td> <td>40.34</td> <td>13.58</td> <td>50.97</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13070.00	47.53	88.20	-40.67	44.58	40.34	13.58	50.97	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1 13070.00	47.76	88.20	-40.44	44.81	40.34	13.58	50.97	--- --- Peak																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1 13070.00	47.53	88.20	-40.67	44.58	40.34	13.58	50.97	--- --- Peak																																																												



Mode	8																																																																																																	
	Harmonic																																																																																																	
	UNII-7_6525-6875_802.11a_CH149_6695MHz																																																																																																	
ANT	CDD 9+15																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>47.80</td> <td>74.00</td> <td>-26.20</td> <td>44.43</td> <td>40.53</td> <td>13.68</td> <td>50.84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13390.00	47.80	74.00	-26.20	44.43	40.53	13.68	50.84							---	---								Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>47.14</td> <td>74.00</td> <td>-26.86</td> <td>43.77</td> <td>40.53</td> <td>13.68</td> <td>50.84</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13390.00	47.14	74.00	-26.86	43.77	40.53	13.68	50.84							---	---								Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 13390.00	47.80	74.00	-26.20	44.43	40.53	13.68	50.84																																																																																											
						---	---																																																																																											
							Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 13390.00	47.14	74.00	-26.86	43.77	40.53	13.68	50.84																																																																																											
						---	---																																																																																											
							Peak																																																																																											



Mode	9																																																																																																	
	Harmonic																																																																																																	
	UNII-7_6525-6875_802.11a_CH181_6855MHz																																																																																																	
ANT	CDD 9+15																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak																																																																																																		
Avg																																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>47.08</td> <td>88.20</td> <td>-41.12</td> <td>43.33</td> <td>40.73</td> <td>13.78</td> <td>50.76</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13710.00	47.08	88.20	-41.12	43.33	40.73	13.78	50.76							---	---								Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>47.63</td> <td>88.20</td> <td>-40.57</td> <td>43.88</td> <td>40.73</td> <td>13.78</td> <td>50.76</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>---</td> <td>---</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13710.00	47.63	88.20	-40.57	43.88	40.73	13.78	50.76							---	---								Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 13710.00	47.08	88.20	-41.12	43.33	40.73	13.78	50.76																																																																																											
						---	---																																																																																											
							Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 13710.00	47.63	88.20	-40.57	43.88	40.73	13.78	50.76																																																																																											
						---	---																																																																																											
							Peak																																																																																											





Mode	10																																																																		
	Harmonic																																																																		
	UNII-8_6875-7125_802.11a_CH189_6895MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>47.38</td> <td>88.20</td> <td>-40.82</td> <td>43.54</td> <td>40.77</td> <td>13.81</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13790.00	47.38	88.20	-40.82	43.54	40.77	13.81	50.74	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>47.95</td> <td>88.20</td> <td>-40.25</td> <td>44.11</td> <td>40.77</td> <td>13.81</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13790.00	47.95	88.20	-40.25	44.11	40.77	13.81	50.74
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13790.00	47.38	88.20	-40.82	43.54	40.77	13.81	50.74	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13790.00	47.95	88.20	-40.25	44.11	40.77	13.81	50.74	--- --- Peak																																																											



Mode	11																																																																			
	Harmonic																																																																			
	UNII-8_6875-7125_802.11a_CH209_6995MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>47.53</td> <td>88.20</td> <td>-40.67</td> <td>43.47</td> <td>40.89</td> <td>13.87</td> <td>50.70</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13990.00	47.53	88.20	-40.67	43.47	40.89	13.87	50.70	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>47.72</td> <td>88.20</td> <td>-40.48</td> <td>43.66</td> <td>40.89</td> <td>13.87</td> <td>50.70</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13990.00	47.72	88.20	-40.48	43.66	40.89	13.87	50.70	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1 13990.00	47.53	88.20	-40.67	43.47	40.89	13.87	50.70	--- --- Peak																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1 13990.00	47.72	88.20	-40.48	43.66	40.89	13.87	50.70	--- --- Peak																																																												



Mode	12																																																																		
	Harmonic																																																																		
	UNII-8_6875-7125_802.11a_CH229_7095MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>47.56</td> <td>88.20</td> <td>-40.64</td> <td>43.33</td> <td>41.01</td> <td>13.96</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 14190.00	47.56	88.20	-40.64	43.33	41.01	13.96	50.74	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>46.72</td> <td>88.20</td> <td>-41.48</td> <td>42.49</td> <td>41.01</td> <td>13.96</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 14190.00	46.72	88.20	-41.48	42.49	41.01	13.96	50.74
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 14190.00	47.56	88.20	-40.64	43.33	41.01	13.96	50.74	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 14190.00	46.72	88.20	-41.48	42.49	41.01	13.96	50.74	--- --- Peak																																																											



Mode	13																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT20_CH1_5955MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.58</td> <td>53.82</td> <td>88.20</td> <td>-34.38</td> <td>40.15</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>14</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5922.58	53.82	88.20	-34.38	40.15	36.59	10.43	33.35	100	14	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>104.80</td> <td>-----</td> <td>-----</td> <td>90.99</td> <td>36.64</td> <td>10.50</td> <td>33.33</td> <td>100</td> <td>14</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5955.00	104.80	-----	-----	90.99	36.64	10.50	33.33	100	14	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5922.58	53.82	88.20	-34.38	40.15	36.59	10.43	33.35	100	14	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5955.00	104.80	-----	-----	90.99	36.64	10.50	33.33	100	14	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.40</td> <td>41.89</td> <td>68.20</td> <td>-26.31</td> <td>28.21</td> <td>36.59</td> <td>10.44</td> <td>33.35</td> <td>100</td> <td>14</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5924.40	41.89	68.20	-26.31	28.21	36.59	10.44	33.35	100	14	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>94.60</td> <td>-----</td> <td>-----</td> <td>80.79</td> <td>36.64</td> <td>10.50</td> <td>33.33</td> <td>100</td> <td>14</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5955.00	94.60	-----	-----	80.79	36.64	10.50	33.33	100	14	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5924.40	41.89	68.20	-26.31	28.21	36.59	10.44	33.35	100	14	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5955.00	94.60	-----	-----	80.79	36.64	10.50	33.33	100	14	Average																																																															



Mode	13																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT20_CH1_5955MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5874.28</td> <td>53.12</td> <td>88.20</td> <td>-35.08</td> <td>39.65</td> <td>36.52</td> <td>10.33</td> <td>33.38</td> <td>100</td> <td>68</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5874.28	53.12	88.20	-35.08	39.65	36.52	10.33	33.38	100	68	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>101.01</td> <td>-----</td> <td>-----</td> <td>87.20</td> <td>36.64</td> <td>10.50</td> <td>33.33</td> <td>100</td> <td>68</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5955.00	101.01	-----	-----	87.20	36.64	10.50	33.33	100	68	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5874.28	53.12	88.20	-35.08	39.65	36.52	10.33	33.38	100	68	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5955.00	101.01	-----	-----	87.20	36.64	10.50	33.33	100	68	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.42</td> <td>42.39</td> <td>68.20</td> <td>-25.81</td> <td>28.71</td> <td>36.59</td> <td>10.44</td> <td>33.35</td> <td>100</td> <td>68</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5923.42	42.39	68.20	-25.81	28.71	36.59	10.44	33.35	100	68	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5955.00</td> <td>91.27</td> <td>-----</td> <td>-----</td> <td>77.46</td> <td>36.64</td> <td>10.50</td> <td>33.33</td> <td>100</td> <td>68</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5955.00	91.27	-----	-----	77.46	36.64	10.50	33.33	100	68	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5923.42	42.39	68.20	-25.81	28.71	36.59	10.44	33.35	100	68	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5955.00	91.27	-----	-----	77.46	36.64	10.50	33.33	100	68	Average																																																															



Mode	13																																																																																																											
	Harmonic																																																																																																											
	UNII-5_5925-6425_802.11be EHT20_CH1_5955MHz																																																																																																											
ANT	CDD 9+15																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>47.17</td> <td>74.00</td> <td>-26.83</td> <td>45.00</td> <td>39.44</td> <td>13.18</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17865.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>38.88</td> <td>44.87</td> <td>16.20</td> <td>52.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	47.17	74.00	-26.83	45.00	39.44	13.18	50.45	---	---	Peak	2	17865.00	47.60	74.00	-26.40	38.88	44.87	16.20	52.35	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11910.00</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>45.21</td> <td>39.44</td> <td>13.18</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17865.00</td> <td>47.37</td> <td>74.00</td> <td>-26.63</td> <td>38.65</td> <td>44.87</td> <td>16.20</td> <td>52.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11910.00	47.38	74.00	-26.62	45.21	39.44	13.18	50.45	---	---	Peak	2	17865.00	47.37	74.00	-26.63	38.65	44.87	16.20	52.35	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11910.00	47.17	74.00	-26.83	45.00	39.44	13.18	50.45	---	---	Peak																																																																																																	
2	17865.00	47.60	74.00	-26.40	38.88	44.87	16.20	52.35	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11910.00	47.38	74.00	-26.62	45.21	39.44	13.18	50.45	---	---	Peak																																																																																																	
2	17865.00	47.37	74.00	-26.63	38.65	44.87	16.20	52.35	---	---	Peak																																																																																																	



Mode	14																																																																		
	Harmonic																																																																		
	UNII-5_5925-6425_802.11be EHT20_CH45_6175MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12350.00</td> <td>47.63</td> <td>74.00</td> <td>-26.37</td> <td>45.07</td> <td>39.75</td> <td>13.35</td> <td>50.54</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12350.00	47.63	74.00	-26.37	45.07	39.75	13.35	50.54	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12350.00</td> <td>47.95</td> <td>74.00</td> <td>-26.05</td> <td>45.39</td> <td>39.75</td> <td>13.35</td> <td>50.54</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12350.00	47.95	74.00	-26.05	45.39	39.75	13.35	50.54
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12350.00	47.63	74.00	-26.37	45.07	39.75	13.35	50.54	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12350.00	47.95	74.00	-26.05	45.39	39.75	13.35	50.54	--- --- Peak																																																											



Mode	15																																																																		
	Harmonic																																																																		
	UNII-5_5925-6425_802.11be EHT20_CH93_6415MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg	<p>Date: 2023-09-10</p>	<p>Date: 2023-09-10</p>																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>47.25</td> <td>88.20</td> <td>-40.95</td> <td>44.45</td> <td>40.16</td> <td>13.50</td> <td>50.86</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12830.00	47.25	88.20	-40.95	44.45	40.16	13.50	50.86	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12830.00</td> <td>47.82</td> <td>88.20</td> <td>-40.38</td> <td>45.02</td> <td>40.16</td> <td>13.50</td> <td>50.86</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12830.00	47.82	88.20	-40.38	45.02	40.16	13.50	50.86
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12830.00	47.25	88.20	-40.95	44.45	40.16	13.50	50.86	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12830.00	47.82	88.20	-40.38	45.02	40.16	13.50	50.86	--- --- Peak																																																											





Mode	16																																																																		
	Harmonic																																																																		
	UNII-5_5925-6425_802.11be EHT20_CH97_6435MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>47.73</td> <td>88.20</td> <td>-40.47</td> <td>44.91</td> <td>40.20</td> <td>13.52</td> <td>50.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12870.00	47.73	88.20	-40.47	44.91	40.20	13.52	50.90	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12870.00</td> <td>47.55</td> <td>88.20</td> <td>-40.65</td> <td>44.73</td> <td>40.20</td> <td>13.52</td> <td>50.90</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12870.00	47.55	88.20	-40.65	44.73	40.20	13.52	50.90
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12870.00	47.73	88.20	-40.47	44.91	40.20	13.52	50.90	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12870.00	47.55	88.20	-40.65	44.73	40.20	13.52	50.90	--- --- Peak																																																											



Mode	17																																																																		
	Harmonic																																																																		
	UNII-6_6425-6525_802.11be EHT20_CH105_6475MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>46.52</td> <td>88.20</td> <td>-41.68</td> <td>43.68</td> <td>40.26</td> <td>13.54</td> <td>50.96</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12950.00	46.52	88.20	-41.68	43.68	40.26	13.54	50.96	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 12950.00</td> <td>46.69</td> <td>88.20</td> <td>-41.51</td> <td>43.85</td> <td>40.26</td> <td>13.54</td> <td>50.96</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 12950.00	46.69	88.20	-41.51	43.85	40.26	13.54	50.96
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12950.00	46.52	88.20	-41.68	43.68	40.26	13.54	50.96	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 12950.00	46.69	88.20	-41.51	43.85	40.26	13.54	50.96	--- --- Peak																																																											



Mode	18																																																																		
	Harmonic																																																																		
	UNII-6_6425-6525_802.11be EHT20_CH113_6515MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>47.86</td> <td>88.20</td> <td>-40.34</td> <td>44.96</td> <td>40.32</td> <td>13.57</td> <td>50.99</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13030.00	47.86	88.20	-40.34	44.96	40.32	13.57	50.99	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13030.00</td> <td>47.65</td> <td>88.20</td> <td>-40.55</td> <td>44.75</td> <td>40.32</td> <td>13.57</td> <td>50.99</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13030.00	47.65	88.20	-40.55	44.75	40.32	13.57	50.99
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13030.00	47.86	88.20	-40.34	44.96	40.32	13.57	50.99	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13030.00	47.65	88.20	-40.55	44.75	40.32	13.57	50.99	--- --- Peak																																																											



Mode	19																																																																		
	Harmonic																																																																		
	UNII-7_6525-6875_802.11be EHT20_CH117_Full_6535MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>47.89</td> <td>88.20</td> <td>-40.31</td> <td>44.94</td> <td>40.34</td> <td>13.58</td> <td>50.97</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13070.00	47.89	88.20	-40.31	44.94	40.34	13.58	50.97	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13070.00</td> <td>47.24</td> <td>88.20</td> <td>-40.96</td> <td>44.29</td> <td>40.34</td> <td>13.58</td> <td>50.97</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13070.00	47.24	88.20	-40.96	44.29	40.34	13.58	50.97
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13070.00	47.89	88.20	-40.31	44.94	40.34	13.58	50.97	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13070.00	47.24	88.20	-40.96	44.29	40.34	13.58	50.97	--- --- Peak																																																											



Mode	20																																																																		
	Harmonic																																																																		
	UNII-7_6525-6875_802.11be EHT20_CH149_Full_6695MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>47.51</td> <td>74.00</td> <td>-26.49</td> <td>44.14</td> <td>40.53</td> <td>13.68</td> <td>50.84</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13390.00	47.51	74.00	-26.49	44.14	40.53	13.68	50.84	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13390.00</td> <td>47.18</td> <td>74.00</td> <td>-26.82</td> <td>43.81</td> <td>40.53</td> <td>13.68</td> <td>50.84</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13390.00	47.18	74.00	-26.82	43.81	40.53	13.68	50.84
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13390.00	47.51	74.00	-26.49	44.14	40.53	13.68	50.84	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13390.00	47.18	74.00	-26.82	43.81	40.53	13.68	50.84	--- --- Peak																																																											



Mode	21																																																																		
	Harmonic																																																																		
	UNII-7_6525-6875_802.11be EHT20_CH181_Full_6855MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>47.85</td> <td>88.20</td> <td>-40.35</td> <td>44.10</td> <td>40.73</td> <td>13.78</td> <td>50.76</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13710.00	47.85	88.20	-40.35	44.10	40.73	13.78	50.76	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13710.00</td> <td>47.42</td> <td>88.20</td> <td>-40.78</td> <td>43.67</td> <td>40.73</td> <td>13.78</td> <td>50.76</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13710.00	47.42	88.20	-40.78	43.67	40.73	13.78	50.76
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13710.00	47.85	88.20	-40.35	44.10	40.73	13.78	50.76	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13710.00	47.42	88.20	-40.78	43.67	40.73	13.78	50.76	--- --- Peak																																																											







Mode	22																																																																		
	Harmonic																																																																		
	UNII-8_6875-7125_802.11be EHT20_CH189_Full_6895MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>47.00</td> <td>88.20</td> <td>-41.20</td> <td>43.16</td> <td>40.77</td> <td>13.81</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13790.00	47.00	88.20	-41.20	43.16	40.77	13.81	50.74	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13790.00</td> <td>47.93</td> <td>88.20</td> <td>-40.27</td> <td>44.09</td> <td>40.77</td> <td>13.81</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13790.00	47.93	88.20	-40.27	44.09	40.77	13.81	50.74
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13790.00	47.00	88.20	-41.20	43.16	40.77	13.81	50.74	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13790.00	47.93	88.20	-40.27	44.09	40.77	13.81	50.74	--- --- Peak																																																											







Mode	23																																																																		
	Harmonic																																																																		
	UNII-8_6875-7125_802.11be EHT20_CH209_Full_6995MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>47.53</td> <td>88.20</td> <td>-40.67</td> <td>43.47</td> <td>40.89</td> <td>13.87</td> <td>50.70</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13990.00	47.53	88.20	-40.67	43.47	40.89	13.87	50.70	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 13990.00</td> <td>47.20</td> <td>88.20</td> <td>-41.00</td> <td>43.14</td> <td>40.89</td> <td>13.87</td> <td>50.70</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 13990.00	47.20	88.20	-41.00	43.14	40.89	13.87	50.70
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13990.00	47.53	88.20	-40.67	43.47	40.89	13.87	50.70	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 13990.00	47.20	88.20	-41.00	43.14	40.89	13.87	50.70	--- --- Peak																																																											



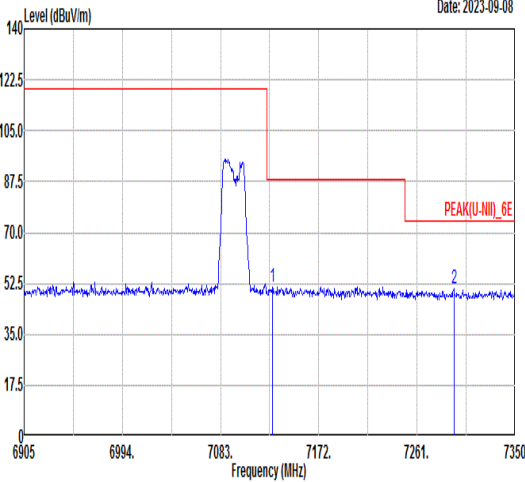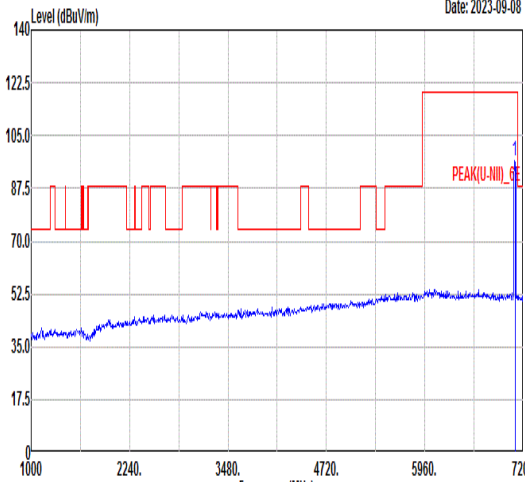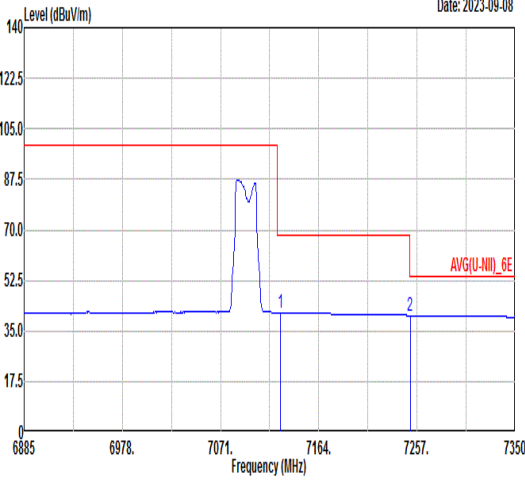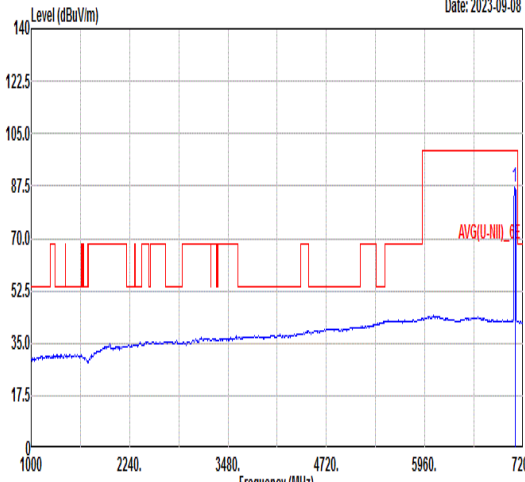

Mode	24																																																																																					
	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT20_CH229_Full_7095MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7129.73</td> <td>51.41</td> <td>88.20</td> <td>-36.79</td> <td>38.06</td> <td>36.61</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>27</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7294.38</td> <td>50.72</td> <td>74.00</td> <td>-23.28</td> <td>37.67</td> <td>36.25</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>27</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7129.73	51.41	88.20	-36.79	38.06	36.61	10.19	33.45	100	27	Peak	2	7294.38	50.72	74.00	-23.28	37.67	36.25	10.18	33.38	100	27	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>96.68</td> <td>-----</td> <td>-----</td> <td>83.25</td> <td>36.69</td> <td>10.20</td> <td>33.46</td> <td>100</td> <td>27</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7095.00	96.68	-----	-----	83.25	36.69	10.20	33.46	100	27	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7129.73	51.41	88.20	-36.79	38.06	36.61	10.19	33.45	100	27	Peak																																																																											
2	7294.38	50.72	74.00	-23.28	37.67	36.25	10.18	33.38	100	27	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7095.00	96.68	-----	-----	83.25	36.69	10.20	33.46	100	27	Peak																																																																											
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7127.73</td> <td>41.31</td> <td>68.20</td> <td>-26.89</td> <td>27.94</td> <td>36.62</td> <td>10.20</td> <td>33.45</td> <td>100</td> <td>27</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7250.49</td> <td>40.40</td> <td>54.00</td> <td>-13.60</td> <td>27.27</td> <td>36.35</td> <td>10.18</td> <td>33.40</td> <td>100</td> <td>27</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7127.73	41.31	68.20	-26.89	27.94	36.62	10.20	33.45	100	27	Average	2	7250.49	40.40	54.00	-13.60	27.27	36.35	10.18	33.40	100	27	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>86.91</td> <td>-----</td> <td>-----</td> <td>73.48</td> <td>36.69</td> <td>10.20</td> <td>33.46</td> <td>100</td> <td>27</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7095.00	86.91	-----	-----	73.48	36.69	10.20	33.46	100	27	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7127.73	41.31	68.20	-26.89	27.94	36.62	10.20	33.45	100	27	Average																																																																											
2	7250.49	40.40	54.00	-13.60	27.27	36.35	10.18	33.40	100	27	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7095.00	86.91	-----	-----	73.48	36.69	10.20	33.46	100	27	Average																																																																											

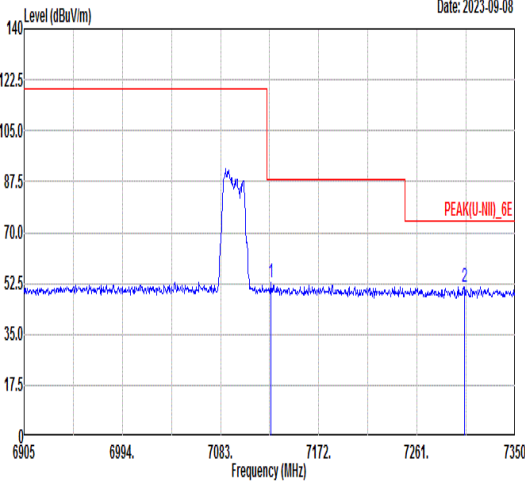
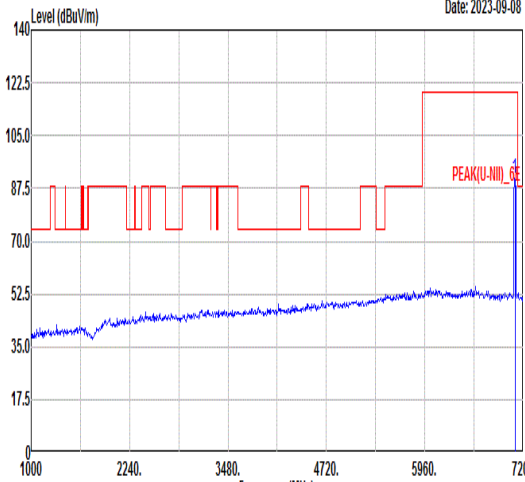
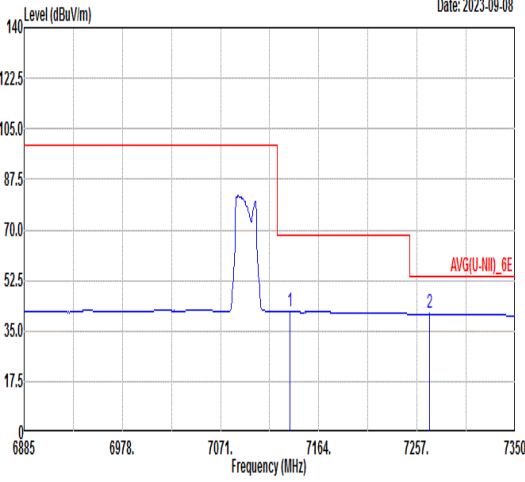
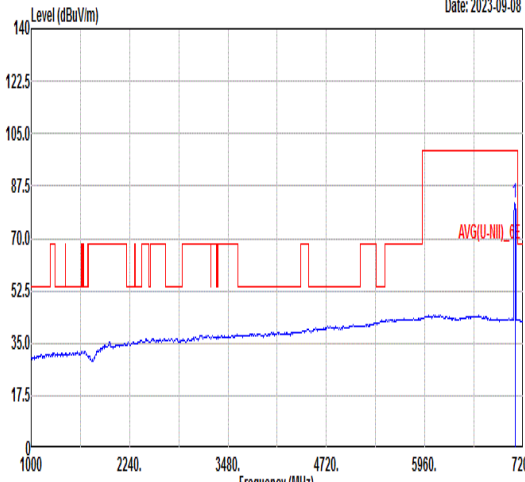


Mode	24																																																																																					
	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT20_CH229_Full_7095MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7128.84</td> <td>53.04</td> <td>88.20</td> <td>-35.16</td> <td>39.68</td> <td>36.62</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>106</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7303.72</td> <td>51.32</td> <td>74.00</td> <td>-22.68</td> <td>38.29</td> <td>36.23</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>106</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7128.84	53.04	88.20	-35.16	39.68	36.62	10.19	33.45	100	106	Peak	2	7303.72	51.32	74.00	-22.68	38.29	36.23	10.18	33.38	100	106	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>90.97</td> <td>-----</td> <td>-----</td> <td>77.54</td> <td>36.69</td> <td>10.20</td> <td>33.46</td> <td>100</td> <td>106</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7095.00	90.97	-----	-----	77.54	36.69	10.20	33.46	100	106	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7128.84	53.04	88.20	-35.16	39.68	36.62	10.19	33.45	100	106	Peak																																																																											
2	7303.72	51.32	74.00	-22.68	38.29	36.23	10.18	33.38	100	106	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7095.00	90.97	-----	-----	77.54	36.69	10.20	33.46	100	106	Peak																																																																											
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7136.57</td> <td>41.78</td> <td>68.20</td> <td>-26.42</td> <td>28.44</td> <td>36.60</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>106</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7268.63</td> <td>40.95</td> <td>54.00</td> <td>-13.05</td> <td>27.85</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>106</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7136.57	41.78	68.20	-26.42	28.44	36.60	10.19	33.45	100	106	Average	2	7268.63	40.95	54.00	-13.05	27.85	36.31	10.18	33.39	100	106	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7095.00</td> <td>81.91</td> <td>-----</td> <td>-----</td> <td>68.48</td> <td>36.69</td> <td>10.20</td> <td>33.46</td> <td>100</td> <td>106</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7095.00	81.91	-----	-----	68.48	36.69	10.20	33.46	100	106	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7136.57	41.78	68.20	-26.42	28.44	36.60	10.19	33.45	100	106	Average																																																																											
2	7268.63	40.95	54.00	-13.05	27.85	36.31	10.18	33.39	100	106	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7095.00	81.91	-----	-----	68.48	36.69	10.20	33.46	100	106	Average																																																																											



Mode	24																																																																		
	Harmonic																																																																		
	UNII-8_6875-7125_802.11be EHT20_CH229_Full_7095MHz																																																																		
ANT	CDD 9+15																																																																		
Pol.	Horizontal	Vertical																																																																	
Peak Avg																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>47.50</td> <td>88.20</td> <td>-40.70</td> <td>43.27</td> <td>41.01</td> <td>13.96</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 14190.00	47.50	88.20	-40.70	43.27	41.01	13.96	50.74	--- --- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 14190.00</td> <td>46.44</td> <td>88.20</td> <td>-41.76</td> <td>42.21</td> <td>41.01</td> <td>13.96</td> <td>50.74</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 14190.00	46.44	88.20	-41.76	42.21	41.01	13.96	50.74
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 14190.00	47.50	88.20	-40.70	43.27	41.01	13.96	50.74	--- --- Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1 14190.00	46.44	88.20	-41.76	42.21	41.01	13.96	50.74	--- --- Peak																																																											

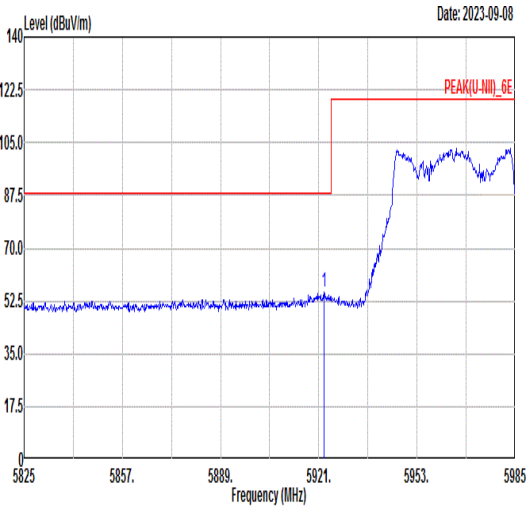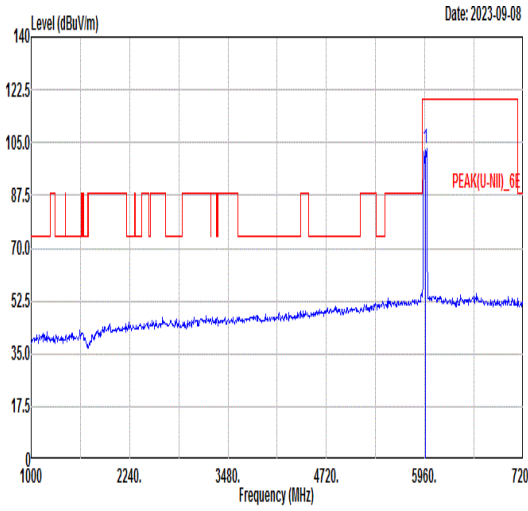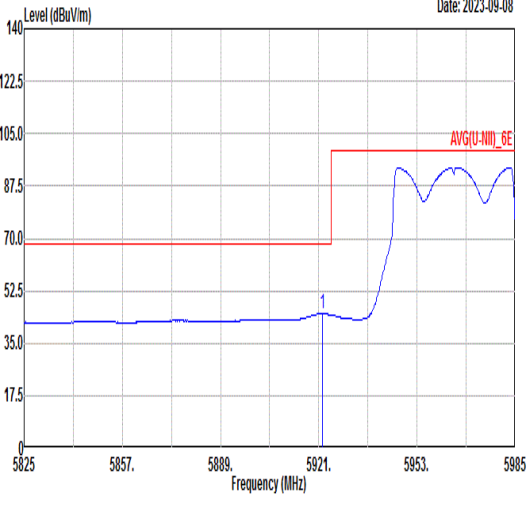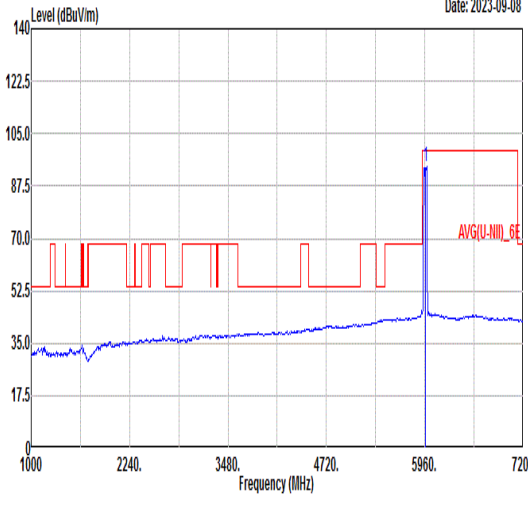

Mode	25																																																																																									
	Band Edge																																																																																									
	UNII-5_5925-6425_802.11be EHT40_CH3_Full_5965MHz																																																																																									
ANT	CDD 9+15																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.60</td> <td>55.23</td> <td>88.20</td> <td>-32.97</td> <td>41.56</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>41</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5922.60	55.23	88.20	-32.97	41.56	36.59	10.43	33.35	100	41	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>102.80</td> <td>-----</td> <td>-----</td> <td>88.95</td> <td>36.65</td> <td>10.52</td> <td>33.32</td> <td>100</td> <td>41</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5965.00	102.80	-----	-----	88.95	36.65	10.52	33.32	100	41	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																			
							deg																																																																																			
1	5922.60	55.23	88.20	-32.97	41.56	36.59	10.43	33.35	100	41	Peak																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																			
							deg																																																																																			
1	5965.00	102.80	-----	-----	88.95	36.65	10.52	33.32	100	41	Peak																																																																															
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.12</td> <td>44.94</td> <td>68.20</td> <td>-23.26</td> <td>31.27</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>41</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5922.12	44.94	68.20	-23.26	31.27	36.59	10.43	33.35	100	41	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>93.83</td> <td>-----</td> <td>-----</td> <td>79.98</td> <td>36.65</td> <td>10.52</td> <td>33.32</td> <td>100</td> <td>41</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5965.00	93.83	-----	-----	79.98	36.65	10.52	33.32	100	41	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																			
							deg																																																																																			
1	5922.12	44.94	68.20	-23.26	31.27	36.59	10.43	33.35	100	41	Average																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																			
							deg																																																																																			
1	5965.00	93.83	-----	-----	79.98	36.65	10.52	33.32	100	41	Average																																																																															



Mode	25																																																																	
	Band Edge																																																																	
	UNII-5_5925-6425_802.11be EHT40_CH3_Full_5965MHz																																																																	
ANT	CDD 9+15																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.52</td> <td>53.24</td> <td>88.20</td> <td>-34.96</td> <td>39.57</td> <td>36.59</td> <td>10.43 33.35 100 62 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5920.52	53.24	88.20	-34.96	39.57	36.59	10.43 33.35 100 62 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>94.91</td> <td>-----</td> <td>-----</td> <td>81.06</td> <td>36.65 10.52 33.32</td> <td>100 62 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5965.00	94.91	-----	-----	81.06	36.65 10.52 33.32	100 62 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1	5920.52	53.24	88.20	-34.96	39.57	36.59	10.43 33.35 100 62 Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1	5965.00	94.91	-----	-----	81.06	36.65 10.52 33.32	100 62 Peak																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.20</td> <td>42.42</td> <td>68.20</td> <td>-25.78</td> <td>28.74</td> <td>36.59</td> <td>10.44 33.35 100 62 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5924.20	42.42	68.20	-25.78	28.74	36.59	10.44 33.35 100 62 Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5965.00</td> <td>86.26</td> <td>-----</td> <td>-----</td> <td>72.41</td> <td>36.65 10.52 33.32</td> <td>100 62 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	5965.00	86.26	-----	-----	72.41	36.65 10.52 33.32	100 62 Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1	5924.20	42.42	68.20	-25.78	28.74	36.59	10.44 33.35 100 62 Average																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1	5965.00	86.26	-----	-----	72.41	36.65 10.52 33.32	100 62 Average																																																											







	25																																																																			
Mode	Harmonic																																																																			
	UNII-5_5925-6425_802.11be EHT40_CH3_Full_5965MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 11930.00</td> <td>47.32</td> <td>-26.68</td> <td>74.00</td> <td>58.24</td> <td>39.37</td> <td>13.18</td> <td>63.47</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 11930.00	47.32	-26.68	74.00	58.24	39.37	13.18	63.47	--- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 11930.00</td> <td>47.26</td> <td>-26.74</td> <td>74.00</td> <td>58.18</td> <td>39.37</td> <td>13.18</td> <td>63.47</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 11930.00	47.26	-26.74	74.00	58.18	39.37	13.18	63.47	--- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 11930.00	47.32	-26.68	74.00	58.24	39.37	13.18	63.47	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 11930.00	47.26	-26.74	74.00	58.18	39.37	13.18	63.47	--- --- Peak																																																												



		26																																																																																									
Mode	Band Edge																																																																																										
	UNII-8_6875-7125_802.11be EHT40_CH227_Full_7085MHz																																																																																										
ANT	CDD 9+15																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	<p style="text-align: right;">Date: 2023-09-08</p>	<p style="text-align: right;">Date: 2023-09-08</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7133.29</td> <td>52.78</td> <td>88.20</td> <td>-35.42</td> <td>39.43</td> <td>36.61</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>56 Peak</td> </tr> <tr> <td>2</td> <td>7271.68</td> <td>51.29</td> <td>74.00</td> <td>-22.71</td> <td>38.20</td> <td>36.30</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>56 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7133.29	52.78	88.20	-35.42	39.43	36.61	10.19	33.45	100	56 Peak	2	7271.68	51.29	74.00	-22.71	38.20	36.30	10.18	33.39	100	56 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>97.53</td> <td>-----</td> <td>-----</td> <td>84.09</td> <td>36.71</td> <td>10.20</td> <td>33.47</td> <td>100</td> <td>56 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7085.00	97.53	-----	-----	84.09	36.71	10.20	33.47	100
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7133.29	52.78	88.20	-35.42	39.43	36.61	10.19	33.45	100	56 Peak																																																																																	
2	7271.68	51.29	74.00	-22.71	38.20	36.30	10.18	33.39	100	56 Peak																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7085.00	97.53	-----	-----	84.09	36.71	10.20	33.47	100	56 Peak																																																																																	
Avg	<p style="text-align: right;">Date: 2023-09-08</p>	<p style="text-align: right;">Date: 2023-09-08</p>																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7130.52</td> <td>42.66</td> <td>68.20</td> <td>-25.54</td> <td>29.31</td> <td>36.61</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>56 Average</td> </tr> <tr> <td>2</td> <td>7269.09</td> <td>41.11</td> <td>54.00</td> <td>-12.89</td> <td>28.01</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>56 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7130.52	42.66	68.20	-25.54	29.31	36.61	10.19	33.45	100	56 Average	2	7269.09	41.11	54.00	-12.89	28.01	36.31	10.18	33.39	100	56 Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>89.10</td> <td>-----</td> <td>-----</td> <td>75.66</td> <td>36.71</td> <td>10.20</td> <td>33.47</td> <td>100</td> <td>56 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7085.00	89.10	-----	-----	75.66	36.71	10.20	33.47	100
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7130.52	42.66	68.20	-25.54	29.31	36.61	10.19	33.45	100	56 Average																																																																																	
2	7269.09	41.11	54.00	-12.89	28.01	36.31	10.18	33.39	100	56 Average																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7085.00	89.10	-----	-----	75.66	36.71	10.20	33.47	100	56 Average																																																																																	

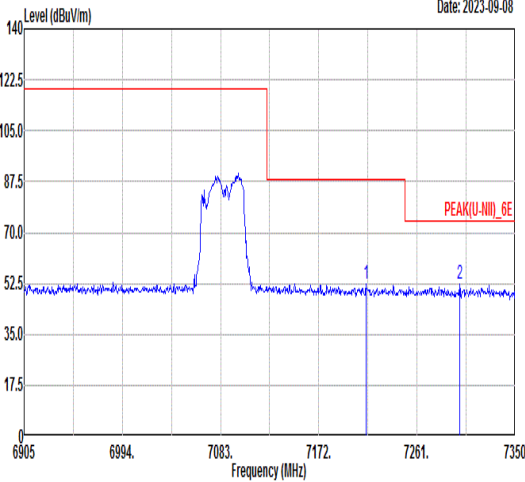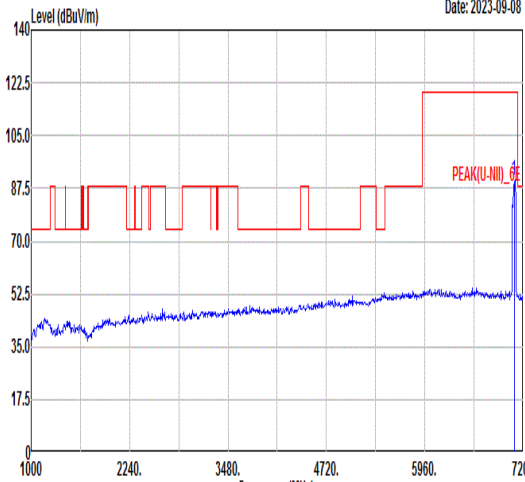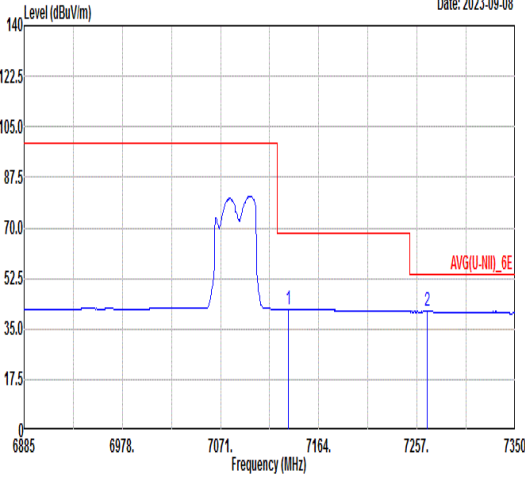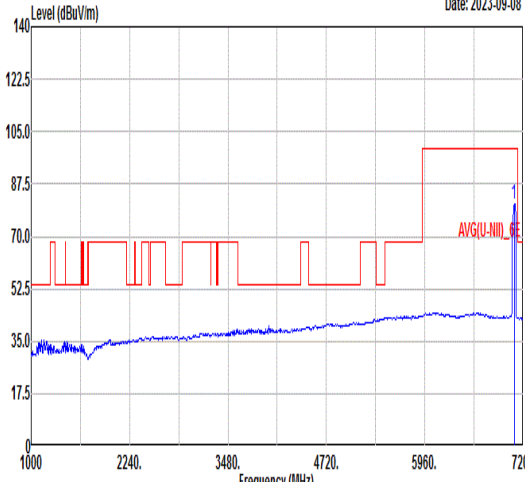

		26																																																																																				
Mode	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT40_CH227_Full_7085MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7214.72</td> <td>52.44</td> <td>88.20</td> <td>-35.76</td> <td>39.24</td> <td>36.43</td> <td>10.18</td> <td>33.41</td> <td>100</td> <td>322</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7299.72</td> <td>52.45</td> <td>74.00</td> <td>-21.55</td> <td>39.41</td> <td>36.24</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>322</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7214.72	52.44	88.20	-35.76	39.24	36.43	10.18	33.41	100	322	Peak	2	7299.72	52.45	74.00	-21.55	39.41	36.24	10.18	33.38	100	322	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>90.60</td> <td>-----</td> <td>-----</td> <td>77.16</td> <td>36.71</td> <td>10.20</td> <td>33.47</td> <td>100</td> <td>322</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7085.00	90.60	-----	-----	77.16	36.71	10.20	33.47	100	322	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7214.72	52.44	88.20	-35.76	39.24	36.43	10.18	33.41	100	322	Peak																																																																											
2	7299.72	52.45	74.00	-21.55	39.41	36.24	10.18	33.38	100	322	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7085.00	90.60	-----	-----	77.16	36.71	10.20	33.47	100	322	Peak																																																																											
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7135.17</td> <td>41.91</td> <td>68.20</td> <td>-26.29</td> <td>28.57</td> <td>36.60</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>322</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7266.30</td> <td>41.02</td> <td>54.00</td> <td>-12.98</td> <td>27.92</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>322</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7135.17	41.91	68.20	-26.29	28.57	36.60	10.19	33.45	100	322	Average	2	7266.30	41.02	54.00	-12.98	27.92	36.31	10.18	33.39	100	322	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7085.00</td> <td>80.86</td> <td>-----</td> <td>-----</td> <td>67.42</td> <td>36.71</td> <td>10.20</td> <td>33.47</td> <td>100</td> <td>322</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7085.00	80.86	-----	-----	67.42	36.71	10.20	33.47	100	322	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7135.17	41.91	68.20	-26.29	28.57	36.60	10.19	33.45	100	322	Average																																																																											
2	7266.30	41.02	54.00	-12.98	27.92	36.31	10.18	33.39	100	322	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7085.00	80.86	-----	-----	67.42	36.71	10.20	33.47	100	322	Average																																																																											









Mode	26																																																																			
	Harmonic																																																																			
	UNII-8_6875-7125_802.11be EHT40_CH227_Full_7085MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 14170.00</td> <td>50.67</td> <td>-37.53</td> <td>88.20</td> <td>60.07</td> <td>40.53</td> <td>13.96</td> <td>63.89</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 14170.00	50.67	-37.53	88.20	60.07	40.53	13.96	63.89	--- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 14170.00</td> <td>48.83</td> <td>-39.37</td> <td>88.20</td> <td>58.23</td> <td>40.53</td> <td>13.96</td> <td>63.89</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 14170.00	48.83	-39.37	88.20	58.23	40.53	13.96	63.89	--- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 14170.00	50.67	-37.53	88.20	60.07	40.53	13.96	63.89	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 14170.00	48.83	-39.37	88.20	58.23	40.53	13.96	63.89	--- --- Peak																																																												



Mode	27																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT80_CH7_Full_5985MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5920.68</td> <td>53.36</td> <td>88.20</td> <td>-34.84</td> <td>39.69</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>34</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5920.68	53.36	88.20	-34.84	39.69	36.59	10.43	33.35	100	34	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>98.62</td> <td>-----</td> <td>-----</td> <td>84.68</td> <td>36.68</td> <td>10.57</td> <td>33.31</td> <td>100</td> <td>34</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5985.00	98.62	-----	-----	84.68	36.68	10.57	33.31	100	34	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5920.68	53.36	88.20	-34.84	39.69	36.59	10.43	33.35	100	34	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5985.00	98.62	-----	-----	84.68	36.68	10.57	33.31	100	34	Peak																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5919.88</td> <td>42.50</td> <td>68.20</td> <td>-25.70</td> <td>28.83</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>34</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5919.88	42.50	68.20	-25.70	28.83	36.59	10.43	33.35	100	34	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>89.83</td> <td>-----</td> <td>-----</td> <td>75.89</td> <td>36.68</td> <td>10.57</td> <td>33.31</td> <td>100</td> <td>34</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5985.00	89.83	-----	-----	75.89	36.68	10.57	33.31	100	34	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5919.88	42.50	68.20	-25.70	28.83	36.59	10.43	33.35	100	34	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5985.00	89.83	-----	-----	75.89	36.68	10.57	33.31	100	34	Average																																																															

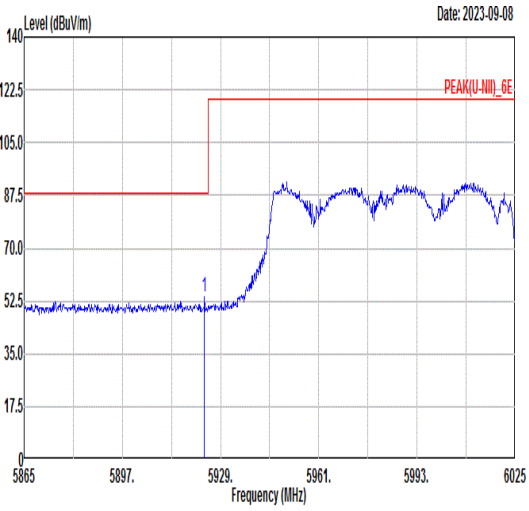
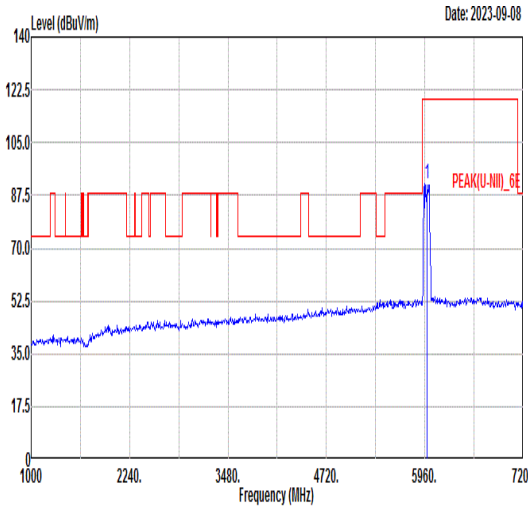
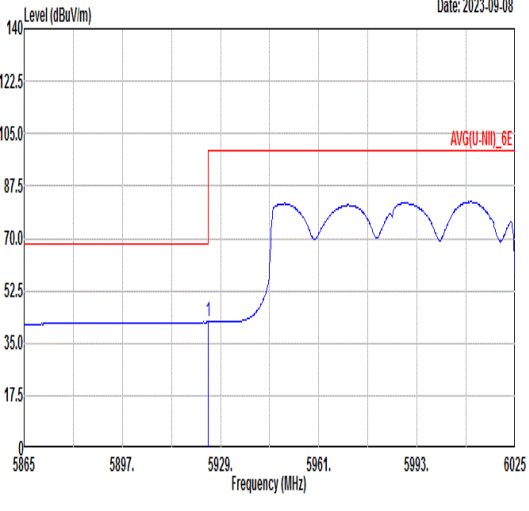
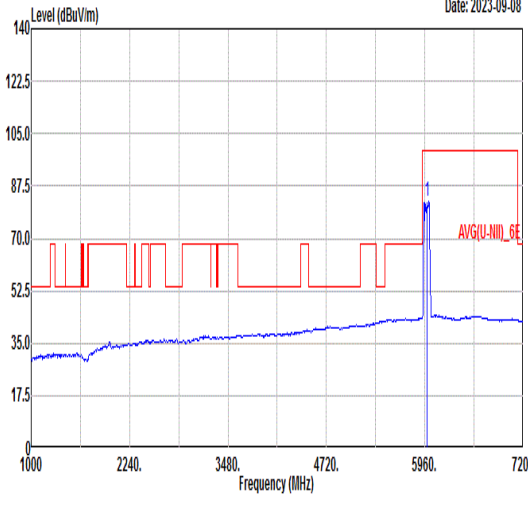


Mode	27																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT80_CH7_Full_5985MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5923.72</td> <td>53.63</td> <td>88.20</td> <td>-34.57</td> <td>39.95</td> <td>36.59</td> <td>10.44</td> <td>33.35</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5923.72	53.63	88.20	-34.57	39.95	36.59	10.44	33.35	100	62	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>91.19</td> <td>-----</td> <td>-----</td> <td>77.25</td> <td>36.68</td> <td>10.57</td> <td>33.31</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5985.00	91.19	-----	-----	77.25	36.68	10.57	33.31	100	62	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5923.72	53.63	88.20	-34.57	39.95	36.59	10.44	33.35	100	62	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5985.00	91.19	-----	-----	77.25	36.68	10.57	33.31	100	62	Peak																																																															
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5925.00</td> <td>42.05</td> <td>68.20</td> <td>-26.15</td> <td>28.35</td> <td>36.60</td> <td>10.44</td> <td>33.34</td> <td>100</td> <td>62</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5925.00	42.05	68.20	-26.15	28.35	36.60	10.44	33.34	100	62	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5985.00</td> <td>82.66</td> <td>-----</td> <td>-----</td> <td>68.72</td> <td>36.68</td> <td>10.57</td> <td>33.31</td> <td>100</td> <td>62</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5985.00	82.66	-----	-----	68.72	36.68	10.57	33.31	100	62	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5925.00	42.05	68.20	-26.15	28.35	36.60	10.44	33.34	100	62	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5985.00	82.66	-----	-----	68.72	36.68	10.57	33.31	100	62	Average																																																															







Mode	27																																																																	
	Harmonic																																																																	
	UNII-5_5925-6425_802.11be EHT80_CH7_Full_5985MHz																																																																	
ANT	CDD 9+15																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 11970.00</td> <td>47.58</td> <td>-26.42</td> <td>74.00</td> <td>58.45</td> <td>39.39</td> <td>13.21</td> <td>63.47 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 11970.00	47.58	-26.42	74.00	58.45	39.39	13.21	63.47 --- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 11970.00</td> <td>47.11</td> <td>-26.89</td> <td>74.00</td> <td>57.98</td> <td>39.39</td> <td>13.21</td> <td>63.47 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 11970.00	47.11	-26.89	74.00	57.98	39.39	13.21	63.47 --- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
Freq	Level	Line	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 11970.00	47.58	-26.42	74.00	58.45	39.39	13.21	63.47 --- --- Peak																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 11970.00	47.11	-26.89	74.00	57.98	39.39	13.21	63.47 --- --- Peak																																																											

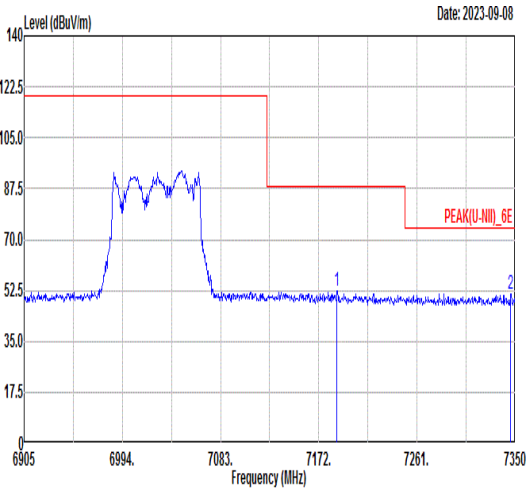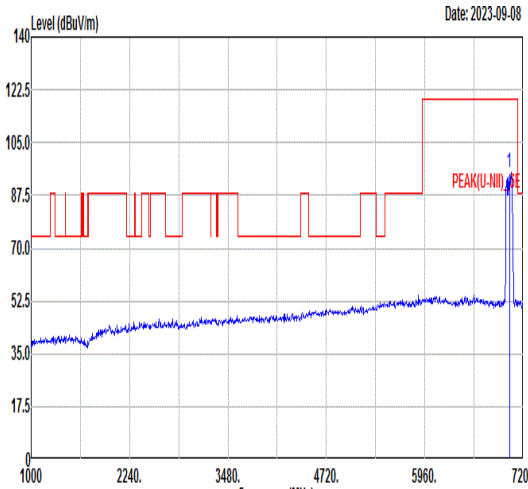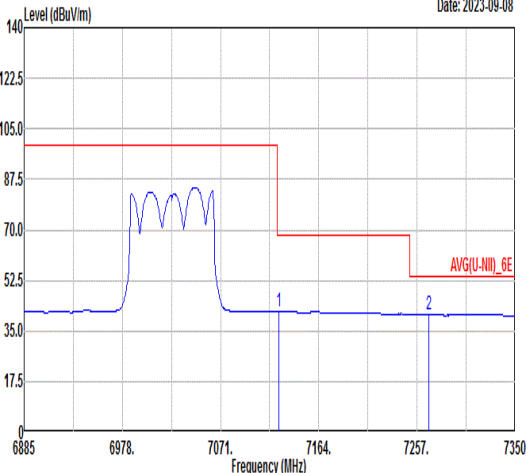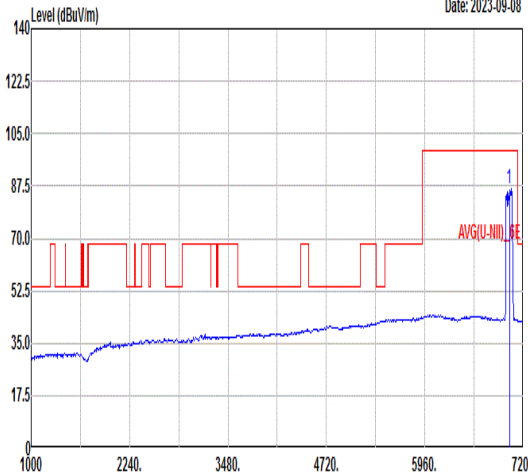

		28																																																																																									
Mode		Band Edge																																																																																									
		UNII-8_6875-7125_802.11be EHT80_CH215_Full_7025MHz																																																																																									
ANT		CDD 9+15																																																																																									
Pol.		Horizontal	Fundamental																																																																																								
<b>Peak</b>	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7188.47</td> <td>52.53</td> <td>88.20</td> <td>-35.67</td> <td>39.28</td> <td>36.49</td> <td>10.18</td> <td>33.42</td> <td>100</td> <td>58 Peak</td> </tr> <tr> <td>2</td> <td>7346.00</td> <td>51.24</td> <td>74.00</td> <td>-22.76</td> <td>38.28</td> <td>36.14</td> <td>10.18</td> <td>33.36</td> <td>100</td> <td>58 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7188.47	52.53	88.20	-35.67	39.28	36.49	10.18	33.42	100	58 Peak	2	7346.00	51.24	74.00	-22.76	38.28	36.14	10.18	33.36	100	58 Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>95.36</td> <td>-----</td> <td>-----</td> <td>81.78</td> <td>36.85</td> <td>10.22</td> <td>33.49</td> <td>100</td> <td>58 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	95.36	-----	-----	81.78	36.85	10.22	33.49	100	58 Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7188.47	52.53	88.20	-35.67	39.28	36.49	10.18	33.42	100	58 Peak																																																																																	
2	7346.00	51.24	74.00	-22.76	38.28	36.14	10.18	33.36	100	58 Peak																																																																																	
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7025.00	95.36	-----	-----	81.78	36.85	10.22	33.49	100	58 Peak																																																																																	
<b>Avg</b>	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.87</td> <td>41.75</td> <td>68.20</td> <td>-26.45</td> <td>28.38</td> <td>36.62</td> <td>10.20</td> <td>33.45</td> <td>100</td> <td>58 Average</td> </tr> <tr> <td>2</td> <td>7268.16</td> <td>40.80</td> <td>54.00</td> <td>-13.20</td> <td>27.70</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>58 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7125.87	41.75	68.20	-26.45	28.38	36.62	10.20	33.45	100	58 Average	2	7268.16	40.80	54.00	-13.20	27.70	36.31	10.18	33.39	100	58 Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>86.78</td> <td>-----</td> <td>-----</td> <td>73.20</td> <td>36.85</td> <td>10.22</td> <td>33.49</td> <td>100</td> <td>58 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	7025.00	86.78	-----	-----	73.20	36.85	10.22	33.49	100	58 Average
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7125.87	41.75	68.20	-26.45	28.38	36.62	10.20	33.45	100	58 Average																																																																																	
2	7268.16	40.80	54.00	-13.20	27.70	36.31	10.18	33.39	100	58 Average																																																																																	
Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	7025.00	86.78	-----	-----	73.20	36.85	10.22	33.49	100	58 Average																																																																																	

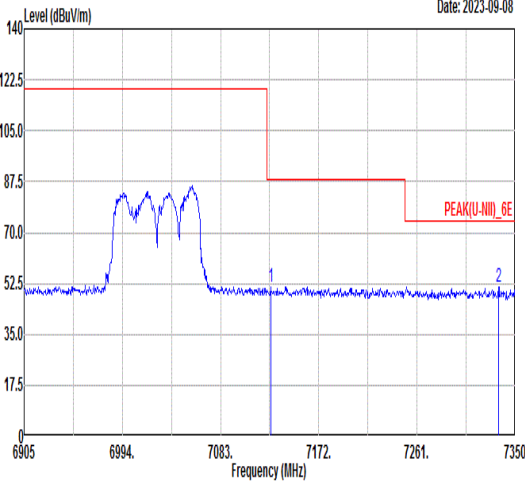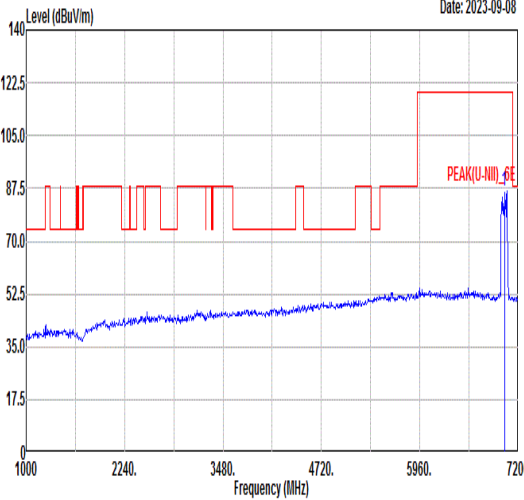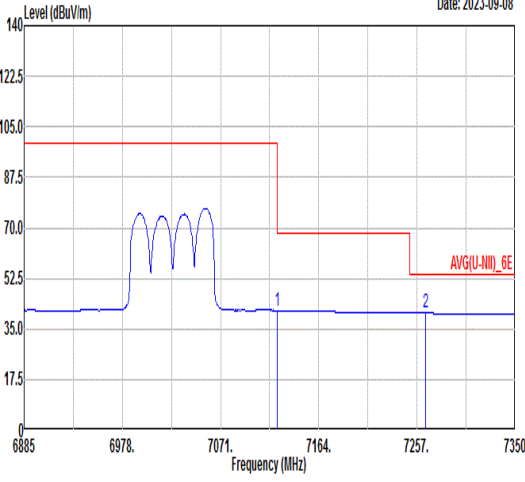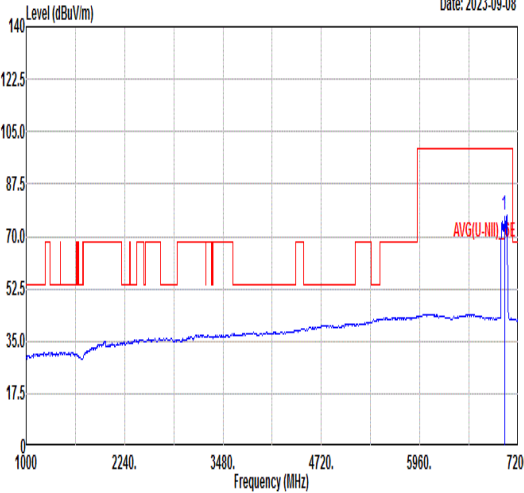

Mode	28																																																																																					
	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT80_CH215_Full_7025MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7128.39</td> <td>51.38</td> <td>88.20</td> <td>-36.82</td> <td>38.02</td> <td>36.62</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>123</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7334.87</td> <td>51.27</td> <td>74.00</td> <td>-22.73</td> <td>38.30</td> <td>36.16</td> <td>10.18</td> <td>33.37</td> <td>100</td> <td>123</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7128.39	51.38	88.20	-36.82	38.02	36.62	10.19	33.45	100	123	Peak	2	7334.87	51.27	74.00	-22.73	38.30	36.16	10.18	33.37	100	123	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>86.41</td> <td>-----</td> <td>-----</td> <td>72.83</td> <td>36.85</td> <td>10.22</td> <td>33.49</td> <td>100</td> <td>123</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7025.00	86.41	-----	-----	72.83	36.85	10.22	33.49	100	123	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7128.39	51.38	88.20	-36.82	38.02	36.62	10.19	33.45	100	123	Peak																																																																											
2	7334.87	51.27	74.00	-22.73	38.30	36.16	10.18	33.37	100	123	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7025.00	86.41	-----	-----	72.83	36.85	10.22	33.49	100	123	Peak																																																																											
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.00</td> <td>41.41</td> <td>68.20</td> <td>-26.79</td> <td>28.04</td> <td>36.62</td> <td>10.20</td> <td>33.45</td> <td>100</td> <td>123</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7265.37</td> <td>40.51</td> <td>54.00</td> <td>-13.49</td> <td>27.40</td> <td>36.32</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>123</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7125.00	41.41	68.20	-26.79	28.04	36.62	10.20	33.45	100	123	Average	2	7265.37	40.51	54.00	-13.49	27.40	36.32	10.18	33.39	100	123	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7025.00</td> <td>76.91</td> <td>-----</td> <td>-----</td> <td>63.33</td> <td>36.85</td> <td>10.22</td> <td>33.49</td> <td>100</td> <td>123</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7025.00	76.91	-----	-----	63.33	36.85	10.22	33.49	100	123	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7125.00	41.41	68.20	-26.79	28.04	36.62	10.20	33.45	100	123	Average																																																																											
2	7265.37	40.51	54.00	-13.49	27.40	36.32	10.18	33.39	100	123	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7025.00	76.91	-----	-----	63.33	36.85	10.22	33.49	100	123	Average																																																																											







Mode	28																																																													
	Harmonic																																																													
	UNII-8_6875-7125_802.11be EHT80_CH215_Full_7025MHz																																																													
ANT	CDD 9+15																																																													
Pol.	Horizontal	Vertical																																																												
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over Freq</th> <th>Level</th> <th>Limit</th> <th>Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 14050.00</td> <td>50.38</td> <td>-37.82</td> <td>88.20</td> <td>59.86</td> <td>40.51</td> <td>13.91</td> <td>63.90</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Over Freq	Level	Limit	Limit	ReadAntenna Level	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 14050.00	50.38	-37.82	88.20	59.86	40.51	13.91	63.90	---	---	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over Freq</th> <th>Level</th> <th>Limit</th> <th>Limit</th> <th>ReadAntenna Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 14050.00</td> <td>48.02</td> <td>-40.18</td> <td>88.20</td> <td>57.50</td> <td>40.51</td> <td>13.91</td> <td>63.90</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Over Freq	Level	Limit	Limit	ReadAntenna Level	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 14050.00	48.02	-40.18	88.20	57.50	40.51	13.91	63.90	---	---
	Over Freq	Level	Limit	Limit	ReadAntenna Level	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 14050.00	50.38	-37.82	88.20	59.86	40.51	13.91	63.90	---	---																																																					
Over Freq	Level	Limit	Limit	ReadAntenna Level	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 14050.00	48.02	-40.18	88.20	57.50	40.51	13.91	63.90	---	---																																																					



Mode	29																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT160_CH15_Full_6025MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5909.28</td> <td>54.13</td> <td>88.20</td> <td>-34.07</td> <td>40.50</td> <td>36.57</td> <td>10.41</td> <td>33.35</td> <td>100</td> <td>38 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5909.28	54.13	88.20	-34.07	40.50	36.57	10.41	33.35	100	38 Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>96.60</td> <td>-----</td> <td>-----</td> <td>82.61</td> <td>36.71</td> <td>10.59</td> <td>33.31</td> <td>100</td> <td>38 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6025.00	96.60	-----	-----	82.61	36.71	10.59	33.31	100	38 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5909.28	54.13	88.20	-34.07	40.50	36.57	10.41	33.35	100	38 Peak																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	6025.00	96.60	-----	-----	82.61	36.71	10.59	33.31	100	38 Peak																																																																
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.12</td> <td>42.63</td> <td>68.20</td> <td>-25.57</td> <td>28.95</td> <td>36.59</td> <td>10.44</td> <td>33.35</td> <td>100</td> <td>38 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5924.12	42.63	68.20	-25.57	28.95	36.59	10.44	33.35	100	38 Average	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>87.82</td> <td>-----</td> <td>-----</td> <td>73.83</td> <td>36.71</td> <td>10.59</td> <td>33.31</td> <td>100</td> <td>38 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6025.00	87.82	-----	-----	73.83	36.71	10.59	33.31	100	38 Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5924.12	42.63	68.20	-25.57	28.95	36.59	10.44	33.35	100	38 Average																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	6025.00	87.82	-----	-----	73.83	36.71	10.59	33.31	100	38 Average																																																																



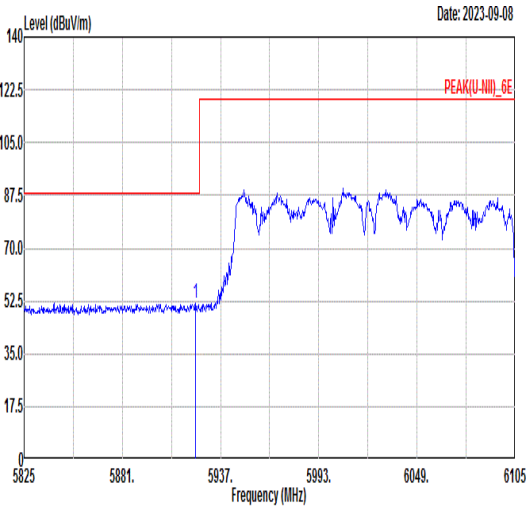
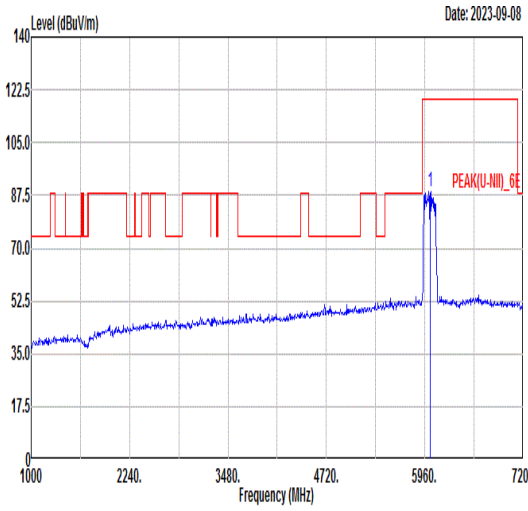
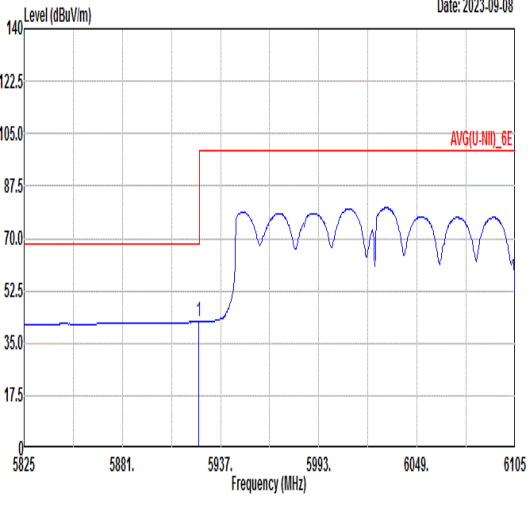
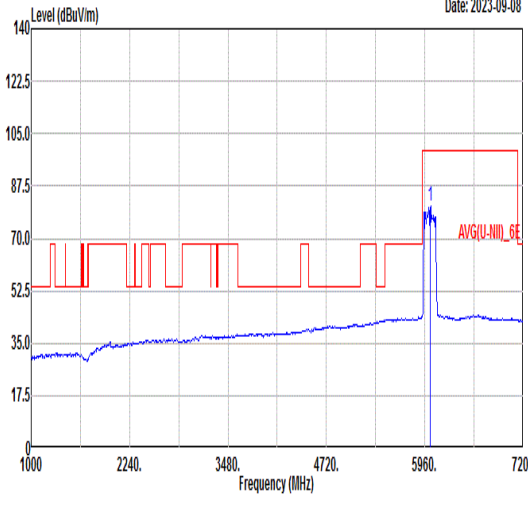


		29																																																																														
Mode		Band Edge																																																																														
		UNII-5_5925-6425_802.11be EHT160_CH15_Full_6025MHz																																																																														
ANT		CDD 9+15																																																																														
Pol.	Vertical	Fundamental																																																																														
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5922.72</td> <td>51.97</td> <td>88.20</td> <td>-36.23</td> <td>38.30</td> <td>36.59</td> <td>10.43</td> <td>33.35</td> <td>100</td> <td>67</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5922.72	51.97	88.20	-36.23	38.30	36.59	10.43	33.35	100	67	Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>88.64</td> <td>-----</td> <td>-----</td> <td>74.65</td> <td>36.71</td> <td>10.59</td> <td>33.31</td> <td>100</td> <td>67</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6025.00	88.64	-----	-----	74.65	36.71	10.59	33.31	100	67	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5922.72	51.97	88.20	-36.23	38.30	36.59	10.43	33.35	100	67	Peak																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	6025.00	88.64	-----	-----	74.65	36.71	10.59	33.31	100	67	Peak																																																																					
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5924.40</td> <td>42.16</td> <td>68.20</td> <td>-26.04</td> <td>28.48</td> <td>36.59</td> <td>10.44</td> <td>33.35</td> <td>100</td> <td>67</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5924.40	42.16	68.20	-26.04	28.48	36.59	10.44	33.35	100	67	Average	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6025.00</td> <td>80.60</td> <td>-----</td> <td>-----</td> <td>66.61</td> <td>36.71</td> <td>10.59</td> <td>33.31</td> <td>100</td> <td>67</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6025.00	80.60	-----	-----	66.61	36.71	10.59	33.31	100	67	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5924.40	42.16	68.20	-26.04	28.48	36.59	10.44	33.35	100	67	Average																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	6025.00	80.60	-----	-----	66.61	36.71	10.59	33.31	100	67	Average																																																																					







Mode	29																																																									
	Harmonic																																																									
	UNII-5_5925-6425_802.11be EHT160_CH15_Full_6025MHz																																																									
ANT	CDD 9+15																																																									
Pol.	Horizontal	Vertical																																																								
Peak Avg	<p>Data: 13 Date: 2023-09-27</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 12050.00</td> <td>47.74</td> <td>-26.26</td> <td>74.00</td> <td>58.54</td> <td>39.43</td> <td>13.25 63.48 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	1 * 12050.00	47.74	-26.26	74.00	58.54	39.43	13.25 63.48 --- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 12050.00</td> <td>47.32</td> <td>-26.68</td> <td>74.00</td> <td>58.12</td> <td>39.43</td> <td>13.25 63.48 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor			MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	1 * 12050.00	47.32	-26.68	74.00	58.12	39.43	13.25 63.48 --- --- Peak
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																			
Freq	Level	Limit	Level Factor	Loss Factor																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB																																																				
1 * 12050.00	47.74	-26.26	74.00	58.54	39.43	13.25 63.48 --- --- Peak																																																				
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark																																																				
Freq	Level	Limit	Level Factor	Loss Factor																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB																																																				
1 * 12050.00	47.32	-26.68	74.00	58.12	39.43	13.25 63.48 --- --- Peak																																																				

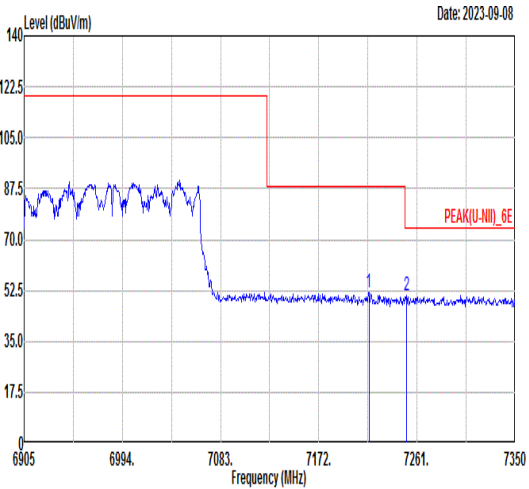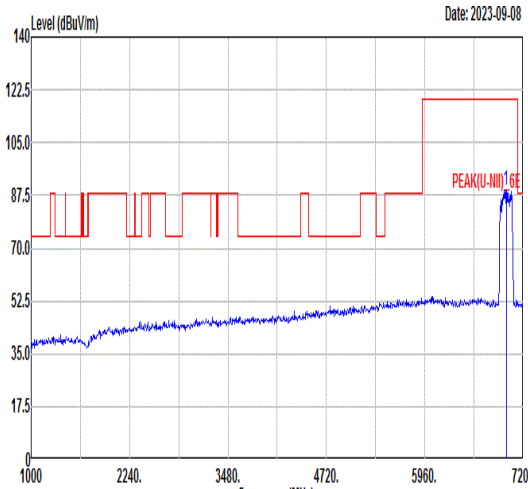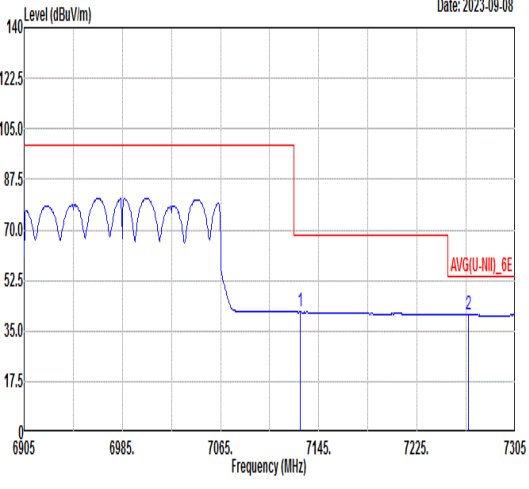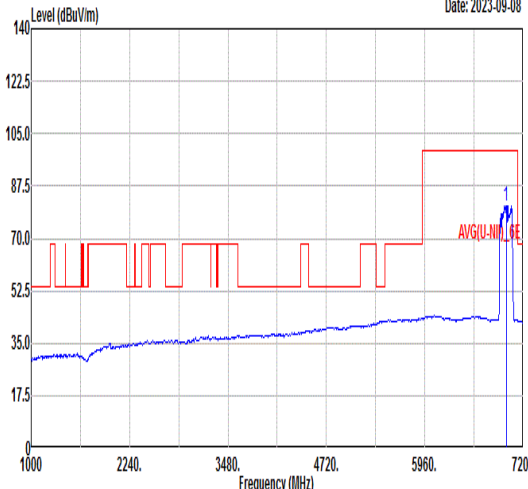

Mode	30																																																																																					
	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT160_CH207_Full_6985MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7217.39</td> <td>51.65</td> <td>88.20</td> <td>-36.55</td> <td>38.46</td> <td>36.42</td> <td>10.18</td> <td>33.41</td> <td>100</td> <td>55</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7251.21</td> <td>50.71</td> <td>74.00</td> <td>-23.29</td> <td>37.58</td> <td>36.35</td> <td>10.18</td> <td>33.40</td> <td>100</td> <td>55</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7217.39	51.65	88.20	-36.55	38.46	36.42	10.18	33.41	100	55	Peak	2	7251.21	50.71	74.00	-23.29	37.58	36.35	10.18	33.40	100	55	Peak	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>89.12</td> <td>-----</td> <td>-----</td> <td>75.50</td> <td>36.90</td> <td>10.22</td> <td>33.50</td> <td>100</td> <td>55</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6985.00	89.12	-----	-----	75.50	36.90	10.22	33.50	100	55	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7217.39	51.65	88.20	-36.55	38.46	36.42	10.18	33.41	100	55	Peak																																																																											
2	7251.21	50.71	74.00	-23.29	37.58	36.35	10.18	33.40	100	55	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	6985.00	89.12	-----	-----	75.50	36.90	10.22	33.50	100	55	Peak																																																																											
Avg	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7130.06</td> <td>41.50</td> <td>68.20</td> <td>-26.70</td> <td>28.15</td> <td>36.61</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>55</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7266.77</td> <td>40.61</td> <td>54.00</td> <td>-13.39</td> <td>27.51</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>55</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7130.06	41.50	68.20	-26.70	28.15	36.61	10.19	33.45	100	55	Average	2	7266.77	40.61	54.00	-13.39	27.51	36.31	10.18	33.39	100	55	Average	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>80.98</td> <td>-----</td> <td>-----</td> <td>67.36</td> <td>36.90</td> <td>10.22</td> <td>33.50</td> <td>100</td> <td>55</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6985.00	80.98	-----	-----	67.36	36.90	10.22	33.50	100	55	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	7130.06	41.50	68.20	-26.70	28.15	36.61	10.19	33.45	100	55	Average																																																																											
2	7266.77	40.61	54.00	-13.39	27.51	36.31	10.18	33.39	100	55	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	6985.00	80.98	-----	-----	67.36	36.90	10.22	33.50	100	55	Average																																																																											

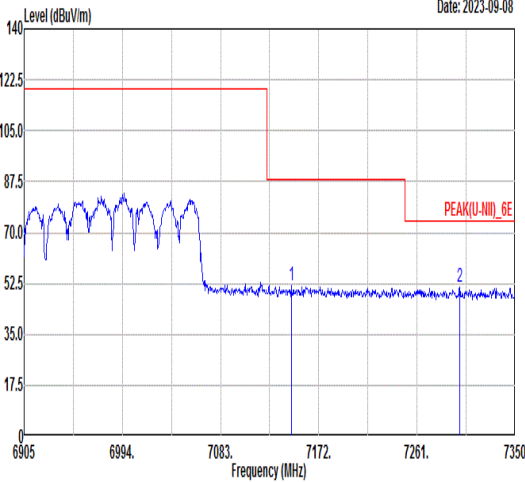
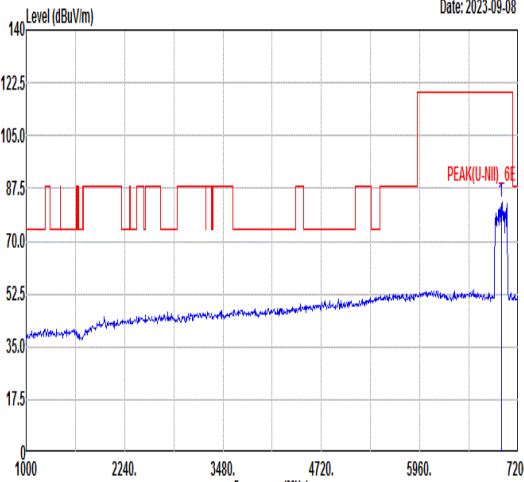
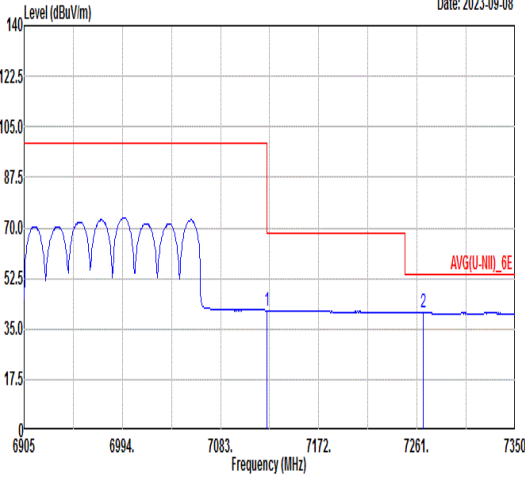
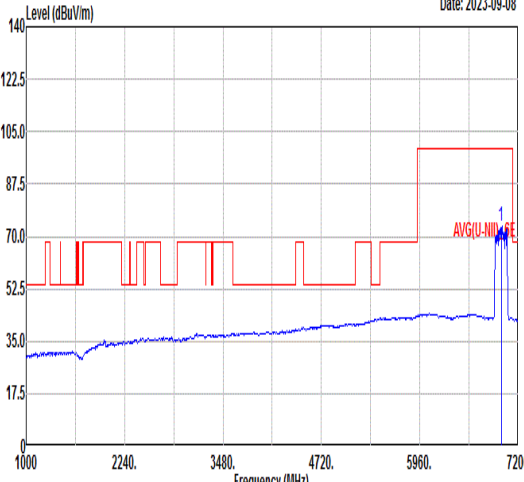


Mode	30																																																																																					
	Band Edge																																																																																					
	UNII-8_6875-7125_802.11be EHT160_CH207_Full_6985MHz																																																																																					
ANT	CDD 9+15																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7147.08</td> <td>51.65</td> <td>88.20</td> <td>-36.55</td> <td>38.32</td> <td>36.58</td> <td>10.19</td> <td>33.44</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7299.72</td> <td>51.34</td> <td>74.00</td> <td>-22.66</td> <td>38.30</td> <td>36.24</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7147.08	51.65	88.20	-36.55	38.32	36.58	10.19	33.44	100	121	Peak	2	7299.72	51.34	74.00	-22.66	38.30	36.24	10.18	33.38	100	121	Peak	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>82.90</td> <td>-----</td> <td>-----</td> <td>69.28</td> <td>36.90</td> <td>10.22</td> <td>33.50</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6985.00	82.90	-----	-----	69.28	36.90	10.22	33.50	100	121	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7147.08	51.65	88.20	-36.55	38.32	36.58	10.19	33.44	100	121	Peak																																																																											
2	7299.72	51.34	74.00	-22.66	38.30	36.24	10.18	33.38	100	121	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	6985.00	82.90	-----	-----	69.28	36.90	10.22	33.50	100	121	Peak																																																																											
Avg	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.00</td> <td>41.45</td> <td>68.20</td> <td>-26.75</td> <td>28.08</td> <td>36.62</td> <td>10.20</td> <td>33.45</td> <td>100</td> <td>121</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7266.30</td> <td>40.59</td> <td>54.00</td> <td>-13.41</td> <td>27.49</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>121</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7125.00	41.45	68.20	-26.75	28.08	36.62	10.20	33.45	100	121	Average	2	7266.30	40.59	54.00	-13.41	27.49	36.31	10.18	33.39	100	121	Average	 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6985.00</td> <td>73.29</td> <td>-----</td> <td>-----</td> <td>59.67</td> <td>36.90</td> <td>10.22</td> <td>33.50</td> <td>100</td> <td>121</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6985.00	73.29	-----	-----	59.67	36.90	10.22	33.50	100	121	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7125.00	41.45	68.20	-26.75	28.08	36.62	10.20	33.45	100	121	Average																																																																											
2	7266.30	40.59	54.00	-13.41	27.49	36.31	10.18	33.39	100	121	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	6985.00	73.29	-----	-----	59.67	36.90	10.22	33.50	100	121	Average																																																																											



Mode	30																																																																			
	Harmonic																																																																			
	UNII-8_6875-7125_802.11be EHT160_CH207_Full_6985MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak	<p>Data: 13 Date: 2023-09-28</p>	<p>Data: 14 Date: 2023-09-28</p>																																																																		
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13970.00</td> <td>50.67</td> <td>-37.53</td> <td>88.20</td> <td>60.23</td> <td>40.48</td> <td>13.87</td> <td>63.91</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13970.00	50.67	-37.53	88.20	60.23	40.48	13.87	63.91	--- --- Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13970.00</td> <td>49.83</td> <td>-38.37</td> <td>88.20</td> <td>59.39</td> <td>40.48</td> <td>13.87</td> <td>63.91</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13970.00	49.83	-38.37	88.20	59.39	40.48	13.87	63.91	--- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13970.00	50.67	-37.53	88.20	60.23	40.48	13.87	63.91	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13970.00	49.83	-38.37	88.20	59.39	40.48	13.87	63.91	--- --- Peak																																																												

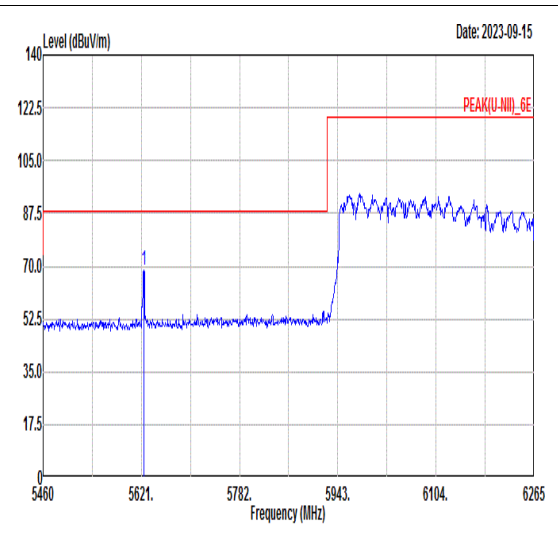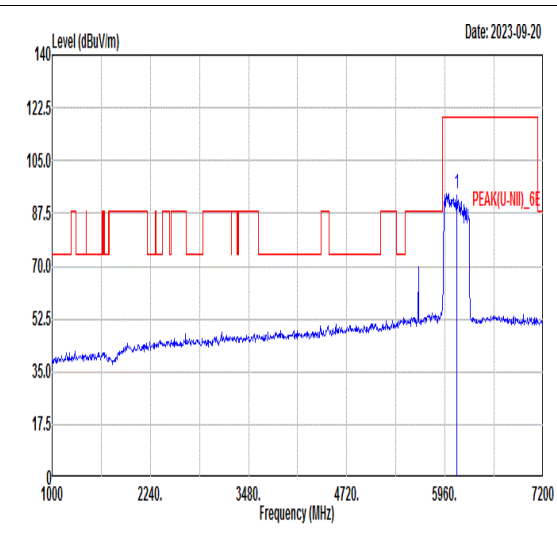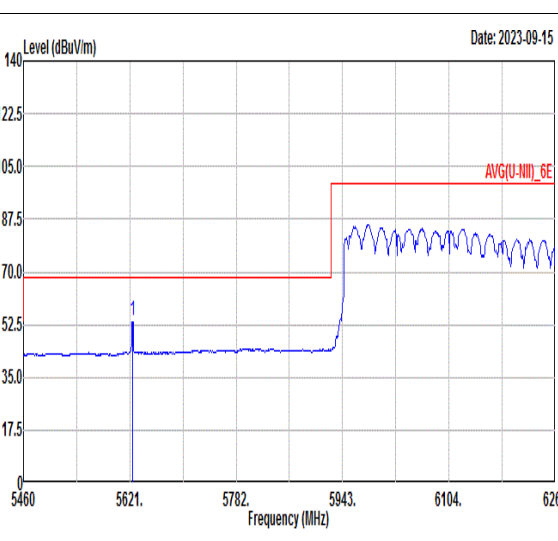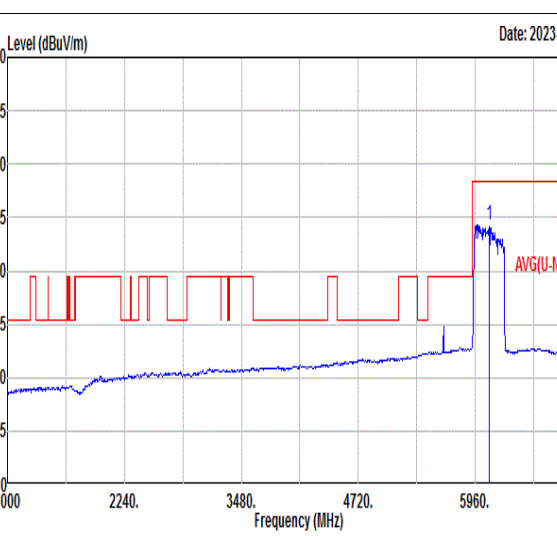

Mode	31																																																																							
	Band Edge																																																																							
	UNII-5_5925-6425_802.11be EHT320_CH31_Full_6105MHz																																																																							
ANT	CDD 9+15																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p>Date: 2023-09-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5625.03</td> <td>68.73</td> <td>88.20</td> <td>-19.47</td> <td>56.26</td> <td>36.18</td> <td>9.81</td> <td>33.52</td> <td>100</td> <td>19 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5625.03	68.73	88.20	-19.47	56.26	36.18	9.81	33.52	100	19 Peak	 <p>Date: 2023-09-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6105.00</td> <td>94.06</td> <td>-----</td> <td>-----</td> <td>80.05</td> <td>36.74</td> <td>10.63</td> <td>33.36</td> <td>100</td> <td>19 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6105.00	94.06	-----	-----	80.05	36.74	10.63	33.36	100	19 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	5625.03	68.73	88.20	-19.47	56.26	36.18	9.81	33.52	100	19 Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	6105.00	94.06	-----	-----	80.05	36.74	10.63	33.36	100	19 Peak																																																														
Avg	 <p>Date: 2023-09-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5625.03</td> <td>55.55</td> <td>68.20</td> <td>-12.65</td> <td>43.08</td> <td>36.18</td> <td>9.81</td> <td>33.52</td> <td>100</td> <td>19 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5625.03	55.55	68.20	-12.65	43.08	36.18	9.81	33.52	100	19 Average	 <p>Date: 2023-09-15</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6105.00</td> <td>85.28</td> <td>-----</td> <td>-----</td> <td>71.27</td> <td>36.74</td> <td>10.63</td> <td>33.36</td> <td>100</td> <td>19 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6105.00	85.28	-----	-----	71.27	36.74	10.63	33.36	100	19 Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	5625.03	55.55	68.20	-12.65	43.08	36.18	9.81	33.52	100	19 Average																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																	
1	6105.00	85.28	-----	-----	71.27	36.74	10.63	33.36	100	19 Average																																																														



Mode	31																																																																									
	Band Edge																																																																									
	UNII-5_5925-6425_802.11be EHT320_CH31_Full_6105MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-09-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5624.22</td> <td>55.21</td> <td>88.20</td> <td>-32.99</td> <td>42.76</td> <td>36.17</td> <td>9.81</td> <td>33.53</td> <td>100</td> <td>102</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5624.22	55.21	88.20	-32.99	42.76	36.17	9.81	33.53	100	102	Peak	<p>Date: 2023-09-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6105.00</td> <td>83.32</td> <td>-----</td> <td>-----</td> <td>69.31</td> <td>36.74</td> <td>10.63</td> <td>33.36</td> <td>100</td> <td>102</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6105.00	83.32	-----	-----	69.31	36.74	10.63	33.36	100	102	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5624.22	55.21	88.20	-32.99	42.76	36.17	9.81	33.53	100	102	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	6105.00	83.32	-----	-----	69.31	36.74	10.63	33.36	100	102	Peak																																																															
Avg	<p>Date: 2023-09-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5909.19</td> <td>42.36</td> <td>68.20</td> <td>-25.84</td> <td>28.73</td> <td>36.57</td> <td>10.41</td> <td>33.35</td> <td>100</td> <td>102</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5909.19	42.36	68.20	-25.84	28.73	36.57	10.41	33.35	100	102	Average	<p>Date: 2023-09-20</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6105.00</td> <td>74.21</td> <td>-----</td> <td>-----</td> <td>60.20</td> <td>36.74</td> <td>10.63</td> <td>33.36</td> <td>100</td> <td>102</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6105.00	74.21	-----	-----	60.20	36.74	10.63	33.36	100	102	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5909.19	42.36	68.20	-25.84	28.73	36.57	10.41	33.35	100	102	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	6105.00	74.21	-----	-----	60.20	36.74	10.63	33.36	100	102	Average																																																															



Mode	31																																																																			
	Harmonic																																																																			
	UNII-5_5925-6425_802.11be EHT320_CH31_Full_6105MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 * 12210.00</td> <td>47.60</td> <td>-26.40</td> <td>74.00</td> <td>58.32</td> <td>39.51</td> <td>13.30</td> <td>63.53</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 * 12210.00	47.60	-26.40	74.00	58.32	39.51	13.30	63.53	--- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 * 12210.00</td> <td>47.19</td> <td>-26.81</td> <td>74.00</td> <td>57.91</td> <td>39.51</td> <td>13.30</td> <td>63.53</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 * 12210.00	47.19	-26.81	74.00	57.91	39.51	13.30	63.53	--- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																													
1 * 12210.00	47.60	-26.40	74.00	58.32	39.51	13.30	63.53	--- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																													
1 * 12210.00	47.19	-26.81	74.00	57.91	39.51	13.30	63.53	--- Peak																																																												





Mode	32																																																																	
	Harmonic																																																																	
	UNII-5_5925-6425_802.11be EHT320_CH63_Full_6265MHz																																																																	
ANT	CDD 9+15																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 12530.00</td> <td>47.04</td> <td>-26.96</td> <td>74.00</td> <td>57.58</td> <td>39.67</td> <td>13.41</td> <td>63.62 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Level	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 12530.00	47.04	-26.96	74.00	57.58	39.67	13.41	63.62 --- --- Peak	<p>Data: 14 Date: 2023-09-27</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 12530.00</td> <td>47.50</td> <td>-26.50</td> <td>74.00</td> <td>58.04</td> <td>39.67</td> <td>13.41</td> <td>63.62 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Level	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg	1 * 12530.00	47.50	-26.50	74.00	58.04	39.67	13.41	63.62 --- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																										
Freq	Level	Limit	Level	Level	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 12530.00	47.04	-26.96	74.00	57.58	39.67	13.41	63.62 --- --- Peak																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Level	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg																																																											
1 * 12530.00	47.50	-26.50	74.00	58.04	39.67	13.41	63.62 --- --- Peak																																																											



Mode	33																																																																	
	Harmonic																																																																	
	UNII-7-8_6525-7125_802.11be EHT20_CH185_Full_6875MHz																																																																	
ANT	CDD 9+15																																																																	
Pol.	Horizontal	Vertical																																																																
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13750.00</td> <td>50.30</td> <td>-37.90</td> <td>88.20</td> <td>60.02</td> <td>40.35</td> <td>13.80</td> <td>63.87 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13750.00	50.30	-37.90	88.20	60.02	40.35	13.80	63.87 --- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13750.00</td> <td>49.12</td> <td>-39.08</td> <td>88.20</td> <td>58.84</td> <td>40.35</td> <td>13.80</td> <td>63.87 --- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13750.00	49.12	-39.08	88.20	58.84	40.35	13.80	63.87 --- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																											
1 * 13750.00	50.30	-37.90	88.20	60.02	40.35	13.80	63.87 --- --- Peak																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																											
1 * 13750.00	49.12	-39.08	88.20	58.84	40.35	13.80	63.87 --- --- Peak																																																											



Mode	34																																																																			
	Harmonic																																																																			
	UNII-7-8_6525-7125_802.11be EHT40_CH187_Full_6885MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13770.00</td> <td>50.01</td> <td>-38.19</td> <td>88.20</td> <td>59.73</td> <td>40.36</td> <td>13.80</td> <td>63.88</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13770.00	50.01	-38.19	88.20	59.73	40.36	13.80	63.88	--- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13770.00</td> <td>49.57</td> <td>-38.63</td> <td>88.20</td> <td>59.29</td> <td>40.36</td> <td>13.80</td> <td>63.88</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13770.00	49.57	-38.63	88.20	59.29	40.36	13.80	63.88	--- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13770.00	50.01	-38.19	88.20	59.73	40.36	13.80	63.88	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13770.00	49.57	-38.63	88.20	59.29	40.36	13.80	63.88	--- --- Peak																																																												



Mode	35																																																																			
	Harmonic																																																																			
	UNII-7-8_6525-7125_802.11be EHT80_CH183_Full_6865MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13730.00</td> <td>50.20</td> <td>-38.00</td> <td>88.20</td> <td>59.95</td> <td>40.34</td> <td>13.78</td> <td>63.87</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13730.00	50.20	-38.00	88.20	59.95	40.34	13.78	63.87	--- --- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13730.00</td> <td>50.30</td> <td>-37.90</td> <td>88.20</td> <td>60.05</td> <td>40.34</td> <td>13.78</td> <td>63.87</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13730.00	50.30	-37.90	88.20	60.05	40.34	13.78	63.87	--- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13730.00	50.20	-38.00	88.20	59.95	40.34	13.78	63.87	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13730.00	50.30	-37.90	88.20	60.05	40.34	13.78	63.87	--- --- Peak																																																												



Mode	36																																																																			
	Harmonic																																																																			
	UNII-7-8_6525-7125_802.11be EHT160_CH175_Full_6825MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13650.00</td> <td>49.16</td> <td>-39.04</td> <td>88.20</td> <td>58.97</td> <td>40.29</td> <td>13.76</td> <td>63.86</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13650.00	49.16	-39.04	88.20	58.97	40.29	13.76	63.86	--- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13650.00</td> <td>50.46</td> <td>-37.74</td> <td>88.20</td> <td>60.27</td> <td>40.29</td> <td>13.76</td> <td>63.86</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13650.00	50.46	-37.74	88.20	60.27	40.29	13.76	63.86	--- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13650.00	49.16	-39.04	88.20	58.97	40.29	13.76	63.86	--- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13650.00	50.46	-37.74	88.20	60.27	40.29	13.76	63.86	--- Peak																																																												



Mode	37																																																													
	Harmonic																																																													
	UNII-7-8_6525-7125_802.11be EHT320_CH159_Full_6745MHz																																																													
ANT	CDD 9+15																																																													
Pol.	Horizontal	Vertical																																																												
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 13490.00</td> <td>47.21</td> <td>-40.99</td> <td>88.20</td> <td>57.14</td> <td>40.19</td> <td>13.71</td> <td>63.83</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 13490.00	47.21	-40.99	88.20	57.14	40.19	13.71	63.83	---	---	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>ReadAntenna Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 13490.00</td> <td>48.40</td> <td>-39.80</td> <td>88.20</td> <td>58.33</td> <td>40.19</td> <td>13.71</td> <td>63.83</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 * 13490.00	48.40	-39.80	88.20	58.33	40.19	13.71	63.83	---	---
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Loss Factor	A/Pos	T/Pos	Remark																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 13490.00	47.21	-40.99	88.20	57.14	40.19	13.71	63.83	---	---																																																					
Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss Factor	Preamp Loss Factor	A/Pos	T/Pos	Remark																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																					
1 * 13490.00	48.40	-39.80	88.20	58.33	40.19	13.71	63.83	---	---																																																					



	<b>38</b>																																																																																					
<b>Mode</b>	<b>Band Edge</b>																																																																																					
	<b>UNII-7-8_6525-7125_802.11be EHT320_CH191_Full_6905MHz</b>																																																																																					
<b>ANT</b>	<b>CDD 9+15</b>																																																																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7172.84</td> <td>51.95</td> <td>88.20</td> <td>-36.25</td> <td>38.67</td> <td>36.52</td> <td>10.19</td> <td>33.43</td> <td>100</td> <td>58</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7290.95</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>38.16</td> <td>36.26</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>58</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7172.84	51.95	88.20	-36.25	38.67	36.52	10.19	33.43	100	58	Peak	2	7290.95	51.22	74.00	-22.78	38.16	36.26	10.18	33.38	100	58	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6905.00</td> <td>88.15</td> <td>-----</td> <td>-----</td> <td>74.53</td> <td>36.90</td> <td>10.24</td> <td>33.52</td> <td>100</td> <td>58</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6905.00	88.15	-----	-----	74.53	36.90	10.24	33.52	100	58	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7172.84	51.95	88.20	-36.25	38.67	36.52	10.19	33.43	100	58	Peak																																																																											
2	7290.95	51.22	74.00	-22.78	38.16	36.26	10.18	33.38	100	58	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	6905.00	88.15	-----	-----	74.53	36.90	10.24	33.52	100	58	Peak																																																																											
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7136.64</td> <td>41.72</td> <td>68.20</td> <td>-26.48</td> <td>28.38</td> <td>36.60</td> <td>10.19</td> <td>33.45</td> <td>100</td> <td>58</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7250.31</td> <td>40.88</td> <td>54.00</td> <td>-13.12</td> <td>27.75</td> <td>36.35</td> <td>10.18</td> <td>33.40</td> <td>100</td> <td>58</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	7136.64	41.72	68.20	-26.48	28.38	36.60	10.19	33.45	100	58	Average	2	7250.31	40.88	54.00	-13.12	27.75	36.35	10.18	33.40	100	58	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6905.00</td> <td>79.05</td> <td>-----</td> <td>-----</td> <td>65.43</td> <td>36.90</td> <td>10.24</td> <td>33.52</td> <td>100</td> <td>58</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	6905.00	79.05	-----	-----	65.43	36.90	10.24	33.52	100	58	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	7136.64	41.72	68.20	-26.48	28.38	36.60	10.19	33.45	100	58	Average																																																																											
2	7250.31	40.88	54.00	-13.12	27.75	36.35	10.18	33.40	100	58	Average																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	6905.00	79.05	-----	-----	65.43	36.90	10.24	33.52	100	58	Average																																																																											



		<b>38</b>																																																																																			
<b>Mode</b>	<b>Band Edge</b>																																																																																				
	<b>UNII-7-8_6525-7125_802.11be EHT320_CH191_Full_6905MHZ</b>																																																																																				
<b>ANT</b>	<b>CDD 9+15</b>																																																																																				
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																			
<b>Peak</b>	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7160.77</td> <td>51.59</td> <td>88.20</td> <td>-36.61</td> <td>38.29</td> <td>36.55</td> <td>10.19</td> <td>33.44</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7294.12</td> <td>51.40</td> <td>74.00</td> <td>-22.60</td> <td>38.35</td> <td>36.25</td> <td>10.18</td> <td>33.38</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7160.77	51.59	88.20	-36.61	38.29	36.55	10.19	33.44	100	121	Peak	2	7294.12	51.40	74.00	-22.60	38.35	36.25	10.18	33.38	100	121	Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6905.00</td> <td>80.50</td> <td>-----</td> <td>66.88</td> <td>36.90</td> <td>10.24</td> <td>33.52</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6905.00	80.50	-----	66.88	36.90	10.24	33.52	100	121	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	7160.77	51.59	88.20	-36.61	38.29	36.55	10.19	33.44	100	121	Peak																																																																										
2	7294.12	51.40	74.00	-22.60	38.35	36.25	10.18	33.38	100	121	Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	6905.00	80.50	-----	66.88	36.90	10.24	33.52	100	121	Peak																																																																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>7125.85</td> <td>41.44</td> <td>68.20</td> <td>-26.76</td> <td>28.07</td> <td>36.62</td> <td>10.20</td> <td>33.45</td> <td>100</td> <td>121</td> <td>Average</td> </tr> <tr> <td>2</td> <td>7267.45</td> <td>40.58</td> <td>54.00</td> <td>-13.42</td> <td>27.48</td> <td>36.31</td> <td>10.18</td> <td>33.39</td> <td>100</td> <td>121</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	7125.85	41.44	68.20	-26.76	28.07	36.62	10.20	33.45	100	121	Average	2	7267.45	40.58	54.00	-13.42	27.48	36.31	10.18	33.39	100	121	Average	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6905.00</td> <td>70.62</td> <td>-----</td> <td>57.00</td> <td>36.90</td> <td>10.24</td> <td>33.52</td> <td>100</td> <td>121</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	6905.00	70.62	-----	57.00	36.90	10.24	33.52	100	121	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	7125.85	41.44	68.20	-26.76	28.07	36.62	10.20	33.45	100	121	Average																																																																										
2	7267.45	40.58	54.00	-13.42	27.48	36.31	10.18	33.39	100	121	Average																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1	6905.00	70.62	-----	57.00	36.90	10.24	33.52	100	121	Average																																																																											





Mode	38																																																																			
	Harmonic																																																																			
	UNII-7-8_6525-7125_802.11be EHT320_CH191_Full_6905MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 13 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13810.00</td> <td>49.62</td> <td>-38.58</td> <td>88.20</td> <td>59.30</td> <td>40.39</td> <td>13.81</td> <td>63.88</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13810.00	49.62	-38.58	88.20	59.30	40.39	13.81	63.88	--- Peak	<p>Data: 14 Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13810.00</td> <td>48.36</td> <td>-39.84</td> <td>88.20</td> <td>58.04</td> <td>40.39</td> <td>13.81</td> <td>63.88</td> <td>--- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13810.00	48.36	-39.84	88.20	58.04	40.39	13.81	63.88	--- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13810.00	49.62	-38.58	88.20	59.30	40.39	13.81	63.88	--- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13810.00	48.36	-39.84	88.20	58.04	40.39	13.81	63.88	--- Peak																																																												



Mode	39																																																																			
	Harmonic																																																																			
	UNII-6-7_6425-6875_802.11be EHT40_CH115_Full_6525MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Data: 17</p> <p>Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13050.00</td> <td>49.11</td> <td>-39.09</td> <td>88.20</td> <td>59.38</td> <td>39.93</td> <td>13.57</td> <td>63.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13050.00	49.11	-39.09	88.20	59.38	39.93	13.57	63.77	--- --- Peak	<p>Data: 18</p> <p>Date: 2023-09-28</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13050.00</td> <td>48.42</td> <td>-39.78</td> <td>88.20</td> <td>58.69</td> <td>39.93</td> <td>13.57</td> <td>63.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13050.00	48.42	-39.78	88.20	58.69	39.93	13.57	63.77	--- --- Peak
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13050.00	49.11	-39.09	88.20	59.38	39.93	13.57	63.77	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13050.00	48.42	-39.78	88.20	58.69	39.93	13.57	63.77	--- --- Peak																																																												



Mode	40																																																																			
	Harmonic																																																																			
	UNII-6-7_6425-6875_802.11be EHT80_CH119_Full_6545MHz																																																																			
ANT	CDD 9+15																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak																																																																				
Avg	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13090.00</td> <td>49.70</td> <td>-38.50</td> <td>88.20</td> <td>59.93</td> <td>39.95</td> <td>13.59</td> <td>63.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13090.00	49.70	-38.50	88.20	59.93	39.95	13.59	63.77	--- --- Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 * 13090.00</td> <td>48.34</td> <td>-39.86</td> <td>88.20</td> <td>58.57</td> <td>39.95</td> <td>13.59</td> <td>63.77</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level	Loss	Factor	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1 * 13090.00	48.34	-39.86	88.20	58.57	39.95	13.59	63.77	--- --- Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13090.00	49.70	-38.50	88.20	59.93	39.95	13.59	63.77	--- --- Peak																																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																													
Freq	Level	Limit	Level	Loss	Factor	Factor																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																													
1 * 13090.00	48.34	-39.86	88.20	58.57	39.95	13.59	63.77	--- --- Peak																																																												