







Test Mode :	802.11be EHT20	Test Channel :	06
-------------	----------------	----------------	----

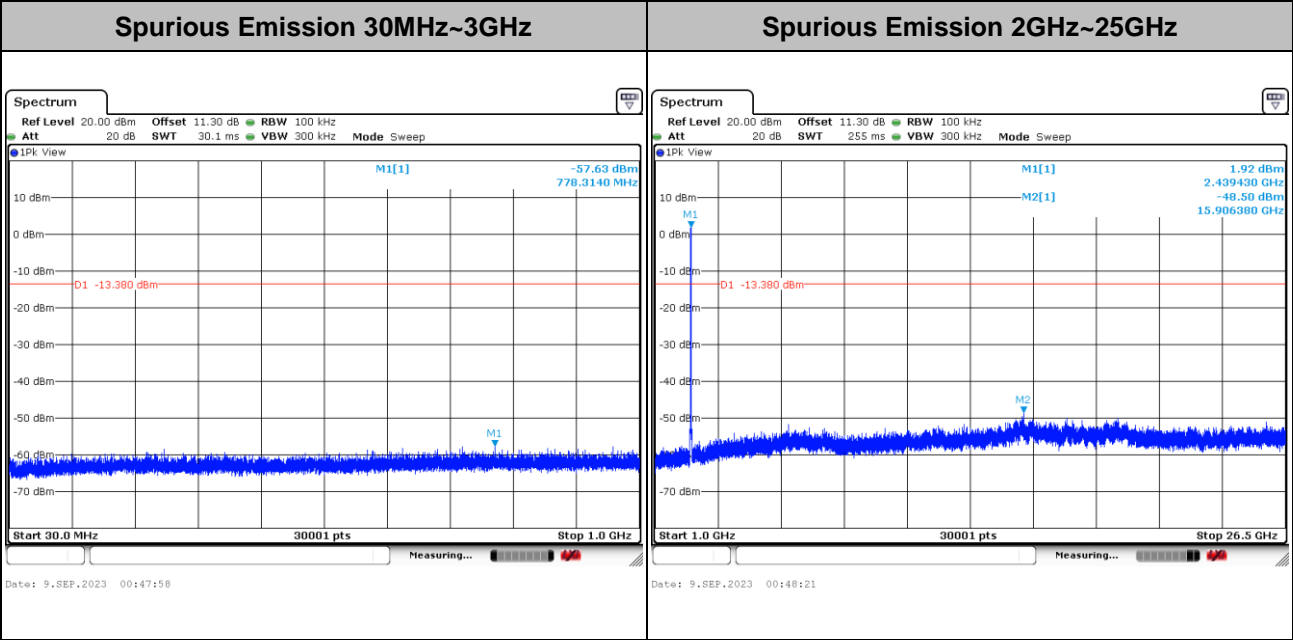


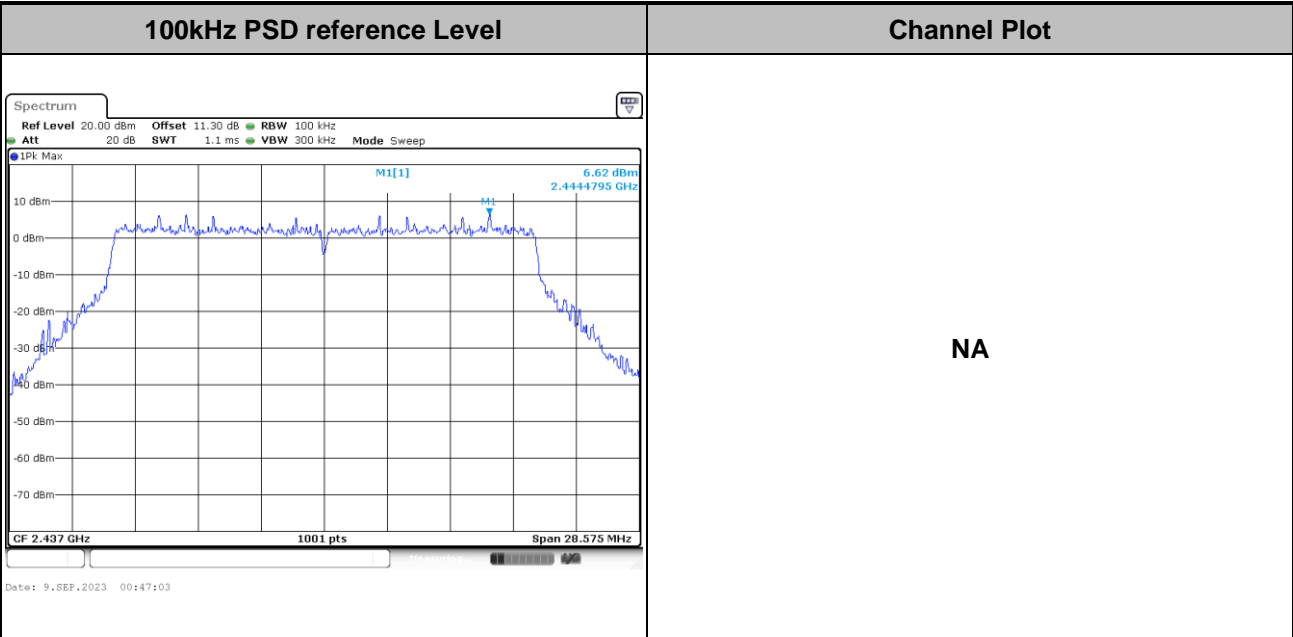


Test Mode : 802.11be EHT20 Test Channel : 11

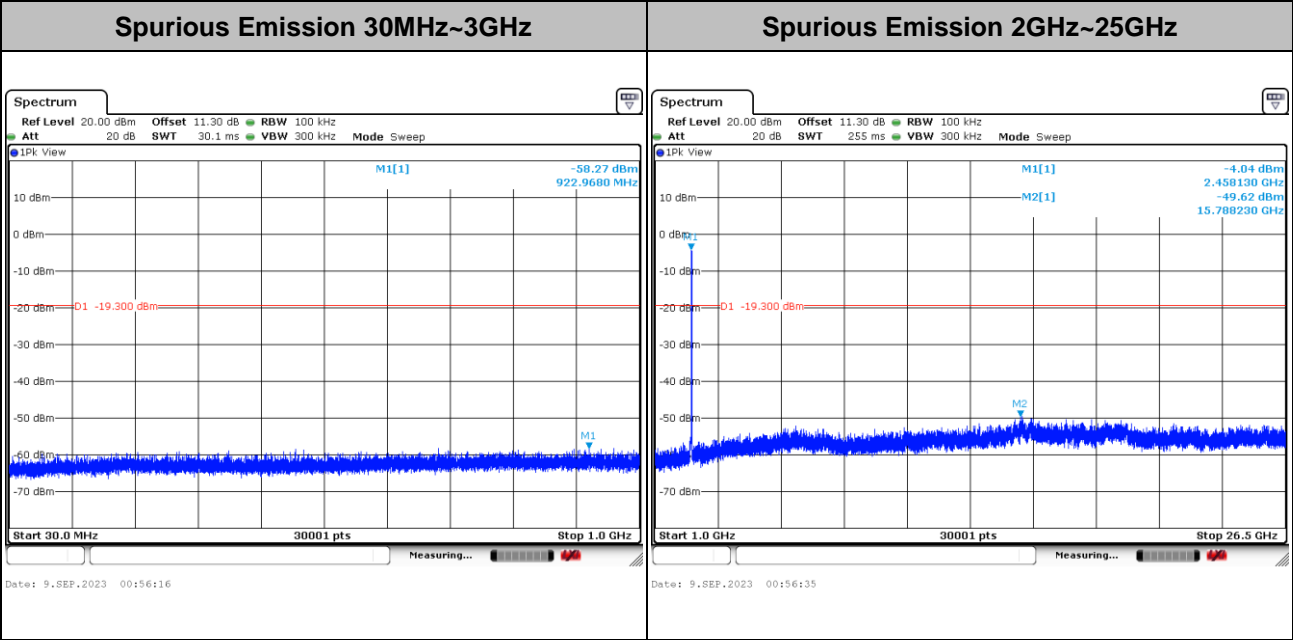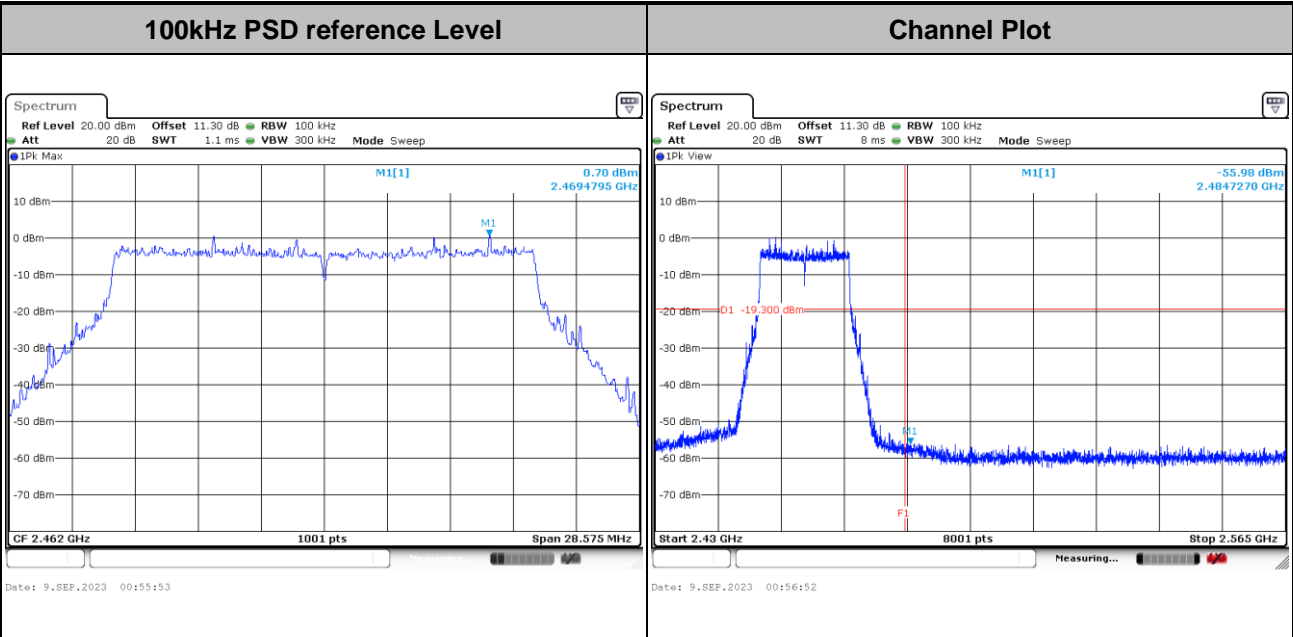





Test Mode :	802.11be EHT40	Test Channel :	03
-------------	----------------	----------------	----

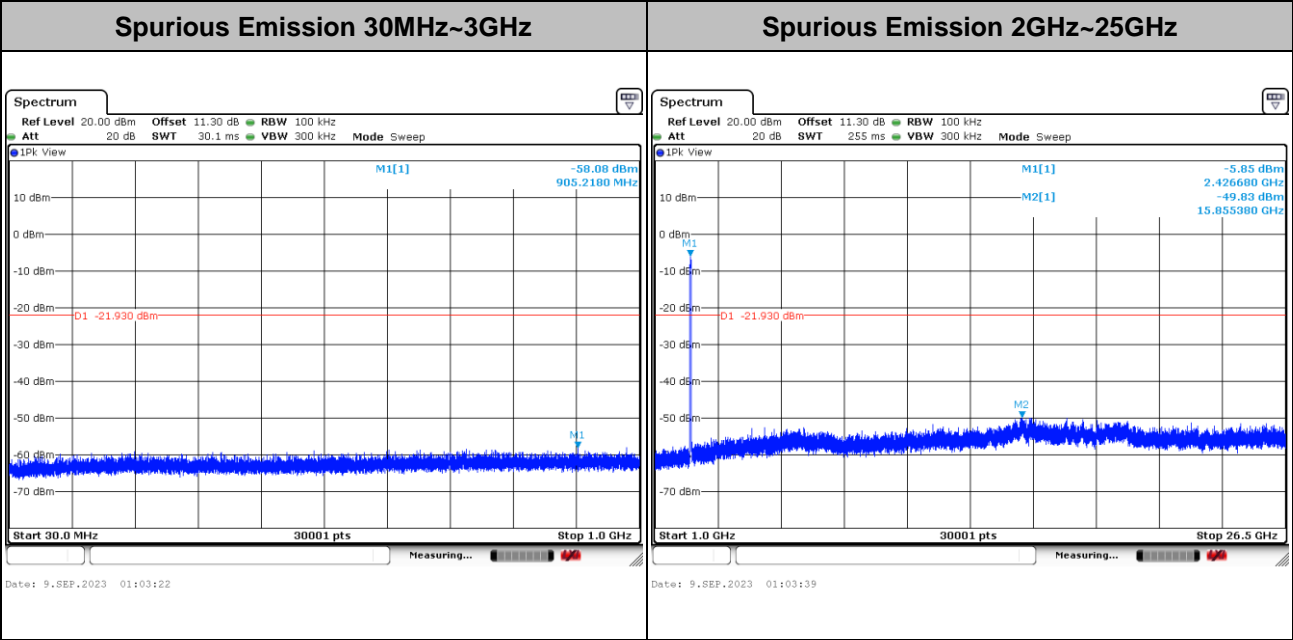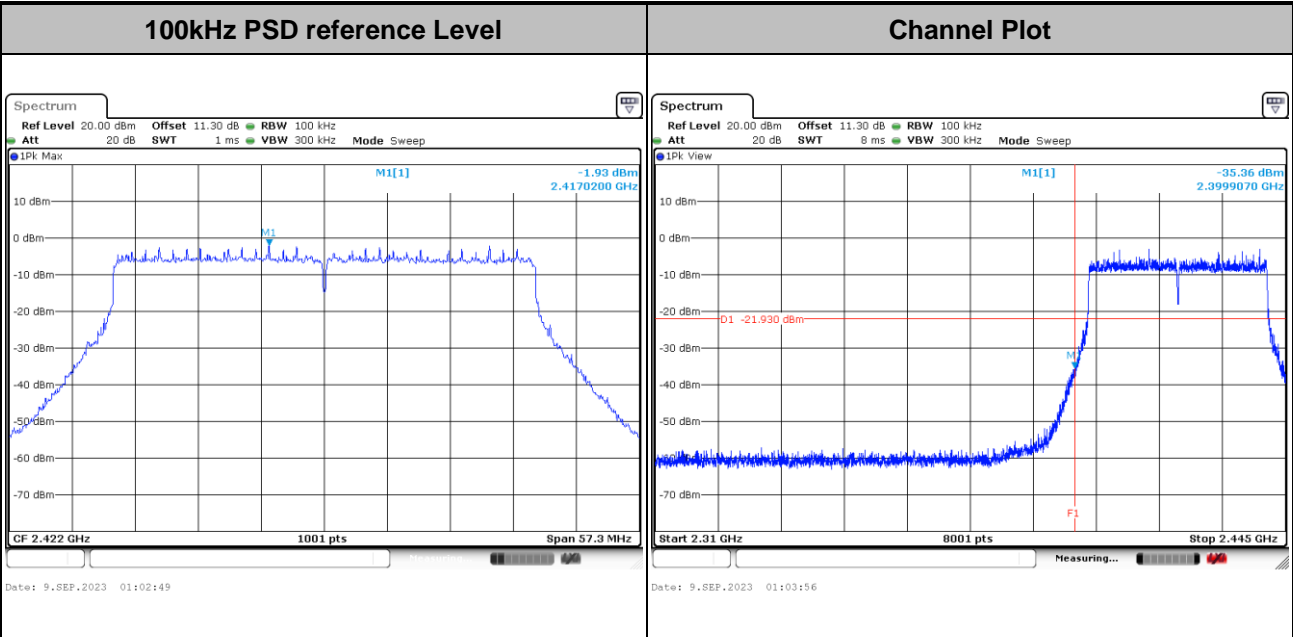





Test Mode :	802.11be EHT40	Test Channel :	06
-------------	----------------	----------------	----

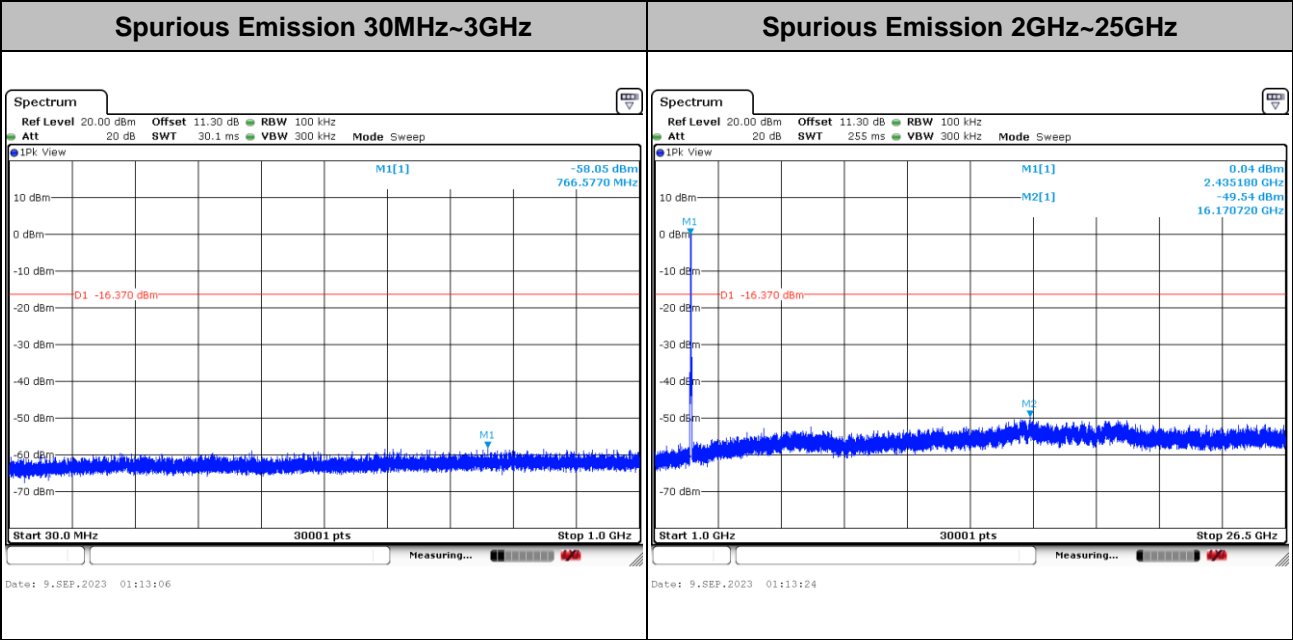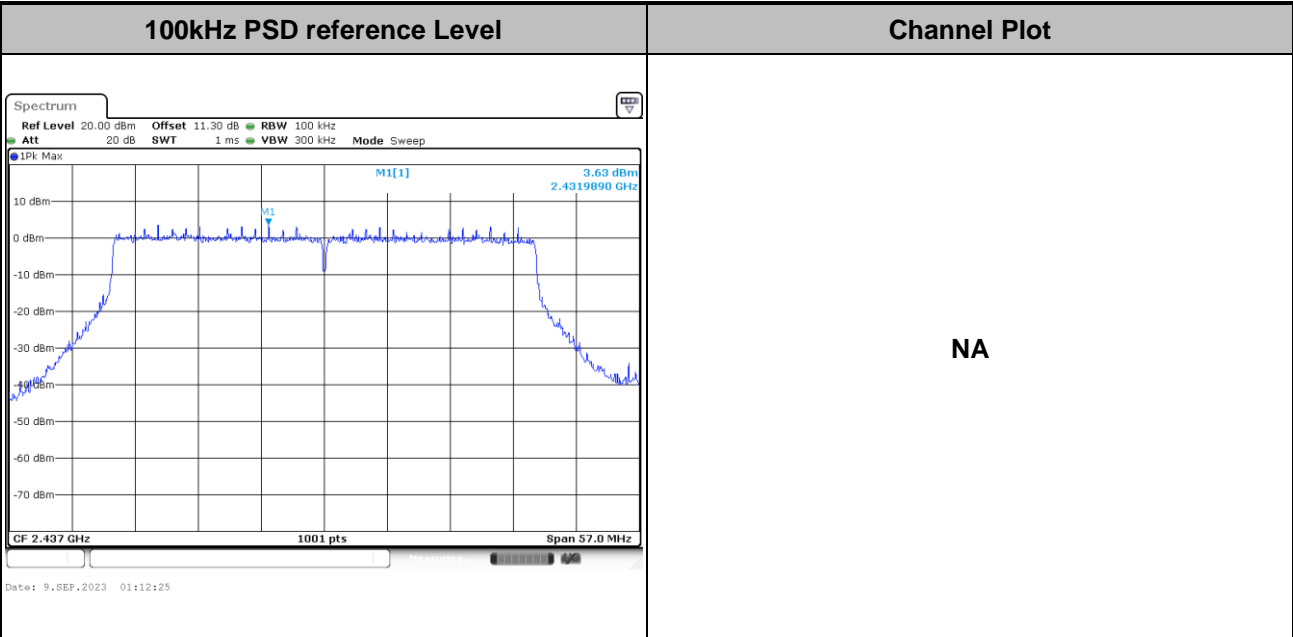



Test Mode :	802.11be EHT40	Test Channel :	09
-------------	----------------	----------------	----

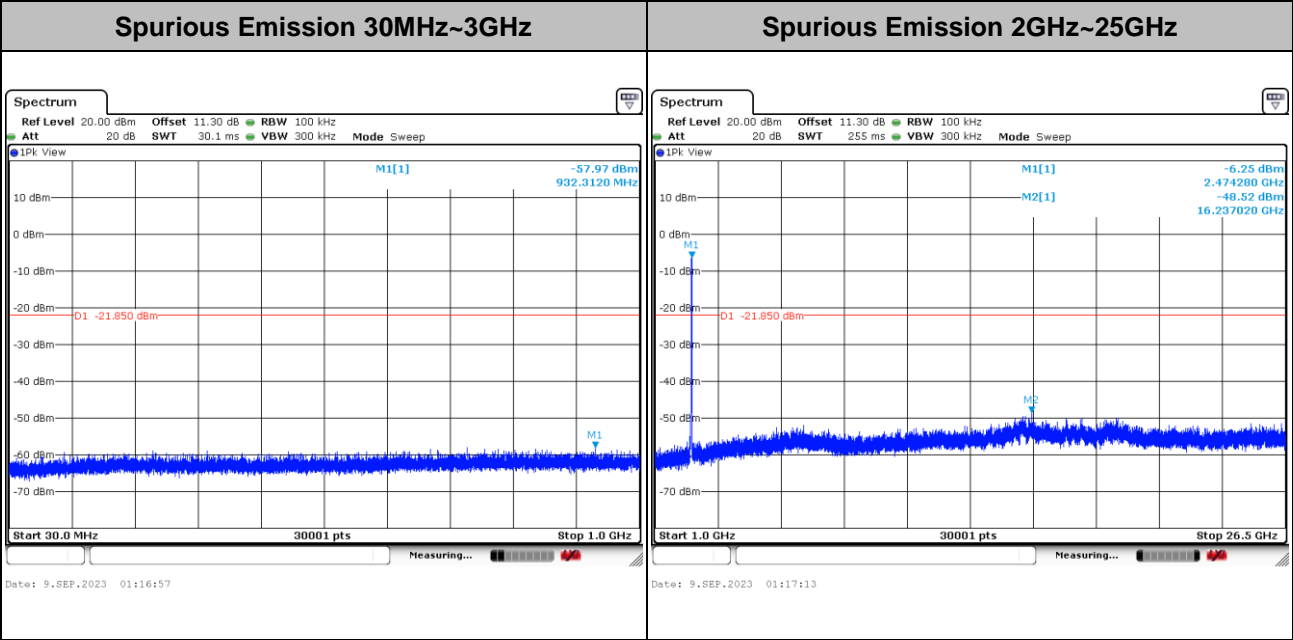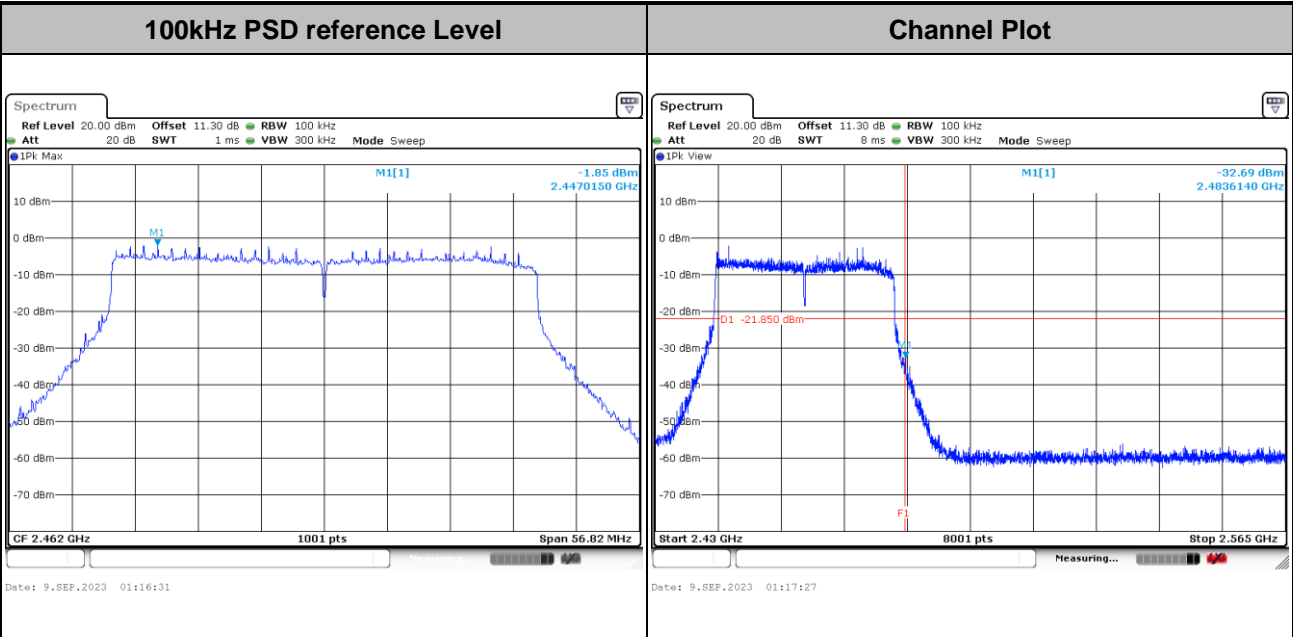



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

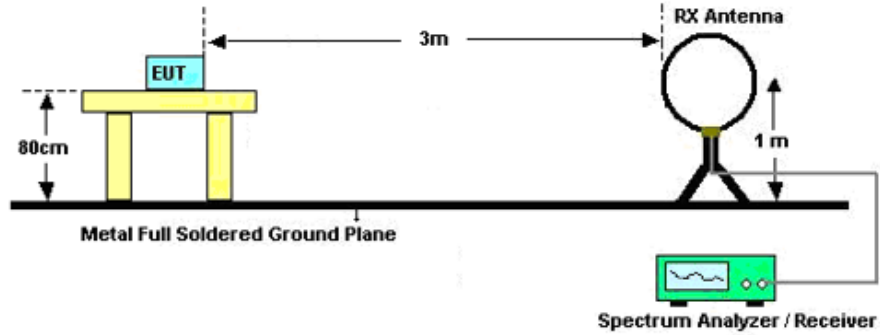

For radiated emissions from 30MHz to 1GHz

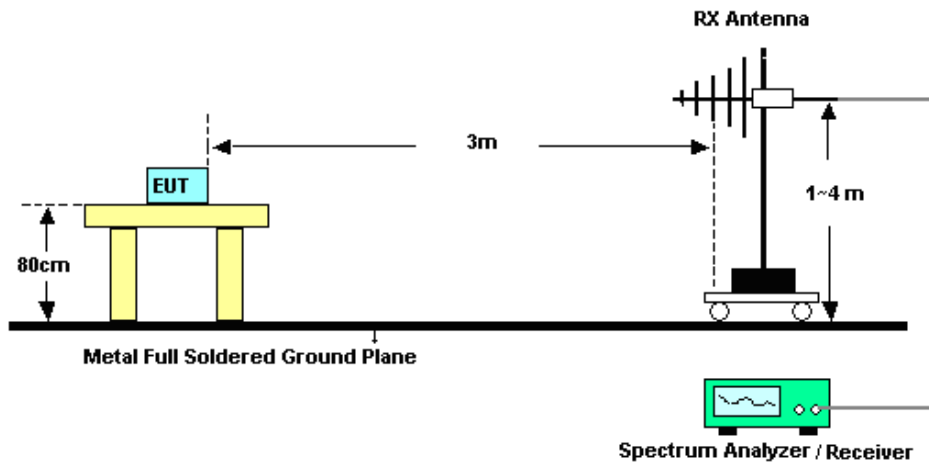

For radiated emissions above 1GHz

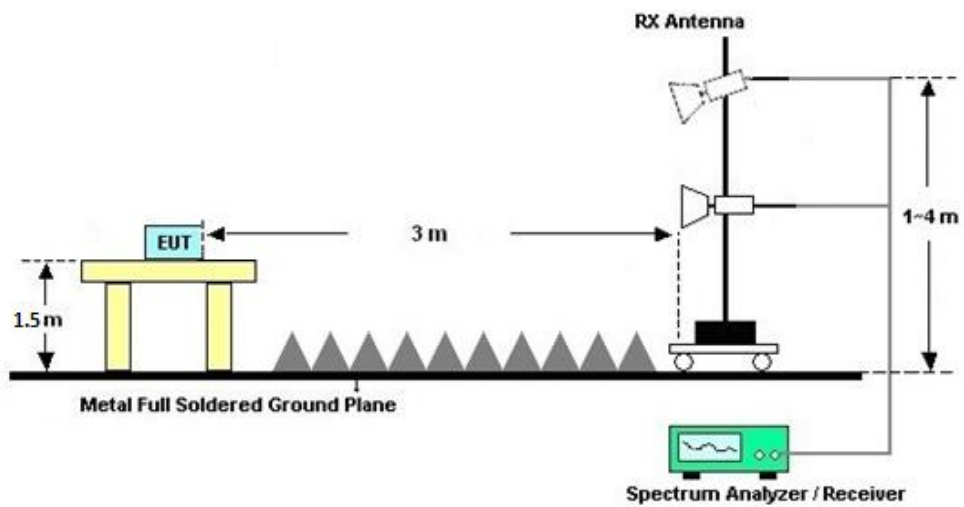



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

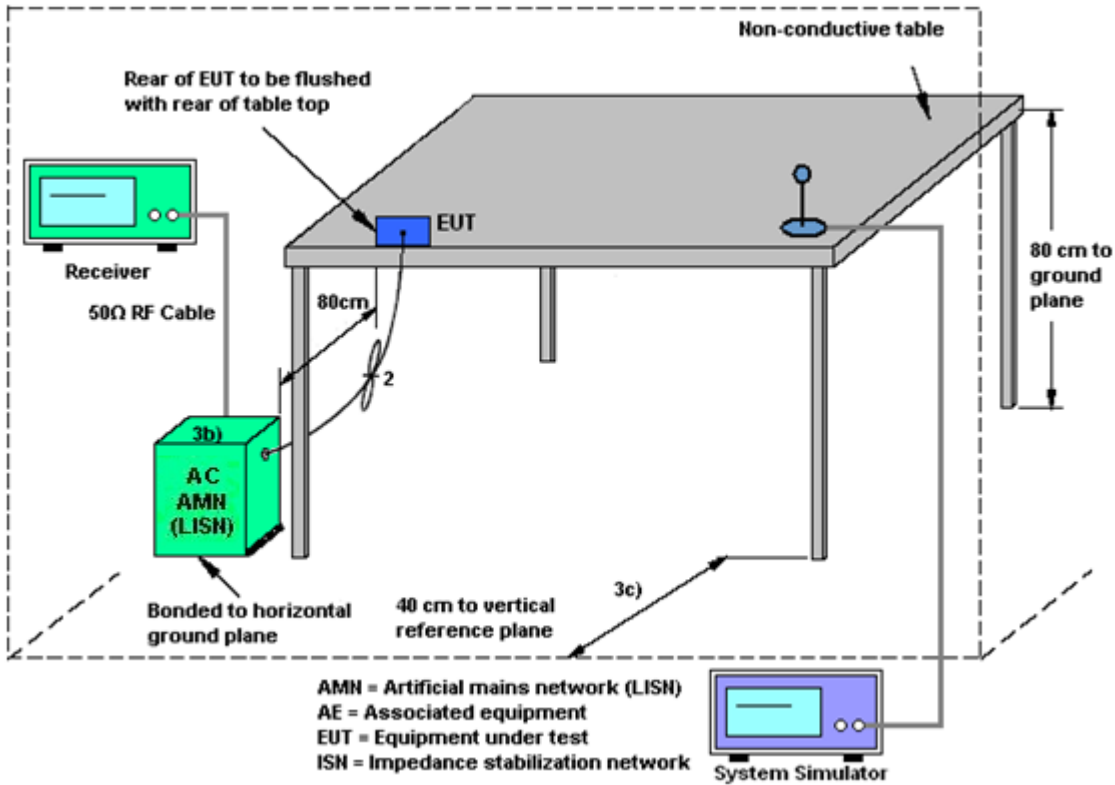

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 12	Ant. 7	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-1.60	-2.50	-1.60	0.97	0.00	0.00



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Sep. 08, 2023~ Sep. 09, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Sep. 08, 2023~ Sep. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Sep. 08, 2023~ Sep. 09, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	Sep. 07, 2023~ Sep. 20, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	Sep. 07, 2023~ Sep. 20, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Sep. 07, 2023~ Sep. 20, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 20, 2023	Sep. 07, 2023~ Sep. 20, 2023	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	Sep. 07, 2023~ Sep. 20, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Sep. 07, 2023~ Sep. 20, 2023	Jul. 06, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2023	Sep. 07, 2023~ Sep. 20, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 19, 2022	Sep. 07, 2023~ Sep. 20, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Sep. 07, 2023~ Sep. 20, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	Sep. 07, 2023~ Sep. 20, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	1 N/A	Nov. 10, 2022	Sep. 07, 2023~ Sep. 20, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 07, 2023~ Sep. 20, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 07, 2023~ Sep. 20, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Sep. 15, 2023~ Sep. 18, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Sep. 15, 2023~ Sep. 18, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Sep. 15, 2023~ Sep. 18, 2023	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Sep. 15, 2023~ Sep. 18, 2023	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Chen Ran	Temperature:	21~25	°C
Test Date:	2023/9/8~2023/9/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant7	Ant7		
11b	1Mbps	2	1	2412	13.19	8.06	0.50	Pass
11b	1Mbps	2	6	2437	13.34	7.60	0.50	Pass
11b	1Mbps	2	11	2462	13.79	8.12	0.50	Pass
11g	6Mbps	2	1	2412	16.93	16.40	0.50	Pass
11g	6Mbps	2	6	2437	17.08	16.40	0.50	Pass
11g	6Mbps	2	11	2462	17.13	16.40	0.50	Pass
HT20	MCS0	2	1	2412	18.03	17.64	0.50	Pass
HT20	MCS0	2	6	2437	18.08	17.66	0.50	Pass
HT20	MCS0	2	11	2462	18.23	17.66	0.50	Pass
HT40	MCS0	2	3	2422	37.06	36.44	0.50	Pass
HT40	MCS0	2	6	2437	37.16	36.56	0.50	Pass
HT40	MCS0	2	9	2452	37.06	36.48	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band MIMO																
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant12	Ant7	SUM	Ant12	Ant7	Ant12	Ant7	Ant12	Ant7	Ant12	Ant7	
11b	1Mbps	2	1	2412	17.93	18.56	21.27	30.00		-1.60		19.67		36.00	Pass	
11b	1Mbps	2	6	2437	21.42	21.40	24.42	30.00		-1.60		22.82		36.00	Pass	
11b	1Mbps	2	11	2462	18.48	18.63	21.57	30.00		-1.60		19.97		36.00	Pass	
11g	6Mbps	2	1	2412	17.18	17.62	20.42	30.00		-1.60		18.82		36.00	Pass	
11g	6Mbps	2	2	2417	17.22	17.68	20.47	30.00		-1.60		18.87		36.00	Pass	
11g	6Mbps	2	3	2422	23.71	23.78	26.76	30.00		-1.60		25.16		36.00	Pass	
11g	6Mbps	2	6	2437	23.74	23.80	26.78	30.00		-1.60		25.18		36.00	Pass	
11g	6Mbps	2	9	2452	23.73	23.79	26.77	30.00		-1.60		25.17		36.00	Pass	
11g	6Mbps	2	10	2457	17.66	17.76	20.72	30.00		-1.60		19.12		36.00	Pass	
11g	6Mbps	2	11	2462	17.19	17.26	20.24	30.00		-1.60		18.64		36.00	Pass	
HT20	MCS0	2	1	2412	17.39	17.77	20.59	30.00		-1.60		18.99		36.00	Pass	
HT20	MCS0	2	2	2417	17.28	17.72	20.52	30.00		-1.60		18.92		36.00	Pass	
HT20	MCS0	2	3	2422	23.78	23.86	26.83	30.00		-1.60		25.23		36.00	Pass	
HT20	MCS0	2	6	2437	23.83	23.90	26.88	30.00		-1.60		25.28		36.00	Pass	
HT20	MCS0	2	9	2452	23.77	23.88	26.84	30.00		-1.60		25.24		36.00	Pass	
HT20	MCS0	2	10	2457	17.75	17.84	20.81	30.00		-1.60		19.21		36.00	Pass	
HT20	MCS0	2	11	2462	17.63	17.70	20.68	30.00		-1.60		19.08		36.00	Pass	
HT40	MCS0	2	3	2422	17.47	17.66	20.58	30.00		-1.60		18.98		36.00	Pass	
HT40	MCS0	2	4	2427	17.66	17.82	20.75	30.00		-1.60		19.15		36.00	Pass	
HT40	MCS0	2	5	2432	23.92	24.00	26.97	30.00		-1.60		25.37		36.00	Pass	
HT40	MCS0	2	6	2437	23.23	23.38	26.32	30.00		-1.60		24.72		36.00	Pass	
HT40	MCS0	2	7	2442	22.94	23.02	25.99	30.00		-1.60		24.39		36.00	Pass	
HT40	MCS0	2	8	2447	17.78	17.92	20.86	30.00		-1.60		19.26		36.00	Pass	
HT40	MCS0	2	9	2452	17.55	17.75	20.66	30.00		-1.60		19.06		36.00	Pass	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant12	Ant7	Worse + 3.01	Ant12	Ant7	Ant12	Ant7	
11b	1Mbps	2	1	2412	-7.41	-7.02	-4.01	0.97		8.00		Pass
11b	1Mbps	2	6	2437	-4.71	-4.26	-1.25	0.97		8.00		Pass
11b	1Mbps	2	11	2462	-7.95	-7.71	-4.70	0.97		8.00		Pass
11g	6Mbps	2	1	2412	-12.88	-12.82	-9.81	0.97		8.00		Pass
11g	6Mbps	2	6	2437	-6.55	-6.51	-3.50	0.97		8.00		Pass
11g	6Mbps	2	11	2462	-12.57	-12.60	-9.56	0.97		8.00		Pass
HT20	MCS0	2	1	2412	-13.22	-13.33	-10.21	0.97		8.00		Pass
HT20	MCS0	2	6	2437	-7.17	-7.16	-4.15	0.97		8.00		Pass
HT20	MCS0	2	11	2462	-13.33	-13.02	-10.01	0.97		8.00		Pass
HT40	MCS0	2	3	2422	-16.58	-16.51	-13.50	0.97		8.00		Pass
HT40	MCS0	2	6	2437	-11.52	-11.27	-8.26	0.97		8.00		Pass
HT40	MCS0	2	9	2452	-16.36	-16.43	-13.35	0.97		8.00		Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
						Ant7	Ant7		
BE20	MCS0	1	1	2412	Full	19.13	19.03	0.50	Pass
BE20	MCS0	1	6	2437	Full	19.13	19.05	0.50	Pass
BE20	MCS0	1	11	2462	Full	19.28	19.05	0.50	Pass
BE40	MCS0	1	3	2422	Full	38.46	38.20	0.50	Pass
BE40	MCS0	1	6	2437	Full	38.46	38.00	0.50	Pass
BE40	MCS0	1	9	2452	Full	38.36	37.88	0.50	Pass

TEST RESULTS DATA
Average Output Power
(Reference Only)

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant12	Ant7	SUM	Ant12	Ant7	Ant12	Ant7	Ant12	Ant7			
BE20	MCS0	2	1	2412	Full	12.00	12.20	15.11	30.00	-1.60	13.51	36.00	Pass				
BE20	MCS0	2	1	2412	26/0	8.20	8.30	11.26	30.00	-1.60	9.66	36.00	Pass				
BE20	MCS0	2	1	2412	52/37	11.30	11.70	14.51	30.00	-1.60	12.91	36.00	Pass				
BE20	MCS0	2	1	2412	106/53	14.30	14.90	17.62	30.00	-1.60	16.02	36.00	Pass				
BE20	MCS0	2	2	2417	Full	11.90	12.30	15.11	30.00	-1.60	13.51	36.00	Pass				
BE20	MCS0	2	3	2422	Full	16.40	16.90	19.67	30.00	-1.60	18.07	36.00	Pass				
BE20	MCS0	2	6	2437	Full	17.80	17.90	20.86	30.00	-1.60	19.26	36.00	Pass				
BE20	MCS0	2	9	2452	Full	16.40	16.90	19.67	30.00	-1.60	18.07	36.00	Pass				
BE20	MCS0	2	10	2457	Full	12.00	12.00	15.01	30.00	-1.60	13.41	36.00	Pass				
BE20	MCS0	2	11	2462	Full	12.00	12.10	15.06	30.00	-1.60	13.46	36.00	Pass				
BE20	MCS0	2	11	2462	26/8	8.10	8.60	11.37	30.00	-1.60	9.77	36.00	Pass				
BE20	MCS0	2	11	2462	52/40	11.30	11.60	14.46	30.00	-1.60	12.86	36.00	Pass				
BE20	MCS0	2	11	2462	106/54	14.40	14.60	17.51	30.00	-1.60	15.91	36.00	Pass				
BE40	MCS0	2	3	2422	Full	12.00	12.00	15.01	30.00	-1.60	13.41	36.00	Pass				
HE40	MCS0	2	4	2427	Full	11.90	11.90	14.91	30.00	-1.60	13.31	36.00	Pass				
HE40	MCS0	2	5	2432	Full	16.30	16.60	19.46	30.00	-1.60	17.86	36.00	Pass				
BE40	MCS0	2	6	2437	Full	17.00	17.10	20.06	30.00	-1.60	18.46	36.00	Pass				
BE40	MCS0	2	7	2442	Full	16.40	16.70	19.56	30.00	-1.60	17.96	36.00	Pass				
BE40	MCS0	2	8	2447	Full	11.70	12.00	14.86	30.00	-1.60	13.26	36.00	Pass				
BE40	MCS0	2	9	2452	Full	12.00	12.00	15.01	30.00	-1.60	13.41	36.00	Pass				

Setting	
Ant 1	Ant 2
13.00	
9.00	
11.50	
14.50	
13.00	
17.50	
18.50	
17.50	
13.00	
13.00	
8.50	
11.50	
14.50	
13.00	
13.00	
17.50	
18.00	
17.50	
13.00	
13.00	

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band MIMO																	
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant12	Ant7	SUM	Ant12	Ant7	Ant12	Ant7	Ant12	Ant7	Ant12	Ant7	
BE20	MCS0	2	1	2412	Full	18.30	18.36	21.34	30.00		-1.60		19.74		36.00		Pass
BE20	MCS0	2	1	2412	26/0	15.86	16.28	19.09	30.00		-1.60		17.49		36.00		Pass
BE20	MCS0	2	1	2412	52/37	18.39	18.73	21.57	30.00		-1.60		19.97		36.00		Pass
BE20	MCS0	2	1	2412	106/53	21.75	22.11	24.94	30.00		-1.60		23.34		36.00		Pass
BE20	MCS4	2	2	2417	Full	18.23	18.35	21.30	30.00		-1.60		19.70		36.00		Pass
BE20	MCS5	2	3	2422	Full	23.22	23.40	26.32	30.00		-1.60		24.72		36.00		Pass
BE20	MCS0	2	6	2437	Full	23.92	23.96	26.95	30.00		-1.60		25.35		36.00		Pass
BE20	MCS0	2	9	2452	Full	23.22	23.54	26.39	30.00		-1.60		24.79		36.00		Pass
BE20	MCS0	2	10	2457	Full	18.25	18.32	21.30	30.00		-1.60		19.70		36.00		Pass
BE20	MCS0	2	11	2462	Full	18.28	18.33	21.32	30.00		-1.60		19.72		36.00		Pass
BE20	MCS0	2	11	2462	26/8	15.50	15.91	18.72	30.00		-1.60		17.12		36.00		Pass
BE20	MCS0	2	11	2462	52/40	18.57	18.67	21.63	30.00		-1.60		20.03		36.00		Pass
BE20	MCS0	2	11	2462	106/54	21.62	21.92	24.78	30.00		-1.60		23.18		36.00		Pass
BE40	MCS0	2	3	2422	Full	18.20	18.37	21.30	30.00		-1.60		19.70		36.00		Pass
HE40	MCS0	2	4	2427	Full	18.50	18.72	21.62	30.00		-1.60		20.02		36.00		Pass
HE40	MCS0	2	5	2432	Full	22.95	23.21	26.09	30.00		-1.60		24.49		36.00		Pass
BE40	MCS0	2	6	2437	Full	23.45	23.56	26.52	30.00		-1.60		24.92		36.00		Pass
HE40	MCS0	2	7	2442	Full	22.85	23.33	26.11	30.00		-1.60		24.51		36.00		Pass
HE40	MCS0	2	8	2447	Full	18.45	18.89	21.69	30.00		-1.60		20.09		36.00		Pass
BE40	MCS0	2	9	2452	Full	18.35	18.22	21.30	30.00		-1.60		19.70		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant12	Ant7	Worse + 3.01	Ant12	Ant7	Ant12	Ant7	
BE20	MCS0	2	1	2412	Full	-13.69	-13.51	-10.50	0.97		8.00		Pass
BE20	MCS0	2	1	2412	26/0	-8.52	-8.49	-5.48	0.97		8.00		Pass
BE20	MCS0	2	1	2412	52/37	-9.34	-8.91	-5.90	0.97		8.00		Pass
BE20	MCS0	2	1	2412	106/53	-8.66	-8.27	-5.26	0.97		8.00		Pass
BE20	MCS0	2	6	2437	Full	-8.42	-8.51	-5.41	0.97		8.00		Pass
BE20	MCS0	2	11	2462	Full	-13.88	-13.25	-10.24	0.97		8.00		Pass
BE20	MCS0	2	11	2462	26/8	-9.13	-8.89	-5.88	0.97		8.00		Pass
BE20	MCS0	2	11	2462	52/40	-8.35	-8.21	-5.20	0.97		8.00		Pass
BE20	MCS0	2	11	2462	106/54	-8.82	-8.86	-5.81	0.97		8.00		Pass
BE40	MCS0	2	3	2422	Full	-17.63	-17.66	-14.62	0.97		8.00		Pass
BE40	MCS0	2	6	2437	Full	-11.58	-11.79	-8.57	0.97		8.00		Pass
BE40	MCS0	2	9	2452	Full	-17.48	-17.39	-14.38	0.97		8.00		Pass

Measured power density (dBm) has offset with cable loss.



<802.11be Small RU>

Maximum conducted output power

Test Result Peak Power

Test Mode	Ant	Freq (MHz)	MRU Type	MRU Index	Set Power	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11BE20 MIMO	Ant12	2412	52+26_OFDMA	1	11.5	18.37	≤30.00	16.77	≤36.00	PASS
			106+26_OFDMA	1	14.5	21.66	≤30.00	20.06	≤36.00	PASS
	Ant7	2412	52+26_OFDMA	1	11.5	18.55	≤30.00	16.05	≤36.00	PASS
			106+26_OFDMA	1	14.5	22.09	≤30.00	19.59	≤36.00	PASS
	total	2412	52+26_OFDMA	1	---	21.47	≤30.00	19.87	≤36.00	PASS
			106+26_OFDMA	1	---	24.89	≤30.00	23.29	≤36.00	PASS
	Ant12	2462	52+26_OFDMA	3	11.5	18.36	≤30.00	16.76	≤36.00	PASS
			106+26_OFDMA	2	14.5	21.71	≤30.00	20.11	≤36.00	PASS
	Ant7	2462	52+26_OFDMA	3	11.5	18.28	≤30.00	15.78	≤36.00	PASS
			106+26_OFDMA	2	14.5	21.82	≤30.00	19.32	≤36.00	PASS
	total	2462	52+26_OFDMA	3	---	21.33	≤30.00	19.73	≤36.00	PASS
			106+26_OFDMA	2	---	24.78	≤30.00	23.18	≤36.00	PASS





Maximum power spectral density



Test Result



TestMode	Antenna	Channel	MRU Type	MRU Index	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11BE20MIMO	Ant12	2412	52+26_OFDMA	1	-10.73	≤8.00	PASS
			106+26_OFDMA	1	-9.74	≤8.00	PASS
	Ant7	2412	52+26_OFDMA	1	-10.24	≤8.00	PASS
			106+26_OFDMA	1	-9.59	≤8.00	PASS
	total	2412	52+26_OFDMA	1	-7.47	≤8.00	PASS
			106+26_OFDMA	1	-6.65	≤8.00	PASS
	Ant12	2462	52+26_OFDMA	3	-9.97	≤8.00	PASS
			106+26_OFDMA	2	-9.64	≤8.00	PASS
	Ant7	2462	52+26_OFDMA	3	-10.07	≤8.00	PASS
			106+26_OFDMA	2	-9.20	≤8.00	PASS
	total	2462	52+26_OFDMA	3	-7.01	≤8.00	PASS
			106+26_OFDMA	2	-6.40	≤8.00	PASS





Test Graphs

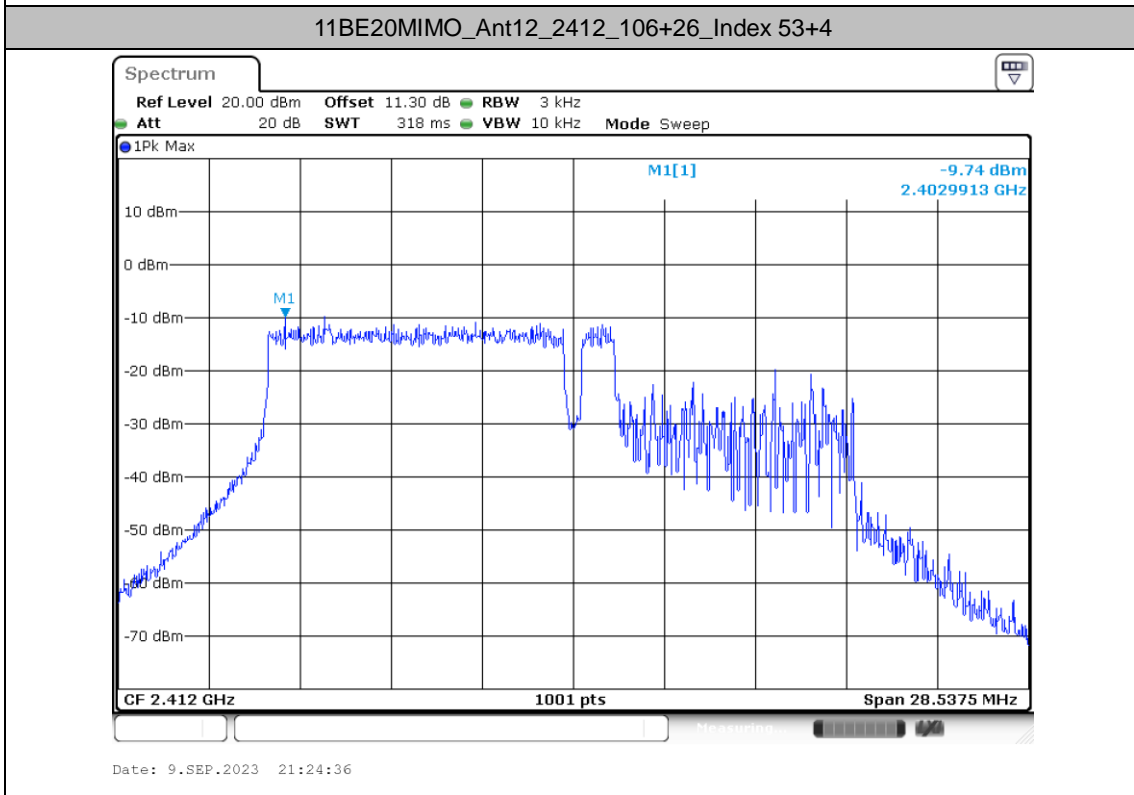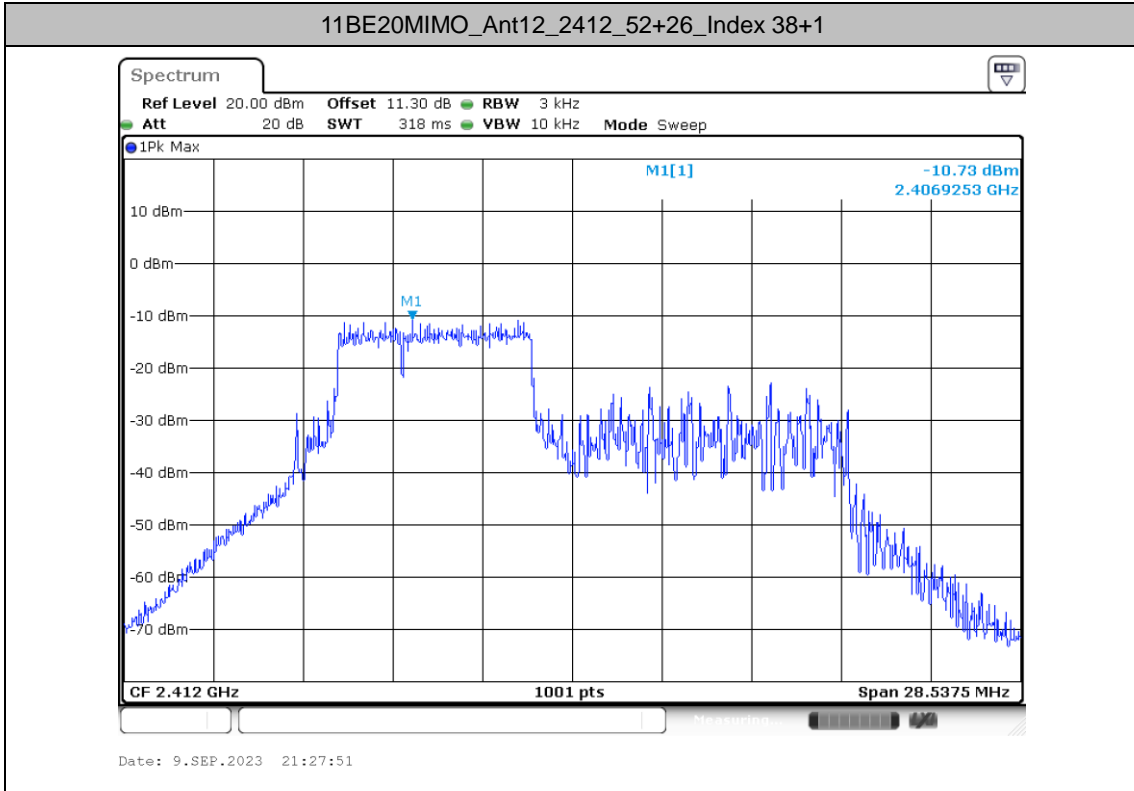

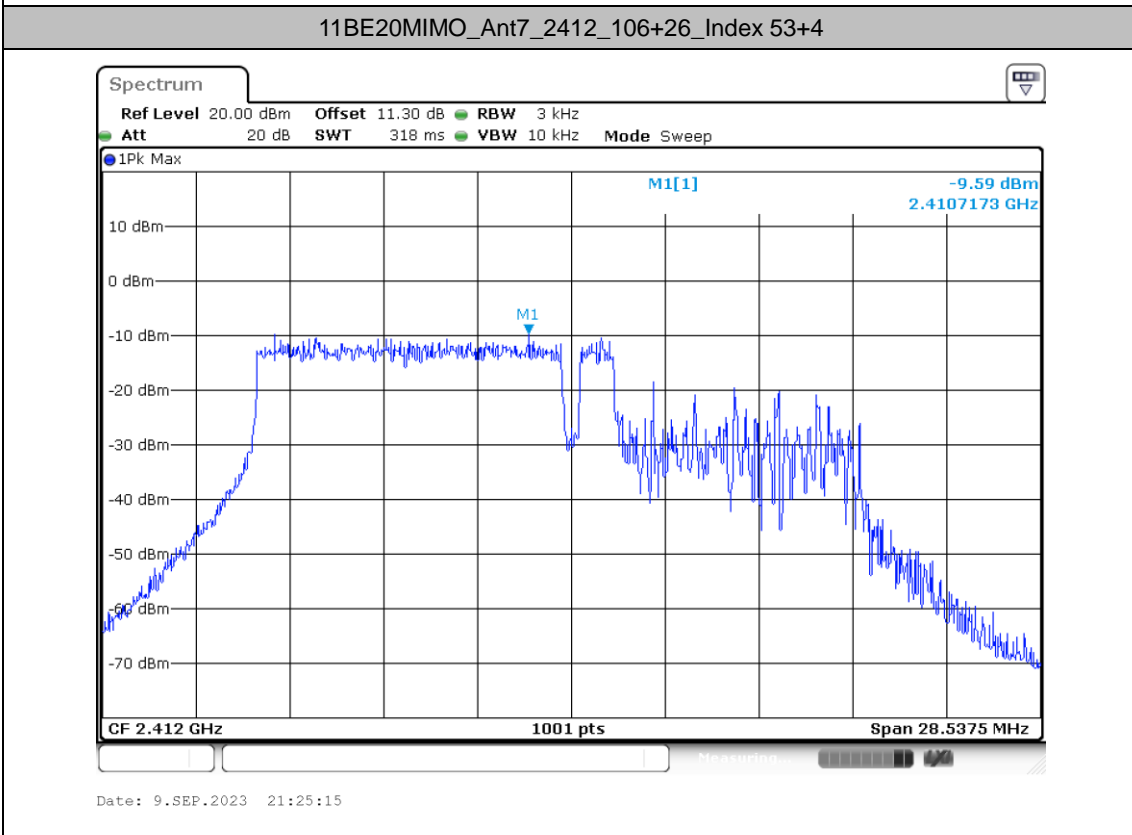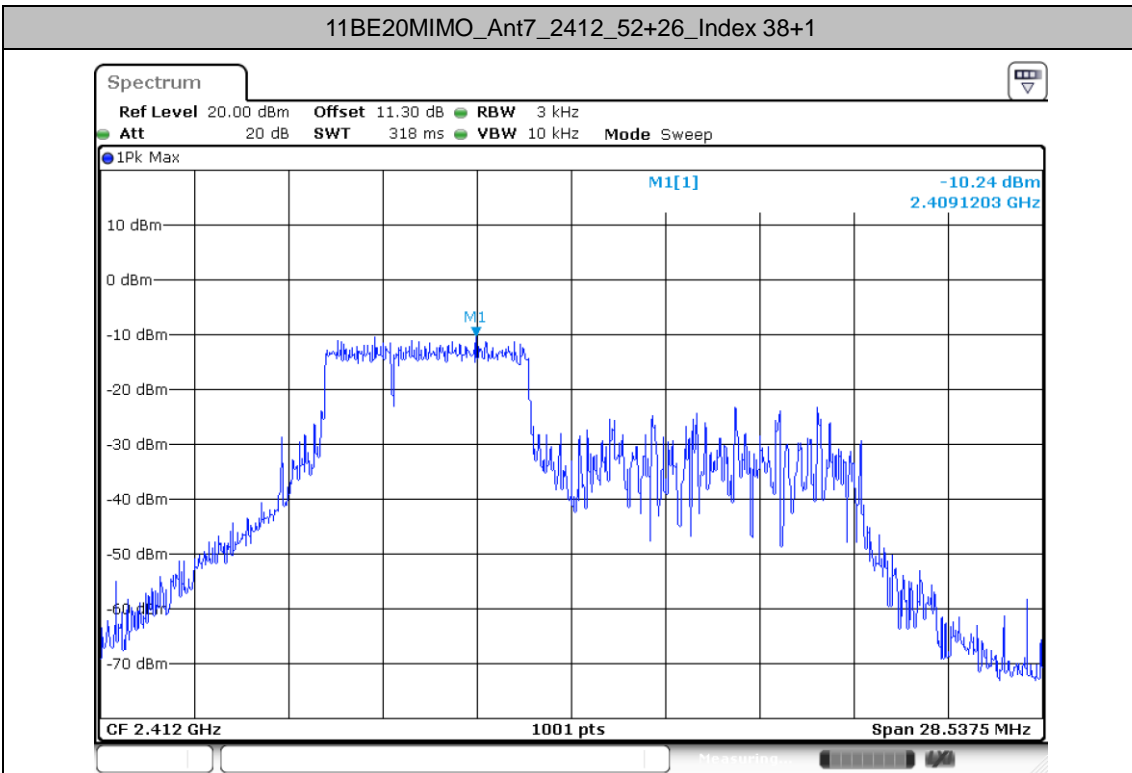

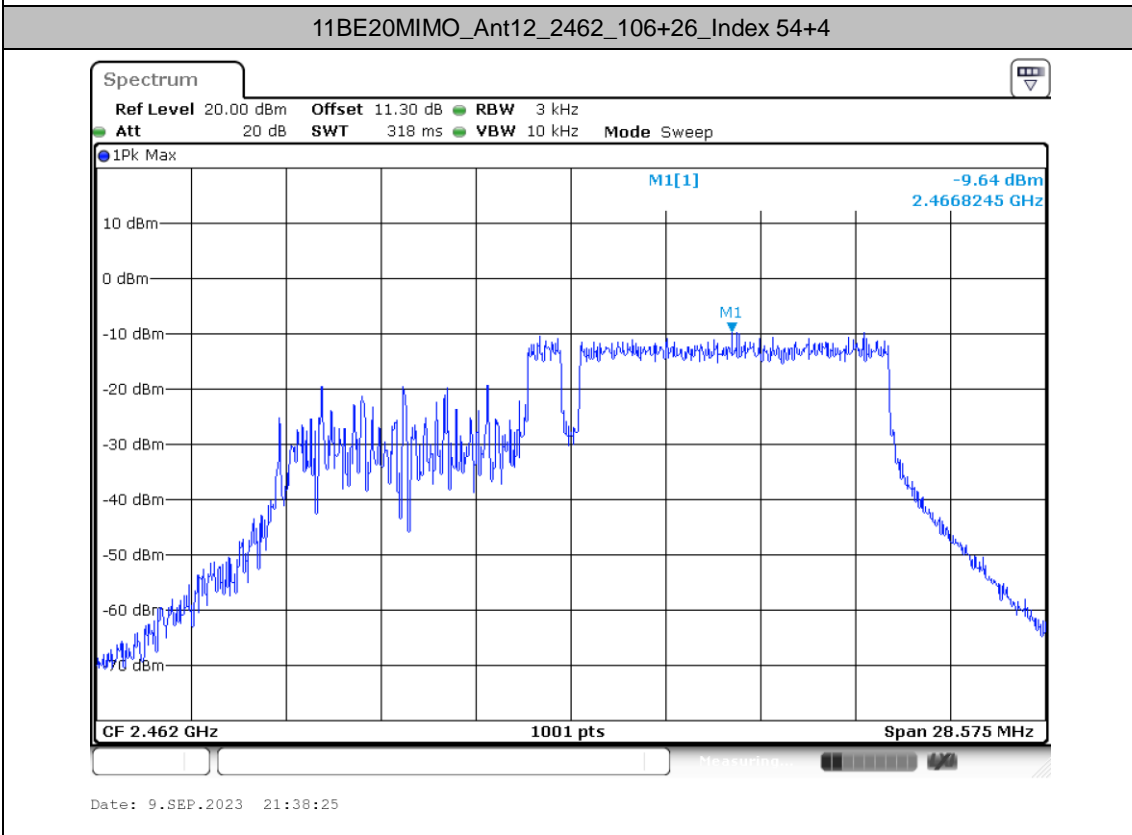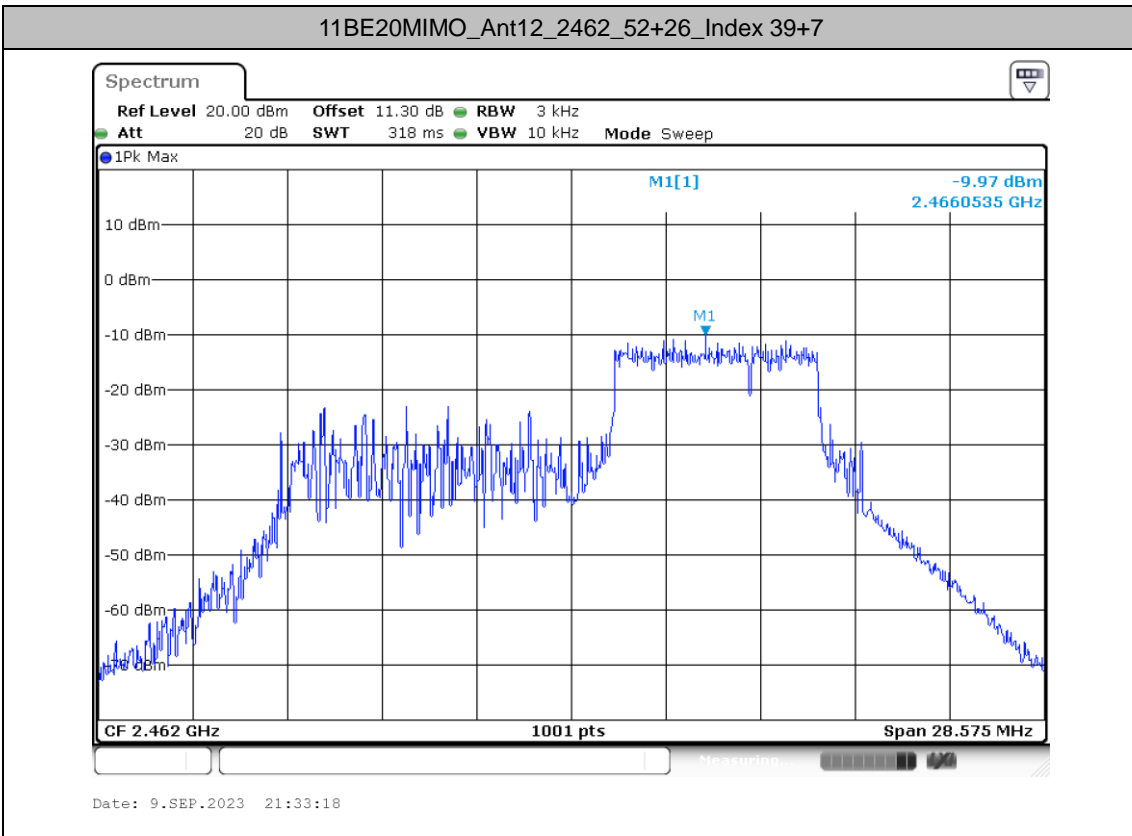


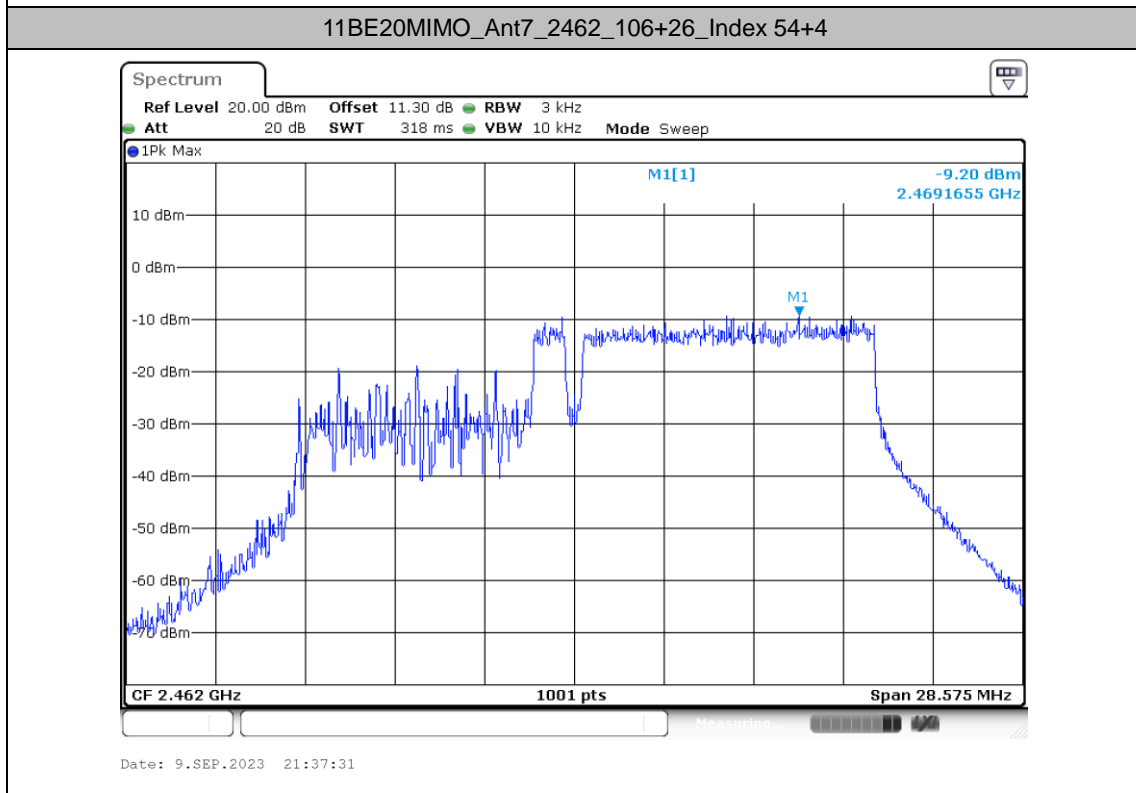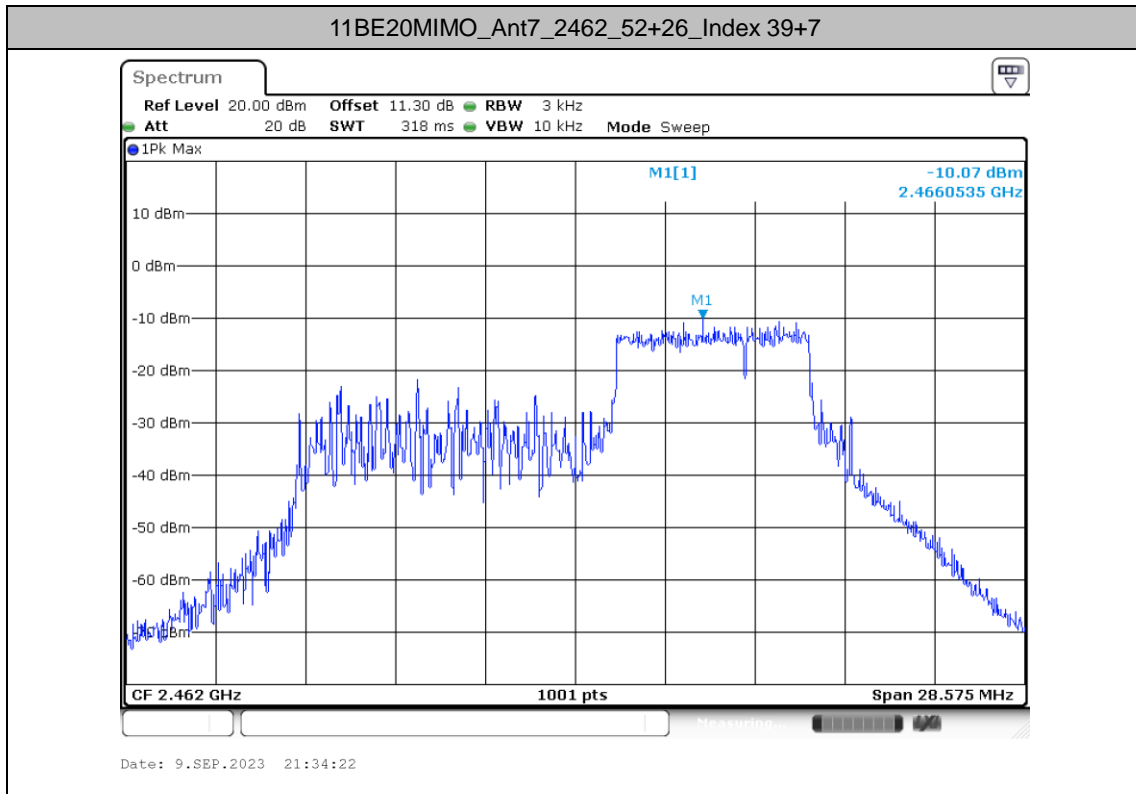



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

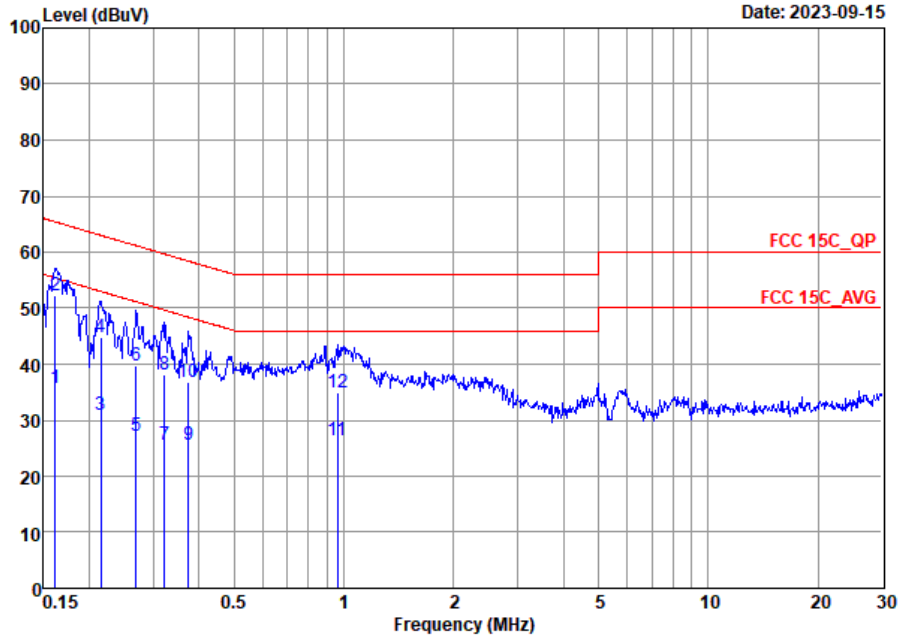


Site : CO01-SZ
 Condition: FCC 15C_QP LISN_20230420_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	35.81	-19.57	55.38	15.19	10.48	10.14	Average
2 *	0.16	52.21	-13.17	65.38	31.59	10.48	10.14	QP
3	0.22	30.95	-22.06	53.01	10.40	10.40	10.15	Average
4	0.22	44.75	-18.26	63.01	24.20	10.40	10.15	QP
5	0.27	27.13	-24.03	51.16	6.60	10.38	10.15	Average
6	0.27	39.83	-21.33	61.16	19.30	10.38	10.15	QP
7	0.32	25.70	-23.96	49.66	5.20	10.34	10.16	Average
8	0.32	38.10	-21.56	59.66	17.60	10.34	10.16	QP
9	0.38	25.65	-22.74	48.39	5.20	10.29	10.16	Average
10	0.38	36.75	-21.64	58.39	16.30	10.29	10.16	QP
11	0.96	26.30	-19.70	46.00	5.90	10.24	10.16	Average
12	0.96	35.00	-21.00	56.00	14.60	10.24	10.16	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

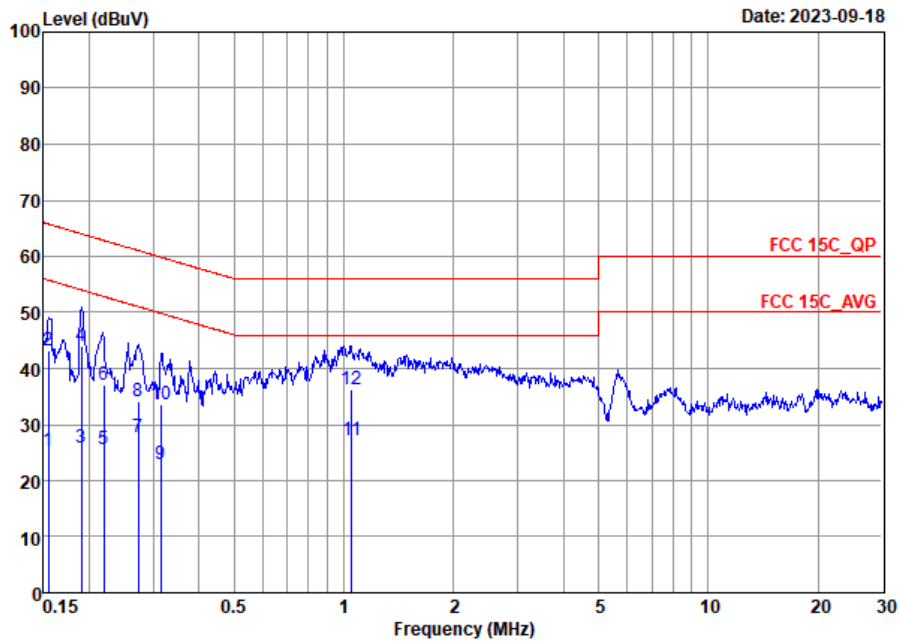

Site : C001-SZ
 Condition: FCC 15C_QP LISN_20230420_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	25.29	-30.45	55.74	4.70	10.45	10.14	Average
2	0.15	43.09	-22.65	65.74	22.50	10.45	10.14	QP
3	0.19	25.82	-28.20	54.02	5.30	10.37	10.15	Average
4	0.19	43.92	-20.10	64.02	23.40	10.37	10.15	QP
5	0.22	25.59	-27.24	52.83	5.10	10.34	10.15	Average
6	0.22	36.99	-25.84	62.83	16.50	10.34	10.15	QP
7	0.27	27.77	-23.26	51.03	7.30	10.32	10.15	Average
8	0.27	34.07	-26.96	61.03	13.60	10.32	10.15	QP
9	0.31	22.95	-26.89	49.84	2.51	10.29	10.15	Average
10	0.31	33.65	-26.19	59.84	13.21	10.29	10.15	QP
11 *	1.05	27.22	-18.78	46.00	6.81	10.25	10.16	Average
12	1.05	36.22	-19.78	56.00	15.81	10.25	10.16	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20-22°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	2400-2483.5	CDD 7+12	802.11b	01	2412	1Mbps	-	-
Mode 24	2400-2483.5	CDD 7+12	802.11b	06	2437	1Mbps	-	-
Mode 25	2400-2483.5	CDD 7+12	802.11b	11	2462	1Mbps	-	-
Mode 26	2400-2483.5	CDD 7+12	802.11g	01	2412	6Mbps	-	-
Mode 27	2400-2483.5	CDD 7+12	802.11g	06	2437	6Mbps	-	-
Mode 28	2400-2483.5	CDD 7+12	802.11g	11	2462	6Mbps	-	-
Mode 29	2400-2483.5	CDD 7+12	802.11n HT20	01	2412	MCS0	-	-
Mode 30	2400-2483.5	CDD 7+12	802.11n HT20	06	2437	MCS0	-	-
Mode 31	2400-2483.5	CDD 7+12	802.11n HT20	11	2462	MCS0	-	-
Mode 32	2400-2483.5	CDD 7+12	802.11n HT40	03	2422	MCS0	-	-
Mode 33	2400-2483.5	CDD 7+12	802.11n HT40	06	2437	MCS0	-	-
Mode 34	2400-2483.5	CDD 7+12	802.11n HT40	09	2452	MCS0	-	-

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 35	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Full RU	-
Mode 36	2400-2483.5	CDD 7+12	802.11be ETH20	06	2437	MCS0	Full RU	-
Mode 37	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Full RU	-
Mode 38	2400-2483.5	CDD 7+12	802.11be ETH40	03	2422	MCS0	Full RU	-
Mode 39	2400-2483.5	CDD 7+12	802.11be ETH40	06	2437	MCS0	Full RU	-
Mode 40	2400-2483.5	CDD 7+12	802.11be ETH40	09	2452	MCS0	Full RU	-
Mode 41	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Single RU 26/0	-
Mode 42	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Single RU 52/37	-
Mode 43	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Single RU 106/53	-
Mode 44	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Single RU 26/8	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 45	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Single RU 52/40	-
Mode 46	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Single RU 106/54	-
Mode 47	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Small RU 52+26 38+1	-
Mode 48	2400-2483.5	CDD 7+12	802.11be ETH20	01	2412	MCS0	Small RU 106+26 53+4	-
Mode 49	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Small RU 52+26 39+7	-
Mode 50	2400-2483.5	CDD 7+12	802.11be ETH20	11	2462	MCS0	Small RU 106+26 54+4	-
Mode 51	2400-2483.5	CDD 7+12	802.11be ETH40	06	2437	MCS0	-	LF

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 55	2400-2483.5	CDD 7+12	802.11n HT20	02	2417	MCS0	-	-
Mode 56	2400-2483.5	CDD 7+12	802.11n HT20	10	2457	MCS0	-	-
Mode 57	2400-2483.5	CDD 7+12	802.11n HT40	04	2427	MCS0	-	-
Mode 58	2400-2483.5	CDD 7+12	802.11n HT40	08	2447	MCS0	-	-
Mode 59	2400-2483.5	CDD 7+12	802.11be EHT20	02	2417	MCS0	Full RU	-
Mode 60	2400-2483.5	CDD 7+12	802.11be EHT20	10	2457	MCS0	Full RU	-
Mode 61	2400-2483.5	CDD 7+12	802.11be EHT40	04	2427	MCS0	Full RU	-
Mode 62	2400-2483.5	CDD 7+12	802.11be EHT40	08	2447	MCS0	Full RU	-
Mode 63	2400-2483.5	CDD 7+12	802.11n HT20	03	2422	MCS0	-	-
Mode 64	2400-2483.5	CDD 7+12	802.11n HT20	09	2452	MCS0	-	-
Mode 65	2400-2483.5	CDD 7+12	802.11n HT40	05	2432	MCS0	-	-
Mode 66	2400-2483.5	CDD 7+12	802.11n HT40	07	2442	MCS0	-	-
Mode 67	2400-2483.5	CDD 7+12	802.11be EHT20	03	2422	MCS0	Full RU	-
Mode 68	2400-2483.5	CDD 7+12	802.11be EHT20	09	2452	MCS0	Full RU	-
Mode 69	2400-2483.5	CDD 7+12	802.11be EHT40	05	2432	MCS0	Full RU	-
Mode 70	2400-2483.5	CDD 7+12	802.11be EHT40	07	2442	MCS0	Full RU	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11b	01	2388.26	41.34	54.00	-12.66	H	AVERAGE	Pass	Band Edge
23	802.11b	01	4824.00	41.29	74.00	-32.71	V	Peak	Pass	Harmonic
24	802.11b	06	2484.88	43.13	54.00	-10.87	V	AVERAGE	Pass	Band Edge
24	802.11b	06	7311.00	43.81	74.00	-30.19	H	Peak	Pass	Harmonic
25	802.11b	11	2487.50	43.50	54.00	-10.50	H	AVERAGE	Pass	Band Edge
25	802.11b	11	4924.00	43.73	74.00	-30.27	H	Peak	Pass	Harmonic
26	802.11g	01	-	-	-	-	-	-	-	Band Edge
26	802.11g	01	4824.00	41.29	74.00	-32.71	H	Peak	Pass	Harmonic
27	802.11g	06	-	-	-	-	-	-	-	Band Edge
27	802.11g	06	7311.00	43.64	74.00	-30.36	H	Peak	Pass	Harmonic
28	802.11g	11	-	-	-	-	-	-	-	Band Edge
28	802.11g	11	7386.00	43.91	74.00	-30.09	V	Peak	Pass	Harmonic
29	802.11n HT20	01	2389.82	41.51	54.00	-12.49	V	AVERAGE	Pass	Band Edge
29	802.11n HT20	01	4824.00	41.50	74.00	-32.50	V	Peak	Pass	Harmonic
30	802.11n HT20	06	2483.75	42.39	54.00	-11.61	V	AVERAGE	Pass	Band Edge
30	802.11n HT20	06	7311.00	44.49	74.00	-29.51	H	Peak	Pass	Harmonic
31	802.11n HT20	11	2483.85	42.19	54.00	-11.81	V	AVERAGE	Pass	Band Edge
31	802.11n HT20	11	7386.00	44.64	74.00	-29.36	H	Peak	Pass	Harmonic
32	802.11n HT40	03	2389.18	43.09	54.00	-10.91	V	AVERAGE	Pass	Band Edge
32	802.11n HT40	03	-	-	-	-	-	-	-	Harmonic
33	802.11n HT40	06	2483.75	47.56	54.00	-6.44	V	AVERAGE	Pass	Band Edge
33	802.11n HT40	06	-	-	-	-	-	-	-	Harmonic
34	802.11n HT40	09	2483.58	43.48	54.00	-10.52	V	AVERAGE	Pass	Band Edge
34	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
35	802.11be ETH20	01	2389.69	42.84	54.00	-11.16	V	AVERAGE	Pass	Band Edge
35	802.11be ETH20	01	4824.00	41.10	74.00	-32.90	H	Peak	Pass	Harmonic
36	802.11be ETH20	06	2484.00	42.66	54.00	-11.34	V	AVERAGE	Pass	Band Edge
36	802.11be ETH20	06	7311.00	44.01	74.00	-29.99	H	Peak	Pass	Harmonic
37	802.11be ETH20	11	2483.66	42.65	54.00	-11.35	H	AVERAGE	Pass	Band Edge
37	802.11be ETH20	11	7386.00	44.36	74.00	-29.64	V	Peak	Pass	Harmonic
38	802.11be ETH40	03	2389.69	43.76	54.00	-10.24	V	AVERAGE	Pass	Band Edge
38	802.11be ETH40	03	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
39	802.11be ETH40	06	2483.56	47.66	54.00	-6.34	V	AVERAGE	Pass	Band Edge
39	802.11be ETH40	06	7311.00	43.73	74.00	-30.27	V	Peak	Pass	Harmonic
40	802.11be ETH40	09	2483.58	42.35	54.00	-11.65	V	AVERAGE	Pass	Band Edge
40	802.11be ETH40	09	-	-	-	-	-	-	-	Harmonic
41	802.11be ETH20	01	2380.59	40.43	54.00	-13.57	V	AVERAGE	Pass	Band Edge
41	802.11be ETH20	01	-	-	-	-	-	-	-	Harmonic
42	802.11be ETH20	01	2362.78	40.40	54.00	-13.60	V	AVERAGE	Pass	Band Edge
42	802.11be ETH20	01	-	-	-	-	-	-	-	Harmonic
43	802.11be ETH20	01	2389.95	41.19	54.00	-12.81	V	AVERAGE	Pass	Band Edge
43	802.11be ETH20	01	-	-	-	-	-	-	-	Harmonic
44	802.11be ETH20	11	2488.49	41.21	54.00	-12.79	V	AVERAGE	Pass	Band Edge
44	802.11be ETH20	11	-	-	-	-	-	-	-	Harmonic
45	802.11be ETH20	11	2483.89	40.95	54.00	-13.05	H	AVERAGE	Pass	Band Edge
45	802.11be ETH20	11	-	-	-	-	-	-	-	Harmonic
46	802.11be ETH20	11	2483.51	41.21	54.00	-12.79	V	AVERAGE	Pass	Band Edge
46	802.11be ETH20	11	-	-	-	-	-	-	-	Harmonic
47	802.11be ETH20	01	2334.31	41.67	54.00	-12.33	V	AVERAGE	Pass	Band Edge
47	802.11be ETH20	01	-	-	-	-	-	-	-	Harmonic
48	802.11be ETH20	01	2339.64	41.40	54.00	-12.60	V	AVERAGE	Pass	Band Edge
48	802.11be ETH20	01	-	-	-	-	-	-	-	Harmonic
49	802.11be ETH20	11	2483.66	42.42	54.00	-11.58	V	AVERAGE	Pass	Band Edge
49	802.11be ETH20	11	-	-	-	-	-	-	-	Harmonic
50	802.11be ETH20	11	2483.51	42.77	54.00	-11.23	V	AVERAGE	Pass	Band Edge
50	802.11be ETH20	11	-	-	-	-	-	-	-	Harmonic
51	802.11be ETH40	06	30	26.82	40.00	-13.18	V	PEAK	Pass	LF
55	802.11n HT20	02	2389.95	46.63	54.00	-7.37	H	AVERAGE	Pass	Band Edge
55	802.11n HT20	02	-	-	-	-	-	-	-	Harmonic
56	802.11n HT20	10	2483.58	44.90	54.00	-9.10	V	AVERAGE	Pass	Band Edge
56	802.11n HT20	10	-	-	-	-	-	-	-	Harmonic
57	802.11n HT40	04	2389.41	47.47	54.00	-6.53	H	AVERAGE	Pass	Band Edge
57	802.11n HT40	04	-	-	-	-	-	-	-	Harmonic







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
58	802.11n HT40	08	2484.30	47.49	54.00	-6.51	V	AVERAGE	Pass	Band Edge
58	802.11n HT40	08	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT20	02	2389.95	47.35	54.00	-6.65	V	AVERAGE	Pass	Band Edge
59	802.11be EHT20	02	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT20	10	2483.93	43.95	54.00	-10.05	V	AVERAGE	Pass	Band Edge
60	802.11be EHT20	10	-	-	-	-	-	-	-	Harmonic
61	802.11be EHT40	04	2389.07	44.52	54.00	-9.48	V	AVERAGE	Pass	Band Edge
61	802.11be EHT40	04	-	-	-	-	-	-	-	Harmonic
62	802.11be EHT40	08	2483.62	47.51	54.00	-6.49	V	AVERAGE	Pass	Band Edge
62	802.11be EHT40	08	-	-	-	-	-	-	-	Harmonic
63	802.11n HT20	03	2389.82	42.40	54.00	-11.60	H	AVERAGE	Pass	Band Edge
63	802.11n HT20	03	-	-	-	-	-	-	-	Harmonic
64	802.11n HT20	09	2487.66	43.22	54.00	-10.78	H	AVERAGE	Pass	Band Edge
64	802.11n HT20	09	-	-	-	-	-	-	-	Harmonic
65	802.11n HT40	05	2389.88	45.26	54.00	-8.74	H	AVERAGE	Pass	Band Edge
65	802.11n HT40	05	-	-	-	-	-	-	-	Harmonic
66	802.11n HT40	07	2483.99	47.15	54.00	-6.85	V	AVERAGE	Pass	Band Edge
66	802.11n HT40	07	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT20	03	2389.56	42.68	54.00	-11.32	V	AVERAGE	Pass	Band Edge
67	802.11be EHT20	03	-	-	-	-	-	-	-	Harmonic
68	802.11be EHT20	09	2483.63	42.10	54.00	-11.90	V	AVERAGE	Pass	Band Edge
68	802.11be EHT20	09	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT40	05	2389.76	44.37	54.00	-9.63	H	AVERAGE	Pass	Band Edge
69	802.11be EHT40	05	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT40	07	2483.99	46.66	54.00	-7.34	V	AVERAGE	Pass	Band Edge
70	802.11be EHT40	07	-	-	-	-	-	-	-	Harmonic



23																																					
Mode	Band Edge																																				
	2400-2483.5_802.11b_CH01_2412MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.01</td> <td>52.05</td> <td>74.00</td> <td>-21.95</td> <td>48.73</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>200</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2385.01	52.05	74.00	-21.95	48.73	32.20	4.79	33.67	200	3	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2385.01	52.05	74.00	-21.95	48.73	32.20	4.79	33.67	200	3	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>96.50</td> <td>-----</td> <td>-----</td> <td>93.06</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>200</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	96.50	-----	-----	93.06	32.27	4.82	33.65	200	3	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	96.50	-----	-----	93.06	32.27	4.82	33.65	200	3	PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.26</td> <td>41.34</td> <td>54.00</td> <td>-12.66</td> <td>38.01</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>200</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2388.26	41.34	54.00	-12.66	38.01	32.21	4.79	33.67	200	3	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2388.26	41.34	54.00	-12.66	38.01	32.21	4.79	33.67	200	3	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>94.27</td> <td>-----</td> <td>-----</td> <td>90.83</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>200</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	94.27	-----	-----	90.83	32.27	4.82	33.65	200	3	Peak	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	94.27	-----	-----	90.83	32.27	4.82	33.65	200	3	Peak																										

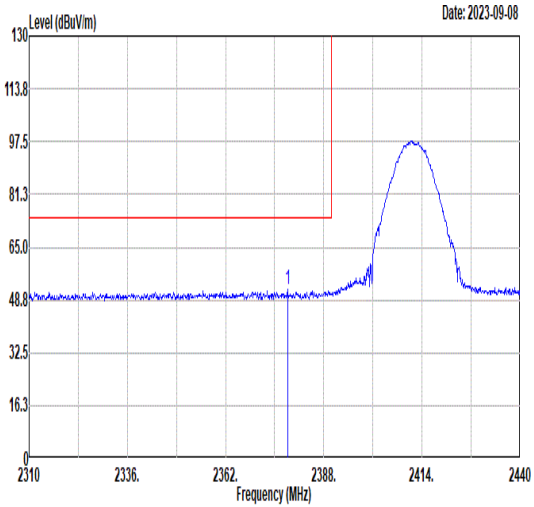
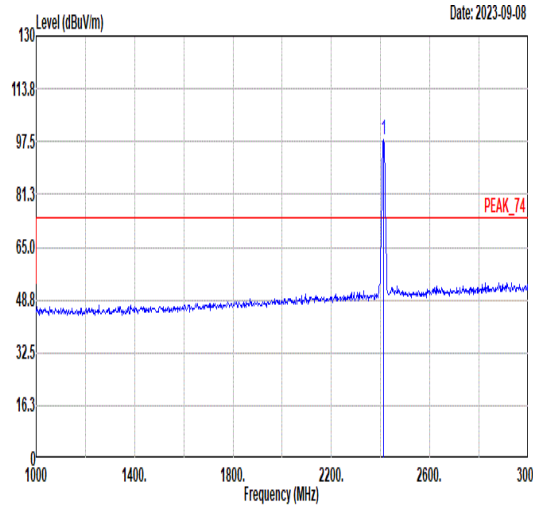
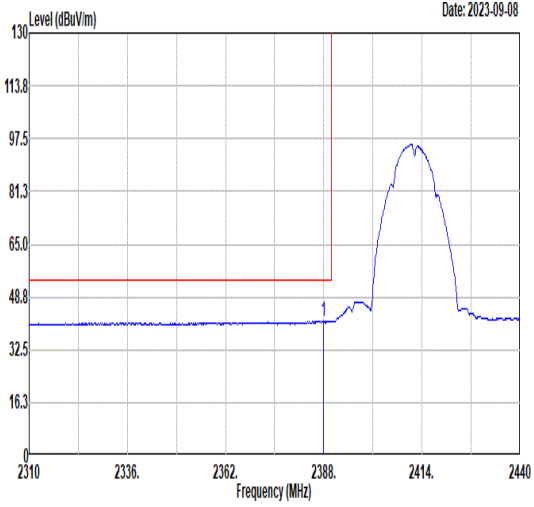
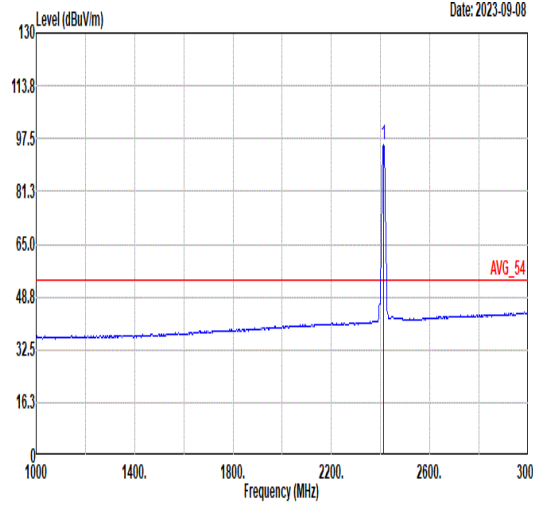


		23																																																																									
Mode	Band Edge																																																																										
	2400-2483.5_802.11b_CH01_2412MHz																																																																										
ANT	CDD 7+12																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.38</td> <td>51.84</td> <td>74.00</td> <td>-22.16</td> <td>48.56</td> <td>32.18</td> <td>4.78</td> <td>33.68</td> <td>100</td> <td>46</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2378.38	51.84	74.00	-22.16	48.56	32.18	4.78	33.68	100	46	PEAK	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.14</td> <td>-----</td> <td>-----</td> <td>94.70</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>100</td> <td>46</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	98.14	-----	-----	94.70	32.27	4.82	33.65	100	46	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	2378.38	51.84	74.00	-22.16	48.56	32.18	4.78	33.68	100	46	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	2412.00	98.14	-----	-----	94.70	32.27	4.82	33.65	100	46	PEAK																																																																
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.00</td> <td>41.32</td> <td>54.00</td> <td>-12.68</td> <td>37.99</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>100</td> <td>46</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2388.00	41.32	54.00	-12.68	37.99	32.21	4.79	33.67	100	46	AVERAGE	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>95.55</td> <td>-----</td> <td>-----</td> <td>92.11</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>100</td> <td>46</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	95.55	-----	-----	92.11	32.27	4.82	33.65	100	46	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	2388.00	41.32	54.00	-12.68	37.99	32.21	4.79	33.67	100	46	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																				
1	2412.00	95.55	-----	-----	92.11	32.27	4.82	33.65	100	46	Peak																																																																



Mode	23																																													
	Harmonic																																													
	2400-2483.5_802.11b_CH01_2412MHz																																													
ANT	CDD 7+12																																													
Pol.	Horizontal	Vertical																																												
Peak Avg	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>40.90</td> <td>74.00</td> <td>-33.10</td> <td>56.23</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	40.90	74.00	-33.10	56.23	34.40	7.75	57.48	--	--	Peak	<p>Limit Read Ant Cable Preamp APos TPos Freq Level Line Margin Level Factor Loss Factor Remark</p> <table border="1"> <thead> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 4824.00</td> <td>41.29</td> <td>74.00</td> <td>-32.71</td> <td>56.62</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1 4824.00	41.29	74.00	-32.71	56.62	34.40	7.75	57.48	--	--	Peak
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1 4824.00	40.90	74.00	-33.10	56.23	34.40	7.75	57.48	--	--	Peak																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																				
1 4824.00	41.29	74.00	-32.71	56.62	34.40	7.75	57.48	--	--	Peak																																				

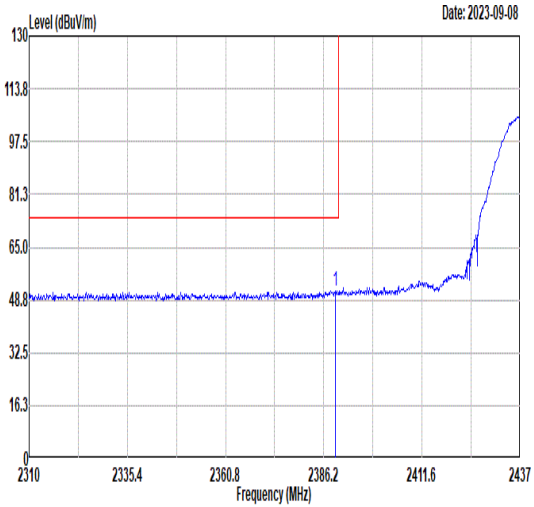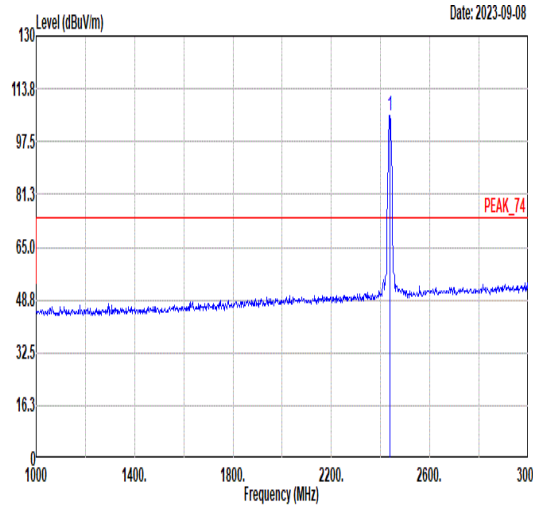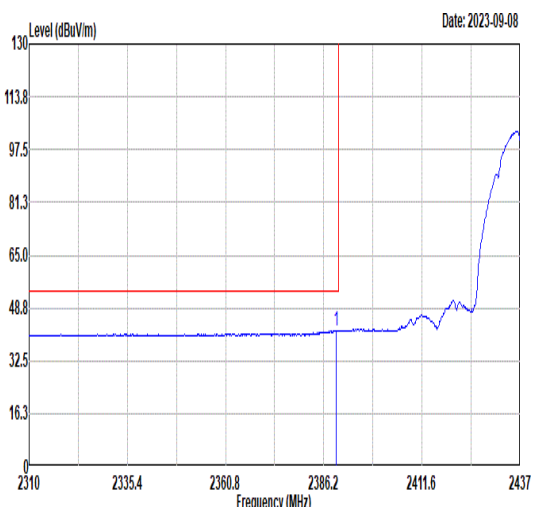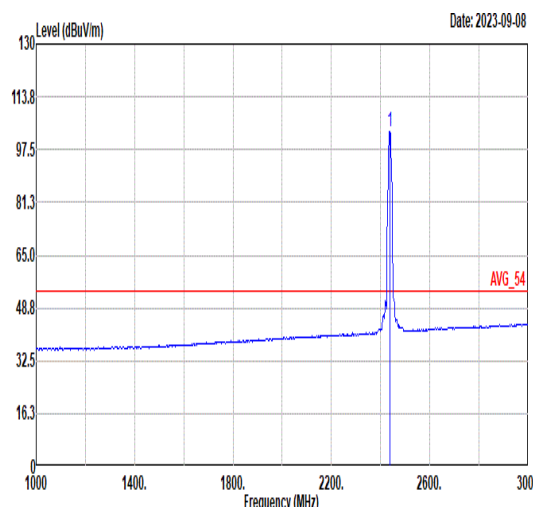

		24																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.25</td> <td>51.56</td> <td>74.00</td> <td>-22.44</td> <td>48.23</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>288</td> <td>50</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.25	51.56	74.00	-22.44	48.23	32.21	4.79	33.67	288	50	PEAK	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>105.56</td> <td>-----</td> <td>-----</td> <td>102.00</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>288</td> <td>50</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	105.56	-----	-----	102.00	32.34	4.86	33.64	288	50	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.25	51.56	74.00	-22.44	48.23	32.21	4.79	33.67	288	50	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	105.56	-----	-----	102.00	32.34	4.86	33.64	288	50	PEAK																																																															
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.38</td> <td>41.86</td> <td>54.00</td> <td>-12.14</td> <td>38.52</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>288</td> <td>50</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.38	41.86	54.00	-12.14	38.52	32.21	4.80	33.67	288	50	AVERAGE	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>103.19</td> <td>-----</td> <td>-----</td> <td>99.63</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>288</td> <td>50</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	103.19	-----	-----	99.63	32.34	4.86	33.64	288	50	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.38	41.86	54.00	-12.14	38.52	32.21	4.80	33.67	288	50	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	103.19	-----	-----	99.63	32.34	4.86	33.64	288	50	Peak																																																															



Mode	24																																									
	Band Edge - R																																									
	2400-2483.5_802.11b_CH06_2437MHz																																									
ANT	CDD 7+12																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.97</td> <td>52.85</td> <td>74.00</td> <td>-21.15</td> <td>49.06</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>288</td> <td>50</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.97	52.85	74.00	-21.15	49.06	32.47	4.93	33.61	288	50	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2487.97	52.85	74.00	-21.15	49.06	32.47	4.93	33.61	288	50	PEAK																															
Blank																																										
Avg	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.66</td> <td>42.54</td> <td>54.00</td> <td>-11.46</td> <td>38.75</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>288</td> <td>50</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.66	42.54	54.00	-11.46	38.75	32.47	4.93	33.61	288	50	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	2488.66	42.54	54.00	-11.46	38.75	32.47	4.93	33.61	288	50	AVERAGE																															
Blank																																										



		24																																																																																
Mode	Band Edge - L																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																	
ANT	CDD 7+12																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2363.59</td> <td>52.06</td> <td>74.00</td> <td>-21.94</td> <td>48.82</td> <td>32.15</td> <td>4.77</td> <td>33.68</td> <td>128</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.59	52.06	74.00	-21.94	48.82	32.15	4.77	33.68	128	111	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>95.92</td> <td>-----</td> <td>-----</td> <td>92.36</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>128</td> <td>111</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.92	-----	-----	92.36	32.34	4.86	33.64	128	111	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2363.59	52.06	74.00	-21.94	48.82	32.15	4.77	33.68	128	111	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	95.92	-----	-----	92.36	32.34	4.86	33.64	128	111	Peak																																																																							
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.87</td> <td>41.46</td> <td>54.00</td> <td>-12.54</td> <td>38.13</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>128</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.87	41.46	54.00	-12.54	38.13	32.21	4.79	33.67	128	111	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>93.32</td> <td>-----</td> <td>-----</td> <td>89.76</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>128</td> <td>111</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	93.32	-----	-----	89.76	32.34	4.86	33.64	128	111	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.87	41.46	54.00	-12.54	38.13	32.21	4.79	33.67	128	111	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2437.00	93.32	-----	-----	89.76	32.34	4.86	33.64	128	111	Peak																																																																							







		24																																			
Mode	Band Edge - R																																				
	2400-2483.5_802.11b_CH06_2437MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical	Fundamental																																			
Peak	<p style="text-align: right;">Date: 2023-09-08</p>		Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.52</td> <td>53.16</td> <td>74.00</td> <td>-20.84</td> <td>49.39</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>128</td> <td>111</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2486.52	53.16	74.00	-20.84	49.39	32.46	4.92	33.61	128
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2486.52	53.16	74.00	-20.84	49.39	32.46	4.92	33.61	128	111	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-08</p>		Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.88</td> <td>43.13</td> <td>54.00</td> <td>-10.87</td> <td>39.36</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>128</td> <td>111</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.88	43.13	54.00	-10.87	39.36	32.46	4.92	33.61	128
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2484.88	43.13	54.00	-10.87	39.36	32.46	4.92	33.61	128	111	AVERAGE																										



Mode	24																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																
ANT	CDD 7+12																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-09-07</p>	<p>Date: 2023-09-07</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.96</td> <td>74.00</td> <td>-32.04</td> <td>57.34</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.81</td> <td>74.00</td> <td>-30.19</td> <td>57.75</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	41.96	74.00	-32.04	57.34	34.37	7.77	57.52	--	--	Peak	2	7311.00	43.81	74.00	-30.19	57.75	36.05	8.93	58.92	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.45</td> <td>74.00</td> <td>-32.55</td> <td>56.83</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.28</td> <td>74.00</td> <td>-30.72</td> <td>57.22</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	41.45	74.00	-32.55	56.83	34.37	7.77	57.52	--	--	Peak	2	7311.00	43.28	74.00	-30.72	57.22	36.05	8.93	58.92	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	41.96	74.00	-32.04	57.34	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	43.81	74.00	-30.19	57.75	36.05	8.93	58.92	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	41.45	74.00	-32.55	56.83	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	43.28	74.00	-30.72	57.22	36.05	8.93	58.92	--	--	Peak																																																																																						

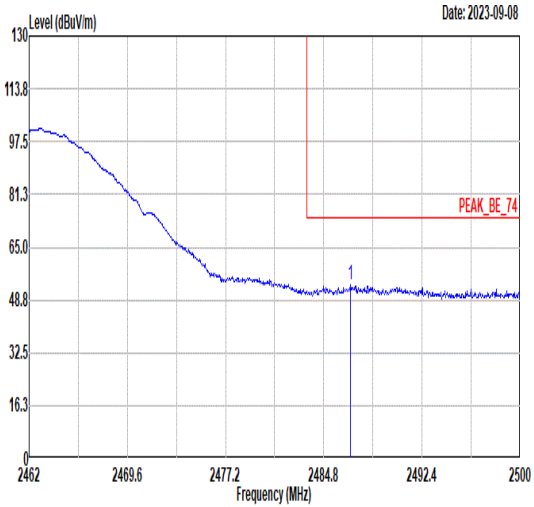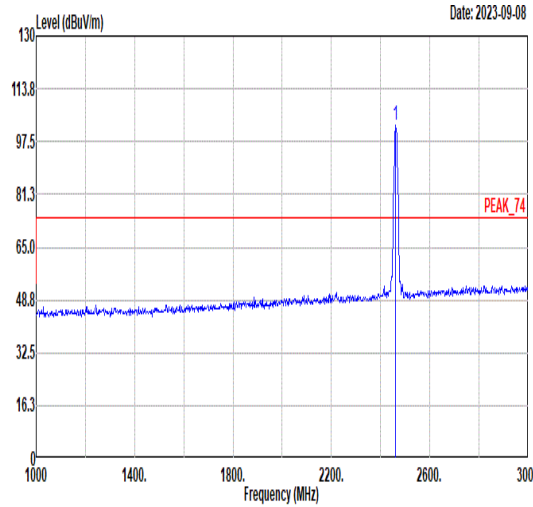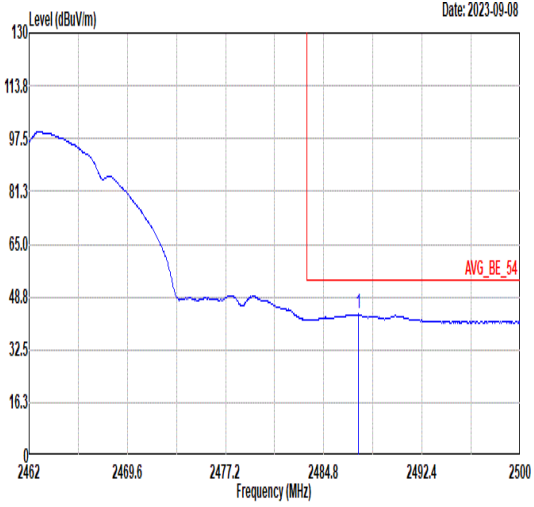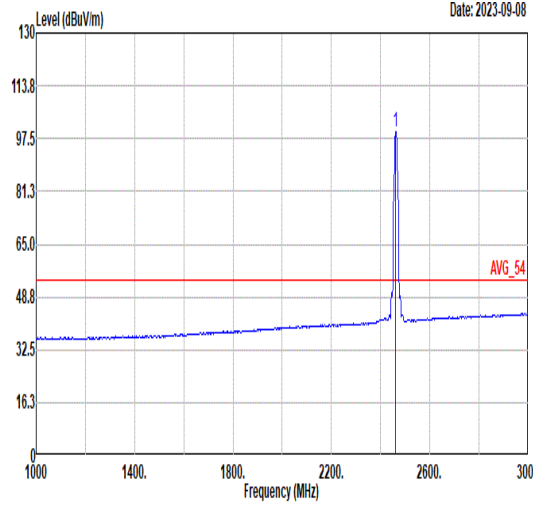

		25																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.89</td> <td>53.36</td> <td>74.00</td> <td>-20.64</td> <td>49.58</td> <td>32.47</td> <td>4.92</td> <td>33.61</td> <td>130</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2486.89	53.36	74.00	-20.64	49.58	32.47	4.92	33.61	130	61	PEAK	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.47</td> <td>-----</td> <td>-----</td> <td>98.80</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>130</td> <td>61</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	102.47	-----	-----	98.80	32.40	4.89	33.62	130	61	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2486.89	53.36	74.00	-20.64	49.58	32.47	4.92	33.61	130	61	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	102.47	-----	-----	98.80	32.40	4.89	33.62	130	61	Peak																																																															
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.50</td> <td>43.50</td> <td>54.00</td> <td>-10.50</td> <td>39.71</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>130</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2487.50	43.50	54.00	-10.50	39.71	32.47	4.93	33.61	130	61	AVERAGE	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.79</td> <td>-----</td> <td>-----</td> <td>96.12</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>130</td> <td>61</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	99.79	-----	-----	96.12	32.40	4.89	33.62	130	61	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2487.50	43.50	54.00	-10.50	39.71	32.47	4.93	33.61	130	61	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	99.79	-----	-----	96.12	32.40	4.89	33.62	130	61	Peak																																																															



		25																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.55</td> <td>53.00</td> <td>74.00</td> <td>-21.00</td> <td>49.22</td> <td>32.47</td> <td>4.92</td> <td>33.61</td> <td>110</td> <td>103</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2486.55	53.00	74.00	-21.00	49.22	32.47	4.92	33.61	110	103	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.87</td> <td>-----</td> <td>-----</td> <td>98.20</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>110</td> <td>103</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	101.87	-----	-----	98.20	32.40	4.89	33.62	110	103	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2486.55	53.00	74.00	-21.00	49.22	32.47	4.92	33.61	110	103	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	101.87	-----	-----	98.20	32.40	4.89	33.62	110	103	Peak																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.12</td> <td>43.05</td> <td>54.00</td> <td>-10.95</td> <td>39.26</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>110</td> <td>103</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2487.12	43.05	54.00	-10.95	39.26	32.47	4.93	33.61	110	103	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>99.22</td> <td>-----</td> <td>-----</td> <td>95.55</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>110</td> <td>103</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	99.22	-----	-----	95.55	32.40	4.89	33.62	110	103	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2487.12	43.05	54.00	-10.95	39.26	32.47	4.93	33.61	110	103	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	99.22	-----	-----	95.55	32.40	4.89	33.62	110	103	Peak																																																															



Mode	25																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	CDD 7+12																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-09-08</p>	<p>Date: 2023-09-08</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>43.73</td> <td>74.00</td> <td>-30.27</td> <td>59.15</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.59</td> <td>74.00</td> <td>-30.41</td> <td>57.38</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	43.73	74.00	-30.27	59.15	34.34	7.79	57.55	--	--	Peak	2	7386.00	43.59	74.00	-30.41	57.38	35.99	9.17	58.95	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.41</td> <td>74.00</td> <td>-31.59</td> <td>57.83</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.35</td> <td>74.00</td> <td>-30.65</td> <td>57.14</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	42.41	74.00	-31.59	57.83	34.34	7.79	57.55	--	--	Peak	2	7386.00	43.35	74.00	-30.65	57.14	35.99	9.17	58.95	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4924.00	43.73	74.00	-30.27	59.15	34.34	7.79	57.55	--	--	Peak																																																																																						
2	7386.00	43.59	74.00	-30.41	57.38	35.99	9.17	58.95	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4924.00	42.41	74.00	-31.59	57.83	34.34	7.79	57.55	--	--	Peak																																																																																						
2	7386.00	43.35	74.00	-30.65	57.14	35.99	9.17	58.95	--	--	Peak																																																																																						



Mode	26																																																																								
	Harmonic																																																																								
	2400-2483.5_802.11g_CH01_2412MHz																																																																								
ANT	CDD 7+12																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.29</td> <td>74.00</td> <td>-32.71</td> <td>56.62</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	41.29	74.00	-32.71	56.62	34.40	7.75	57.48	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.41</td> <td>74.00</td> <td>-33.59</td> <td>55.74</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	40.41	74.00	-33.59	55.74	34.40	7.75	57.48	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	41.29	74.00	-32.71	56.62	34.40	7.75	57.48	--	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	40.41	74.00	-33.59	55.74	34.40	7.75	57.48	--	Peak																																																															



Mode	27																																																																															
	Harmonic																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																															
ANT	CDD 7+12																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.16</td> <td>74.00</td> <td>-32.84</td> <td>56.54</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.64</td> <td>74.00</td> <td>-30.36</td> <td>57.58</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	4874.00	41.16	74.00	-32.84	56.54	34.37	7.77	57.52	--	Peak	2	7311.00	43.64	74.00	-30.36	57.58	36.05	8.93	58.92	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.98</td> <td>74.00</td> <td>-32.02</td> <td>57.36</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.18</td> <td>74.00</td> <td>-30.82</td> <td>57.12</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	4874.00	41.98	74.00	-32.02	57.36	34.37	7.77	57.52	--	Peak	2	7311.00	43.18	74.00	-30.82	57.12	36.05	8.93	58.92	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																								
1	4874.00	41.16	74.00	-32.84	56.54	34.37	7.77	57.52	--	Peak																																																																						
2	7311.00	43.64	74.00	-30.36	57.58	36.05	8.93	58.92	--	Peak																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																								
1	4874.00	41.98	74.00	-32.02	57.36	34.37	7.77	57.52	--	Peak																																																																						
2	7311.00	43.18	74.00	-30.82	57.12	36.05	8.93	58.92	--	Peak																																																																						



Mode	28																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																				
ANT	CDD 7+12																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.35</td> <td>74.00</td> <td>-32.65</td> <td>56.77</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.97</td> <td>74.00</td> <td>-31.03</td> <td>56.76</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.35	74.00	-32.65	56.77	34.34	7.79	57.55	--	Peak	2	7386.00	42.97	74.00	-31.03	56.76	35.99	9.17	58.95	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.06</td> <td>74.00</td> <td>-32.94</td> <td>56.48</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.91</td> <td>74.00</td> <td>-30.09</td> <td>57.70</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.06	74.00	-32.94	56.48	34.34	7.79	57.55	--	Peak	2	7386.00	43.91	74.00	-30.09	57.70	35.99	9.17	58.95	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	4924.00	41.35	74.00	-32.65	56.77	34.34	7.79	57.55	--	Peak																																																																																											
2	7386.00	42.97	74.00	-31.03	56.76	35.99	9.17	58.95	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	4924.00	41.06	74.00	-32.94	56.48	34.34	7.79	57.55	--	Peak																																																																																											
2	7386.00	43.91	74.00	-30.09	57.70	35.99	9.17	58.95	--	Peak																																																																																											



29																																					
Mode	Band Edge																																				
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.39</td> <td>52.23</td> <td>74.00</td> <td>-21.77</td> <td>48.90</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>345</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2388.39	52.23	74.00	-21.77	48.90	32.21	4.79	33.67	345	334	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2388.39	52.23	74.00	-21.77	48.90	32.21	4.79	33.67	345	334	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>97.56</td> <td>-----</td> <td>-----</td> <td>94.12</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>345</td> <td>334</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	97.56	-----	-----	94.12	32.27	4.82	33.65	345	334	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	97.56	-----	-----	94.12	32.27	4.82	33.65	345	334	PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>38.17</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>345</td> <td>334</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.95	41.51	54.00	-12.49	38.17	32.21	4.80	33.67	345	334	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2389.95	41.51	54.00	-12.49	38.17	32.21	4.80	33.67	345	334	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>90.88</td> <td>-----</td> <td>-----</td> <td>87.44</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>345</td> <td>334</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2412.00	90.88	-----	-----	87.44	32.27	4.82	33.65	345	334	Peak	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2412.00	90.88	-----	-----	87.44	32.27	4.82	33.65	345	334	Peak																										



		29																																																																										
Mode	Band Edge																																																																											
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																											
ANT	CDD 7+12																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>51.30</td> <td>74.00</td> <td>-22.70</td> <td>47.97</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>256</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.17	51.30	74.00	-22.70	47.97	32.21	4.79	33.67	256	109	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.62</td> <td>-----</td> <td>-----</td> <td>96.18</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>256</td> <td>109</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	99.62	-----	-----	96.18	32.27	4.82	33.65	256	109	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2389.17	51.30	74.00	-22.70	47.97	32.21	4.79	33.67	256	109	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2412.00	99.62	-----	-----	96.18	32.27	4.82	33.65	256	109	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>38.17</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>256</td> <td>109</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	41.51	54.00	-12.49	38.17	32.21	4.80	33.67	256	109	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.64</td> <td>-----</td> <td>-----</td> <td>89.20</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>256</td> <td>109</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2412.00	92.64	-----	-----	89.20	32.27	4.82	33.65	256	109	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2389.82	41.51	54.00	-12.49	38.17	32.21	4.80	33.67	256	109	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	2412.00	92.64	-----	-----	89.20	32.27	4.82	33.65	256	109	Peak																																																																	



Mode	29																																																																								
	Harmonic																																																																								
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																								
ANT	CDD 7+12																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2023-09-08</p>	<p>Date: 2023-09-08</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.84</td> <td>74.00</td> <td>-33.16</td> <td>56.17</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	40.84	74.00	-33.16	56.17	34.40	7.75	57.48	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.50</td> <td>74.00</td> <td>-32.50</td> <td>56.83</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	41.50	74.00	-32.50	56.83	34.40	7.75	57.48	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	40.84	74.00	-33.16	56.17	34.40	7.75	57.48	--	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	41.50	74.00	-32.50	56.83	34.40	7.75	57.48	--	Peak																																																															



Mode	30																																																																									
	Band Edge - L																																																																									
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.84</td> <td>51.41</td> <td>74.00</td> <td>-22.59</td> <td>48.08</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2386.84	51.41	74.00	-22.59	48.08	32.21	4.79	33.67	100	62	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>105.49</td> <td>-----</td> <td>-----</td> <td>101.93</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	105.49	-----	-----	101.93	32.34	4.86	33.64	100	62	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2386.84	51.41	74.00	-22.59	48.08	32.21	4.79	33.67	100	62	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	105.49	-----	-----	101.93	32.34	4.86	33.64	100	62	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.76</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>37.99</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.76	41.33	54.00	-12.67	37.99	32.21	4.80	33.67	100	62	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>99.02</td> <td>-----</td> <td>-----</td> <td>95.46</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	99.02	-----	-----	95.46	32.34	4.86	33.64	100	62	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.76	41.33	54.00	-12.67	37.99	32.21	4.80	33.67	100	62	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	99.02	-----	-----	95.46	32.34	4.86	33.64	100	62	Peak																																																															



		30																																							
Mode	Band Edge - R																																								
	2400-2483.5_802.11n HT20_CH06_2437MHz																																								
ANT	CDD 7+12																																								
Pol.	Horizontal		Fundamental																																						
Peak	<p style="text-align: right;">Date: 2023-09-08</p>		Blank																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.94</td> <td>52.38</td> <td>74.00</td> <td>-21.62</td> <td>48.61</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.94	52.38	74.00	-21.62	48.61	32.46	4.92	33.61	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	2483.94	52.38	74.00	-21.62	48.61	32.46	4.92	33.61	100	62	PEAK																														
Avg	<p style="text-align: right;">Date: 2023-09-08</p>		Blank																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>42.01</td> <td>54.00</td> <td>-11.99</td> <td>38.24</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	42.01	54.00	-11.99	38.24	32.46	4.92	33.61	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	2483.62	42.01	54.00	-11.99	38.24	32.46	4.92	33.61	100	62	AVERAGE																														



		30																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.18</td> <td>51.99</td> <td>74.00</td> <td>-22.01</td> <td>48.67</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>200</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2385.18	51.99	74.00	-22.01	48.67	32.20	4.79	33.67	200	333	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>105.26</td> <td>-----</td> <td>-----</td> <td>101.70</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>200</td> <td>333</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	105.26	-----	-----	101.70	32.34	4.86	33.64	200	333	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2385.18	51.99	74.00	-22.01	48.67	32.20	4.79	33.67	200	333	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	105.26	-----	-----	101.70	32.34	4.86	33.64	200	333	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>41.42</td> <td>54.00</td> <td>-12.58</td> <td>38.08</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>200</td> <td>333</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.88	41.42	54.00	-12.58	38.08	32.21	4.80	33.67	200	333	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.84</td> <td>-----</td> <td>-----</td> <td>94.28</td> <td>32.34</td> <td>4.86</td> <td>33.64</td> <td>200</td> <td>333</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	97.84	-----	-----	94.28	32.34	4.86	33.64	200	333	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.88	41.42	54.00	-12.58	38.08	32.21	4.80	33.67	200	333	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	97.84	-----	-----	94.28	32.34	4.86	33.64	200	333	Peak																																																															







Mode	30																																															
	Band Edge - R																																															
	2400-2483.5_802.11n HT20_CH06_2437MHz																																															
ANT	CDD 7+12																																															
Pol.	Vertical	Fundamental																																														
Peak	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>52.57</td> <td>74.00</td> <td>-21.43</td> <td>48.80</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>333</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2483.62	52.57	74.00	-21.43	48.80	32.46	4.92	33.61	200	333	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2483.62	52.57	74.00	-21.43	48.80	32.46	4.92	33.61	200	333	PEAK																																					
Blank																																																
Avg	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.75</td> <td>42.39</td> <td>54.00</td> <td>-11.61</td> <td>38.62</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>333</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2483.75	42.39	54.00	-11.61	38.62	32.46	4.92	33.61	200	333	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2483.75	42.39	54.00	-11.61	38.62	32.46	4.92	33.61	200	333	AVERAGE																																					
Blank																																																



Mode	30																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																
ANT	CDD 7+12																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.28</td> <td>74.00</td> <td>-32.72</td> <td>56.66</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.49</td> <td>74.00</td> <td>-29.51</td> <td>58.43</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	41.28	74.00	-32.72	56.66	34.37	7.77	57.52	--	--	Peak	2	7311.00	44.49	74.00	-29.51	58.43	36.05	8.93	58.92	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>42.31</td> <td>74.00</td> <td>-31.69</td> <td>57.69</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.17</td> <td>74.00</td> <td>-29.83</td> <td>58.11</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	42.31	74.00	-31.69	57.69	34.37	7.77	57.52	--	--	Peak	2	7311.00	44.17	74.00	-29.83	58.11	36.05	8.93	58.92	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	41.28	74.00	-32.72	56.66	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	44.49	74.00	-29.51	58.43	36.05	8.93	58.92	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	42.31	74.00	-31.69	57.69	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	44.17	74.00	-29.83	58.11	36.05	8.93	58.92	--	--	Peak																																																																																						

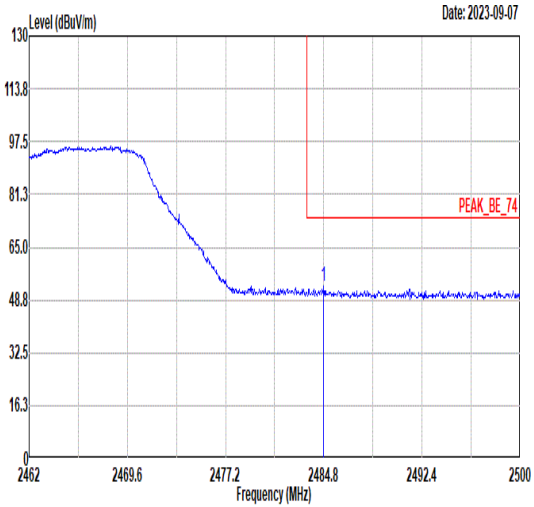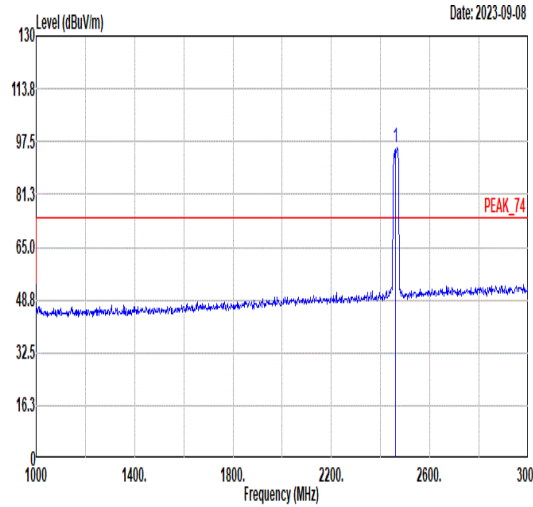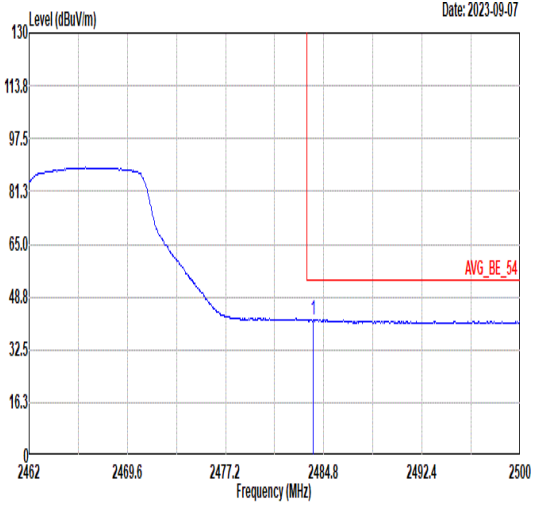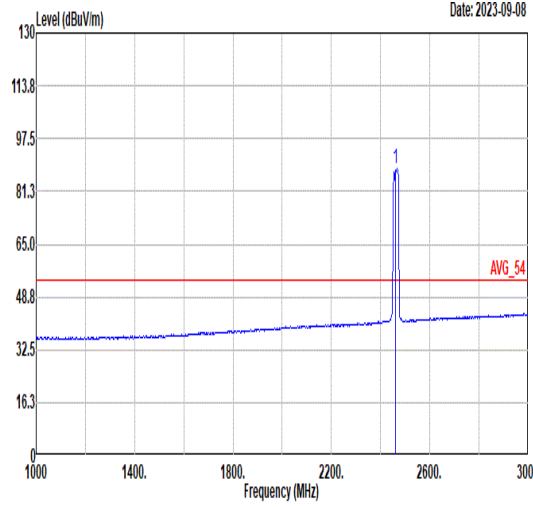

31																																						
Mode	Band Edge																																					
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																					
ANT	CDD 7+12																																					
Pol.	Horizontal																																					
Peak	 <p>Date: 2023-09-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.80</td> <td>52.88</td> <td>74.00</td> <td>-21.12</td> <td>49.11</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>136</td> <td>46</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.80	52.88	74.00	-21.12	49.11	32.46	4.92	33.61	136	46	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2484.80	52.88	74.00	-21.12	49.11	32.46	4.92	33.61	136	46	PEAK																											
 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>95.71</td> <td>-----</td> <td>-----</td> <td>92.04</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>136</td> <td>46</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	95.71	-----	-----	92.04	32.40	4.89	33.62	136	46	Peak	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2462.00	95.71	-----	-----	92.04	32.40	4.89	33.62	136	46	Peak																											
Avg	 <p>Date: 2023-09-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.00</td> <td>41.75</td> <td>54.00</td> <td>-12.25</td> <td>37.98</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>136</td> <td>46</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2484.00	41.75	54.00	-12.25	37.98	32.46	4.92	33.61	136	46	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2484.00	41.75	54.00	-12.25	37.98	32.46	4.92	33.61	136	46	AVERAGE																											
 <p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>88.29</td> <td>-----</td> <td>-----</td> <td>84.62</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>136</td> <td>46</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2462.00	88.29	-----	-----	84.62	32.40	4.89	33.62	136	46	Peak	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																														
1	2462.00	88.29	-----	-----	84.62	32.40	4.89	33.62	136	46	Peak																											



		31																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.07</td> <td>52.22</td> <td>74.00</td> <td>-21.78</td> <td>48.43</td> <td>32.47</td> <td>4.93</td> <td>33.61</td> <td>200</td> <td>257</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2488.07	52.22	74.00	-21.78	48.43	32.47	4.93	33.61	200	257	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>96.01</td> <td>-----</td> <td>-----</td> <td>92.34</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>200</td> <td>257</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	96.01	-----	-----	92.34	32.40	4.89	33.62	200	257	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2488.07	52.22	74.00	-21.78	48.43	32.47	4.93	33.61	200	257	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	96.01	-----	-----	92.34	32.40	4.89	33.62	200	257	Peak																																																															
Avg	<p style="text-align: right;">Date: 2023-09-07</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.85</td> <td>42.19</td> <td>54.00</td> <td>-11.81</td> <td>38.42</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>200</td> <td>257</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.85	42.19	54.00	-11.81	38.42	32.46	4.92	33.61	200	257	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>88.19</td> <td>-----</td> <td>-----</td> <td>84.52</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>200</td> <td>257</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	88.19	-----	-----	84.52	32.40	4.89	33.62	200	257	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2483.85	42.19	54.00	-11.81	38.42	32.46	4.92	33.61	200	257	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	88.19	-----	-----	84.52	32.40	4.89	33.62	200	257	Peak																																																															



Mode	31																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																				
ANT	CDD 7+12																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.45</td> <td>74.00</td> <td>-32.55</td> <td>56.87</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.64</td> <td>74.00</td> <td>-29.36</td> <td>58.43</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.45	74.00	-32.55	56.87	34.34	7.79	57.55	--	Peak	2	7386.00	44.64	74.00	-29.36	58.43	35.99	9.17	58.95	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.35</td> <td>74.00</td> <td>-32.65</td> <td>56.77</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.92</td> <td>74.00</td> <td>-31.08</td> <td>56.71</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.35	74.00	-32.65	56.77	34.34	7.79	57.55	--	Peak	2	7386.00	42.92	74.00	-31.08	56.71	35.99	9.17	58.95	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4924.00	41.45	74.00	-32.55	56.87	34.34	7.79	57.55	--	Peak																																																																																											
2	7386.00	44.64	74.00	-29.36	58.43	35.99	9.17	58.95	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4924.00	41.35	74.00	-32.65	56.77	34.34	7.79	57.55	--	Peak																																																																																											
2	7386.00	42.92	74.00	-31.08	56.71	35.99	9.17	58.95	--	Peak																																																																																											







32																																																																																																																																															
Mode	Band Edge - L																																																																																																																																														
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																																																														
ANT	CDD 7+12																																																																																																																																														
Pol.	Horizontal																																																																																																																																														
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.74</td> <td>52.34</td> <td>74.00</td> <td>-21.66</td> <td>49.00</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>160</td> <td>0</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>94.01</td> <td>74.00</td> <td>20.01</td> <td>90.53</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>160</td> <td>0</td> <td>PEAK</td> <td colspan="6"></td> </tr> </tbody> </table> </div> </div>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	2389.74	52.34	74.00	-21.66	49.00	32.21	4.80	33.67	160	0	PEAK									Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	2422.00	94.01	74.00	20.01	90.53	32.30	4.83	33.65	160	0	PEAK						
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																														
		Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg																																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	2389.74	52.34	74.00	-21.66	49.00	32.21	4.80	33.67	160	0	PEAK																																																																																																																																				
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																															
		Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg																																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	2422.00	94.01	74.00	20.01	90.53	32.30	4.83	33.65	160	0	PEAK																																																																																																																																				
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.97</td> <td>42.32</td> <td>54.00</td> <td>-11.68</td> <td>38.98</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>160</td> <td>0</td> <td>AVERAGE</td> <td colspan="6"></td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1" style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th colspan="2"></th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> <tr> <th colspan="2"></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>87.03</td> <td>54.00</td> <td>33.03</td> <td>83.55</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>160</td> <td>0</td> <td>Peak</td> <td colspan="6"></td> </tr> </tbody> </table> </div> </div>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	2389.97	42.32	54.00	-11.68	38.98	32.21	4.80	33.67	160	0	AVERAGE									Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark				Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg					1	2422.00	87.03	54.00	33.03	83.55	32.30	4.83	33.65	160	0	Peak						
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																														
		Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg																																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	2389.97	42.32	54.00	-11.68	38.98	32.21	4.80	33.67	160	0	AVERAGE																																																																																																																																				
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																															
		Freq	Level	Line	Margin	Level	Factor	Loss	Loss	Factor	Factor	cm	deg																																																																																																																																		
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																			
1	2422.00	87.03	54.00	33.03	83.55	32.30	4.83	33.65	160	0	Peak																																																																																																																																				



	32																																				
Mode	Band Edge - R																																				
	2400-2483.5_802.11n HT40_CH03_2422MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal	Fundamental																																			
Peak	<p style="text-align: right;">Date: 2023-09-08</p>																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.26</td> <td>52.67</td> <td>74.00</td> <td>-21.33</td> <td>48.87</td> <td>32.48</td> <td>4.93</td> <td>33.61</td> <td>160</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2491.26	52.67	74.00	-21.33	48.87	32.48	4.93	33.61	160	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2491.26	52.67	74.00	-21.33	48.87	32.48	4.93	33.61	160	0	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-08</p>																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2497.19</td> <td>41.35</td> <td>54.00</td> <td>-12.65</td> <td>37.52</td> <td>32.49</td> <td>4.94</td> <td>33.60</td> <td>160</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2497.19	41.35	54.00	-12.65	37.52	32.49	4.94	33.60	160	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2497.19	41.35	54.00	-12.65	37.52	32.49	4.94	33.60	160	0	AVERAGE																										

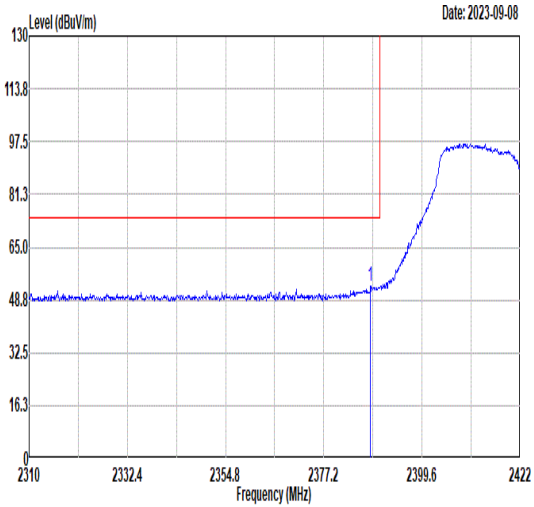
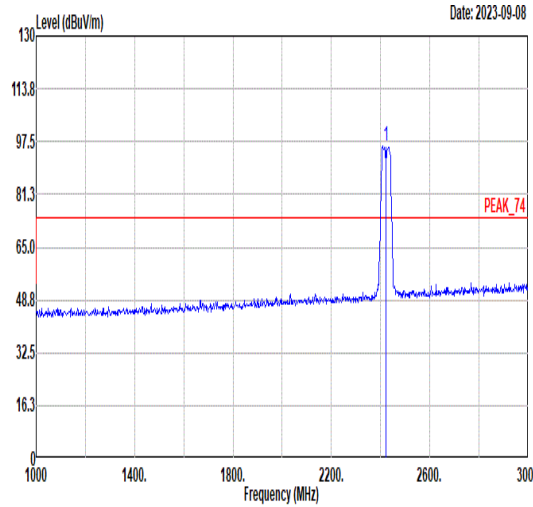
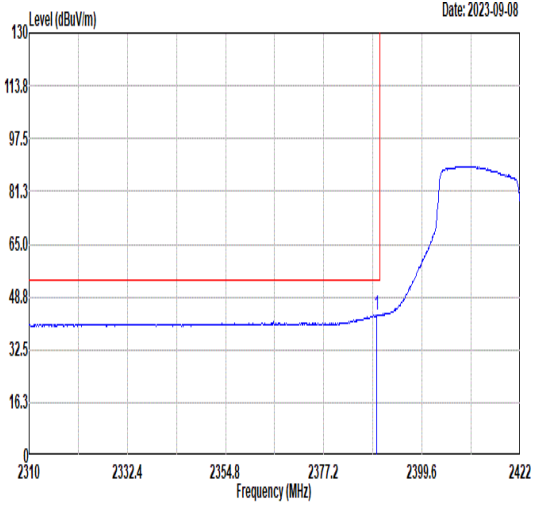
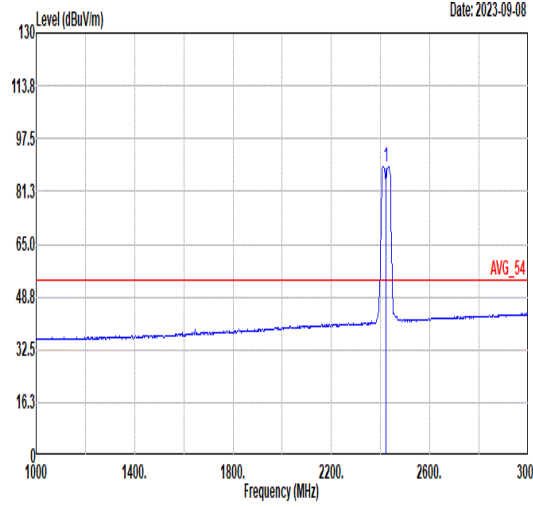


32																																					
Mode	Band Edge - L																																				
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.84</td> <td>52.98</td> <td>74.00</td> <td>-21.02</td> <td>49.65</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>300</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2387.84	52.98	74.00	-21.02	49.65	32.21	4.79	33.67	300	168	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2387.84	52.98	74.00	-21.02	49.65	32.21	4.79	33.67	300	168	PEAK																										
 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>95.97</td> <td>74.00</td> <td>21.97</td> <td>92.49</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>300</td> <td>168</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	95.97	74.00	21.97	92.49	32.30	4.83	33.65	300	168	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2422.00	95.97	74.00	21.97	92.49	32.30	4.83	33.65	300	168	PEAK																										
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.18</td> <td>43.09</td> <td>54.00</td> <td>-10.91</td> <td>39.76</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>300</td> <td>168</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.18	43.09	54.00	-10.91	39.76	32.21	4.79	33.67	300	168	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2389.18	43.09	54.00	-10.91	39.76	32.21	4.79	33.67	300	168	AVERAGE																										
 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>88.84</td> <td>54.00</td> <td>34.84</td> <td>85.36</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>300</td> <td>168</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	88.84	54.00	34.84	85.36	32.30	4.83	33.65	300	168	Peak	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2422.00	88.84	54.00	34.84	85.36	32.30	4.83	33.65	300	168	Peak																										



Mode	32																															
	Band Edge - R																															
	2400-2483.5_802.11n HT40_CH03_2422MHz																															
ANT	CDD 7+12																															
Pol.	Vertical	Fundamental																														
Peak	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2486.58</td> <td>51.31</td> <td>74.00</td> <td>-22.69</td> <td>47.53</td> <td>32.47</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>168 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2486.58	51.31	74.00	-22.69	47.53	32.47	4.92	33.61	300	168 PEAK	Blank
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2486.58	51.31	74.00	-22.69	47.53	32.47	4.92	33.61	300	168 PEAK																							
Avg	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2484.63</td> <td>41.49</td> <td>54.00</td> <td>-12.51</td> <td>37.72</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>168 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2484.63	41.49	54.00	-12.51	37.72	32.46	4.92	33.61	300	168 AVERAGE	Blank
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2484.63	41.49	54.00	-12.51	37.72	32.46	4.92	33.61	300	168 AVERAGE																							

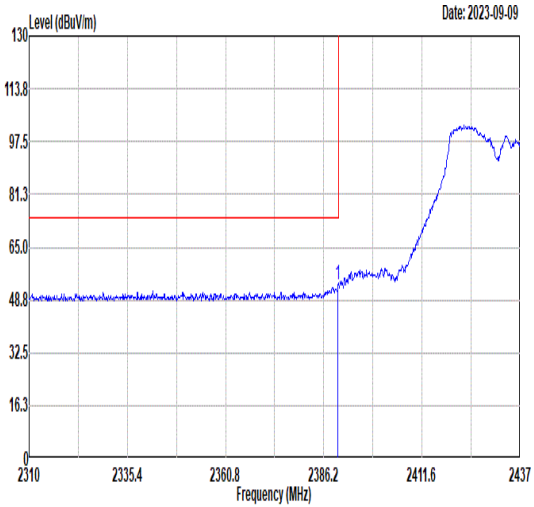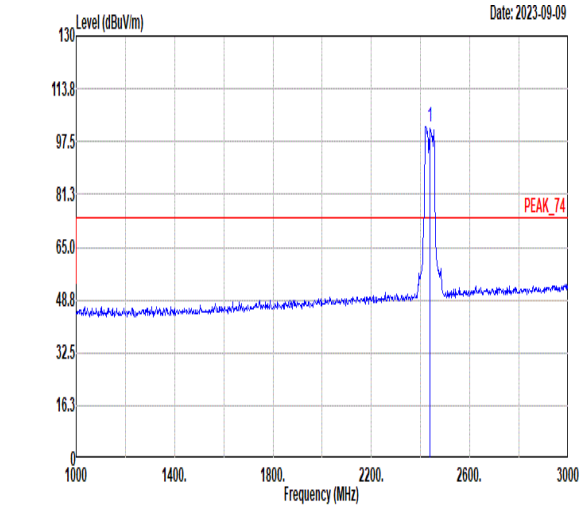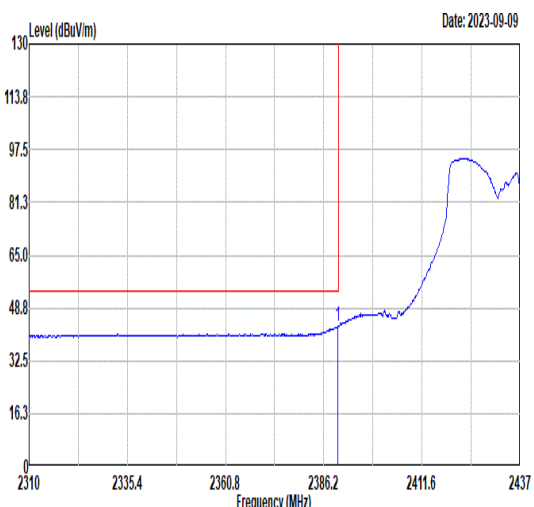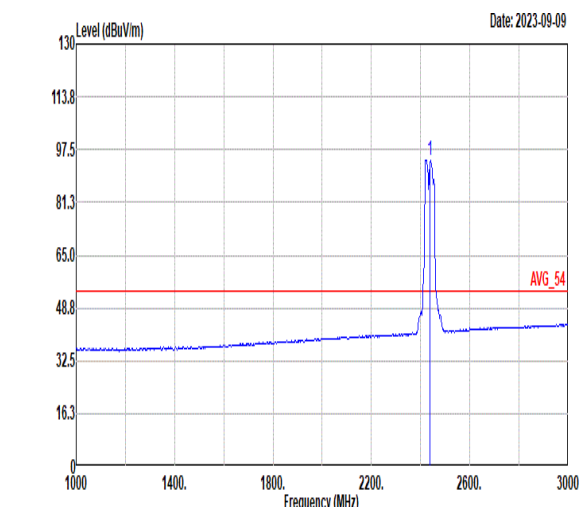

33																															
Mode	Band Edge - L																														
	2400-2483.5_802.11n_HT40_CH06_2437MHz																														
ANT	CDD 7+12																														
Pol.	Horizontal																														
Peak	 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.88</td> <td>53.47</td> <td>74.00</td> <td>-20.53</td> <td>50.13</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 2389.88	53.47	74.00	-20.53	50.13	32.21	4.80	33.67	100	55 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																							
1 2389.88	53.47	74.00	-20.53	50.13	32.21	4.80	33.67	100	55 PEAK																						
 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>102.00</td> <td>98.53</td> <td>3.29</td> <td>4.83</td> <td>33.65</td> <td>100</td> <td>55</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 2437.00	102.00	98.53	3.29	4.83	33.65	100	55	55 PEAK		
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																							
1 2437.00	102.00	98.53	3.29	4.83	33.65	100	55	55 PEAK																							
Avg	 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2389.88</td> <td>43.07</td> <td>54.00</td> <td>-10.93</td> <td>39.73</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 2389.88	43.07	54.00	-10.93	39.73	32.21	4.80	33.67	100	55 AVERAGE
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																							
1 2389.88	43.07	54.00	-10.93	39.73	32.21	4.80	33.67	100	55 AVERAGE																						
 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2437.00</td> <td>94.43</td> <td>90.95</td> <td>3.20</td> <td>4.83</td> <td>33.65</td> <td>100</td> <td>55</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 2437.00	94.43	90.95	3.20	4.83	33.65	100	55	55 AVERAGE		
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																							
1 2437.00	94.43	90.95	3.20	4.83	33.65	100	55	55 AVERAGE																							



Mode	33																															
	Band Edge - R																															
	2400-2483.5_802.11n HT40_CH06_2437MHz																															
ANT	CDD 7+12																															
Pol.	Horizontal	Fundamental																														
Peak	<p>Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2484.19</td> <td>56.18</td> <td>74.00</td> <td>-17.82</td> <td>52.41</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2484.19	56.18	74.00	-17.82	52.41	32.46	4.92	33.61	100	55 PEAK	Blank
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2484.19	56.18	74.00	-17.82	52.41	32.46	4.92	33.61	100	55 PEAK																							
Avg	<p>Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.56</td> <td>45.19</td> <td>54.00</td> <td>-8.81</td> <td>41.42</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.56	45.19	54.00	-8.81	41.42	32.46	4.92	33.61	100	55 AVERAGE	Blank
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2483.56	45.19	54.00	-8.81	41.42	32.46	4.92	33.61	100	55 AVERAGE																							



		33																																			
Mode	Band Edge - R																																				
	2400-2483.5_802.11n HT40_CH06_2437MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical	Fundamental																																			
Peak	<p style="text-align: right;">Date: 2023-09-09</p>		Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.25</td> <td>58.70</td> <td>74.00</td> <td>-15.30</td> <td>54.93</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>241</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.25	58.70	74.00	-15.30	54.93	32.46	4.92	33.61	241
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2484.25	58.70	74.00	-15.30	54.93	32.46	4.92	33.61	241	296	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-15</p>		Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.75</td> <td>47.56</td> <td>54.00</td> <td>-6.44</td> <td>43.79</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>241</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.75	47.56	54.00	-6.44	43.79	32.46	4.92	33.61	241
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.75	47.56	54.00	-6.44	43.79	32.46	4.92	33.61	241	296	AVERAGE																										







34																																					
Mode	Band Edge - L																																				
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2359.56</td> <td>51.54</td> <td>74.00</td> <td>-22.46</td> <td>48.34</td> <td>32.13</td> <td>4.76</td> <td>33.69</td> <td>110</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2359.56	51.54	74.00	-22.46	48.34	32.13	4.76	33.69	110	42	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2359.56	51.54	74.00	-22.46	48.34	32.13	4.76	33.69	110	42	PEAK																										
<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>96.17</td> <td>-----</td> <td>-----</td> <td>92.53</td> <td>32.39</td> <td>4.88</td> <td>33.63</td> <td>110</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	96.17	-----	-----	92.53	32.39	4.88	33.63	110	42	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	96.17	-----	-----	92.53	32.39	4.88	33.63	110	42	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.98</td> <td>40.73</td> <td>54.00</td> <td>-13.27</td> <td>37.41</td> <td>32.20</td> <td>4.79</td> <td>33.67</td> <td>110</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2384.98	40.73	54.00	-13.27	37.41	32.20	4.79	33.67	110	42	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2384.98	40.73	54.00	-13.27	37.41	32.20	4.79	33.67	110	42	AVERAGE																										
<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>89.47</td> <td>-----</td> <td>-----</td> <td>85.83</td> <td>32.39</td> <td>4.88</td> <td>33.63</td> <td>110</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	89.47	-----	-----	85.83	32.39	4.88	33.63	110	42	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	89.47	-----	-----	85.83	32.39	4.88	33.63	110	42	AVERAGE																										



Mode	34																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH09_2452MHz																																										
ANT	CDD 7+12																																										
Pol.	Horizontal	Fundamental																																									
Peak																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.78</td> <td>52.69</td> <td>74.00</td> <td>-21.31</td> <td>48.92</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>110</td> <td>42 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1 2483.78	52.69	74.00	-21.31	48.92	32.46	4.92	33.61	110
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																				
						cm	deg																																				
1 2483.78	52.69	74.00	-21.31	48.92	32.46	4.92	33.61	110	42 PEAK																																		
Avg																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2483.54</td> <td>42.55</td> <td>54.00</td> <td>-11.45</td> <td>38.78</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>110</td> <td>42 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1 2483.54	42.55	54.00	-11.45	38.78	32.46	4.92	33.61	110
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																				
						cm	deg																																				
1 2483.54	42.55	54.00	-11.45	38.78	32.46	4.92	33.61	110	42 AVERAGE																																		

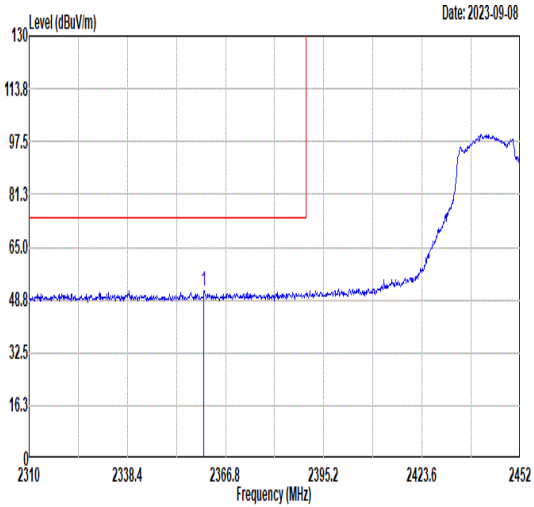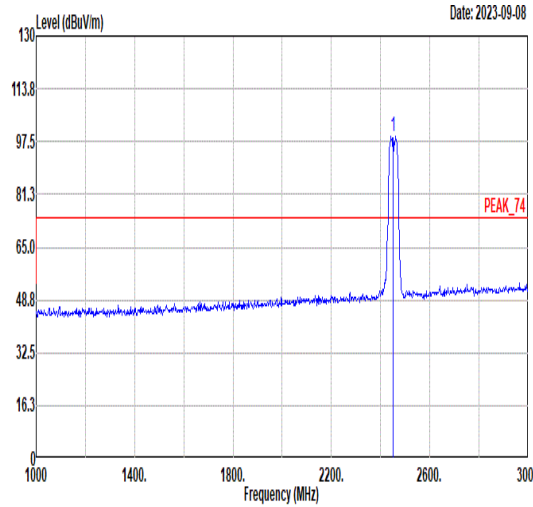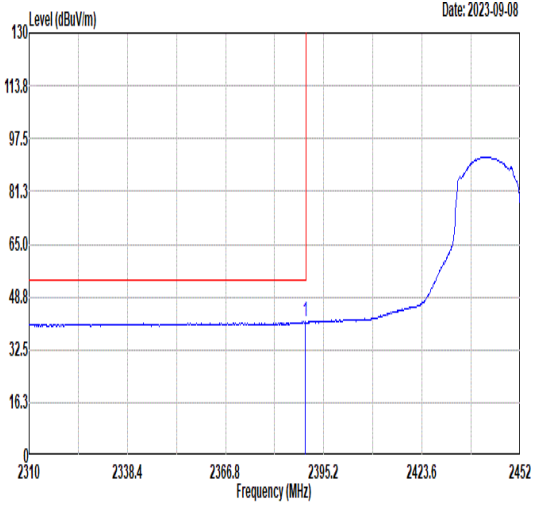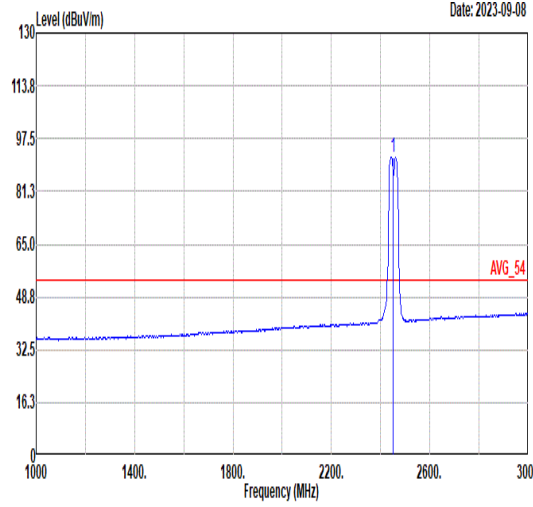

34																																					
Mode	Band Edge - L																																				
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical																																				
Peak	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2360.55</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>48.52</td> <td>32.14</td> <td>4.77</td> <td>33.69</td> <td>111</td> <td>290</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2360.55	51.74	74.00	-22.26	48.52	32.14	4.77	33.69	111	290	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2360.55	51.74	74.00	-22.26	48.52	32.14	4.77	33.69	111	290	PEAK																										
 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>98.98</td> <td>-----</td> <td>-----</td> <td>95.31</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>111</td> <td>290</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	98.98	-----	-----	95.31	32.40	4.89	33.62	111	290	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	98.98	-----	-----	95.31	32.40	4.89	33.62	111	290	PEAK																										
Avg	 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>41.09</td> <td>54.00</td> <td>-12.91</td> <td>37.75</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>111</td> <td>290</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.95	41.09	54.00	-12.91	37.75	32.21	4.80	33.67	111	290	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.95	41.09	54.00	-12.91	37.75	32.21	4.80	33.67	111	290	AVERAGE																										
 <p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2452.00</td> <td>91.84</td> <td>-----</td> <td>-----</td> <td>88.17</td> <td>32.40</td> <td>4.89</td> <td>33.62</td> <td>111</td> <td>290</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2452.00	91.84	-----	-----	88.17	32.40	4.89	33.62	111	290	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2452.00	91.84	-----	-----	88.17	32.40	4.89	33.62	111	290	AVERAGE																										



	34																																												
Mode	Band Edge - R																																												
	2400-2483.5_802.11n HT40_CH09_2452MHz																																												
ANT	CDD 7+12																																												
Pol.	Vertical	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>54.31</td> <td>74.00</td> <td>-19.69</td> <td>50.54</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>111</td> <td>290</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2483.54	54.31	74.00	-19.69	50.54	32.46	4.92	33.61	111	290
Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2483.54	54.31	74.00	-19.69	50.54	32.46	4.92	33.61	111	290	PEAK																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.58</td> <td>43.48</td> <td>54.00</td> <td>-10.52</td> <td>39.71</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>111</td> <td>290</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	2483.58	43.48	54.00	-10.52	39.71	32.46	4.92	33.61	111	290
Limit	Read	Ant	Cable	Preamp	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	2483.58	43.48	54.00	-10.52	39.71	32.46	4.92	33.61	111	290	AVERAGE																																		



35																																							
Mode	Band Edge																																						
	2400-2483.5_802.11be ETH20_CH01_Full RU_2412MHz																																						
ANT	CDD 7+12																																						
Pol.	Horizontal																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>52.77</td> <td>74.00</td> <td>-21.23</td> <td>49.44</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>100</td> <td>307 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	52.77	74.00	-21.23	49.44	32.21	4.79	33.67	100	307 PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1	2388.91	52.77	74.00	-21.23	49.44	32.21	4.79	33.67	100	307 PEAK																													
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.34</td> <td>-----</td> <td>-----</td> <td>95.87</td> <td>32.29</td> <td>4.83</td> <td>33.65</td> <td>100</td> <td>307 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.34	-----	-----	95.87	32.29	4.83	33.65	100	307 PEAK	
Limit	Read	Ant	Cable	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1	2412.00	99.34	-----	-----	95.87	32.29	4.83	33.65	100	307 PEAK																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>42.34</td> <td>54.00</td> <td>-11.66</td> <td>39.00</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>307 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	42.34	54.00	-11.66	39.00	32.21	4.80	33.67	100	307 AVERAGE
	Limit	Read	Ant	Cable	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1	2389.82	42.34	54.00	-11.66	39.00	32.21	4.80	33.67	100	307 AVERAGE																													
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>89.28</td> <td>-----</td> <td>-----</td> <td>85.81</td> <td>32.29</td> <td>4.83</td> <td>33.65</td> <td>100</td> <td>307 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.28	-----	-----	85.81	32.29	4.83	33.65	100	307 AVERAGE	
Limit	Read	Ant	Cable	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1	2412.00	89.28	-----	-----	85.81	32.29	4.83	33.65	100	307 AVERAGE																													



		35																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11be ETH20_CH01_Full RU_2412MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>53.80</td> <td>74.00</td> <td>-20.20</td> <td>50.46</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>121</td> <td>286</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.95	53.80	74.00	-20.20	50.46	32.21	4.80	33.67	121	286	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.71</td> <td>-----</td> <td>-----</td> <td>98.24</td> <td>32.29</td> <td>4.83</td> <td>33.65</td> <td>121</td> <td>286</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	101.71	-----	-----	98.24	32.29	4.83	33.65	121	286	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.95	53.80	74.00	-20.20	50.46	32.21	4.80	33.67	121	286	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2412.00	101.71	-----	-----	98.24	32.29	4.83	33.65	121	286	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>42.84</td> <td>54.00</td> <td>-11.16</td> <td>39.50</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>121</td> <td>286</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.69	42.84	54.00	-11.16	39.50	32.21	4.80	33.67	121	286	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>92.41</td> <td>-----</td> <td>-----</td> <td>88.93</td> <td>32.30</td> <td>4.83</td> <td>33.65</td> <td>121</td> <td>286</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2412.00	92.41	-----	-----	88.93	32.30	4.83	33.65	121	286	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.69	42.84	54.00	-11.16	39.50	32.21	4.80	33.67	121	286	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2412.00	92.41	-----	-----	88.93	32.30	4.83	33.65	121	286	AVERAGE																																																															



Mode	35																																																																								
	Harmonic																																																																								
	2400-2483.5_802.11be ETH20_CH01_Full RU_2412MHz																																																																								
ANT	CDD 7+12																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.10</td> <td>74.00</td> <td>-32.90</td> <td>56.43</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	41.10	74.00	-32.90	56.43	34.40	7.75	57.48	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.49</td> <td>74.00</td> <td>-33.51</td> <td>55.82</td> <td>34.40</td> <td>7.75</td> <td>57.48</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	40.49	74.00	-33.51	55.82	34.40	7.75	57.48	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	41.10	74.00	-32.90	56.43	34.40	7.75	57.48	--	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																	
1	4824.00	40.49	74.00	-33.51	55.82	34.40	7.75	57.48	--	Peak																																																															



36																																					
Mode	Band Edge - L																																				
	2400-2483.5_802.11be ETH20_CH06_Full RU_2437MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2355.47</td> <td>51.54</td> <td>74.00</td> <td>-22.46</td> <td>48.35</td> <td>32.12</td> <td>4.76</td> <td>33.69</td> <td>102</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2355.47	51.54	74.00	-22.46	48.35	32.12	4.76	33.69	102	58	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2355.47	51.54	74.00	-22.46	48.35	32.12	4.76	33.69	102	58	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.40</td> <td>-----</td> <td>-----</td> <td>102.83</td> <td>32.35</td> <td>4.86</td> <td>33.64</td> <td>102</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	106.40	-----	-----	102.83	32.35	4.86	33.64	102	58	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2437.00	106.40	-----	-----	102.83	32.35	4.86	33.64	102	58	PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.50</td> <td>41.11</td> <td>54.00</td> <td>-12.89</td> <td>37.77</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>102</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.50	41.11	54.00	-12.89	37.77	32.21	4.80	33.67	102	58	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.50	41.11	54.00	-12.89	37.77	32.21	4.80	33.67	102	58	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.81</td> <td>-----</td> <td>-----</td> <td>94.23</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>102</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	97.81	-----	-----	94.23	32.35	4.87	33.64	102	58	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2437.00	97.81	-----	-----	94.23	32.35	4.87	33.64	102	58	AVERAGE																										



Mode	36																														
	Band Edge - R																														
	2400-2483.5_802.11be ETH20_CH06_Full RU_2437MHz																														
ANT	CDD 7+12																														
Pol.	Horizontal	Fundamental																													
Peak	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>52.84</td> <td>74.00</td> <td>-21.16</td> <td>49.07</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>102</td> <td>58 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2483.68	52.84	74.00	-21.16	49.07	32.46	4.92	33.61	102	58 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	2483.68	52.84	74.00	-21.16	49.07	32.46	4.92	33.61	102	58 PEAK																					
Avg	<p>Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>42.08</td> <td>54.00</td> <td>-11.92</td> <td>38.31</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>102</td> <td>58 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	2483.62	42.08	54.00	-11.92	38.31	32.46	4.92	33.61	102	58 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	2483.62	42.08	54.00	-11.92	38.31	32.46	4.92	33.61	102	58 AVERAGE																					



		36																																																																								
Mode	Band Edge - L																																																																									
	2400-2483.5_802.11be ETH20_CH06_Full RU_2437MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.99</td> <td>52.09</td> <td>74.00</td> <td>-21.91</td> <td>48.76</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>300</td> <td>233</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2388.99	52.09	74.00	-21.91	48.76	32.21	4.79	33.67	300	233	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>106.47</td> <td>-----</td> <td>-----</td> <td>102.89</td> <td>32.35</td> <td>4.87</td> <td>33.64</td> <td>300</td> <td>233</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	106.47	-----	-----	102.89	32.35	4.87	33.64	300	233	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2388.99	52.09	74.00	-21.91	48.76	32.21	4.79	33.67	300	233	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	106.47	-----	-----	102.89	32.35	4.87	33.64	300	233	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>41.70</td> <td>54.00</td> <td>-12.30</td> <td>38.36</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>300</td> <td>233</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.88	41.70	54.00	-12.30	38.36	32.21	4.80	33.67	300	233	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>97.30</td> <td>-----</td> <td>-----</td> <td>93.70</td> <td>32.36</td> <td>4.87</td> <td>33.63</td> <td>300</td> <td>233</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	97.30	-----	-----	93.70	32.36	4.87	33.63	300	233	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2389.88	41.70	54.00	-12.30	38.36	32.21	4.80	33.67	300	233	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2437.00	97.30	-----	-----	93.70	32.36	4.87	33.63	300	233	AVERAGE																																																															



		36																																			
Mode	Band Edge - R																																				
	2400-2483.5_802.11be ETH20_CH06_Full RU_2437MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical	Fundamental																																			
Peak			Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>52.89</td> <td>74.00</td> <td>-21.11</td> <td>49.12</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>233</td> <td>PEAK</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.62	52.89	74.00	-21.11	49.12	32.46	4.92	33.61	300
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.62	52.89	74.00	-21.11	49.12	32.46	4.92	33.61	300	233	PEAK																										
Avg			Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.00</td> <td>42.66</td> <td>54.00</td> <td>-11.34</td> <td>38.89</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>233</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.00	42.66	54.00	-11.34	38.89	32.46	4.92	33.61	300
Limit	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2484.00	42.66	54.00	-11.34	38.89	32.46	4.92	33.61	300	233	AVERAGE																										



Mode	36																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11be ETH20_CH06_Full RU_2437MHz																																																																																																
ANT	CDD 7+12																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.34</td> <td>74.00</td> <td>-32.66</td> <td>56.72</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>44.01</td> <td>74.00</td> <td>-29.99</td> <td>57.95</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	41.34	74.00	-32.66	56.72	34.37	7.77	57.52	--	--	Peak	2	7311.00	44.01	74.00	-29.99	57.95	36.05	8.93	58.92	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>40.84</td> <td>74.00</td> <td>-33.16</td> <td>56.22</td> <td>34.37</td> <td>7.77</td> <td>57.52</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.75</td> <td>74.00</td> <td>-30.25</td> <td>57.69</td> <td>36.05</td> <td>8.93</td> <td>58.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4874.00	40.84	74.00	-33.16	56.22	34.37	7.77	57.52	--	--	Peak	2	7311.00	43.75	74.00	-30.25	57.69	36.05	8.93	58.92	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	41.34	74.00	-32.66	56.72	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	44.01	74.00	-29.99	57.95	36.05	8.93	58.92	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	4874.00	40.84	74.00	-33.16	56.22	34.37	7.77	57.52	--	--	Peak																																																																																						
2	7311.00	43.75	74.00	-30.25	57.69	36.05	8.93	58.92	--	--	Peak																																																																																						



37																																					
Mode	Band Edge																																				
	2400-2483.5_802.11be ETH20_CH11_Full RU_2462MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.51</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>50.01</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>102</td> <td>57</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.51	53.78	74.00	-20.22	50.01	32.46	4.92	33.61	102	57	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.51	53.78	74.00	-20.22	50.01	32.46	4.92	33.61	102	57	PEAK																										
<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>100.91</td> <td>-----</td> <td>-----</td> <td>97.21</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>102</td> <td>57</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	100.91	-----	-----	97.21	32.42	4.90	33.62	102	57	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	100.91	-----	-----	97.21	32.42	4.90	33.62	102	57	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.66</td> <td>42.65</td> <td>54.00</td> <td>-11.35</td> <td>38.88</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>102</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2483.66	42.65	54.00	-11.35	38.88	32.46	4.92	33.61	102	57	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2483.66	42.65	54.00	-11.35	38.88	32.46	4.92	33.61	102	57	AVERAGE																										
<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>91.47</td> <td>-----</td> <td>-----</td> <td>87.77</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>102</td> <td>57</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	91.47	-----	-----	87.77	32.42	4.90	33.62	102	57	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2462.00	91.47	-----	-----	87.77	32.42	4.90	33.62	102	57	AVERAGE																										



		37																																																																								
Mode	Band Edge																																																																									
	2400-2483.5_802.11be ETH20_CH11_Full RU_2462MHz																																																																									
ANT	CDD 7+12																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.19</td> <td>53.91</td> <td>74.00</td> <td>-20.09</td> <td>50.14</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.19	53.91	74.00	-20.09	50.14	32.46	4.92	33.61	300	242	PEAK	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>101.83</td> <td>-----</td> <td>-----</td> <td>98.13</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>300</td> <td>242</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	101.83	-----	-----	98.13	32.42	4.90	33.62	300	242	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.19	53.91	74.00	-20.09	50.14	32.46	4.92	33.61	300	242	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	101.83	-----	-----	98.13	32.42	4.90	33.62	300	242	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.27</td> <td>42.63</td> <td>54.00</td> <td>-11.37</td> <td>38.86</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>300</td> <td>242</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2484.27	42.63	54.00	-11.37	38.86	32.46	4.92	33.61	300	242	AVERAGE	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>92.58</td> <td>-----</td> <td>-----</td> <td>88.88</td> <td>32.42</td> <td>4.90</td> <td>33.62</td> <td>300</td> <td>242</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2462.00	92.58	-----	-----	88.88	32.42	4.90	33.62	300	242	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2484.27	42.63	54.00	-11.37	38.86	32.46	4.92	33.61	300	242	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	2462.00	92.58	-----	-----	88.88	32.42	4.90	33.62	300	242	AVERAGE																																																															



Mode	37																																																																																														
	Harmonic																																																																																														
	2400-2483.5_802.11be ETH20_CH11_Full RU_2462MHz																																																																																														
ANT	CDD 7+12																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg	<p>Date: 2023-09-09</p>	<p>Date: 2023-09-09</p>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.30</td> <td>74.00</td> <td>-32.70</td> <td>56.72</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.39</td> <td>74.00</td> <td>-30.61</td> <td>57.18</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.30	74.00	-32.70	56.72	34.34	7.79	57.55	-- -- Peak	2	7386.00	43.39	74.00	-30.61	57.18	35.99	9.17	58.95	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.52</td> <td>74.00</td> <td>-32.48</td> <td>56.94</td> <td>34.34</td> <td>7.79</td> <td>57.55</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.36</td> <td>74.00</td> <td>-29.64</td> <td>58.15</td> <td>35.99</td> <td>9.17</td> <td>58.95</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	41.52	74.00	-32.48	56.94	34.34	7.79	57.55	-- -- Peak	2	7386.00	44.36	74.00	-29.64	58.15	35.99	9.17	58.95
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	4924.00	41.30	74.00	-32.70	56.72	34.34	7.79	57.55	-- -- Peak																																																																																						
2	7386.00	43.39	74.00	-30.61	57.18	35.99	9.17	58.95	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	4924.00	41.52	74.00	-32.48	56.94	34.34	7.79	57.55	-- -- Peak																																																																																						
2	7386.00	44.36	74.00	-29.64	58.15	35.99	9.17	58.95	-- -- Peak																																																																																						







38																																					
Mode	Band Edge																																				
	2400-2483.5_802.11be ETH40_CH03_Full RU_2422MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.52</td> <td>52.21</td> <td>74.00</td> <td>-21.79</td> <td>48.88</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>130</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2388.52	52.21	74.00	-21.79	48.88	32.21	4.79	33.67	130	30	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2388.52	52.21	74.00	-21.79	48.88	32.21	4.79	33.67	130	30	PEAK																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>96.61</td> <td>-----</td> <td>-----</td> <td>93.17</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>130</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	96.61	-----	-----	93.17	32.27	4.82	33.65	130	30	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2422.00	96.61	-----	-----	93.17	32.27	4.82	33.65	130	30	PEAK																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.17</td> <td>42.00</td> <td>54.00</td> <td>-12.00</td> <td>38.67</td> <td>32.21</td> <td>4.79</td> <td>33.67</td> <td>130</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2389.17	42.00	54.00	-12.00	38.67	32.21	4.79	33.67	130	30	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2389.17	42.00	54.00	-12.00	38.67	32.21	4.79	33.67	130	30	AVERAGE																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>87.64</td> <td>-----</td> <td>-----</td> <td>84.19</td> <td>32.28</td> <td>4.82</td> <td>33.65</td> <td>130</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2422.00	87.64	-----	-----	84.19	32.28	4.82	33.65	130	30	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line Margin	Level Factor	Loss Factor	dB	cm	deg																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	2422.00	87.64	-----	-----	84.19	32.28	4.82	33.65	130	30	AVERAGE																										



38																																					
Mode	Band Edge																																				
	2400-2483.5_802.11be ETH40_CH03_Full RU_2422MHz																																				
ANT	CDD 7+12																																				
Pol.	Vertical																																				
Peak	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>43.76</td> <td>74.00</td> <td>-19.46</td> <td>51.20</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>124</td> <td>290</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.56	43.76	74.00	-19.46	51.20	32.21	4.80	33.67	124	290	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.56	43.76	74.00	-19.46	51.20	32.21	4.80	33.67	124	290	PEAK																										
<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>100.45</td> <td>-----</td> <td>-----</td> <td>97.01</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>124</td> <td>290</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	100.45	-----	-----	97.01	32.27	4.82	33.65	124	290	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2422.00	100.45	-----	-----	97.01	32.27	4.82	33.65	124	290	PEAK																										
Avg	<p style="text-align: right;">Date: 2023-09-08</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>43.76</td> <td>54.00</td> <td>-10.24</td> <td>40.42</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>124</td> <td>290</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.69	43.76	54.00	-10.24	40.42	32.21	4.80	33.67	124	290	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.69	43.76	54.00	-10.24	40.42	32.21	4.80	33.67	124	290	AVERAGE																										
<p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2422.00</td> <td>90.43</td> <td>-----</td> <td>-----</td> <td>86.99</td> <td>32.27</td> <td>4.82</td> <td>33.65</td> <td>124</td> <td>290</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2422.00	90.43	-----	-----	86.99	32.27	4.82	33.65	124	290	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2422.00	90.43	-----	-----	86.99	32.27	4.82	33.65	124	290	AVERAGE																										

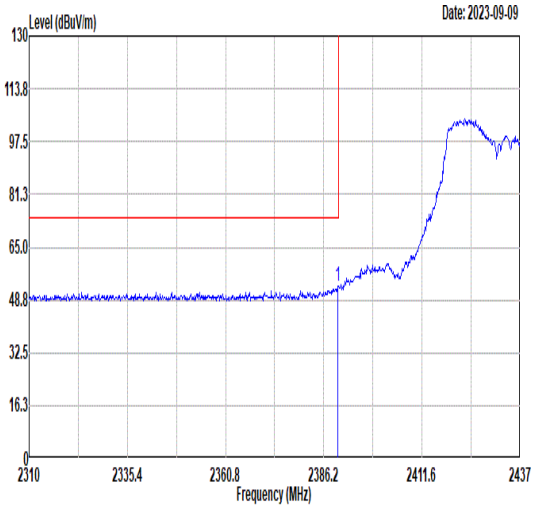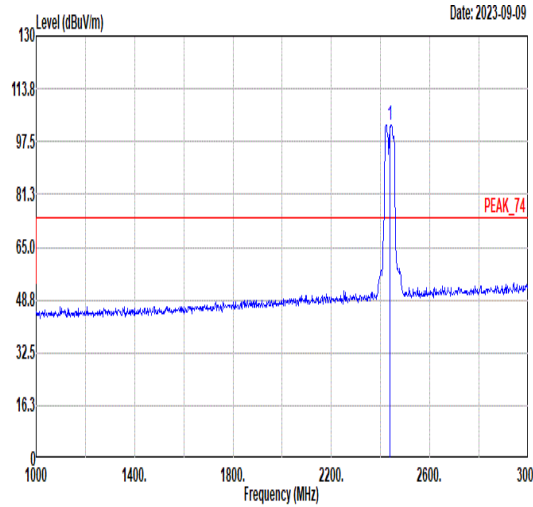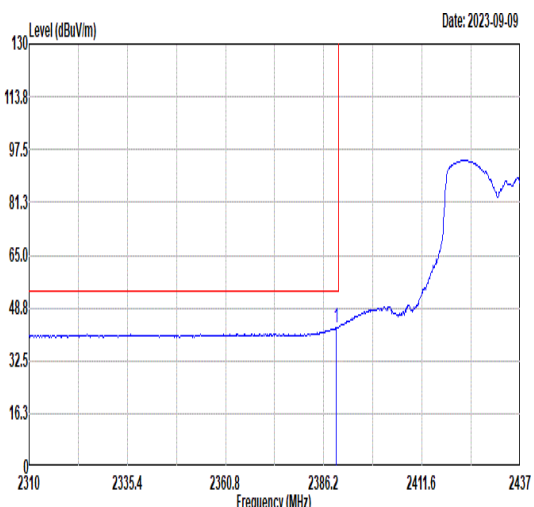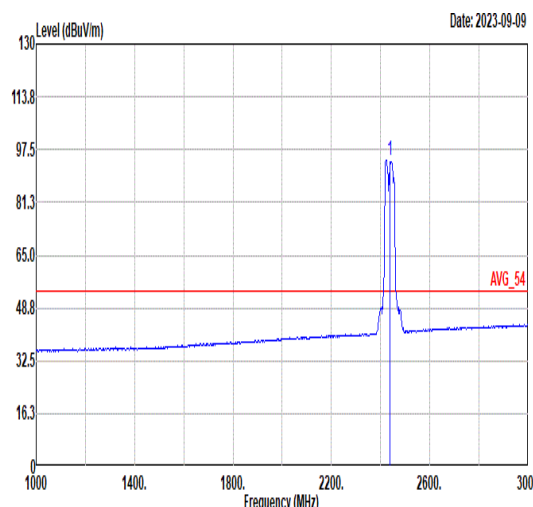

39																																					
Mode	Band Edge - L																																				
	2400-2483.5_802.11be ETH40_CH06_Full RU_2437MHz																																				
ANT	CDD 7+12																																				
Pol.	Horizontal																																				
Peak	 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.88</td> <td>52.76</td> <td>74.00</td> <td>-21.24</td> <td>49.42</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.88	52.76	74.00	-21.24	49.42	32.21	4.80	33.67	100	53	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.88	52.76	74.00	-21.24	49.42	32.21	4.80	33.67	100	53	PEAK																										
 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>102.71</td> <td>-----</td> <td>-----</td> <td>99.22</td> <td>32.30</td> <td>4.84</td> <td>33.65</td> <td>100</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	102.71	-----	-----	99.22	32.30	4.84	33.65	100	53	PEAK	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2437.00	102.71	-----	-----	99.22	32.30	4.84	33.65	100	53	PEAK																										
Avg	 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.50</td> <td>42.74</td> <td>54.00</td> <td>-11.26</td> <td>39.40</td> <td>32.21</td> <td>4.80</td> <td>33.67</td> <td>100</td> <td>53</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2389.50	42.74	54.00	-11.26	39.40	32.21	4.80	33.67	100	53	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2389.50	42.74	54.00	-11.26	39.40	32.21	4.80	33.67	100	53	AVERAGE																										
 <p style="text-align: right;">Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2437.00</td> <td>94.32</td> <td>-----</td> <td>-----</td> <td>90.83</td> <td>32.30</td> <td>4.84</td> <td>33.65</td> <td>100</td> <td>53</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2437.00	94.32	-----	-----	90.83	32.30	4.84	33.65	100	53	AVERAGE	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	2437.00	94.32	-----	-----	90.83	32.30	4.84	33.65	100	53	AVERAGE																										



Mode	39																																															
	Band Edge - R																																															
	2400-2483.5_802.11be ETH40_CH06_Full RU_2437MHz																																															
ANT	CDD 7+12																																															
Pol.	Horizontal	Fundamental																																														
Peak	<p>Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>56.19</td> <td>74.00</td> <td>-17.81</td> <td>52.42</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>53</td> <td>PEAK</td> <td></td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2483.68	56.19	74.00	-17.81	52.42	32.46	4.92	33.61	100	53	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2483.68	56.19	74.00	-17.81	52.42	32.46	4.92	33.61	100	53	PEAK																																					
Blank																																																
Avg	<p>Date: 2023-09-09</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>45.40</td> <td>54.00</td> <td>-8.60</td> <td>41.63</td> <td>32.46</td> <td>4.92</td> <td>33.61</td> <td>100</td> <td>53</td> <td>AVERAGE</td> <td></td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg		1	2483.56	45.40	54.00	-8.60	41.63	32.46	4.92	33.61	100	53	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg																																					
1	2483.56	45.40	54.00	-8.60	41.63	32.46	4.92	33.61	100	53	AVERAGE																																					
Blank																																																



Mode	39																																																																																
	Harmonic																																																																																
	2400-2483.5_802.11be ETH40_CH06_Full RU_2437MHz																																																																																
ANT	CDD 7+12																																																																																
Pol.	Horizontal	Vertical																																																																															
Peak Avg	<p>Date: 2023-09-16</p>	<p>Date: 2023-09-16</p>																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.92</td> <td>74.00</td> <td>-32.08</td> <td>57.30</td> <td>34.37</td> <td>7.77 57.52 -- -- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.42</td> <td>74.00</td> <td>-30.58</td> <td>57.36</td> <td>36.05</td> <td>8.93 58.92 -- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	4874.00	41.92	74.00	-32.08	57.30	34.37	7.77 57.52 -- -- Peak	2	7311.00	43.42	74.00	-30.58	57.36	36.05	8.93 58.92 -- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.46</td> <td>74.00</td> <td>-32.54</td> <td>56.84</td> <td>34.37</td> <td>7.77 57.52 -- -- Peak</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.73</td> <td>74.00</td> <td>-30.27</td> <td>57.67</td> <td>36.05</td> <td>8.93 58.92 -- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1	4874.00	41.46	74.00	-32.54	56.84	34.37	7.77 57.52 -- -- Peak	2	7311.00	43.73	74.00	-30.27	57.67	36.05
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																										
1	4874.00	41.92	74.00	-32.08	57.30	34.37	7.77 57.52 -- -- Peak																																																																										
2	7311.00	43.42	74.00	-30.58	57.36	36.05	8.93 58.92 -- -- Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																																										
1	4874.00	41.46	74.00	-32.54	56.84	34.37	7.77 57.52 -- -- Peak																																																																										
2	7311.00	43.73	74.00	-30.27	57.67	36.05	8.93 58.92 -- -- Peak																																																																										