

HEARING AID COMPATIBILITY T-COIL TEST REPORT

FCC ID : 2ABZ2-AA550
Equipment : Mobile Phone
Brand Name : 1+,ONEPLUS
Model Name : CPH2583
T-Rating : T4
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04, and 18C05, Shum Yip Terra
Building, Binhe Avenue North, Futian District,
Shenzhen, Guangdong, P.R. China.
Manufacturer : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04, and 18C05, Shum Yip Terra
Building, Binhe Avenue North, Futian District,
Shenzhen, Guangdong, P.R. China.
Standard : FCC 47 CFR §20.19
ANSI C63.19-2011

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



Table of Contents

1. Attestation of Test Results	4
2. General Information	5
3. Testing Location	6
4. Applied Standards	6
5. Air Interface and Operating Mode	7
6. Measurement standards for T-Coil	9
6.1 Frequency Response	9
6.2 T-Coil Signal Quality Categories	9
6.3 Description of EUT Test Position	10
7. T-Coil Test Procedure	11
7.1 Test Flow Chart	12
7.2 Test Setup Diagram for GSM/UMTS /VoLTE/VoWiFi	13
7.3 PAG Reuse section: HAC T-coil measurement procedures for 5G NR	15
8. Test Equipment List	16
9. T-Coil testing for CMRS Voice	17
9.1 GSM Tests Results	17
9.2 UMTS Tests Results	18
10. T-Coil testing for CMRS IP Voice	19
10.1 VoLTE Tests Results	19
10.1 VoNR evaluation	22
10.2 VoWiFi Tests Results	23
11. Uncertainty Assessment	26
12. References	27

Appendix A. Plots of T-Coil Measurement

Appendix B. DASy Calibration Certificate

Appendix C. Test Setup Photos



History of this test report

Report No.	Version	Description	Issued Date
HA382311B	Rev. 01	Initial issue of report	Oct. 20, 2023



1. Attestation of Test Results

Air Interface	Band MHz	T-Rating	Frequency Response	Magnetic Intensity
GSM CMRS Voice	GSM850	T4	Pass	Pass
	GSM1900	T4	Pass	Pass
UMTS CMRS Voice	Band II	T4	Pass	Pass
	Band IV	T4	Pass	Pass
	Band V	T4	Pass	Pass
VoLTE	Band 7	T4	Pass	Pass
	Band 12/17	T4	Pass	Pass
	Band 13	T4	Pass	Pass
	Band 25/2	T4	Pass	Pass
	Band 26/5	T4	Pass	Pass
	Band 30	T4	Pass	Pass
	Band 66/4	T4	Pass	Pass
	Band 71	T4	Pass	Pass
	Band 41/38	T4	Pass	Pass
VoNR	Band 48	T4	Pass	Pass
	n25/ n2	T4	Pass	Pass
	n5	T4	Pass	Pass
	n7	T4	Pass	Pass
	n12	T4	Pass	Pass
	n30	T4	Pass	Pass
	n66	T4	Pass	Pass
	n71	T4	Pass	Pass
n41/ n38	T4	Pass	Pass	
VoWiFi	n77/ n78	T4	Pass	Pass
	2450	T4	Pass	Pass
	5200	T4	Pass	Pass
	5300	T4	Pass	Pass
	5500	T4	Pass	Pass
	5800	T4	Pass	Pass
	U-NII 5	T4	Pass	Pass
Date Tested	2023/9/18 ~ 2023/10/10			

1. The device is compliance with HAC limits specified in guidelines FCC 47CFR §20.19 and ANSI Standard ANSI C63.19.
2. This is partial report for CMRS voice T-Coil testing . VOIP test report will be separately submitted.



2. General Information

Product Feature & Specification	
Applicant Name	OnePlus Technology (Shenzhen) Co., Ltd.
Equipment Name	Mobile Phone
Brand Name	1+,ONEPLUS
Model Name	CPH2583
IMEI Code	IMEI 1: 865154060026076 IMEI 2: 865154060026068
FCC ID	2ABZ2-AA550
HW	11
SW	OxygenOS V14.0
EUT Stage	Production Unit
Frequency Band	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n7: 2500 MHz ~ 2570 MHz 5G NR n12: 699 MHz ~ 716 MHz 5G NR n25: 1850 MHz ~ 1915 MHz 5G NR n30: 2305 MHz ~ 2315 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n71: 663 MHz ~ 698 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41: 2496 MHz ~ 2690 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz WPT: 110.1 kHz ~ 148.5 kHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS/DTM RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM



	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 2.4GHz 802.11be EHT20/EHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 5GHz 802.11be EHT20/EHT40/EHT80/EHT160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11be EHT20/EHT40/EHT80/EHT160/EHT320 Bluetooth BR/EDR/LE WPT: ASK NFC: ASK
--	---

3. Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-SZ	CN1256	421272

4. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19 2011-version
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D02 T-Coil testing v04
- FCC KDB 285076 D03 HAC FAQ v01r06



5. Air Interface and Operating Mode

Air Interface	Band MHz	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction	
GSM	GSM850	VO	Yes	WLAN, BT	CMRS Voice	No	
	GSM1900			WLAN, BT		No	
	EDGE850	VD	Yes	WLAN, BT	Google Meet ⁽¹⁾	No	
	EDGE1900						
UMTS	Band II	VO	Yes	WLAN, BT	CMRS Voice	No	
	Band IV			WLAN, BT		No	
	Band V			WLAN, BT		No	
	HSPA	VD	Yes	WLAN, BT	Google Meet ⁽¹⁾	No	
LTE (FDD)	Band 2	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Meet ⁽¹⁾	No	
	Band 4			5G NR, WLAN, BT		No	
	Band 5			5G NR, WLAN, BT		No	
	Band 7			5G NR, WLAN, BT		No	
	Band 12			5G NR, WLAN, BT		No	
	Band 13			5G NR, WLAN, BT		No	
	Band 17			5G NR, WLAN, BT		No	
	Band 25			5G NR, WLAN, BT		No	
	Band 26			5G NR, WLAN, BT		No	
	Band 30			5G NR, WLAN, BT		No	
	Band 66			5G NR, WLAN, BT		No	
LTE (TDD)	Band 38	VD	Yes	5G NR, WLAN, BT	VoLTE / Google Meet ⁽¹⁾	No	
	Band 41			5G NR, WLAN, BT		No	
	Band 48			5G NR, WLAN, BT		No	
5G NR (FDD)	n2	VD	Yes	LTE, WLAN, BT	VoNR / Google Meet ⁽¹⁾	No	
	n5			LTE, WLAN, BT		No	
	n7			LTE, WLAN, BT		No	
	n12			LTE, WLAN, BT		No	
	n25			LTE, WLAN, BT		No	
	n30			LTE, WLAN, BT		No	
	n66			LTE, WLAN, BT		No	
5G NR (TDD)	n38	VD	Yes	LTE, WLAN, BT	VoNR / Google Meet ⁽¹⁾	No	
	n41			LTE, WLAN, BT		No	
	n77			LTE, WLAN, BT		No	
	n78			LTE, WLAN, BT		No	
Wi-Fi	2450	VD	Yes	GSM,WCDMA,LTE,5G NR, WLAN 5GHz, WLAN 6GHz,BT	VoWiFi ⁽¹⁾ / Google Meet ⁽¹⁾	No	
	5200	VD	Yes	GSM,WCDMA,LTE,5G NR, BT, WLAN 2.4GHz		No	
	5300					No	
	5500					No	
	5800	VD	Yes ⁽³⁾	GSM,WCDMA,LTE,5G NR, BT, WLAN 2.4GHz	VoWiFi ⁽¹⁾ / Google Meet ⁽¹⁾	No	
	U-NII-5					No ⁽³⁾	No
	U-NII-6					No ⁽³⁾	No
	U-NII-7					No ⁽³⁾	No
BT	2450	DT	No	GSM,WCDMA,LTE,5G NR, WLAN 2.4GHz, WLAN 5GHz, WLAN	NA	No	




				6GHz		
Type Transport: VO= Voice only DT= Digital Transport only (no voice) VD= CMRS and IP Voice Service over Digital Transport						
Remark: 1. For protocols not listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation, the average speech level of -20 dBm0 should be used. 2. The device have similar frequency in some LTE/5G NR FR1 Bands: LTE B12/17, B2/25, B5/26, B4/66, B38/41, 5G NR n25/2, 5G NR n41/38, 5G NR n77/78 since the supported frequency spans for the smaller LTE /5G NR FR1 bands are completely cover by the larger LTE/5G NR FR1 bands, therefore, only larger LTE/5G NR FR1 bands were required to be tested for hearing-aid compliance. 3. The UNII-5 was evaluated for operations which are entirely below 6 GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations. The U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations. 4. This is partial report for CMRS voice T-Coil testing . VOIP test report will be separately submitted.						

6. Measurement standards for T-Coil

6.1 Frequency Response


The frequency response of the perpendicular component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz.

Figure 1.1 and Figure 1.2 provide the boundaries as a function of frequency. These response curves are for true field-strength measurements of the T-Coil signal. Thus, the 6 dB/octave probe response has been corrected from the raw readings.

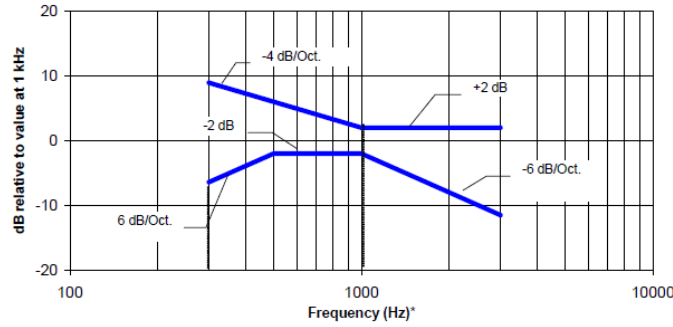

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Fig. 1.1 Magnetic field frequency response for WDs with field strength ≤ -15 dB at 1 kHz

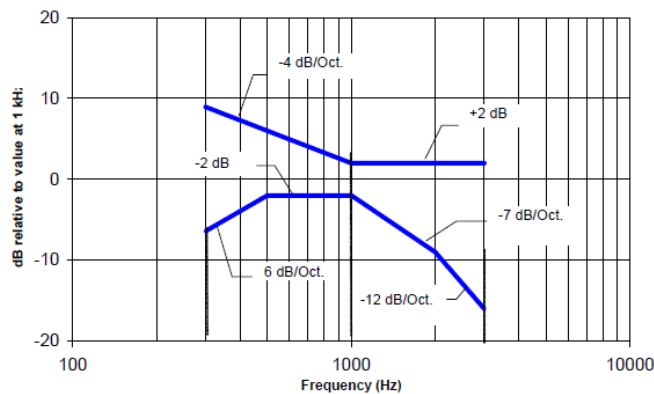

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Fig. 1.2 Magnetic field frequency response for WDs with a field that exceeds -15 dB(A/m) at 1 kHz

6.2 T-Coil Signal Quality Categories

This section provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. A device is assessed beginning by determining the category of the RF environment in the area of the T-Coil source.

The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4. The limitation is given in Table 1. This establishes the RF environment presented by the WD to a hearing aid.

Category	Telephone parameters WD signal quality ((signal + noise) to noise ratio in dB)
Category T1	0 to 10 dB
Category T2	10 to 20 dB
Category T3	20 to 30 dB
Category T4	> 30 dB

Table 1 T-Coil Signal Quality Categories

6.3 Description of EUT Test Position

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ◆ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user’s ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.

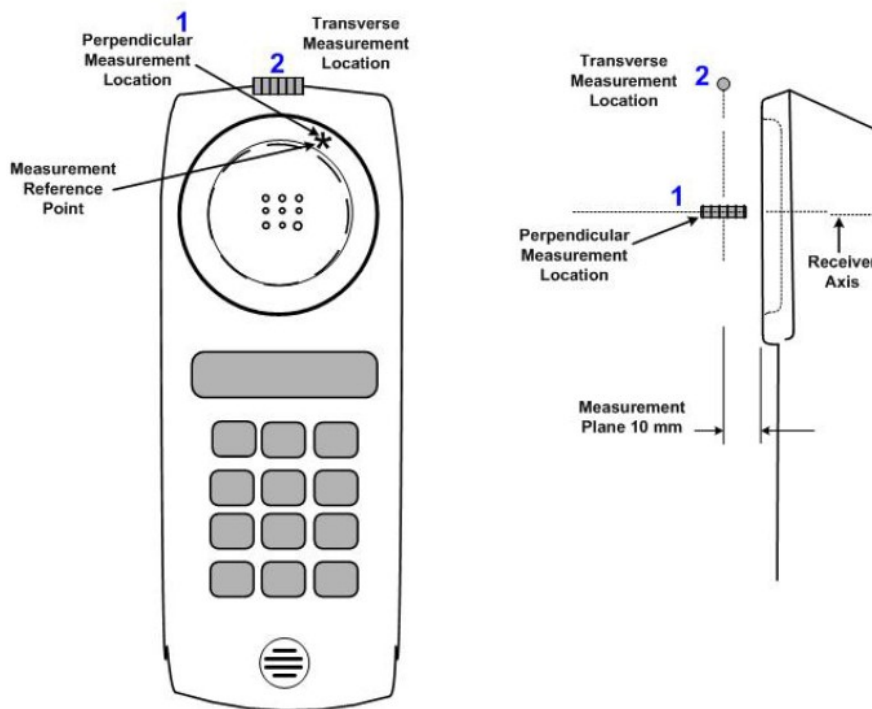


Fig.3 A typical EUT reference and plane for T-Coil measurements



7. T-Coil Test Procedure

Referenced to ANSI C63.19-2011, Section 7.4

This section describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. To assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for each measurement position. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load, there might still be RF leakage from the WD, which can interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be performed with the WD operating on battery power with an appropriate normal speech audio signal input level given in ANSI C63.19-2011 Table 7.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well,

Measurement shall be performed at two locations specified in ANSI C63.19-2011 A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in ANSI C63.19-2011 clause 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in ANSI C63.19-2011 Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at $f = 1$ kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in ANSI C63.19-2011 clause 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used. The same drive level shall be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in ANSI C63.19-2011 clause 7.4.4.1.1 and 7.4.4.2.
- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at f_i) as described in ANSI C63.19-2011 clause 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.
- f. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)
- g. All Measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in ANSI C63.19-2011 clause 7.3.1.
- h. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in ANSI C63.19-2011 clause 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- i. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on ANSI C63.19-2011 Table 8.5.

7.1 Test Flow Chart


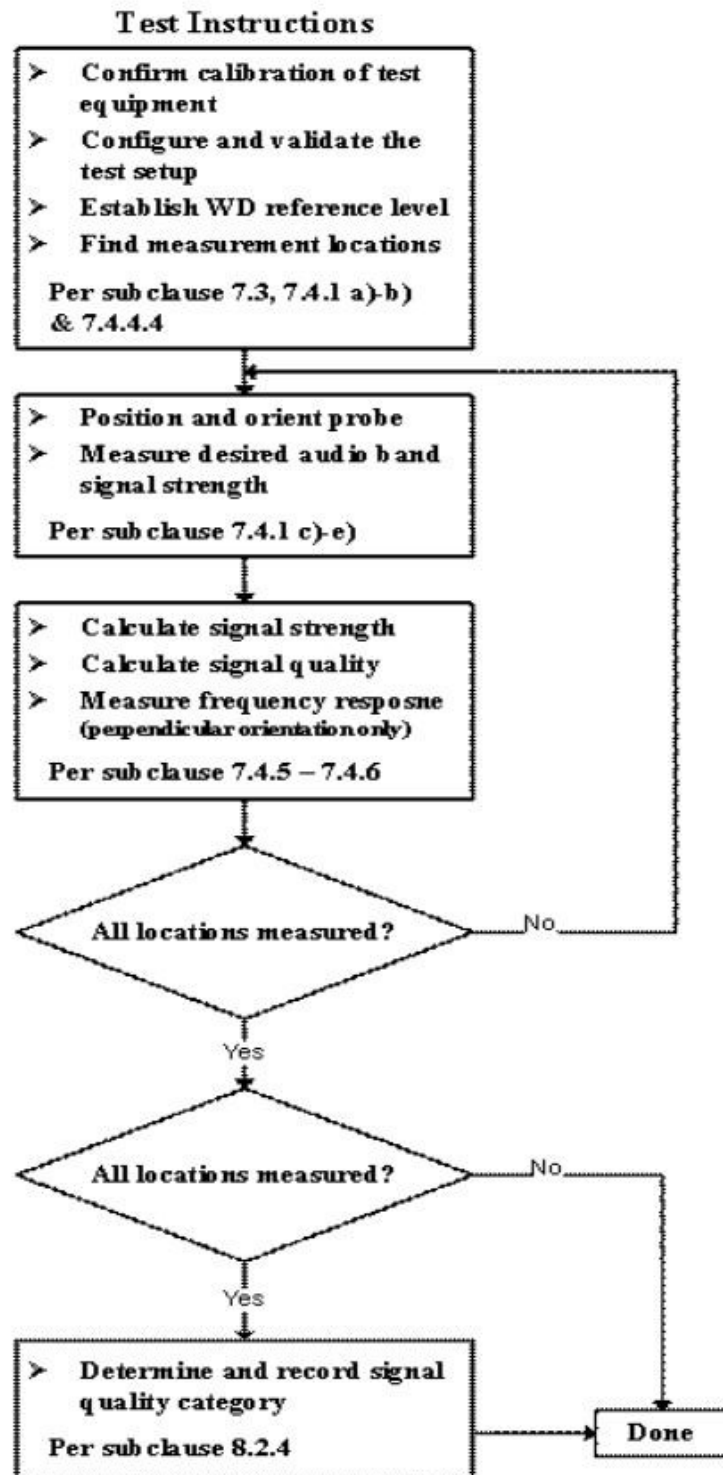


Fig. 2 T-Coil Signal Test flowchart

7.2 Test Setup Diagram for GSM/UMTS /VoLTE/VoWiFi

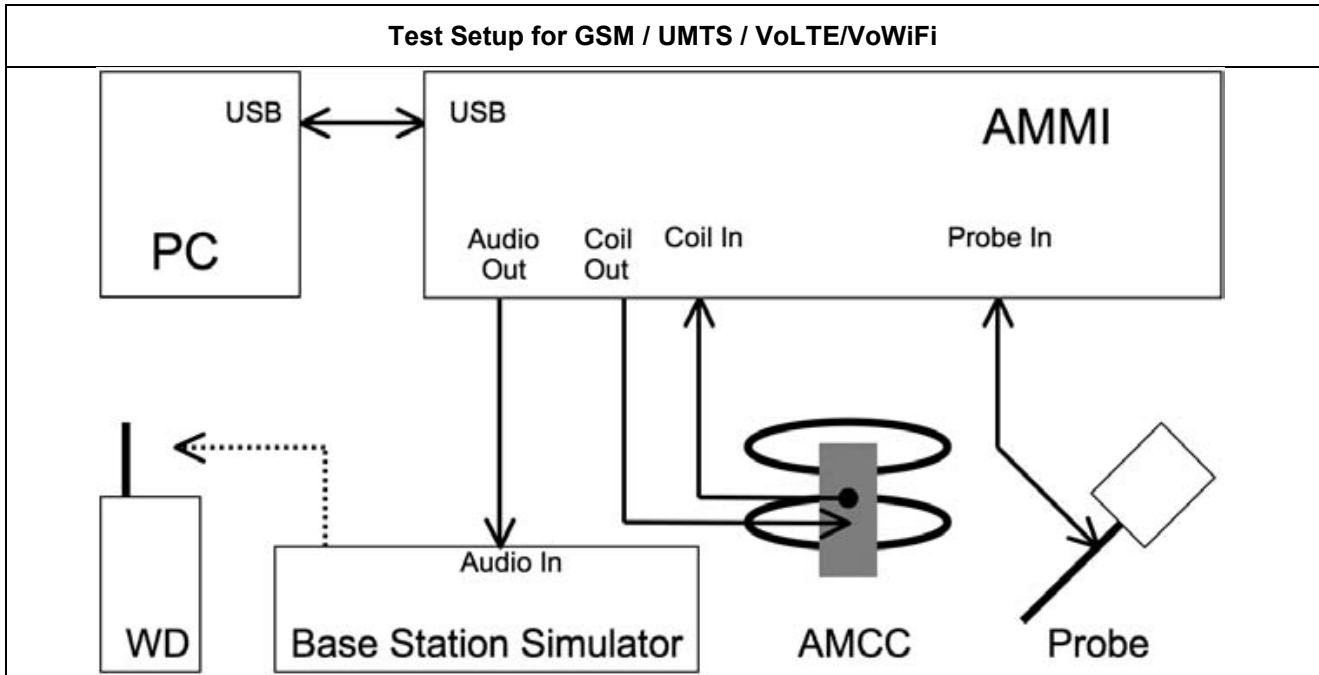

General Note:

1. Define the all applicable input audio level as below according to C63 and KDB 285076 D02v04:
 - GSM input level: -16dBm0
 - UMTS input level: -16dBm0
 - VoLTE input level: -16dBm0
 - VoWiFi input level: -20dBm0
2. For GSM / UMTS test setup and input level, the correct input level definition is via a communication tester CMU200's "Decoder Cal" and "Codec Cal" with audio option B52 and B85 to set the correct audio input levels.
3. CMU200 is able to output 1kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal." configuration, the signal reference is used to adjust the AMMI gain setting to reach -16dBm0 for GSM/UMTS and -18dBm0 for CDMA. CMW500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined
4. Voice over Long-Term Evolution (VoLTE) is a standard for high-speed wireless communication for mobile phones and data terminals — including IoT devices and wearables. It is based on the IP Multimedia Subsystem (IMS) network, with specific profiles for control and media planes of voice service on LTE defined by GSMA in PRD IR.92. This approach results in the voice service (control and media planes) being delivered as data flows within the LTE data bearer. This means that there is no dependency on the legacy circuit-switched voice network to be maintained
5. The test setup used for VoLTE and VoWiFi over IMS is via the callbox of CMW500 for T-coil measurement, The data application unit of the CMW500 was used to simulate the IP multimedia subsystem server. The CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoLTE, -20dBm0 for VoWiFi when the device during the IMS connection.
6. According to KDB 285076 D02, T-Coil testing for VoLTE and VoWiFi requires test instrumentation that can (1) for the system to be able to establish an IP call from/to the handset under test, (2) through an IMS (IP Multimedia Subsystem) and SIP/IP server, (3) to an analog audio adapter containing the permissible set of codecs used by the device under test, and (4) inject the necessary C63.19 test tones at the average speech level for the measurement. The test setup is illustrated in Figure 3.9. The R&S CMW500 was used as system simulator for VoLTE and VoWiFi T-Coil testing. The DAU (Data Application Unit) in CMW500 integrates IMS and SIP/IP server that can establish VoLTE and Wi-Fi calling, and transport the test tones from AMMI (Audio Magnetic Measuring Instrument) to EUT.
7. T-coil performance assessment for 5G FR1 was performed according to KDB 285076 D03 v01r06, Q&A 9, details are illustrated in section 7.3.

<Define the input level for GSM/UMTS >

1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal
2. The below calculation formula is an example and showing how to determine the input level for the device.

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to-RMS [dB]	RMS [dB]	Required gain factor (*)	Gain setting
1kHz sine	---	3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

(*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.

<Example define the input level for GSM/UMTS>

Gain Value	20* log(gain)	AMCC Coil In	Level
(linear)	dB	(dBV RMS)	dBm0
		-2.47	3.14
10	20	-19.85	-14.24
8.17	18.24	-21.61	-16

Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Required Gain Factor	Calculated Gain Setting
1kHz sine	-	3	0	1	8.17
48k_voice_1kHz	1	16.2	-12.7	4.33	35.36
48k_voice_300Hz ~ 3kHz	2	21.6	-18.6	8.48	69.25

<Example define the input level for VoLTE>

Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS))
	3.14	1.5		0.51	
100	5.57		40	2.94	3.09
8.35	-16		18.43		-18.48
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	8.35
48k_voice_1kHz	1	16.2	-12.7	4.33	36.15
48k_voice_300-3000	2	21.6	-18.6	8.48	70.79

<Example define the input level for VoWiFi>

Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS))
	3.14	1.5		0.51	
100	5.57		40	2.94	3.09
5.27	-20		14.43		-22.48
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting
1kHz sine	-	3	0	1	5.27
48k_voice_1kHz	1	16.2	-12.7	4.33	22.81
48k_voice_300-3000	2	21.6	-18.6	8.48	44.67



7.3PAG Reuse section: HAC T-coil measurement procedures for 5G NR

5G VoNR test procedure:

1. According to KDB 285076 D03 Q&A 9 , for 5G Sub 6 calls that use the same protocol, Codec(s) and reference level as VoLTE over LTE (i.e. -16 dBm0).
2. For LTE, establish the ABM1S65G value by using the ABM1LTE magnetic intensity for an LTE call in the same band as the 5G sub6 band under test.
3. For VoNR, establish the ABM1S65G value by using an IP connection for magnetic intensity for a call in the same band as the 5G sub6 band under test
4. Also note the actual ABM2LTE value and establish an ABM2S65G value, using a 5G manufacture test mode over 5G Sub 6 channels for the same band under test.
5. Document in the test report matrix:
 - a. Include columns for both ABM2LTE & ABM2S65G for comparison
 - b. Establish the S+N1/N2 for the rating
 - i. S+N1 = ABM1LTE (step 1) and
 - ii. N2 = ABM2S65G (step 2).
 - iii. Subtract 3 dB from S+N1/N2
 - c. Rating based on (ABM1LTE/ ABM2S65G) -3dB.



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Audio Magnetic 1D Field Probe	AM1DV3	3106	2022/12/13	2023/12/12
SPEAG	Data Acquisition Electronics	DAE4	1386	2023/7/17	2024/7/16
SPEAG	Audio Magnetic Calibration Coil	AMCC	1128	NCR	NCR
SPEAG	Audio Measuring Instrument	AMMI	1137	NCR	NCR
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Base Station(Measure)	CMU200	108440	2022/12/27	2023/12/26
R&S	Base Station(Measure)	CMW500	157651	2023/1/4	2024/1/3
Anymetre	Thermo-Hygrometer	JR593	2018100802	2022/10/19	2023/10/18

Note:

- 1. NCR: "No-Calibration Required"



9. T-Coil testing for CMRS Voice

General Note:

- 1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.
b. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

9.1 GSM Tests Results

<Codec Investigation>

Table with 6 columns: Codec, AMR NB FR, AMR WB FR, GSM EFR (FR V2), Orientation, Band / Channel. It lists results for ABM 1, ABM 2, Signal Quality, and Freq. Response across different orientations and bands.

Remark: According to codec investigation, the worst codec is AMR WB FR

<Air Interface Investigation>

Table with 12 columns: Plot No., Air Interface, Mode, Channel, Probe Position, ABM1 dB (A/m), ABM2 dB (A/m), Signal Quality dB, T Rating, Ambient Noise dB (A/m), Freq. Response Variation dB, Frequency Response. It details probe positions (Axial Z, Transversal Y) for GSM850 and GSM1900.

9.2 UMTS Tests Results
<Codec Investigation>

UMTS AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	5.98	4.73	5.88	5.83	Axial	B5 / 4182
ABM 2 (dBA/m)	-44.23	-45	-36.24	-44.1		
Signal Quality (dB)	50.21	49.73	42.12	49.93		
Freq. Response	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is NB AMR 12.2Kbps

<Air Interface Investigation>

Plot No.	Air Interface	Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
3	WCDMA V	Voice	4182	Axial (Z)	4.52	-44.59	49.11	T4	-54.12	1.85	PASS
				Transversal (Y)	-4.21	-51.73	47.52	T4	-53.82		
4	WCDMA IV	Voice	1413	Axial (Z)	4.81	-43.92	48.73	T4	-54.27	1.8	PASS
				Transversal (Y)	-4.15	-52.03	47.88	T4	-53.81		
5	WCDMA II	Voice	9400	Axial (Z)	4.31	-44.50	48.81	T4	-53.48	1.64	PASS
				Transversal (Y)	-3.89	-52.06	48.17	T4	-53.63		



10. T-Coil testing for CMRS IP Voice

10.1 VoLTE Tests Results

General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
 - a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
 - b. Select LTE FDD/TDD one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration , the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.
 - c. The TDD LTE power class 3 supports uplink-downlink configuration 0 and 6 and power class 2 supports uplink-downlink configuration1 to 5 for this device, an investigation was performed to determine the worst-case uplink-downlink configuration to be used for the testing for the handset.
 - d. For TDD LTE B41 UL CA is operated in power class3, an investigation is selected worst case UL-DL configuration with worst case radio configuration result is used.
 - e. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.

<Codec Investigation>

LTE FDD

VoLTE AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	7.49	6.43	7.48	8.46	Axial	B25 / 20M / 26340
ABM 2 (dBA/m)	-46.04	-45.22	-46.2	-44.19		
Signal Quality (dB)	53.53	51.65	53.68	52.65		
Freq. Response	PASS	PASS	PASS	PASS		

VoLTE EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	8.09	8.23	4.19	5.28	3.38	6.2	Axial	B25 / 20M / 26340
ABM 2 (dBA/m)	-44.47	-44.23	-47.29	-44.86	-44.86	-45.76		
Signal Quality (dB)	52.56	52.46	51.48	50.14	48.24	51.96		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is EVS NB 5.9Kbps



LTE TDD

VoLTE AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	-0.97	4.84	5.79	5.87	Axial	B41 / 20M / 40620
ABM 2 (dBA/m)	-45.3	-42.49	-40.78	-42.27		
Signal Quality (dB)	44.33	47.33	46.57	48.14		
Freq. Response	PASS	PASS	PASS	PASS		

VoLTE EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	6.12	0.84	-1.85	6.39	1.42	6.05	Axial	B41 / 20M / 40620
ABM 2 (dBA/m)	-40.74	-45.15	-42.11	-40.06	-40.89	-40.67		
Signal Quality (dB)	46.86	45.99	40.26	46.45	42.31	46.72		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is EVS WB 5.9Kbps



<Air Interface Investigation>

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	UL-DL Configuration	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	
FDD	LTE B25	20	QPSK	1	0	26340		Axial (Z)	3.38	-44.86	48.24
	LTE B25	20	QPSK	50	0	26340		Axial (Z)	1.55	-47.89	49.44
	LTE B25	20	QPSK	100	0	26340		Axial (Z)	2.75	-47.28	50.03
	LTE B25	20	16QAM	1	0	26340		Axial (Z)	0.68	-47.87	48.55
	LTE B25	20	64QAM	1	0	26340		Axial (Z)	2.93	-48.26	51.19
	LTE B25	20	256QAM	1	0	26340		Axial (Z)	3.14	-46.94	50.08
	LTE B25	15	QPSK	1	0	26340		Axial (Z)	3.88	-46.79	50.67
	LTE B25	10	QPSK	1	0	26340		Axial (Z)	3.64	-47.42	51.06
	LTE B25	5	QPSK	1	0	26340		Axial (Z)	3.48	-48.43	51.91
	LTE B25	3	QPSK	1	0	26340		Axial (Z)	3.27	-47.24	50.51
LTE B25	1.4	QPSK	1	0	26340		Axial (Z)	3.80	-47.93	51.73	
TDD	LTE B41_PC3	20	QPSK	1	0	40620	0	Axial (Z)	-1.85	-42.11	40.26
	LTE B41_PC2	20	QPSK	1	0	40620	1	Axial (Z)	-0.24	-40.66	40.42
	LTE B41_PC2	20	QPSK	1	0	40620	2	Axial (Z)	-1.85	-42.77	40.92
	LTE B41_PC2	20	QPSK	1	0	40620	3	Axial (Z)	-2.92	-44.68	41.76
	LTE B41_PC2	20	QPSK	1	0	40620	4	Axial (Z)	-8.72	-49.07	40.35
	LTE B41_PC2	20	QPSK	1	0	40620	5	Axial (Z)	-1.69	-43.20	41.51
	LTE B41_PC2	20	QPSK	1	0	40620	6	Axial (Z)	-8.26	-48.65	40.39
UL CA B41_PC2	20	QPSK	1	0	39750	0	Axial (Z)	1.04	-39.94	40.98	

Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
6	LTE Band 7	20	QPSK	1	49	21100	Axial (Z)	6.09	-43.74	49.83	T4	-53.18	0.69	PASS
							Transversal (Y)	-6.69	-53.47	46.78	T4	-53.77		
7	LTE Band 12	10	QPSK	1	25	23095	Axial (Z)	8.17	-44.74	52.91	T4	-53.56	1.53	PASS
							Transversal (Y)	-0.95	-48.40	47.45	T4	-54.22		
8	LTE Band 13	10	QPSK	1	25	23230	Axial (Z)	7.77	-44.50	52.27	T4	-53.66	1.02	PASS
							Transversal (Y)	-1.94	-50.54	48.60	T4	-53.65		
9	LTE Band 25	20	QPSK	1	49	26340	Axial (Z)	7.40	-45.63	53.03	T4	-53.74	0.82	PASS
							Transversal (Y)	-1.74	-49.89	48.15	T4	-53.33		
10	LTE Band 26	15	QPSK	1	37	26865	Axial (Z)	0.00	-45.87	45.87	T4	-53.65	1.06	PASS
							Transversal (Y)	-6.78	-50.90	44.12	T4	-53.16		
11	LTE Band 30	10	QPSK	1	25	27710	Axial (Z)	-4.59	-46.97	42.38	T4	-53.89	0.42	PASS
							Transversal (Y)	-6.66	-50.22	43.56	T4	-53.36		
12	LTE Band 66	20	QPSK	1	49	132322	Axial (Z)	2.22	-45.30	47.52	T4	-53.13	1.48	PASS
							Transversal (Y)	-9.08	-52.23	43.15	T4	-54.24		
13	LTE Band 71	20	QPSK	1	49	133297	Axial (Z)	7.68	-44.75	52.43	T4	-53.77	1.04	PASS
							Transversal (Y)	-2.20	-50.65	48.45	T4	-53.78		
14	LTE Band 41	20	QPSK	1	49	40620	Axial (Z)	-1.32	-41.34	40.02	T4	-54.14	0.76	PASS
							Transversal (Y)	-12.06	-49.48	37.42	T4	-54.33		
15	LTE Band 48	20	QPSK	1	49	55830	Axial (Z)	-2.06	-41.80	39.74	T4	-53.31	1.15	PASS
							Transversal (Y)	-9.48	-46.76	37.28	T4	-53.06		

10.1 VoNR evaluation

General Notes:

1. According to KDB 285076 D03, for 5G Sub 6 calls that use the same protocol, Codec(s) and reference level as VoLTE over LTE (i.e. -16 dBm0).
2. For LTE, establish the ABM1S65G value by using the ABM1LTE magnetic intensity for an LTE call in the same band as the 5G sub6 band under test.
3. For VoNR, establish the ABM1S65G value by using an IP connection for magnetic intensity for a call in the same band as the 5G sub6 band under test
4. Also note the actual ABM2LTE value and establish an ABM2S65G value, using a 5G manufacture test mode over 5G Sub 6 channels for the same band under test.
5. Document in the test report matrix:
 - a. Include columns for both ABM2LTE & ABM2S65G for comparison
 - b. Establish the S+N1/N2 for the rating
 - i. S+N1 = ABM1LTE (step 1) and
 - ii. N2 = ABM2S65G (step 2).
 - iii. Subtract 3 dB from S+N1/N2
 - c. Rating based on (ABM1LTE/ ABM2S65G) -3dB.

Plot No.	Air Interface	BW (MHz)	Modulation / Mode	RB Size	RB offset	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
6	LTE Band 7	20	QPSK	1	49	21100	Axial (Z)	6.09	-43.74	49.83	T4	-53.18	0.69	PASS
							Transversal (Y)	-6.69	-53.47	46.78	T4	-53.77		
	FR1 n7	40	QPSK	1	1	507000	Axial (Z)	6.09	-47.11	50.20	T4	-53.44	NA	NA
							Transversal (Y)	-6.69	-54.54	44.85	T4	-53.29		
7	LTE Band 12	10	QPSK	1	25	23095	Axial (Z)	8.17	-44.74	52.91	T4	-53.56	1.53	PASS
							Transversal (Y)	-0.95	-48.40	47.45	T4	-54.22		
	FR1 n12	15	QPSK	1	1	141500	Axial (Z)	8.17	-49.00	54.17	T4	-54.12	NA	NA
							Transversal (Y)	-0.95	-47.50	43.55	T4	-54.21		
9	LTE Band 25	20	QPSK	1	49	26340	Axial (Z)	7.40	-45.63	53.03	T4	-53.74	0.82	PASS
							Transversal (Y)	-1.74	-49.89	48.15	T4	-53.33		
	FR1 n25	40	QPSK	1	1	376500	Axial (Z)	7.40	-47.20	51.60	T4	-54.00	NA	NA
							Transversal (Y)	-1.74	-54.61	49.87	T4	-53.67		
10	LTE Band 26	15	QPSK	1	37	26865	Axial (Z)	0.00	-45.87	45.87	T4	-53.65	1.06	PASS
							Transversal (Y)	-6.78	-50.90	44.12	T4	-53.16		
	FR1 n5	20	QPSK	1	1	167300	Axial (Z)	0.00	-47.31	44.31	T4	-54.13	NA	NA
							Transversal (Y)	-6.78	-53.33	43.55	T4	-53.53		
11	LTE Band 30	10	QPSK	1	25	27710	Axial (Z)	-4.59	-46.97	42.38	T4	-53.89	0.42	PASS
							Transversal (Y)	-6.66	-50.22	43.56	T4	-53.36		
	FR1 n30	10	QPSK	1	1	462000	Axial (Z)	-4.59	-47.18	39.59	T4	-54.02	NA	NA
							Transversal (Y)	-6.66	-54.09	44.43	T4	-53.94		
12	LTE Band 66	20	QPSK	1	49	132322	Axial (Z)	2.22	-45.30	47.52	T4	-53.13	1.48	PASS
							Transversal (Y)	-9.08	-52.23	43.15	T4	-54.24		
	FR1 n66	40	QPSK	1	1	349000	Axial (Z)	2.22	-47.44	46.66	T4	-53.99	NA	NA
							Transversal (Y)	-9.08	-53.96	41.88	T4	-54.05		
13	LTE Band 71	20	QPSK	1	49	133297	Axial (Z)	7.68	-44.75	52.43	T4	-53.77	1.04	PASS
							Transversal (Y)	-2.20	-50.65	48.45	T4	-53.78		
	FR1 n71	20	QPSK	1	1	136100	Axial (Z)	7.68	-47.57	52.25	T4	-54.00	NA	NA
							Transversal (Y)	-2.20	-53.97	48.77	T4	-54.00		
14	LTE Band 41	20	QPSK	1	49	40620	Axial (Z)	-1.32	-41.34	40.02	T4	-54.14	0.76	PASS
							Transversal (Y)	-12.06	-49.48	37.42	T4	-54.33		
	FR1 n41	100	QPSK	1	1	518598	Axial (Z)	-1.32	-47.48	43.16	T4	-53.59	NA	NA



							Transversal (Y)	-12.06	-54.06	39.00	T4	-54.17		
15	LTE Band 48	20	QPSK	1	49	55830	Axial (Z)	-2.06	-41.80	39.74	T4	-53.31	1.15	PASS
							Transversal (Y)	-9.48	-46.76	37.28	T4	-53.06		
	FR1 n77	100	QPSK	1	1	633332	Axial (Z)	-2.06	-48.95	43.89	T4	-54.23	NA	NA
							Transversal (Y)	-9.48	-47.07	34.59	T4	-53.56		

10.2 VoWiFi Tests Results

General Note:

1. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters (ABM1, ABM2, S+N/N, frequency response) for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.
2. Air Interface Investigation:
 - a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.
 - b. Select WLAN 2.4GHz and WLAN 5GHz one frequency band to do measurement at the worst SNR position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration , the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.
 - c. According to the ANSI C63.19 2011 section 7.3.2, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil rating.
3. Due to equipment limitation, ABM1 and frequency response measurement were not possible. Therefore, the each Bandwidth ABM1 measurement from WIFI 2.4GHz or 5GHz 802.11ax testing for Axial and Radial were combined WIFI 2.4GHz or 5GHz 802.11be corresponding Bandwidth ABM2 measurement to obtain SNNR values.
 - Establish an ABM2_802.11be value, using a WIFI manufacture test mode over 802.11be channels for the same band under test.
 - The rating of show in the report is based on (ABM1_802.11ax/ ABM2_802.11be) -3dB.
 - For detailed 802.11be investigation guidance was confirm via a KDB inquiry.

<Codec Investigation>

VoWiFi AMR Codec						
Codec	NB AMR 4.75Kbps	WB AMR 6.60Kbps	NB AMR 12.2Kbps	WB AMR 23.85Kbps	Orientation	Band / Channel
ABM 1 (dBA/m)	7.07	6.4	7.32	2.82	Axial	2.4GHz WLAN / 6
ABM 2 (dBA/m)	-41.91	-43.42	-42.95	-44.52		
Signal Quality (dB)	48.98	49.82	50.27	47.34		
Freq. Response	PASS	PASS	PASS	PASS		



VoWiFi EVS Codec								
Codec	EVS SWB 9.6Kbps	EVS SWB 128Kbps	EVS WB 5.9Kbps	EVS WB 128Kbps	EVS NB 5.9Kbps	EVS NB 24.4Kbps	Orientation	Band / BW / Channel
ABM 1 (dBA/m)	7.58	7.66	-2.3	7.85	4.61	7.94	Axial	2.4GHz WLAN / 6
ABM 2 (dBA/m)	-43.67	-44.75	-44.13	-44.69	-46.38	-45.8		
Signal Quality (dB)	51.25	52.41	41.83	52.54	50.99	53.74		
Freq. Response	PASS	PASS	PASS	PASS	PASS	PASS		

Remark: According to codec investigation, the worst codec is EVS WB 5.9Kbps

<Air Interface Investigation>

Frequency Bands	Modulation	Bandwidth	Data Rate	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	Signal Quality -3 dB
WLAN 2.4GHz	802.11b	20	1M	6	Axial (Z)	-2.30	-44.13	41.83	-
	802.11b	20	11M	6	Axial (Z)	2.83	-44.41	47.24	-
	802.11g	20	6M	6	Axial (Z)	3.36	-44.46	47.82	-
	802.11g	20	54M	6	Axial (Z)	3.30	-43.18	46.48	-
	802.11n-HT20	20	MCS0	6	Axial (Z)	3.20	-43.94	47.14	-
	802.11n-HT20	20	MCS7	6	Axial (Z)	3.31	-44.50	47.81	-
	802.11n-HT40	40	MCS0	6	Axial (Z)	1.07	-41.34	42.41	-
	802.11n-HT40	40	MCS7	6	Axial (Z)	4.28	-43.28	47.56	-
	802.11ac-VHT20	20	MCS0	6	Axial (Z)	4.65	-38.11	42.76	-
	802.11ac-VHT20	20	MCS8	6	Axial (Z)	5.15	-44.50	49.65	-
	802.11ac-VHT40	40	MCS0	6	Axial (Z)	5.10	-44.23	49.33	-
	802.11ac-VHT40	40	MCS8	6	Axial (Z)	7.73	-45.97	53.70	-
	802.11ax-HE20	20	MCS0	6	Axial (Z)	4.91	-43.96	48.87	-
	802.11ax-HE20	20	MCS11	6	Axial (Z)	5.20	-43.89	49.09	-
	802.11ax-HE40	40	MCS0	6	Axial (Z)	4.92	-44.05	48.97	-
	802.11ax-HE40	40	MCS11	6	Axial (Z)	4.87	-38.78	43.65	-
802.11be-EHT20	20	MCS0	6	Axial (Z)	4.91	-46.61	51.52	48.52	
802.11be-EHT20	20	MCS11	6	Axial (Z)	5.20	-44.19	49.39	46.39	
802.11be-EHT40	40	MCS0	6	Axial (Z)	4.92	-46.62	51.54	48.54	
802.11be-EHT40	40	MCS11	6	Axial (Z)	4.87	-44.35	49.22	46.22	
WLAN 5GHz	802.11a	20	6M	40	Axial (Z)	5.10	-43.71	48.81	-
	802.11a	20	54M	40	Axial (Z)	4.98	-44.44	49.42	-
	802.11an-HT20	20	MCS0	40	Axial (Z)	5.63	-44.36	49.99	-
	802.11an-HT20	20	MCS7	40	Axial (Z)	5.22	-44.28	49.50	-
	802.11an-HT40	40	MCS0	38	Axial (Z)	5.28	-44.47	49.75	-
	802.11an-HT40	40	MCS7	38	Axial (Z)	4.38	-45.29	49.67	-
	802.11ac-VHT20	20	MCS0	40	Axial (Z)	0.68	-42.95	43.63	-
	802.11ac-VHT20	20	MCS8	40	Axial (Z)	2.71	-44.32	47.03	-
	802.11ac-VHT40	40	MCS0	38	Axial (Z)	5.58	-45.19	50.77	-
	802.11ac-VHT40	40	MCS8	38	Axial (Z)	2.76	-44.34	47.10	-
	802.11ac-VHT80	80	MCS0	42	Axial (Z)	3.29	-42.20	45.49	-
	802.11ac-VHT80	80	MCS8	42	Axial (Z)	2.32	-44.46	46.78	-
	802.11ac-VHT160	160	MCS0	50	Axial (Z)	6.47	-44.26	50.73	-
	802.11ac-VHT160	160	MCS8	50	Axial (Z)	6.44	-44.42	50.86	-
802.11ax-HE20	20	MCS0	40	Axial (Z)	2.44	-42.31	44.75	-	
802.11ax-HE20	20	MCS11	40	Axial (Z)	3.57	-44.23	47.80	-	



802.11ax-HE40	40	MCS0	38	Axial (Z)	3.46	-41.24	44.70	-
802.11ax-HE40	40	MCS11	38	Axial (Z)	3.82	-43.58	47.40	-
802.11ax-HE80	80	MCS0	42	Axial (Z)	8.06	-44.11	52.17	-
802.11ax-HE80	80	MCS11	42	Axial (Z)	7.68	-44.91	52.59	-
802.11ax-HE160	160	MCS0	50	Axial (Z)	7.76	-44.75	52.51	-
802.11ax-HE160	160	MCS11	50	Axial (Z)	7.95	-45.11	53.06	-
802.11be-EHT20	20	MCS0	40	Axial (Z)	2.44	-47.08	49.52	46.52
802.11be-EHT20	20	MCS11	40	Axial (Z)	3.57	-45.02	48.59	45.59
802.11be-EHT40	40	MCS0	38	Axial (Z)	3.46	-47.13	50.59	47.59
802.11be-EHT40	40	MCS11	38	Axial (Z)	3.82	-45.19	49.01	46.01
802.11be-EHT80	80	MCS0	42	Axial (Z)	8.06	-46.58	54.64	51.64
802.11be-EHT80	80	MCS11	42	Axial (Z)	7.68	-43.47	51.15	48.15
802.11be-EHT160	160	MCS0	50	Axial (Z)	7.76	-46.43	54.19	51.19
802.11be-EHT160	160	MCS11	50	Axial (Z)	7.95	-42.19	50.14	47.14

Plot No.	Air Interface	BW (MHz)	Modulation / Mode	Channel	Probe Position	ABM1 dB (A/m)	ABM2 dB (A/m)	Signal Quality dB	T Rating	Ambient Noise dB (A/m)	Freq. Response Variation dB	Frequency Response
16	WLAN 2.4G	20	802.11b-1Mbps	6	Axial (Z)	0.23	-45.92	46.15	T4	-53.65	1.45	Pass
					Transversal (Y)	-9.50	-47.28	37.78	T4	-53.56		
17	WLAN 5.2G	20	802.11ac-VHT20	40	Axial (Z)	9.62	-43.21	52.83	T4	-53.45	1.02	Pass
					Transversal (Y)	0.47	-47.65	48.12	T4	-54.15		
18	WLAN 5.3G	20	802.11ac-VHT20	56	Axial (Z)	4.36	-45.51	49.87	T4	-54.23	0.35	Pass
					Transversal (Y)	-7.49	-51.13	43.64	T4	-53.62		
19	WLAN 5.5G	20	802.11ac-VHT20	116	Axial (Z)	7.33	-39.96	47.29	T4	-53.45	1.26	Pass
					Transversal (Y)	-0.21	-43.69	43.48	T4	-54.25		
20	WLAN 5.8G	20	802.11ac-VHT20	157	Axial (Z)	4.59	-43.32	47.91	T4	-53.45	1.17	Pass
					Transversal (Y)	-4.72	-46.89	42.17	T4	-54.17		
21	WLAN6GHz	20	802.11ax-HE20	1	Axial (Z)	3.88	-43.05	46.93	T4	-50.39	1.48	Pass
					Transversal (Y)	-3.76	-46.72	42.96	T4	-50.22		

Remark:

1. Phone Condition: Mute on; Backlight off; Max Volume
2. The detail frequency response results please refer to appendix A.

Test Engineer : Hank Huang, Kevin Xu, David Dai, Bin He

11. Uncertainty Assessment

The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance. The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASy uncertainty Budget is showed in Table 8.2. The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) ABM1	(Ci) ABM2	Standard Uncertainty (ABM1) (±%)	Standard Uncertainty (ABM2) (±%)
Probe Sensitivity							
Reference Level	3.0	N	1	1	1	3.0	3.0
AMCC Geometry	0.4	R	1.732	1	1	0.2	0.2
AMCC Current	1.0	R	1.732	1	1	0.6	0.6
Probe Positioning during Calibr.	0.1	R	1.732	1	1	0.1	0.1
Noise Contribution	0.7	R	1.732	0.014	1	0.0	0.4
Frequency Slope	5.9	R	1.732	0.1	1	0.3	3.4
Probe System							
Repeatability / Drift	1.0	R	1.732	1	1	0.6	0.6
Linearity / Dynamic Range	0.6	R	1.732	1	1	0.3	0.3
Acoustic Noise	1.0	R	1.732	0.1	1	0.1	0.6
Probe Angle	2.3	R	1.732	1	1	1.3	1.3
Spectral Processing	0.9	R	1.732	1	1	0.5	0.5
Integration Time	0.6	N	1	1	5	0.6	3.0
Field Distribution	0.2	R	1.732	1	1	0.1	0.1
Test Signal							
Ref. Signal Spectral Response	0.6	R	1.732	0	1	0.0	0.3
Positioning							
Probe Positioning	1.9	R	1.732	1	1	1.1	1.1
Phantom Thickness	0.9	R	1.732	1	1	0.5	0.5
DUT Positioning	1.9	R	1.732	1	1	1.1	1.1
External Contributions							
RF Interference	0.0	R	1.732	1	0.3	0.0	0.0
Test Signal Variation	2.0	R	1.732	1	1	1.2	1.2
Combined Std. Uncertainty						4.0%	6.1%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						8.1%	12.2%

Table 8.2 Uncertainty Budget of audio band magnetic measurement



12. References

- [1] ANSI C63.19-2011, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", 27 May 2011.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", September 29, 2023
- [3] FCC KDB 285076 D02 v04, "Guidance for performing T-Coil tests for air interfaces supporting voice over IP (e.g., LTE and WiFi) to support CMRS based telephone services", Feb. 23, 2022
- [4] FCC KDB 285076 D03v01r06, "Hearing aid compatibility frequently asked questions", July 20, 2022
- [5] SPEAG DASY System Handbook

-----THE END-----