

Channel 134

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17930.150 | 54.69 | -29.59 | 45.95 | 38.33 | 74.00 | 19.31 | H |
| 17971.950 | 54.65 | -29.59 | 45.95 | 38.29 | 74.00 | 19.35 | H |
| 14606.500 | 50.57 | -30.67 | 41.70 | 39.54 | 68.20 | 17.63 | V |
| 14680.750 | 50.52 | -30.04 | 41.50 | 39.06 | 68.20 | 17.68 | H |
| 5813.573 | 52.26 | -27.65 | 34.10 | 45.81 | 68.20 | 15.94 | H |
| 5815.340 | 52.25 | -27.65 | 34.10 | 45.80 | 68.20 | 15.95 | H |

802.11ax-HT80 Partial RU

Channel 42

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17955.450 | 54.44 | -29.59 | 45.95 | 38.08 | 74.00 | 19.56 | H |
| 17995.600 | 54.38 | -29.59 | 45.95 | 38.02 | 74.00 | 19.62 | H |
| 14517.950 | 50.30 | -30.55 | 41.90 | 38.95 | 68.20 | 17.90 | V |
| 14515.200 | 50.16 | -30.55 | 41.90 | 38.81 | 68.20 | 18.04 | V |
| 5035.480 | 51.65 | -27.96 | 33.70 | 45.91 | 74.00 | 22.35 | V |
| 5140.980 | 51.47 | -27.79 | 34.00 | 45.26 | 74.00 | 22.53 | V |

Channel 58

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17923.550 | 54.14 | -29.59 | 45.95 | 37.78 | 74.00 | 19.86 | H |
| 17990.100 | 53.99 | -29.59 | 45.95 | 37.63 | 74.00 | 20.01 | V |
| 14180.250 | 50.07 | -30.42 | 41.70 | 38.79 | 68.20 | 18.13 | V |
| 14185.200 | 50.03 | -30.42 | 41.70 | 38.75 | 68.20 | 18.17 | H |
| 5350.080 | 52.32 | -27.82 | 34.20 | 45.94 | 74.00 | 21.68 | V |
| 5350.096 | 52.23 | -27.82 | 34.20 | 45.85 | 74.00 | 21.77 | H |

Channel 106

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17956.550 | 54.38 | -29.59 | 45.95 | 38.02 | 74.00 | 19.62 | H |
| 17970.300 | 54.19 | -29.59 | 45.95 | 37.83 | 74.00 | 19.81 | V |
| 14201.150 | 50.89 | -30.42 | 41.70 | 39.61 | 68.20 | 17.31 | V |
| 14588.350 | 50.81 | -29.14 | 41.90 | 38.05 | 68.20 | 17.39 | V |
| 5452.555 | 53.04 | -27.49 | 34.20 | 46.33 | 74.00 | 20.96 | H |
| 5469.925 | 54.01 | -27.49 | 34.20 | 47.30 | 68.20 | 14.19 | V |

Channel 122

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17869.100 | 55.27 | -29.59 | 45.95 | 38.91 | 74.00 | 18.73 | H |
| 17981.850 | 54.91 | -29.59 | 45.95 | 38.55 | 74.00 | 19.09 | H |
| 14585.050 | 50.98 | -29.14 | 41.90 | 38.22 | 68.20 | 17.22 | V |
| 14685.700 | 50.55 | -30.04 | 41.50 | 39.09 | 68.20 | 17.65 | H |
| 5791.225 | 52.26 | -27.21 | 34.00 | 45.47 | 68.20 | 15.94 | H |
| 5809.740 | 52.21 | -27.65 | 34.10 | 45.76 | 68.20 | 15.99 | H |

802.11ax-HT160 Partial RU

Channel 50

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17975.250 | 54.72 | -29.59 | 45.95 | 38.36 | 74.00 | 19.28 | V |
| 17976.900 | 54.38 | -29.59 | 45.95 | 38.02 | 74.00 | 19.62 | V |
| 14689.000 | 50.27 | -30.04 | 41.50 | 38.81 | 68.20 | 17.93 | V |
| 14591.650 | 49.93 | -29.14 | 41.90 | 37.17 | 68.20 | 18.27 | V |
| 5149.360 | 59.36 | -28.00 | 34.00 | 53.36 | 74.00 | 14.64 | H |
| 5148.240 | 58.54 | -27.79 | 34.00 | 52.33 | 74.00 | 15.46 | V |

Channel 114

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17904.850 | 54.56 | -29.59 | 45.95 | 38.20 | 74.00 | 19.44 | H |
| 17970.850 | 54.30 | -29.59 | 45.95 | 37.94 | 74.00 | 19.70 | V |
| 14693.950 | 51.15 | -30.04 | 41.50 | 39.69 | 68.20 | 17.05 | V |
| 14571.300 | 50.77 | -29.14 | 41.90 | 38.01 | 68.20 | 17.43 | V |
| 5458.900 | 57.23 | -27.49 | 34.20 | 50.52 | 74.00 | 16.77 | V |
| 5468.770 | 60.38 | -27.49 | 34.20 | 53.67 | 68.20 | 7.82 | V |

802.11be-HT20 Partial RU

Channel 36

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17973.050 | 54.69 | -29.59 | 45.95 | 38.33 | 74.00 | 19.31 | H |
| 17951.600 | 54.64 | -29.59 | 45.95 | 38.28 | 74.00 | 19.36 | V |
| 14703.300 | 50.26 | -30.13 | 41.35 | 39.04 | 68.20 | 17.94 | V |
| 14601.000 | 50.11 | -29.14 | 41.90 | 37.35 | 68.20 | 18.09 | V |
| 5135.860 | 51.63 | -27.79 | 34.00 | 45.42 | 74.00 | 22.37 | V |
| 5085.140 | 51.62 | -28.19 | 33.80 | 46.01 | 74.00 | 22.38 | V |

Channel 40

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17946.100 | 54.93 | -29.59 | 45.95 | 38.57 | 74.00 | 19.07 | V |
| 17946.650 | 54.47 | -29.59 | 45.95 | 38.11 | 74.00 | 19.53 | V |
| 14696.150 | 50.77 | -30.04 | 41.50 | 39.31 | 68.20 | 17.43 | H |
| 14702.200 | 50.68 | -30.04 | 41.50 | 39.22 | 68.20 | 17.52 | H |
| 11880.700 | 46.87 | -32.73 | 39.15 | 40.45 | 74.00 | 27.13 | H |
| 11771.800 | 46.81 | -32.71 | 39.20 | 40.32 | 74.00 | 27.19 | V |

Channel 48

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17975.800 | 55.33 | -29.59 | 45.95 | 38.97 | 74.00 | 18.67 | V |
| 17961.500 | 55.27 | -29.59 | 45.95 | 38.91 | 74.00 | 18.73 | H |
| 14673.050 | 51.34 | -30.04 | 41.50 | 39.88 | 68.20 | 16.86 | V |
| 14581.750 | 50.70 | -29.14 | 41.90 | 37.94 | 68.20 | 17.50 | H |
| 11875.750 | 46.50 | -32.73 | 39.15 | 40.08 | 74.00 | 27.50 | V |
| 11779.500 | 46.38 | -32.71 | 39.20 | 39.89 | 74.00 | 27.62 | H |

Channel 52

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17981.850 | 54.69 | -29.59 | 45.95 | 38.33 | 74.00 | 19.31 | V |
| 17973.050 | 54.31 | -29.59 | 45.95 | 37.95 | 74.00 | 19.69 | H |
| 14599.350 | 50.97 | -29.14 | 41.90 | 38.21 | 68.20 | 17.23 | H |
| 14600.450 | 50.18 | -29.14 | 41.90 | 37.42 | 68.20 | 18.02 | V |
| 11816.900 | 46.55 | -32.09 | 39.20 | 39.44 | 74.00 | 27.45 | V |
| 11783.350 | 46.52 | -32.09 | 39.20 | 39.41 | 74.00 | 27.48 | V |

Channel 56

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17905.400 | 54.34 | -29.59 | 45.95 | 37.98 | 74.00 | 19.66 | H |
| 17969.750 | 54.31 | -29.59 | 45.95 | 37.95 | 74.00 | 19.69 | H |
| 14578.450 | 50.40 | -29.14 | 41.90 | 37.64 | 68.20 | 17.80 | V |
| 14196.750 | 50.29 | -30.42 | 41.70 | 39.01 | 68.20 | 17.91 | H |
| 11825.150 | 46.61 | -32.09 | 39.20 | 39.50 | 74.00 | 27.39 | V |
| 11873.550 | 46.20 | -32.73 | 39.15 | 39.78 | 74.00 | 27.80 | H |

Channel 64

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17892.200 | 54.03 | -29.59 | 45.95 | 37.67 | 74.00 | 19.97 | H |
| 17993.950 | 53.98 | -29.59 | 45.95 | 37.62 | 74.00 | 20.02 | V |
| 14519.600 | 50.18 | -30.55 | 41.90 | 38.83 | 68.20 | 18.02 | V |
| 14712.100 | 50.01 | -30.13 | 41.35 | 38.79 | 68.20 | 18.19 | V |
| 5423.184 | 52.24 | -27.94 | 34.30 | 45.88 | 74.00 | 21.76 | H |
| 5393.392 | 52.12 | -27.82 | 34.20 | 45.74 | 74.00 | 21.88 | V |

Channel 100

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17995.050 | 54.07 | -29.59 | 45.95 | 37.71 | 74.00 | 19.93 | V |
| 17911.450 | 54.01 | -29.59 | 45.95 | 37.65 | 74.00 | 19.99 | V |
| 14590.550 | 51.24 | -29.14 | 41.90 | 38.48 | 68.20 | 16.96 | H |
| 14612.000 | 50.52 | -30.67 | 41.70 | 39.49 | 68.20 | 17.68 | V |
| 5358.100 | 52.48 | -27.82 | 34.20 | 46.10 | 74.00 | 21.52 | H |
| 5465.170 | 51.88 | -27.49 | 34.20 | 45.17 | 68.20 | 16.32 | H |

Channel 120

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17991.200 | 54.15 | -29.59 | 45.95 | 37.79 | 74.00 | 19.85 | V |
| 17994.500 | 53.93 | -29.59 | 45.95 | 37.57 | 74.00 | 20.07 | V |
| 14708.800 | 50.99 | -30.13 | 41.35 | 39.77 | 68.20 | 17.21 | V |
| 14581.750 | 50.47 | -29.14 | 41.90 | 37.71 | 68.20 | 17.73 | V |
| 11774.000 | 46.75 | -32.71 | 39.20 | 40.26 | 74.00 | 27.25 | V |
| 11878.500 | 46.66 | -32.73 | 39.15 | 40.24 | 74.00 | 27.34 | V |

Channel 140

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17967.000 | 54.82 | -29.59 | 45.95 | 38.46 | 74.00 | 19.18 | H |
| 17970.850 | 54.48 | -29.59 | 45.95 | 38.12 | 74.00 | 19.52 | H |
| 14626.300 | 50.63 | -30.67 | 41.70 | 39.60 | 68.20 | 17.57 | V |
| 14697.800 | 50.52 | -30.04 | 41.50 | 39.06 | 68.20 | 17.68 | V |
| 5772.413 | 52.16 | -27.21 | 34.00 | 45.37 | 68.20 | 16.04 | H |
| 5795.547 | 52.10 | -27.65 | 34.10 | 45.65 | 68.20 | 16.10 | H |

802.11be-HT40 Partial RU

Channel 38

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17963.700 | 54.10 | -29.59 | 45.95 | 37.74 | 74.00 | 19.90 | H |
| 17969.200 | 53.83 | -29.59 | 45.95 | 37.47 | 74.00 | 20.17 | V |
| 14610.350 | 50.52 | -30.67 | 41.70 | 39.49 | 68.20 | 17.68 | H |
| 14552.600 | 50.48 | -30.55 | 41.90 | 39.13 | 68.20 | 17.72 | H |
| 5144.020 | 52.05 | -27.79 | 34.00 | 45.84 | 74.00 | 21.95 | V |
| 5130.380 | 51.62 | -27.79 | 34.00 | 45.41 | 74.00 | 22.38 | V |

Channel 46

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17952.700 | 54.98 | -29.59 | 45.95 | 38.62 | 74.00 | 19.02 | H |
| 17921.900 | 54.76 | -29.59 | 45.95 | 38.40 | 74.00 | 19.24 | H |
| 14583.950 | 50.80 | -29.14 | 41.90 | 38.04 | 68.20 | 17.40 | V |
| 14520.700 | 50.47 | -30.55 | 41.90 | 39.12 | 68.20 | 17.73 | V |
| 11853.200 | 46.91 | -32.73 | 39.15 | 40.49 | 74.00 | 27.09 | V |
| 11830.650 | 46.46 | -32.09 | 39.20 | 39.35 | 74.00 | 27.54 | V |

Channel 54

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17904.850 | 54.06 | -29.59 | 45.95 | 37.70 | 74.00 | 19.94 | V |
| 17973.600 | 53.97 | -29.59 | 45.95 | 37.61 | 74.00 | 20.03 | H |
| 14077.950 | 50.24 | -30.20 | 41.70 | 38.74 | 68.20 | 17.96 | V |
| 14588.350 | 50.17 | -29.14 | 41.90 | 37.41 | 68.20 | 18.03 | V |
| 11793.250 | 46.82 | -32.09 | 39.20 | 39.71 | 74.00 | 27.18 | V |
| 11611.750 | 46.24 | -32.72 | 39.20 | 39.76 | 74.00 | 27.76 | V |

Channel 62

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17965.900 | 54.61 | -29.59 | 45.95 | 38.25 | 74.00 | 19.39 | H |
| 17891.650 | 54.25 | -29.59 | 45.95 | 37.89 | 74.00 | 19.75 | V |
| 14604.300 | 50.58 | -30.67 | 41.70 | 39.55 | 68.20 | 17.62 | V |
| 14709.900 | 50.48 | -30.13 | 41.35 | 39.26 | 68.20 | 17.72 | V |
| 5401.712 | 52.30 | -27.94 | 34.30 | 45.94 | 74.00 | 21.70 | H |
| 5436.512 | 52.10 | -27.94 | 34.30 | 45.74 | 74.00 | 21.90 | H |

Channel 102

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17985.150 | 54.46 | -29.59 | 45.95 | 38.10 | 74.00 | 19.54 | H |
| 17903.750 | 54.44 | -29.59 | 45.95 | 38.08 | 74.00 | 19.56 | V |
| 14589.450 | 51.12 | -29.14 | 41.90 | 38.36 | 68.20 | 17.08 | V |
| 14592.200 | 50.79 | -29.14 | 41.90 | 38.03 | 68.20 | 17.41 | V |
| 5414.545 | 52.44 | -27.94 | 34.30 | 46.08 | 74.00 | 21.56 | H |
| 5463.460 | 52.19 | -27.49 | 34.20 | 45.48 | 68.20 | 16.01 | H |

Channel 118

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17937.850 | 55.11 | -29.59 | 45.95 | 38.75 | 74.00 | 18.89 | V |
| 17993.950 | 54.55 | -29.59 | 45.95 | 38.19 | 74.00 | 19.45 | V |
| 14576.250 | 50.81 | -29.14 | 41.90 | 38.05 | 68.20 | 17.39 | H |
| 14702.750 | 50.55 | -30.04 | 41.50 | 39.09 | 68.20 | 17.65 | H |
| 11816.900 | 47.12 | -32.09 | 39.20 | 40.01 | 74.00 | 26.88 | H |
| 11853.750 | 46.72 | -32.73 | 39.15 | 40.30 | 74.00 | 27.28 | H |

Channel 134

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17967.000 | 54.45 | -29.59 | 45.95 | 38.09 | 74.00 | 19.55 | H |
| 17979.650 | 54.35 | -29.59 | 45.95 | 37.99 | 74.00 | 19.65 | V |
| 14582.850 | 51.04 | -29.14 | 41.90 | 38.28 | 68.20 | 17.16 | H |
| 14608.700 | 50.51 | -30.67 | 41.70 | 39.48 | 68.20 | 17.69 | V |
| 5796.475 | 52.34 | -27.65 | 34.10 | 45.89 | 68.20 | 15.86 | H |
| 5793.745 | 52.27 | -27.65 | 34.10 | 45.82 | 68.20 | 15.93 | H |

802.11be-HT80 Partial RU

Channel 42

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17957.650 | 54.40 | -29.59 | 45.95 | 38.04 | 74.00 | 19.60 | H |
| 17958.750 | 54.30 | -29.59 | 45.95 | 37.94 | 74.00 | 19.70 | H |
| 14690.650 | 51.71 | -30.04 | 41.50 | 40.25 | 68.20 | 16.49 | H |
| 14699.450 | 51.19 | -30.04 | 41.50 | 39.73 | 68.20 | 17.01 | V |
| 5022.300 | 52.03 | -27.96 | 33.70 | 46.29 | 74.00 | 21.97 | V |
| 5097.900 | 51.51 | -28.19 | 33.80 | 45.90 | 74.00 | 22.49 | V |

Channel 58

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17949.400 | 54.85 | -29.59 | 45.95 | 38.49 | 74.00 | 19.15 | V |
| 17980.200 | 54.22 | -29.59 | 45.95 | 37.86 | 74.00 | 19.78 | H |
| 14590.550 | 50.83 | -29.14 | 41.90 | 38.07 | 68.20 | 17.37 | H |
| 14558.100 | 50.29 | -29.14 | 41.90 | 37.53 | 68.20 | 17.91 | H |
| 5459.760 | 53.16 | -27.49 | 34.20 | 46.45 | 74.00 | 20.84 | V |
| 5431.968 | 52.35 | -27.94 | 34.30 | 45.99 | 74.00 | 21.65 | V |

Channel 106

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17874.600 | 54.65 | -29.59 | 45.95 | 38.29 | 74.00 | 19.35 | H |
| 17986.800 | 54.53 | -29.59 | 45.95 | 38.17 | 74.00 | 19.47 | H |
| 14665.350 | 50.67 | -30.04 | 41.50 | 39.21 | 68.20 | 17.53 | V |
| 14597.150 | 50.46 | -29.14 | 41.90 | 37.70 | 68.20 | 17.74 | V |
| 5420.860 | 53.43 | -27.94 | 34.30 | 47.07 | 74.00 | 20.57 | V |
| 5464.300 | 52.11 | -27.49 | 34.20 | 45.40 | 68.20 | 16.09 | V |

Channel 122

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17959.850 | 54.38 | -29.59 | 45.95 | 38.02 | 74.00 | 19.62 | V |
| 17987.900 | 54.37 | -29.59 | 45.95 | 38.01 | 74.00 | 19.63 | H |
| 14509.150 | 50.76 | -30.55 | 41.90 | 39.41 | 68.20 | 17.44 | V |
| 14612.550 | 50.76 | -30.67 | 41.70 | 39.73 | 68.20 | 17.44 | V |
| 5815.637 | 52.50 | -27.65 | 34.10 | 46.05 | 68.20 | 15.70 | V |
| 5823.530 | 52.30 | -27.65 | 34.10 | 45.85 | 68.20 | 15.90 | V |

802.11be-HT160 Partial RU

Channel 50

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17970.300 | 54.48 | -29.59 | 45.95 | 38.12 | 74.00 | 19.52 | V |
| 17973.600 | 54.42 | -29.59 | 45.95 | 38.06 | 74.00 | 19.58 | V |
| 14496.500 | 51.24 | -29.56 | 41.90 | 38.90 | 74.00 | 22.76 | H |
| 14564.150 | 50.64 | -29.14 | 41.90 | 37.88 | 68.20 | 17.56 | V |
| 5148.460 | 58.53 | -27.79 | 34.00 | 52.32 | 74.00 | 15.47 | H |
| 5148.900 | 58.49 | -28.00 | 34.00 | 52.49 | 74.00 | 15.51 | H |

Channel 114

| Frequency (MHz) | Measurement Result (dBuV/m) | Cable Loss (dB) | Antenna Factor (dB/m) | Receiver Reading (dBuV) | Limit (dBuV/m) | Margin (dB) | Antenna Pol. (H/V) |
|-----------------|-----------------------------|-----------------|-----------------------|-------------------------|----------------|-------------|--------------------|
| 17924.100 | 55.61 | -29.59 | 45.95 | 39.25 | 74.00 | 18.39 | V |
| 17905.950 | 54.56 | -29.59 | 45.95 | 38.20 | 74.00 | 19.44 | H |
| 14589.450 | 51.45 | -29.14 | 41.90 | 38.69 | 68.20 | 16.75 | H |
| 14575.700 | 50.86 | -29.14 | 41.90 | 38.10 | 68.20 | 17.34 | H |
| 5455.645 | 56.58 | -27.49 | 34.20 | 49.87 | 74.00 | 17.42 | V |
| 5466.370 | 60.00 | -27.49 | 34.20 | 53.29 | 68.20 | 8.20 | V |

Conclusion: PASS

A.7. AC Powerline Conducted Emission (150kHz- 30MHz)

Test Condition:

| Voltage (V) | Frequency (Hz) |
|-------------|----------------|
| 110 | 60 |

Measurement uncertainty:

Expanded measurement uncertainty for this test item is U =3.08dB, k=2.

Measurement Result and limit:

WLAN (Quasi-peak Limit)

| Frequency range (MHz) | Quasi-peak Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|-------------------------------|---------------------|--------|------------|
| | | With charger | | |
| | | 11a mode | Idle | |
| 0.15 to 0.5 | 66 to 56 | Fig.81 | Fig.82 | P |
| 0.5 to 5 | 56 | | | |
| 5 to 30 | 60 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

| Frequency range (MHz) | Average Limit (dB μ V) | Result (dB μ V) | | Conclusion |
|-----------------------|----------------------------|---------------------|--------|------------|
| | | With charger | | |
| | | 11a mode | Idle | |
| 0.15 to 0.5 | 56 to 46 | Fig.81 | Fig.82 | P |
| 0.5 to 5 | 46 | | | |
| 5 to 30 | 50 | | | |

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

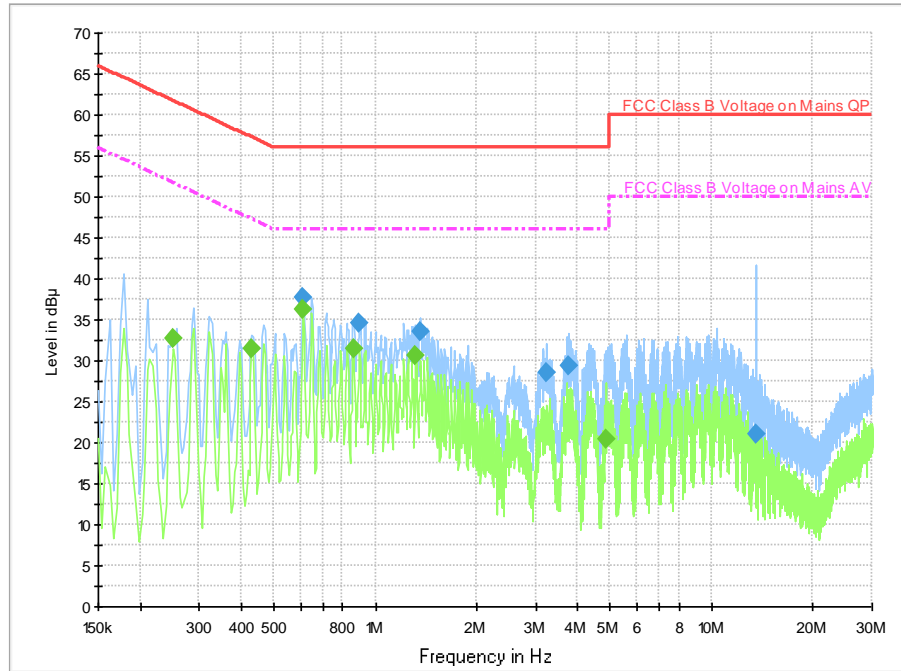


Fig.81 Conducted Emission(802.11a, Ch36, TX)

Final Result 1

| Frequency (MHz) | QuasiPeak (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.610000 | 37.6 | 2000.0 | 9.000 | On | L1 | 19.7 | 18.4 | 56.0 | |
| 0.894000 | 34.5 | 2000.0 | 9.000 | On | L1 | 19.7 | 21.5 | 56.0 | |
| 1.358000 | 33.5 | 2000.0 | 9.000 | On | L1 | 19.6 | 22.5 | 56.0 | |
| 3.218000 | 28.5 | 2000.0 | 9.000 | On | L1 | 19.6 | 27.5 | 56.0 | |
| 3.750000 | 29.3 | 2000.0 | 9.000 | On | L1 | 19.6 | 26.7 | 56.0 | |
| 13.558000 | 21.0 | 2000.0 | 9.000 | On | L1 | 19.7 | 39.0 | 60.0 | |

Final Result 2

| Frequency (MHz) | CAverage (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.250000 | 32.8 | 2000.0 | 9.000 | On | L1 | 19.7 | 19.0 | 51.8 | |
| 0.430000 | 31.5 | 2000.0 | 9.000 | On | L1 | 19.7 | 15.8 | 47.3 | |
| 0.610000 | 36.2 | 2000.0 | 9.000 | On | L1 | 19.7 | 9.8 | 46.0 | |
| 0.862000 | 31.4 | 2000.0 | 9.000 | On | L1 | 19.7 | 14.6 | 46.0 | |
| 1.322000 | 30.6 | 2000.0 | 9.000 | On | L1 | 19.6 | 15.4 | 46.0 | |
| 4.870000 | 20.4 | 2000.0 | 9.000 | On | N | 19.6 | 25.6 | 46.0 | |

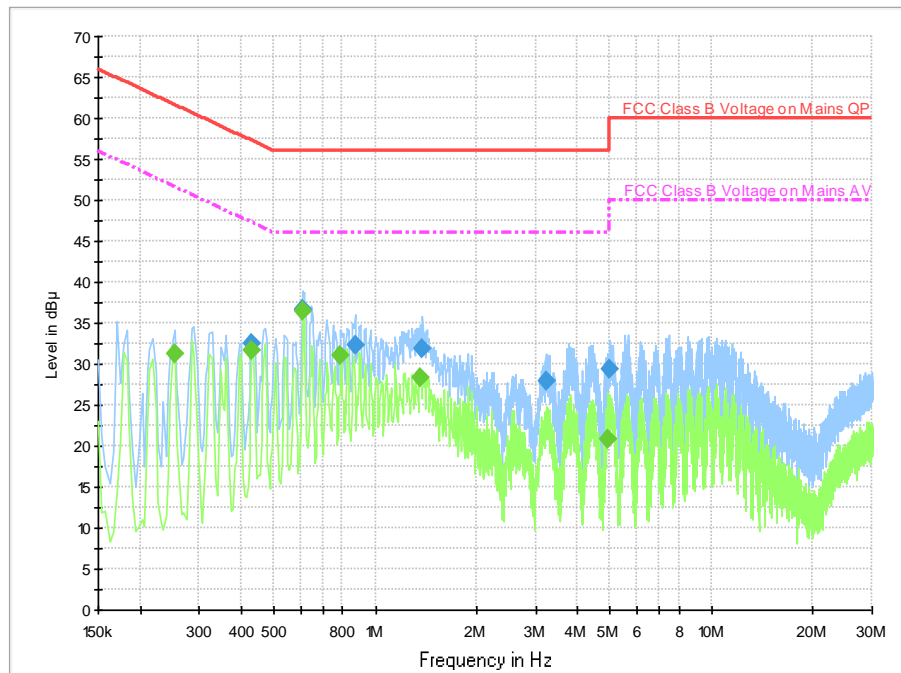


Fig.82 Conducted Emission(802.11a, IDLE)

Final Result 1

| Frequency (MHz) | QuasiPeak (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) | Comment |
|-----------------|------------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.430000 | 32.6 | 2000.0 | 9.000 | On | L1 | 19.7 | 24.7 | 57.3 | |
| 0.606000 | 36.7 | 2000.0 | 9.000 | On | L1 | 19.7 | 19.3 | 56.0 | |
| 0.870000 | 32.3 | 2000.0 | 9.000 | On | L1 | 19.6 | 23.7 | 56.0 | |
| 1.382000 | 31.8 | 2000.0 | 9.000 | On | L1 | 19.6 | 24.2 | 56.0 | |
| 3.214000 | 27.9 | 2000.0 | 9.000 | On | L1 | 19.6 | 28.1 | 56.0 | |
| 4.998000 | 29.3 | 2000.0 | 9.000 | On | N | 19.6 | 26.7 | 56.0 | |

Final Result 2

| Frequency (MHz) | CAverage (dBuV) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBuV) | Comment |
|-----------------|-----------------|-----------------|-----------------|--------|------|------------|-------------|--------------|---------|
| 0.254000 | 31.3 | 2000.0 | 9.000 | On | L1 | 19.7 | 20.3 | 51.6 | |
| 0.430000 | 31.7 | 2000.0 | 9.000 | On | L1 | 19.7 | 15.6 | 47.3 | |
| 0.610000 | 36.4 | 2000.0 | 9.000 | On | L1 | 19.7 | 9.6 | 46.0 | |
| 0.790000 | 31.0 | 2000.0 | 9.000 | On | L1 | 19.7 | 15.0 | 46.0 | |
| 1.362000 | 28.3 | 2000.0 | 9.000 | On | L1 | 19.6 | 17.7 | 46.0 | |
| 4.926000 | 20.9 | 2000.0 | 9.000 | On | N | 19.6 | 25.1 | 46.0 | |

A.8. 99% Occupied bandwidth

Method of Measurement: See ANSI C63.10-2013-clause 12.4.2.

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Measurement Uncertainty:

| | |
|-------------------------|---------|
| Measurement Uncertainty | 60.80Hz |
|-------------------------|---------|

EUT ID: UT04a


Measurement Result:


| Test Mode | Antenna | Frequency [MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Verdict |
|-----------|---------|-----------------|-----------|-----------|-----------|---------|
| 11A-MIMO | Ant9 | 5180 | 17.093 | 5171.3894 | 5188.4819 | PASS |
| | Ant15 | 5180 | 16.892 | 5171.5203 | 5188.4127 | PASS |
| | Ant9 | 5200 | 17.073 | 5191.3786 | 5208.4512 | PASS |
| | Ant15 | 5200 | 16.854 | 5191.5131 | 5208.3675 | PASS |
| | Ant9 | 5240 | 17.069 | 5231.3895 | 5248.4587 | PASS |
| | Ant15 | 5240 | 16.879 | 5231.5082 | 5248.3868 | PASS |
| | Ant9 | 5260 | 17.098 | 5251.3516 | 5268.4492 | PASS |
| | Ant15 | 5260 | 16.899 | 5251.5232 | 5268.4226 | PASS |
| | Ant9 | 5280 | 17.09 | 5271.3831 | 5288.4733 | PASS |
| | Ant15 | 5280 | 16.862 | 5271.5188 | 5288.3803 | PASS |

| | | | | | | |
|-------------|-------|------|---------|-----------|-----------|------|
| | Ant9 | 5320 | 17.097 | 5311.3608 | 5328.4577 | PASS |
| | Ant15 | 5320 | 16.848 | 5311.5464 | 5328.3948 | PASS |
| | Ant9 | 5500 | 17.078 | 5491.3416 | 5508.4195 | PASS |
| | Ant15 | 5500 | 16.865 | 5491.5108 | 5508.3760 | PASS |
| | Ant9 | 5580 | 17.072 | 5571.3654 | 5588.4372 | PASS |
| | Ant15 | 5580 | 16.86 | 5571.5156 | 5588.3754 | PASS |
| | Ant9 | 5700 | 17.047 | 5691.3627 | 5708.4100 | PASS |
| | Ant15 | 5700 | 16.86 | 5691.5229 | 5708.3826 | PASS |
| 11N20MIMO | Ant9 | 5180 | 18.174 | 5170.8893 | 5189.0634 | PASS |
| | Ant15 | 5180 | 18.104 | 5170.9368 | 5189.0407 | PASS |
| | Ant9 | 5200 | 18.146 | 5190.8750 | 5209.0206 | PASS |
| | Ant15 | 5200 | 18.067 | 5190.9255 | 5208.9928 | PASS |
| | Ant9 | 5240 | 18.153 | 5230.8915 | 5249.0447 | PASS |
| | Ant15 | 5240 | 18.049 | 5230.9403 | 5248.9889 | PASS |
| | Ant9 | 5260 | 18.183 | 5250.8626 | 5269.0455 | PASS |
| | Ant15 | 5260 | 18.107 | 5250.9311 | 5269.0382 | PASS |
| | Ant9 | 5280 | 18.162 | 5270.8862 | 5289.0485 | PASS |
| | Ant15 | 5280 | 18.037 | 5270.9521 | 5288.9886 | PASS |
| | Ant9 | 5320 | 18.131 | 5310.8767 | 5329.0079 | PASS |
| | Ant15 | 5320 | 18.033 | 5310.9525 | 5328.9855 | PASS |
| | Ant9 | 5500 | 18.179 | 5490.8377 | 5509.0171 | PASS |
| | Ant15 | 5500 | 18.069 | 5490.9170 | 5508.9863 | PASS |
| | Ant9 | 5580 | 18.156 | 5570.8744 | 5589.0300 | PASS |
| | Ant15 | 5580 | 18.091 | 5570.9003 | 5588.9910 | PASS |
| | Ant9 | 5700 | 18.113 | 5690.8903 | 5709.0031 | PASS |
| | Ant15 | 5700 | 18.066 | 5690.9138 | 5708.9802 | PASS |
| 11N40MIMO | Ant9 | 5190 | 36.892 | 5171.5586 | 5208.4504 | PASS |
| | Ant15 | 5190 | 37.007 | 5171.4434 | 5208.4508 | PASS |
| | Ant9 | 5230 | 36.991 | 5211.4692 | 5248.4605 | PASS |
| | Ant15 | 5230 | 36.979 | 5211.4224 | 5248.4015 | PASS |
| | Ant9 | 5270 | 37.022 | 5251.4379 | 5288.4597 | PASS |
| | Ant15 | 5270 | 36.96 | 5251.4832 | 5288.4436 | PASS |
| | Ant9 | 5310 | 36.958 | 5291.4649 | 5328.4227 | PASS |
| | Ant15 | 5310 | 37.007 | 5291.4622 | 5328.4693 | PASS |
| | Ant9 | 5510 | 37.023 | 5491.3891 | 5528.4123 | PASS |
| | Ant15 | 5510 | 37.02 | 5491.3730 | 5528.3929 | PASS |
| | Ant9 | 5550 | 37.015 | 5531.3748 | 5568.3899 | PASS |
| | Ant15 | 5550 | 36.957 | 5531.4684 | 5568.4250 | PASS |
| | Ant9 | 5670 | 37.074 | 5651.3720 | 5688.4458 | PASS |
| | Ant15 | 5670 | 37.013 | 5651.4261 | 5688.4389 | PASS |
| 11AX160MIMO | Ant9 | 5250 | 158.794 | 5170.8431 | 5329.6369 | PASS |
| | Ant15 | 5250 | 158.77 | 5170.4826 | 5329.2529 | PASS |


| | | | | | | |
|------------|-------|--------------|---------|-----------|-----------|------|
| | Ant9 | 5250_UNII-1 | 79.157 | 5170.8431 | 5250 | PASS |
| | Ant15 | 5250_UNII-1 | 79.517 | 5170.4826 | 5250 | PASS |
| | Ant9 | 5250_UNII-2A | 79.637 | 5250 | 5329.6369 | PASS |
| | Ant15 | 5250_UNII-2A | 79.253 | 5250 | 5329.2529 | PASS |
| | Ant9 | 5570 | 159.328 | 5490.2021 | 5649.5306 | PASS |
| | Ant15 | 5570 | 159.224 | 5490.2663 | 5649.4900 | PASS |
| 11BE80MIMO | Ant9 | 5210 | 78.521 | 5170.8115 | 5249.3321 | PASS |
| | Ant15 | 5210 | 78.712 | 5170.5615 | 5249.2736 | PASS |
| | Ant9 | 5290 | 78.83 | 5250.5270 | 5329.3569 | PASS |
| | Ant15 | 5290 | 78.76 | 5250.5866 | 5329.3461 | PASS |
| | Ant9 | 5530 | 78.777 | 5490.3960 | 5569.1729 | PASS |
| | Ant15 | 5530 | 78.716 | 5490.5399 | 5569.2563 | PASS |
| | Ant9 | 5610 | 78.895 | 5570.4155 | 5649.3106 | PASS |
| | Ant15 | 5610 | 78.751 | 5570.4646 | 5649.2157 | PASS |

Test graphs as below:

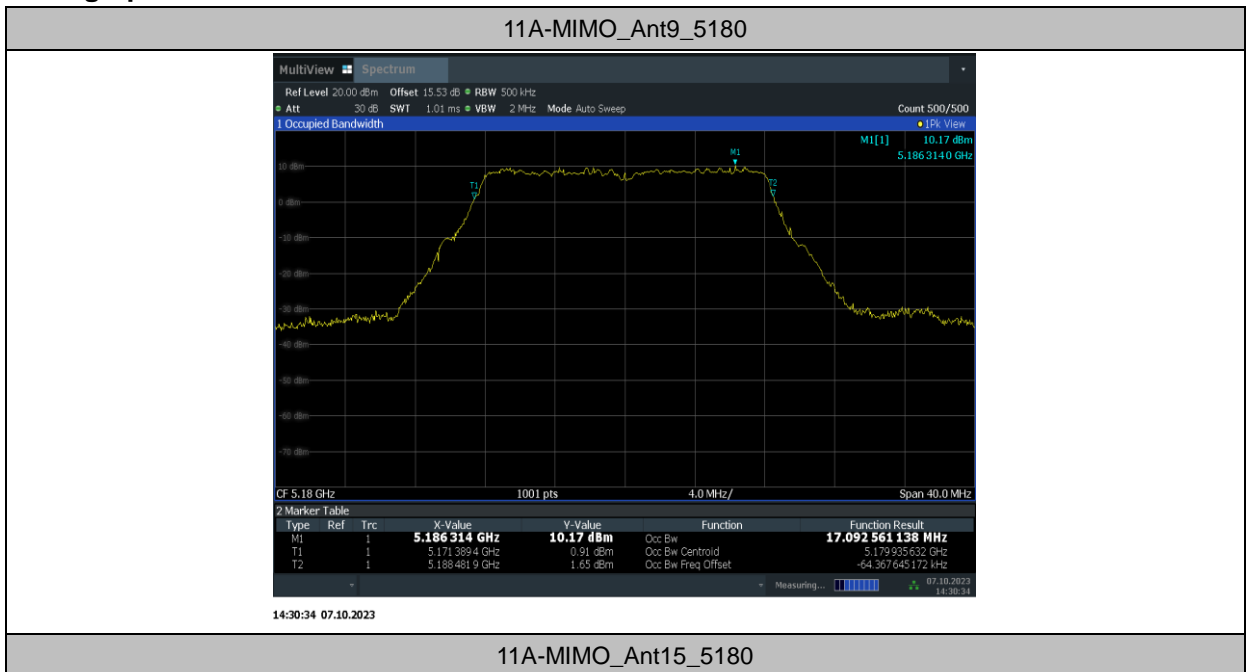

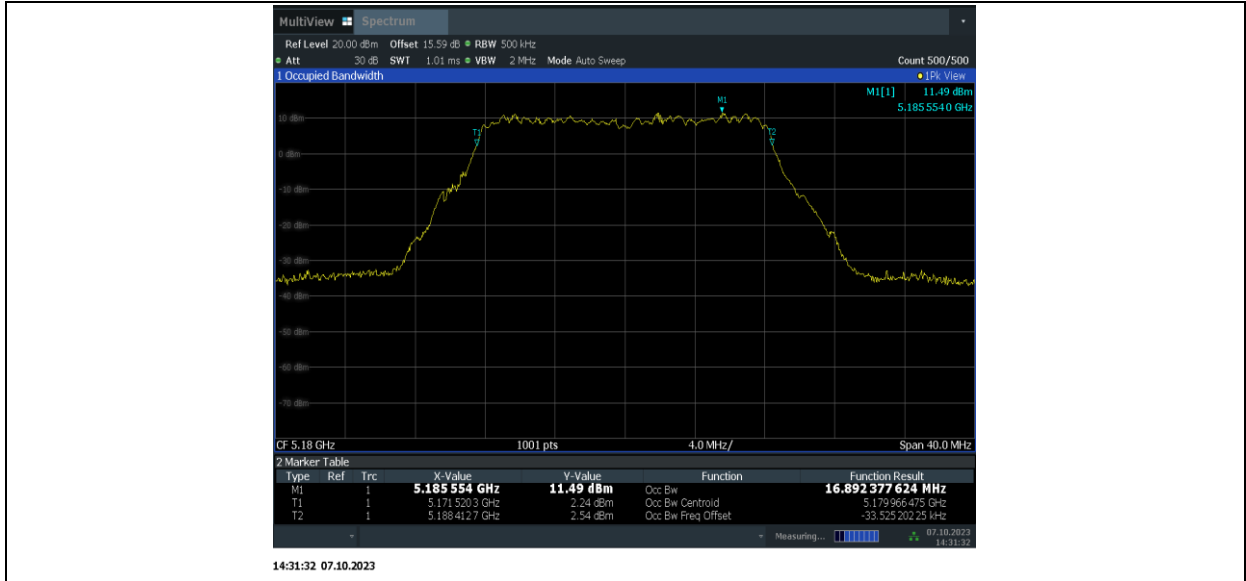


11A-MIMO_Ant9_5200

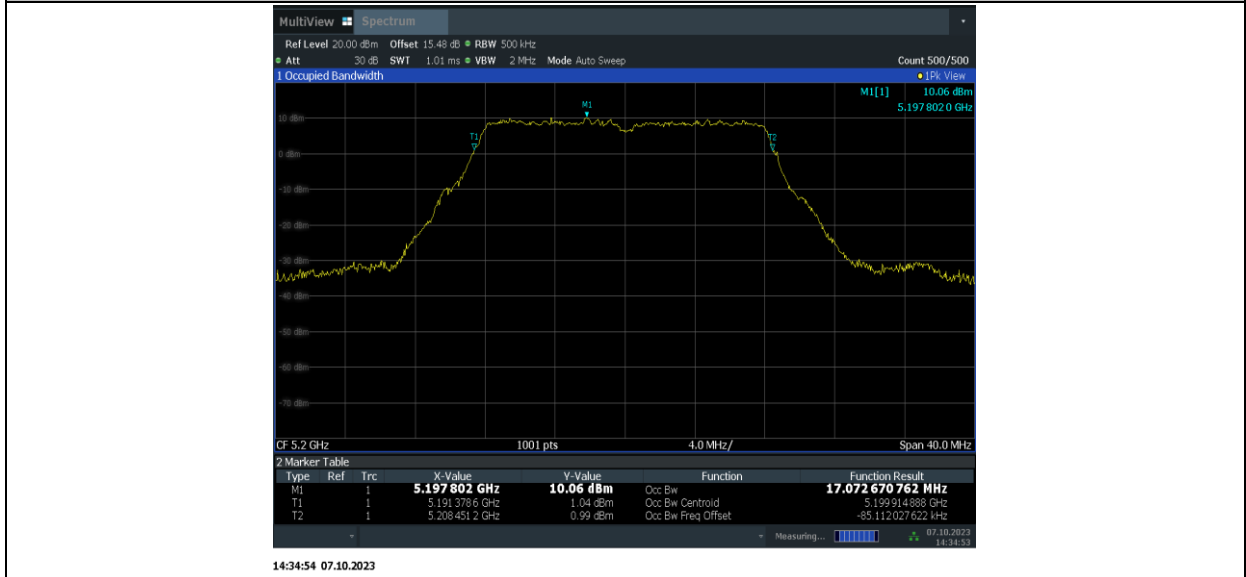

11A-MIMO_Ant15_5200




11A-MIMO_Ant9_5240

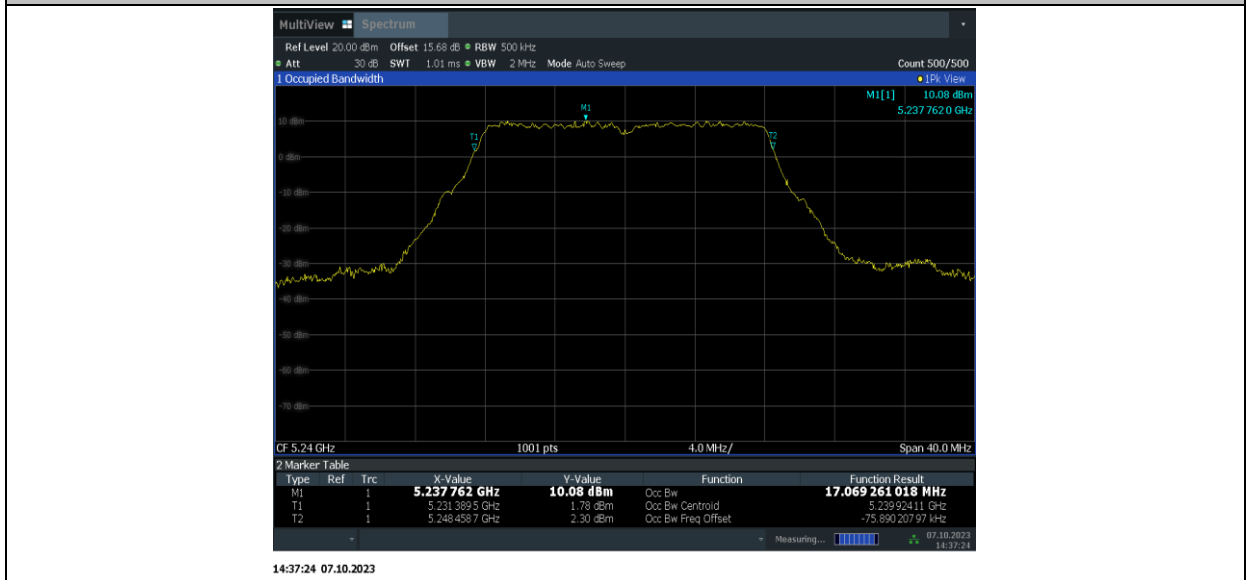


11A-MIMO_Ant15_5240




11A-MIMO_Ant9_5260

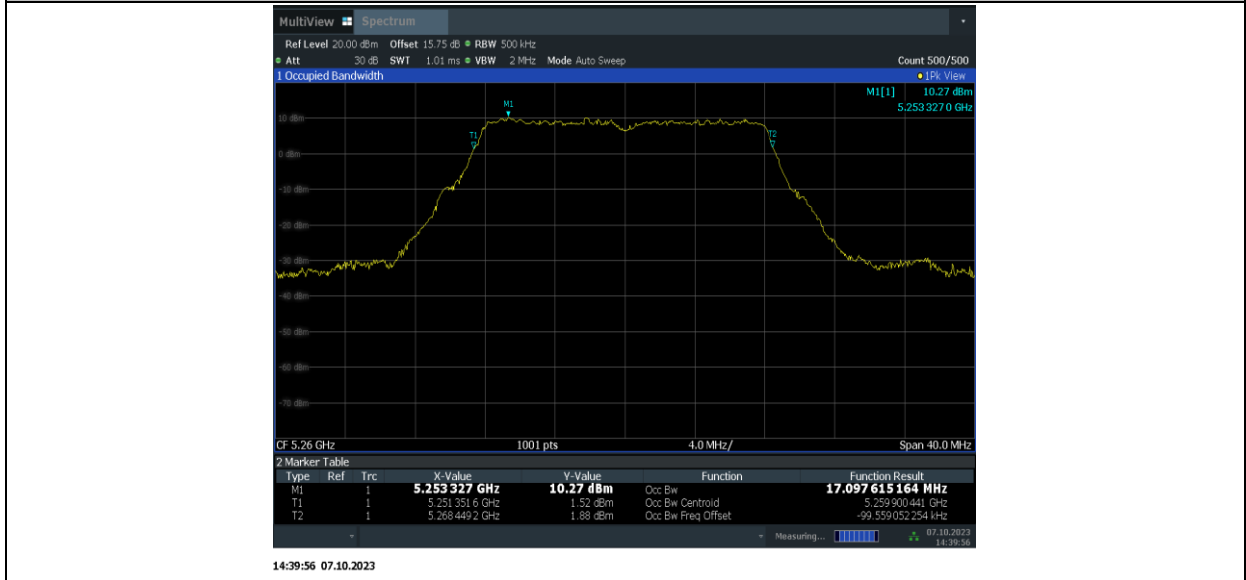


11A-MIMO_Ant15_5260

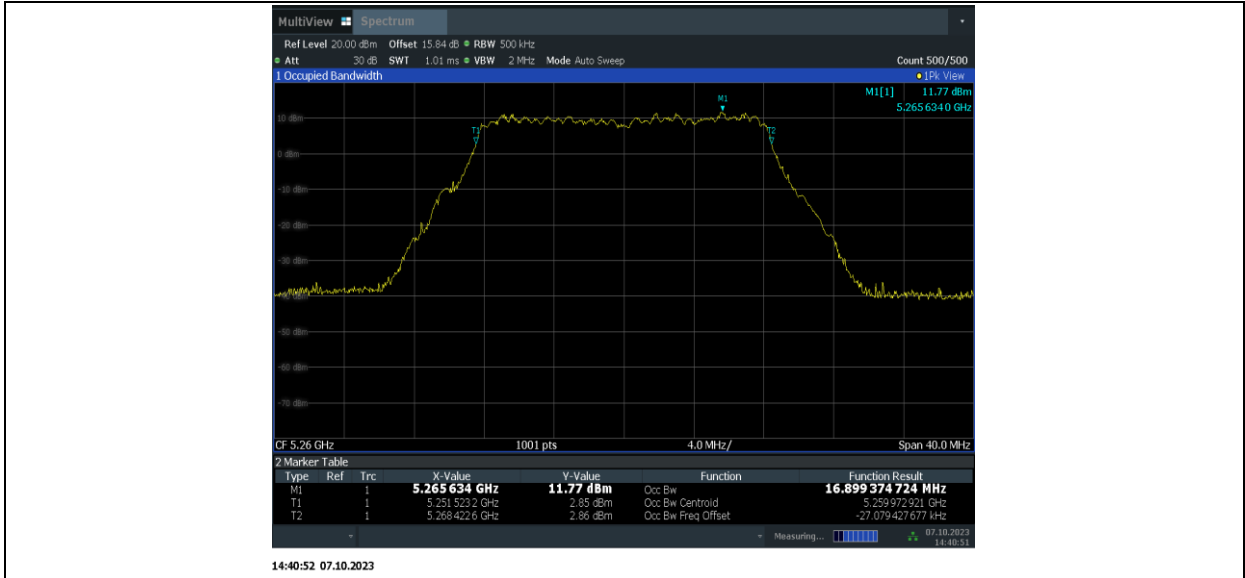


11A-MIMO_Ant9_5280

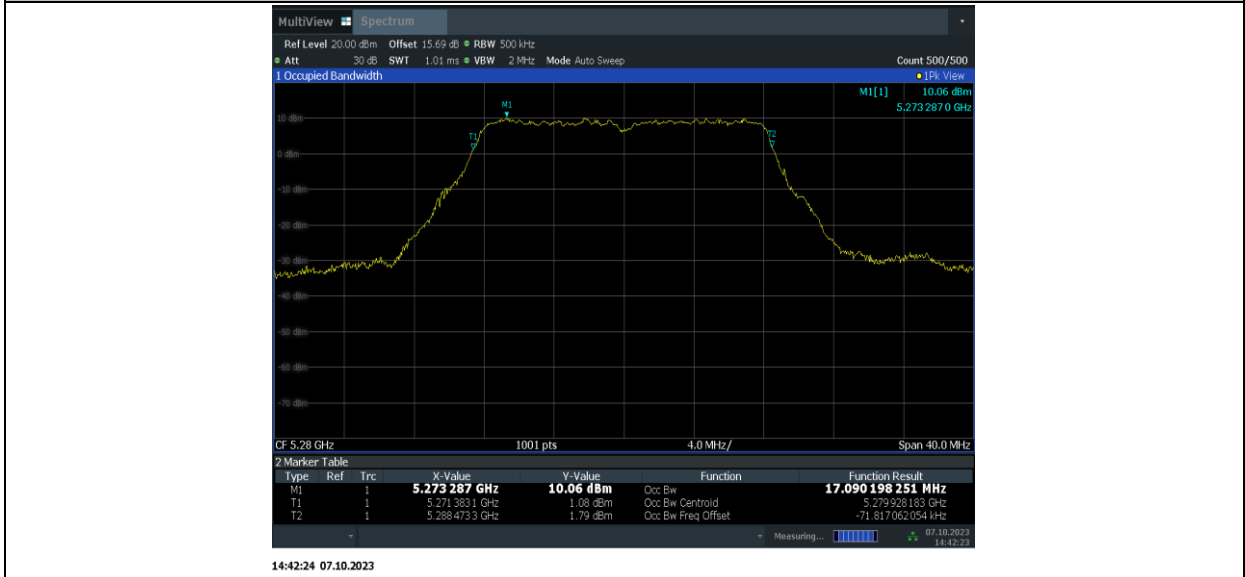


11A-MIMO_Ant15_5280

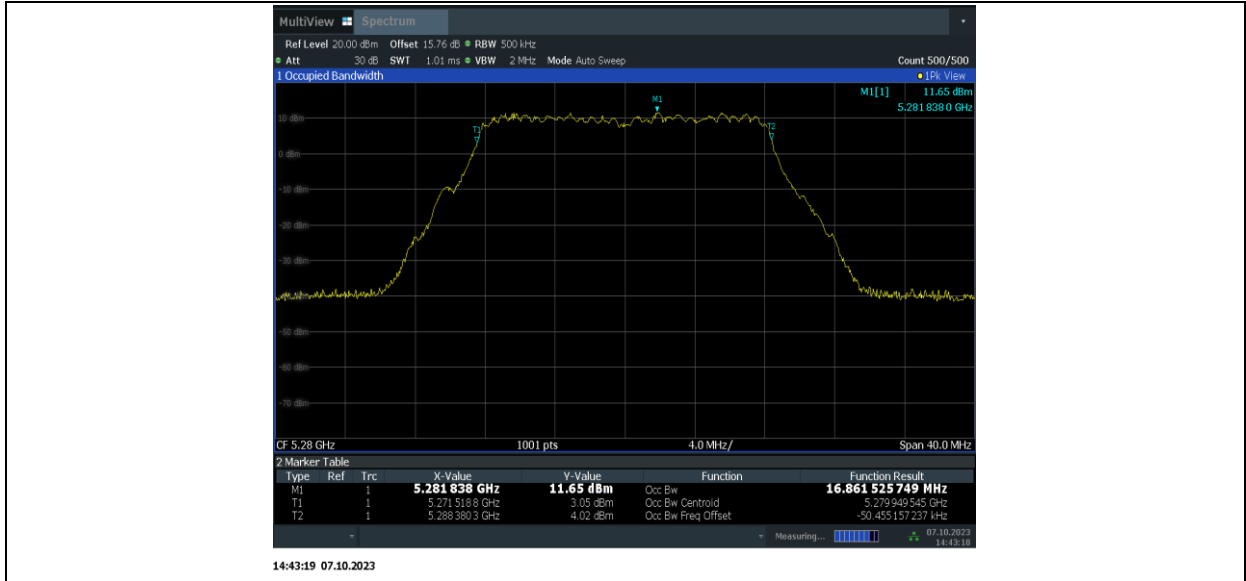

11A-MIMO_Ant9_5320

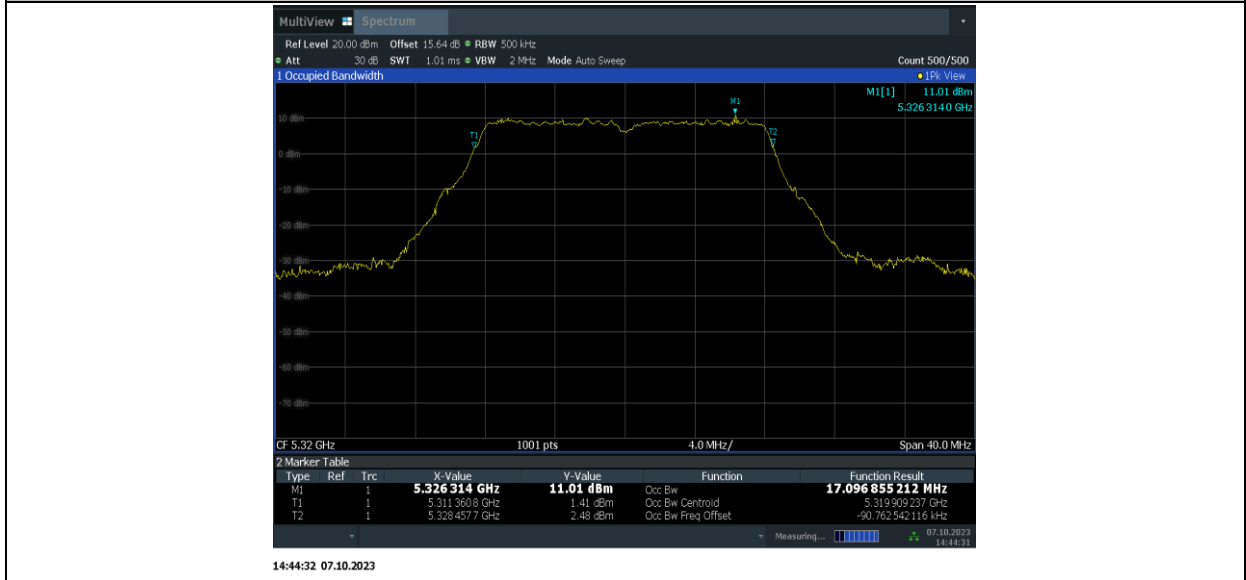


11A-MIMO_Ant15_5320

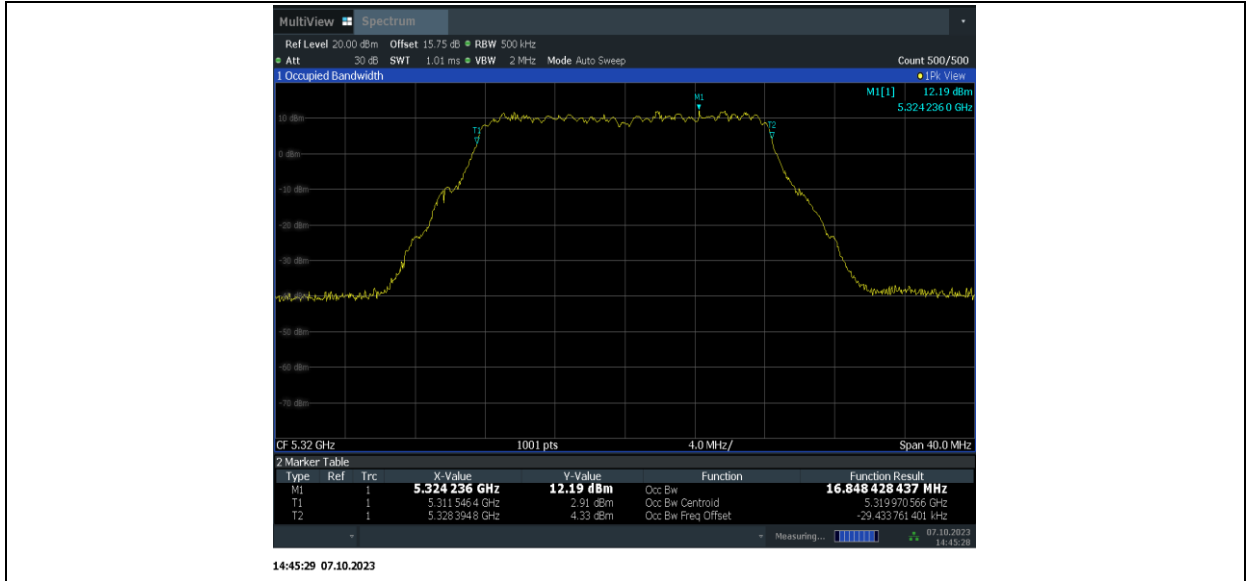


11A-MIMO_Ant9_5500




11A-MIMO_Ant15_5500

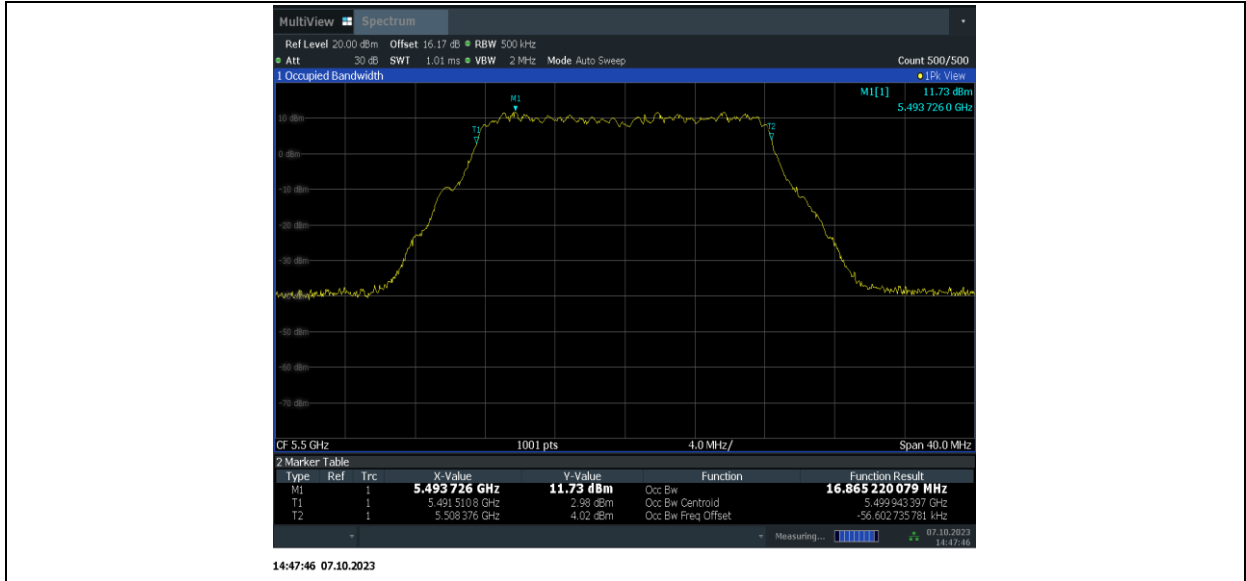


11A-MIMO_Ant9_5580

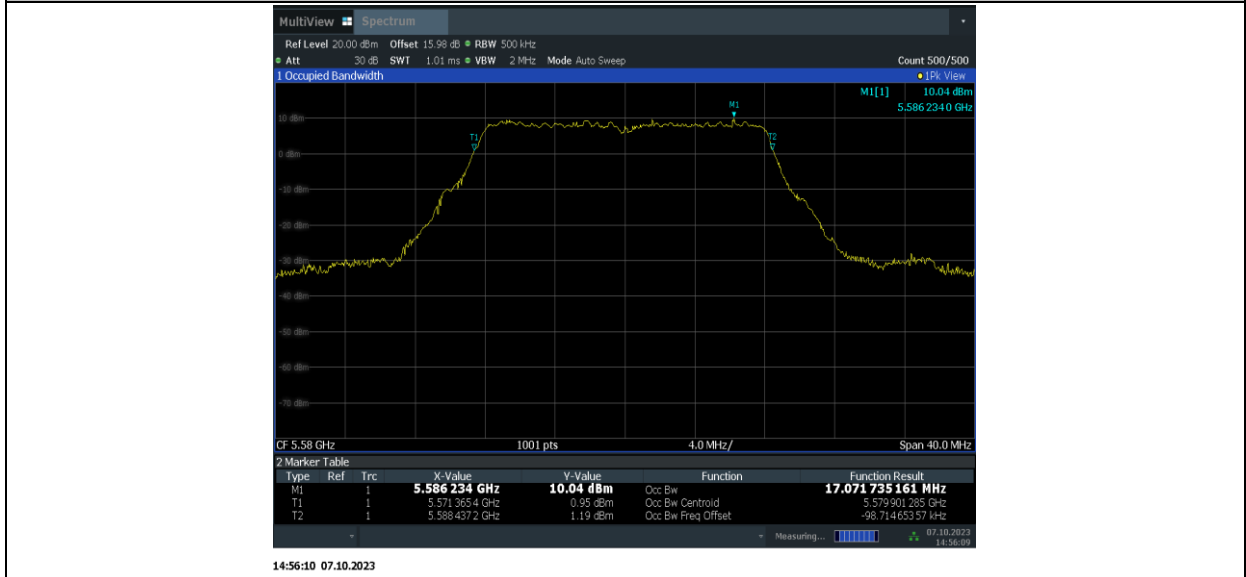


11A-MIMO_Ant15_5580

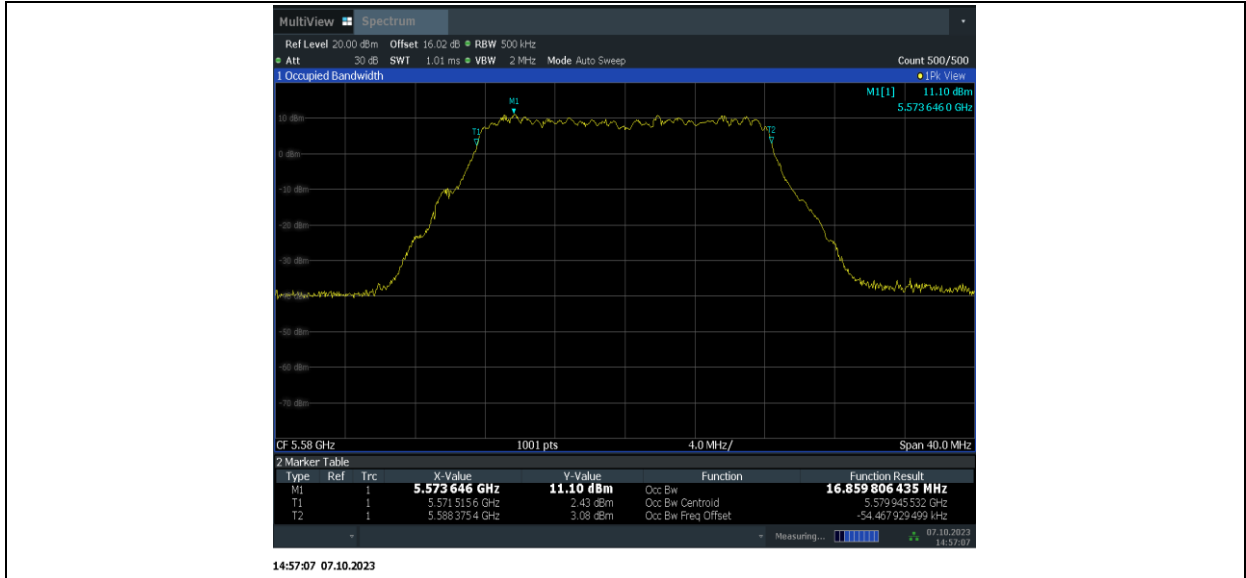


11A-MIMO_Ant9_5700

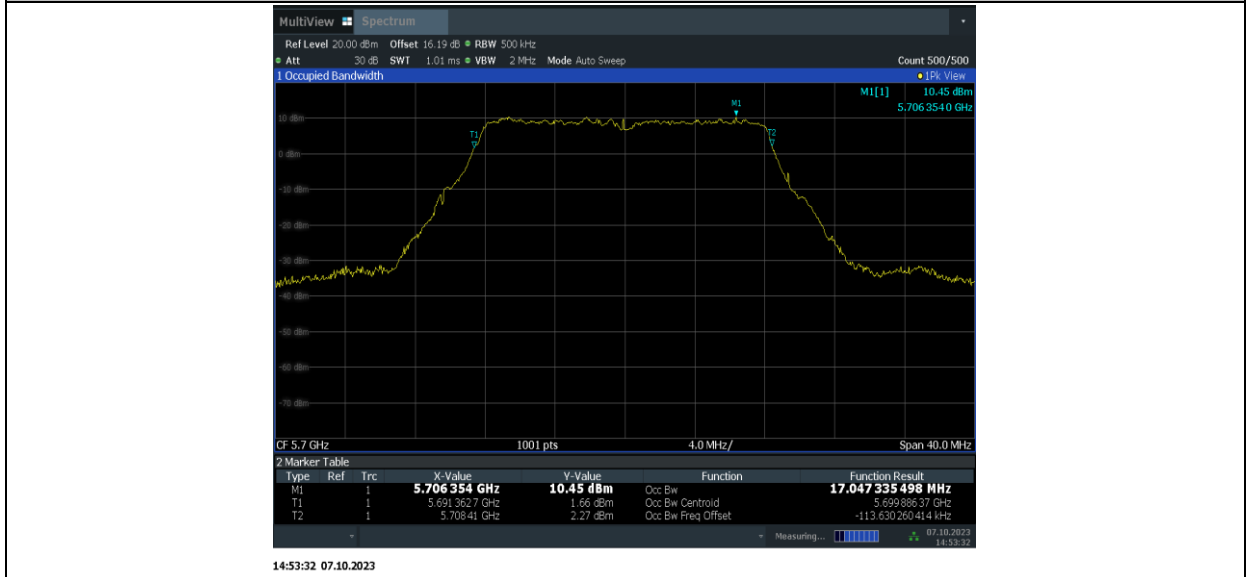


11A-MIMO_Ant15_5700

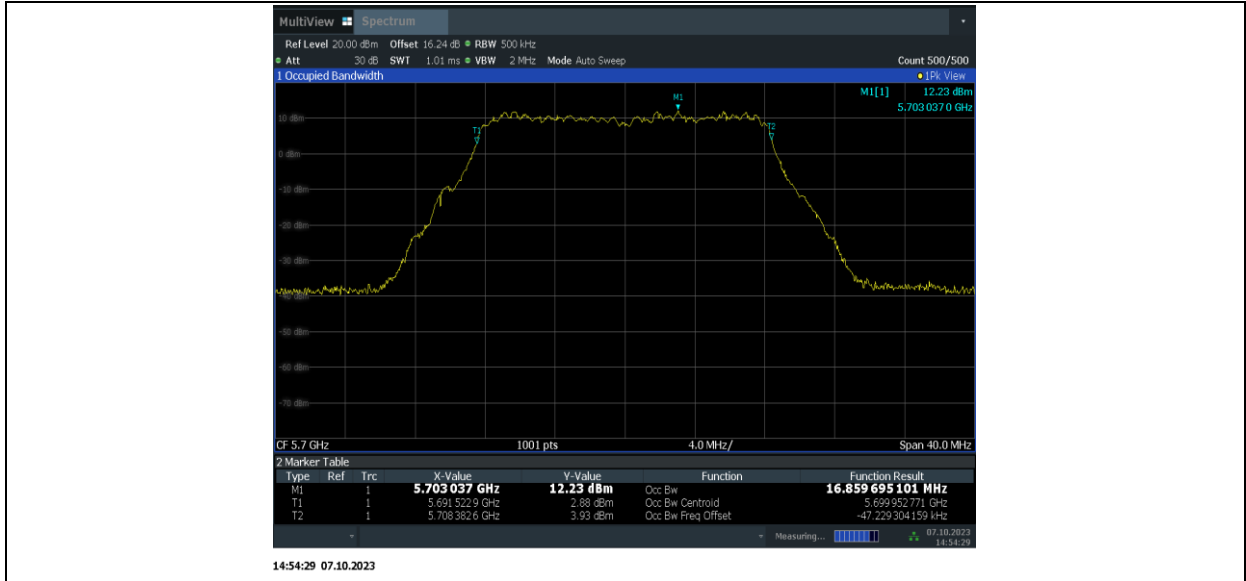


11N20MIMO_Ant9_5180

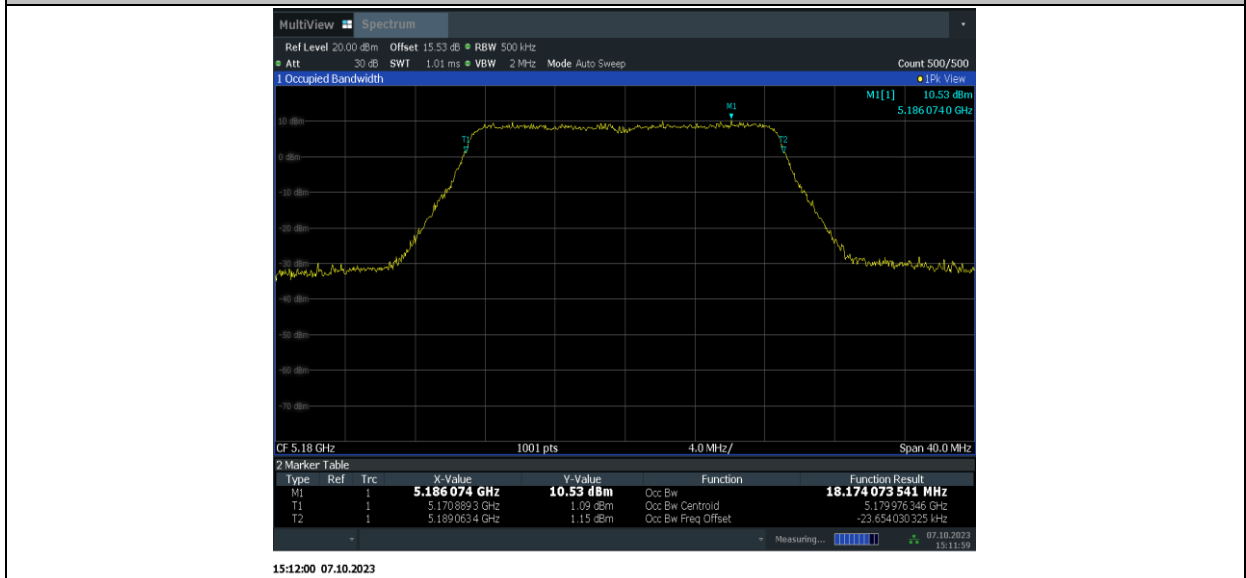


11N20MIMO_Ant15_5180

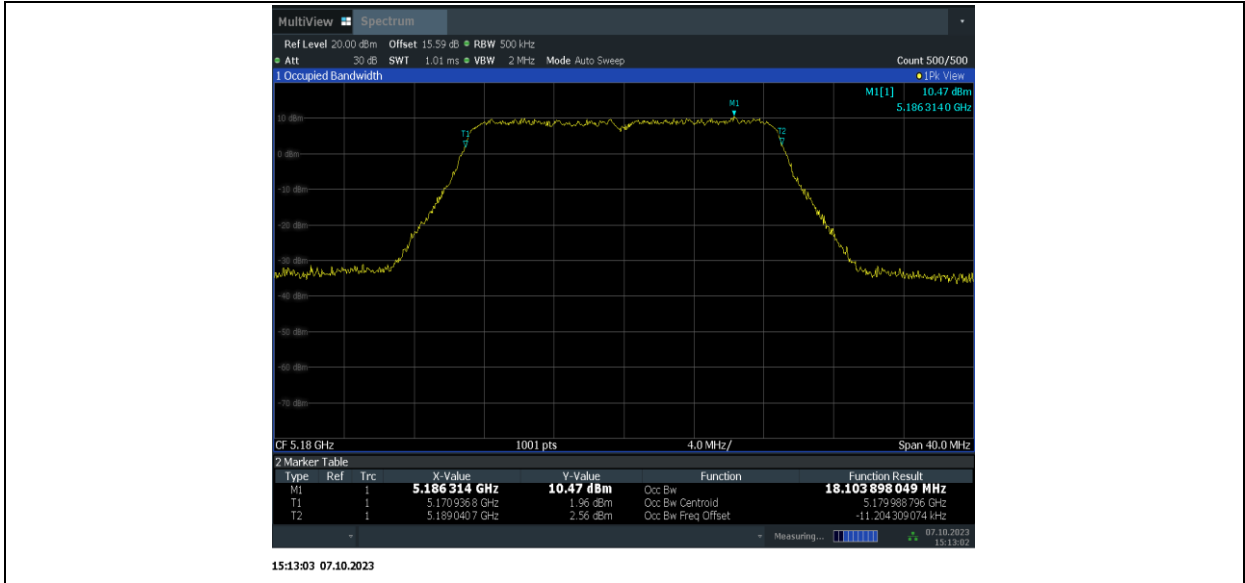


11N20MIMO_Ant9_5200

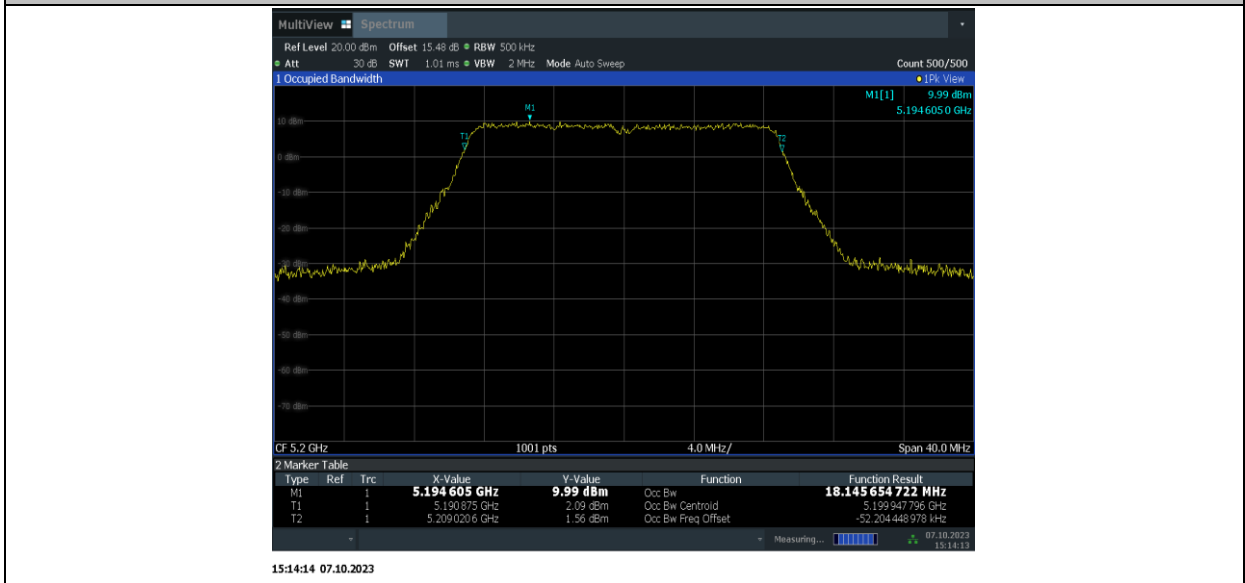


11N20MIMO_Ant15_5200

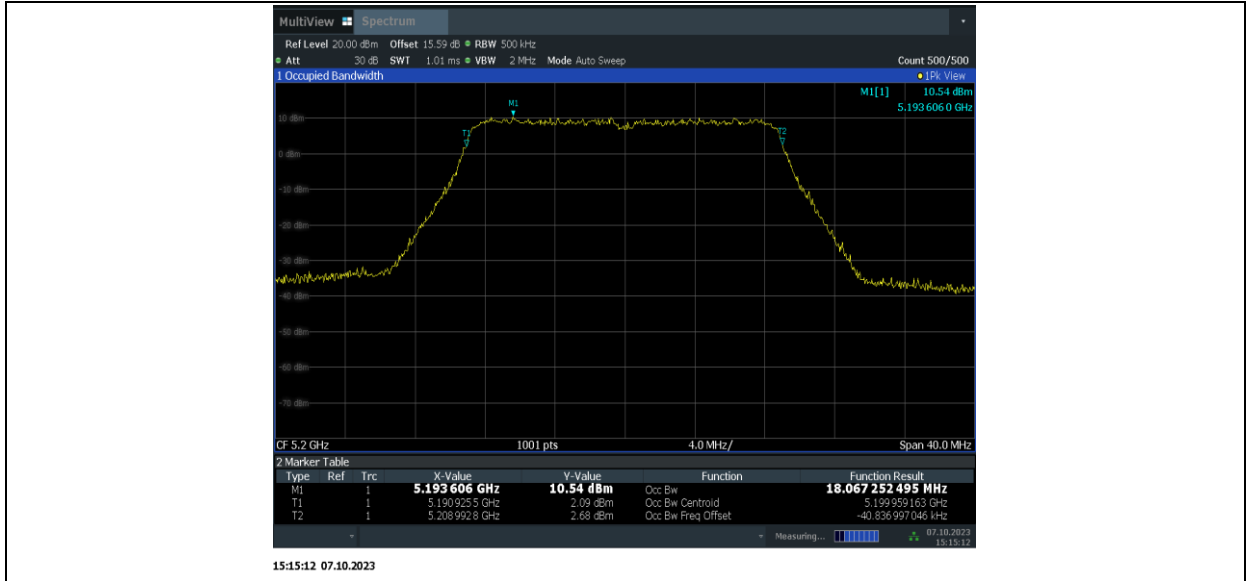


11N20MIMO_Ant9_5240

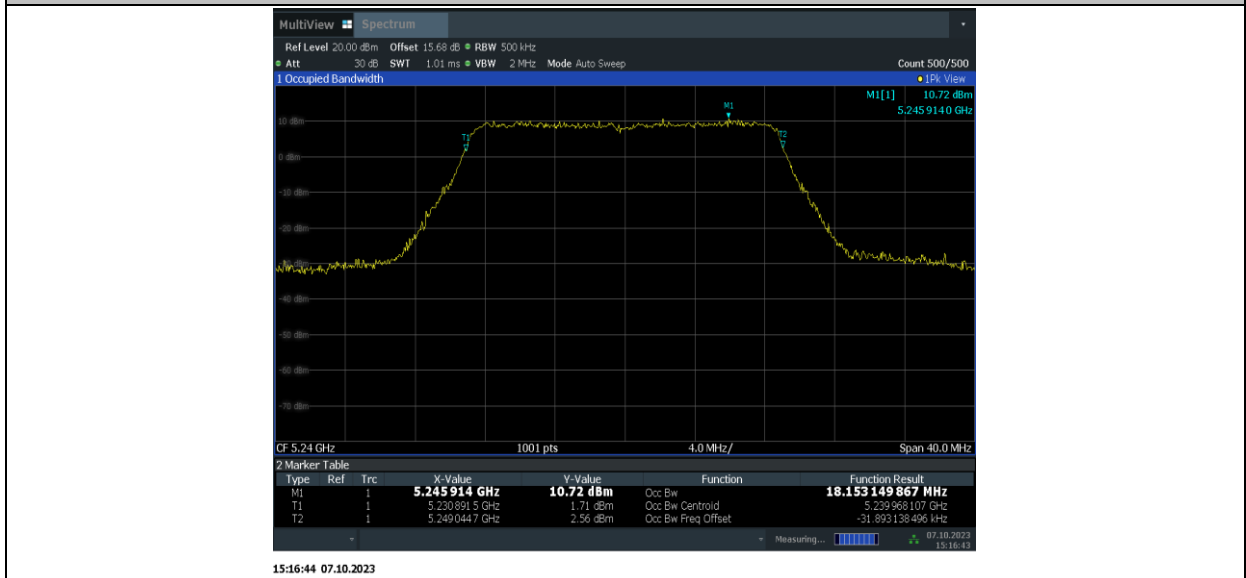


11N20MIMO_Ant15_5240

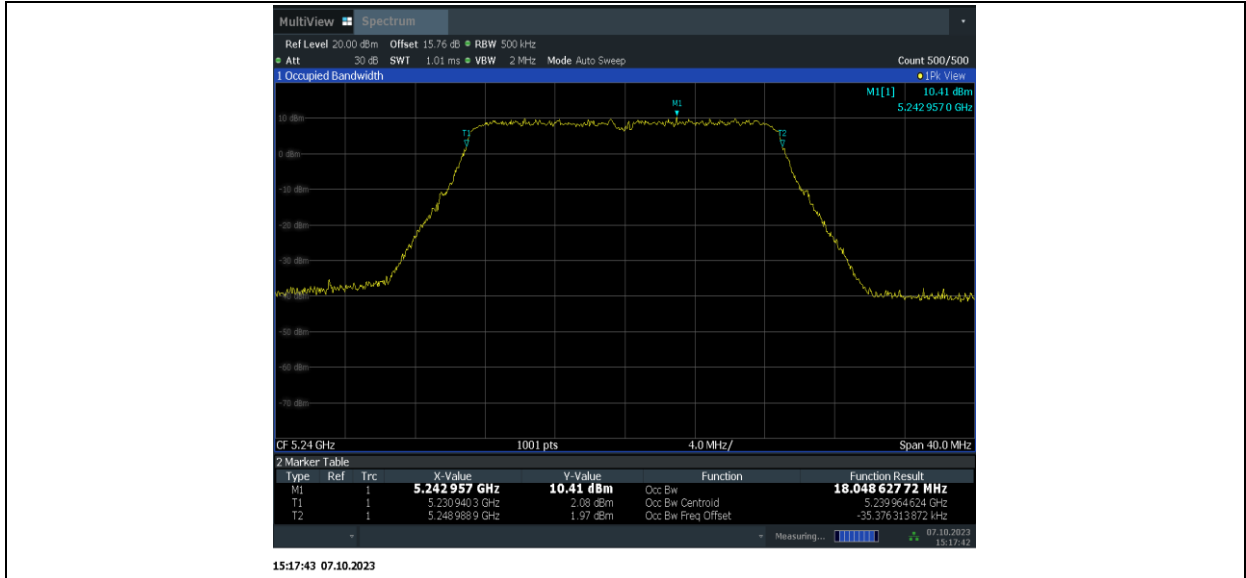


11N20MIMO_Ant9_5260

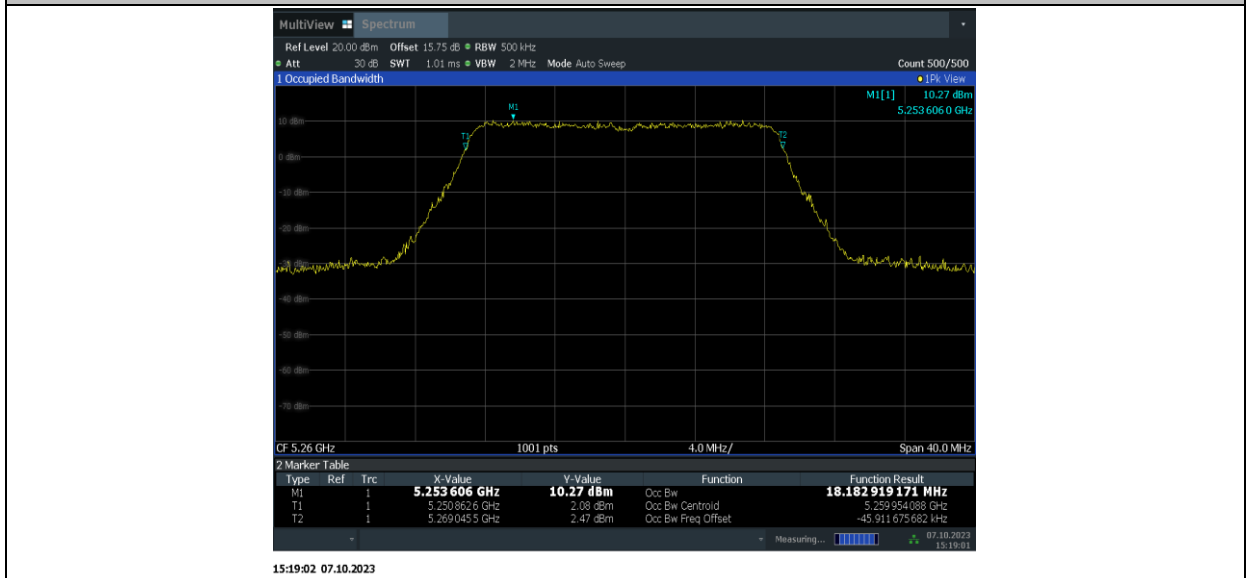


11N20MIMO_Ant15_5260

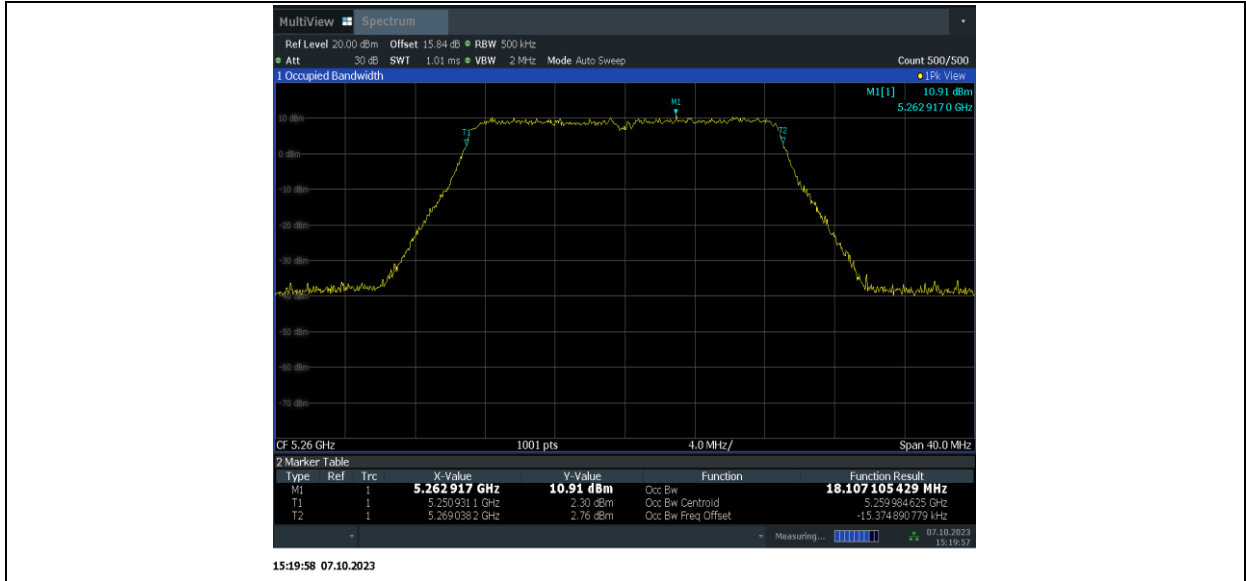


11N20MIMO_Ant9_5280

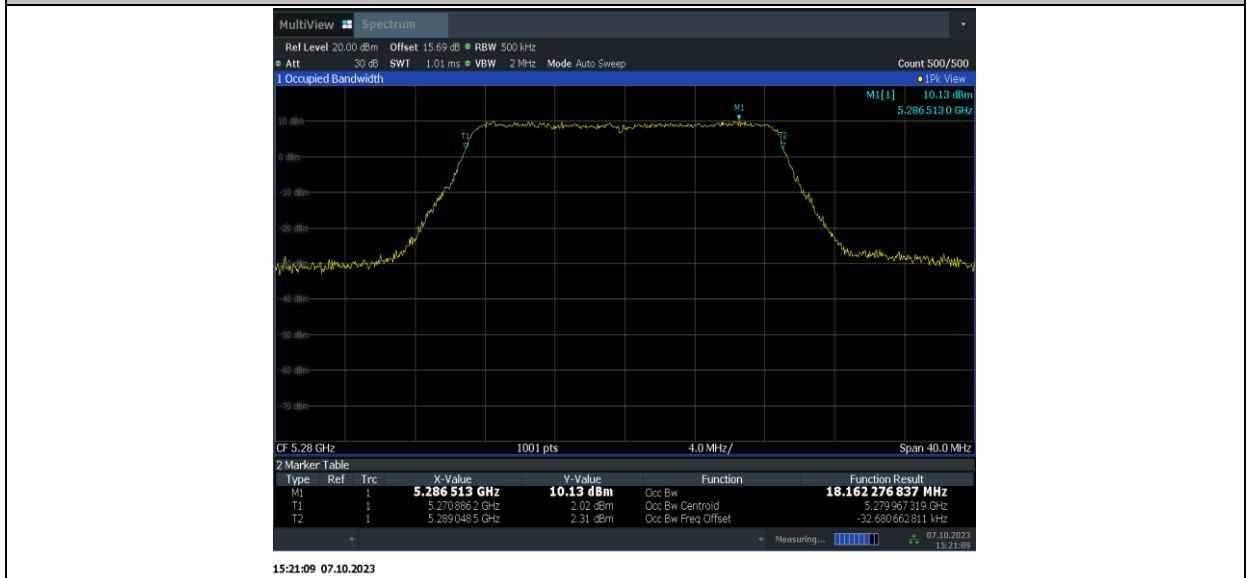


11N20MIMO_Ant15_5280

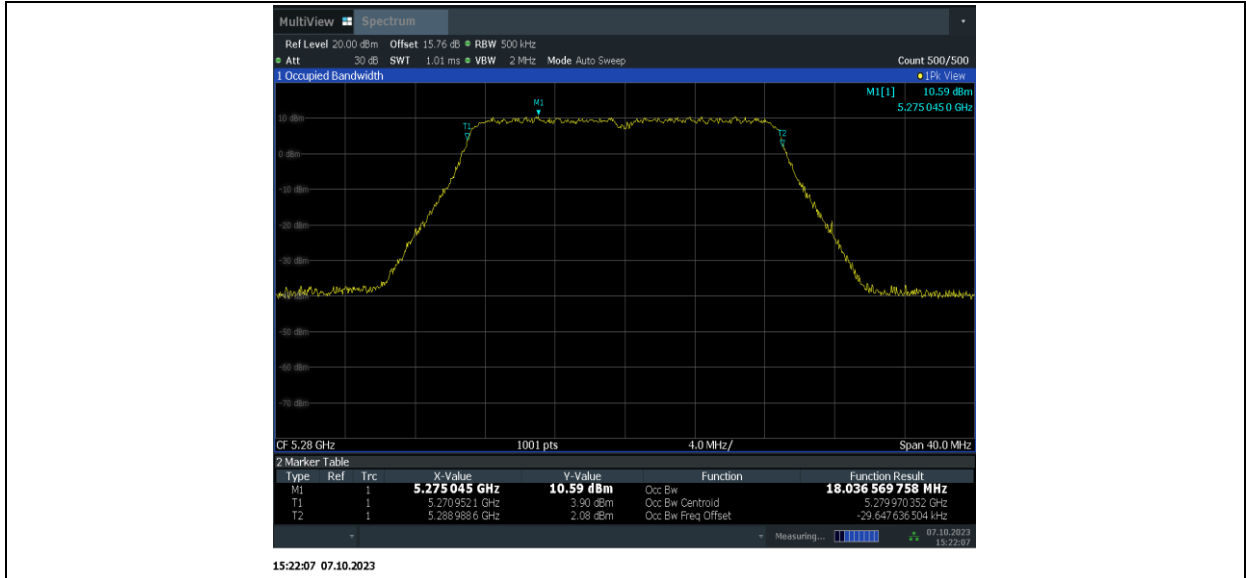


11N20MIMO_Ant9_5320

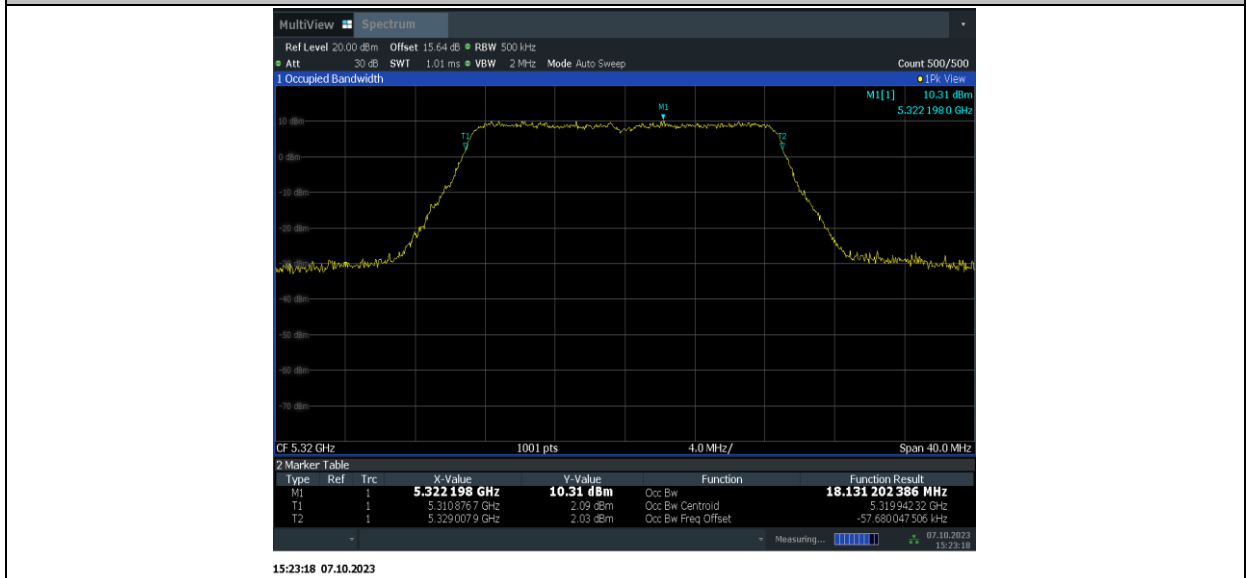


11N20MIMO_Ant15_5320

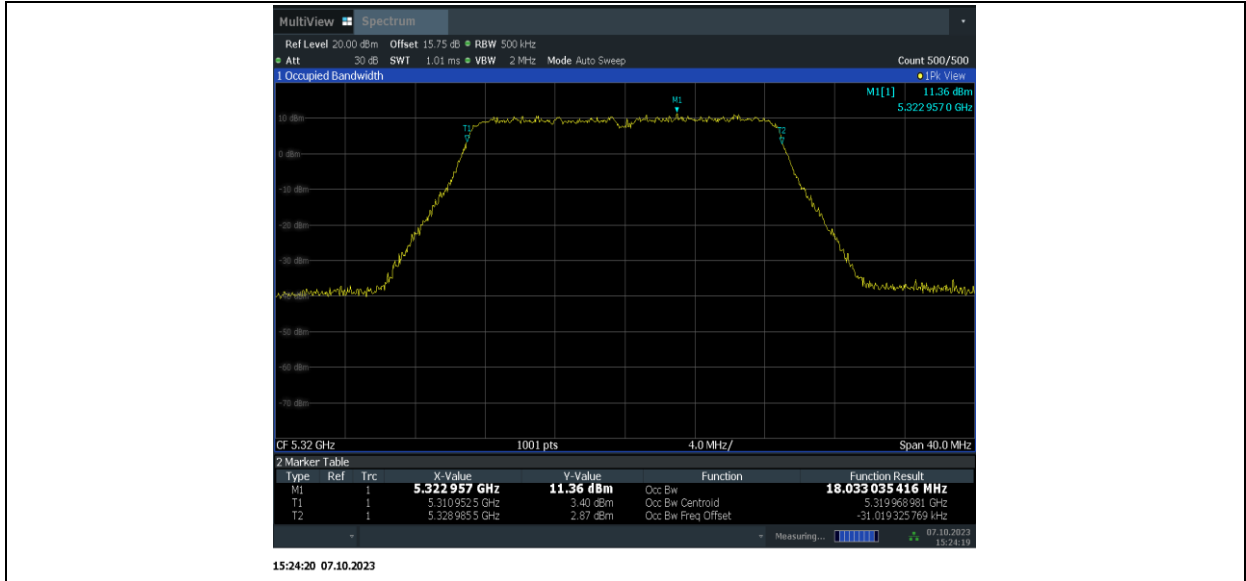


11N20MIMO_Ant9_5500

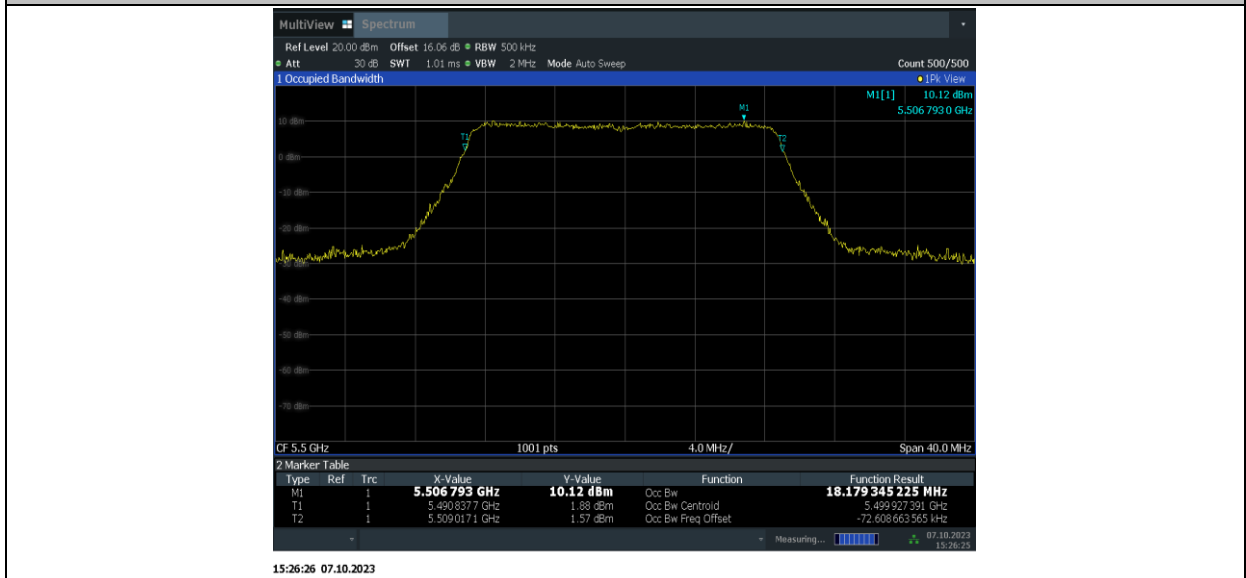


11N20MIMO_Ant15_5500

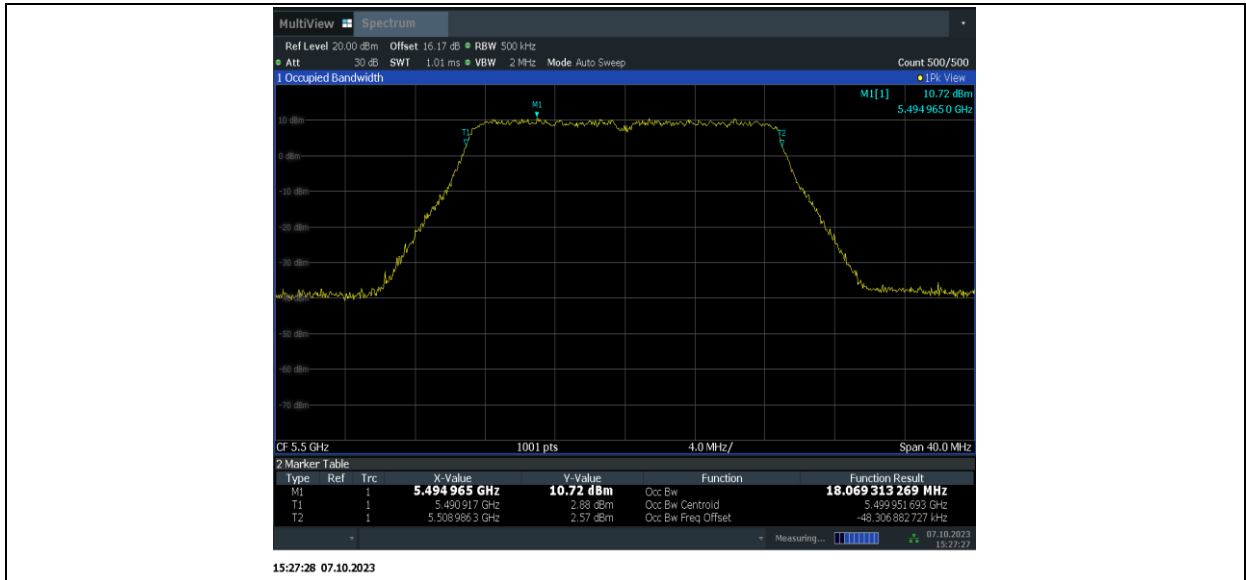


11N20MIMO_Ant9_5580

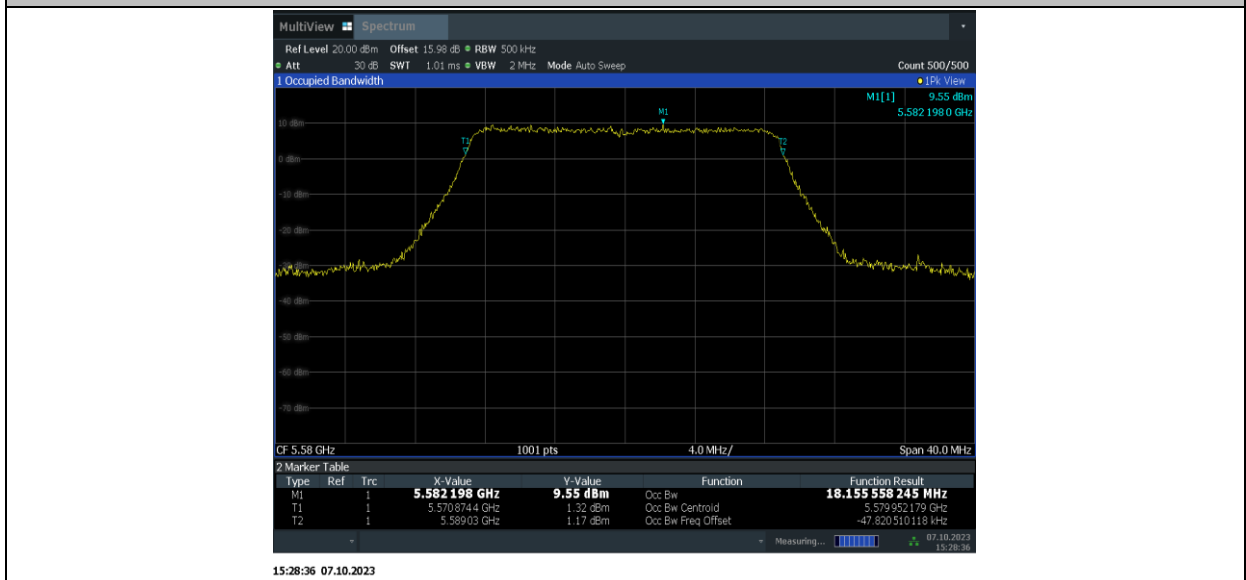


11N20MIMO_Ant15_5580

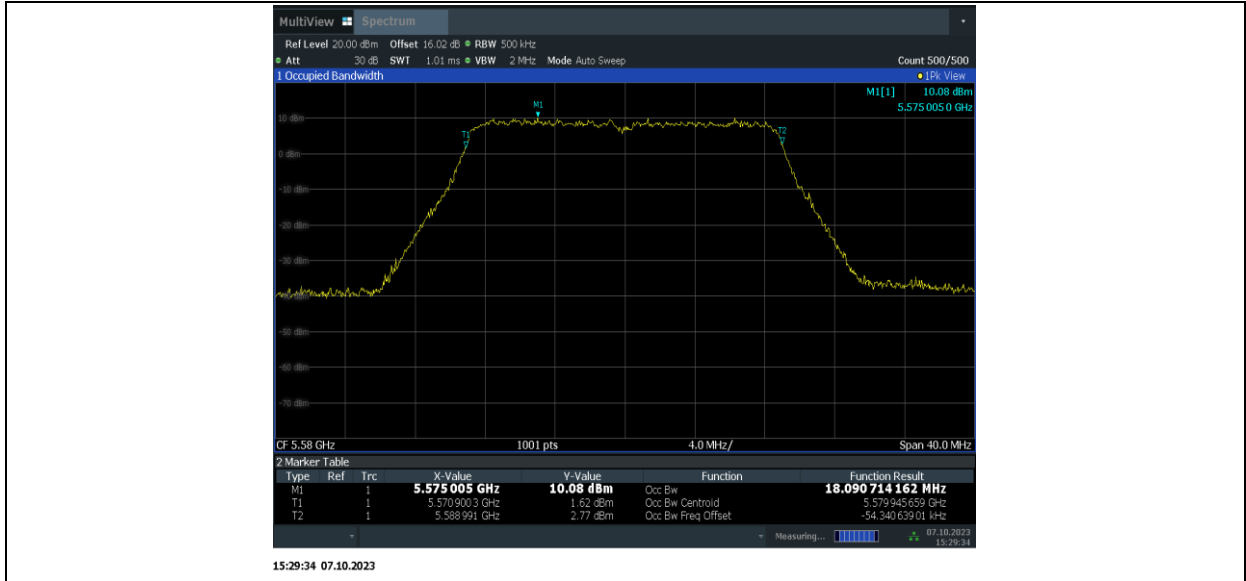


11N20MIMO_Ant9_5700

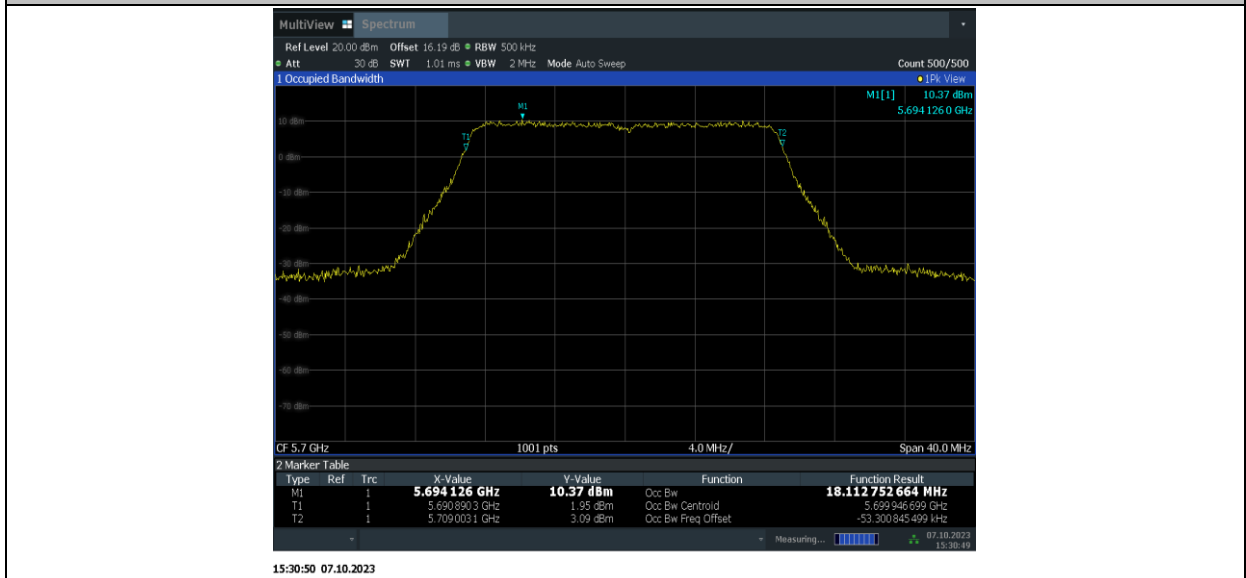


11N20MIMO_Ant15_5700

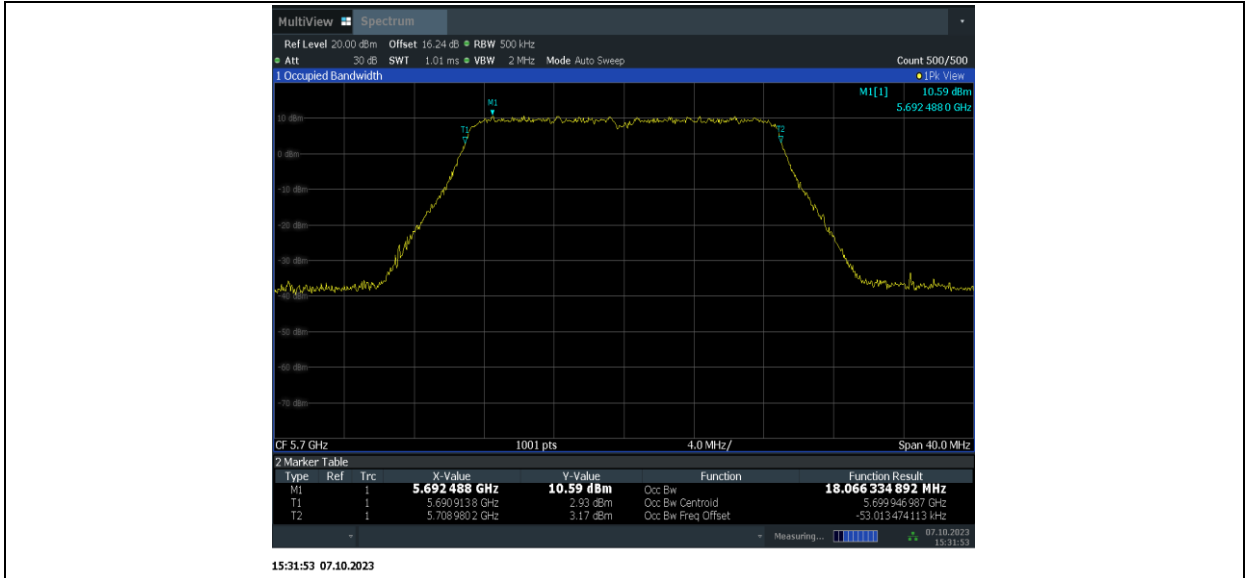


11N40MIMO_Ant9_5190

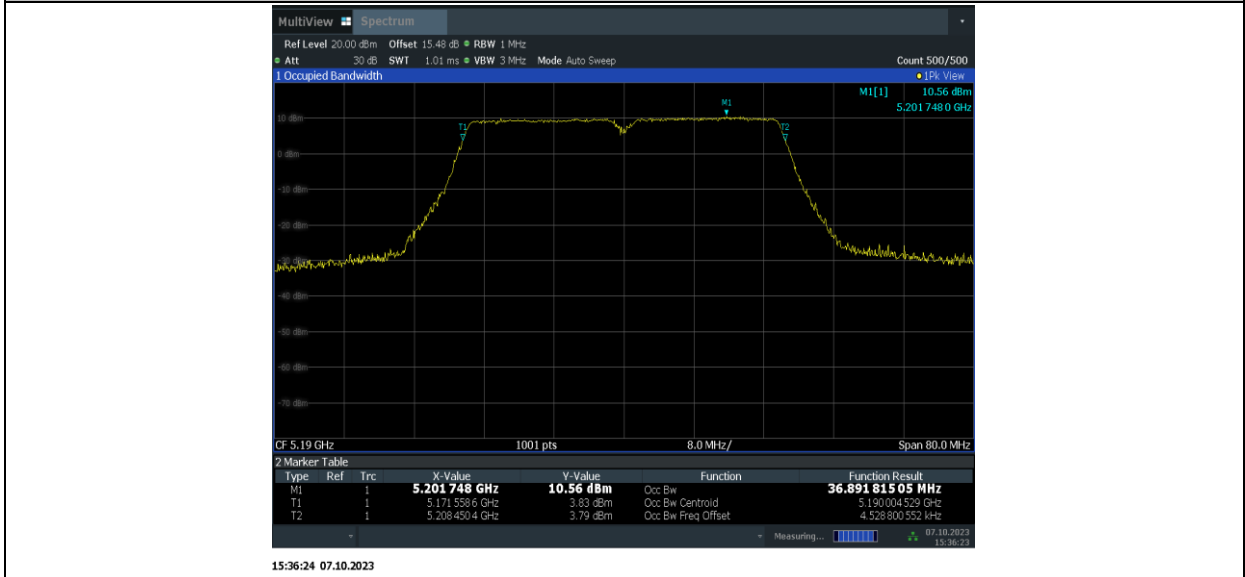


11N40MIMO_Ant15_5190

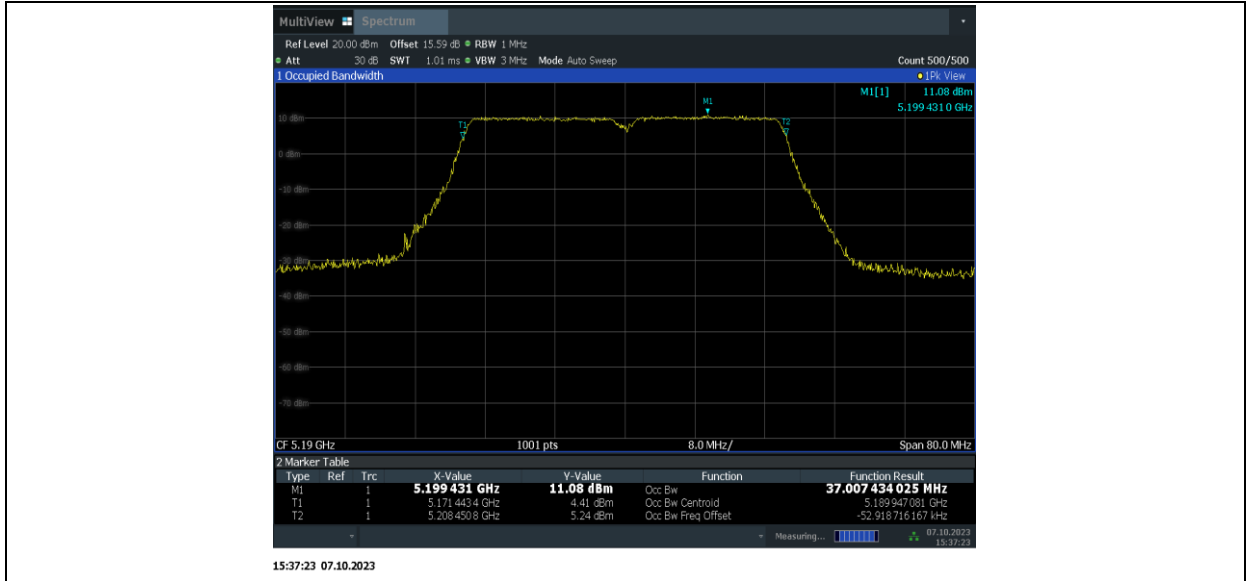


11N40MIMO_Ant9_5230

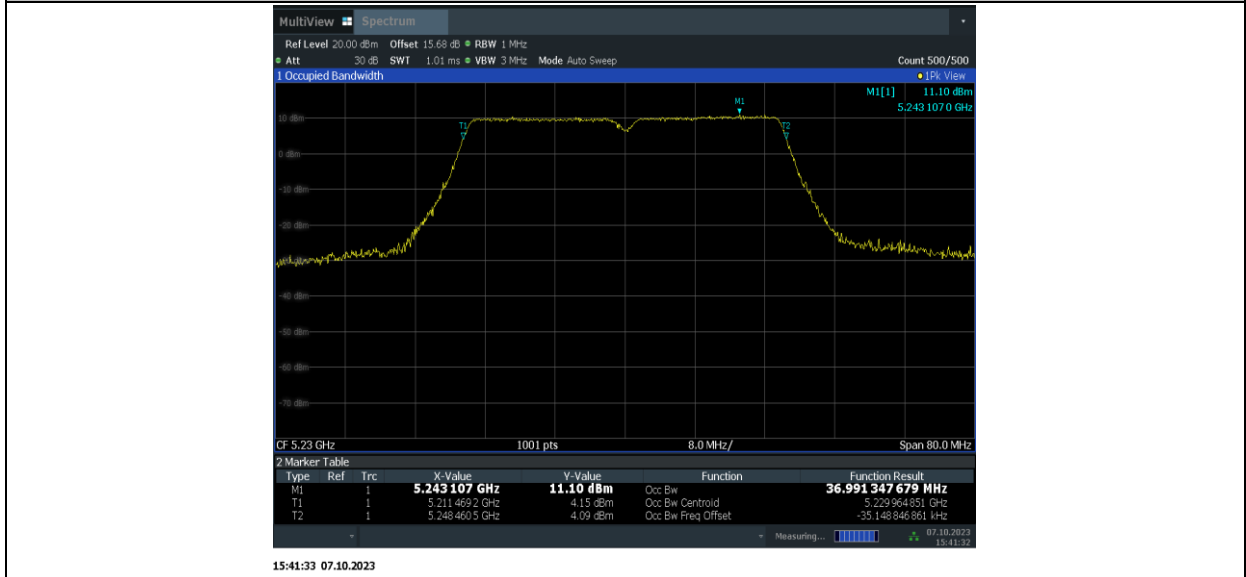


11N40MIMO_Ant15_5230

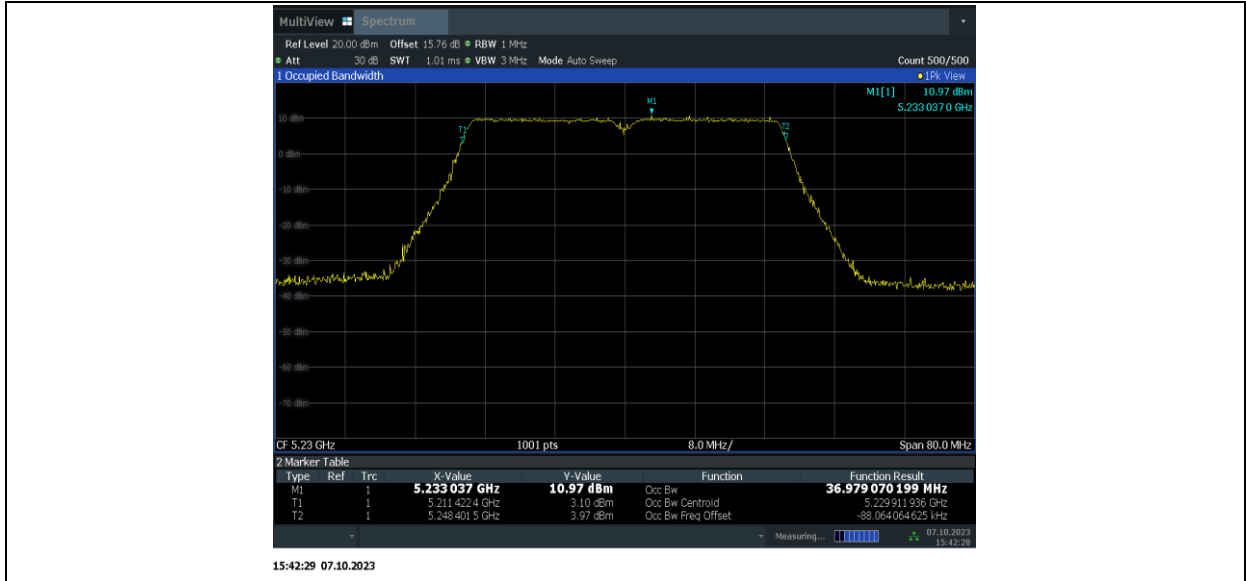


11N40MIMO_Ant9_5270

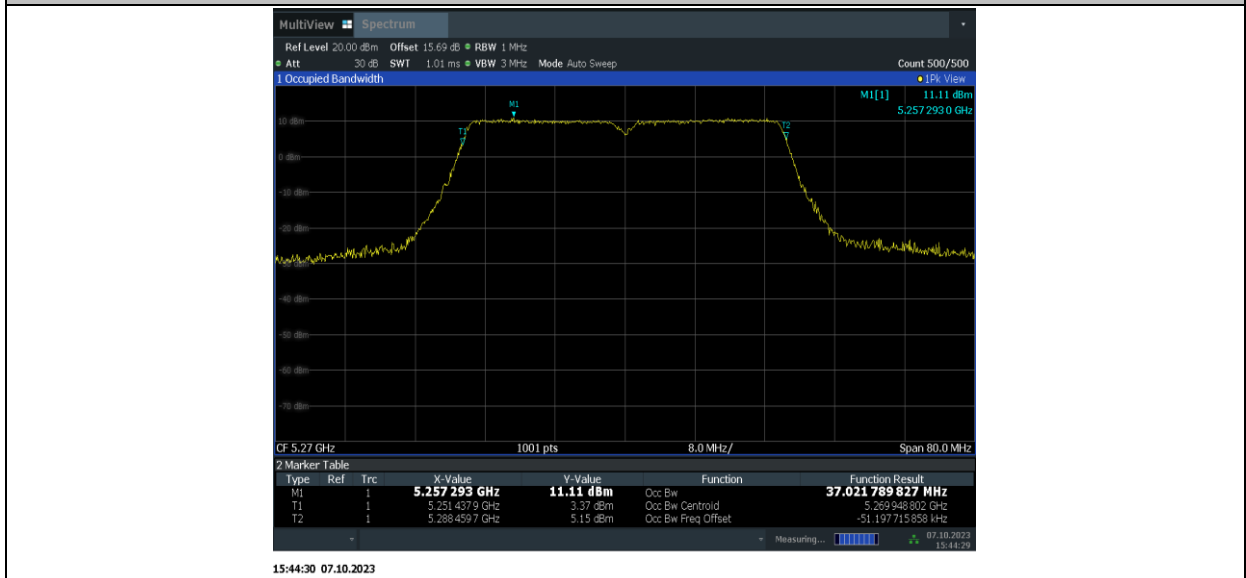


11N40MIMO_Ant15_5270

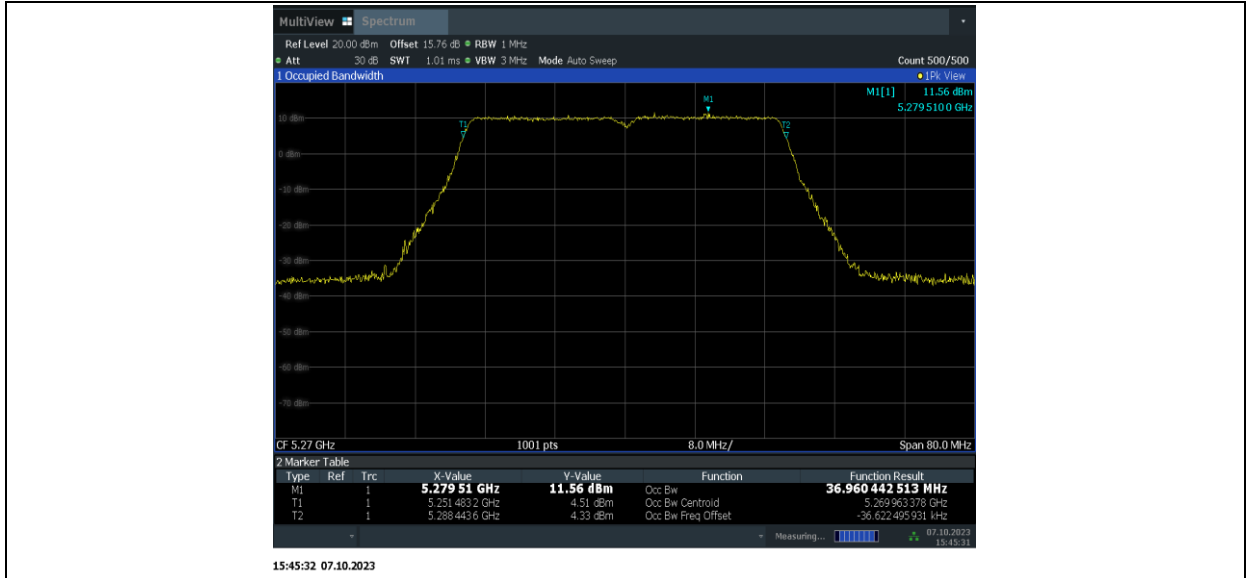


11N40MIMO_Ant9_5310

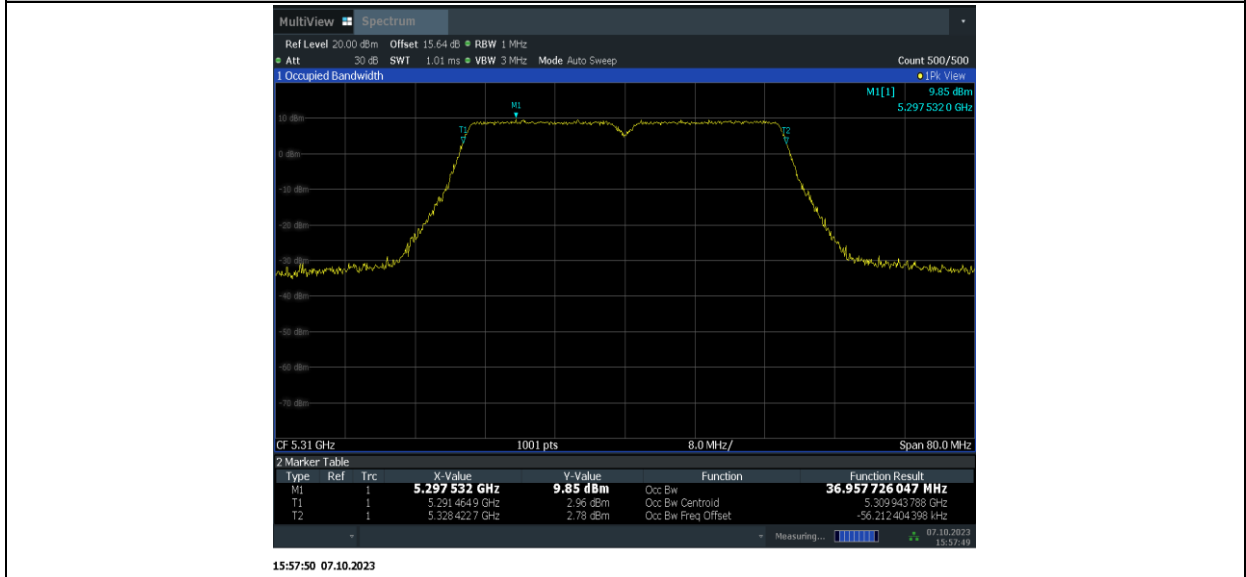


11N40MIMO_Ant15_5310

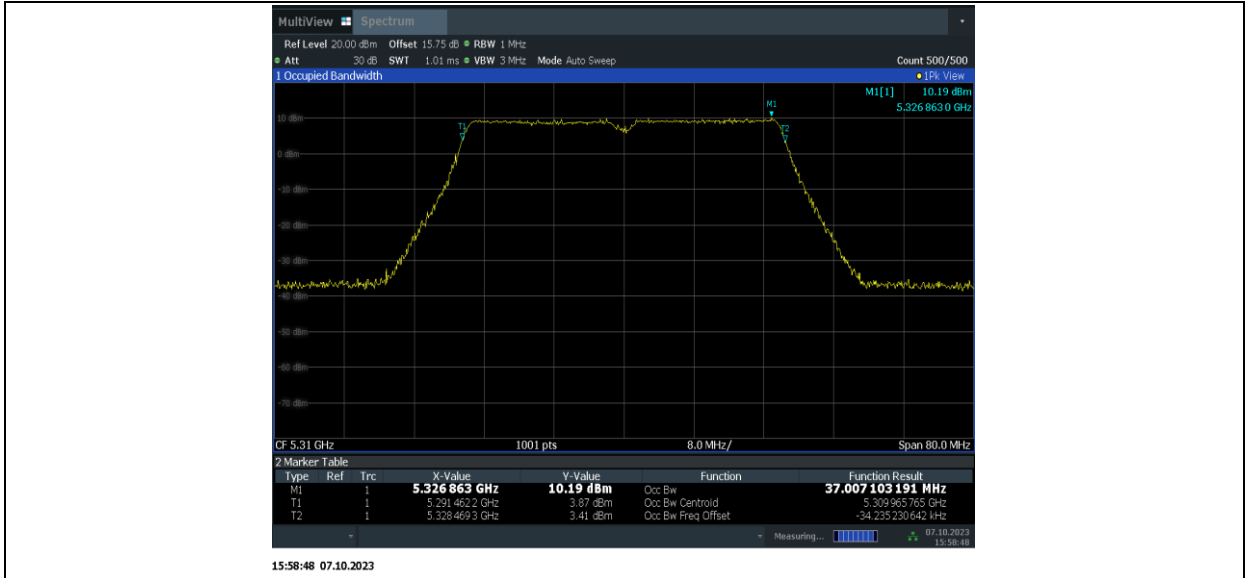


11N40MIMO_Ant9_5510

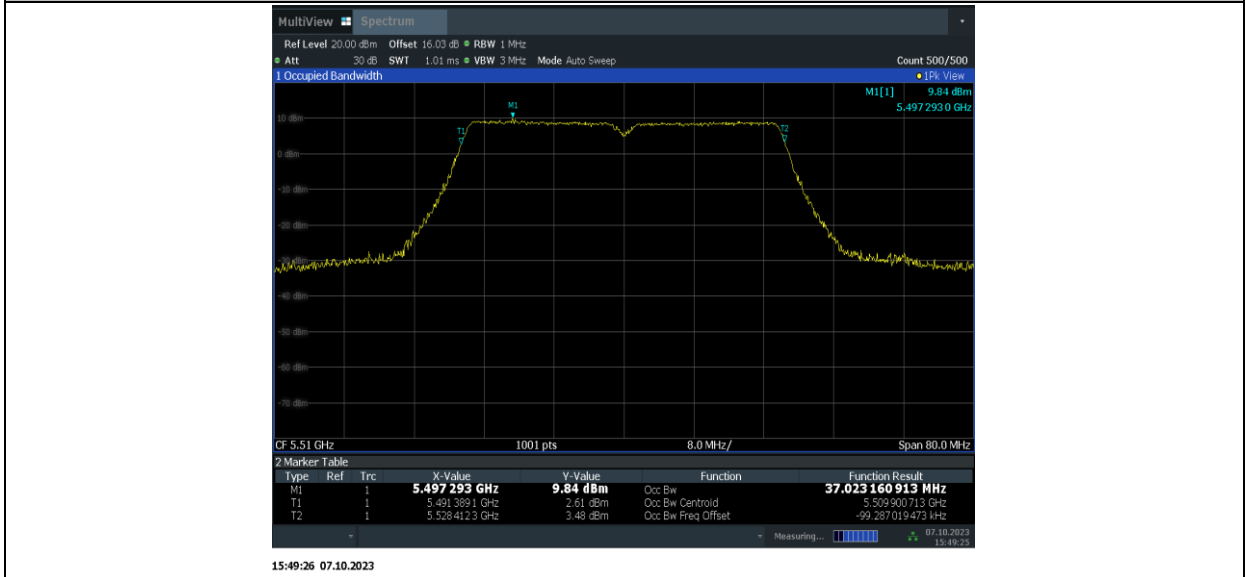


11N40MIMO_Ant15_5510

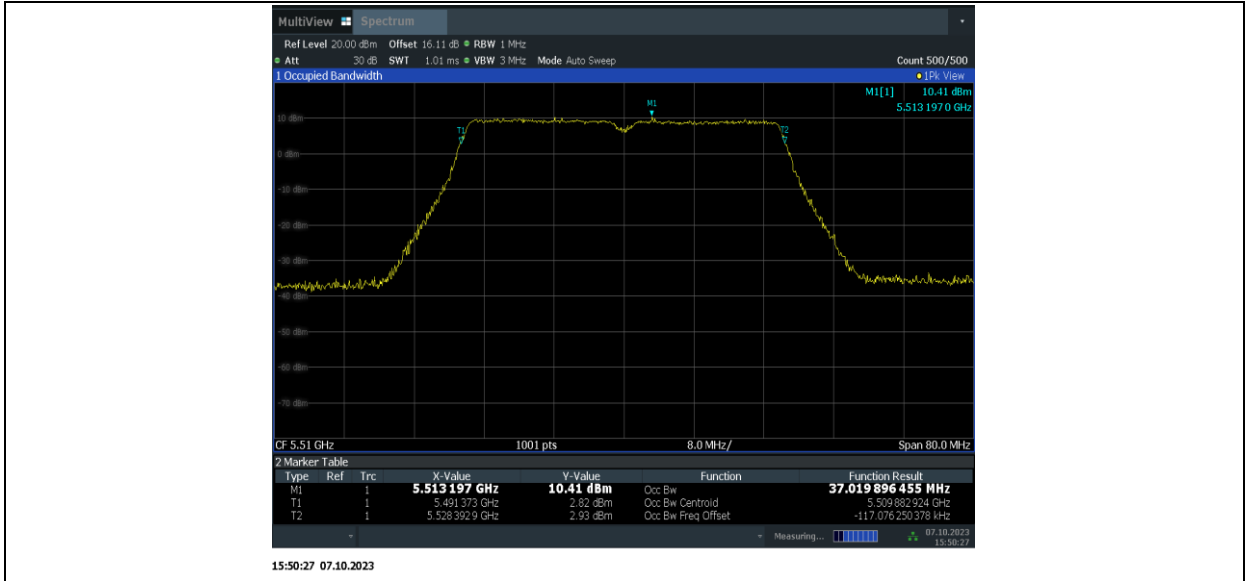


11N40MIMO_Ant9_5550

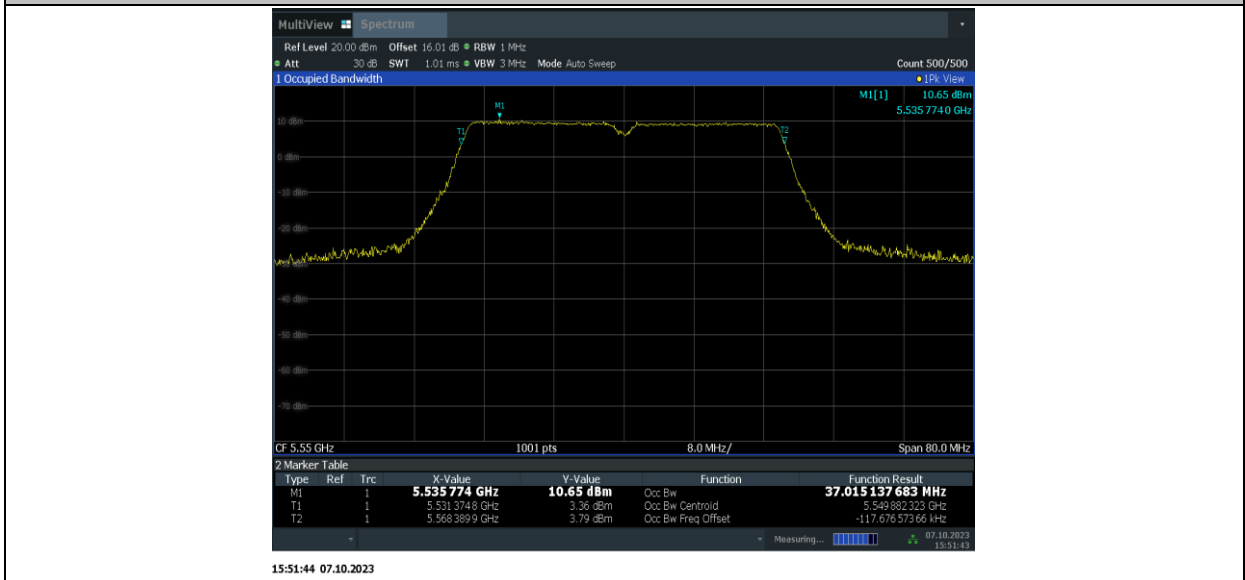


11N40MIMO_Ant15_5550

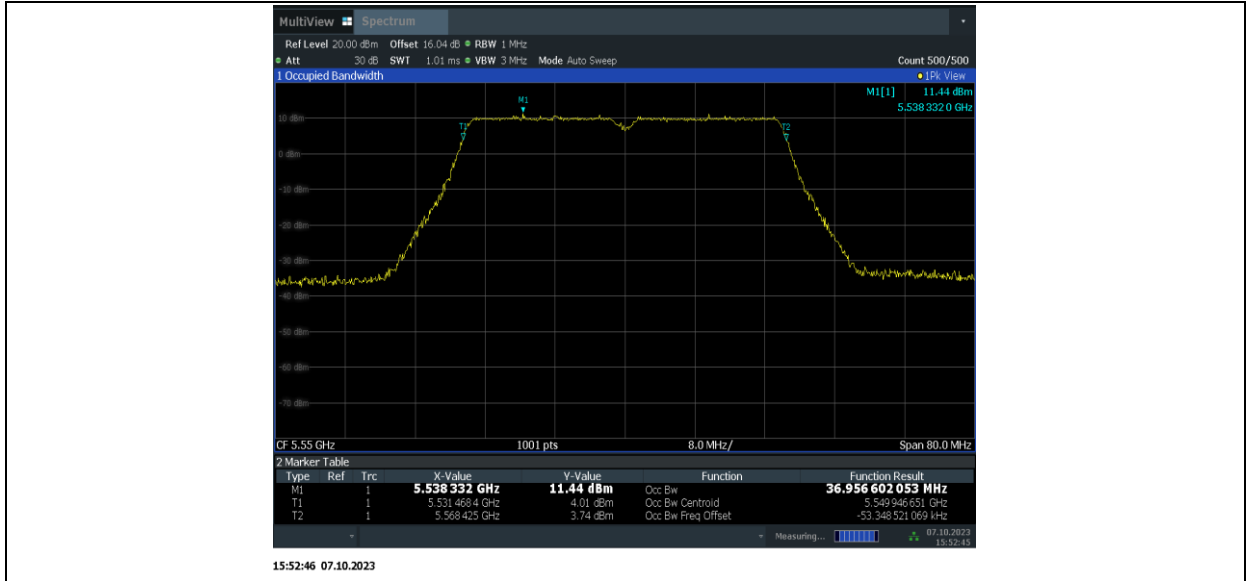


11N40MIMO_Ant9_5670

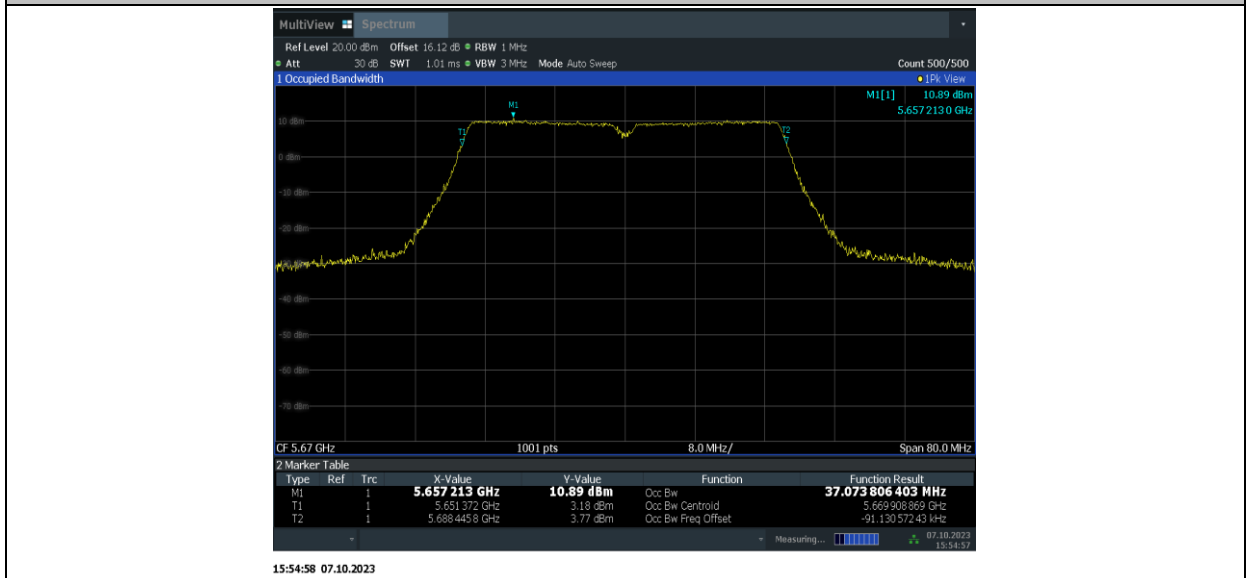

11N40MIMO_Ant15_5670

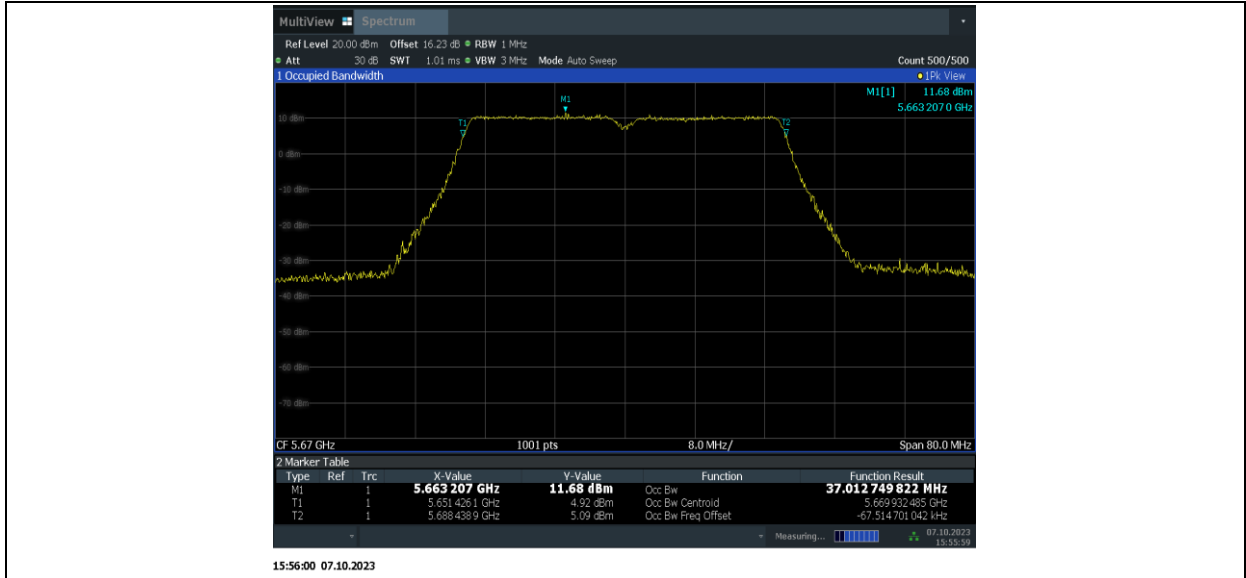


11AX160MIMO_Ant9_5250

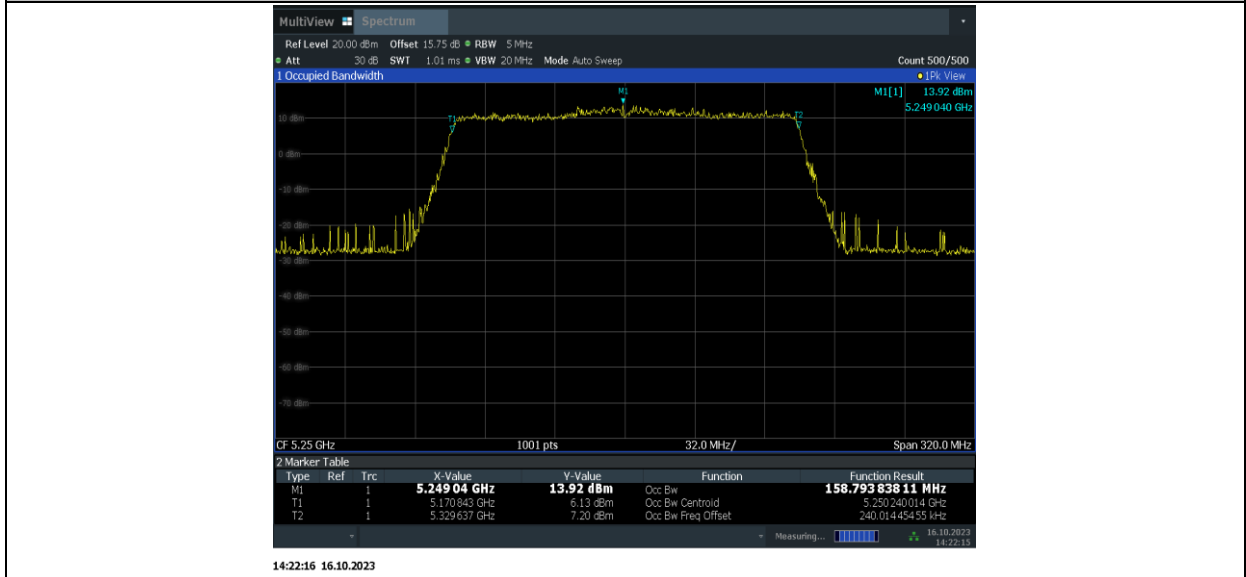


11AX160MIMO_Ant15_5250




11AX160MIMO_Ant9_5570

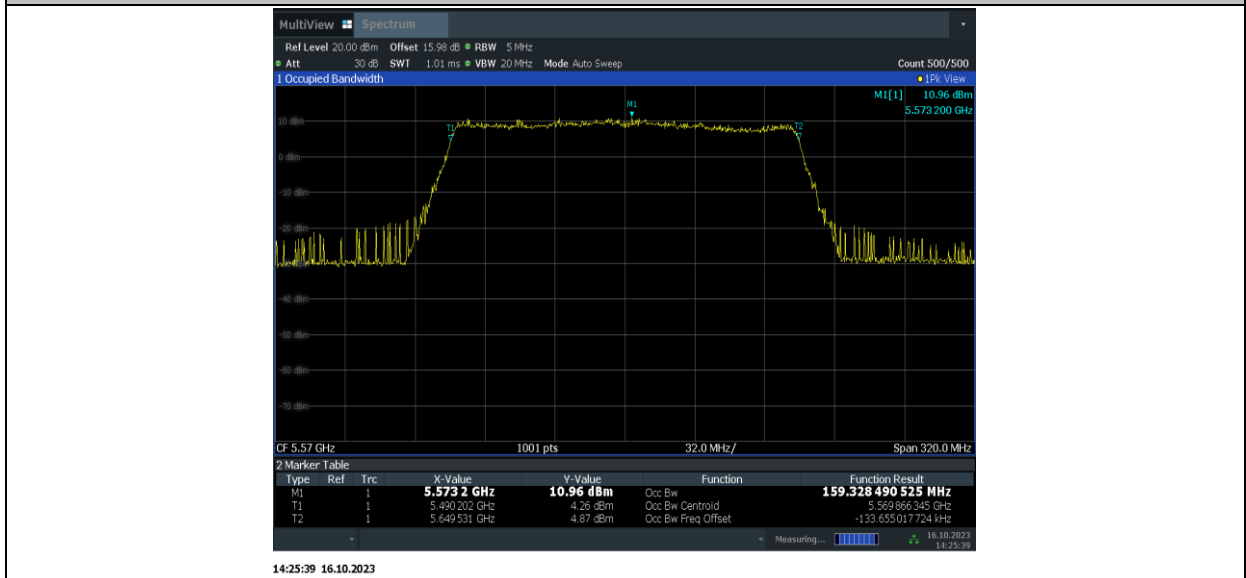


11AX160MIMO_Ant15_5570

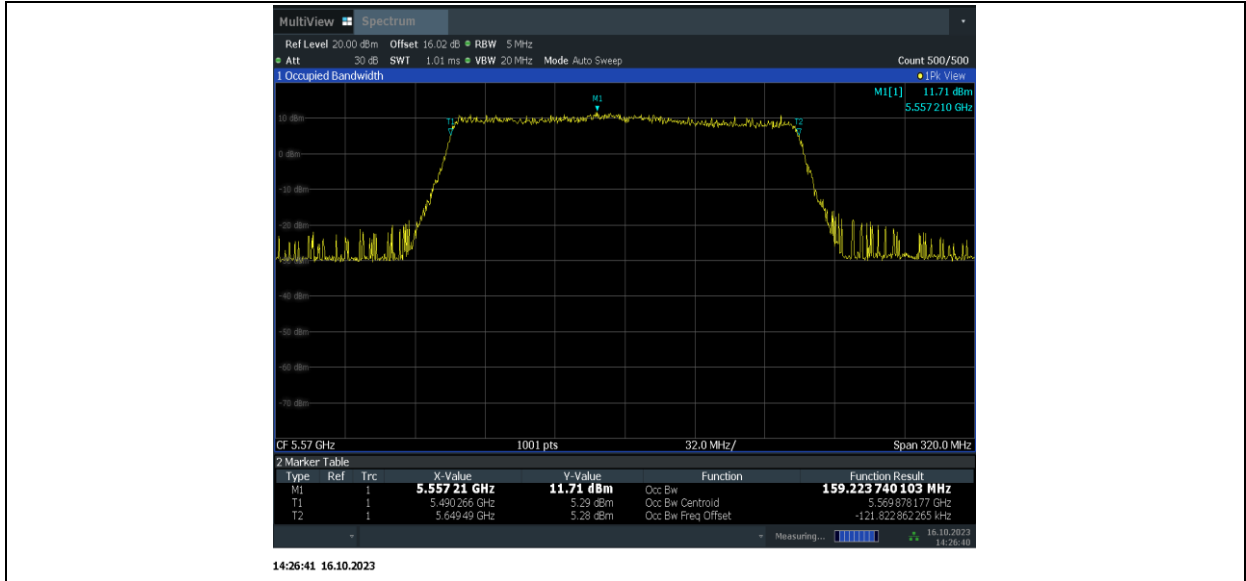


11BE80MIMO_Ant9_5210

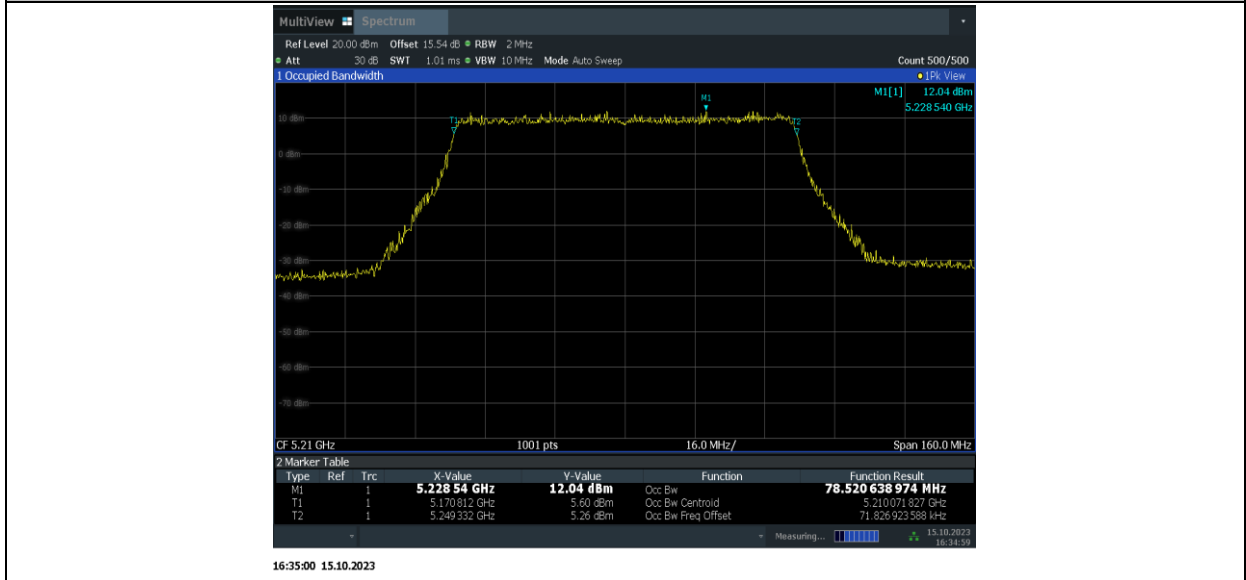


11BE80MIMO_Ant15_5210

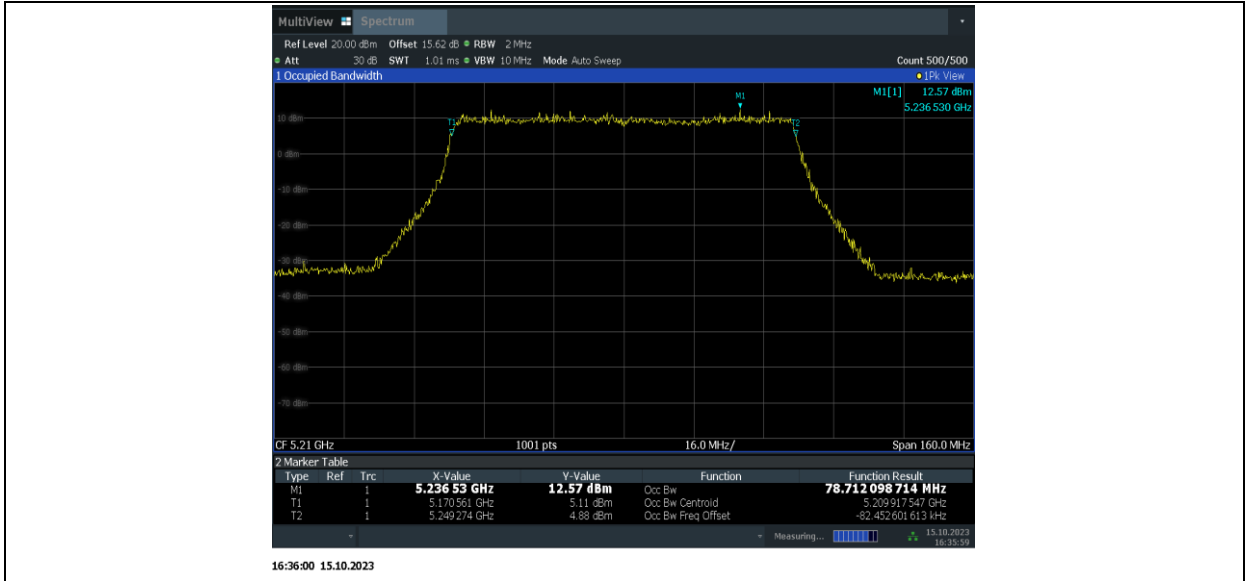


11BE80MIMO_Ant9_5290

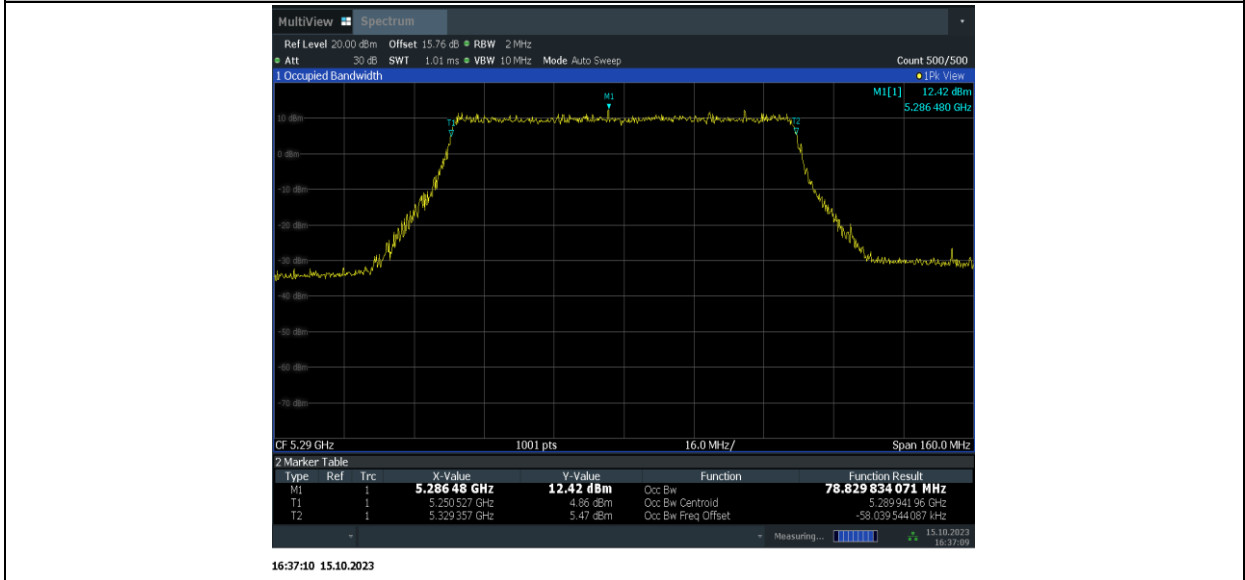


11BE80MIMO_Ant15_5290

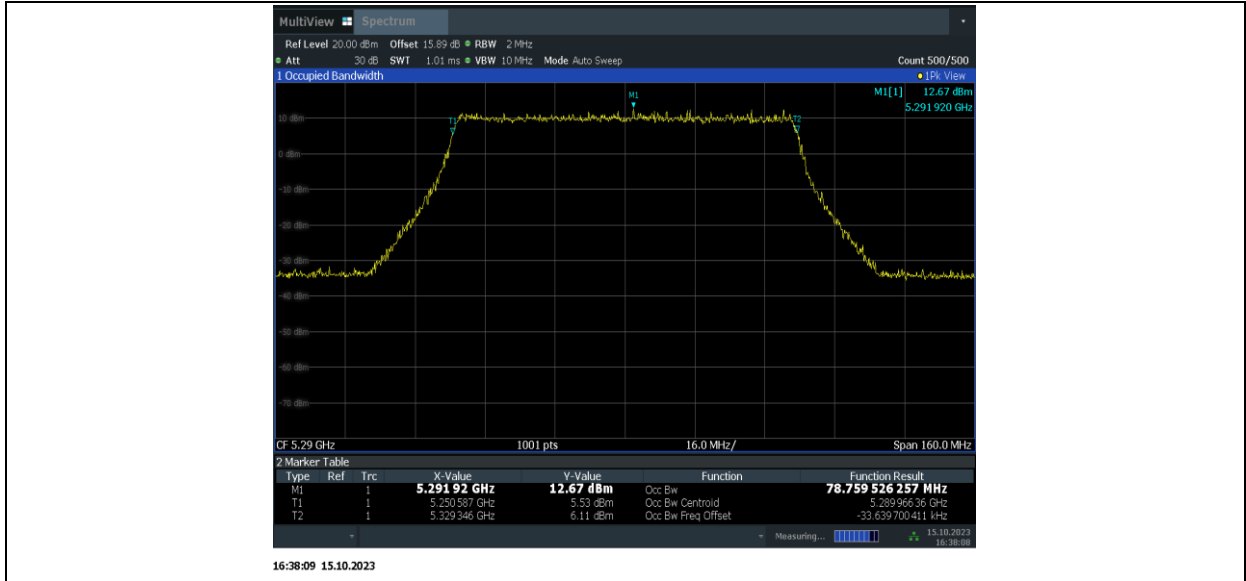


11BE80MIMO_Ant9_5530

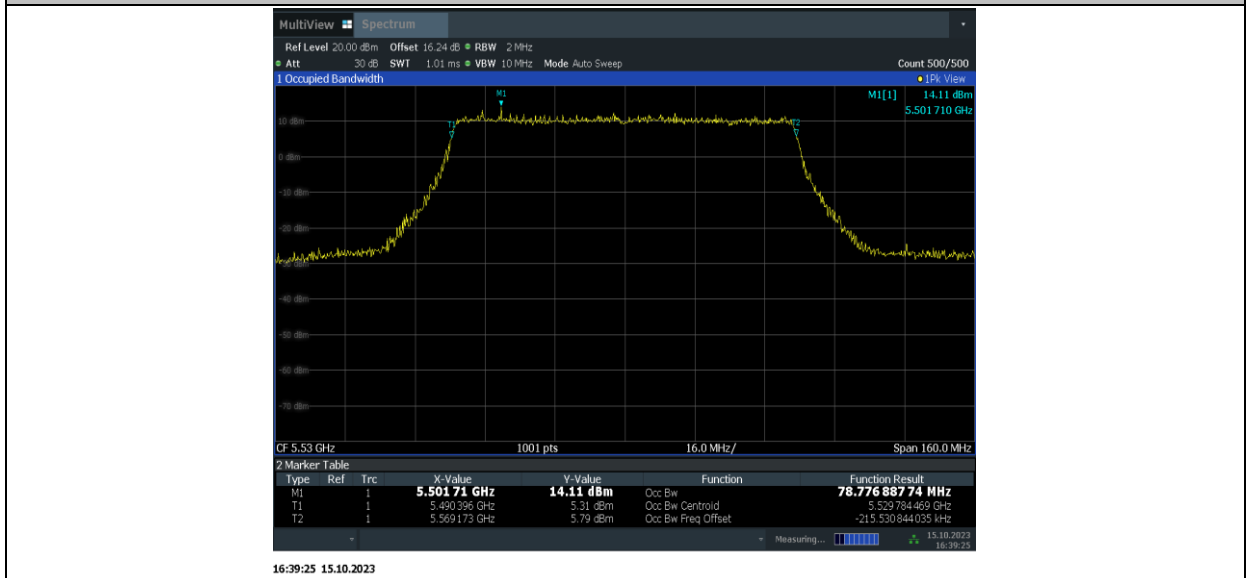


11BE80MIMO_Ant15_5530

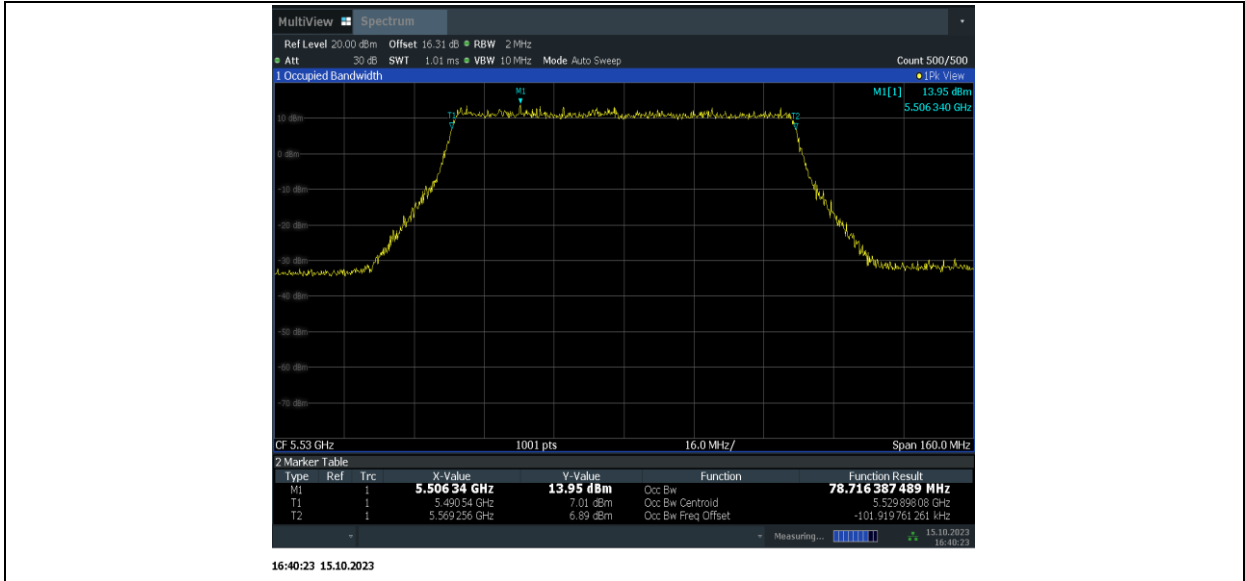

11BE80MIMO_Ant9_5610

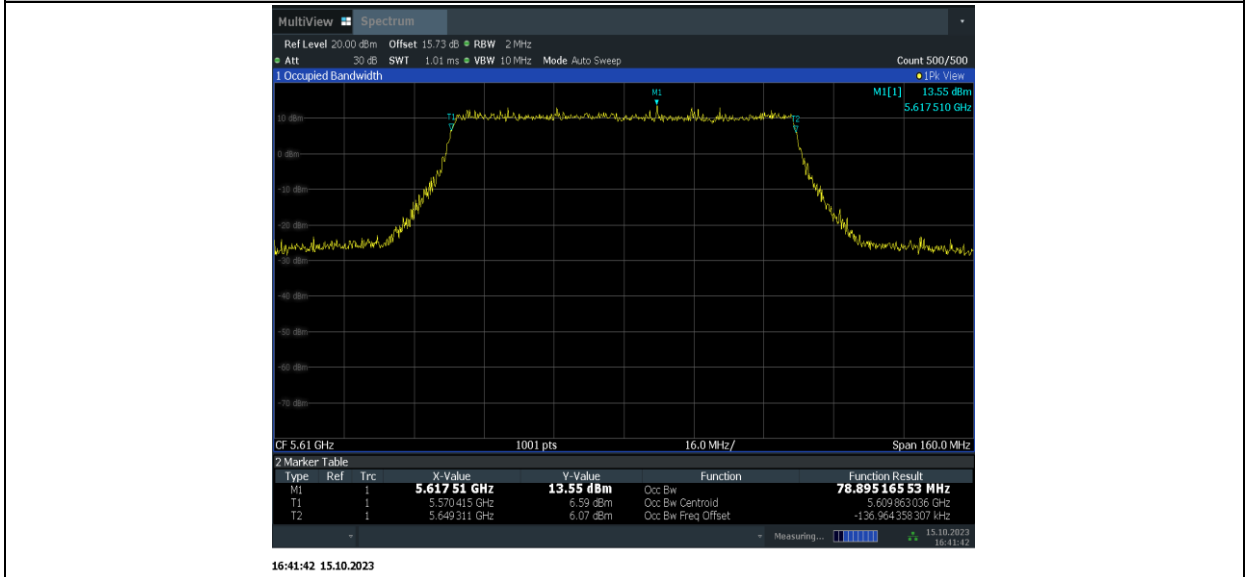

11BE80MIMO_Ant15_5610

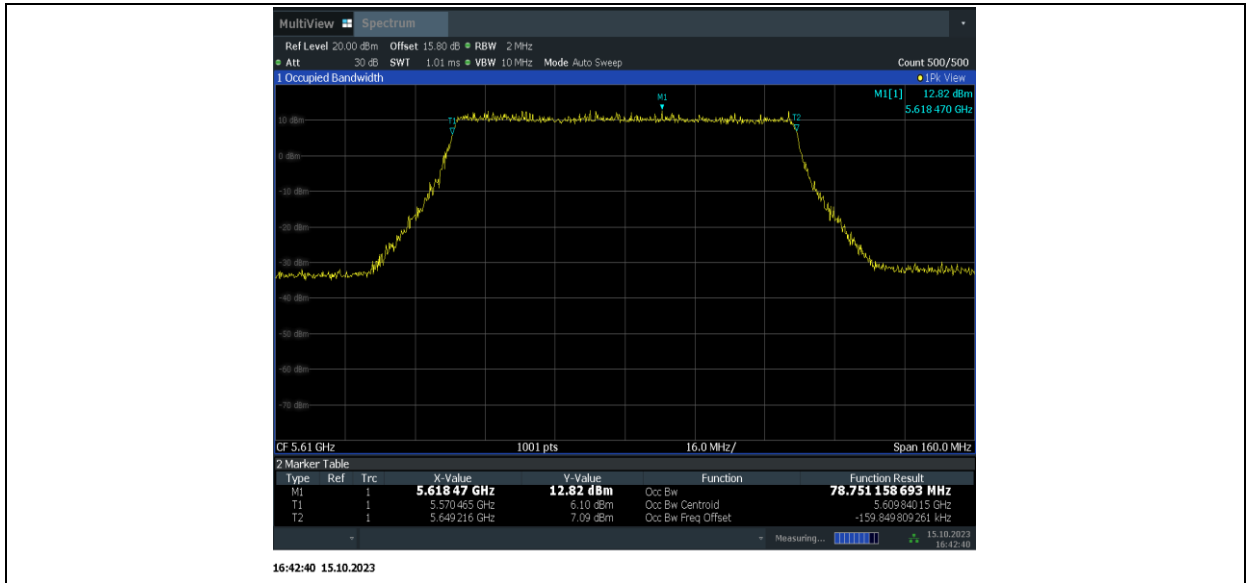

Conclusion: PASS

A.9. Power control

A Transmission Power Control mechanism is not required for systems with an e.i.r.p. of less than 27dBm (500 mW).

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26th day of June 2023.

Mr. Trace McInturff, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*** END OF REPORT BODY ***