




RF Exposure Report

(Part 2: Test Under Dynamic Transmission Condition)

FCC ID : 2ABZ2-OP23895
Equipment : Mobile Phone
Brand Name : ONEPLUS, ⁺
Model Name : CPH2655
Applicant : OnePlus Technology (Shenzhen) Co., Ltd.
18C02, 18C03, 18C04, and 18C05, Shum Yip Terra
Building, Binhe Avenue North, Futian District,
Shenzhen, Guangdong, P.R. China.

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Shenzhen)

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



History of this test report

| Report No. | Version | Description | Issued Date |
|------------|---------|-------------------------|---------------|
| FA461101B | 01 | Initial issue of report | Sep. 27, 2024 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



Contents

- 1 Introduction 5**
- 2 Tx Varying Transmission Test Cases and Test Proposal 6**
- 3 SAR Time Averaging Validation Test Procedures 9**
 - 3.1 Test sequence determination for validation9
 - 3.2 Test configuration selection criteria for validating Smart Transmit feature9
 - 3.2.1 Test configuration selection for time-varying Tx power transmission 10
 - 3.2.2 Test configuration selection for change in call 10
 - 3.2.3 Test configuration selection for change in technology/band 10
 - 3.2.4 Test configuration selection for change in DSI 11
 - 3.2.5 Test configuration selection for SAR exposure switching 11
 - 3.2.6 Test configuration selection for change in time window 12
 - 3.2.7 Test configuration selection for system level compliance continuity 12
 - 3.3 Test procedures for conducted power measurements 13
 - 3.3.1 Time-varying Tx power transmission scenario 13
 - 3.3.2 Change in call scenario 15
 - 3.3.3 Change in technology and band 16
 - 3.3.4 Change in antenna 17
 - 3.3.5 Change in DSI 17
 - 3.3.6 Change in time window 18
 - 3.3.7 SAR exposure switching 20
 - 3.3.8 Test procedure for System level compliance continuity 21
 - 3.4 Test procedure for time-varying SAR measurements 24
- 4 Test Configurations 26**
 - 4.1 WWAN (sub-6) transmission 26
- 5 Conducted Power Test Results for Sub-6 Smart Transmit Feature Validation 35**
 - 5.1 Measurement setup 35
 - 5.2 P_{limit} and P_{max} measurement results 39
 - 5.3 Time-varying Tx power measurement results 40
 - 5.3.1 WCDMA Band 5 41
 - 5.3.2 WCDMA Band 2 43
 - 5.3.3 LTE Band 66 45
 - 5.3.4 LTE Band 48 47
 - 5.3.5 5G NR FR1 n5 49
 - 5.3.6 5G NR FR1 n77 51
 - 5.3.7 WLAN 2.4GHz MIMO 53
 - 5.3.8 WLAN 5GHz MIMO 54
 - 5.4 Change in Call Test Results 55
 - 5.5 Change in technology/band test results 56
 - 5.6 Change in DSI test results 57
 - 5.7 Change in Time window / antenna switch test results 58
 - 5.7.1 Test case 1: transition from LTE Band 25 to LTE Band 48 (i.e., 100s to 60s), then back to LTE Band 25 58
 - 5.7.2 Test case 2: transition from LTE Band 48 to LTE Band 25 (i.e., 60s to 100s), then back to LTE Band 48 59
 - 5.8 Switch in SAR exposure test results (EN-DC Combination in the same time window) 60
 - 5.9 Switch in SAR exposure test results (EN-DC Combination in the different time window) 61



| | |
|---|-----------|
| 5.10 Switch in SAR exposure (WLAN DBS) test results (2.4GHz SISO + 5GHz SISO) | 62 |
| 5.11 System level compliance continuity test results | 63 |
| 6 SAR Test Results for Sub-6 Smart Transmit Feature Validation | 64 |
| 6.1 Measurement setup | 64 |
| 6.2 SAR measurement results for time-varying Tx power transmission scenario | 65 |
| 6.2.1 WCDMA Band 5 SAR test results..... | 66 |
| 6.2.2 WCDMA Band 2 SAR test results..... | 68 |
| 6.2.3 LTE Band 66 SAR test results | 70 |
| 6.2.4 LTE Band 48 SAR test results | 72 |
| 6.2.5 5G NR FR1 n5 SAR test results | 74 |
| 6.2.6 5G NR FR1 n77 SAR test results | 76 |
| 6.2.7 WLAN 2.4GHz SISO SAR test results | 78 |
| 6.2.8 WLAN 5GHz MIMO SAR test results..... | 79 |
| 7 Conclusions | 79 |
| Appendix A. Test Sequences | |
| Appendix B. Test Procedures for 5G NR + LTE Radio | |
| Appendix C. cDASY6 System Verification | |
| Appendix D. DASY Calibration Certificate | |
| Appendix E. Test Setup Photos | |



1 Introduction

The equipment under test (EUT) is a Mobile Phone (FCC ID: 2ABZ2-OP23895), it contains the Qualcomm modem supporting 2G/3G/4G/5G technologies and WLAN/BT technologies. Both of these modems are enabled with Qualcomm Smart Transmit feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement.

This purpose of the Part 2 report is to demonstrate the EUT complies with FCC RF exposure requirement under Tx varying transmission scenarios, thereby validity of Qualcomm Smart Transmit feature for FCC equipment authorization. It serves to compliment the Part 0 and Part 1 Test Reports to justify compliance per FCC.

The P_{limit} used in this report is determined in Part 0 and Part 1 report. Refer to Part 1 SAR report, for product description and terminology used in this report.

Per Qualcomm's document, embedded file system (EFS) version 23 products are required to be verified for Smart Tx generation for relevant MCC settings. It was confirmed that this DUT contains embedded file system (EFS) version 23 configured for Qualcomm® Smart Transmit™ 5.0 of GEN2 phase VI (do not support Antenna group) for Sub6, WLAN/BT with MCC settings for the US market.

<Test Lab Information>

| | |
|---------------------------------------|---|
| Test Firm Name | Sporton International Inc. (Shenzhen) |
| Test Firm Information | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 |
| FCC Designation No. | CN1256 |
| Test Firm Registration Number for FCC | 421272 |
| Test Site No. | SAR02-SZ |
| IMEI Code | Conducted: IMEI1: 866493070032099 IMEI2: 866493070032081 Radiated: IMEI: 866493070032453 |
| Date of Start during the Test | 9/5/2024 |
| Date of End during the Test | 9/15/2024 |
| Test Engineers | Johnny Chen/Bran Yin |



2 Tx Varying Transmission Test Cases and Test Proposal

To validate time averaging feature and demonstrate the compliance in Tx varying transmission conditions, the following transmission scenarios are covered in Part 2 test:

1. During a time-varying Tx power transmission: To prove that the Smart Transmit feature accounts for Tx power variations in time accurately.
2. During a call disconnect and re-establish scenario: To prove that the Smart Transmit feature accounts for history of past Tx power transmissions accurately.
3. During technology/band handover: To prove that the Smart Transmit feature functions correctly during transitions in technology/band.
4. During DSI (Device State Index) change: To prove that the Smart Transmit feature functions correctly during transition from one device state (DSI) to another.
5. During antenna (or beam) switch: To prove that the Smart Transmit feature functions correctly during transitions in antenna (such as AsDiv scenario) or beams (different antenna array configurations).
6. During time window switch: To prove that the Smart Transmit feature correctly handles the transition from one time window to another specified by FCC, and maintains the normalized time-averaged RF exposure to be less than FCC limit of 1.0 at all times.
7. SAR exposure switching between two active radios (radio1 and radio2): To prove that the Smart Transmit feature functions correctly and ensures total RF exposure compliance when exposure varies among SAR_radio1 only, SAR_radio1 + SAR_radio2, and SAR_radio2 only scenarios.
8. System level compliance continuity:
 - a. Within terrestrial networks (WWAN, WLAN, BT, etc.): To demonstrate the time averaged RF exposure compliance continuity during technology transition in both single-radio and multi-radio transmission scenarios and under both modes (i.e., ON and airplane) of WWAN modem while the USB is disconnected.

As described in Part 0 report, the RF exposure is proportional to the Tx power for a SAR -characterized wireless device. Thus, feature validation in Part 2 can be effectively performed through conducted and radiated power measurement. Therefore, the compliance demonstration under dynamic transmission conditions and feature validation are done in conducted/radiated power measurement setup for transmission scenario 1 through 8.

To add confidence in the feature validation, the time-averaged SAR measurements are also performed but only performed for transmission scenario 1 to avoid the complexity in SAR measurement (such as, for scenario 3 requiring change in SAR probe calibration file to accommodate different bands and/or tissue simulating liquid).

The strategy for testing in Tx varying transmission condition is outlined as follows:

- Demonstrate the total RF exposure averaged over FCC defined time windows does not exceed FCC's SAR limits, through time-averaged power measurements
 - Measure conducted Tx power (for $f < 6\text{GHz}$) versus time, and radiated Tx power (EIRP for $f > 10\text{GHz}$) versus time.
 - Convert it into RF exposure and divide by respective FCC limits to get normalized exposure versus time.
 - Perform running time-averaging over FCC defined time windows.
 - Demonstrate that the total normalized time-averaged RF exposure is less than 1 for all transmission scenarios at all times.

Mathematical expression:

- For sub-6 transmission only:

$$1g_or_10gSAR(t) = \frac{conducted_Tx_power(t)}{conducted_Tx_power_P_{limit}} * 1g_or_10gSAR_P_{limit} \quad (1a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g_or_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (1b)$$

where, $conducted_Tx_power(t)$, $conducted_Tx_power_P_{limit}$, and $1g_or_10gSAR_P_{limit}$ correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at P_{limit} , and measured $1gSAR$ or $10gSAR$ values at P_{limit} corresponding to sub-6 transmission.

- Demonstrate the total RF exposure averaged over FCC defined time windows does not exceed FCC's SAR limits, through time-averaged SAR measurements. Note as mentioned earlier, this measurement is performed for transmission scenario 1 only.
 - For sub-6 transmission only, measure instantaneous SAR versus time; for LTE+ sub6 NR transmission, request low power (or all-down bits) on LTE so that measured SAR predominantly corresponds to sub6 NR.
 - Convert it into RF exposure and divide by respective FCC limits to obtain normalized exposure versus time.
 - Perform time averaging over FCC defined time window.
 - Demonstrate that the total normalized time-averaged RF exposure is less than 1 for transmission scenario 1 at all times.

Mathematical expression:

- For sub-6 transmission only:

$$1g_or_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_P_{limit}} * 1g_or_10gSAR(t)_P_{limit} \quad (3a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g_or_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (3b)$$

where, $pointSAR(t)$, $pointSAR_P_{limit}$, and $1g_or_10gSAR_P_{limit}$ correspond to the measured instantaneous point SAR, measured point SAR at P_{limits} , and measured 1gSAR or 10gSAR values at P_{limit} corresponding to sub-6 transmission.

NOTE: cDASY6 measurement system by Schmid & Partner Engineering AG (SPEAG) of Zurich, Switzerland measures relative E-field, and provides ratio of $\frac{[pointE(t)]^2}{[pointE_input.power.limit]^2}$ versus time.

3 SAR Time Averaging Validation Test Procedures

This chapter provides the test plan and test procedure for validating Qualcomm Smart Transmit feature for sub-6 transmission. The 100 seconds time window for operating $f < 3\text{GHz}$ is used as an example to detail the test procedures in this chapter.

3.1 Test sequence determination for validation

Following the FCC recommendation, two test sequences having time-variation in Tx power are predefined for sub-6 ($f < 6\text{GHz}$) validation:

- Test sequence 1: request EUT's Tx power to be at maximum power, measured P_{max}^{\dagger} , for 80s, then requesting for half of the maximum power, i.e., measured $P_{max}/2$, for the rest of the time.
- Test sequence 2: request EUT's Tx power to vary with time. This sequence is generated relative to measured P_{max} , measured P_{limit} and calculated $P_{reserve}$ (= measured P_{limit} in dBm - Reserve_power_margin in dB) of EUT based on measured P_{limit} .

The details for generating these two test sequences is described and listed in Appendix A.

NOTE: For test sequence generation, “measured P_{limit}” and “measured P_{max}” are used instead of the “P_{limit}” specified in EFS entry and “P_{max}” specified for the device, because Smart Transmit feature operates against the actual power level of the “P_{limit}” that was calibrated for the EUT. The “measured P_{limit}” accurately reflects what the feature is referencing to, therefore, it should be used during feature validation testing. The RF tune up and device-to-device variation are already considered in Part 0 report prior to determining P_{limit}.

3.2 Test configuration selection criteria for validating Smart Transmit feature

For validating Smart Transmit feature, this section provides a general guidance to select test cases. In practice, an adjustment can be made in test case selection. The justification/clarification may be provided.

3.2.1 Test configuration selection for time-varying Tx power transmission

The Smart Transmit time averaging feature operation is independent of bands, modes, and channels for a given technology. Hence, validation of Smart Transmit in one band/mode/channel per technology is sufficient.

The criteria for the selection are based on the P_{limit} values determined in Part 1 report. Select the band in each supported technology that corresponds to the P_{limit} value that is less than P_{max} for validating Smart Transmit.

Note this test is designed for single radio transmission scenario. If UE supports sub6 NR in both non-standalone (NSA) and standalone (SA) modes, then validation in time-varying Tx power transmission scenario described in this section needs to be performed in SA mode. Otherwise, it needs to be performed in NSA mode with LTE anchor set to low power. The choice between SA and NSA mode needs to also take into account the selection criteria described below. In general, one mode out of the two modes (NSA or SA) is sufficient for this test.

3.2.2 Test configuration selection for change in call

The criteria to select a test configuration for call-drop measurement is:

- Select technology/band with least P_{limit} among all supported technologies/bands, and select the radio configuration (e.g., # of RBs, channel#) in this technology/band that corresponds to the highest *measured* 1gSAR at P_{limit} listed in Part 1 report.
- In case of multiple bands having same least P_{limit} , then select the band having the highest *measured* 1gSAR at P_{limit} in Part 1 report.

This test is performed with the EUT's Tx power requested to be at maximum power, the above band selection will result in Tx power enforcement (i.e., EUT forced to have Tx power at $P_{reserve}$) for longest duration in one FCC defined time window. The call change (call drop/reestablish) is performed during the Tx power enforcement duration (i.e., during the time when EUT is forced to have Tx power at $P_{reserve}$). One test is sufficient as the feature operation is independent of technology and band.

3.2.3 Test configuration selection for change in technology/band

The selection criteria for this measurement is, for a given antenna, to have EUT switch from a technology/band with lowest P_{limit} within the technology group (in case of multiple bands having the same P_{limit} , then select the band with highest *measured* 1gSAR at P_{limit}) to a technology/band with highest P_{limit} within the technology group, in case of multiple bands having the same P_{limit} , then select the band with lowest *measured* 1gSAR at P_{limit} in Part 1 report, or vice versa.

This test is performed with the EUT's Tx power requested to be at maximum power, the technology/band switch is performed during Tx power enforcement duration (i.e., during the time when EUT is forced to have Tx power at $P_{reserve}$).

3.2.4 Test configuration selection for change in DSI

The criteria to select a test configuration for DSI change test is

- Select a technology/band having the $P_{limit} < P_{max}$ within any technology and DSI group, and for the same technology/band having a different P_{limit} in any other DSI group. Note that the selected DSI transition need to be supported by the device.

This test is performed with the EUT's Tx power requested to be at maximum power in selected technology/band, and DSI change is conducted during Tx power enforcement duration (i.e., during the time when EUT is forced to have Tx power at $P_{reserve}$).

3.2.5 Test configuration selection for SAR exposure switching

If supported, the test configuration for SAR exposure switching should cover

1. SAR exposure switch when two active radios are in the same time window
2. SAR exposure switch when two active radios are in different time windows. One test with two active radios in any two different time windows is sufficient as Smart Transmit operation is the same for RF exposure switch in any combination of two different time windows.

The Smart Transmit time averaging operation is independent of the source of SAR exposure (for example, LTE vs. Sub6 NR) and ensures total time-averaged RF exposure compliance. Hence, validation of Smart Transmit in any one simultaneous SAR transmission scenario (i.e., one combination for LTE + Sub6 NR transmission) is sufficient, where the SAR exposure varies among SAR_{radio1} only, SAR_{radio1} + SAR_{radio2}, and SAR_{radio2} only scenarios.

The criteria to select a test configuration for validating Smart Transmit feature during SAR exposure switching scenarios is

- Select any two < 6GHz technologies/bands that the EUT supports simultaneous transmission (for example, LTE+ Sub6 NR).
- Among all supported simultaneous transmission configurations, the selection order is
 1. select one configuration where both P_{limit} of radio1 and radio2 is less than their corresponding P_{max} , preferably, with different P_{limits} . If this configuration is not available, then,
 2. select one configuration that has P_{limit} less than its P_{max} for at least one radio. If this can not be found, then,
 3. select one configuration that has P_{limit} of radio1 and radio2 greater than P_{max} but with least ($P_{limit} - P_{max}$) delta.

SAR exposure switch validation with one simultaneous transmission scenario (i.e., either FR1 NSA or LTE inter-band ULCA) is sufficient as Smart Transmit operation is the same.

3.2.6 Test configuration selection for change in time window

FCC specifies different time window for time averaging based on operation frequency. The criteria to select a test configuration for validating Smart Transmit feature and demonstrating the compliance during the change in time window is

- Select any technology/band that has operation frequency classified in one time window defined by FCC (such as 100-seconds time window), and its corresponding P_{limit} is less than P_{max} if possible.
- Select the 2nd technology/band that has operation frequency classified in a different time window defined by FCC (such as 60-seconds time window), and its corresponding P_{limit} is less than P_{max} if possible.
- It is preferred both P_{limit} values of two selected technology/band less than corresponding P_{max} , but if not possible, at least one of technologies/bands has its P_{limit} less than P_{max} .

This test is performed with the EUT's Tx power requested to be at maximum power in selected technology/band. Test for one pair of time windows selected is sufficient as the feature operation is the same.

3.2.7 Test configuration selection for system level compliance continuity

3.2.7.1 Selection criteria for WWAN, WLAN, BT system level test

The purpose of system level compliance test is to demonstrate the time-averaged RF exposure compliance continuity in the following scenarios while the USB is disconnected:

1. Across technology switch
2. During transition from single technology to multi-technology
3. In transition when WWAN went from ON to airplane mode
4. Active WLAN radio and/or Bluetooth (BT) radio with WWAN in airplane mode
5. Time window transition when WWAN in airplane mode
6. In transition when WWAN went from airplane mode to ON.

Note: Technology in this section refers to WWAN, WLAN or BT

The selection criteria for radios to be tested is to select a radio which has the largest P_{max}/P_{limit} ratio among all configurations supported (including SISO, MIMO, DBS, SISO+MIMO or DBS+MIMO whichever appropriate) within each technology and within the same antenna group.

3.3 Test procedures for conducted power measurements

This section provides general conducted power measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 2. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

3.3.1 Time-varying Tx power transmission scenario

This test is performed with the two pre-defined test sequences described in Section 3.1 for all the technologies and bands selected in Section 3.2.1. The purpose of the test is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged SAR (corresponding time-averaged Tx power) does not exceed the FCC limit at all times (see Eq. (1a) and (1b)).

Test procedure

1. Measure P_{max} , measure P_{limit} and calculate $P_{reserve}$ (= measured P_{limit} in dBm – *Reserve_power_margin* in dB) and follow Section 3.1 to generate the test sequences for all the technologies and bands selected in Section 3.2.1. Both test sequence 1 and test sequence 2 are created based on measured P_{max} and measured P_{limit} of the EUT. Test condition to measure P_{max} and P_{limit} is:
 - Measure P_{max} with Smart Transmit disabled and callbox set to request maximum power.
 - Measure P_{limit} with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
 - Measure $P_{reserve}$ via test sequence 1 measurement.
2. Set the EUT to the intended Smart Transmit exposure mode, and then set callbox requesting the EUT's Tx power to be at pre-defined test sequence 1, measure and record Tx power versus time, and then convert the conducted Tx power into 1gSAR or 10gSAR value (see Eq. (1a)) using measured P_{limit} from above Step 1. Perform running time average to determine time-averaged power and 1gSAR or 10gSAR versus time as illustrated in Figure 3-1 where using 100-seconds time window as an example.

NOTE: In Eq.(1a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at P_{limit} for the corresponding technology/band/antenna/DSI reported in Part 1 report.

NOTE: For an easier computation of the running time average, 0 dBm can be added at the beginning of the test sequences the length of the responding time window, for example, add 0dBm for 100-seconds so the running time average can be directly performed starting with the first 100-seconds data using excel spreadsheet. This technique applies to all tests performed in this Part 2 report for easier time-averaged computation using excel spreadsheet.

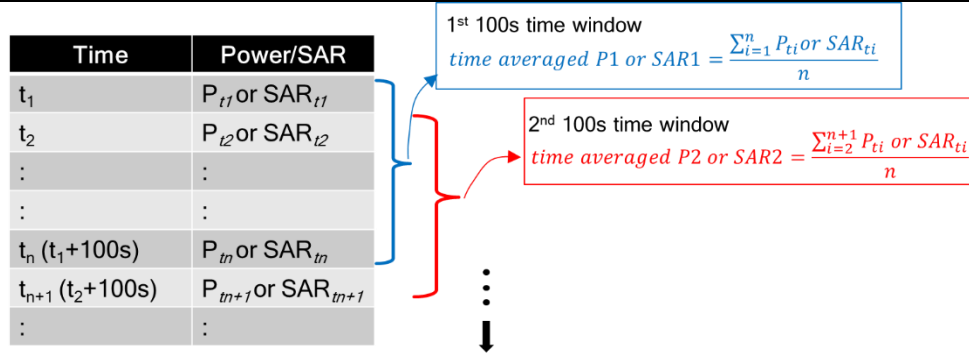


Figure 3-1 100s running average illustration

3. Make one plot containing:
 - a. Instantaneous Tx power versus time measured in Step 2,
 - b. Requested Tx power used in Step 2 (test sequence 1),
 - c. Computed time-averaged power versus time determined in Step 2,
 - d. Time-averaged power limit (corresponding to FCC SAR limit of 1.6 W/kg for 1gSAR or 4.0W/kg for 10gSAR) given by

$$Time\ averaged\ power\ limit = meas.P_{limit} + 10 \times \log\left(\frac{FCC\ SAR\ limit}{meas.SAR_Plimit}\right) \quad (5a)$$

where $meas.P_{limit}$ and $meas.SAR_Plimit$ correspond to measured power at P_{limit} and measured SAR at P_{limit} .

4. Make another plot containing:
 - a. Computed time-averaged 1gSAR or 10gSAR versus time determined in Step 2
 - b. FCC 1gSAR_{limit} of 1.6W/kg or FCC 10gSAR_{limit} of 4.0W/kg.
5. Repeat Steps 2 ~ 4 for pre-defined test sequence 2 and replace the requested Tx power (test sequence 1) in Step 2 with test sequence 2.
6. Repeat Steps 2 ~ 5 for all the selected technologies and bands.

The validation criteria are, at all times, the time-averaged power versus time shown in Step 3 plot shall not exceed the time-averaged power limit (defined in Eq. (5a)), in turn, the time-averaged 1gSAR or 10gSAR versus time shown in Step 4 plot shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (1b)).

3.3.2 Change in call scenario

This test is to demonstrate that Smart Transmit feature accurately accounts for the past Tx powers during time-averaging when a new call is established.

The call disconnects and re-establishment needs to be performed during power limit enforcement, i.e., when the EUT's Tx power is at $P_{reserve}$ level, to demonstrate the continuity of RF exposure management and limiting in call change scenario. In other words, the RF exposure averaged over any FCC defined time window (including the time windows containing the call change) doesn't exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

Test procedure

1. Measure P_{limit} for the technology/band selected in Section 3.2.2. Measure P_{limit} with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
2. Set *Reserve_power_margin* to actual (intended) value and reset power on EUT to enable Smart Transmit.
3. Establish radio link with callbox in the selected technology/band.
4. Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, followed by requesting EUT's Tx power to be at maximum power for about ~60 seconds, and then drop the call for ~10 seconds. Afterwards, re-establish another call in the same radio configuration (i.e., same technology/band/channel) and continue callbox requesting EUT's Tx power to be at maximum power for the remaining time of at least another full duration of the specified time window. Measure and record Tx power versus time. Once the measurement is done, extract instantaneous Tx power versus time, convert the measured conducted Tx power into 1gSAR or 10gSAR value using Eq. (1a), and then perform the running time average to determine time-averaged power and 1gSAR or 10gSAR versus time.

NOTE: In Eq.(1a), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at P_{limit} for the corresponding technology/band/antenna/DSI reported in Part 1 report.

5. Make one plot containing: (a) instantaneous Tx power versus time, (b) requested power, (c) computed time-averaged power, (d) time-averaged power limit calculated using Eq.(5a).
6. Make another plot containing: (a) computed time-averaged 1gSAR or 10gSAR versus time, and (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

The validation criteria are, at all times, the time-averaged power versus time shall not exceed the time-averaged power limit (defined in Eq.(5a)), in turn, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (1b)).

3.3.3 Change in technology and band

This test is to demonstrate the correct power control by Smart Transmit during technology switches and/or band handovers.

Similar to the change in call test in Section 3.3.2, to validate the continuity of RF exposure limiting during the transition, the technology and band handover needs to be performed when EUT's Tx power is at $P_{reserve}$ level (i.e., during Tx power enforcement) to make sure that the EUT's Tx power from previous $P_{reserve}$ level to the new $P_{reserve}$ level (corresponding to new technology/band). Since the P_{limit} could vary with technology and band, Eq. (1a) can be written as follows to convert the instantaneous Tx power in 1gSAR or 10gSAR exposure for the two given radios, respectively:

$$1g_or_10gSAR_1(t) = \frac{conducted_Tx_power_1(t)}{conducted_Tx_power_P_{limit_1}} * 1g_or_10gSAR_P_{limit_1} \quad (6a)$$

$$1g_or_10gSAR_2(t) = \frac{conducted_Tx_power_2(t)}{conducted_Tx_power_P_{limit_2}} * 1g_or_10gSAR_P_{limit_2} \quad (6b)$$

$$\frac{1}{T_{SAR}} \left[\int_{t-T_{SAR}}^{t_1} \frac{1g_or_10gSAR_1(t)}{FCC\ SAR\ limit} dt + \int_{t-T_{SAR}}^t \frac{1g_or_10gSAR_2(t)}{FCC\ SAR\ limit} dt \right] \leq 1 \quad (6c)$$

where, $conducted_Tx_power_1(t)$, $conducted_Tx_power_P_{limit_1}$, and $1g_or_10gSAR_P_{limit_1}$ correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at P_{limit} , and measured 1gSAR or 10gSAR value at P_{limit} of technology1/band1; $conducted_Tx_power_2(t)$, $conducted_Tx_power_P_{limit_2}(t)$, and $1g_or_10gSAR_P_{limit_2}$ correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at P_{limit} , and measured 1gSAR or 10gSAR value at P_{limit} of technology2/band2. Transition from technology1/band1 to the technology2/band2 happens at time-instant ' t_f '.

Test procedure

1. Measure P_{limit} for both the technologies and bands selected in Section 3.2.3. Measure P_{limit} with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
2. Set *Reserve_power_margin* to actual (intended) value and reset power on EUT to enable Smart Transmit
3. Establish radio link with callbox in first technology/band selected.
4. Request EUT's Tx power at 0 dBm for at least one time window specified for the selected technology/band, followed by requesting EUT's Tx power to be at maximum power for about ~60 seconds, and then switch to second technology/band selected. Continue with callbox requesting EUT's Tx power to be at maximum power for the remaining time of at least another full duration of the specified time window. Measure and record Tx power versus time for the full duration of the test.
5. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1gSAR or 10gSAR value using Eq. (6a) and (6b) and corresponding measured P_{limit} values from Step 1 of this section. Perform the running time average to determine time-averaged power and 1gSAR or 10gSAR versus time.

NOTE: In Eq.(6a) & (6b), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the measured worst-case 1gSAR or 10gSAR value at P_{limit} for the corresponding technology/band/antenna/DSI reported in Part 1 report.

6. Make one plot containing: (a) instantaneous Tx power versus time, (b) requested power, (c) computed time-averaged power, (d) time-averaged power limit calculated using Eq.(5a).
7. Make another plot containing: (a) computed time-averaged 1gSAR or 10gSAR versus time, and (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (6c)).

3.3.4 Change in antenna

This test is to demonstrate the correct power control by Smart Transmit during antenna switches from one antenna to another. The test procedure is identical to Section 3.3.3, by replacing technology/band switch operation with antenna switch. The validation criteria are, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

NOTE: If the EUT does not support antenna switch within the same technology/band, but has multiple antennas to support different frequency bands, then the antenna switch test is included as part of change in technology and band (Section 3.3.3) test.

3.3.5 Change in DSI

This test is to demonstrate the correct power control by Smart Transmit during DSI switches from one DSI to another. The test procedure is identical to Section 3.3.3, by replacing technology/band switch operation with DSI switch. The validation criteria are, at all times, the time-averaged normalized exposure versus time shall not exceed the normalized limit of 1.0.

3.3.6 Change in time window

This test is to demonstrate the correct power control by Smart Transmit during the change in averaging time window when a specific band handover occurs. FCC specifies time-averaging windows of 100s for Tx frequency < 3GHz, and 60s for Tx frequency between 3GHz and 6GHz.

To validate the continuity of RF exposure limiting during the transition, the band handover test needs to be performed when EUT handovers from operation band less than 3GHz to greater than 3GHz and vice versa. The equations (3a) and (3b) in Section 2 can be written as follows for transmission scenario having change in time window,

$$1gSAR_1(t) = \frac{\text{conducted_Tx_power_1}(t)}{\text{conducted_Tx_power_P}_{limit_1}} * 1g_or\ 10g_SAR_P_{limit_1} \quad (7a)$$

$$1gSAR_2(t) = \frac{\text{conducted_Tx_power_2}(t)}{\text{conducted_Tx_power_P}_{limit_2}} * 1g_or\ 10g_SAR_P_{limit_2} \quad (7b)$$

$$\frac{1}{T_{1SAR}} \left[\int_{t-T_{1SAR}}^{t_1} \frac{1g_or\ 10g_SAR_1(t)}{FCC\ SAR\ limit} dt \right] + \frac{1}{T_{2SAR}} \left[\int_{t-T_{2SAR}}^t \frac{1g_or\ 10g_SAR_2(t)}{FCC\ SAR\ limit} dt \right] \leq 1 \quad (7c)$$

where, *conducted_Tx_power_1(t)*, *conducted_Tx_power_P_{limit_1}(t)*, and *1g_ or 10g_SAR_P_{limit_1}* correspond to the instantaneous Tx power, conducted Tx power at *P_{limit_1}*, and compliance *1g_ or 10g_SAR* values at *P_{limit_1}* of band1 with time-averaging window '*T_{1SAR}*'; *conducted_Tx_power_2(t)*, *conducted_Tx_power_P_{limit_2}(t)*, and *1g_ or 10g_SAR_P_{limit_2}* correspond to the instantaneous Tx power, conducted Tx power at *P_{limit_2}*, and compliance *1g_ or 10g_SAR* values at *P_{limit_2}* of band2 with time-averaging window '*T_{2SAR}*'. One of the two bands is less than 3GHz, another is greater than 3GHz. Transition from first band with time-averaging window '*T_{1SAR}*' to the second band with time-averaging window '*T_{2SAR}*' happens at time-instant '*t₁*'.

Test procedure

1. Measure *P_{limit}* for both the technologies and bands selected in Section 3.2.6. Measure *P_{limit}* with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
2. Set *Reserve_power_margin* to actual (intended) value and enable Smart Transmit

Transition from 100s time window to 60s time window, and vice versa

1. Establish radio link with callbox in the technology/band having 100s time window selected in Section 3.2.6.
2. Request EUT's Tx power to be at 0 dBm for at least 100 seconds, followed by requesting EUT's Tx power to be at maximum power for about ~140 seconds, and then switch to second technology/band (having 60s time window) selected in Section 3.2.6. Continue with callbox requesting EUT's Tx power to be at maximum power for about ~60s in this second technology/band, and then switch back to the first technology/band. Continue with callbox requesting EUT's Tx power to be at maximum power for at least another 100s. Measure and record Tx power versus time for the entire duration of the test.
3. Once the measurement is done, extract instantaneous Tx power versus time, and convert the conducted Tx power into 1gSAR or 10gSAR value (see Eq. (7a) and (7b)) using corresponding technology/band Step 1 result, and then perform 100s running

average to determine time-averaged 1gSAR or 10gSAR versus time. Note that in Eq.(7a) & (7b), instantaneous Tx power is converted into instantaneous 1gSAR or 10gSAR value by applying the worst-case 1gSAR or 10gSAR value tested in Part 1 for the selected technologies/bands at P_{limit} .

4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 4.
5. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 5, (b) computed time-averaged 1gSAR versus time determined in Step 5, and (c) corresponding regulatory $1gSAR_{limit}$ of 1.6W/kg or $10gSAR_{limit}$ of 4.0W/kg.

Transition from 60s time window to 100s time window, and vice versa

1. Establish radio link with callbox in the technology/band having 60s time window selected in Section 3.2.6.
2. Request EUT's Tx power to be at 0 dBm for at least 60 seconds, followed by requesting EUT's Tx power to be at maximum power for about ~80 seconds, and then switch to second technology/band (having 100s time window) selected in Section 3.2.6. Continue with callbox requesting EUT's Tx power to be at maximum power for about ~100s in this second technology/band, and then switch back to the first technology/band. Continue with callbox requesting EUT's Tx power to be at maximum power for the remaining time for a total test time of 500 seconds. Measure and record Tx power versus time for the entire duration of the test.
3. Repeat above Step 5~7 to generate the plots

The validation criteria is, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the regulatory $1gSAR_{limit}$ of 1.6W/kg or $10gSAR_{limit}$ of 4.0W/kg

3.3.7 SAR exposure switching

This test is to demonstrate that Smart Transmit feature is accurately accounts for switching in exposures among SAR from radio1 only, SAR from both radio1 and radio2, and SAR from radio2 only scenarios, and ensures total time-averaged RF exposure complies with the FCC limit. Here, radio1 represents primary radio (for example, LTE anchor in a NR non-standalone mode call) and radio2 represents secondary radio (for example, sub6 NR). The detailed test procedure for SAR exposure switching in the case of LTE+ sub6 NR non-standalone mode transmission scenario is provided in Appendix B.2.

Test procedure:

1. Measure conducted Tx power corresponding to P_{limit} for radio1 and radio2 in selected band. Test condition to measure conducted P_{limit} is:
 - Establish device in call with the callbox for radio1 technology/band. Measure conducted Tx power corresponding to radio1 P_{limit} with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
 - Repeat above step to measure conducted Tx power corresponding to radio2 P_{limit} . If radio2 is dependent on radio1 (for example, non-standalone mode of sub6 NR requiring radio1 LTE as anchor), then establish radio1 + radio2 call with callbox, and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from radio2 sub6 NR, measured conducted Tx power corresponds to radio2 P_{limit} (as radio1 LTE is at all-down bits)
2. Set EUT to intended Smart Transmit exposure mode, with EUT setup for radio1 + radio2 call. In this description, it is assumed that radio2 has lower priority than radio1. Establish device in radio1+radio2 call, and request all-down bits or low power on radio1, with callbox requesting EUT's Tx power to be at maximum power in radio2 for at least one time window. After one time window, set callbox to request EUT's Tx power to be at maximum power on radio1, i.e., all-up bits. Continue radio1+radio2 call with both radios at maximum power for at least one time window, and drop (or request all-down bits on) radio2. Continue radio1 at maximum power for at least one time window. Record the conducted Tx power for both radio1 and radio2 for the entire duration of this test.
3. Once the measurement is done, extract instantaneous Tx power versus time for both radio1 and radio2 links. Convert the conducted Tx power for both these radios into 1gSAR or 10gSAR value (see Eq. (6a) and (6b)) using corresponding technology/band P_{limit} measured in Step 1, and then perform the running time average to determine time-averaged 1gSAR or 10gSAR versus time.
4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.
5. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 3, (b) computed time-averaged 1gSAR versus time determined in Step 3, and (c) corresponding regulatory $1gSAR_{limit}$ of 1.6W/kg or $10gSAR_{limit}$ of 4.0W/kg.

The validation criteria is, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed the regulatory $1gSAR_{limit}$ of 1.6W/kg or $10gSAR_{limit}$ of 4.0W/kg.

3.3.8 Test procedure for System level compliance continuity

3.3.8.1 WWAN/WLAN/BT radio System level compliance continuity

Below is the test flow outline of the system level compliance test. The test contains 6 sections and 5 transitions: Start with WWAN radio transmission (Section A), transition to WLAN transmission (Section B), transition to simultaneous transmission of WWAN + WLAN + BT (Section C), then drop off WWAN radio and set WWAN to airplane mode, at the same time transition to WLAN+BT transmission simultaneously (Section D), transition to BT only transmission (Section E), and finally transition to WLAN only transmission (Section F) and finally transition back to simultaneous transmission of WWAN + WLAN + BT with modem online while the USB is disconnected.

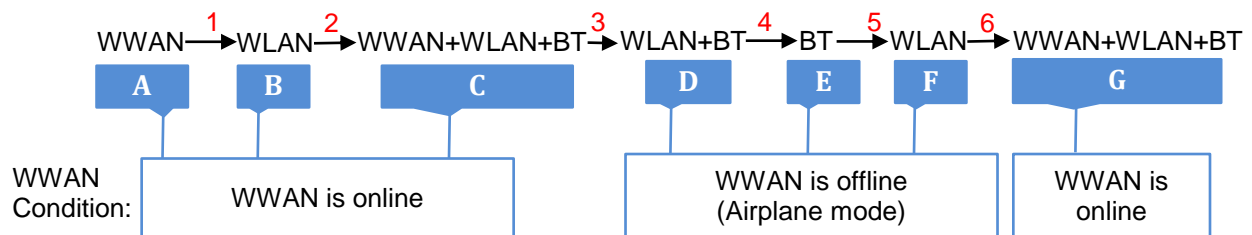


Figure 3-2 Schematic of technology transitions for system level compliance continuity test

It is recommended for OEMs to demonstrate compliance at system level, i.e., demonstrate compliance continuity across technologies, i.e., across WWAN, WLAN, BT, etc. In this regard, a new test case is designed to test the time-averaged RF exposure compliance continuity in the following scenarios with 6 transitions while the USB is disconnected:

1. Across technology switch
2. During transition from single technology to multiple technology
3. In transition when WWAN went from ON to airplane mode
4. Active WLAN radio and/or BT radio without WWAN
5. Time window transition between WLAN and BT when WWAN is in airplane mode (this segment of test is not needed for ICNIRP as both WLAN and BT operate in same time averaging window)
6. In transition when WWAN went from airplane mode to ON.

Test configuration selection criteria:

If the device supports simultaneous transmission of WWAN, WLAN and BT, then the selection criteria for system level compliance continuity test is:

- For a given DSI and antenna group, select band/antenna configurations for WWAN, WLAN and BT technologies that have the largest ($P_{max} - P_{limit}$) delta. In case of multiple bands/antennas having the same difference between P_{max} and P_{limit} within a given technology, then select any one band/antenna out of them.

NOTE:

1. The antennas corresponding to the selected technologies/bands for the system level compliance continuity test case should be in the same antenna group.
2. For this test, WLAN radio configuration is selected different from 2.4GHz band so as to not interfere with BT measurements. Therefore, select least P_{limit} configuration for WLAN outside the 2.4GHz band.

Test procedure:

1. Measure conducted Tx power corresponding to P_{limit} for all three (WWAN, WLAN & BT) technologies in the selected radio configurations. Test condition to measure conducted P_{limit} for each technology is:
 - Establish device in call with the callbox for the first technology in desired band. Measure conducted Tx power corresponding to the first technology P_{limit} with Smart Transmit Peak exposure mode enabled and callbox set to request maximum power (or maximum duty cycle in case of WLAN/BT).
 - Repeat above step to measure conducted Tx power corresponding to the remaining two technologies' P_{limit} . In the case of BT, measured conducted Tx power is compensated by tested duty cycle and BT_STANDALONE EFS parameter, i.e., measured $P_{limit} =$ conducted power measured in BT standalone condition / BT_STANDALONE / BT_duty_cycle.
2. Set EUT to the intended Smart Transmit exposure mode.
3. As depicted in Figure S-1, first
 - i. Section A: Establish WWAN connection with the callbox in selected WWAN radio configuration. Request EUT to transmit at 0 dBm for at least one WWAN time window (100s or 60s), followed by requesting EUT to transmit at maximum Tx power for {one WWAN time window ($T_{WWAN} = 100s$ if $f < 3GHz$ or $60s$ if $3GHz < f < 6GHz$ for FCC, 360s for ICNIRP) + the maximum high power duration allowed in one T_{WWAN} }, denoted as T_{A_WWAN} .
 - ii. Section B: After T_{A_WWAN} , drop WWAN connection and establish WLAN connection with the callbox in selected WLAN radio configuration and request EUT to transmit at maximum duty cycle (and maximum power) for {one WLAN time-window duration ($T_{WLAN} = 30s$ for all WLAN frequency bands for FCC, 360s for ICNIRP) + the maximum high power duration allowed in one T_{WLAN} }, denoted T_{B_WLAN} .
 - iii. Section C: After T_{B_WLAN} , add the selected WWAN and BT radios to have the simultaneous transmission of WWAN + WLAN + BT. Request WWAN radio to transmit at maximum power and request WLAN & BT radios to transmit at maximum duty cycle (and maximum power) for at least one $\max \{T_{A_WWAN}, T_{B_WLAN}, T_{BT}\}$, where, $T_{BT} = 100s$ for FCC, 360s for ICNIRP.

- iv. Section D: Drop WWAN connection and set WWAN modem into airplane mode. Continue requesting WLAN & BT radios to transmit at maximum duty cycle (and maximum power) for at least two times the $\max \{T_{WLAN}, T_{BT}\}$.
 - v. Section E: Drop WLAN connection. Continue requesting BT radio to transmit at maximum duty cycle (and maximum power). Continue the test for at least one T_{BT} .
 - vi. Section F: In the case of FCC time windows, after at least one T_{BT} , drop BT connection and establish back WLAN connection in selected radio configuration. Continue requesting WLAN radio to transmit at maximum duty cycle (and maximum power). Continue the test for at least one $\max \{T_{WLAN}, T_{BT}\}$. In the case of ICNIRP time windows, Section F is not required.
4. Once the measurement is done, extract instantaneous Tx power versus time for all WWAN, WLAN and BT radios in selected configurations. Similar to technology/band switch test in Section 5.3.3, convert the conducted Tx power for both these radios into 1g_or_10gSAR value (see Eq. (7a) and (7b)) using corresponding technology/band P_{limit} measured in Step 1, and then perform running average over corresponding time-windows (i.e., 100s/60s for WWAN radio, 30s for WLAN radio and 100s for BT radio in case of FCC time-windows, and 360s for all of them in case of ICNIRP time-windows) to determine time-averaged 1g_or_10gSAR versus time as illustrated in Figure 3-1.
 5. Make one plot containing: (a) computed normalized time-averaged 1g_or_10gSAR for WWAN radio configuration versus time determined in Step 4, (b) computed normalized time-averaged 1g_or_10gSAR for WLAN radio configuration versus time determined in Step 4, (c) computed normalized time-averaged 1g_or_10gSAR for WLAN radio configuration versus time determined in Step 4, (d) computed total normalized time-averaged 1g_or_10gSAR versus time (sum of Steps (5.a), (5.b) and (5.c)) determined in Step 4, and (e) corresponding normalized regulatory 1g_or_10gSAR_{limit} limit of 1.0.

The validation criteria is, at all times, the time-averaged 1g_or_10gSAR versus time shall not exceed the regulatory 1g_or_10gSAR_{limit} limit.

3.4 Test procedure for time-varying SAR measurements

This section provides general time-varying SAR measurement procedures to perform compliance test under dynamic transmission scenarios described in Section 2. In practice, an adjustment can be made in these procedures. The justification/clarification may be provided.

To perform the validation through SAR measurement for transmission scenario 1 described in Section 2, the “path loss” between callbox antenna and EUT needs to be calibrated to ensure that the EUT Tx power reacts to the requested power from callbox in a radiated call. It should be noted that when signaling in closed loop mode, protocol-level power control is in play, resulting in EUT not solely following callbox TPC (Tx power control) commands. In other words, EUT response has many dependencies (RSSI, quality of signal, path loss variation, fading, etc.,) other than just TPC commands. These dependencies have less impact in conducted setup (as it is a controlled environment and the path loss can be very well calibrated) but have significant impact on radiated testing in an uncontrolled environment, such as SAR test setup. Therefore, the deviation in EUT Tx power from callbox requested power is expected, however the time-averaged SAR should not exceed FCC SAR requirement at all times as Smart Transmit controls Tx power at EUT.

The following steps are for time averaging feature validation through SAR measurement:

1. “Path Loss” calibration: Place the EUT against the phantom in the worst-case position determined based on Section 3.2.1. For each band selected, prior to SAR measurement, perform “path loss” calibration between callbox antenna and EUT. Since the SAR test environment is not controlled and well calibrated for OTA (Over the Air) test, extreme care needs to be taken to avoid the influence from reflections. The test setup is described in Section 6.1.
2. Time averaging feature validation:
 - i For a given radio configuration (technology/band) selected in Section 3.2.1, enable Smart Transmit Peak exposure mode, with callbox to request maximum power, perform area scan, conduct pointSAR measurement at peak location of the area scan. This point SAR value, $pointSAR_{P_{limit}}$, corresponds to point SAR at the measured P_{limit} (i.e., measured P_{limit} from the EUT in Step 1 of Section 3.3.1).
 - ii Set *Reserve_power_margin* to actual (intended) value and reset power on EUT to enable Smart Transmit. Note, if *Reserve_power_margin* cannot be set wirelessly, care must be taken to re-position the EUT in the exact same position relative to the SAM phantom as in above Step 2.i. Establish radio link in desired radio configuration, with callbox requesting the EUT’s Tx power at power levels described by test sequence 1 generated in Step 1 of Section 3.3.1, conduct point SAR measurement versus time at peak location of the area scan determined in Step 2.i of this section. Once the measurement is done, extract instantaneous point SAR vs time data, $pointSAR(t)$, and convert it into instantaneous 1gSAR or 10gSAR vs. time using Eq. (3a), re-written below:

$$1g_or_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g_or_10gSAR_{P_{limit}}$$

where, $pointSAR_{P_{limit}}$ is the value determined in Step 2.i, and $pointSAR(t)$ is the instantaneous point SAR measured in Step 2.ii, $1g_or_10gSAR_{P_{limit}}$ is the measured 1gSAR or 10gSAR value listed in Part 1 report.

- iii Perform 100s running average to determine time-averaged 1gSAR or 10gSAR versus time.
- iv Make one plot containing: (a) time-averaged 1gSAR or 10gSAR versus time determined in Step 2.iii of this section, (b) FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.
- v Repeat 2.ii ~ 2.iv for test sequence 2 generated in Step 1 of Section 3.3.1.
- vi Repeat 2.i ~ 2.v for all the technologies and bands selected in Section 3.2.1.

The time-averaging validation criteria for SAR measurement is that, at all times, the time-averaged 1gSAR or 10gSAR versus time shall not exceed FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR (i.e., Eq. (3b)).



4 Test Configurations

4.1 WWAN (sub-6) transmission

The P_{limit} values, corresponding to SAR_design_target, for technologies and bands supported by EUT are derived in Part 0 report and summarized in Table 4-1. Note all P_{limit} power levels entered in Table 4-1 correspond to average power levels after accounting for duty cycle in the case of TDD modulation schemes (for e.g., GSM, LTE TDD & 5G NR TDD).

Table 4-1: P_{limit} for supported technologies and bands (P_{limit} in EFS file)

| Band | Antenna | DSI 4 | DSI 5 | Total Uncertainty dB (k=2) | Pmax* |
|-------------|---------|-------|-------|----------------------------|-------|
| GSM850 | 1 | 30.00 | 32.10 | 1.2 | 24.3 |
| GSM1900 | 5 | 22.90 | 34.50 | 1.2 | 21.3 |
| WCDMA II | 0 | 20.10 | 19.60 | 1.2 | 23.6 |
| WCDMA II | 5 | 20.80 | 20.80 | 1.2 | 23.8 |
| WCDMA IV | 0 | 21.10 | 21.10 | 1.2 | 23.6 |
| WCDMA IV | 5 | 22.30 | 22.30 | 1.2 | 23.8 |
| WCDMA V | 0 | 22.10 | 20.60 | 1.2 | 23.6 |
| WCDMA V | 1 | 29.10 | 30.40 | 1.2 | 23.6 |
| LTE Band 2 | 5 | 20.80 | 20.80 | 1.2 | 23.8 |
| LTE Band 2 | 0 | 20.10 | 19.10 | 1.2 | 23.6 |
| LTE Band 2 | 6 | 19.30 | 19.30 | 1.2 | 22.8 |
| LTE Band 2 | 7 | 20.60 | 20.60 | 1.2 | 23.6 |
| LTE Band 4 | 5 | 22.10 | 22.10 | 1.2 | 23.6 |
| LTE Band 4 | 0 | 21.60 | 21.60 | 1.2 | 23.6 |
| LTE Band 4 | 6 | 18.60 | 18.10 | 1.2 | 22.6 |
| LTE Band 4 | 7 | 19.60 | 18.60 | 1.2 | 22.6 |
| LTE Band 5 | 0 | 22.10 | 20.10 | 1.2 | 23.6 |
| LTE Band 5 | 1 | 29.40 | 31.70 | 1.2 | 23.8 |
| LTE Band 7 | 5 | 21.60 | 22.10 | 1.2 | 23.1 |
| LTE Band 7 | 0 | 20.60 | 19.60 | 1.2 | 22.6 |
| LTE Band 7 | 6 | 18.10 | 16.10 | 1.2 | 22.6 |
| LTE Band 7 | 7 | 21.10 | 20.10 | 1.2 | 22.6 |
| LTE Band 12 | 0 | 23.70 | 22.60 | 1.2 | 23.6 |
| LTE Band 12 | 1 | 29.90 | 32.90 | 1.2 | 23.8 |
| LTE Band 13 | 0 | 23.10 | 22.10 | 1.2 | 23.1 |
| LTE Band 13 | 1 | 30.50 | 33.00 | 1.2 | 23.6 |
| LTE Band 17 | 0 | 23.70 | 22.60 | 1.2 | 23.6 |
| LTE Band 17 | 1 | 29.90 | 32.90 | 1.2 | 23.8 |
| LTE Band 25 | 5 | 20.80 | 20.80 | 1.2 | 23.8 |
| LTE Band 25 | 0 | 19.60 | 18.60 | 1.2 | 23.6 |
| LTE Band 25 | 6 | 21.80 | 18.80 | 1.2 | 22.8 |
| LTE Band 25 | 7 | 22.60 | 20.60 | 1.2 | 23.6 |
| LTE Band 26 | 0 | 24.20 | 22.10 | 1.2 | 23.6 |
| LTE Band 26 | 1 | 29.40 | 31.70 | 1.2 | 23.8 |
| LTE Band 30 | 5 | 21.60 | 21.60 | 1.2 | 23.6 |
| LTE Band 30 | 0 | 20.10 | 20.10 | 1.2 | 22.6 |
| LTE Band 30 | 6 | 19.60 | 16.60 | 1.2 | 22.6 |
| LTE Band 30 | 7 | 21.10 | 20.60 | 1.2 | 23.1 |
| LTE Band 66 | 5 | 22.30 | 22.30 | 1.2 | 23.8 |
| LTE Band 66 | 0 | 21.60 | 21.60 | 1.2 | 23.6 |



| | | | | | |
|-----------------|----|-------|-------|-----|------|
| LTE Band 66 | 6 | 19.10 | 19.10 | 1.2 | 23.6 |
| LTE Band 66 | 7 | 21.80 | 20.30 | 1.2 | 23.8 |
| LTE Band 71 | 0 | 26.40 | 25.90 | 1.2 | 22.8 |
| LTE Band 71 | 1 | 30.20 | 34.70 | 1.2 | 23.6 |
| LTE Band 38 | 5 | 20.30 | 20.30 | 1.2 | 21.8 |
| LTE Band 38 | 0 | 19.10 | 17.10 | 1.2 | 21.6 |
| LTE Band 41_PC3 | 5 | 20.60 | 21.60 | 1.2 | 21.6 |
| LTE Band 41_PC2 | 5 | 20.60 | 21.60 | 1.2 | 22.5 |
| LTE Band 41_PC3 | 0 | 19.10 | 20.10 | 1.2 | 20.6 |
| LTE Band 41_PC2 | 0 | 19.10 | 20.10 | 1.2 | 21.5 |
| LTE Band 41_PC3 | 6 | 19.60 | 18.60 | 1.2 | 21.6 |
| LTE Band 41_PC2 | 6 | 19.60 | 18.60 | 1.2 | 22.0 |
| LTE Band 41_PC3 | 7 | 24.70 | 23.50 | 1.2 | 21.6 |
| LTE Band 41_PC2 | 7 | 24.70 | 23.50 | 1.2 | 22.0 |
| LTE Band 48 | 10 | 20.60 | 19.10 | 1.2 | 21.6 |
| LTE Band 48 | 6 | 20.10 | 15.10 | 1.2 | 21.1 |
| LTE Band 48 | 11 | 21.10 | 16.60 | 1.2 | 21.6 |
| LTE Band 48 | 12 | 18.10 | 14.10 | 1.2 | 20.1 |
| FR1 n2 | 5 | 21.20 | 20.70 | 1.2 | 24.2 |
| FR1 n2 | 0 | 20.00 | 19.00 | 1.2 | 24.0 |
| FR1 n2 | 6 | 20.00 | 18.00 | 1.2 | 23.5 |
| FR1 n2 | 7 | 21.00 | 21.00 | 1.2 | 24.0 |
| FR1 n5 | 0 | 22.50 | 21.00 | 1.2 | 24.0 |
| FR1 n5 | 1 | 23.70 | 23.70 | 1.2 | 24.2 |
| FR1 n7 | 5 | 21.00 | 21.00 | 1.2 | 23.5 |
| FR1 n7 | 0 | 20.00 | 19.00 | 1.2 | 23.0 |
| FR1 n7 | 6 | 18.50 | 16.50 | 1.2 | 23.0 |
| FR1 n7 | 7 | 21.50 | 20.00 | 1.2 | 23.0 |
| FR1 n12 | 0 | 24.00 | 23.00 | 1.2 | 24.0 |
| FR1 n12 | 1 | 27.90 | 23.20 | 1.2 | 24.2 |
| FR1 n25 | 5 | 22.20 | 20.70 | 1.2 | 24.2 |
| FR1 n25 | 0 | 20.00 | 19.00 | 1.2 | 24.0 |
| FR1 n25 | 6 | 21.70 | 18.20 | 1.2 | 23.2 |
| FR1 n25 | 7 | 22.00 | 21.00 | 1.2 | 24.0 |
| FR1 n30 | 5 | 21.00 | 21.00 | 1.2 | 24.0 |
| FR1 n30 | 0 | 21.00 | 20.00 | 1.2 | 23.0 |
| FR1 n66 | 5 | 21.70 | 21.70 | 1.2 | 24.2 |
| FR1 n66 | 0 | 22.00 | 22.00 | 1.2 | 24.0 |
| FR1 n66 | 6 | 19.50 | 19.00 | 1.2 | 24.0 |
| FR1 n66 | 7 | 22.20 | 21.20 | 1.2 | 24.2 |
| FR1 n71 | 0 | 26.30 | 25.40 | 1.2 | 23.2 |
| FR1 n71 | 1 | 29.70 | 33.30 | 1.2 | 24.0 |
| FR1 n38 | 5 | 19.70 | 19.70 | 1.2 | 24.2 |
| FR1 n38 | 0 | 19.00 | 19.00 | 1.2 | 24.0 |
| FR1 n38 | 6 | 18.50 | 16.50 | 1.2 | 24.0 |
| FR1 n38 | 7 | 21.20 | 20.20 | 1.2 | 24.2 |
| FR1 n41_PC3 | 5 | 20.50 | 21.00 | 1.2 | 24.0 |
| FR1 n41_PC2 | 5 | 20.50 | 21.00 | 1.2 | 26.5 |
| FR1 n41_PC3 | 0 | 19.50 | 19.50 | 1.2 | 23.0 |
| FR1 n41_PC2 | 0 | 19.50 | 19.50 | 1.2 | 25.5 |
| FR1 n41_PC3 | 6 | 18.00 | 16.50 | 1.2 | 23.0 |
| FR1 n41_PC2 | 6 | 18.00 | 16.50 | 1.2 | 25.5 |
| FR1 n41_PC3 | 7 | 22.50 | 22.00 | 1.2 | 23.5 |



| | | | | | |
|-------------|-------|-------|-------|-----|------|
| FR1 n41_PC2 | 7 | 22.50 | 22.00 | 1.2 | 26.0 |
| FR1 n48 | 10 | 21.00 | 20.00 | 1.2 | 24.0 |
| FR1 n48 | 6 | 22.50 | 16.00 | 1.2 | 23.5 |
| FR1 n48 | 11 | 21.50 | 16.50 | 1.2 | 24.0 |
| FR1 n48 | 12 | 17.50 | 14.50 | 1.2 | 22.5 |
| FR1 n77_PC3 | 10 | 18.50 | 18.50 | 1.2 | 24.0 |
| FR1 n77_PC2 | 10 | 18.50 | 18.50 | 1.2 | 26.0 |
| FR1 n77_PC3 | 6 | 19.50 | 14.50 | 1.2 | 23.5 |
| FR1 n77_PC2 | 6 | 19.50 | 14.50 | 1.2 | 25.5 |
| FR1 n77_PC3 | 11 | 22.00 | 16.50 | 1.2 | 24.0 |
| FR1 n77_PC2 | 11 | 22.00 | 16.50 | 1.2 | 25.3 |
| FR1 n77_PC3 | 12 | 18.00 | 14.50 | 1.2 | 23.0 |
| FR1 n77_PC2 | 12 | 18.00 | 14.50 | 1.2 | 25.0 |
| FR1 n78_PC3 | 10 | 19.50 | 18.50 | 1.2 | 24.0 |
| FR1 n78_PC2 | 10 | 19.50 | 18.50 | 1.2 | 26.0 |
| FR1 n78_PC3 | 6 | 21.00 | 14.50 | 1.2 | 23.5 |
| FR1 n78_PC2 | 6 | 21.00 | 14.50 | 1.2 | 25.5 |
| FR1 n78_PC3 | 11 | 21.00 | 16.00 | 1.2 | 24.0 |
| FR1 n78_PC2 | 11 | 21.00 | 16.00 | 1.2 | 25.3 |
| FR1 n78_PC3 | 12 | 18.00 | 15.00 | 1.2 | 23.0 |
| FR1 n78_PC2 | 12 | 18.00 | 15.00 | 1.2 | 25.0 |
| Bluetooth | 1 | 12.60 | 12.60 | 1.2 | 12.6 |
| Bluetooth | 10 | 16.10 | 14.60 | 1.2 | 16.1 |
| Bluetooth | 13 | 17.60 | 15.60 | 1.2 | 17.6 |
| WLAN2.4GHz | 13 | 19.80 | 17.80 | 1.2 | 21.3 |
| WLAN2.4GHz | 10 | 18.30 | 17.30 | 1.2 | 21.3 |
| WLAN2.4GHz | 13+10 | 20.30 | 19.30 | 1.2 | 24.3 |
| WLAN5.2GHz | 14 | 15.80 | 16.80 | 1.2 | 20.3 |
| WLAN5.2GHz | 15 | 12.80 | 20.30 | 1.2 | 20.3 |
| WLAN5.2GHz | 14+15 | 11.80 | 15.80 | 1.2 | 20.3 |
| WLAN5.3GHz | 14 | 15.80 | 16.80 | 1.2 | 20.3 |
| WLAN5.3GHz | 15 | 12.80 | 20.30 | 1.2 | 20.3 |
| WLAN5.3GHz | 14+15 | 11.80 | 15.80 | 1.2 | 20.3 |
| WLAN5.5GHz | 14 | 15.80 | 16.80 | 1.2 | 20.3 |
| WLAN5.5GHz | 15 | 12.80 | 20.30 | 1.2 | 20.3 |
| WLAN5.5GHz | 14+15 | 11.80 | 15.80 | 1.2 | 20.3 |
| WLAN5.8GHz | 14 | 15.80 | 16.80 | 1.2 | 21.8 |
| WLAN5.8GHz | 15 | 12.80 | 20.80 | 1.2 | 21.8 |
| WLAN5.8GHz | 14+15 | 11.80 | 15.80 | 1.2 | 21.8 |
| WLAN6GHz | 14 | 12.30 | 12.30 | 1.2 | 12.3 |
| WLAN6GHz | 15 | 12.30 | 12.30 | 1.2 | 12.3 |
| WLAN6GHz | 14+15 | 12.30 | 12.30 | 1.2 | 15.3 |

Note:

1. *Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax +total uncertainty.
2. All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).
3. If DSI's P_{limit} is higher than Pmax, then P_{limit} is operate as Pmax power.
4. The following table is duty cycle and factor used for calculating time average power.



| GSM/FDD/TDD | Duty Cycle | Time average calculation factor(dB) |
|-------------|------------|-------------------------------------|
| GSM 1TX | 12.50% | -9.0 |
| GSM 2TX | 25% | -6.0 |
| GSM 3TX | 37.50% | -4.3 |
| GSM 4TX | 50% | -3.0 |
| FDD LTE | 100% | 0.0 |
| TDD LTE | 63.30% | -2.0 |
| TDD HPUE | 43.30% | -3.6 |
| NR FDD/TDD | 100% | 0.0 |

*Pmax is used for RF tune up procedure. The maximum allowed output power is equal to Pmax +total uncertainty.

Maximum target power, Pmax, is configured in NV settings in EUT to “limit maximum transmitting power”. This power is converted into “peak power in NV settings for TDD schemes”. The EUT maximum allowed output power is equal to Pmax +total uncertainty. EFS file Plimit level will compare to Pmax, when Plimit is high than Pmax, the power will be limited to Pmax power level.

**All Plimit power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD & NR TDD).

Based on selection criteria described in Section 3.2.1, the selected technologies/bands for testing time-varying test sequences are listed in Table 4-1.

The radio configurations used in Part 2 test for selected technologies, bands, DSIs and antennas are listed in Table 4-2. The corresponding worst-case radio configuration 1gSAR or 10gSAR values for selected technology/band/DSI are extracted from Part 1 report and are listed in the last column of Table 4-2.

Based on equations (1a) and (3a), it is clear that Part 2 testing outcome is normalized quantity, which implies that it can be applied to any radio configuration within a selected technology/band/DSI. Thus, as long as applying the worst-case SAR obtained from the worst radio configuration in Part 1 testing to calculate time-varying SAR exposure in equations (1a) and (3a), the accuracy in compliance demonstration remains the same.



Table 4-2: Radio configurations selected for Part 2 test

| Test case # | Test scenario | Tech | Band | Ant | DSI | Channel | Freq (MHz) | BW | RB size | RB offset | Mode | Position | Position details | Part 1, SAR @Plimit 1g SAR (W/kg) |
|-------------|------------------------------|-----------|-----------|-------|-----|---------|------------|-----|---------|-----------|---------------------|--------------|------------------|-----------------------------------|
| 1 | Time-Varying | WCDMA | 5 | 0 | 5 | 4182 | 836.4 | - | - | - | RMC 12.2Kbps | Left Cheek | 0mm | 0.699 |
| 2 | | WCDMA | 5 | 0 | 5 | 4182 | 836.4 | - | - | - | RMC 12.2Kbps | Left Cheek | 0mm | 0.699 |
| 3 | | WCDMA | 2 | 0 | 5 | 9400 | 1880 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 0.851 |
| 4 | | WCDMA | 2 | 0 | 5 | 9400 | 1880 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 0.851 |
| 5 | | LTE | 66 | 0 | 5 | 132572 | 1770 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.862 |
| 6 | | LTE | 66 | 0 | 5 | 132572 | 1770 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.862 |
| 7 | | LTE | 48 | 12 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.966 |
| 8 | | LTE | 48 | 12 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.966 |
| 9 | | 5G NR | n5 | 0 | 4 | 167300 | 836.5 | 20 | 1 | 1 | DFT-15,QPSK | Left Side | 10mm | 0.849 |
| 10 | | 5G NR | n5 | 0 | 4 | 167300 | 836.5 | 20 | 1 | 1 | DFT-15,QPSK | Left Side | 10mm | 0.849 |
| 11 | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 0.842 |
| 12 | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 0.842 |
| 13 | | WIFI SISO | 2.4GHz | 10 | 4 | 11 | 2462 | - | - | - | 802.11b 1Mbps | Back | 10mm | 0.324 |
| 14 | | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 0.146 |
| 15 | Call Drop | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 0.146 |
| 16 | Tech Switch | LTE | 25 | 0 | 5 | 26340 | 1880 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.876 |
| | | WCDMA | 4 | 0 | 5 | 1413 | 1732.6 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 0.723 |
| 17 | 100s-60s-100s | LTE | 25 | 0 | 5 | 26340 | 1880 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 0.876 |
| | | LTE | 48 | 6 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Tilted | 0mm | 0.807 |
| 18 | 60s-100s-60s | LTE | 48 | 6 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Tilted | 0mm | 0.807 |
| | | LTE | 25 | 5 | 5 | 26590 | 1905 | 20 | 1 | 49 | QPSK | Left Cheek | 0mm | 0.054 |
| 19 | DSI Switch | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 0.146 |
| | | WIFI MIMO | 5GHz | 14+15 | 5 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Left Cheek | 0mm | 0.347 |
| 20 | EN-DC (100s/100s) SAR vs SAR | LTE | 5 | 0 | 5 | 20525 | 836.5 | 10 | 1 | 0 | QPSK | Left Cheek | 0mm | 0.500 |
| | | 5G NR | n7 | 6 | 5 | 507000 | 2535 | 50 | 1 | 1 | DFT-15,QPSK | Right Tilted | 0mm | 1.000 |
| 21 | EN-DC (100s/60s) SAR vs SAR | LTE | 5 | 0 | 5 | 20525 | 836.5 | 10 | 1 | 0 | QPSK | Left Cheek | 0mm | 0.500 |
| | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 0.842 |
| 22 | WLAN DBS | WIFI SISO | 2.4GHz AP | 10 | 4 | 11 | 2462 | - | - | - | 802.11n-HT20 MCS0 | Right Side | 10mm | 0.656 |
| | | WIFI SISO | 5GHz STA | 15 | 4 | 40 | 5200 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 0.103 |
| 23 | System Continuity Test | LTE | 25 | 0 | 4 | 26590 | 1905 | 20 | 1 | 49 | QPSK | Left Side | 10mm | 0.704 |
| | | WIFI SISO | 5GHz | 15 | 4 | 36 | 5180 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 0.103 |
| | | Bluetooth | - | 13 | 4 | 0 | 2402 | - | - | - | EDR | Top Side | 10mm | 0.407 |

Note that the EUT has a several DSI states to manage power for different RF exposure conditions, detail DSI states and trigger conditions shown on the following table, the maximum 1gSAR/or 10gSAR among all exposure scenarios is used in Smart Transmit feature for time averaging operation.



Trigger Conditions:

| Exposure conditions | Measure Distance | Trigger Conditions | DSI |
|---------------------|------------------|--------------------|-----|
| Head | touch&tilt 15deg | Receiver on | 5 |
| Hotspot | 10 mm | Receiver off | 4 |
| Body Worn | 10 mm | Receiver off | 4 |
| Extremity | 0 mm | Receiver off | 4 |

SAR design Target:

| Band | Antenna | DSI 4 Hotspot | DSI 4 Extremity | DSI 4 Body Worn | DSI 5 Head |
|-------------|---------|---------------|-----------------|-----------------|------------|
| GSM850 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| GSM1900 | 5 | 0.910 | 2.270 | 0.910 | 0.910 |
| WCDMA II | 0 | 0.696 | 2.270 | 0.380 | 0.851 |
| WCDMA II | 5 | 0.743 | 2.270 | 0.328 | 0.051 |
| WCDMA IV | 0 | 0.815 | 2.270 | 0.454 | 0.723 |
| WCDMA IV | 5 | 0.896 | 2.270 | 0.414 | 0.069 |
| WCDMA V | 0 | 0.954 | 2.270 | 0.620 | 0.699 |
| WCDMA V | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 2 | 5 | 0.749 | 2.270 | 0.285 | 0.054 |
| LTE Band 2 | 0 | 0.682 | 2.270 | 0.458 | 0.977 |
| LTE Band 2 | 6 | 0.923 | 2.270 | 0.494 | 0.679 |
| LTE Band 2 | 7 | 0.912 | 2.270 | 0.710 | 0.622 |
| LTE Band 4 | 5 | 0.913 | 2.270 | 0.488 | 0.086 |
| LTE Band 4 | 0 | 0.664 | 2.270 | 0.402 | 0.862 |
| LTE Band 4 | 6 | 0.518 | 2.270 | 0.229 | 0.699 |
| LTE Band 4 | 7 | 0.751 | 2.270 | 0.503 | 0.585 |
| LTE Band 5 | 0 | 0.766 | 2.270 | 0.471 | 0.500 |
| LTE Band 5 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 7 | 5 | 0.908 | 2.270 | 0.534 | 0.212 |
| LTE Band 7 | 0 | 0.961 | 2.270 | 0.523 | 0.995 |
| LTE Band 7 | 6 | 0.885 | 2.270 | 0.321 | 0.898 |
| LTE Band 7 | 7 | 0.501 | 2.270 | 0.192 | 0.461 |
| LTE Band 12 | 0 | 0.910 | 2.270 | 0.910 | 0.792 |
| LTE Band 12 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 13 | 0 | 0.910 | 2.270 | 0.910 | 0.854 |
| LTE Band 13 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 17 | 0 | 0.910 | 2.270 | 0.910 | 0.792 |
| LTE Band 17 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 25 | 5 | 0.749 | 2.270 | 0.285 | 0.054 |
| LTE Band 25 | 0 | 0.704 | 2.270 | 0.336 | 0.876 |
| LTE Band 25 | 6 | 0.923 | 2.270 | 0.494 | 0.637 |
| LTE Band 25 | 7 | 0.912 | 2.270 | 0.710 | 0.622 |
| LTE Band 26 | 0 | 0.910 | 2.270 | 0.910 | 0.500 |
| LTE Band 26 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 30 | 5 | 0.824 | 2.270 | 0.345 | 0.084 |
| LTE Band 30 | 0 | 0.630 | 2.270 | 0.398 | 0.981 |
| LTE Band 30 | 6 | 0.387 | 2.270 | 0.219 | 0.843 |
| LTE Band 30 | 7 | 0.438 | 2.270 | 0.227 | 0.594 |
| LTE Band 66 | 5 | 0.913 | 2.270 | 0.488 | 0.086 |
| LTE Band 66 | 0 | 0.664 | 2.270 | 0.402 | 0.862 |
| LTE Band 66 | 6 | 0.518 | 2.270 | 0.229 | 0.699 |



| | | | | | |
|-----------------|----|-------|-------|-------|-------|
| LTE Band 66 | 7 | 0.751 | 2.270 | 0.503 | 0.585 |
| LTE Band 71 | 0 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 71 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 38 | 5 | 1.030 | 2.270 | 0.599 | 0.176 |
| LTE Band 38 | 0 | 0.869 | 2.270 | 0.468 | 1.030 |
| LTE Band 41_PC3 | 5 | 1.030 | 2.270 | 0.599 | 0.910 |
| LTE Band 41_PC2 | 5 | 0.849 | 2.270 | 0.487 | 0.163 |
| LTE Band 41_PC3 | 0 | 0.869 | 2.270 | 0.468 | 1.030 |
| LTE Band 41_PC2 | 0 | 0.742 | 2.270 | 0.391 | 0.946 |
| LTE Band 41_PC3 | 6 | 0.935 | 2.270 | 0.403 | 1.040 |
| LTE Band 41_PC2 | 6 | 0.701 | 2.270 | 0.319 | 0.762 |
| LTE Band 41_PC3 | 7 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 41_PC2 | 7 | 0.910 | 2.270 | 0.910 | 0.910 |
| LTE Band 48 | 10 | 0.931 | 2.270 | 0.462 | 0.874 |
| LTE Band 48 | 6 | 0.619 | 2.270 | 0.381 | 0.807 |
| LTE Band 48 | 11 | 0.535 | 2.270 | 0.509 | 0.988 |
| LTE Band 48 | 12 | 1.090 | 2.270 | 0.897 | 0.966 |
| FR1 n2 | 5 | 0.781 | 2.270 | 0.363 | 0.054 |
| FR1 n2 | 0 | 0.751 | 2.270 | 0.349 | 0.876 |
| FR1 n2 | 6 | 0.942 | 2.270 | 0.487 | 0.637 |
| FR1 n2 | 7 | 0.784 | 2.270 | 0.463 | 0.622 |
| FR1 n5 | 0 | 0.849 | 2.270 | 0.515 | 0.884 |
| FR1 n5 | 1 | 0.264 | 2.270 | 0.264 | 0.116 |
| FR1 n7 | 5 | 0.820 | 2.270 | 0.441 | 0.055 |
| FR1 n7 | 0 | 0.789 | 2.270 | 0.577 | 0.839 |
| FR1 n7 | 6 | 0.999 | 2.270 | 0.370 | 1.000 |
| FR1 n7 | 7 | 0.555 | 2.270 | 0.213 | 0.583 |
| FR1 n12 | 0 | 0.910 | 2.270 | 0.910 | 0.728 |
| FR1 n12 | 1 | 0.910 | 2.270 | 0.910 | 0.090 |
| FR1 n25 | 5 | 0.781 | 2.270 | 0.363 | 0.054 |
| FR1 n25 | 0 | 0.751 | 2.270 | 0.349 | 0.876 |
| FR1 n25 | 6 | 0.942 | 2.270 | 0.487 | 0.637 |
| FR1 n25 | 7 | 0.784 | 2.270 | 0.463 | 0.622 |
| FR1 n30 | 5 | 0.659 | 2.270 | 0.307 | 0.042 |
| FR1 n30 | 0 | 0.715 | 2.270 | 0.440 | 0.873 |
| FR1 n66 | 5 | 0.787 | 2.270 | 0.437 | 0.065 |
| FR1 n66 | 0 | 0.674 | 2.270 | 0.489 | 0.898 |
| FR1 n66 | 6 | 0.516 | 2.270 | 0.221 | 0.843 |
| FR1 n66 | 7 | 0.764 | 2.270 | 0.523 | 0.658 |
| FR1 n71 | 0 | 0.910 | 2.270 | 0.910 | 0.910 |
| FR1 n71 | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| FR1 n38 | 5 | 0.759 | 2.270 | 0.512 | 0.091 |
| FR1 n38 | 0 | 0.862 | 2.270 | 0.345 | 0.891 |
| FR1 n38 | 6 | 0.980 | 2.270 | 0.347 | 0.759 |
| FR1 n38 | 7 | 0.839 | 2.270 | 0.211 | 0.663 |
| FR1 n41_PC3 | 5 | 0.759 | 2.270 | 0.512 | 0.091 |
| FR1 n41_PC2 | 5 | 0.759 | 2.270 | 0.512 | 0.091 |
| FR1 n41_PC3 | 0 | 0.862 | 2.270 | 0.345 | 0.891 |
| FR1 n41_PC2 | 0 | 0.862 | 2.270 | 0.345 | 0.891 |
| FR1 n41_PC3 | 6 | 0.737 | 2.270 | 0.306 | 0.759 |
| FR1 n41_PC2 | 6 | 0.737 | 2.270 | 0.306 | 0.759 |
| FR1 n41_PC3 | 7 | 0.839 | 2.270 | 0.211 | 0.663 |
| FR1 n41_PC2 | 7 | 0.839 | 2.270 | 0.211 | 0.663 |



| | | | | | |
|-------------|-------|-------|-------|-------|-------|
| FR1 n48 | 10 | 0.884 | 2.270 | 0.483 | 0.825 |
| FR1 n48 | 6 | 0.849 | 2.270 | 0.723 | 0.719 |
| FR1 n48 | 11 | 0.530 | 2.270 | 0.486 | 0.892 |
| FR1 n48 | 12 | 0.927 | 2.270 | 0.526 | 0.918 |
| FR1 n77_PC3 | 10 | 0.435 | 2.270 | 0.203 | 0.647 |
| FR1 n77_PC2 | 10 | 0.435 | 2.270 | 0.203 | 0.647 |
| FR1 n77_PC3 | 6 | 0.557 | 2.270 | 0.432 | 0.842 |
| FR1 n77_PC2 | 6 | 0.557 | 2.270 | 0.432 | 0.842 |
| FR1 n77_PC3 | 11 | 0.867 | 2.270 | 0.779 | 0.951 |
| FR1 n77_PC2 | 11 | 0.867 | 2.270 | 0.779 | 0.951 |
| FR1 n77_PC3 | 12 | 0.812 | 2.270 | 0.458 | 0.844 |
| FR1 n77_PC2 | 12 | 0.812 | 2.270 | 0.458 | 0.844 |
| FR1 n78_PC3 | 10 | 0.621 | 2.270 | 0.275 | 0.647 |
| FR1 n78_PC2 | 10 | 0.621 | 2.270 | 0.275 | 0.647 |
| FR1 n78_PC3 | 6 | 0.845 | 2.270 | 0.708 | 0.842 |
| FR1 n78_PC2 | 6 | 0.845 | 2.270 | 0.708 | 0.842 |
| FR1 n78_PC3 | 11 | 0.867 | 2.270 | 0.779 | 0.951 |
| FR1 n78_PC2 | 11 | 0.867 | 2.270 | 0.779 | 0.951 |
| FR1 n78_PC3 | 12 | 0.812 | 2.270 | 0.458 | 0.802 |
| FR1 n78_PC2 | 12 | 0.812 | 2.270 | 0.458 | 0.802 |
| Bluetooth | 1 | 0.910 | 2.270 | 0.910 | 0.910 |
| Bluetooth | 10 | 0.910 | 2.270 | 0.910 | 0.401 |
| Bluetooth | 13 | 0.910 | 2.270 | 0.910 | 0.499 |
| WLAN2.4GHz | 13 | 0.757 | 2.270 | 0.509 | 0.803 |
| WLAN2.4GHz | 10 | 0.656 | 2.270 | 0.324 | 0.755 |
| WLAN2.4GHz | 13+10 | 0.598 | 2.270 | 0.313 | 0.686 |
| WLAN5.2GHz | 14 | 0.272 | 2.270 | 0.232 | 0.549 |
| WLAN5.2GHz | 15 | 0.103 | 2.270 | 0.105 | 0.910 |
| WLAN5.2GHz | 14+15 | 0.088 | 2.270 | 0.084 | 0.229 |
| WLAN5.3GHz | 14 | | 1.120 | 0.232 | 0.549 |
| WLAN5.3GHz | 15 | | 0.236 | 0.105 | 0.910 |
| WLAN5.3GHz | 14+15 | | 0.201 | 0.084 | 0.229 |
| WLAN5.5GHz | 14 | | 1.350 | 0.327 | 0.880 |
| WLAN5.5GHz | 15 | | 0.469 | 0.278 | 0.910 |
| WLAN5.5GHz | 14+15 | | 0.318 | 0.146 | 0.347 |
| WLAN5.8GHz | 14 | 0.339 | 2.270 | 0.215 | 0.630 |
| WLAN5.8GHz | 15 | 0.423 | 2.270 | 0.423 | 0.164 |
| WLAN5.8GHz | 14+15 | 0.149 | 2.270 | 0.149 | 0.309 |
| WLAN6GHz | 14 | | 2.270 | 0.910 | 0.910 |
| WLAN6GHz | 15 | | 2.270 | 0.910 | 0.910 |
| WLAN6GHz | 14+15 | | 2.270 | 0.910 | 0.910 |

Based on the selection criteria described in Section 3.2, the radio configurations for the Tx varying transmission test cases listed in Section 2 are:

1. Technologies and bands for time-varying Tx power transmission: The test case 1~14 listed in Table 4-2 are selected to test with the test sequences defined in Section 3.1 in both time-varying conducted power measurement and time-varying SAR measurement.
2. Technology and band for change in call test: The test case 15 listed in Table 4-2 are selected for performing the call drop test in conducted power setup. WLAN5GHz, Ant 14+15, DSI = 4 having the lowest P_{limit} among all technologies and bands
3. Technologies and bands for change in technology/band test: The test case 16 listed in Table 4-2 is selected for handover test from a technology/band (LTE Band 25, DSI = 5, Ant 0) to another technology/band (WCDMA Band 4, DSI = 5, Ant 0), in conducted power setup.
4. Technologies and bands for change in DSI: The test case 19 listed in Table 4-2 is selected for DSI switch test by establishing a call in WLAN5GHz MIMO in DSI = 4, and then handing over to DSI = 5 exposure scenario in conducted power setup.
5. Technologies and bands for change in time-window/antenna: The test case 17~18 listed in Table 4-2 is selected for time window switch between 60s window (LTE Band 48) and 100s window (LTE Band 25) in conducted power setup. LTE Band 48 is using different antenna from LTE Band 25, so this test also address the antenna change.
6. Technologies and bands for switch in SAR exposure: The test case 20 listed in Table 4-2 are selected for SAR exposure switching test in one of the supported simultaneous WWAN transmission scenario, i.e., LTE (LTE Band 5) + 5G NR (5G NR FR1 n7) active in the same (100s/100s) time window, in conducted power setup.
7. Technologies and bands for switch in SAR exposure: The test case 21 listed in Table 4-2 are selected for SAR exposure switching test in one of the supported simultaneous WWAN transmission scenario, i.e., LTE (LTE Band 5) + 5G NR (5G NR FR1 n77) active in the different (100s/60s) time window, in conducted power setup.
8. Technologies and bands for switch in SAR exposure (WLAN DBS): The test case 22 listed in Table 4-2 are selected for SAR exposure switching test in one of the supported simultaneous WLAN transmission scenario, i.e., DBS (WLAN 2.4GHz SISO, DSI = 4, Ant 10 Radio + WLAN 5GHz SISO, DSI = 4, Ant 15 Radio) active in the same 30s time window, in conducted power setup.
9. System Level Compliance Continuity test (WWAN+WLAN+BT): The test case 23 listed in Table 4-2 are selected for System Level Compliance Continuity test in one of the supported simultaneous WWAN+WLAN+BT transmission scenario.

5 Conducted Power Test Results for Sub-6 Smart Transmit Feature Validation

5.1 Measurement setup

The Rohde & Schwarz CMW500 callbox is used in this test. The test setup schematic are shown in Figures 5-1. For single antenna measurement, one port (RF1 COM) of the callbox is connected to the RF port of the EUT using a directional coupler. For antenna & technology switch measurement, two ports (RF1 COM and RF3 COM) of the callbox used for signaling two different technologies are connected to a combiner, which is in turn connected to a directional coupler. The other end of the directional coupler is connected to a splitter to connect to two RF ports of the EUT corresponding to the two antennas of interest. In both the setups, power meter is used to tap the directional coupler for measuring the conducted output power of the EUT. For time averaging validation test (Section 3.3.1), call drop test (Section 3.3.2), and DSI switch test (Section 3.3.4), only RF1 COM port of the callbox is used to communicate with the EUT. For technology/band switch measurement (Section. 3.3.3), both RF1 COM and RF3 COM port of callbox are used to switch from one technology communicating on RF1 COM port to another technology communicating on RF3 COM port. All the path losses from RF port of EUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.

Sub6 NR test setup:

The Keysight UXM E7515B callbox is used in this test. The test setup schematic are shown in Figures 5-1. For single antenna measurement, one port (RF1 COM) of the callbox is connected to the RF port of the EUT using a directional coupler.

LTE+5G NR test setup:

The Keysight UXM E7515B callbox is used in this test. If LTE conducted port and 5G NR conducted port are same on this EUT (i.e., they share the same antenna), therefore, low-/high-pass filter are used to separate LTE and 5G NR signals for power meter measurement via directional couplers, as shown in below Figure 5-1 C (Appendix E – Test Setup Photo).

All the path losses from RF port of DUT to the callbox RF COM port and to the power meter are calibrated and automatically entered as offsets in the callbox and the power meter via test scripts on the PC used to control callbox and power meter.


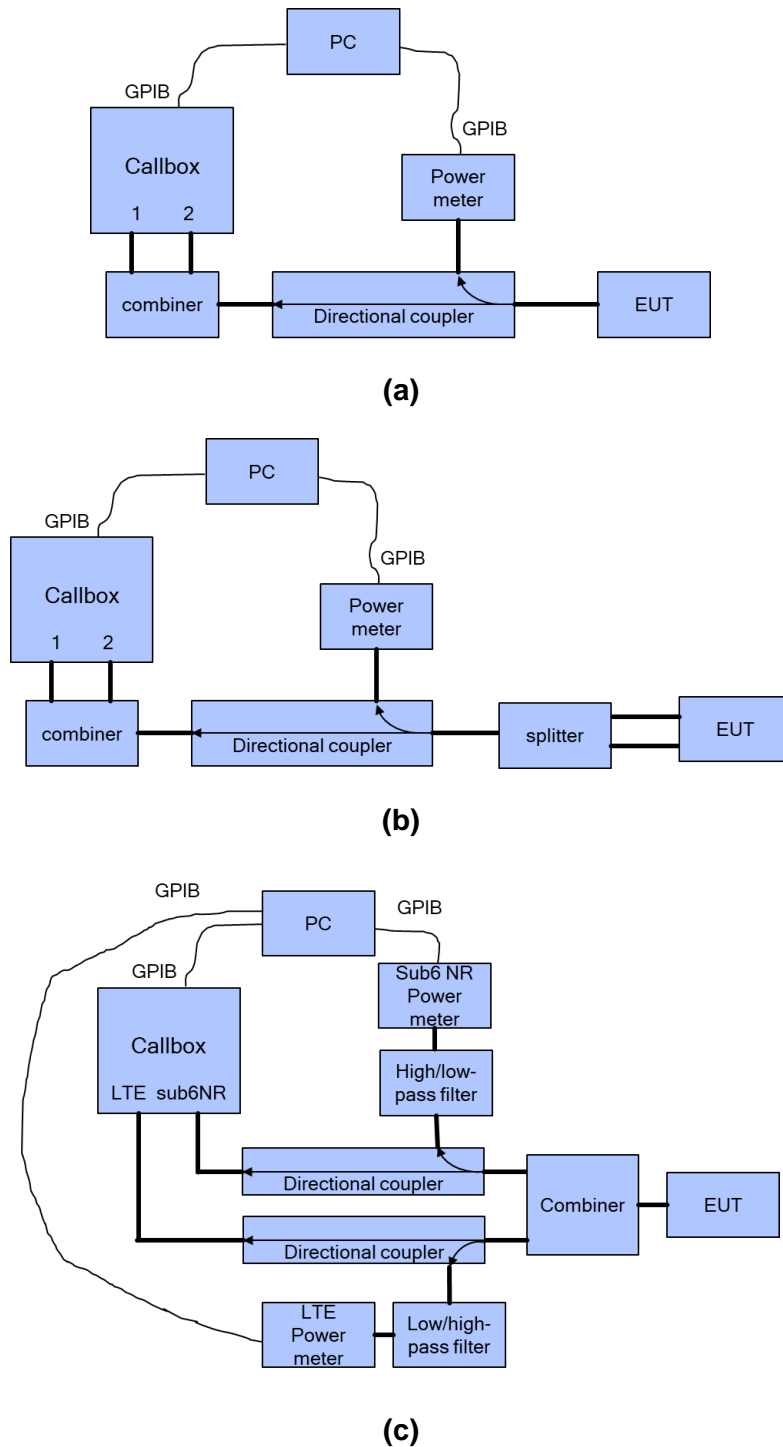



Figure 5-1 Conducted power measurement setup




WLAN Test Setup – SISO

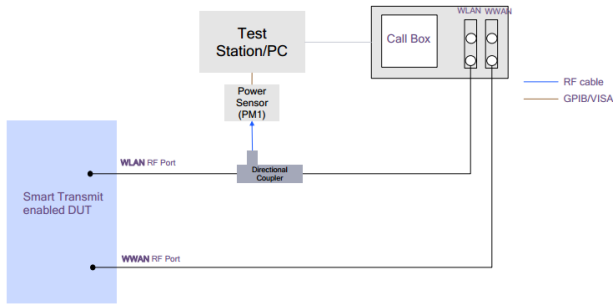


WLAN Test setup - MIMO

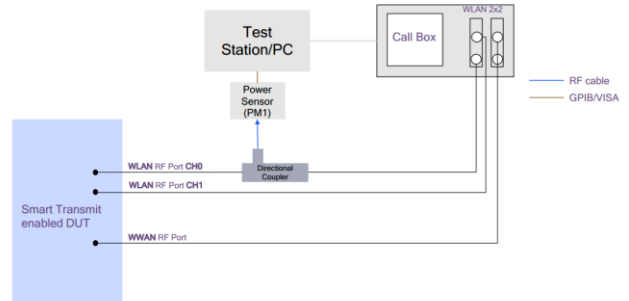

WLAN DBS Test Setup – SISO

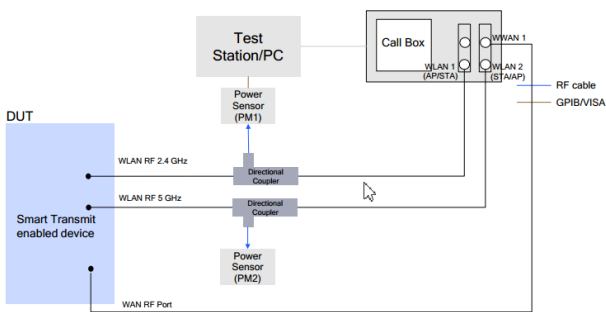

WLAN DBS Test setup - MIMO

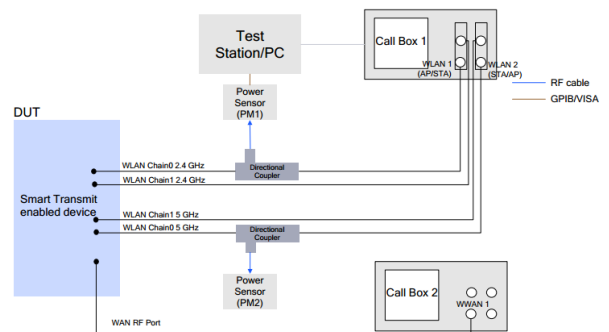

(d)

Figure 5-2 Conducted power measurement setup for WLAN/BT Band

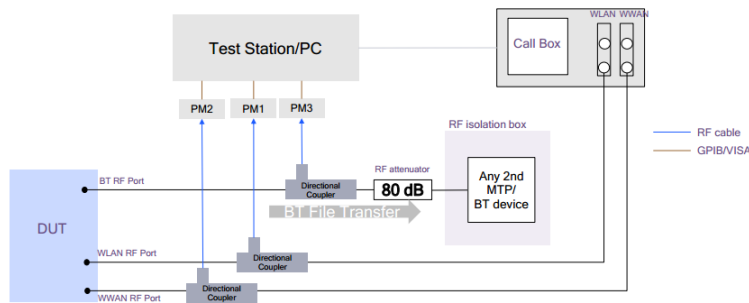


Figure 5-3 System Level Continuity test setup

Both the callbox and power meter are connected to the PC using GPIB cables. Two test scripts are custom made for automation, and the test duration set in the test scripts is 500 seconds.

For time-varying Tx power measurement, the PC runs the 1st test script to send GPIB commands to control the callbox's requested power versus time, while at the same time to record the conducted power measured at EUT RF port using the power meter. The commands sent to the callbox to request power are:

WWAN Band measurement:

- 0dBm for 100 seconds
- test sequence 1 or test sequence 2 (defined in Section 3.1 and generated in Section 3.2.1), for 360 seconds
- stay at the last power level of test sequence 1 or test sequence 2 for the remaining time.

WLAN Band measurement:

- 0 dBm for 100 seconds
- Test sequence #1 (defined in Section 3.1 and generated in Section 3.2.1), For 200 seconds
- Stay at the last power level of test sequence #1 for the remaining time.

Power meter readings are periodically recorded every 100ms. A running average of this measured Tx power over 100 seconds is performed in the post-data processing to determine the 100s-time averaged power of WWAN Bands, the 30s-time averaged power of WLAN Bands.

For call drop, technology/band/antenna switch, and DSI switch tests, after the call is established, the callbox is set to request the EUT's Tx power at 0dBm for 100 seconds while simultaneously starting the 2nd test script runs at the same time to start recording the Tx power measured at EUT RF port using the power meter. After the initial 100 seconds since starting the Tx power recording, the callbox is set to request maximum power from the EUT for the rest of the test. Note that the call drop/re-establish, or technology/band/antenna switch or DSI switch is manually performed when the Tx power of EUT is at $P_{reserve}$ level. See Section 3.3 for detailed test procedure of call drop test, technology/band/antenna switch test and DSI switch test.



5.2 P_{limit} and P_{max} measurement results

The measured P_{limit} for all the selected radio configurations given in Table 4-2 are listed in below Table 5-1. P_{max} was also measured for radio configurations selected for testing time-varying Tx power transmission scenarios in order to generate test sequences following the test procedures in Section 3.1.

Table 5-1: Measured P_{limit} and P_{max} of selected radio configurations

| Test case # | Test scenario | Tech | Band | Ant | DSI | Channel | Freq (MHz) | BW | RB size | RB offset | Mode | Position | Position details | Plimit EFS Setting(dBm) | Target Pmax (dBm) | Measured Plimit (dBm) | Measured Pmax (dBm) |
|-------------|------------------------------|-----------|-----------|-------|-----|---------|------------|-----|---------|-----------|---------------------|--------------|------------------|-------------------------|-------------------|-----------------------|---------------------|
| 1 | Time-Varying | WCDMA | 5 | 0 | 5 | 4182 | 836.4 | - | - | - | RMC 12.2Kbps | Left Cheek | 0mm | 20.6 | 23.6 | 20.5 | 24.2 |
| 2 | | WCDMA | 5 | 0 | 5 | 4182 | 836.4 | - | - | - | RMC 12.2Kbps | Left Cheek | 0mm | 20.6 | 23.6 | 20.5 | 24.2 |
| 3 | | WCDMA | 2 | 0 | 5 | 9400 | 1880 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 19.6 | 23.6 | 18.8 | 22.9 |
| 4 | | WCDMA | 2 | 0 | 5 | 9400 | 1880 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 19.6 | 23.6 | 18.8 | 22.9 |
| 5 | | LTE | 66 | 0 | 5 | 132572 | 1770 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 21.6 | 23.6 | 21.2 | 23.3 |
| 6 | | LTE | 66 | 0 | 5 | 132572 | 1770 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 21.6 | 23.6 | 21.2 | 23.3 |
| 7 | | LTE | 48 | 12 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 14.1 | 20.1 | 13.7 | 20 |
| 8 | | LTE | 48 | 12 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 14.1 | 20.1 | 13.7 | 20 |
| 9 | | 5G NR | n5 | 0 | 4 | 167300 | 836.5 | 20 | 1 | 1 | DFT-15,QPSK | Left Side | 10mm | 22.5 | 24 | 22.9 | 24.3 |
| 10 | | 5G NR | n5 | 0 | 4 | 167300 | 836.5 | 20 | 1 | 1 | DFT-15,QPSK | Left Side | 10mm | 22.5 | 24 | 22.9 | 24.3 |
| 11 | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 14.5 | 23.5 | 15.2 | 22.5 |
| 12 | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 14.5 | 23.5 | 15.2 | 22.5 |
| 13 | | WIFI SISO | 2.4GHz | 10 | 4 | 11 | 2462 | - | - | - | 802.11b 1Mbps | Back | 10mm | 18.3 | 21.3 | 17.4 | 20.1 |
| 14 | | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 11.8 | 17.3 | 12.7 | 17.5 |
| 15 | Call Drop | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 11.8 | 17.3 | 12.7 | 17.5 |
| 16 | Tech Switch | LTE | 25 | 0 | 5 | 26340 | 1880 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 18.6 | 23.6 | 18 | 22.9 |
| | | WCDMA | 4 | 0 | 5 | 1413 | 1732.6 | - | - | - | RMC 12.2Kbps | Right Cheek | 0mm | 21.1 | 23.6 | 20.4 | 22.6 |
| 17 | 100s-60s-100s | LTE | 25 | 0 | 5 | 26340 | 1880 | 20 | 1 | 49 | QPSK | Right Cheek | 0mm | 18.6 | 23.6 | 18 | 22.9 |
| | | LTE | 48 | 6 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Tilted | 0mm | 15.1 | 21.1 | 14.8 | 21.2 |
| 18 | 60s-100s-60s | LTE | 48 | 6 | 5 | 55830 | 3609 | 20 | 1 | 49 | QPSK | Right Tilted | 0mm | 15.1 | 21.1 | 14.8 | 21.2 |
| | | LTE | 25 | 5 | 5 | 26590 | 1905 | 20 | 1 | 49 | QPSK | Left Cheek | 0mm | 20.8 | 23.8 | 20.6 | 23.6 |
| 19 | DSI Switch | WIFI MIMO | 5GHz | 14+15 | 4 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 11.8 | 17.3 | 12.7 | 17.5 |
| | | WIFI MIMO | 5GHz | 14+15 | 5 | 116 | 5580 | - | - | - | 802.11ac-VHT20 MCS0 | Left Cheek | 0mm | 15.8 | 17.3 | 14.6 | 17.5 |
| 20 | EN-DC (100s/100s) SAR vs SAR | LTE | 5 | 0 | 5 | 20525 | 836.5 | 10 | 1 | 0 | QPSK | Left Cheek | 0mm | 20.1 | 23.6 | 20.6 | 23 |
| | | 5G NR | n7 | 6 | 5 | 507000 | 2535 | 50 | 1 | 1 | DFT-15,QPSK | Right Tilted | 0mm | 16.5 | 23 | 16.7 | 22.9 |
| 21 | EN-DC (100s/60s) SAR vs SAR | LTE | 5 | 0 | 5 | 20525 | 836.5 | 10 | 1 | 0 | QPSK | Left Cheek | 0mm | 20.1 | 23.6 | 20.6 | 23 |
| | | 5G NR | n77 | 6 | 5 | 656000 | 3840 | 100 | 1 | 1 | DFT-30,QPSK | Right Tilted | 0mm | 14.5 | 23.5 | 15.2 | 22.5 |
| 22 | WLAN DBS | WIFI SISO | 2.4GHz AP | 10 | 4 | 11 | 2462 | - | - | - | 802.11n-HT20 MCS0 | Right Side | 10mm | 18.3 | 21.3 | 19 | 20.1 |
| | | WIFI SISO | 5GHz STA | 15 | 4 | 40 | 5200 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 12.8 | 20.3 | 13 | 19.1 |
| 23 | System Continuity Test | LTE | 25 | 0 | 4 | 26590 | 1905 | 20 | 1 | 49 | QPSK | Left Side | 10mm | 19.6 | 23.6 | 18.6 | 22.9 |
| | | WIFI SISO | 5GHz | 15 | 4 | 36 | 5180 | - | - | - | 802.11ac-VHT20 MCS0 | Back | 10mm | 12.8 | 20.3 | 13 | 19.1 |
| | | Bluetooth | - | 13 | 4 | 0 | 2402 | - | - | - | EDR | Top Side | 10mm | 17.6 | 13.2 | 12.0 | 12.0 |

BT Plimit calculation Results

| Measured_BT_power (dBm) | BT_STANDALONE | Measured BT Plimit (dBm) |
|-------------------------|---------------|--------------------------|
| 11.53 | 0.9 | 12.0 |

5.3 Time-varying Tx power measurement results

The measurement setup is shown in Figures 5-1(a) and 5-1(c). The purpose of the time-varying Tx power measurement is to demonstrate the effectiveness of power limiting enforcement and that the time-averaged Tx power when represented in time-averaged 1gSAR or 10gSAR values does not exceed FCC limit as shown in Eq. (1a) and (1b), rewritten below:

$$1g_or_10gSAR(t) = \frac{conducted_Tx_power(t)}{conducted_Tx_power_P_{limit}} * 1g_or_10gSAR_P_{limit} \quad (1a)$$

$$\frac{\frac{1}{T_{SAR}} \int_{t-T_{SAR}}^t 1g_or_10gSAR(t) dt}{FCC\ SAR\ limit} \leq 1 \quad (1b)$$

where, *conducted_Tx_power(t)*, *conducted_Tx_power_P_{limit}*, and *1g_or_10gSAR_P_{limit}* correspond to the measured instantaneous conducted Tx power, measured conducted Tx power at *P_{limits}*, and measured 1gSAR and 10gSAR values at *P_{limit}* reported in Part 1 test (listed in Table 4-2 of this report as well).

Following the test procedure in Section 3.3, the conducted Tx power measurement for all selected configurations are reported in this section. In all the conducted Tx power plots, the dotted line represents the requested power by callbox (test sequence 1 or test sequence 2), the blue curve represents the instantaneous conducted Tx power measured using power meter, the green curve represents time-averaged power and red line represents the conducted power limit that corresponds to FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.

Similarly, in all the 1g or 10gSAR plots (when converted using Eq. (1a)), the green curve represents the 100s/60s-time averaged 1gSAR or 10gSAR value calculated based on instantaneous 1gSAR or 10gSAR; and the red line limit represents the FCC limit of 1.6 W/kg for 1gSAR or 4.0 W/kg for 10gSAR.


The power limiting enforcement is effective in all the tests, and the time-averaged 1gSAR does not exceed the SAR design target + device uncertainty for all the tested technologies/bands. Therefore, Qualcomm Smart Transmit time averaging feature is validated.



5.3.1 WCDMA Band 5

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

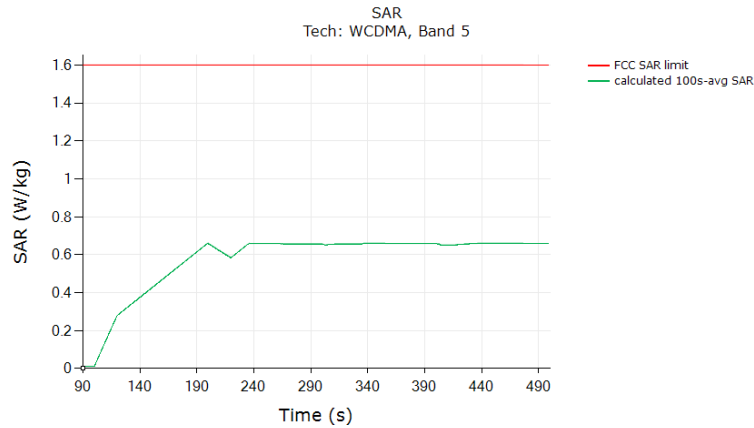

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.661 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

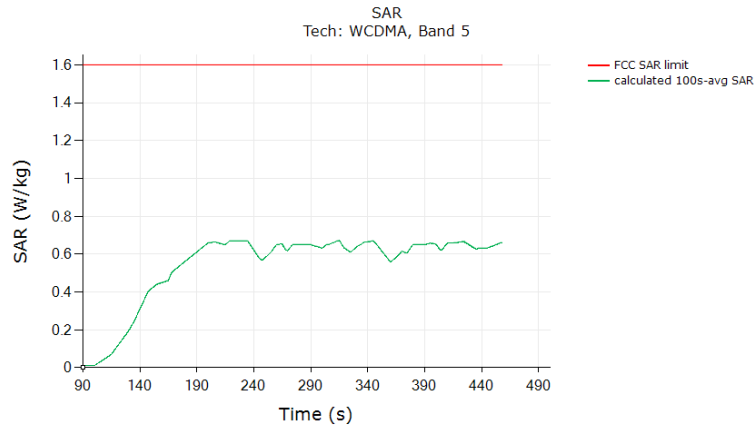


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.672 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |



5.3.2 WCDMA Band 2

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

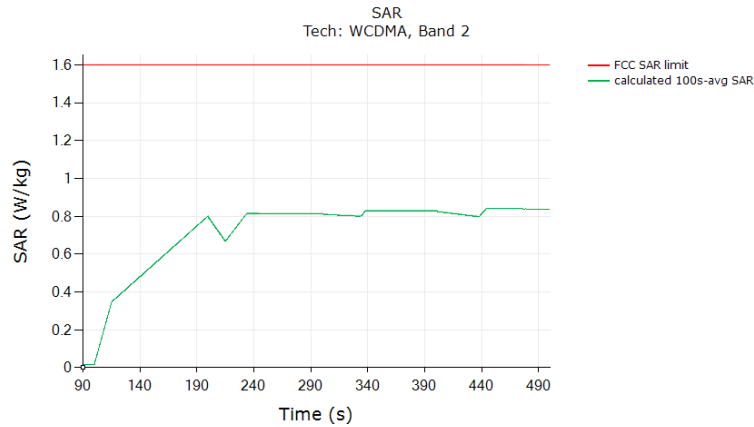

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.839 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

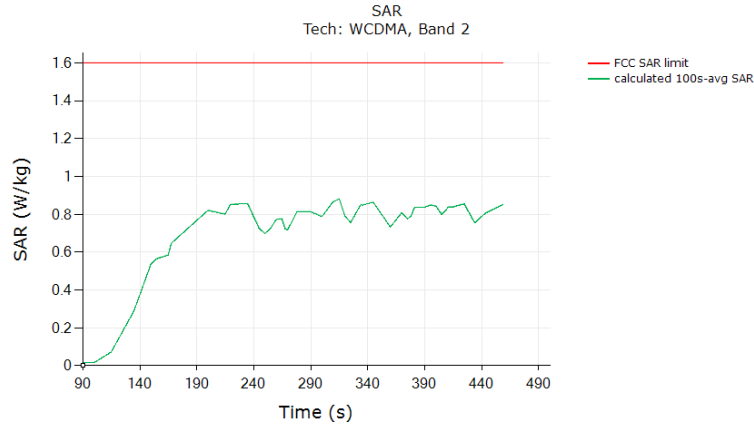


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.880 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

5.3.3 LTE Band 66

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

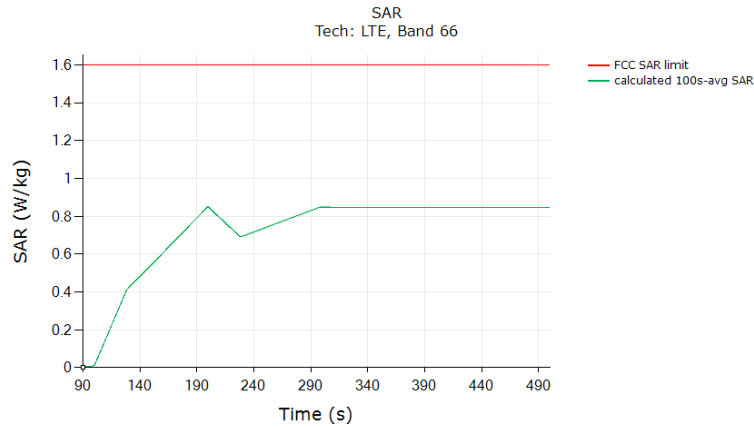

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.850 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

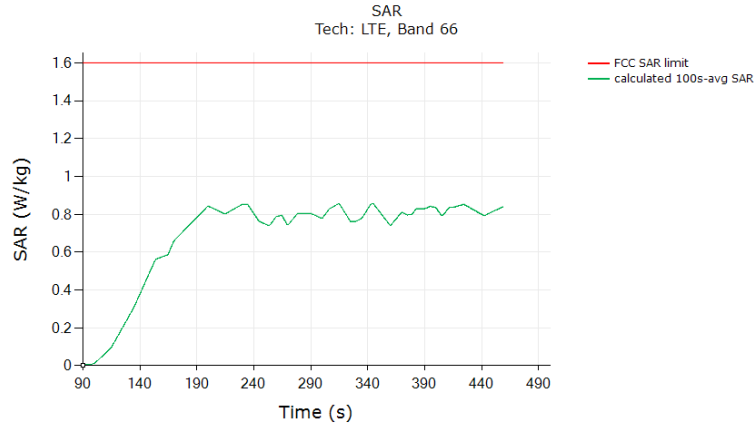


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.856 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |



5.3.4 LTE Band 48

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

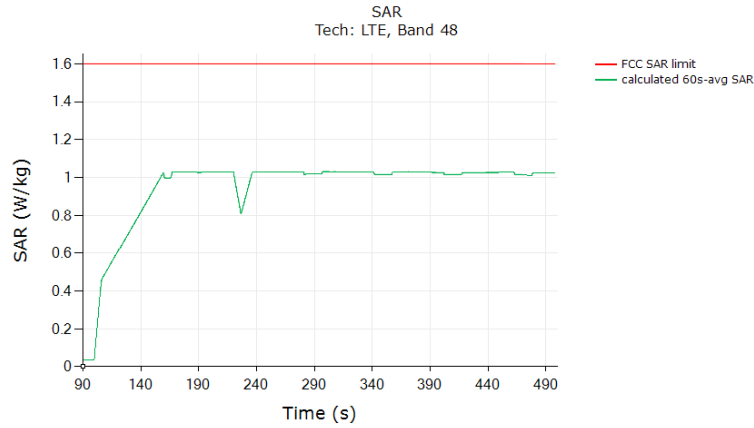

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 1.029 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

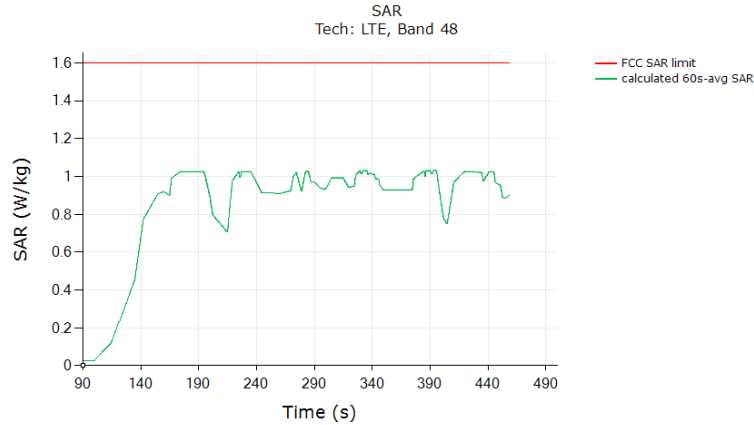


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 1.031 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

5.3.5 5GNR FR1 n5

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

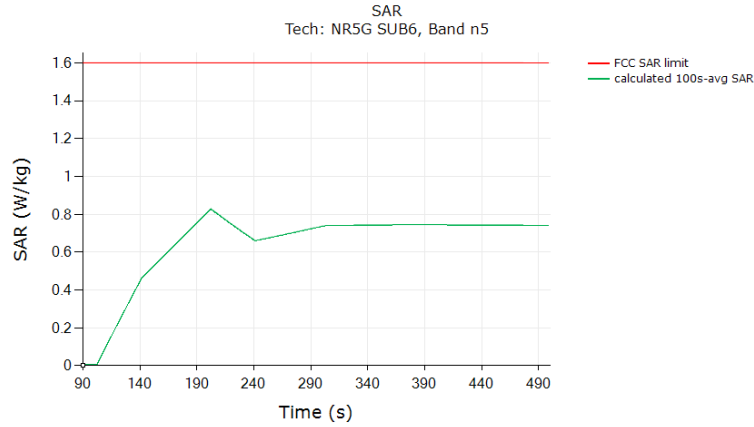

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.828 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

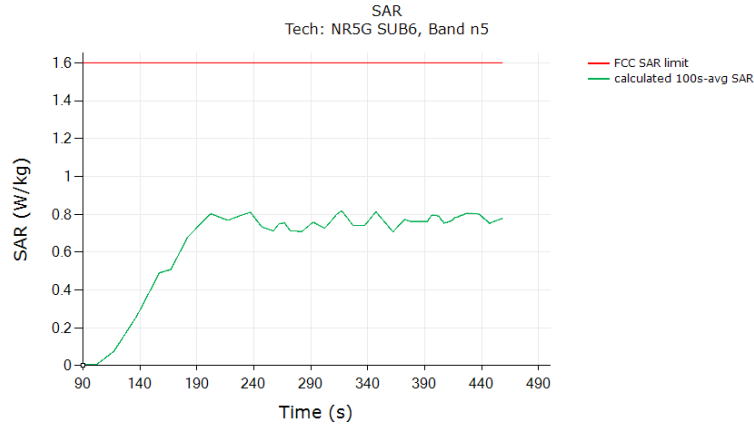


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.816 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |



5.3.6 5G NR FR1 n77

Test result for test sequence 1:


Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

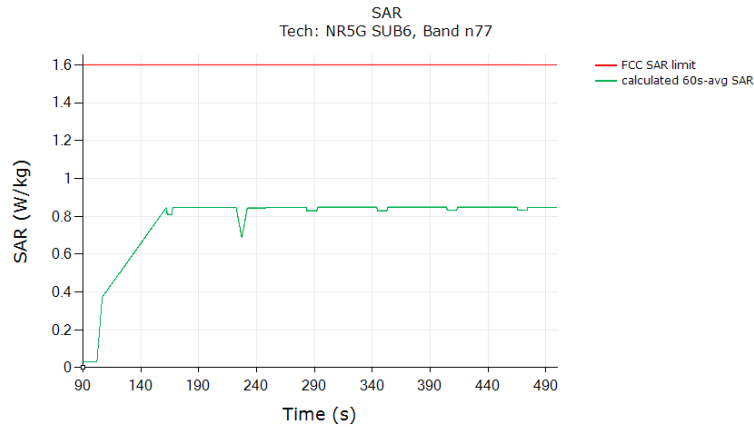

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.848 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

Test result for test sequence 2:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

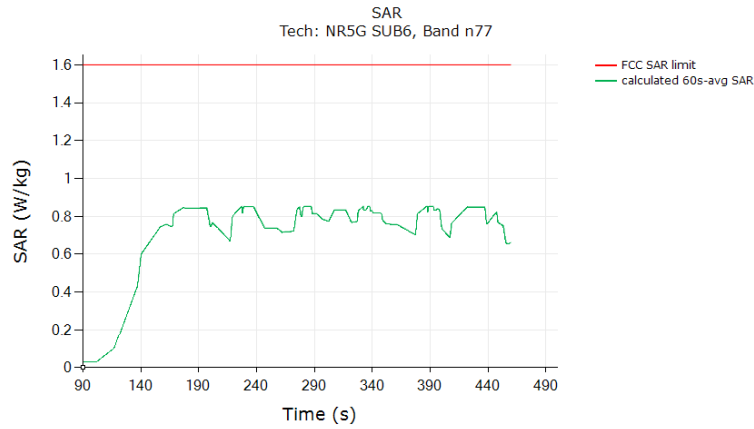


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.852 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

5.3.7 WLAN 2.4GHz SISO

Test result for test sequence 1:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

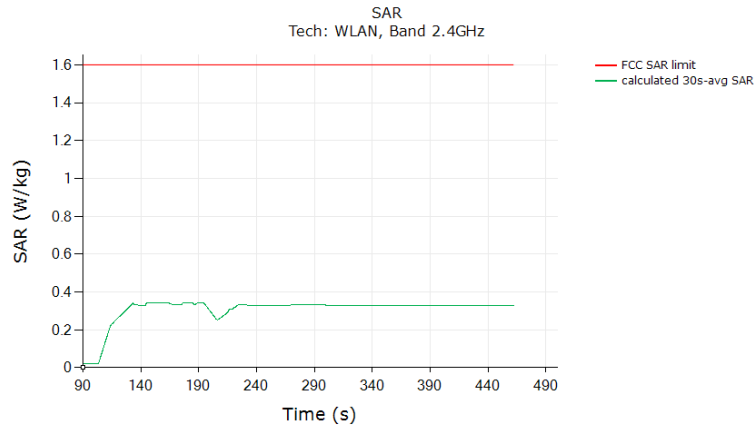


| | |
|--|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 30s-time averaged 1gSAR (green curve) | 0.343 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

5.3.8 WLAN 5GHz MIMO

Test result for test sequence 1:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

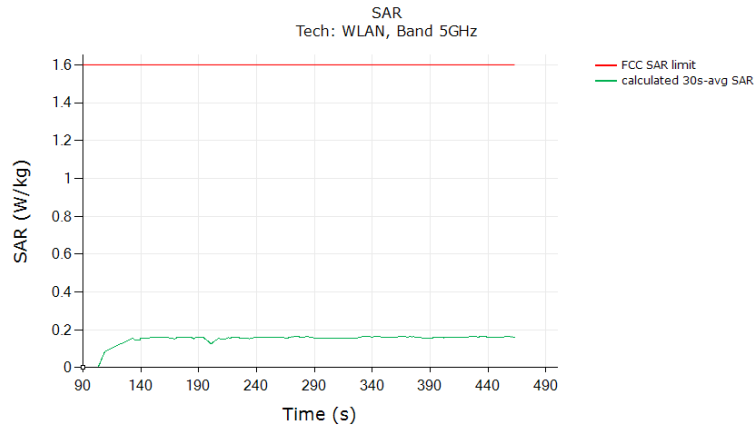


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 30s-time averaged 1gSAR (green curve) | 0.164 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

5.4 Change in Call Test Results

This test was measured with WLAN5GHz, Ant 14+15, DSI = 4, and with callbox requesting maximum power. The call drop was manually performed when the EUT is transmitting at $P_{reserve}$ level as shown in the plot below (dotted black region). The measurement setup is shown in Figure 5-1. The detailed test procedure is described in Section 3.3.2.

Call drop test result:

Above time-averaged conducted Tx power is converted/calculated into time-averaged 1gSAR using Equation (1a) and plotted below to demonstrate that the time-averaged 1gSAR versus time does not exceed the FCC limit of 1.6 W/kg for 1gSAR:

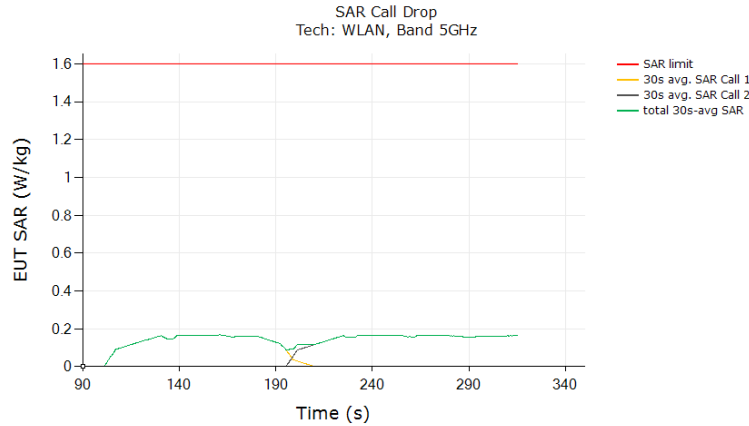

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 30s-time averaged 1gSAR (green curve) | 0.167 |
| Validated | |


The test result validated the continuity of power limiting in Change in Call scenario.

5.5 Change in technology/band test results

This test was conducted with callbox requesting maximum power, and with technology switch from LTE Band 25, DSI = 5, Ant 0 to WCDMA Band 4, DSI = 5, Ant 0. Following procedure detailed in Section 3.3.3, and using the measurement setup shown in Figure 5-1(a) and (c), the technology/band switch was performed when the EUT is transmitting at $P_{reserve}$ level as shown in the plot below (dotted black region).

Test result for change in technology/band:

All the time-averaged conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (6a), (6b) and (6c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0:

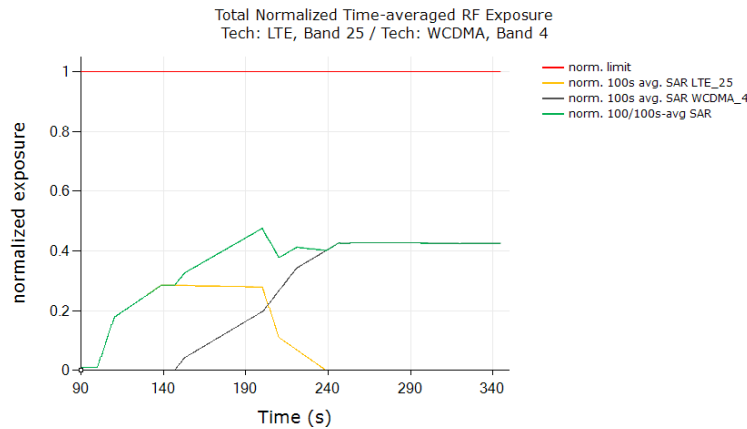

| | |
|--|----------------|
| | Exposure Ratio |
| FCC normalized Exposure Ratio limit | 1.0 |
| Max 100s-time averaged normalized Exposure Ratio (green curve) | 0.476 |
| Validated | |


The test result validated the continuity of power limiting in technology/band switch scenario.

5.6 Change in DSI test results

This test was conducted with callbox requesting maximum power, and with DSI switch from WLAN5GHz MIMO DSI = 4 to DSI = 5. Following procedure detailed in Section 3.3.5 using the measurement setup shown in Figure 5-1(a) and (c), the DSI switch was performed when the EUT is transmitting at $P_{reserve}$ level as shown in the plot below (dotted black circle).

Test result for change in DSI:

All the time-averaged conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (6a), (6b) and (6c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0:

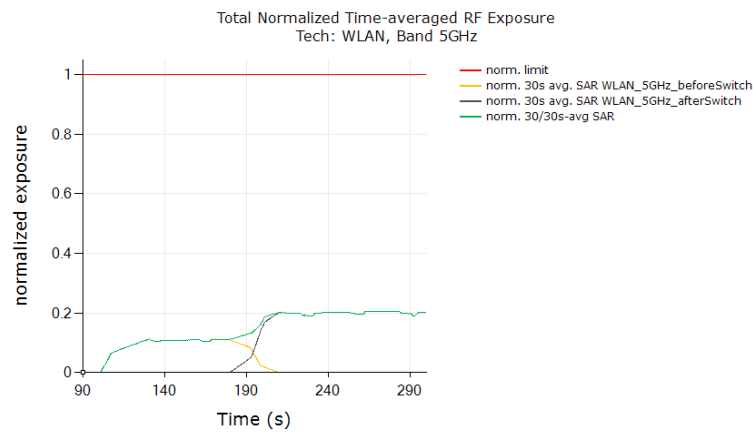

| | Exposure Ratio |
|---|----------------|
| FCC normalized Exposure Ratio limit | 1.0 |
| Max 30s-time averaged normalized Exposure Ratio (green curve) | 0.205 |
| Validated | |

The test result validated the continuity of power limiting in DSI switch scenario.




5.7 Change in Time window / antenna switch test results

5.7.1 Test case 1: transition from LTE Band 25 to LTE Band 48 (i.e., 100s to 60s), then back to LTE Band 25

Test result for change in time-window (from 100s to 60s to 100s):

All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0. Equation (7a) is used to convert the Tx power of device to obtain 100s-averaged normalized SAR in LTE Band 25 as shown in black curve. Similarly, equation (7b) is used to obtain 60s-averaged normalized SAR in LTE Band 48 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

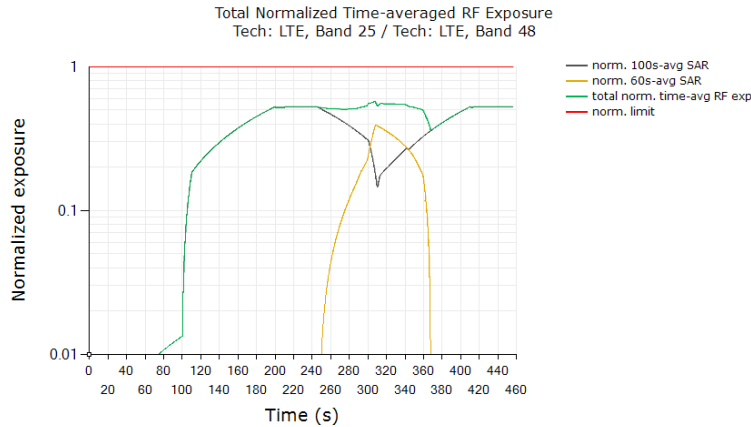

| | |
|---|----------------|
| | Exposure Ratio |
| FCC normalized Exposure Ratio | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.574 |
| Validated | |


Plot Notes:

Maximum power is requested by callbox for the entire duration of the test, with tech/band switches from 100s-to-60s window at ~245s time stamp, and from 60s-to-100s window at ~310s time stamp. Smart Transmit controls the Tx power during these time-window switches to ensure total time-averaged RF exposure, i.e., sum of black and orange curves given by equation (7c), is always compliant. In time-window switch test, at all times the total time averaged normalized RF exposure (green curve) should not exceed normalized SAR_design_target +total uncertainty. In this test, with a maximum normalized SAR of 0.574 being $\leq 0.72 (=0.876/1.6 +total\ uncertainty)$, the above test result validated the continuity of power limiting in time-window switch scenario.

5.7.2 Test case 2: transition from LTE Band 48 to LTE Band 25 (i.e., 60s to 100s), then back to LTE Band 48

Test result for change in time-window (from 60s to 100s to 60s):

All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0. Equation (7a) is used to convert the Tx power of device to obtain 60s-averaged normalized SAR in LTE Band 48 as shown in black curve. Similarly, equation (7b) is used to obtain 100s-averaged normalized SAR in LTE Band 25 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

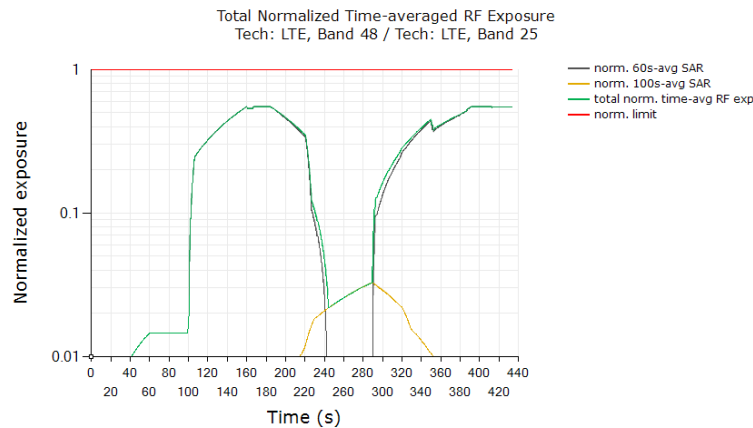

| | Exposure Ratio |
|---|----------------|
| FCC normalized Exposure Ratio limit | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.551 |
| Validated | |

Plot Notes:


Maximum power is requested by callbox for the entire duration of the test, with tech/band switches from 60s-to-100s window at ~185s time stamp, and from 100s-to-60s window at ~290s time stamp. Smart Transmit controls the Tx power during these time-window switches to ensure total time-averaged RF exposure, i.e., sum of black and orange curves given by equation (7c), is always compliant. In time-window switch test, at all times the total time averaged normalized RF exposure (green curve) should not exceed normalized SAR_design_target +total uncertainty. In this test, with a maximum normalized SAR of 0.551 being ≤ 0.66 ($=0.807/1.6$ +total uncertainty), the above test result validated the continuity of power limiting in time-window switch scenario.



5.8 Switch in SAR exposure test results (EN-DC Combination in the same time window)

This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 5 + 5G NR FR1 n7. Following procedure detailed in Section 3.3.7 and Appendix B.2, and using the measurement setup shown in Figure 5-1, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios.

All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0. Equation (7a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE Band 5 as shown in black curve. Similarly, equation (7b) is used to obtain 60s-averaged normalized SAR in 5G NR FR1 n7 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

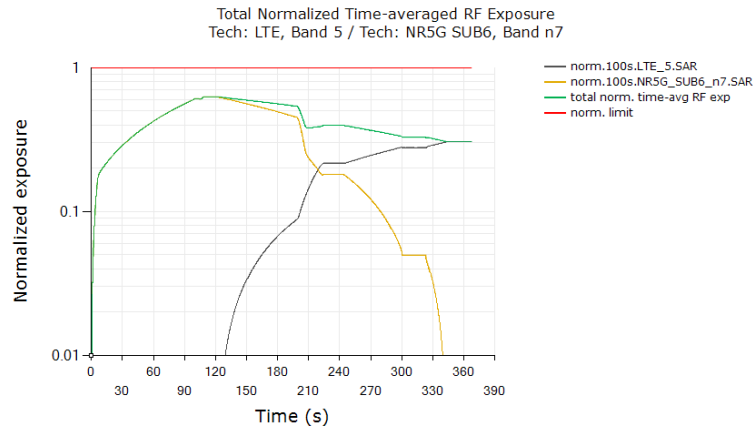

| | Exposure Ratio |
|---|----------------|
| FCC normalized Exposure Ratio limit | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.627 |
| Validated | |

Plot Notes:


Device starts predominantly in 5G NR SAR exposure scenario between 0s and 120s, and in LTE SAR + 5G NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after t=240s. Here, Smart Transmit allocates a maximum of 100% of exposure margin (based on reserve margin setting) for 5G NR. This corresponds to a normalized 1gSAR exposure value = 1.000W/kg measured SAR at 5G NR Plimit /1.6W/kg limit = 0.625+ “+total ~ -total” related uncertainty (see orange curve between 0s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin = 0.500W/kg measured SAR at LTE Plimit /1.6W/kg limit = 0.313+ “+total ~ -total” related uncertainty (see black curve after t = 240s). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF

exposure (green curve) should not exceed normalized SAR_design_target +total uncertainty. In this test, with a maximum normalized SAR of 0.627 being $\leq 0.82 (=1.00/1.6 +total\ uncertainty)$, the above test result validated the continuity of power limiting in SAR exposure switch scenario.

5.9 Switch in SAR exposure test results (EN-DC Combination in the different time window)

This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 5 + 5G NR FR1 n77. Following procedure detailed in Section 3.3.7 and Appendix B.2, and using the measurement setup shown in Figure 5-1, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios.

All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0. Equation (7a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE Band 5 as shown in black curve. Similarly, equation (7b) is used to obtain 60s-averaged normalized SAR in 5G NR FR1 n77 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

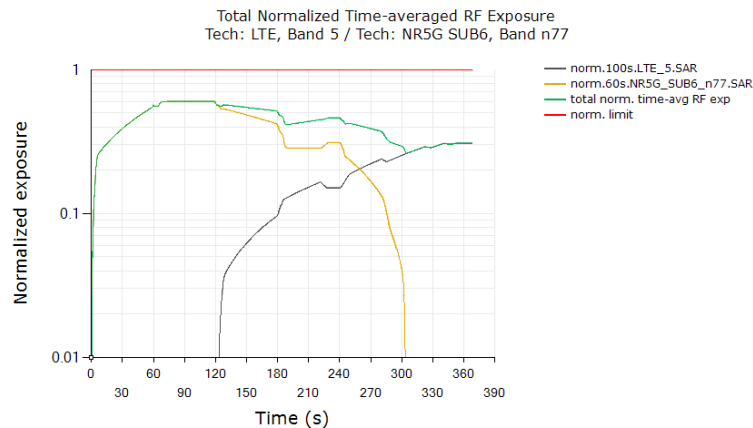

| | |
|---|----------------|
| | Exposure Ratio |
| FCC normalized Exposure Ratio limit | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.603 |
| Validated | |

Plot Notes:


Device starts predominantly in 5G NR SAR exposure scenario between 0s and 120s, and in LTE SAR + 5G NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after t=240s. Here, Smart Transmit allocates a maximum of 100% of exposure margin (based on reserve margin setting) for 5G NR. This corresponds to a normalized 1gSAR exposure value = $0.842W/kg\ measured\ SAR\ at\ 5G\ NR\ Plimit / 1.6W/kg$

limit = 0.526+ “+total ~ -total” related uncertainty (see orange curve between 0s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin = 0.500W/kg measured SAR at LTE Plimit /1.6W/kg limit = 0.313+ “+total ~ -total” related uncertainty (see black curve after t = 240s). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized SAR_design_target +total uncertainty. In this test, with a maximum normalized SAR of 0.603 being ≤ 0.69 ($=0.842/1.6$ +total uncertainty), the above test result validated the continuity of power limiting in SAR exposure switch scenario.

5.10 Switch in SAR exposure (WLAN DBS) test results (2.4GHz SISO + 5GHz SISO)

This test was conducted with callbox requesting maximum power, and with the EUT in WLAN 2.4GHz SISO, DSI = 4, Ant 10 + WLAN 5GHz SISO, DSI = 4, Ant 15 call. Following procedure detailed in Section 3.3.7 and Appendix B.2, and using the measurement setup shown in Figure 5-2 (e), the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios.

Plot Notes: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0 . Equation (7a) is used to convert the WLAN Tx power of device to obtain 30s-averaged normalized SAR in WLAN 2.4GHz SISO, DSI = 4, Ant 10 as shown in black curve. Similarly, equation (7b) is used to obtain 30s-averaged normalized SAR in WLAN 5GHz SISO, DSI = 4, Ant 15 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

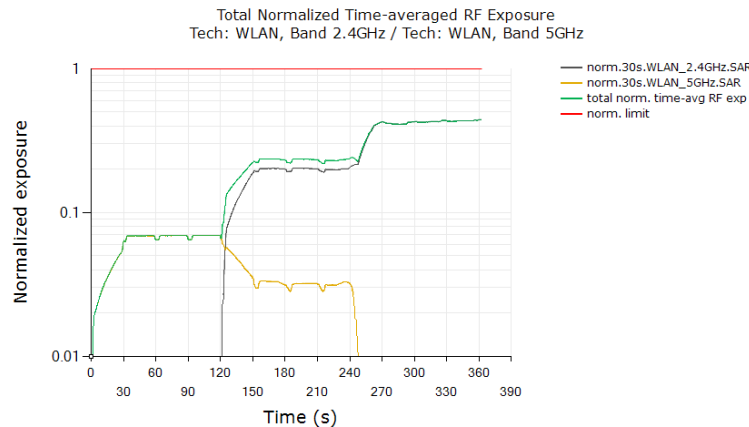

| | |
|---|----------------|
| | Exposure Ratio |
| FCC normalized Exposure Ratio limit | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.442 |
| Validated | |


Plot Notes:

Device starts predominantly in WLAN 5GHz SISO, DSI = 4, Ant 15 SAR exposure scenario between 0s and 120s, and in WLAN 2.4GHz SISO, DSI = 4, Ant 10 + WLAN 5GHz SISO, DSI = 4, Ant 15 SAR exposure scenario between 120s and 240s, and in predominantly in WLAN 2.4GHz SISO, DSI = 4, Ant 10 SAR exposure scenario after t=240s. Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized SAR_design_target +total uncertainty. In this test, with a maximum normalized SAR of 0.442 being ≤ 0.54 ($=0.656 / 1.6$ +total uncertainty), the above test result validated the continuity of power limiting in SAR exposure switch scenario.

5.11 System level compliance continuity test results

This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 25, DSI = 4, Ant 0 + WLAN 5GHz SISO, DSI = 4, Ant 15 + Bluetooth, DSI = 4, Ant 13 call. Following procedure detailed in Section 3.3.9 and using the measurement setup shown in Figure 5-3, the System level compliance continuity measurement is performed with the EUT in demonstrate compliance continuity across technologies , i.e., across WWAN, WLAN, BT, etc.

Plot Notes: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the normalized time-averaged RF exposure does not exceed the FCC limit of 1.0 . Equation (7a) is used to convert the Tech/Band/Ant/DSI Tx power of device to obtain 100s-averaged normalized SAR in LTE Band 25, DSI = 4, Ant 0 as shown in black curve. Similarly, equation (7b) is used to obtain 30s-averaged normalized SAR in WLAN 5GHz SISO, DSI = 4, Ant 15 as shown in orange curve. Similarly, equation (7b) is used to obtain 30s-averaged normalized SAR in Bluetooth, DSI = 4, Ant 13 as shown in blue curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black, orange and blue curves).

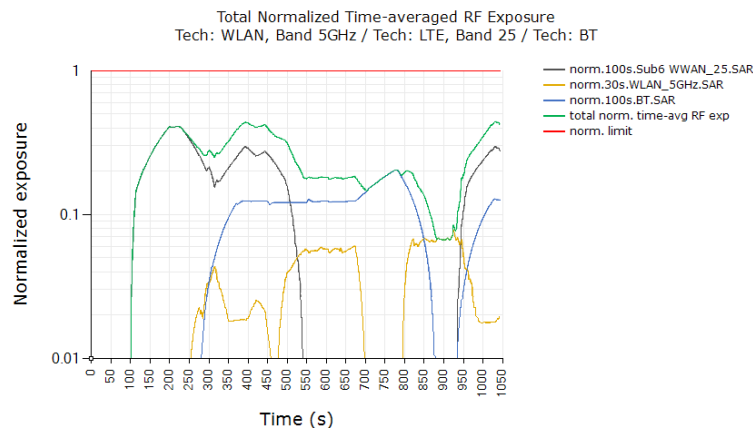

| | |
|---|----------------|
| | Exposure Ratio |
| FCC normalized Exposure Ratio limit | 1.0 |
| Max time averaged normalized Exposure Ratio (green curve) | 0.443 |
| Validated | |



In this test, the total time-averaged normalized RF exposure (green curve) did not exceed normalized of limit of 1.0 at all times, the above test result validated the total RF exposure compliance in system level compliance continuity test scenario.

6 SAR Test Results for Sub-6 Smart Transmit Feature Validation

6.1 Measurement setup

The measurement setup is similar to normal SAR measurements (see Appendix E). The difference in SAR measurement setup for time averaging feature validation is that the callbox is signaling in close loop power control mode (instead of requesting maximum power in open loop control mode) and callbox is connected to the PC using GPIB so that the test script executed on PC can send GPIB commands to control the callbox's requested power over time (test sequence). The same test script used in conducted setup for time-varying Tx power measurements is also used in this section for running the test sequences during SAR measurements, and the recorded values from the disconnected power meter by the test script were discarded.

As mentioned in Section 3.4, for EUT to follow TPC command sent from the callbox wirelessly, the "path loss" between callbox antenna and the EUT needs to be very well calibrated. Since the SAR chamber is in uncontrolled environment, precautions must be taken to minimize the environmental influences on "path loss". Similarly, in the case of time-varying SAR measurements in 5G NR (with LTE as anchor), "path loss" between callbox antenna and the EUT needs to be carefully calibrated for both LTE link as well as for 5G NR link.

The EUT is placed in worst-case position according to Table 4-2.

6.2 SAR measurement results for time-varying Tx power transmission scenario

Following Section 3.4 procedure, time-averaged SAR measurements are conducted using EX3DV4 probe at peak location of area scan over 500 seconds. cDASY6 system verification for SAR measurement is provided in Appendix C, and the associated SPEAG certificates are attached in Appendix D.

SAR probe integration times depend on the communication signal being tested. Integration times used by SPEAG for their probe calibrations can be downloaded from here (integration time is listed on the bottom of the first page for each tech):

<https://www.speag.com/assets/downloads/services/cs/UIDSummary171205.pdf>

Since the sampling rate used by cDASY6 for pointSAR measurements is not in user control, the number of points in 100s or 60s interval is determined from the scan duration setting in cDASY6 time-average pointSAR measurement by (100s or 60s / cDASY6_scan_duration * total number of pointSAR values recorded). Running average is performed over these number of points in excel spreadsheet to obtain 100s-/60s-averaged pointSAR.

Following Section 3.4, for each of selected technology/band (listed in Table 4-2):

1. With EUT set to peak mode, area scan is performed at P_{limit} , and time-averaged pointSAR measurements are conducted to determine the pointSAR at P_{limit} at peak location, denoted as $pointSAR_{P_{limit}}$.
2. With EUT set to intended Smart Transmit exposure mode, two more time-averaged pointSAR measurements are performed at the same peak location for test sequences 1 and 2.

To demonstrate compliance, all the pointSAR measurement results were converted into 1gSAR or 10gSAR values by using Equation (3a), rewritten below:


$$1g_or_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g_or_10gSAR_{P_{limit}} \quad (3a)$$

where, $pointSAR(t)$, $pointSAR_{P_{limit}}$, and $1g_or_10gSAR_{P_{limit}}$ correspond to the measured instantaneous point SAR, measured point SAR at P_{limit} from above step 1 and 2, and measured 1gSAR or 10gSAR values at P_{limit} obtained from Part 1 report and listed in Table 4-2 in Section 5.1 of this report.

The power limiting enforcement is effective in all the tests, and the time-averaged 1gSAR does not exceed the SAR design target + device uncertainty for all the tested technologies/bands. Therefore, Qualcomm Smart Transmit time averaging feature is validated.


6.2.1 WCDMA Band 5 SAR test results

SAR test results for test sequence 1:

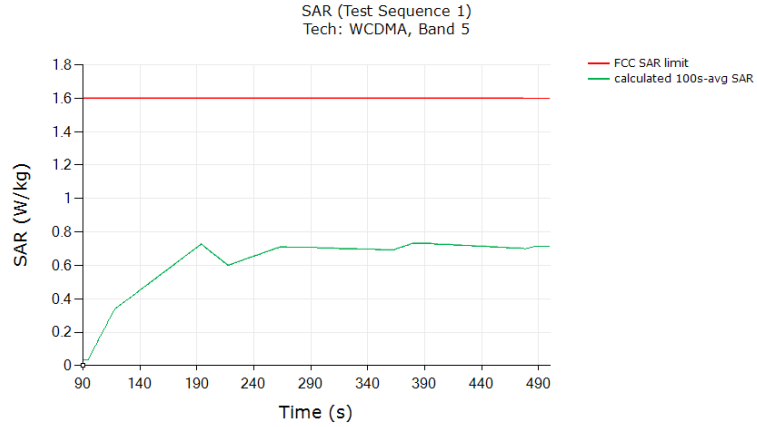

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.730 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

SAR test results for test sequence 2:

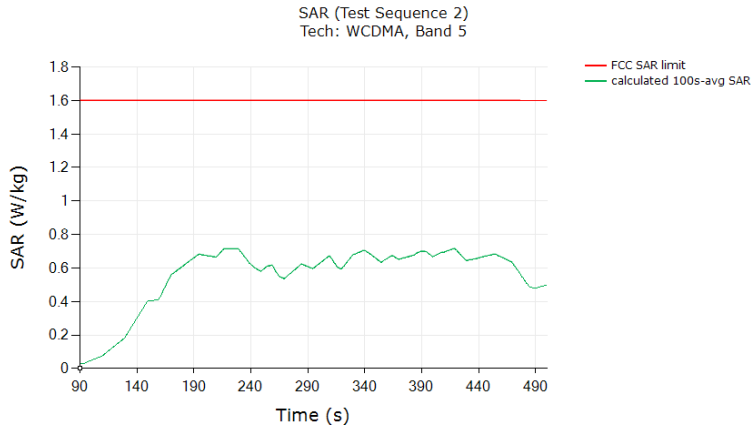


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.716 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |




6.2.2 WCDMA Band 2 SAR test results

SAR test results for test sequence 1:

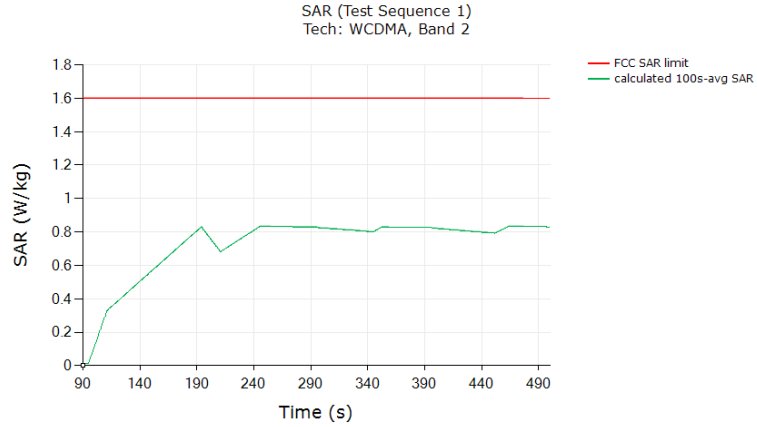

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.834 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |


SAR test results for test sequence 2:

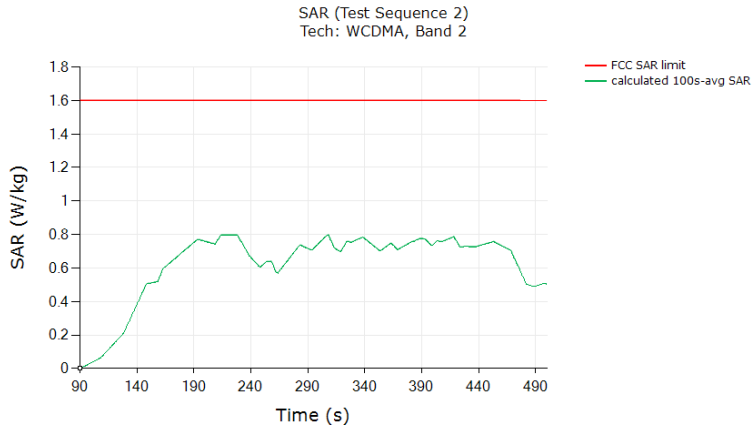

| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.797 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |


6.2.3 LTE Band 66 SAR test results

SAR test results for test sequence 1:

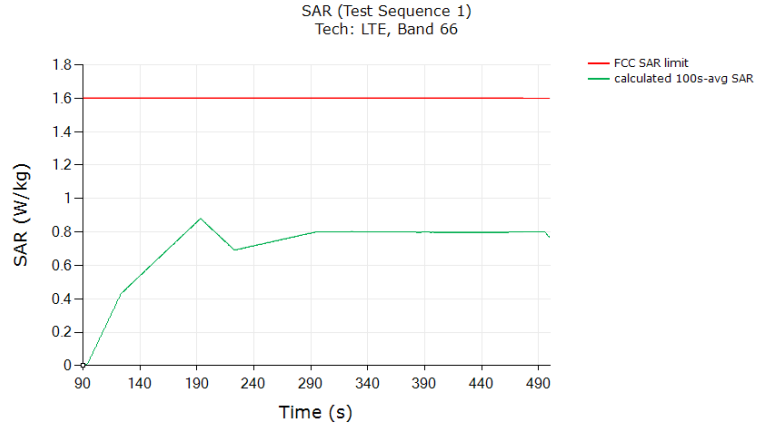

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.879 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

SAR test results for test sequence 2:

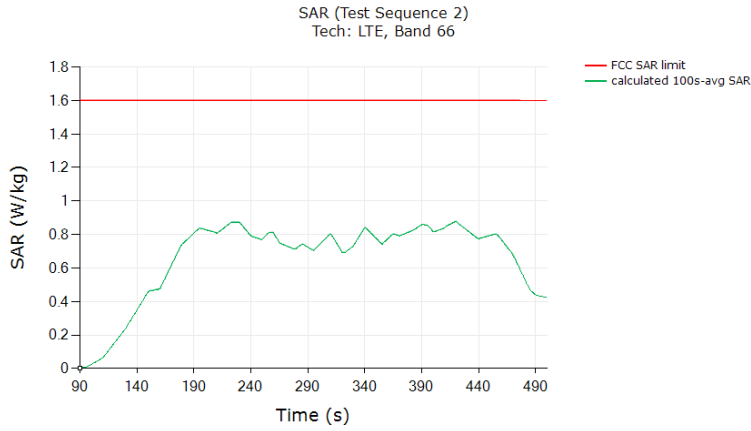


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.877 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |




6.2.4 LTE Band 48 SAR test results

SAR test results for test sequence 1:

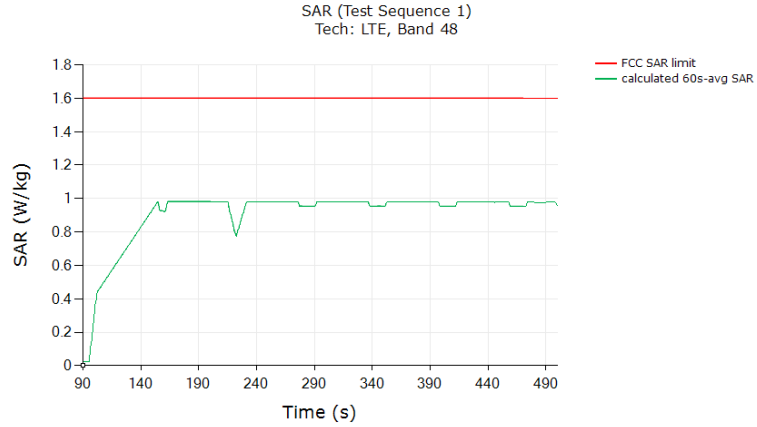

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.981 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |


SAR test results for test sequence 2:

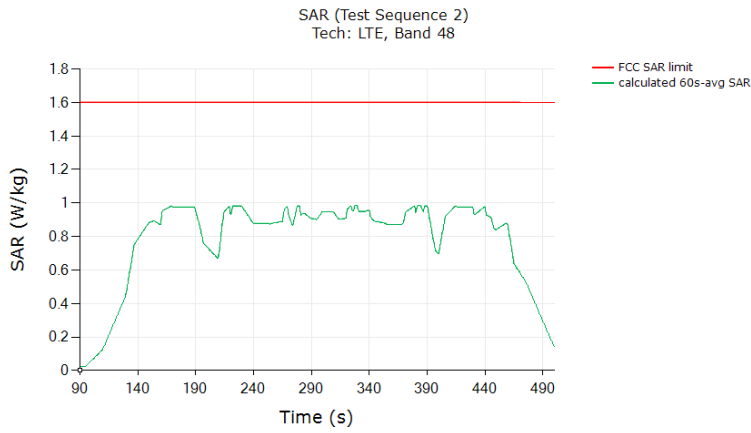

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.982 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |


6.2.5 5G NR FR1 n5 SAR test results

SAR test results for test sequence 1:

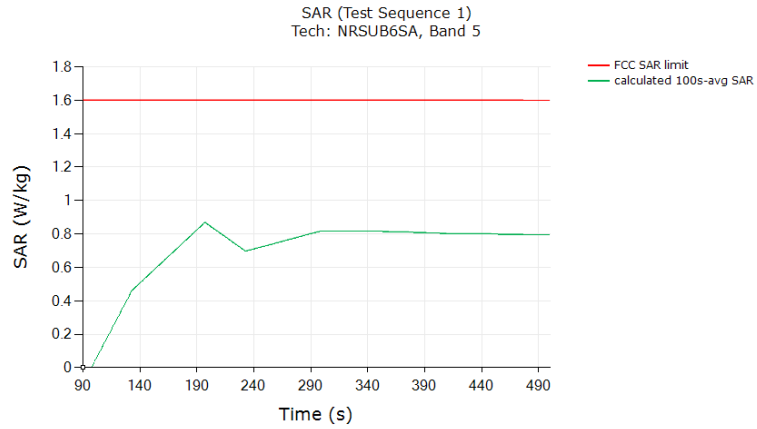

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.868 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

SAR test results for test sequence 2:

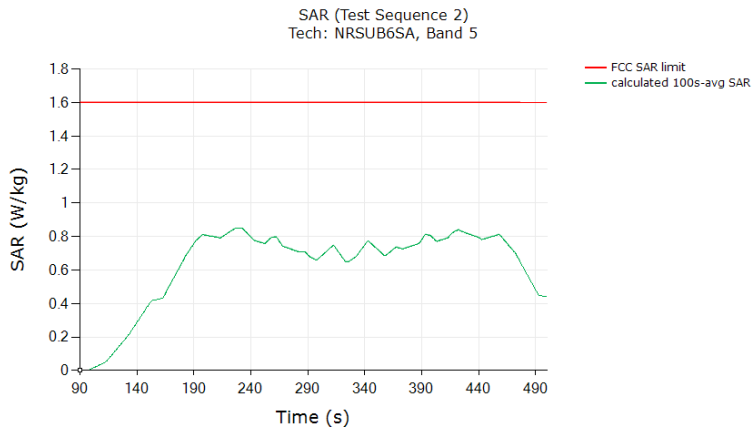


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 100s-time averaged 1gSAR (green curve) | 0.848 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |




6.2.6 5G NR FR1 n77 SAR test results

SAR test results for test sequence 1:

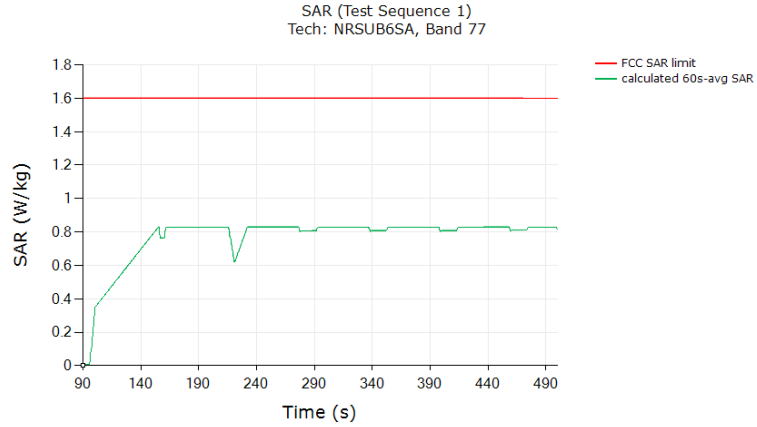

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.830 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

SAR test results for test sequence 2:

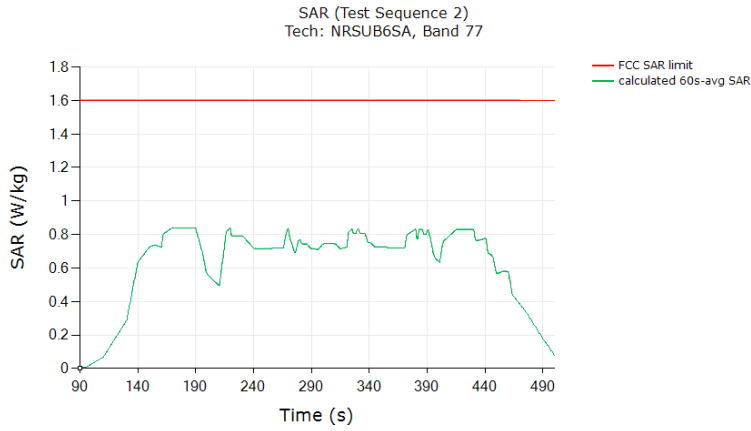


| | |
|---|--------|
| | (W/kg) |
| FCC 1gSAR limit | 1.6 |
| Max 60s-time averaged 1gSAR (green curve) | 0.839 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |



6.2.7 WLAN 2.4GHz SISO SAR test results

SAR test results for test sequence 1:

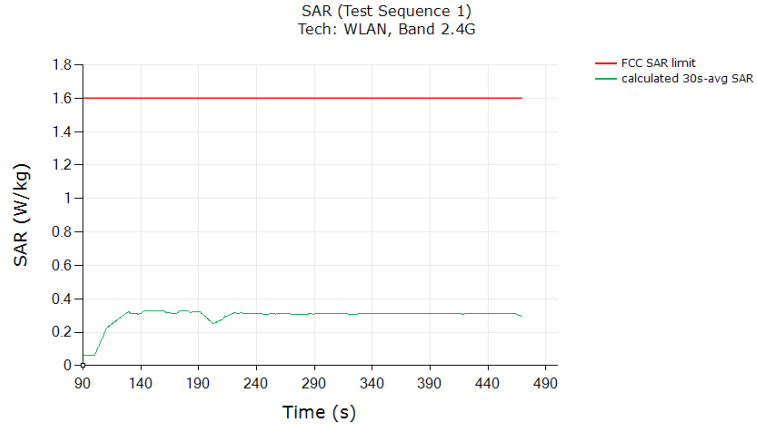


| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 30s-time averaged 1gSAR (green curve) | 0.327 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |



6.2.8 WLAN 5GHz MIMO SAR test results

SAR test results for test sequence 1:

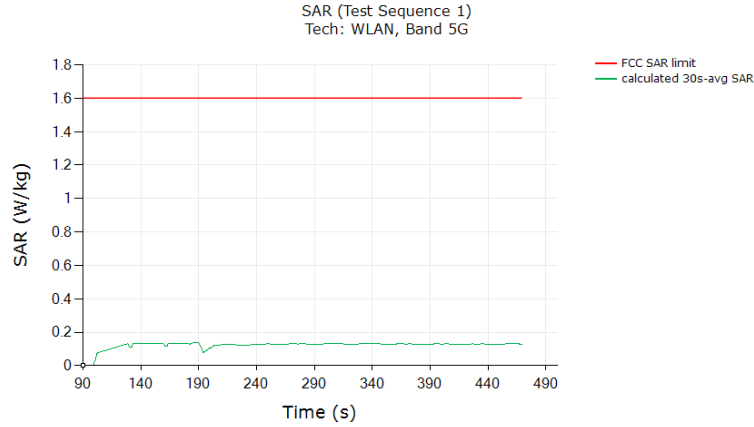

| | (W/kg) |
|---|--------|
| FCC 1gSAR limit | 1.6 |
| Max 30s-time averaged 1gSAR (green curve) | 0.136 |
| Validated: Max time averaged SAR (green curve) does not exceed measured SAR at Plimit +total uncertainty | |

7 Conclusions

Qualcomm Smart Transmit feature employed has been validated through the conducted/ radiated power measurement, as well as SAR measurement.

As demonstrated in this report, the power limiting enforcement is effective and the total normalized time-averaged RF exposure does not exceed 1.0 for all the transmission scenarios described in Section 2. Therefore, the EUT complies with FCC RF exposure requirement.

Appendix A. Test Sequences

1. Test sequence is generated based on below parameters of the EUT:
 - a. Measured maximum power (P_{max})
 - b. Measured Tx_power_at_SAR_design_target (P_{limit})
 - c. Reserve_power_margin (dB)
 - $P_{reserve} \text{ (dBm)} = \text{measured } P_{limit} \text{ (dBm)} - \text{Reserve_power_margin (dB)}$
 - d. SAR_time_window (100s for FCC)
2. Test Sequence 1 Waveform:

Based on the parameters above, the Test Sequence 1 is generated with one transition between high and low Tx powers. Here, high power = P_{max} ; low power = $P_{max}/2$, and the transition occurs after 80 seconds at high power P_{max} . As long as the power enforcement is taking into effective during one 100s/60s time window, the validation test with this defined test sequence 1 is valid, otherwise, select other radio configuration (band/DSI within the same technology group) having lower P_{limit} for this test. The Test sequence 1 waveform is shown below:

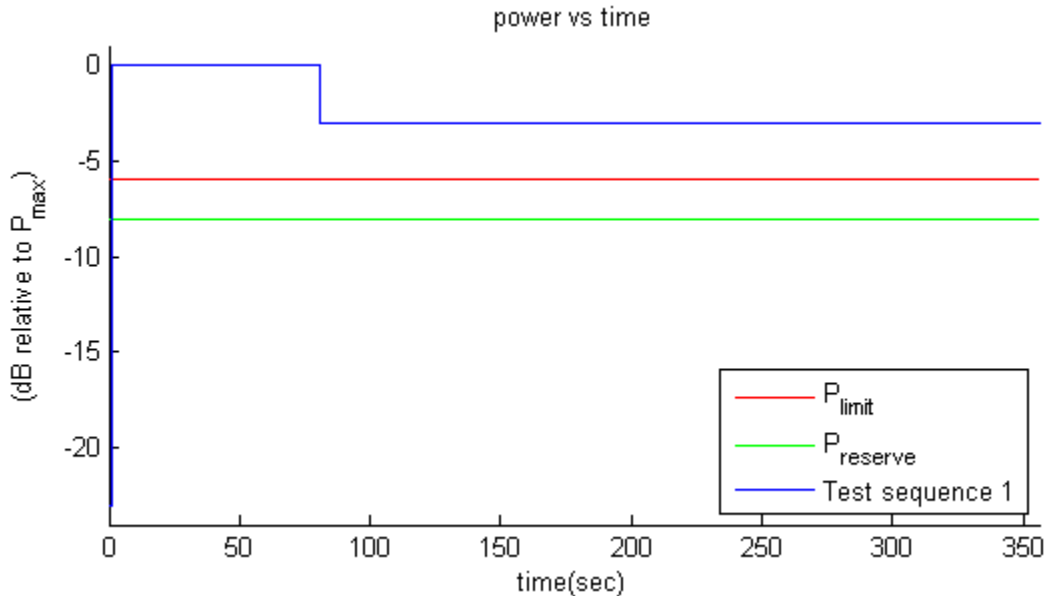


Figure 0-1 Test sequence 1 waveform



3. Test Sequence 2 Waveform:

Based on the parameters in A-1, the Test Sequence 2 is generated as described in Table 10-1, which contains two 170 second-long sequences (yellow and green highlighted rows) that are mirrored around the center row of 20s, resulting in a total duration of 360 seconds:

Table A-1 Test Sequence 2

| Time duration (seconds) | dB relative to P_{limit} or $P_{reserve}$ |
|-------------------------|---|
| 15 | $P_{reserve} - 2$ |
| 20 | P_{limit} |
| 20 | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10 | $P_{reserve} - 6$ |
| 20 | P_{max} |
| 15 | P_{limit} |
| 15 | $P_{reserve} - 5$ |
| 20 | P_{max} |
| 10 | $P_{reserve} - 3$ |
| 15 | P_{limit} |
| 10 | $P_{reserve} - 4$ |
| 20 | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10 | $P_{reserve} - 4$ |
| 15 | P_{limit} |
| 10 | $P_{reserve} - 3$ |
| 20 | P_{max} |
| 15 | $P_{reserve} - 5$ |
| 15 | P_{limit} |
| 20 | P_{max} |
| 10 | $P_{reserve} - 6$ |
| 20 | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 20 | P_{limit} |
| 15 | $P_{reserve} - 2$ |



The Test Sequence 2 waveform is shown in Figure A-2.

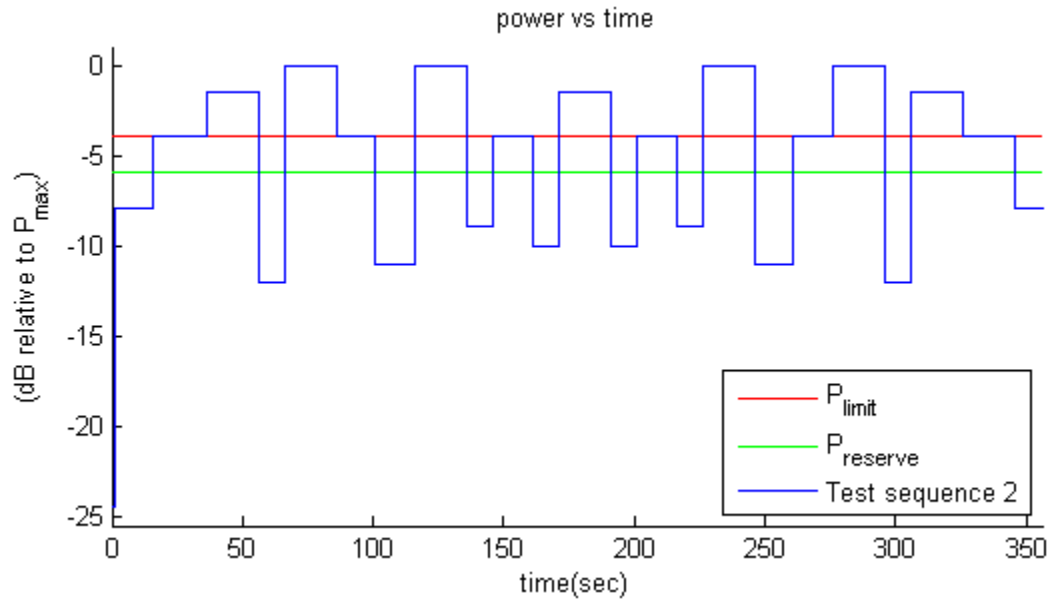


Figure A-2 Test Sequence 2 waveform

Table A-2 Test Sequence 1 for WLAN radio

| Time duration (seconds) | Duty cycle (%) |
|-------------------------|----------------|
| 80 | 100% |
| 120 | 50% |

Appendix B. Test Procedures for 5G NR + LTE Radio

Appendix B provides the test procedures for validating Qualcomm Smart Transmit feature for LTE + 5G NR non-standalone (NSA) mode transmission scenario, where sub-6GHz LTE link acts as an anchor.

1 Time-varying Tx power test for 5G NR in NSA mode

Follows Section 3.2.1 to select test configurations for time-varying test. This test is performed with two pre-defined test sequences (described in Section 3.1) applied to 5G NR (with LTE on all-down bits or low power for the entire test after establishing the LTE+5G NR call with the callbox). Follow the test procedures described in Section 3.3.1 to demonstrate the effectiveness of power limiting enforcement and that the time averaged Tx power of 5G NR when converted into 1gSAR values does not exceed the regulatory limit at all times (see Eq. (1a) and (1b)). 5G NR response to test sequence1 and test sequence2 will be similar to other technologies (say, LTE), and are shown in Sections 5.3.5 and 5.3.6.

2 Switch in SAR exposure between LTE vs. 5G NR during transmission


This test is to demonstrate that Smart Transmit feature accurately accounts for switching in exposures among SAR for LTE radio only, SAR from both LTE radio and 5G NR, and SAR from 5G NR only scenarios, and ensures total time-averaged RF exposure compliance with FCC limit.

Test procedure:

1. Measure conducted Tx power corresponding to P_{limit} for LTE and 5G NR in selected band. Test condition to measure conducted P_{limit} is:
 - Establish device in call with the callbox for LTE in desired band. Measure conducted Tx power corresponding to LTE P_{limit} with Smart Transmit Peak exposure mode enabled, callbox set to request maximum power.
 - Repeat above step to measure conducted Tx power corresponding to 5G NR P_{limit} . If testing LTE+5G NR in non-standalone mode, then establish LTE+5G NR call with callbox and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from 5G NR, measured conducted Tx power corresponds to radio2 P_{limit} (as radio1 LTE is at all-down bits)
2. Set EUT to the intended Smart Transmit exposure mode for LTE + 5G NR call. First, establish LTE connection in all-up bits with the callbox, and then 5G NR connection is added with callbox requesting UE to transmit at maximum power in 5G NR. As soon as the 5G NR connection is established, request all-down bits on LTE link (otherwise, 5G NR will not have sufficient RF exposure margin to sustain the call with LTE in all-up bits). Continue LTE (all-down bits)+5G NR transmission for more than

- one time-window duration to test predominantly 5G NR SAR exposure scenario (as SAR exposure is negligible from all-down bits in LTE). After at least one time-window, request LTE to go all-up bits to test LTE SAR and 5G NR SAR exposure scenario. After at least one more time-window, drop (or request all-down bits) 5G NR transmission to test predominantly LTE SAR exposure scenario. Continue the test for at least one more time-window. Record the conducted Tx powers for both LTE and 5G NR for the entire duration of this test.
3. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and 5G NR links. Similar to technology/band switch test in Section 3.3.3, convert the conducted Tx power for both these radios into 1gSAR value (see Eq. (6a) and (6b)) using corresponding technology/band P_{limit} measured in Step 1, and then perform 100s running average to determine time-averaged 1gSAR versus time as illustrated in Figure 3-1.
 4. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.
 5. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 3, (b) computed time-averaged 1gSAR versus time determined in Step 3, and (c) corresponding regulatory $1gSAR_{limit}$ of 1.6W/kg.


The validation criteria is, at all times, the time-averaged 1gSAR versus time shall not exceed the regulatory $1gSAR_{limit}$ of 1.6W/kg.



Appendix C. cDASY6 System Verification

1 The system to be used for the SAR and near field power density measurement

- SPEAG DASY6 system
- SPEAG cDASY6 5G module software
- EUmWVx probe
- 5G Phantom cover
- SAR phantom (SAM-Twin/ELI Phantom)
- SAR probe (EX3D, ES3D probes)

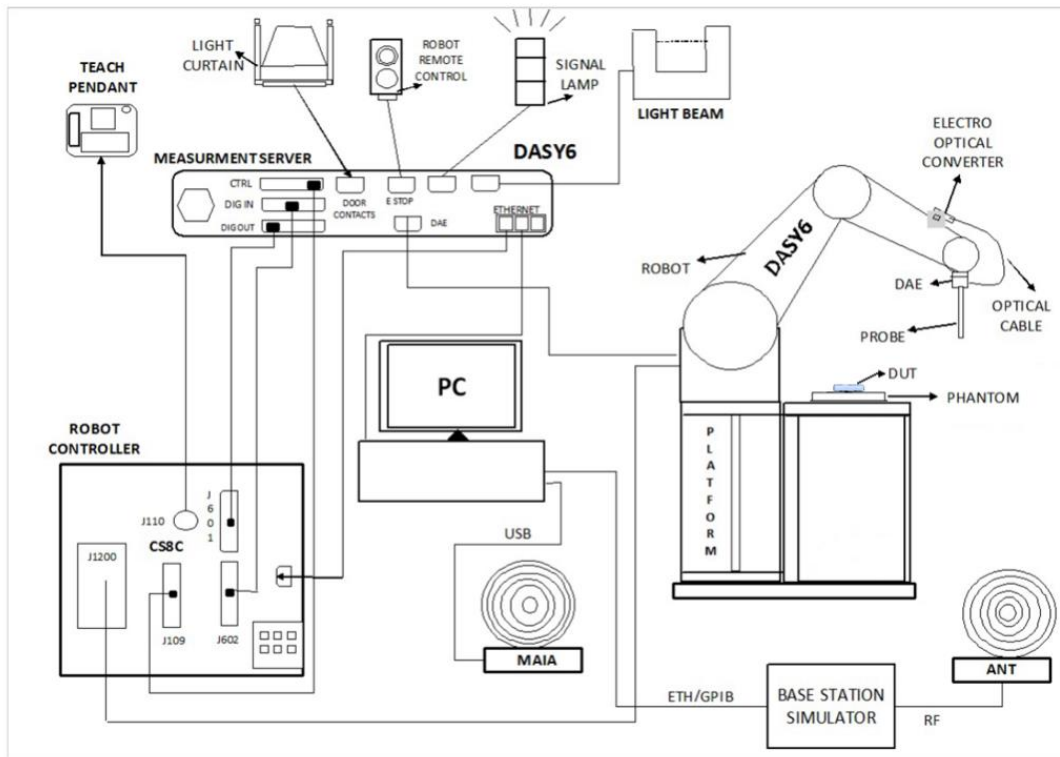


2 Test Site Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

| Testing Laboratory | | | |
|--------------------|---|---------------------|--------------------------------|
| Test Firm | Sporton International Inc. (Shenzhen) | | |
| Test Site Location | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | SAR02-SZ | CN1256 | 421272 |


3 SAR E-Field Probe

| | | |
|----------------------|---|--|
| Construction | Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| Frequency | 4 MHz – >10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz) | |
| Directivity | ± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis) | |
| Dynamic Range | 10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g) | |
| Dimensions | Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm | |

4 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

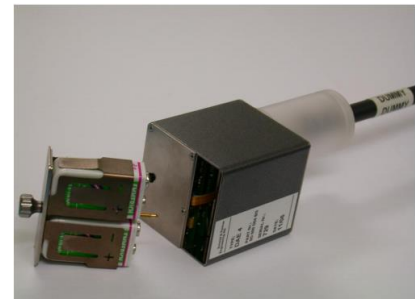



5 Test Equipment List

| Manufacturer | Name of Equipment | Type/Model | Serial Number | Calibration | |
|---------------|-------------------------------------|----------------------------------|-------------------|---------------|---------------|
| | | | | Last Cal. | Due Date |
| SPEAG | 835MHz System Validation Kit | D835V2 | 4d162 | Dec. 17, 2021 | Dec. 15, 2024 |
| SPEAG | 1750MHz System Validation Kit | D1750V2 | 1137 | Oct. 19, 2021 | Oct. 17, 2024 |
| SPEAG | 1900MHz System Validation Kit | D1900V2 | 5d182 | Dec. 20, 2021 | Dec. 18, 2024 |
| SPEAG | 2450MHz System Validation Kit | D2450V2 | 924 | Nov. 03, 2023 | Nov. 02, 2024 |
| SPEAG | 3700MHz System Validation Kit | D3700V2 | 1037 | May 09, 2022 | May 07, 2025 |
| SPEAG | 3900MHz System Validation Kit | D3900V2 | 1048 | Mar. 09, 2023 | Mar. 07, 2026 |
| SPEAG | 5000MHz System Validation Kit | D5GHzV2 | 1341 | Dec. 13, 2021 | Dec. 11, 2024 |
| SPEAG | Data Acquisition Electronics | DAE4 | 1664 | Jul. 10, 2024 | Jul. 09, 2025 |
| SPEAG | Dosimetric E-Field Probe | EX3DV4 | 3819 | Aug. 22, 2024 | Aug. 21, 2025 |
| SPEAG | SAM Twin Phantom | QD 000 P40 CD | 1670 | NCR | NCR |
| SPEAG | Phone Positioner | N/A | N/A | NCR | NCR |
| R&S | Wideband Radio Communication Tester | CMW500 | 157651 | Dec. 28, 2023 | Dec. 27, 2024 |
| R&S | Wideband Radio Communication Tester | CMW500 | 116159 | Oct. 16, 2023 | Oct. 15, 2024 |
| Keysight | UXM 5G Wireless Test Platform | E7515B | MY59321492 | Oct. 17, 2023 | Oct. 16, 2024 |
| Keysight | Network Analyzer | E5071C | MY46523671 | Oct. 16, 2023 | Oct. 15, 2024 |
| Speag | Dielectric Assessment KIT | DAK-3.5 | 1071 | Feb. 19, 2024 | Feb. 18, 2025 |
| Agilent | Signal Generator | N5181A | MY50145381 | Dec. 28, 2023 | Dec. 27, 2024 |
| Anritsu | Power Sensor | MA2411B | 1542004 | Dec. 28, 2023 | Dec. 27, 2024 |
| Anritsu | Power Meter | ML2495A | 1339473 | Dec. 28, 2023 | Dec. 27, 2024 |
| R&S | Power Sensor | NRP50S | 101254 | Apr. 08, 2024 | Apr. 07, 2025 |
| R&S | Power Sensor | NRP50S | 101548 | Dec. 27, 2023 | Dec. 26, 2024 |
| R&S | Power Sensor | NRP8S | 109228 | Apr. 08, 2024 | Apr. 07, 2025 |
| TES | Hygrometer | 1310 | 200505600 | Jul. 08, 2024 | Jul. 07, 2025 |
| Anymetre | Thermo-Hygrometer | JR593 | 2015030904 | Jul. 09, 2024 | Jul. 08, 2025 |
| AR | Amplifier | 5S1G4 | 0333096 | Apr. 08, 2024 | Apr. 07, 2025 |
| Mini-Circuits | Amplifier | ZVE-3W-83+ | 599201528 | Apr. 08, 2024 | Apr. 07, 2025 |
| Hongyitong | Shielding Box | 182-200 | AGTE2013182200016 | Oct. 16, 2023 | Oct. 15, 2024 |
| SPEAG | Device Holder | N/A | N/A | N/A | N/A |
| ARRA | Power Divider | A3200-2 | N/A | Note 1 | |
| TRM | Directional Coupler | DCS1070 | 50021-1 | Note 1 | |
| TRM | Directional Coupler | DCS1070 | 50021-2 | Note 1 | |
| PE | Directional Coupler | 2214-10 | 53919 | Note 1 | |
| AGILENT | Directional Coupler | 0955-0148 | 116232 | Note 1 | |
| Jinkexinhua | Attenuator | 10db-8G | N/A | Note 1 | |
| AGILENT | Attenuator | 8494B | MY42148574 | Note 1 | |
| WI | 3G High Pass Filter | WHKX3.0/18G-10SS | 4 | Note 1 | |
| WI | Band Reject Filter | WRCJV12-5120-5150-5350-5380-40SS | 30 | Note 1 | |
| WI | Band Reject Filter | WRCJV12-5695-5725-5850-5880-40SS | 33 | Note 1 | |

General Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix D can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

6 SAR system verification and validation

6.1. Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity (σ) | Permittivity (εr) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|------------------|-------------------|
| 835 | 40.3 | 57.9 | 0.2 | 1.4 | 0.2 | 0 | 0.90 | 41.5 |
| 1750, 1900, 2000 | 55.2 | 0 | 0 | 0.3 | 0 | 44.5 | 1.40 | 40.0 |
| 2300 | 55.0 | 0 | 0 | 0 | 0 | 45.0 | 1.67 | 39.5 |
| 2600 | 54.8 | 0 | 0 | 0.1 | 0 | 45.1 | 1.96 | 39.0 |

Simulating Liquid for 5GHz, Manufactured by SPEAG

| Ingredients | (% by weight) |
|--------------------|---------------|
| Water | 64~78% |
| Mineral oil | 11~18% |
| Emulsifiers | 9~15% |
| Additives and Salt | 2~3% |

<Tissue Check Results>

| Frequency (MHz) | Liquid Temp. (°C) | Conductivity (σ) | Permittivity (εr) | Conductivity Target (σ) | Permittivity Target (εr) | Delta (σ) (%) | Delta (εr) (%) | Limit (%) | Date |
|-----------------|-------------------|------------------|-------------------|-------------------------|--------------------------|---------------|----------------|-----------|-----------|
| 835 | 22.4 | 0.919 | 43.200 | 0.90 | 41.50 | 2.11 | 4.10 | ±5 | 2024/9/14 |
| 1750 | 22.3 | 1.340 | 41.700 | 1.37 | 40.10 | -2.19 | 3.99 | ±5 | 2024/9/14 |
| 1900 | 22.5 | 1.440 | 41.700 | 1.40 | 40.00 | 2.86 | 4.25 | ±5 | 2024/9/14 |
| 2450 | 22.4 | 1.820 | 41.000 | 1.80 | 39.20 | 1.11 | 4.59 | ±5 | 2024/9/15 |
| 3700 | 22.3 | 3.100 | 38.900 | 3.12 | 37.70 | -0.64 | 3.18 | ±5 | 2024/9/15 |
| 3900 | 22.6 | 3.200 | 38.600 | 3.33 | 37.51 | -3.90 | 2.91 | ±5 | 2024/9/15 |
| 5600 | 22.5 | 5.000 | 35.600 | 5.07 | 35.50 | -1.38 | 0.28 | ±5 | 2024/9/15 |



6.2. System Verification

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C.

<System Verification Results>

1g SAR

| Date | Frequency (MHz) | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|------------------|------------|-----------|---------|------------------------|------------------------|--------------------------|---------------|
| 2024/9/14 | 835 | 250 | 4d162 | 3819 | 1664 | 2.520 | 9.640 | 10.08 | 4.56 |
| 2024/9/14 | 1750 | 250 | 1137 | 3819 | 1664 | 9.560 | 36.500 | 38.24 | 4.77 |
| 2024/9/14 | 1900 | 250 | 5d182 | 3819 | 1664 | 10.400 | 39.600 | 41.6 | 5.05 |
| 2024/9/15 | 2450 | 250 | 924 | 3819 | 1664 | 13.000 | 52.300 | 52 | -0.57 |
| 2024/9/15 | 3700 | 100 | 1037 | 3819 | 1664 | 7.030 | 66.700 | 70.3 | 5.40 |
| 2024/9/15 | 3900 | 100 | 1048 | 3819 | 1664 | 7.220 | 69.100 | 72.2 | 4.49 |
| 2024/9/15 | 5600 | 100 | 1341 | 3819 | 1664 | 8.800 | 84.500 | 88 | 4.14 |

10g SAR

| Date | Frequency (MHz) | Input Power (mW) | Dipole S/N | Probe S/N | DAE S/N | Measured 10g SAR (W/kg) | Targeted 10g SAR (W/kg) | Normalized 10g SAR (W/kg) | Deviation (%) |
|-----------|-----------------|------------------|------------|-----------|---------|-------------------------|-------------------------|---------------------------|---------------|
| 2024/9/14 | 835 | 250 | 4d162 | 3819 | 1664 | 1.650 | 6.260 | 6.6 | 5.43 |
| 2024/9/14 | 1750 | 250 | 1137 | 3819 | 1664 | 5.160 | 19.200 | 20.64 | 7.50 |
| 2024/9/14 | 1900 | 250 | 5d182 | 3819 | 1664 | 5.430 | 20.200 | 21.72 | 7.52 |
| 2024/9/15 | 2450 | 250 | 924 | 3819 | 1664 | 6.070 | 24.500 | 24.28 | -0.90 |
| 2024/9/15 | 3700 | 100 | 1037 | 3819 | 1664 | 2.630 | 24.600 | 26.3 | 6.91 |
| 2024/9/15 | 3900 | 100 | 1048 | 3819 | 1664 | 2.570 | 24.100 | 25.7 | 6.64 |
| 2024/9/15 | 5600 | 100 | 1341 | 3819 | 1664 | 2.490 | 24.000 | 24.9 | 3.75 |